

# **FCC Test Report**

FCC ID : R3USCBT12

Equipment : GSP 370 Wireless gaming headset

Model No. : SCBT12

Brand Name : SENNHEISER

Applicant : Sennheiser Communications

Address : Industriparken 27, Ballerup 2750 , Denmark

Standard : 47 CFR FCC Part 15.247

Received Date : Apr. 19, 2019

Tested Date : Jun. 27 ~ Jul. 04, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

RA

TAF)
Testing Laboratory

2732

Report No.: FR941902 Page : 1 of 34



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	g
1.6	Deviation from Test Standard and Measurement Procedure	g
1.7	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	17
3.4	Power Spectral Density	19
3.5	Emissions in Restricted Frequency Bands	22
3.6	Emissions in non-restricted Frequency Bands	32
4	TEST LABORATORY INFORMATION	34

Page: 2 of 34



## **Release Record**

Report No.	Version	Description	Issued Date
FR941902	Rev. 01	Initial issue	Aug. 30, 2019
FR941902	Rev. 02	Modify antenna information Modify applicant	Sep. 06, 2019

Report No.: FR941902 Page: 3 of 34



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.156MHz 56.18 (Margin -9.51dB) - QP	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 95.96MHz	Pass
15.209	Radiated Effissions	40.12 (Margin -3.38dB) - PK	F a 3 3
15.247(b)(3)	Maximum Output Power	Power [dBm]: 4.64	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR941902 Page: 4 of 34



## 1 General Description

### 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)							
2400-2483.5 V5.0 LE 2402-2480 0-39 [40] 1 Mbps							
Note 1: Bluetooth LE	Note 1: Bluetooth LE (Low energy) uses GFSK modulation.						

#### 1.1.2 Antenna Details

Ant. No.	Туре	Connector	Gain (dBi)	Remarks
1	PCB		1.33	

## 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	DC 5V from host DC 3.7V from battery
	,

#### 1.1.4 Accessories

	Accessories			
No.	Equipment	Description		
1	Battery	Brand Name: Synergy Model Name: AHB732038TPCT Power Rating: 3.7Vdc, 530 mAh		
2	USB cable	Brand Name: SENNHEISER Model Name: USB cable_1 Power line: 2.05m shielded cable w/o core		

Report No.: FR941902 Page: 5 of 34



## 1.1.5 Channel List

	Frequency band (MHz)				2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

## 1.1.6 Test Tool and Duty Cycle

Test Tool	sysradio_gui, version: 52389			
Duty Cycle and Duty Factor	Modulation Mode Duty Cycle (%)		Duty Factor (dB)	
Duty Cycle and Duty Factor	GFSK/1Mbps	65.74%	1.82	

### 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)			
Wodulation Wode	2402	2440	2480	
GFSK/1Mbps	4 4 4			


Report No.: FR941902 Page: 6 of 34



## 1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model FCC ID Remarks						
1	Notebook	DELL	Latitude E6440	DoC			

## 1.3 Test Setup Chart

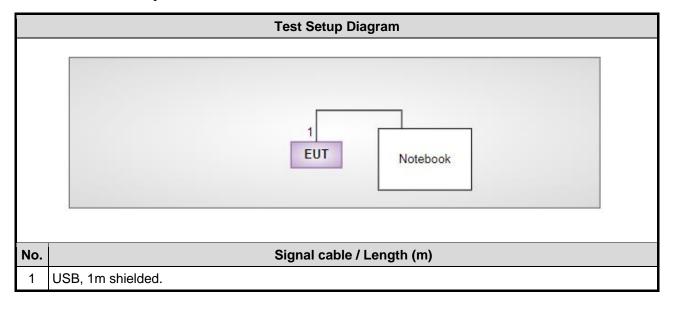



## 1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (	Conduction room 1 / (CO01-WS)						
Instrument	ent Manufacturer Model No. Serial No. Calibration Date Calibration Until							
Receiver	R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020			
LISN	R&S	ENV216	101579	Mar. 08, 2019	Mar. 07, 2020			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 23, 2018	Oct. 22, 2019			
Measurement Software AUDIX e3 6.120210k NA NA NA								

Test Item	Radiated Emission							
Test Site	966 chamber 3 / (03C	966 chamber 3 / (03CH03-WS)						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R&S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020			
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 17, 2019	Apr. 16, 2020			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 07, 2019	Jan. 06, 2020			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019			
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019			
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019			
Preamplifier	EMC	EMC02325	980187	Aug. 24, 2018	Aug. 23, 2019			
Preamplifier	Agilent	83017A	MY53270014	Aug. 09, 2018	Aug. 08, 2019			
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019			
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/ <b>4</b>	Oct. 01, 2018	Sep. 30, 2019			
RF cable-8M	EMC	EMC104-SM-SM-80 00	181107	Oct. 01, 2018	Sep. 30, 2019			
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Oct. 01, 2018	Sep. 30, 2019			
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Oct. 01, 2018	Sep. 30, 2019			
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Oct. 01, 2018	Sep. 30, 2019			
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Oct. 01, 2018	Sep. 30, 2019			
Measurement Software	AUDIX	e3	6.120210g	NA	NA			
Note: Calibration Inter	rval of instruments liste	d above is one year.						

Report No.: FR941902 Page: 8 of 34

Report Version: Rev. 02



Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020
Power Meter	Anritsu	ML2495A	1241002	Oct. 09, 2018	Oct. 08, 2019
Power Sensor	Anritsu	MA2411B	1207366	Oct. 09, 2018	Oct. 08, 2019
DC POWER SOURCE	GW INSTEK	GPC-6030D	EM892433	Oct. 25, 2018	Oct. 24, 2019
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Inte	rval of instruments liste	d above is one year.		•	

#### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02

#### 1.6 Deviation from Test Standard and Measurement Procedure

None

## 1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty					
Parameters	Uncertainty				
Bandwidth	±34.130 Hz				
Conducted power	±0.808 dB				
Power density	±0.583 dB				
Conducted emission	±2.715 dB				
AC conducted emission	±2.92 dB				
Radiated emission ≤ 1GHz	±3.66 dB				
Radiated emission > 1GHz	±5.37 dB				

Report No.: FR941902 Page: 9 of 34

Report Version: Rev. 02



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 61%	Alex Tasi
Radiated Emissions	03CH03-WS	25°C / 61%	Roger Lu
RF Conducted	TH01-WS	23°C / 64%	Brad Wu

FCC Designation No.: TW0009FCC site registration No.: 207696

➤ ISED#: 10807A

➤ CAB identifier: TW2732

#### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	BT LE BT LE	2402 2402	1Mbps	
Maximum Output Power 6dB bandwidth Power spectral density Radiated Emissions > 1GHz	BT LE BT LE	2402, 2440, 2480 2402, 2440, 2480	1Mbps	

#### NOTE:

Report No.: FR941902 Page: 10 of 34

Report Version: Rev. 02

<sup>1.</sup> The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.



### 3 Transmitter Test Results

#### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit						
Frequency Emission (MHz) Quasi-Peak Average						
0.15-0.5	66 - 56 *	56 - 46 *				
0.5-5	56	46				
5-30 60 50						
Note 1: * Decreases with the logarith	m of the frequency.	1				

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

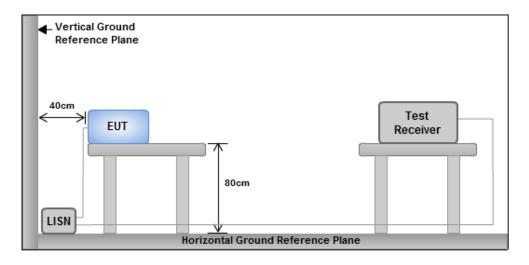

Note: 1. Support units were connected to second LISN.


Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Page: 11 of 34

Report No.: FR941902




#### 3.1.4 Test Result of Conducted Emissions

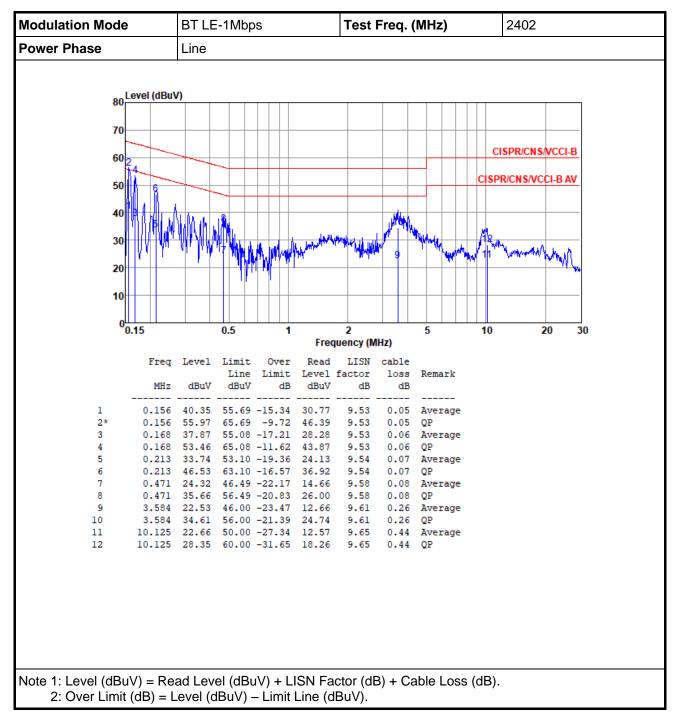

Report No.: FR941902 Page: 12 of 34

Report Version: Rev. 02



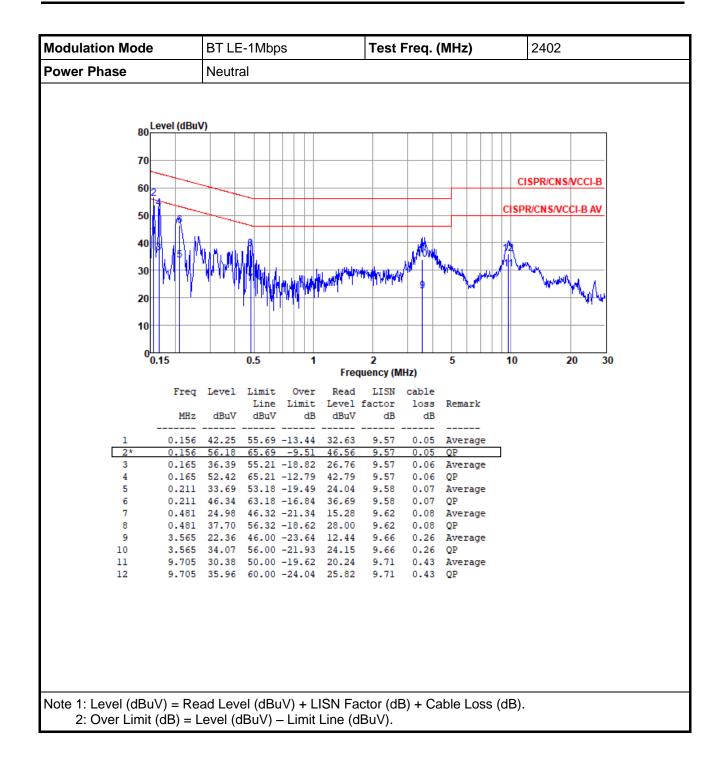

Page: 13 of 34

Report No.: FR941902 Report Version: Rev. 02



### 3.2 6dB and Occupied Bandwidth

#### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.2.2 Test Procedures


#### 6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### **Occupied Bandwidth**

- Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW.
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

#### 3.2.3 Test Setup



Report No.: FR941902 Page: 14 of 34



### 3.2.4 Test Result of 6dB and Occupied Bandwidth

#### **Summary**

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	688.406k	1.027M	1M03F1D	681.159k	1.024M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth; **Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


#### Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	684.783k	1.027M
2440MHz	Pass	500k	681.159k	1.024M
2480MHz	Pass	500k	688.406k	1.027M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

Page: 15 of 34



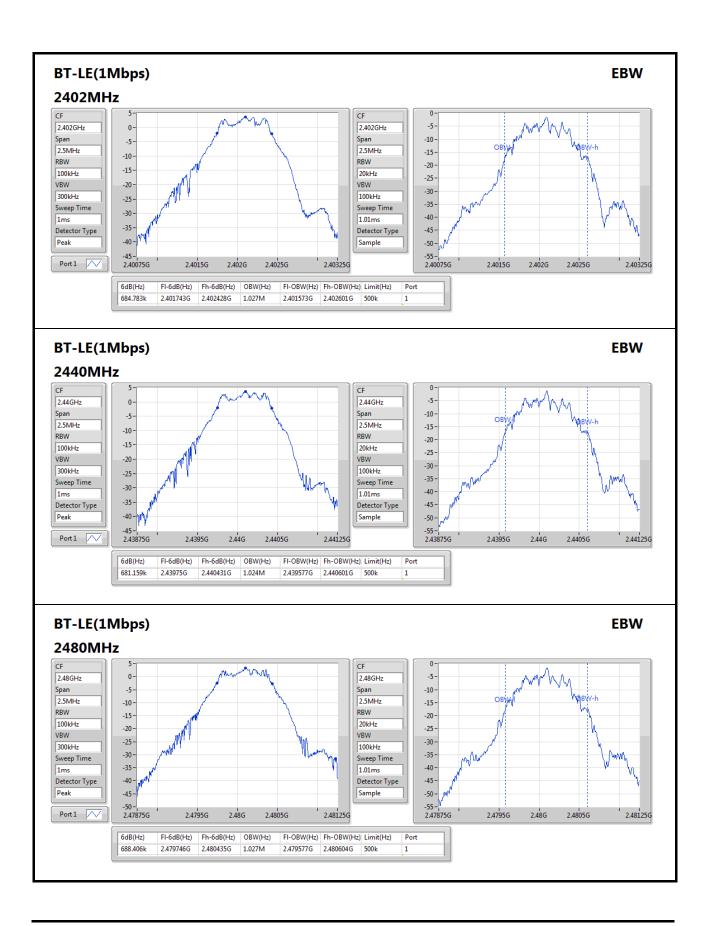

Report No.: FR941902 Page: 16 of 34

Report Version: Rev. 02



## 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1 Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



Report No.: FR941902 Page: 17 of 34



## 3.3.4 Test Result of Maximum Output Power

**Summary of Peak Conducted Output Power** 

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	4.64	0.00291

#### Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.33	4.64	30.00
2440MHz	Pass	1.33	4.34	30.00
2480MHz	Pass	1.33	4.15	30.00

**Summary of Conducted (Average) Output Power** 

Juninally of Conductor (Attorage) Carpat Forto				
Mode	Power	Power		
	(dBm)	(W)		
2.4-2.4835GHz	-	-		
BT-LE(1Mbps)	4.43	0.00277		

#### Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.33	4.43	-
2440MHz	Pass	1.33	4.16	-
2480MHz	Pass	1.33	3.95	-

Report No.: FR941902 Page: 18 of 34



## 3.4 Power Spectral Density


#### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.4.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

#### 3.4.3 Test Setup



Report No.: FR941902 Page: 19 of 34



## 3.4.4 Test Result of Power Spectral Density


**Summary** 

Mode	PD
	(dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-10.34

#### Result

Mode	Result	Gain	PD	PD Limit
		(dBi)	(dBm/RBW)	(dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.33	-10.66	8.00
2440MHz	Pass	1.33	-10.34	8.00
2480MHz	Pass	1.33	-11.00	8.00



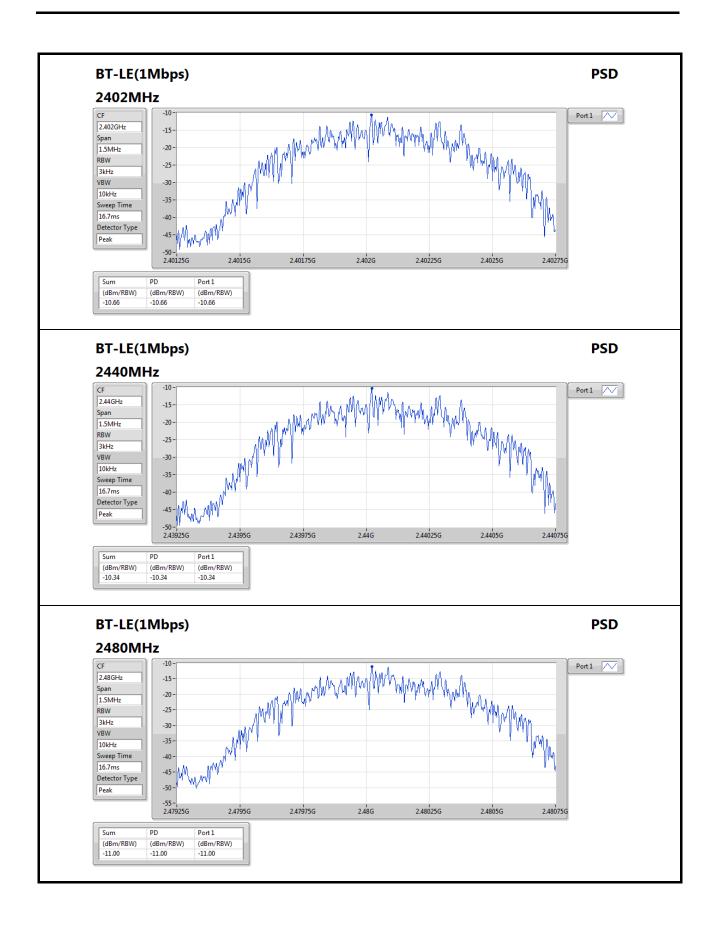

Report No.: FR941902 Page: 21 of 34

Report Version: Rev. 02



### 3.5 Emissions in Restricted Frequency Bands

#### 3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR941902 Page: 22 of 34




### 3.5.3 Test Setup

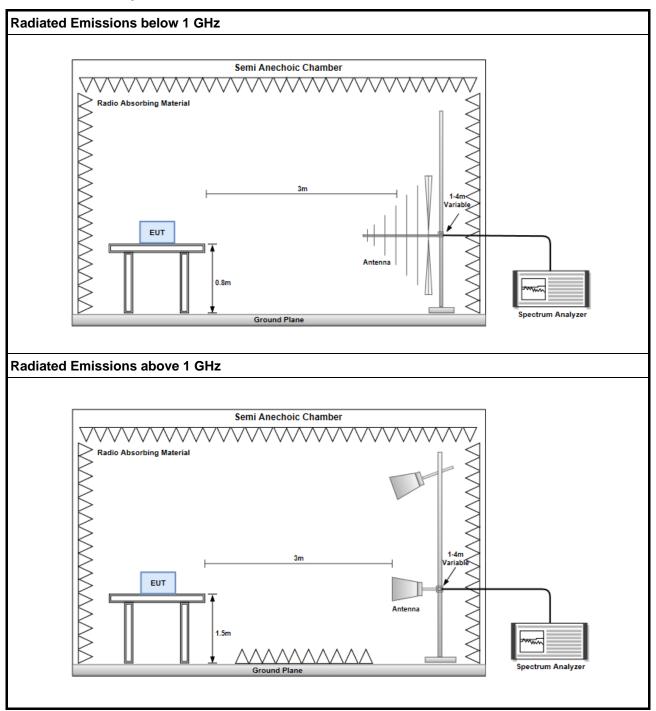



#### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

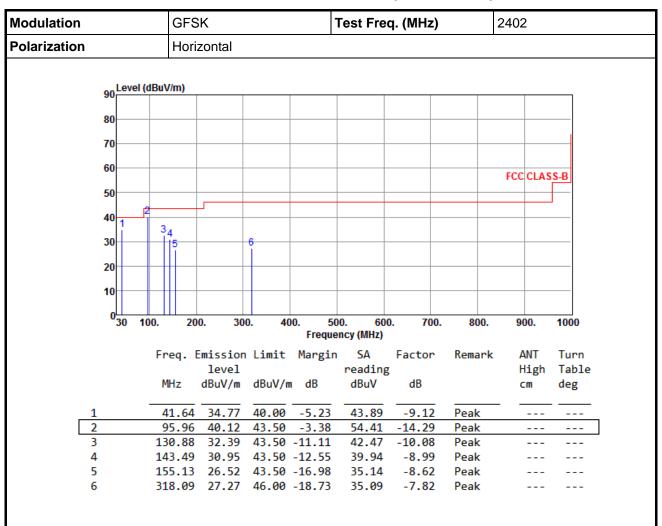

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR941902

Page: 24 of 34

Report Version: Rev. 02



Modulation	GFS	SK		7	Γest Free	q. (MHz)	)	2402		
Polarization	Vert	ical		·				I.		
90 Lev	el (dBuV/m)									
80										
70										
60										
00								FCC	CLAS	S-B
50										
40	_2									
li l	34					5 6				
30										
20										
10										
030	100. 20	0. 30	0. 40	00. 50	0. 600 ncy (MHz)	D. 700	800.	90	00.	1000
	Enog	Emission	limi+			Factor	Remark	. ^	NT	Turn
	rreq.	level	LIMIT	nai gin	reading		IVEIII AI		igh	Table
	MHz	dBuV/m	dBuV/n	ı dB	dBuV	dB			m	deg
1	41.64	36.41	40.00	-3.59	45.53	-9.12	Peak			
2		40.04			54.33	-14.29	Peak			
3	130.88				41.42	-10.08	Peak			
4	143.49			-11.04	41.45	-8.99	Peak			
5	633.34			-13.50	32.89	-0.39				
6	689.60	34.00	46.00	-12.00	33.63	0.37	Peak			

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR941902 Page: 25 of 34

Report Version: Rev. 02



#### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

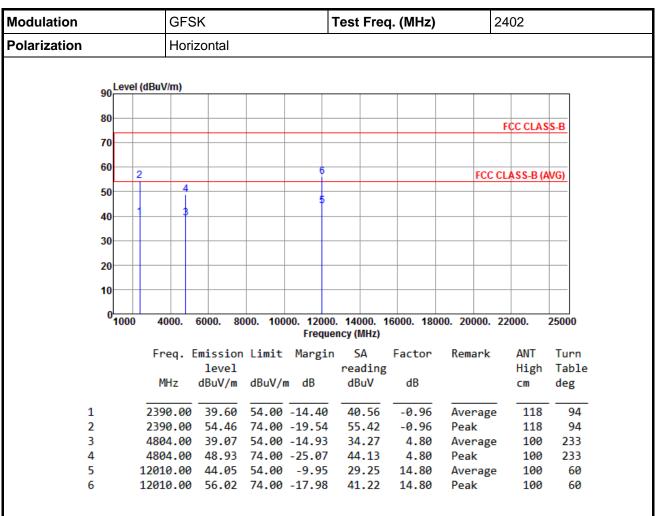


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).



Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

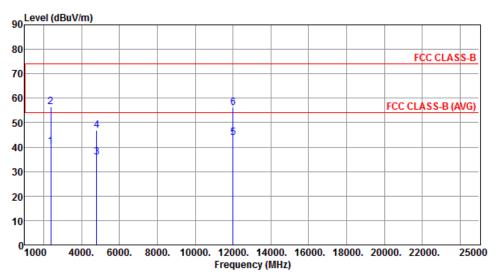

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	40.33	54.00	-13.67	41.29	-0.96	Average	100	2
2	2390.00	56.46	74.00	-17.54	57.42	-0.96	Peak	100	2
3	4804.00	35.93	54.00	-18.07	31.13	4.80	Average	119	268
4	4804.00	46.96	74.00	-27.04	42.16	4.80	Peak	119	268
5	12010.00	43.96	54.00	-10.04	29.16	14.80	Average	100	30
6	12010.00	56.05	74.00	-17.95	41.25	14.80	Peak	100	30

Page: 27 of 34

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).



Modulation			GF:	SK		-	Test Fred	q. (MHz)		2440	
Polarization			Hor	izontal					1		
	90	Level	(dBuV/m)								
	80										
	00									FCC CLAS	S-B
	70										
	60										
		_	21	- 8					FCC	CLASS-B (A	WG)
	50		ì								
	40	H.	\$ 5	1							
	30										
	30										
	20										
	10										
	0	1000	4000.	6000. 8	000. 100		. 14000. 1	16000. 180	00. 20000.	22000.	25000
			Frea.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
			4.	level		, g	reading			High	Table
			MHz	dBuV/m	dBuV/ı	n dB	dBuV	dB		cm	deg
	1		2390.00	39.33	54.00	-14.67	40.29	-0.96	Average	125	90
	2			52.45		-21.55	53.41	-0.96	Peak	125	90
	3		2483.50			-14.91	40.21	-1.12	Average		90
4	4		2483.50	52.47	74.00	-21.53	53.59	-1.12	Peak	125	90

Average

Average

Peak

Peak

100

100

100

100

231

231

50

50

Page: 28 of 34

4.91

4.91

10.32

10.32

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor , cable loss and amplifier gain

4880.00 38.76 54.00 -15.24 33.85

4880.00 48.18 74.00 -25.82 43.27 7320.00 39.56 54.00 -14.44 29.24

7320.00 51.61 74.00 -22.39 41.29

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR941902

Report Version: Rev. 02


5

6

7



Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Vertical		

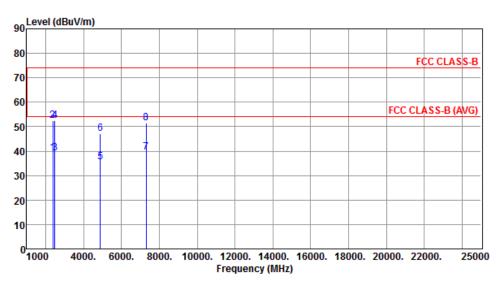

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	39.30	54.00	-14.70	40.26	-0.96	Average	100	1
2	2390.00	52.49	74.00	-21.51	53.45	-0.96	Peak	100	1
3	2483.50	39.27	54.00	-14.73	40.39	-1.12	Average	100	1
4	2483.50	52.36	74.00	-21.64	53.48	-1.12	Peak	100	1
5	4880.00	35.51	54.00	-18.49	30.60	4.91	Average	121	271
6	4880.00	47.00	74.00	-27.00	42.09	4.91	Peak	121	271
7	7320.00	39.44	54.00	-14.56	29.12	10.32	Average	100	60
8	7320.00	51.48	74.00	-22.52	41.16	10.32	Peak	100	60

Page: 29 of 34

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR941902



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

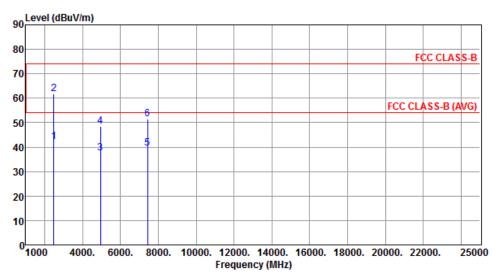

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	42.26	54.00	-11.74	43.38	-1.12	Average	126	95
2	2483.50	61.88	74.00	-12.12	63.00	-1.12	Peak	126	95
3	4960.00	37.56	54.00	-16.44	32.37	5.19	Average	100	220
4	4960.00	48.36	74.00	-25.64	43.17	5.19	Peak	100	220
5	7440.00	39.50	54.00	-14.50	29.15	10.35	Average	100	30
6	7440.00	51.63	74.00	-22.37	41.28	10.35	Peak	100	30

Page: 30 of 34

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR941902



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

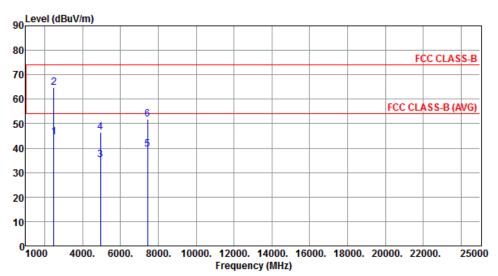

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
									_
1	2483.50	44.47	54.00	-9.53	45.59	-1.12	Average	100	20
2	2483.50	64.85	74.00	-9.15	65.97	-1.12	Peak	100	20
3	4960.00	35.20	54.00	-18.80	30.01	5.19	Average	119	269
4	4960.00	46.44	74.00	-27.56	41.25	5.19	Peak	119	269
5	7440.00	39.47	54.00	-14.53	29.12	10.35	Average	100	30
6	7440.00	51.64	74.00	-22.36	41.29	10.35	Peak	100	30

Page: 31 of 34

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR941902

Report Version: Rev. 02



## 3.6 Emissions in non-restricted Frequency Bands

#### 3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

#### 3.6.2 Test Procedures


#### Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

#### **Emission level measurement**

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level


#### 3.6.3 Test Setup



Report No.: FR941902 Page: 32 of 34



#### 3.6.4 Test Result of Emissions in non-restricted Frequency Bands

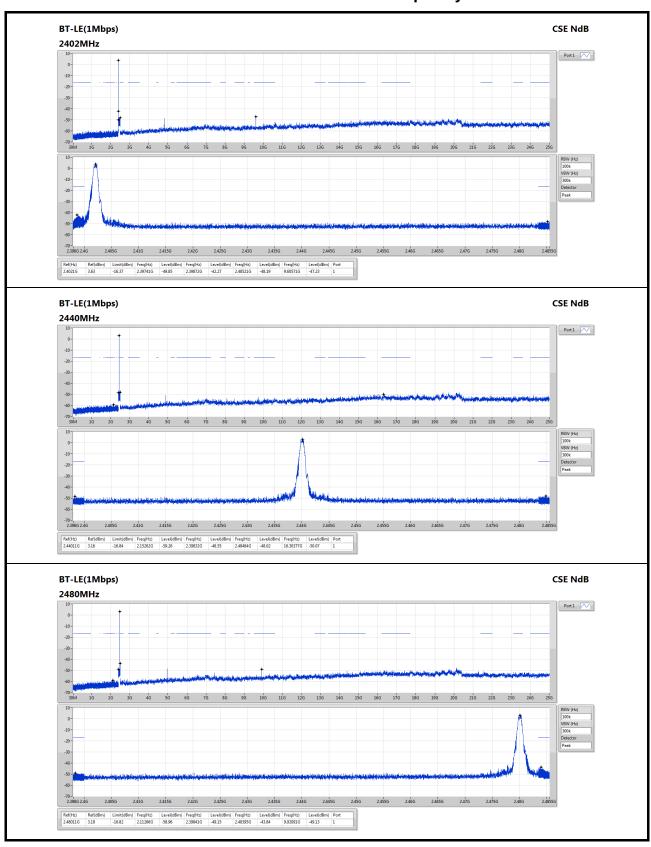

Report No.: FR941902

Report Version: Rev. 02



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

#### Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

#### Kwei Shan Site II

Tel: 886-3-271-8640 No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR941902 Page: 34 of 34