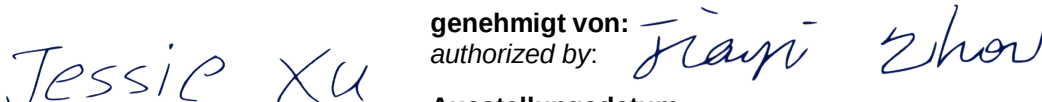


Prüfbericht-Nr.: Test report no.:	CN24PUOR 001	Auftrags-Nr.: Order no.:	326053788	Seite 1 von 32 Page 1 of 32
Kunden-Referenz-Nr.: Client reference no.:	1288983	Auftragsdatum: Order date:	2024-09-23	
Auftraggeber: Client:	IKEA of Sweden AB Box 702, SE-343 81 Älmhult, Sweden			
Prüfgegenstand: Test item:	Fixed Luminaire			
Bezeichnung / Typ-Nr.: Identification / Type no.:	T2404			
Auftrags-Inhalt: Order content:	TÜV Rheinland EMC service			
Prüfgrundlage: Test specification:	FCC 47 CFR Part 15, Subpart B:2023 Class B ICES-005:2018			
Wareneingangsdatum: Date of sample receipt:	2024-09-30	Refer to the EUT photos file		
Prüfmuster-Nr.: Test sample no:	A003829630-002 A003878456-001			
Prüfzeitraum: Testing period:	Refer to test report			
Ort der Prüfung: Place of testing:	Refer to clause 1.1			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Suzhou) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	genehmigt von: authorized by:			
Datum: Date:	2025-01-10		Ausstellungsdatum: Issue date: 2025-01-10	
Stellung / Position:	Project engineer		Stellung / Position: Authorizer	
Sonstiges / Other:	FCC ID: FHO-T2404 Test Firm Name: TUV Rheinland (Shanghai) Co., Ltd. Designation Number: CN1396 Test Firm Registration Number: 930979			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht-Nr.: CN24PUOR 001
Test report no.:

Seite 2 von 32
Page 2 of 32

Anmerkungen
Remarks

- | | |
|----------|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.
Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.
Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.
Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.: CN24PUOR 001
Test Report No.:

Seite 3 von 32
Page 3 of 32

Revision history of test report:

Report number	Issue date	Contents and reason for change if appropriate
CN24PUOR 001	2025-01-10	Initial release.

Contents

1	TEST SITES	5
1.1	TEST FACILITIES.....	5
2	GENERAL PRODUCT INFORMATION	6
2.1	PRODUCT FUNCTION AND INTENDED USE	6
2.2	RATINGS AND SYSTEM DETAILS.....	6
2.3	INDEPENDENT OPERATION MODES.....	6
2.4	DESCRIPTION OF INTERCONNECTING CABLES	6
2.5	NOISE GENERATING AND NOISE SUPPRESSING PARTS	6
2.6	HIGHEST FREQUENCY GENERATED OR USED IN THE DEVICE OR ON WHICH THE DEVICE OPERATES OR TUNES ..	6
2.7	SUBMITTED DOCUMENTS.....	6
3	TEST SET-UP AND OPERATION MODES.....	7
3.1	PRINCIPLE OF CONFIGURATION SELECTION	7
3.2	EQUIPMENT AND CABLE ARRANGEMENT.....	7
3.3	TEST SOFTWARE	8
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	8
4	CONFORMITY DECISION RULE.....	9
5	TEST RESULTS EMISSION	10
5.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz	10
5.1.1	Conducted emission	10
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	20
5.2.1	Radiated emission (30-1000 MHz).....	20
6	PHOTOGRAPHS OF THE TEST SET-UP.....	30
7	LIST OF TEST AND MEASUREMENT INSTRUMENTS	31
8	LIST OF FIGURES.....	32

1 Test Sites

1.1 Test Facilities

Laboratory: TÜV Rheinland (Shanghai) Co., Ltd.

Address: Workshop14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang)
Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi, Taicang, Jiangsu,
China

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

Refer to Clause 7 for test and measurement instruments.

2 General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is an ordinary fixed luminaire for lighting and similar use. For the further information, refer to the user's manual.

2.2 Ratings and System Details

Rated input : AC 120 V, 60 Hz
Rated power : 13.5 W
Protection class : I

The product is the fixed luminaire, the LED module powered by the LED drivers ICPSW24-19-2 and ICPSW24-19-3, and the power consumption can be controlled by an electronic circuit. Therefore, the EMC tests were performed on T2404 with LED drivers ICPSW24-19-2 and ICPSW24-19-3 respectively.

Product	Model	Parameter
LED driver	ICPSW24-19-2	Input: AC 100-240 V, 50/60 Hz, 0.4 A, 23 W
	ICPSW24-19-3	Output: DC 24 V, Max. 0.8 A, Max. 19.0 W

2.3 Independent Operation Modes

The basic operation modes are: "ON" and "OFF".
The test modes as follows.
Mode 1: Lighting on with maximum lighting output.
Mode 2: Lighting on with minimum lighting output.

2.4 Description of interconnecting cables

N/A

2.5 Noise Generating and Noise Suppressing Parts

Refer to the circuit diagram for further information.

2.6 Highest frequency generated or used in the device or on which the device operates or tunes

The highest frequency used in the EUT is 79 kHz.

2.7 Submitted Documents

Circuit diagram, user's manual and rating label.

3 Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.


Refer to the related paragraph of this report.

The sequence of testing:

1. Conducted emission tests were performed on 2024-10-16~2024-12-20.
2. Radiated emission tests were performed on 2024-10-16~2024-12-20.

3.2 Equipment and cable arrangement

Block diagram for both conducted emission and radiated emission tests is as follows:

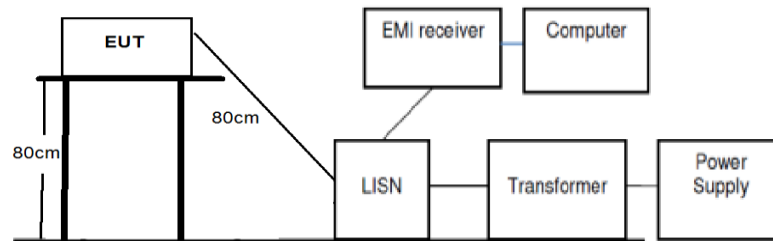

(Conducted emission)



(Radiated emission 30-1000 MHz)

Also refer to photographs on clause 6 for test setups for both conducted emission test and radiated emission test.

3.3 Test Software

No special test software was used during the tests.

3.4 Special Accessories and Auxiliary Equipment

None.

3.5 Countermeasures to achieve EMC Compliance

No other special measure is employed to achieve the requirement.

4 Conformity Decision Rule

For all EMI tests included in this report, as measurement uncertainties are less than the values U_{CISPR} given in CISPR 16-4-2, compliance with the limits is determined by comparing measurement results directly with corresponding limits without taking into consideration of measurement uncertainties.

5 Test Results EMISSION

5.1 Emission in the Frequency Range up to 30 MHz

5.1.1 Conducted emission

Result:		Passed
Date of testing	: 2024-10-16 and 2024-12-20	
Test procedure	: FCC 47 CFR Part 15, Subpart B:2023, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-1	
Frequency range	: 0.15 – 30 MHz	
Limits	: Quasi-peak limit: 0.15 – 0.5 MHz, 66 to 56 dB μ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 56 dB μ V; 5 – 30 MHz, 60 dB μ V Average limit: 0.15 – 0.5 MHz, 56 to 46 dB μ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 46 dB μ V; 5 – 30 MHz, 50 dB μ V	
Bandwidth of EMI receiver for final measurement	: 9 kHz	
Measurement time for final measurement	: 1 s	
Kind of test site	: Shielded room	
Input voltage	: AC 120 V, 60 Hz	
Operational mode	: Mode 1: power on with max. lighting output. Mode 2: power on with min. lighting output.	
Ambient condition	: Temperature: 21.5 °C; Relative humidity: 48 %	
Expanded measurement uncertainty ($k=2$)	: 2.33 dB The minimum margin to the limit is 5.56 dB at 0.681000 MHz. The margin is higher than expanded measurement uncertainty.	

The measurement setup was made according to ANSI C63.4-2014 in a shielded room.

The measurement equipment like test receivers, quasi-peak detector and artificial mains network (AMN) are in compliance with CISPR 16-1 series standards.

The tested object was set-up on a wooden support. The EUT was set 0.8 m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3 m and 0.4 m.

The disturbance voltage test was performed on the neutral line and phase line of the power supply of the EUT respectively.

Prüfbericht - Nr.: CN24PUOR 001

Test Report No.:

Seite 11 von 32

Page 11 of 32


The following figures and tables were those measured by an automatic measuring system. Both quasi-peak and average measurements were performed. In the following spectral diagram, “*” “♦” means Quasi-Peak Value and “*” “♦” means Average Value results.

Notes on following tables of conducted emission results and conversions:

Level (dB μ V): final measurement results by using quasi-peak detector and average detector

Transd (dB): transducer factor including cable loss, insertion loss of artificial mains network and gain of pre-amplifier (if used)

Margin: Limit (dB μ V) - Level (dB μ V)

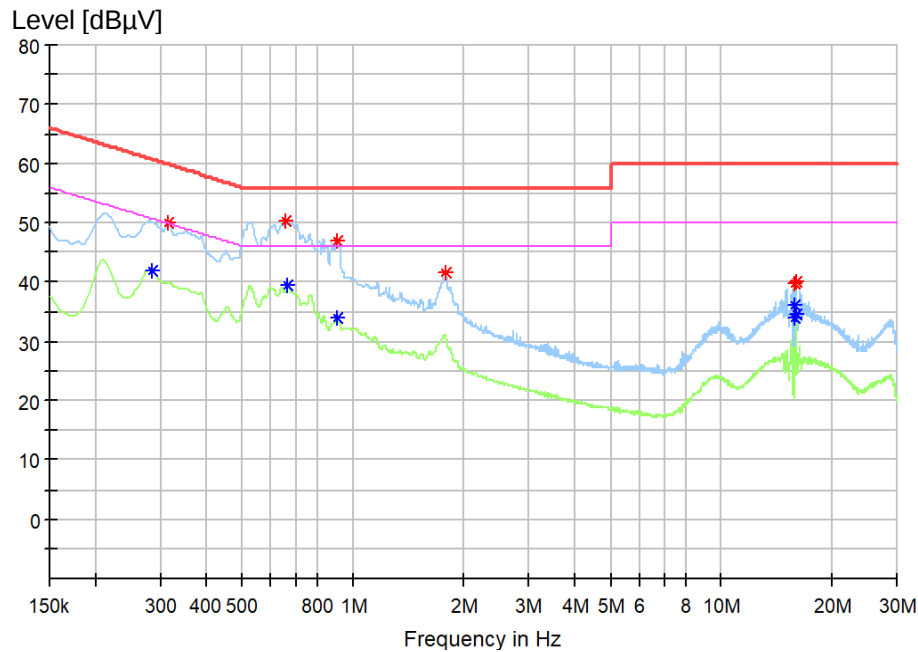Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 1 with LED driver ICPSW24-19-2


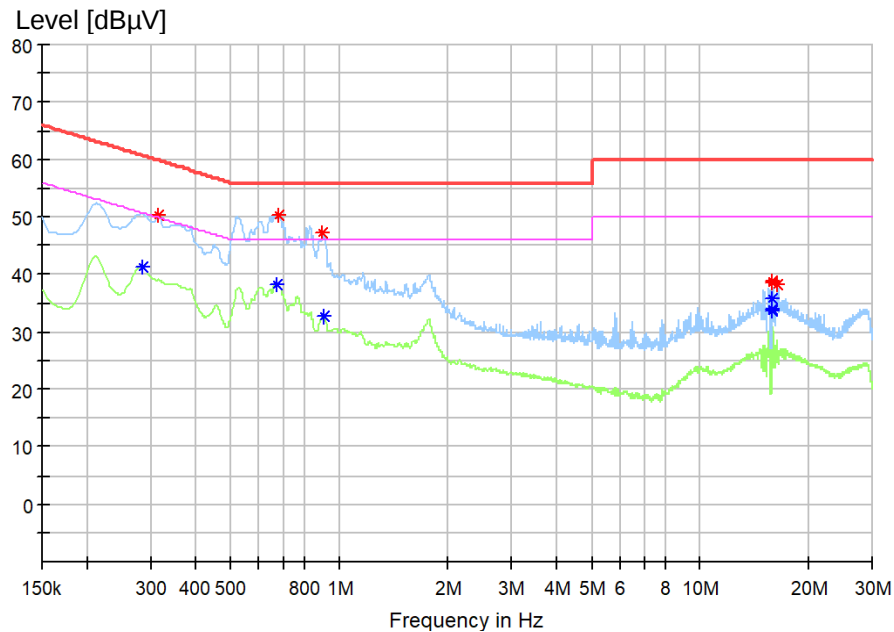
Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.316500	49.92	59.80	9.87	L1	10.3
0.656250	50.22	56.00	5.78	L1	10.3
0.903750	46.77	56.00	9.23	L1	10.6
1.776750	41.79	56.00	14.21	L1	10.2
15.828000	39.66	60.00	20.34	L1	10.9
15.897750	40.13	60.00	19.87	L1	10.9

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.285000	42.09	50.67	8.58	L1	10.3
0.665250	39.35	46.00	6.65	L1	10.3
0.903750	33.91	46.00	12.09	L1	10.6
15.756000	33.97	50.00	16.03	L1	10.9
15.825750	36.14	50.00	13.86	L1	10.9
15.895500	34.50	50.00	15.50	L1	10.9

Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 1 with LED driver ICPSW24-19-2




Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.316500	50.20	59.80	9.59	N	10.5
0.681000	50.44	56.00	5.56	N	10.4
0.897000	47.36	56.00	8.64	N	10.4
15.812250	38.83	60.00	21.17	N	11.1
15.884250	38.71	60.00	21.29	N	11.1
16.415250	38.21	60.00	21.79	N	11.2

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.285000	41.36	50.67	9.31	N	10.6
0.669750	38.18	46.00	7.82	N	10.4
0.903750	32.69	46.00	13.31	N	10.4
15.742500	33.47	50.00	16.53	N	11.1
15.812250	35.73	50.00	14.27	N	11.1
15.882000	33.98	50.00	16.02	N	11.1

Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 2 with LED driver ICPSW24-19-2

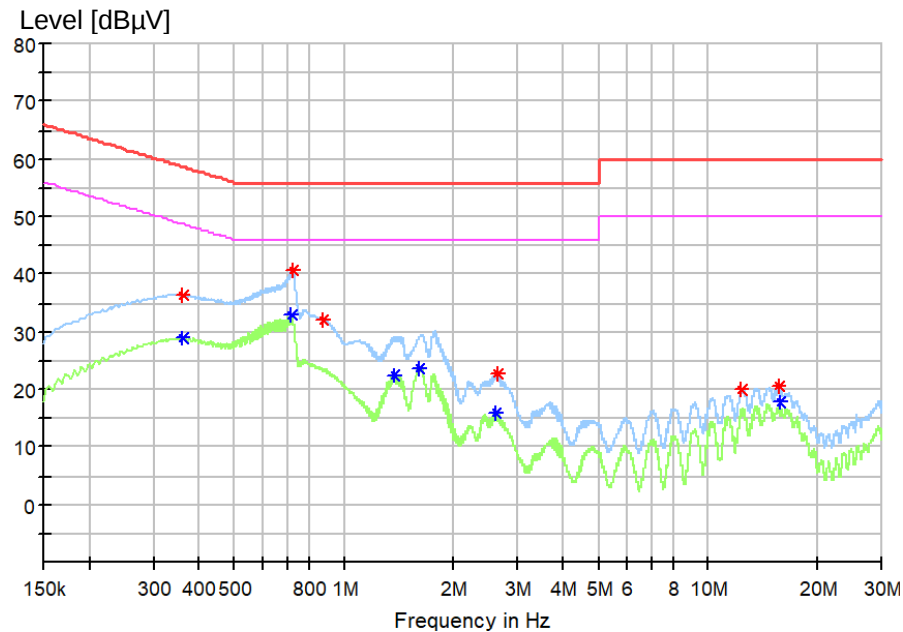


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.361500	36.30	58.69	22.39	L1	10.3
0.723750	40.75	56.00	15.25	L1	10.3
0.879000	32.03	56.00	23.97	L1	10.6
2.627250	22.69	56.00	33.31	L1	10.1
12.403500	19.96	60.00	40.04	L1	10.8
15.650250	20.75	60.00	39.25	L1	10.9

Final average measurement result:

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.359250	28.92	48.75	19.83	L1	10.3
0.712500	32.97	46.00	13.03	L1	10.3
1.376250	22.40	46.00	23.60	L1	10.4
1.612500	23.82	46.00	22.18	L1	10.3
2.609250	15.87	46.00	30.13	L1	10.1
15.733500	17.74	50.00	32.26	L1	10.9

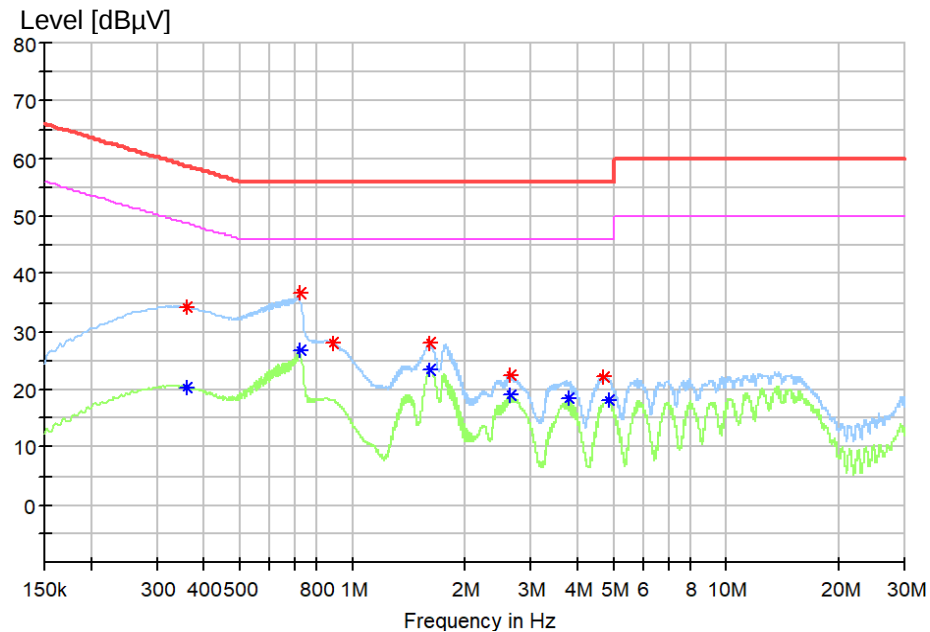
Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 2 with LED driver ICPSW24-19-2


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.359250	34.28	58.75	24.47	N	10.4
0.723750	36.63	56.00	19.37	N	10.4
0.883500	28.10	56.00	27.90	N	10.4
1.608000	27.89	56.00	28.11	N	10.5
2.638500	22.58	56.00	33.42	N	10.6
4.713000	22.14	56.00	33.86	N	10.7

Final average measurement result:

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.361500	20.46	48.69	28.24	N	10.4
0.726000	26.83	46.00	19.17	N	10.4
1.614750	23.47	46.00	22.53	N	10.5
2.638500	18.94	46.00	27.06	N	10.6
3.781500	18.31	46.00	27.69	N	10.7
4.827750	18.00	46.00	28.00	N	10.7

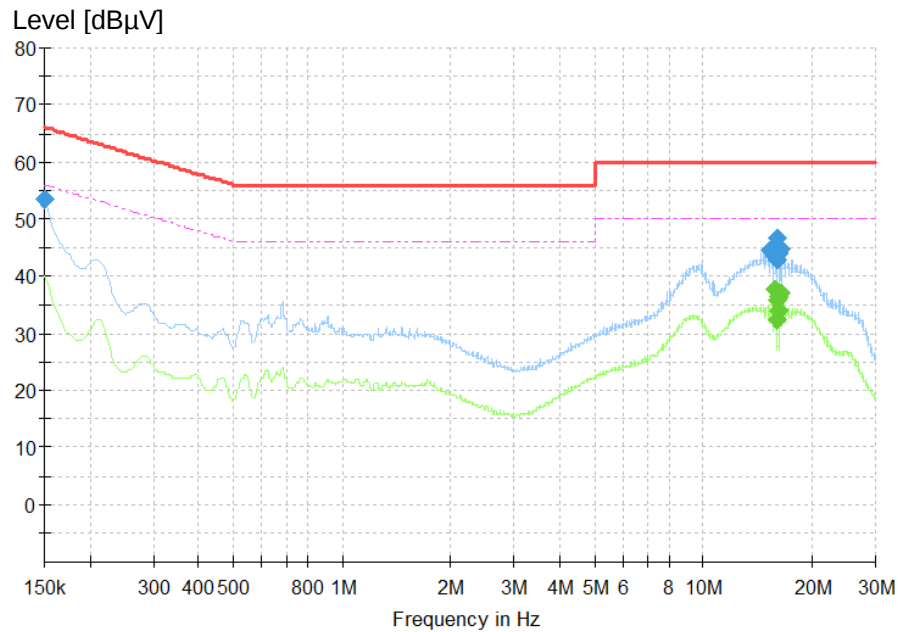
Figure 5: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 1 with LED driver ICPSW24-19-3


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150000	53.50	66.00	12.50	L1	10.3
15.353250	44.57	60.00	15.43	L1	10.8
15.900000	46.63	60.00	13.37	L1	10.9
15.976500	43.00	60.00	17.00	L1	10.9
16.192500	44.25	60.00	15.75	L1	10.9
16.264500	44.68	60.00	15.32	L1	10.9

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
15.832500	37.58	50.00	12.42	L1	10.9
15.904500	35.90	50.00	14.10	L1	10.9
15.976500	32.26	50.00	17.74	L1	10.9
16.118250	33.79	50.00	16.21	L1	10.9
16.190250	36.28	50.00	13.72	L1	10.9
16.260000	37.13	50.00	12.87	L1	10.9

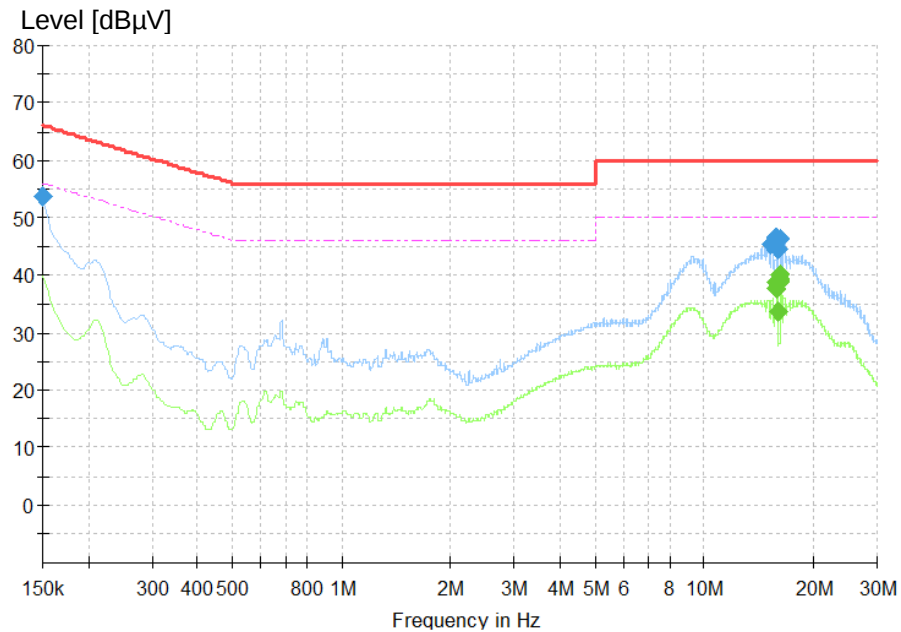
Figure 6: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 1 with LED driver ICPSW24-19-3


Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150000	53.71	66.00	12.29	N	10.2
15.335250	45.24	60.00	14.76	N	11.1
15.812250	46.50	60.00	13.50	N	11.1
15.884250	46.33	60.00	13.67	N	11.1
15.956250	44.35	60.00	15.65	N	11.1
16.172250	46.14	60.00	13.86	N	11.2

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
15.814500	38.82	50.00	11.18	N	11.1
15.886500	37.69	50.00	12.31	N	11.1
16.028250	33.69	50.00	16.31	N	11.1
16.098000	39.17	50.00	10.83	N	11.1
16.170000	39.98	50.00	10.02	N	11.2
16.239750	38.76	50.00	11.24	N	11.2

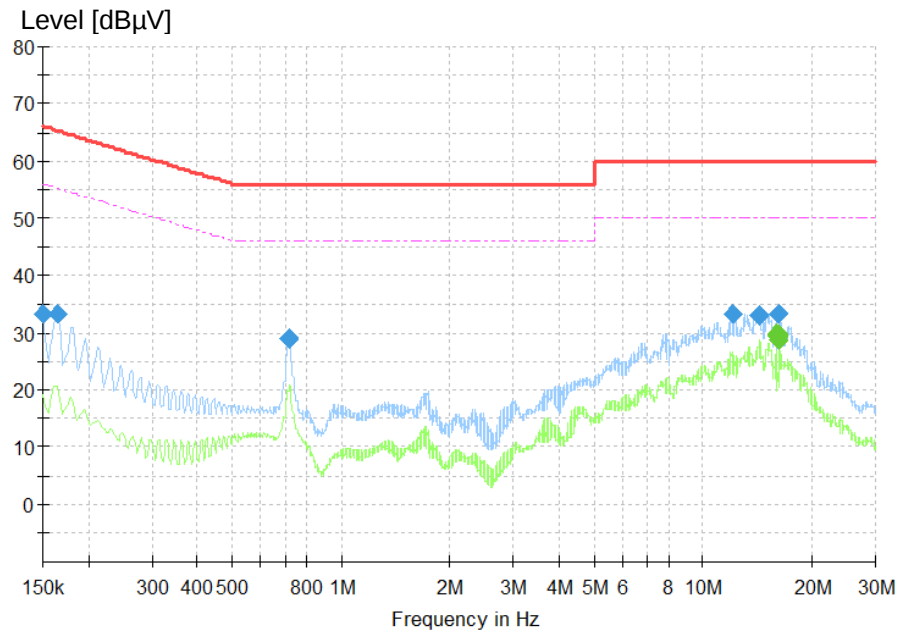Figure 7: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 2 with LED driver ICPSW24-19-3


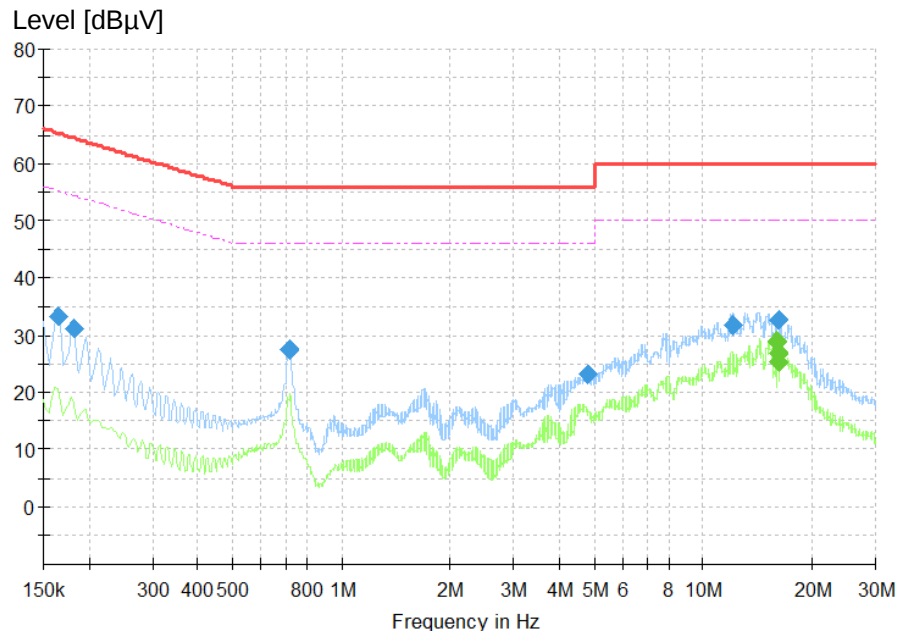
Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150000	33.17	66.00	32.83	L1	10.3
0.163500	33.26	65.28	32.03	L1	10.3
0.719250	29.12	56.00	26.88	L1	10.3
12.054750	33.21	60.00	26.79	L1	10.8
14.212500	32.88	60.00	27.12	L1	10.8
16.226250	33.31	60.00	26.69	L1	10.9

Final average measurement result:

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
16.028250	29.27	50.00	20.73	L1	10.9
16.046250	29.75	50.00	20.25	L1	10.9
16.062000	29.66	50.00	20.34	L1	10.9
16.077750	28.59	50.00	21.41	L1	10.9
16.093500	29.60	50.00	20.40	L1	10.9
16.109250	29.29	50.00	20.71	L1	10.9

Figure 8: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 2 with LED driver ICPSW24-19-3



Final quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.163500	33.43	65.28	31.85	N	10.4
0.181500	30.99	64.42	33.42	N	10.6
0.717000	27.47	56.00	28.53	N	10.4
4.789500	22.97	56.00	33.03	N	10.7
12.057000	31.90	60.00	28.10	N	11.1
16.179000	32.74	60.00	27.26	N	11.2

Final average measurement result:

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
16.032750	28.79	50.00	21.21	N	11.1
16.048500	29.08	50.00	20.92	N	11.1
16.064250	28.77	50.00	21.23	N	11.1
16.080000	26.70	50.00	23.30	N	11.1
16.095750	26.85	50.00	23.15	N	11.1
16.111500	25.24	50.00	24.76	N	11.1

5.2 Emission in the Frequency Range above 30 MHz

5.2.1 Radiated emission (30-1000 MHz)

Result:	Passed
----------------	---------------

Date of testing	: 2024-10-16 and 2024-12-20
Test procedure	: FCC 47 CFR Part 15, Subpart B:2023, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-3
Product classification	: Class B
Frequency range	: 30 – 1000 MHz (see Note 1)
Limits	: Quasi-peak limits (3 m distance): 30 – 88 MHz, 40 dB μ V/m; 88 – 216 MHz, 43.5 dB μ V/m; 216 – 1000 MHz, 46 dB μ V/m (see Note 2)
Bandwidth of EMI receiver for final measurement	: 120 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Semi-anechoic chamber
Input voltage	: AC 120 V, 60 Hz
Operational mode	: Mode 1: power on with max. lighting output. Mode 2: power on with min. lighting output.
Ambient condition	: Temperature: 20.5 °C; Relative humidity: 45 %
Expanded measurement uncertainty ($k=2$)	: 5.40 dB The minimum margin to the limit is 6.71 dB at 33.273750 MHz. The margin is higher than expanded measurement uncertainty.

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on an 80 cm wooden support above the reference ground plane. The wooden support was rotated 360° around and the height of the antenna was varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following spectral diagram, “◆” means quasi-peak test results.

Prüfbericht - Nr.: CN24PUOR 001

Test Report No.:

Seite 21 von 32

Page 21 of 32

Notes on following tables of radiated emission results and conversions:

QuasiPeak (dB μ V/m): final measurement results by using quasi-peak detector


Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)

Margin: Limit (dB μ V/m) - QuasiPeak (dB μ V/m)

Note 1: The highest frequency in the EUT is less than 108 MHz. According to FCC Part 15 subpart B §15.33 (b) (1), the upper frequency for radiated emission measurement is 1000 MHz.

Note 2: The class B limits of ICES-005:2018 is stricter than those FCC 47 CFR Part 15, Subpart B:2023 for 3 m test distance. Therefore, the former limits are used in following figures and tables.


Figure 9: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 1 with LED driver ICPSW24-19-2

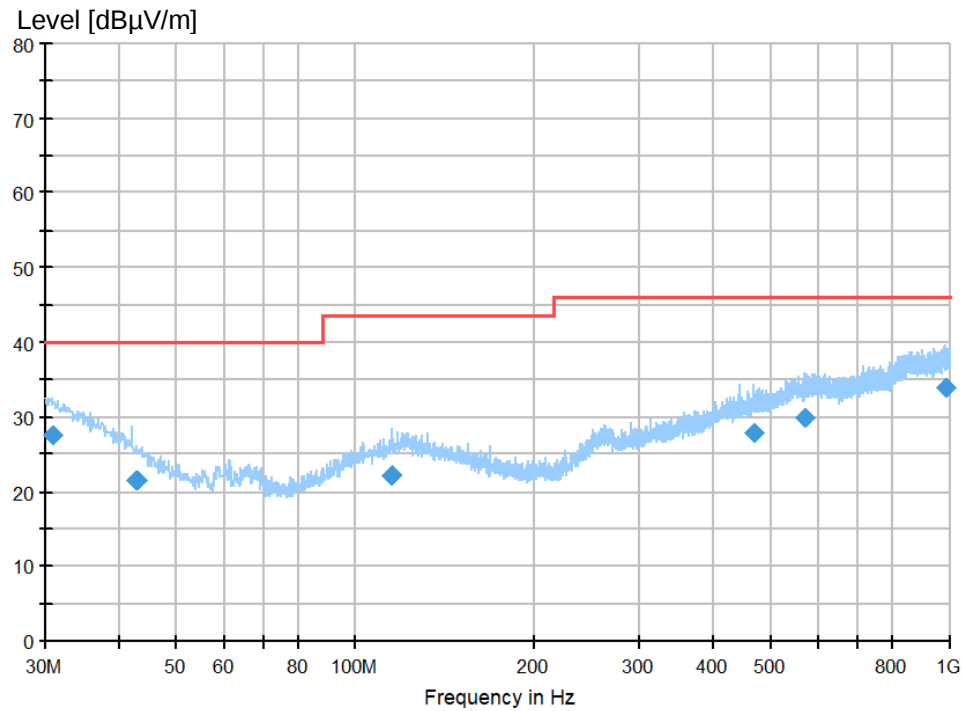

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.848750	27.68	40.00	12.32	1000.0	120.000	400.0	H	17.0
42.731250	21.47	40.00	18.53	1000.0	120.000	400.0	H	-74.0
114.753750	22.19	43.50	21.31	1000.0	120.000	300.0	H	-50.0
467.227500	27.91	46.00	18.09	1000.0	120.000	300.0	H	-89.0
572.351250	29.92	46.00	16.08	1000.0	120.000	300.0	H	81.0
985.692500	33.91	46.00	12.09	1000.0	120.000	100.0	H	121.0


Figure 10: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 1 with LED driver ICPSW24-19-2

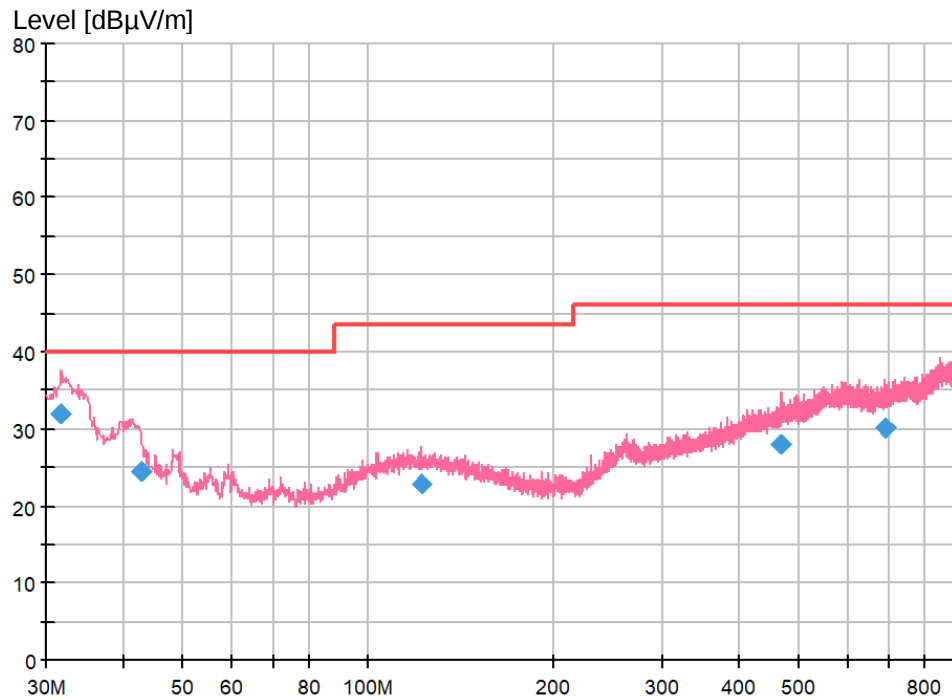

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
31.697500	32.04	40.00	7.96	1000.0	120.000	100.0	V	59.0
42.610000	24.65	40.00	15.35	1000.0	120.000	100.0	V	53.0
121.543750	22.99	43.50	20.51	1000.0	120.000	100.0	V	-6.0
469.167500	28.00	46.00	18.00	1000.0	120.000	200.0	V	123.0
688.872500	30.15	46.00	15.85	1000.0	120.000	400.0	V	136.0
983.510000	33.98	46.00	12.02	1000.0	120.000	300.0	V	93.0


Figure 11: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 2 with LED driver ICPSW24-19-2

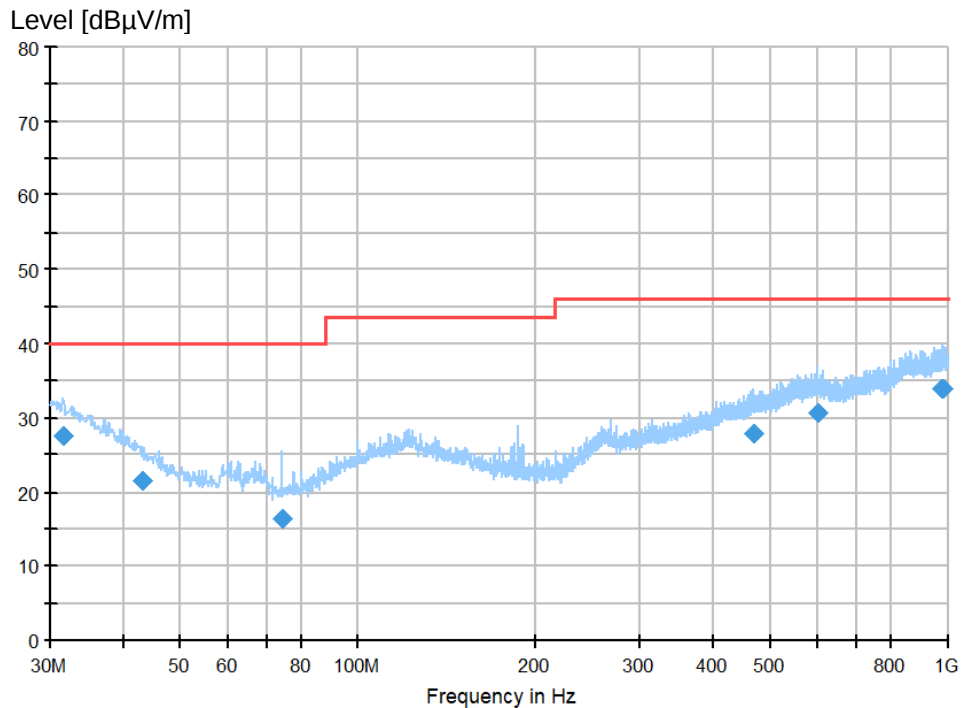

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
31.576250	27.54	40.00	12.46	1000.0	120.000	100.0	H	27.0
42.973750	21.41	40.00	18.59	1000.0	120.000	400.0	H	-155.0
74.135000	16.49	40.00	23.51	1000.0	120.000	400.0	H	31.0
468.440000	27.94	46.00	18.06	1000.0	120.000	100.0	H	180.0
599.026250	30.73	46.00	15.27	1000.0	120.000	400.0	H	163.0
980.357500	33.95	46.00	12.05	1000.0	120.000	300.0	H	-103.0


Figure 12: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 2 with LED driver ICPSW24-19-2

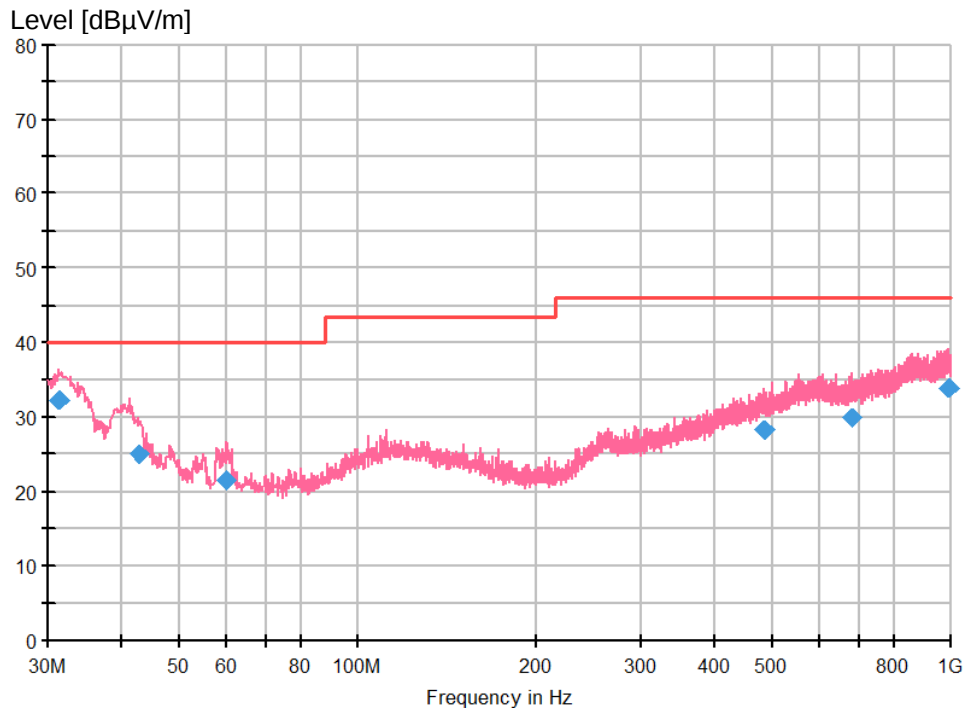

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
31.333750	32.20	40.00	7.80	1000.0	120.000	100.0	V	0.0
42.731250	25.07	40.00	14.93	1000.0	120.000	100.0	V	-37.0
60.191250	21.45	40.00	18.55	1000.0	120.000	100.0	V	8.0
484.566250	28.32	46.00	17.68	1000.0	120.000	100.0	V	-155.0
678.808750	30.05	46.00	15.95	1000.0	120.000	200.0	V	153.0
991.512500	33.86	46.00	12.14	1000.0	120.000	200.0	V	-82.0


Figure 13: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 1 with LED driver ICPSW24-19-3

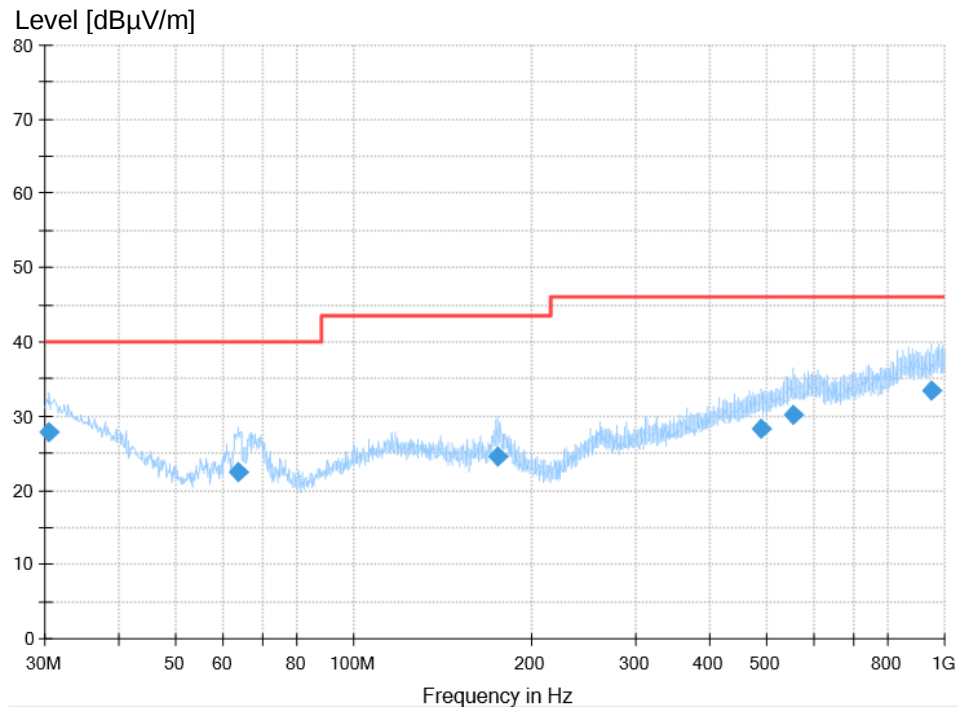

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.485000	27.89	40.00	12.11	1000.0	120.000	100.0	H	133.0
63.707500	22.42	40.00	17.58	1000.0	120.000	200.0	H	64.0
175.378750	24.55	43.50	18.95	1000.0	120.000	100.0	H	27.0
488.567500	28.41	46.00	17.59	1000.0	120.000	100.0	H	168.0
552.466250	30.21	46.00	15.79	1000.0	120.000	100.0	H	-39.0
948.953750	33.43	46.00	12.57	1000.0	120.000	200.0	H	64.0


Figure 14: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 1 with LED driver ICPSW24-19-3

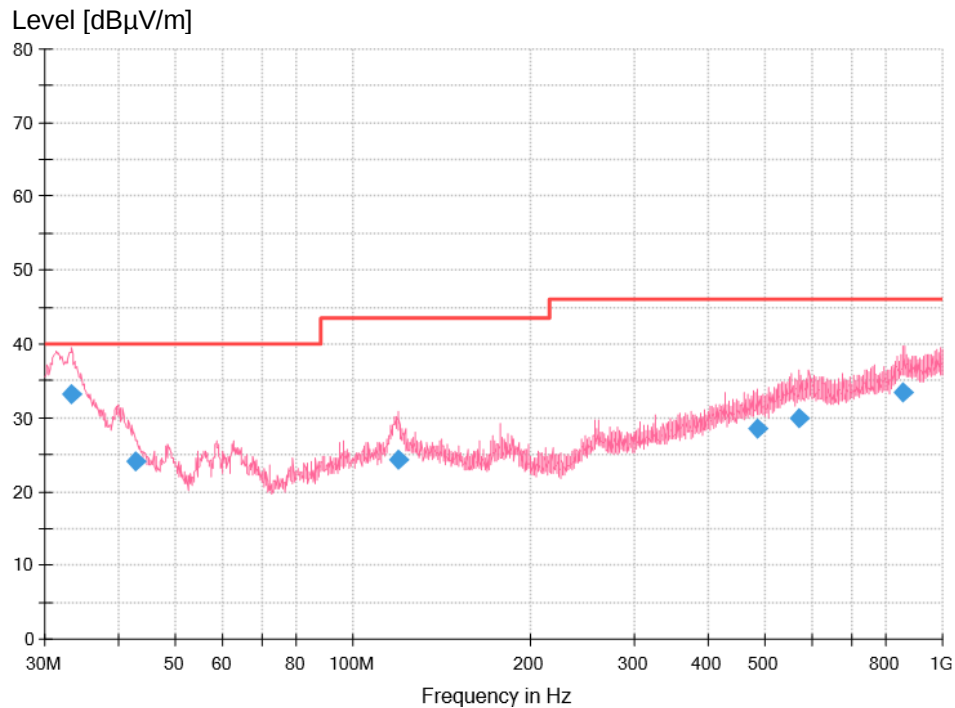

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.273750	33.29	40.00	6.71	1000.0	120.000	100.0	V	53.0
42.610000	24.21	40.00	15.79	1000.0	120.000	100.0	V	20.0
119.240000	24.21	43.50	19.29	1000.0	120.000	100.0	V	40.0
485.778750	28.48	46.00	17.52	1000.0	120.000	100.0	V	74.0
571.017500	29.96	46.00	16.04	1000.0	120.000	100.0	V	107.0
858.622500	33.36	46.00	12.64	1000.0	120.000	100.0	V	80.0


Figure 15: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 2 with LED driver ICPSW24-19-3

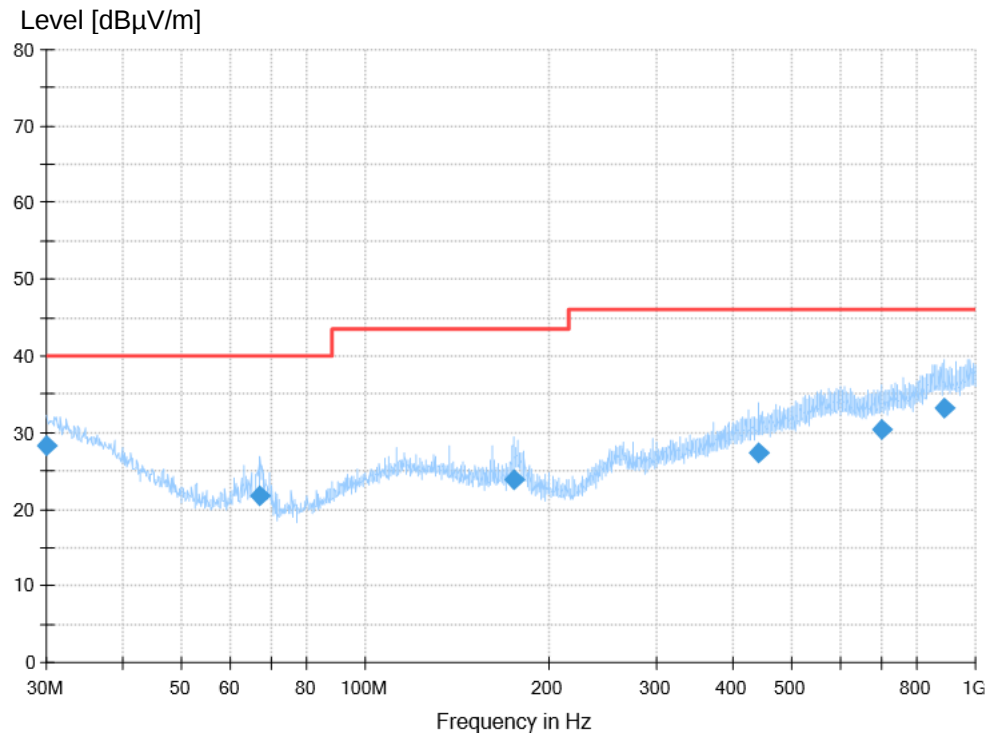

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.000000	28.20	40.00	11.80	1000.0	120.000	200.0	H	-161.0
67.223750	21.85	40.00	18.15	1000.0	120.000	200.0	H	-100.0
175.621250	23.83	43.50	19.67	1000.0	120.000	200.0	H	11.0
441.886250	27.32	46.00	18.68	1000.0	120.000	100.0	H	-175.0
700.148750	30.48	46.00	15.52	1000.0	120.000	100.0	H	-46.0
887.722500	33.23	46.00	12.77	1000.0	120.000	200.0	H	-60.0

Figure 16: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 2 with LED driver ICPSW24-19-3

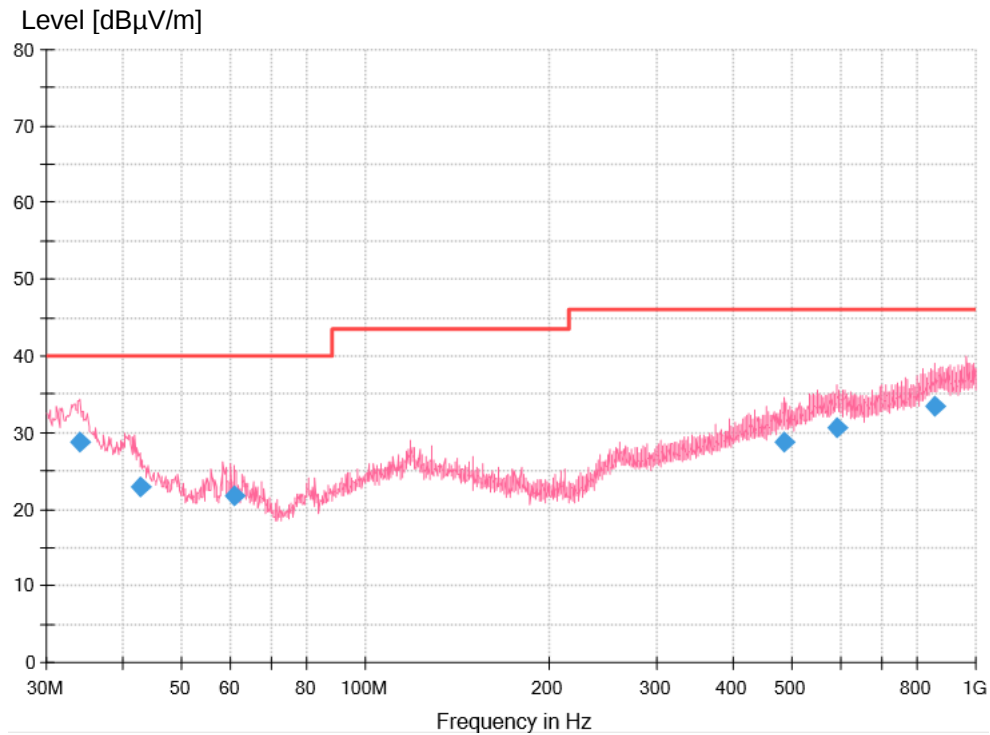

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
34.122500	28.77	40.00	11.23	1000.0	120.000	100.0	V	-86.0
42.610000	23.00	40.00	17.00	1000.0	120.000	100.0	V	6.0
61.040000	21.72	40.00	18.28	1000.0	120.000	100.0	V	-19.0
486.748750	28.71	46.00	17.29	1000.0	120.000	100.0	V	-99.0
591.508750	30.60	46.00	15.40	1000.0	120.000	100.0	V	161.0
854.863750	33.36	46.00	12.64	1000.0	120.000	200.0	V	-114.0

6 Photographs of the Test Set-Up

Refer to the test setup file.

Prüfbericht - Nr.: CN24PUOR 001
Test Report No.:Seite 31 von 32
Page 31 of 32

7 List of Test and Measurement Instruments

Equip.	Description	Model	Manufacturer	Last Date DD.MM.YYYY	Due Date DD.MM.YYYY
9061503	Shielded enclosure	10.055x3.605x3.000	Frankonia	08.11.2023	08.11.2028
9023229	EMI test receiver	ESR3	Rohde&Schwarz	03.08.2024	03.08.2025
G1830003	Artificial mains network	ENV432	Rohde&Schwarz	11.10.2024	11.10.2025
G1824248	Dual display multimeter	F45	Fluke	28.06.2024	28.06.2025
9062744	EMI measurement software	EMC32-E+(10.60.20)	Rohde&Schwarz	N/A	N/A
G1811378	3m semi-anechoic chamber	SAC3	Frankonia	03.12.2023	03.12.2026
G1811391	EMI test receiver	ESCI	Rohde&Schwarz	17.10.2024	17.10.2025
G1811425	Bilog antenna	CBL 6112D	Teseq	20.04.2023	20.04.2026
9062745	EMI measurement software	EMC32-MEB (10.60.20)	Rohde&Schwarz	N/A	N/A

8 List of Figures

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 1 with LED driver ICPSW24-19-2	12
Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 1 with LED driver ICPSW24-19-2	13
Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 2 with LED driver ICPSW24-19-2	14
Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 2 with LED driver ICPSW24-19-2	15
Figure 5: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 1 with LED driver ICPSW24-19-3	16
Figure 6: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 1 with LED driver ICPSW24-19-3	17
Figure 7: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L on mode 2 with LED driver ICPSW24-19-3	18
Figure 8: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N on mode 2 with LED driver ICPSW24-19-3	19
Figure 9: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 1 with LED driver ICPSW24-19-2	22
Figure 10: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 1 with LED driver ICPSW24-19-2	23
Figure 11: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 2 with LED driver ICPSW24-19-2	24
Figure 12: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 2 with LED driver ICPSW24-19-2	25
Figure 13: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 1 with LED driver ICPSW24-19-3	26
Figure 14: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 1 with LED driver ICPSW24-19-3	27
Figure 15: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization on mode 2 with LED driver ICPSW24-19-3	28
Figure 16: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization on mode 2 with LED driver ICPSW24-19-3	29

End of test report