

01_GSM850_GPRS (2 Tx slots)_Right Cheek_0mm_Ch189

Communication System: GSM 850; Frequency: 836.4

Medium: HSL. Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.350 W/kg; SAR (10g) = 0.240 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.09 dB

SAR (1g) = 0.366 W/kg; SAR (10g) = 0.277 W/kg;

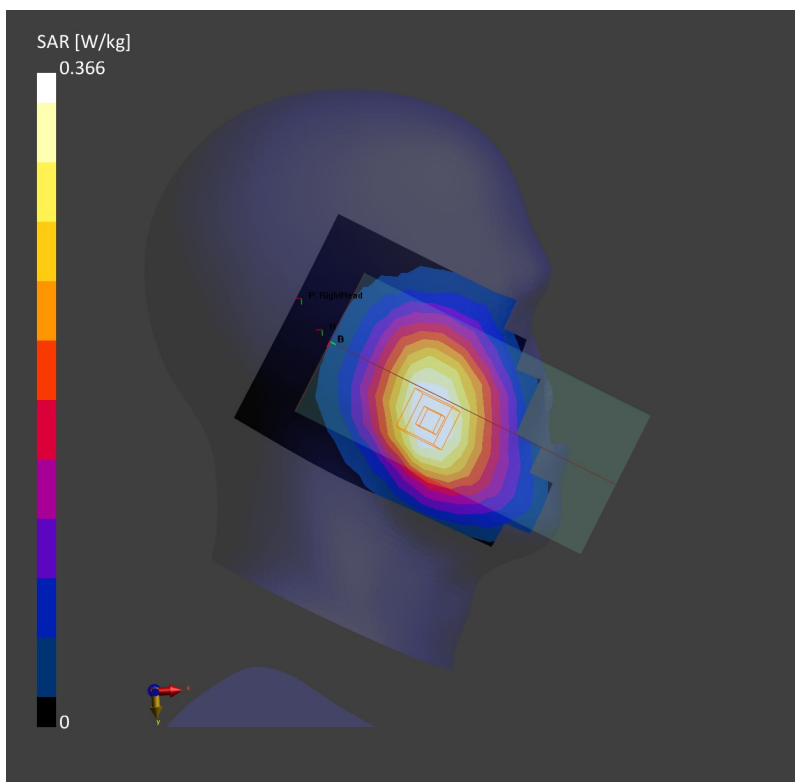

02_WCDMA V_RMC 12.2Kbps_Left Cheek_0mm_Ch4182

Communication System: Band 5, UTRA/FDD; Frequency: 836.4

Medium: HSL. Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.226 W/kg; SAR (10g) = 0.148 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.04 dB

SAR (1g) = 0.242 W/kg; SAR (10g) = 0.167 W/kg;

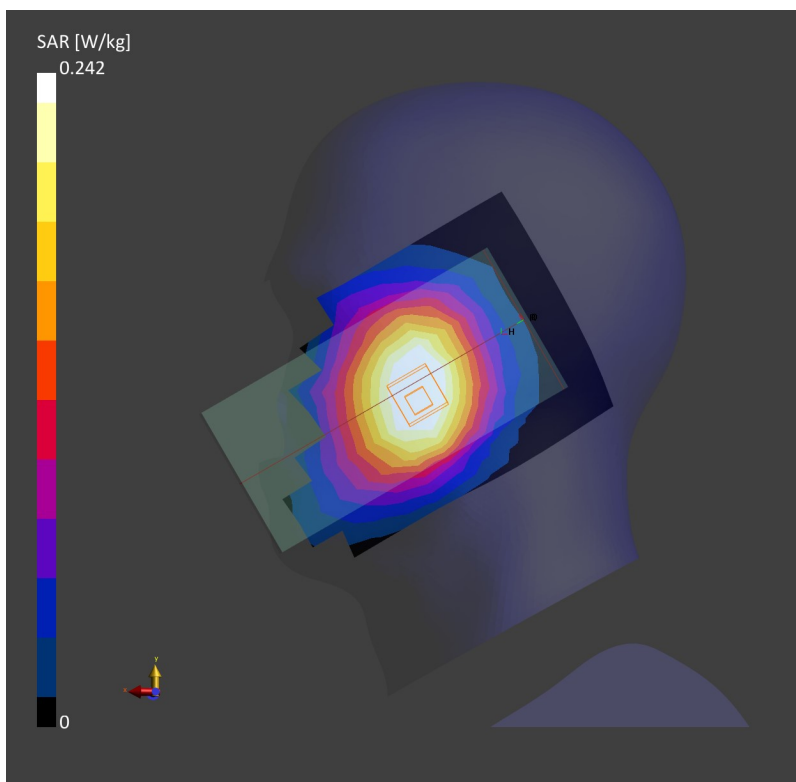

03_LTE Band 26_15M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch26865

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5

Medium: HSL. Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57,10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.157 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.227 W/kg; SAR (10g) = 0.168 W/kg;

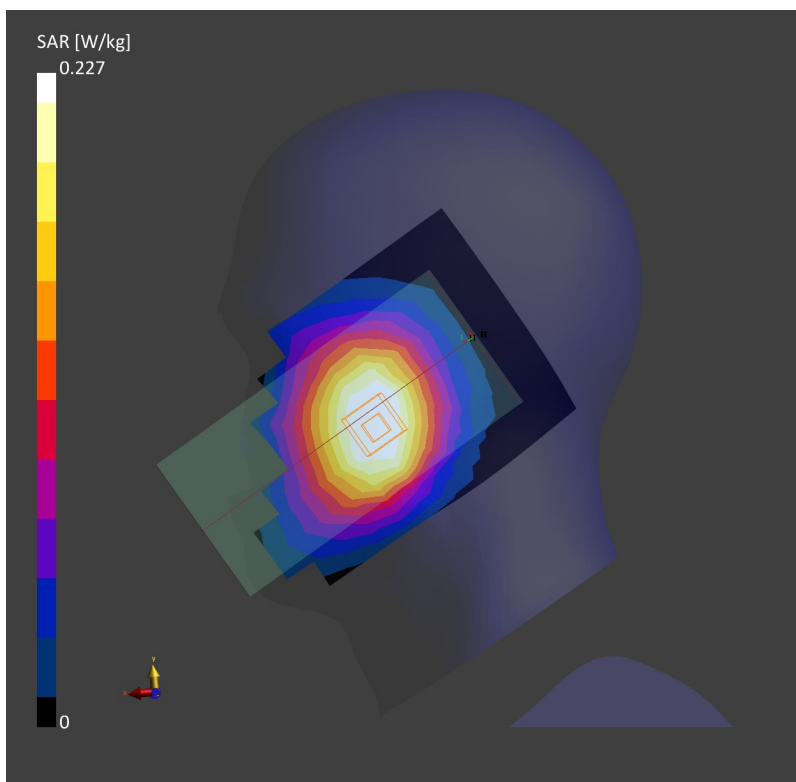

04_GSM1900_GPRS (2 Tx slots)_Right Cheek_0mm_Ch661

Communication System: PCS 1900; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.066 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.07 dB

SAR (1g) = 0.119 W/kg; SAR (10g) = 0.074 W/kg;

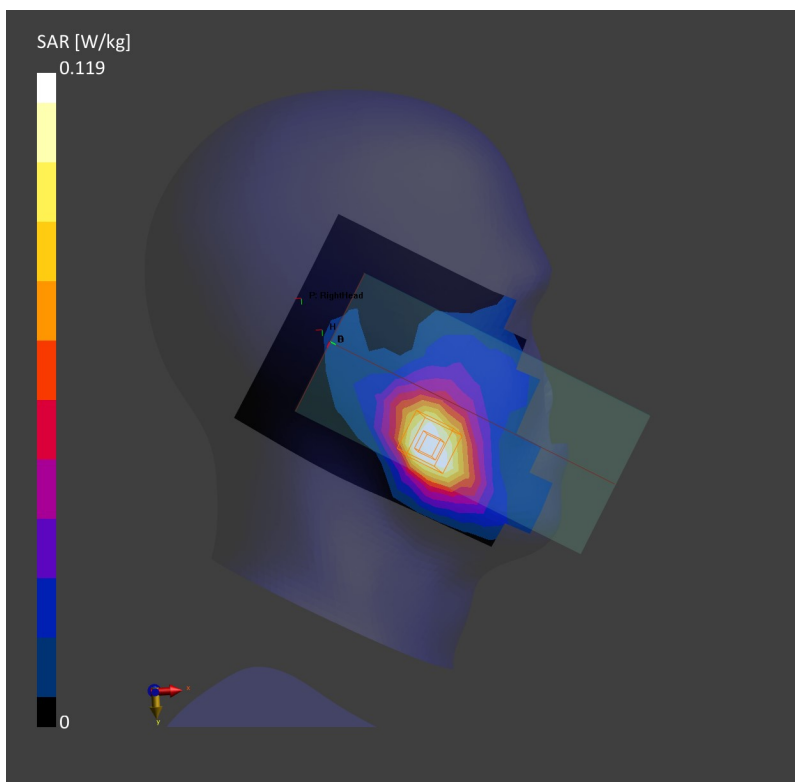

05_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9400

Communication System: Band 2, UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.091 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.08 dB

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.100 W/kg;

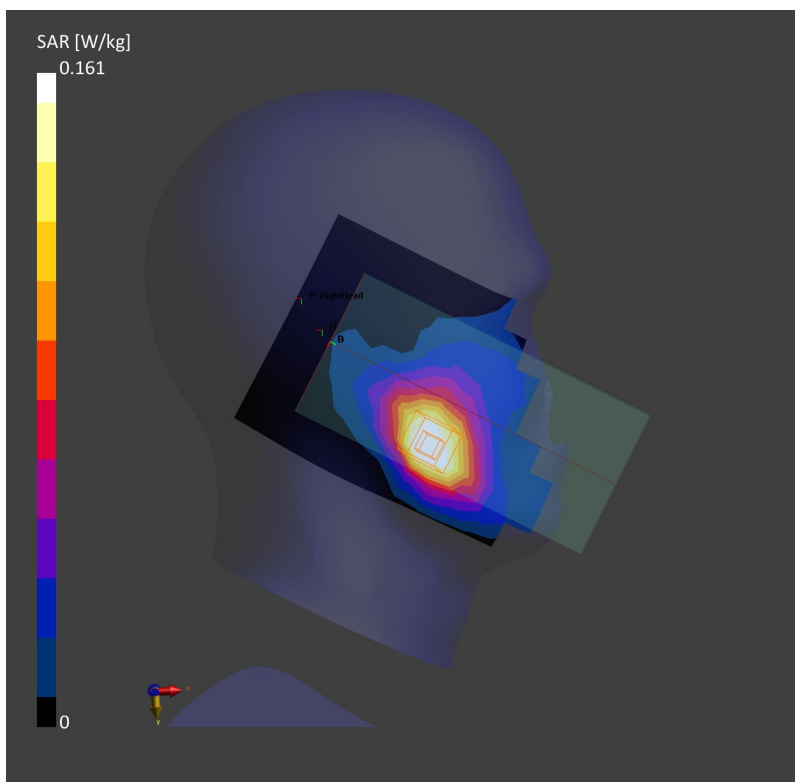

06_LTE Band 2_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch18900

Communication System: Band 2, E-UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.155 W/kg; SAR (10g) = 0.089 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.159 W/kg; SAR (10g) = 0.098 W/kg;

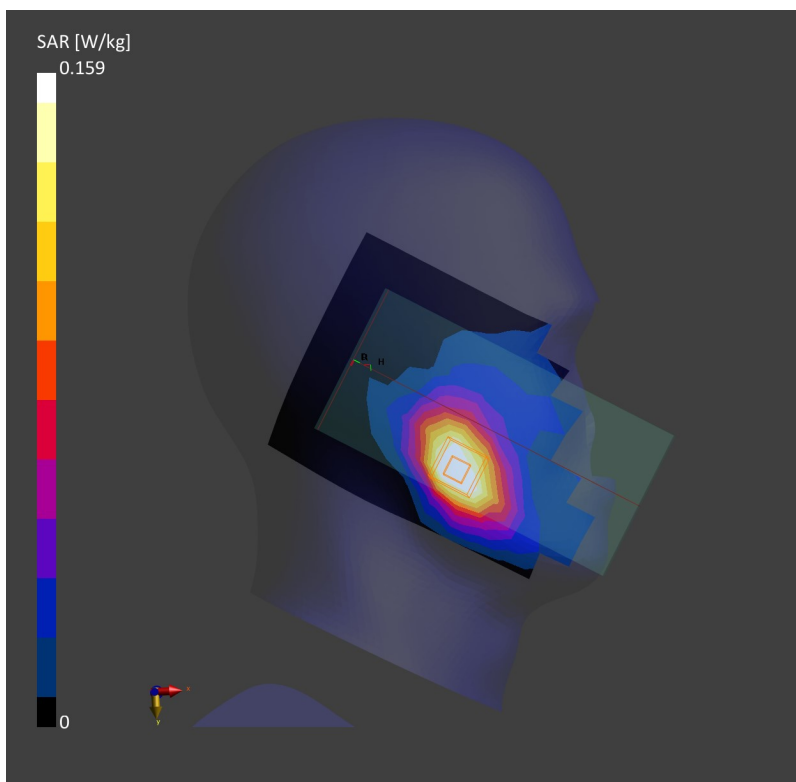

07_LTE Band 7_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch21100

Communication System: Band 7, E-UTRA/FDD; Frequency: 2535.0

Medium: HSL. Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.495 W/kg; SAR (10g) = 0.259 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.523 W/kg; SAR (10g) = 0.283 W/kg;

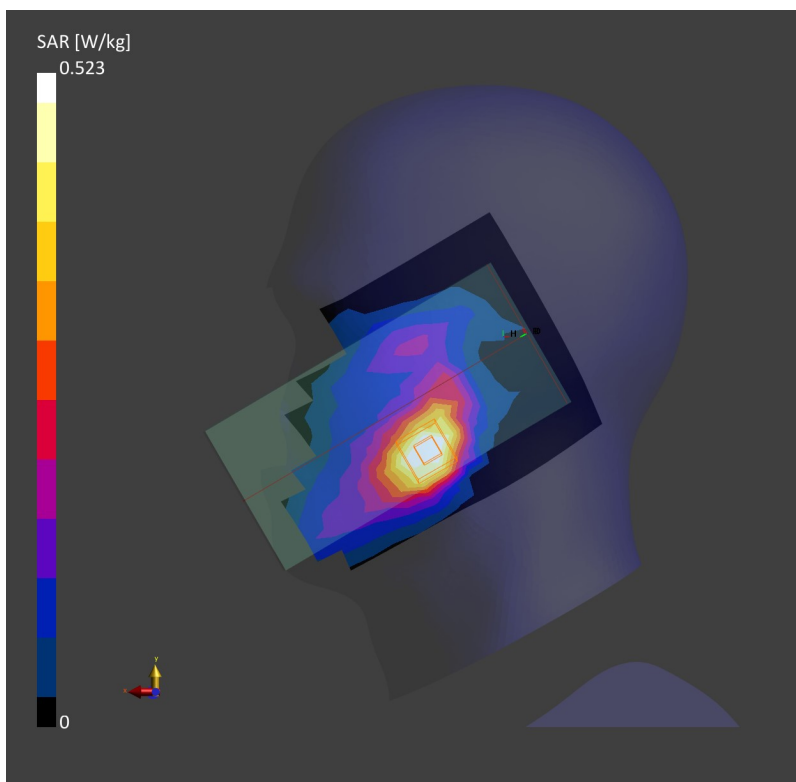

08_LTE Band 41_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch40620

Communication System: Band 41, E-UTRA/TDD; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.298 W/kg; SAR (10g) = 0.154 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.313 W/kg; SAR (10g) = 0.166 W/kg;

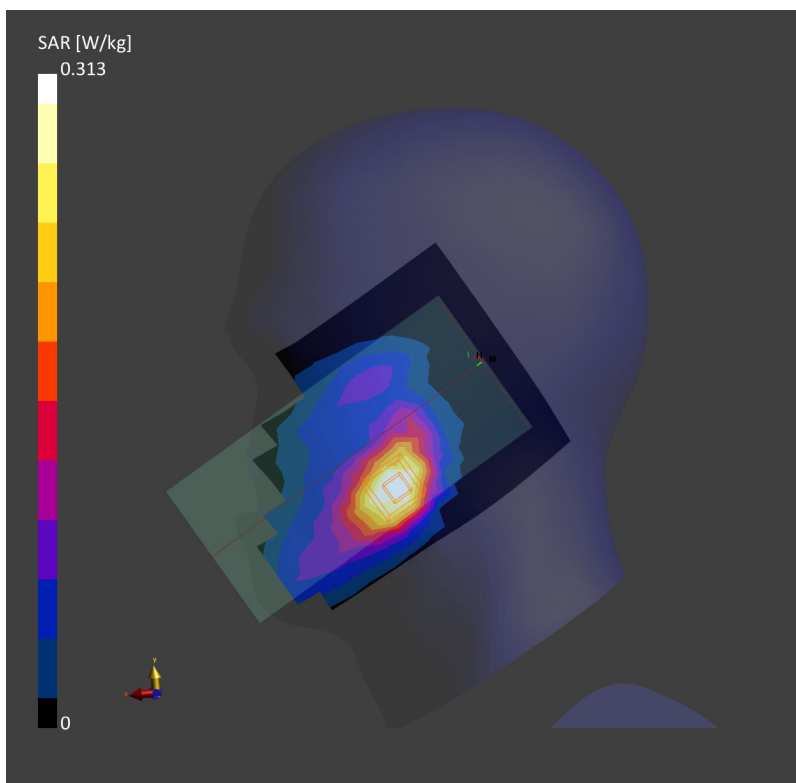

09_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.0

Medium: HSL. Medium parameters used: $f = 2412.0$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.29, 8.29, 8.29); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.549 W/kg; SAR (10g) = 0.282 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 0.514 W/kg; SAR (10g) = 0.271 W/kg;

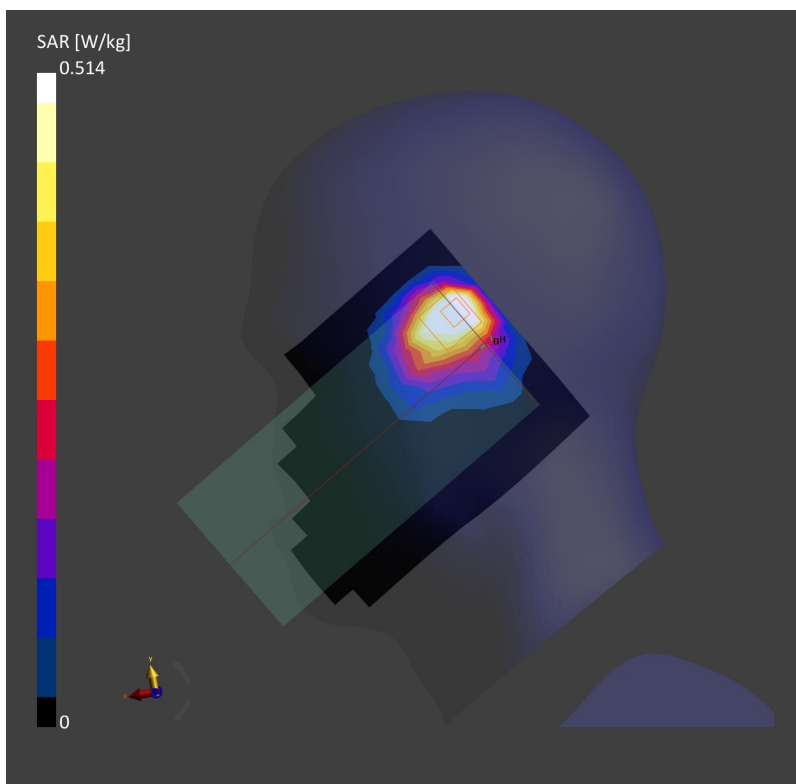

10_Bluetooth_1Mbps_Left Cheek_0mm_Ch78

Communication System: ISM 2.4 GHz Band; Frequency: 2480.0

Medium: HSL. Medium parameters used: $f = 2480.0$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.29, 8.29, 8.29); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.120 W/kg; SAR (10g) = 0.062 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.125 W/kg; SAR (10g) = 0.061 W/kg;

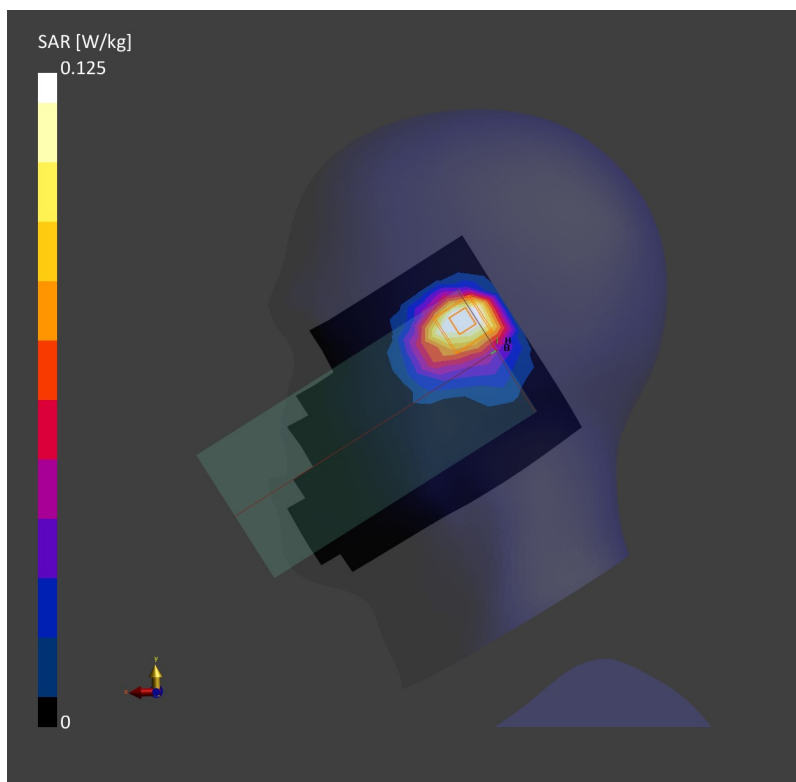

11_WLAN5GHz_802.11a 6Mbps_Left Tilted_0mm_Ch60

Communication System: WLAN 5GHz; Frequency: 5300.0

Medium: HSL. Medium parameters used: $f = 5300.0$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.07, 6.07, 6.07); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.210 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.648 W/kg; SAR (10g) = 0.215 W/kg;

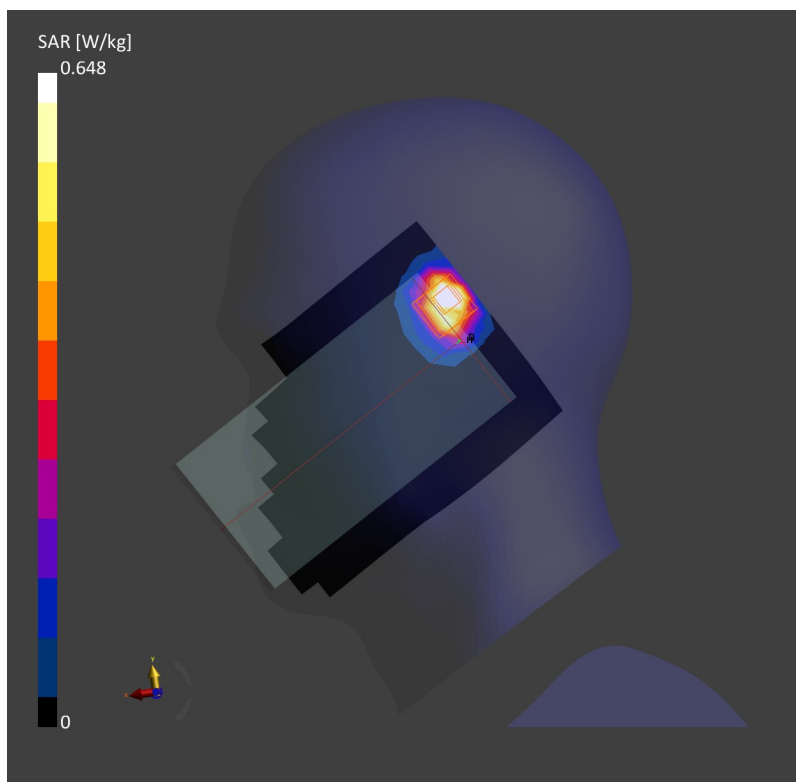

12_WLAN5GHz 802.11ac-VHT80 MCS0 Left Tilted 0mm Ch122

Communication System: WLAN 5GHz; Frequency: 5610.0

Medium: HSL. Medium parameters used: $f = 5610.0$ MHz; $\sigma = 5.01$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.3, 5.3, 5.3); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.654 W/kg; SAR (10g) = 0.222 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.720 W/kg; SAR (10g) = 0.224 W/kg;

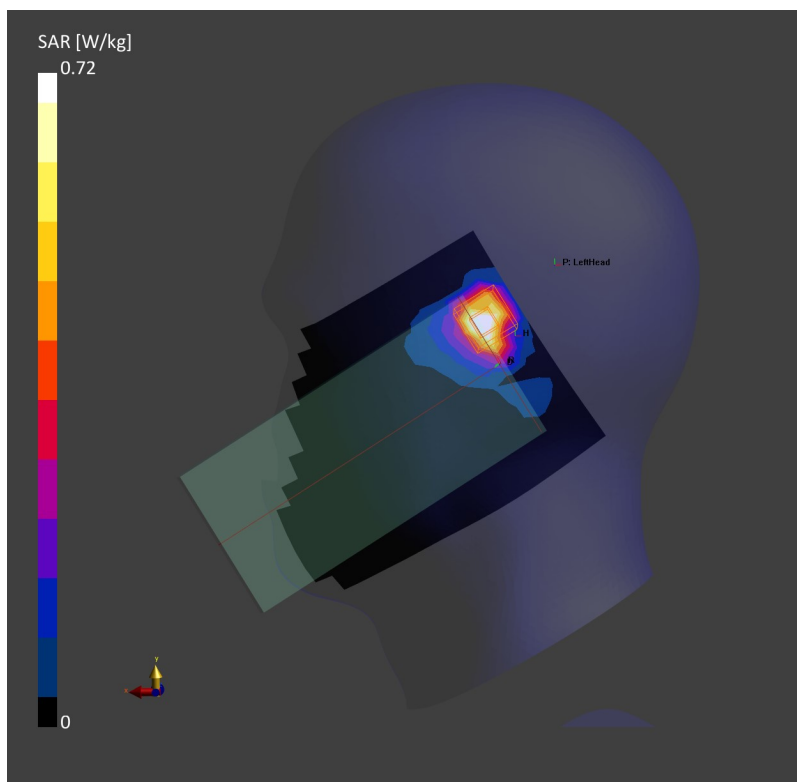

13_WLAN5GHz_802.11ac-VHT80 MCS0_Left Tilted_0mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL. Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.49, 5.49, 5.49); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.786 W/kg; SAR (10g) = 0.259 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.804 W/kg; SAR (10g) = 0.265 W/kg;

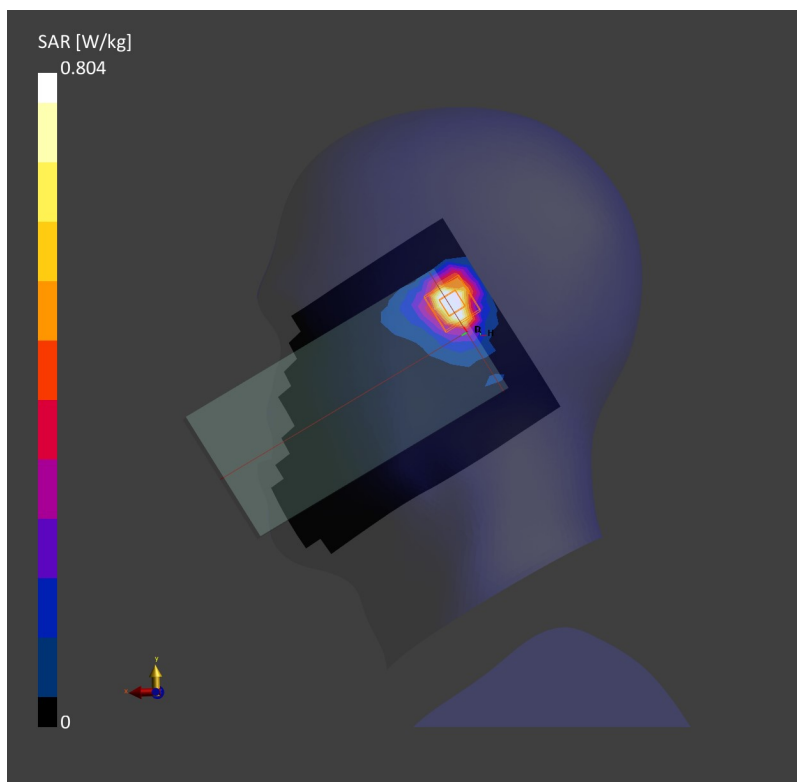

14_GSM850_GPRS (2 Tx slots) _Back_5mm_Ch189

Communication System: GSM 850; Frequency: 836.4

Medium: HSL. Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.20 W/kg; SAR (10g) = 0.719 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.618 W/kg;

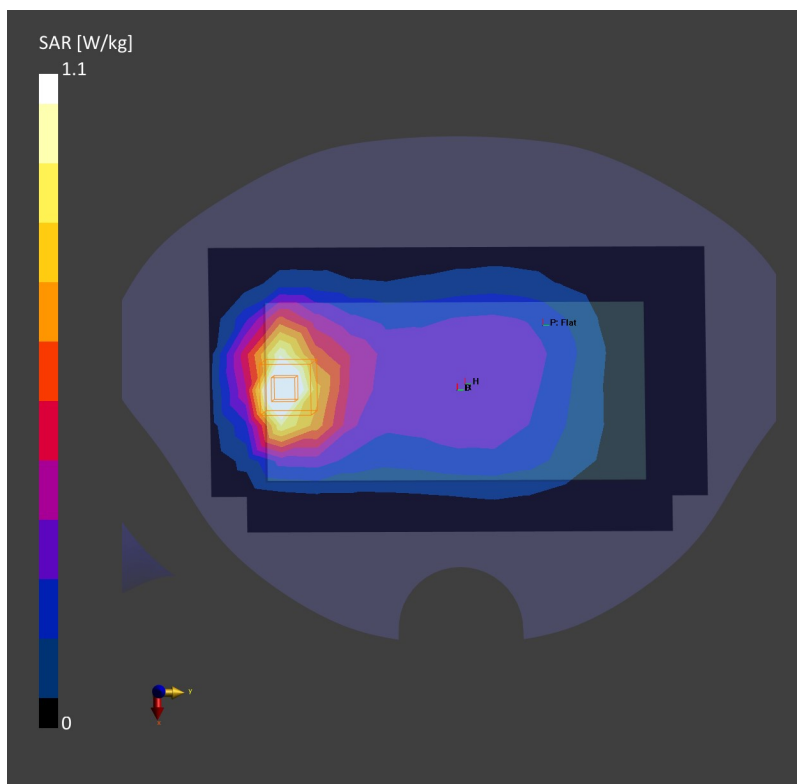

15_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4132

Communication System: Band 5, UTRA/FDD; Frequency: 826.4

Medium: HSL. Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.982 W/kg; SAR (10g) = 0.604 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.979 W/kg; SAR (10g) = 0.531 W/kg;

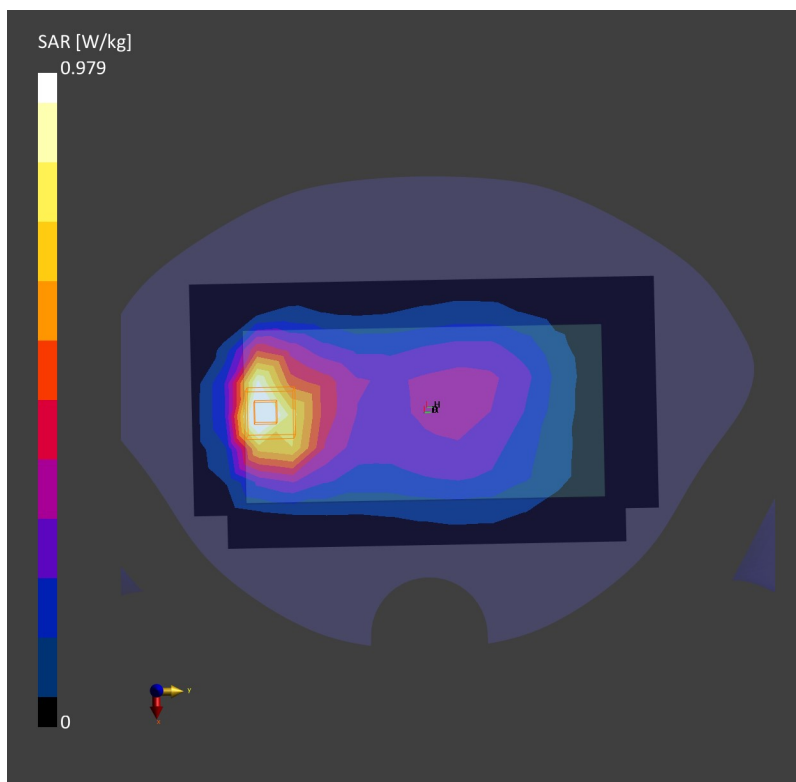

16_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5

Medium: HSL. Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.681 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.06 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.602 W/kg;

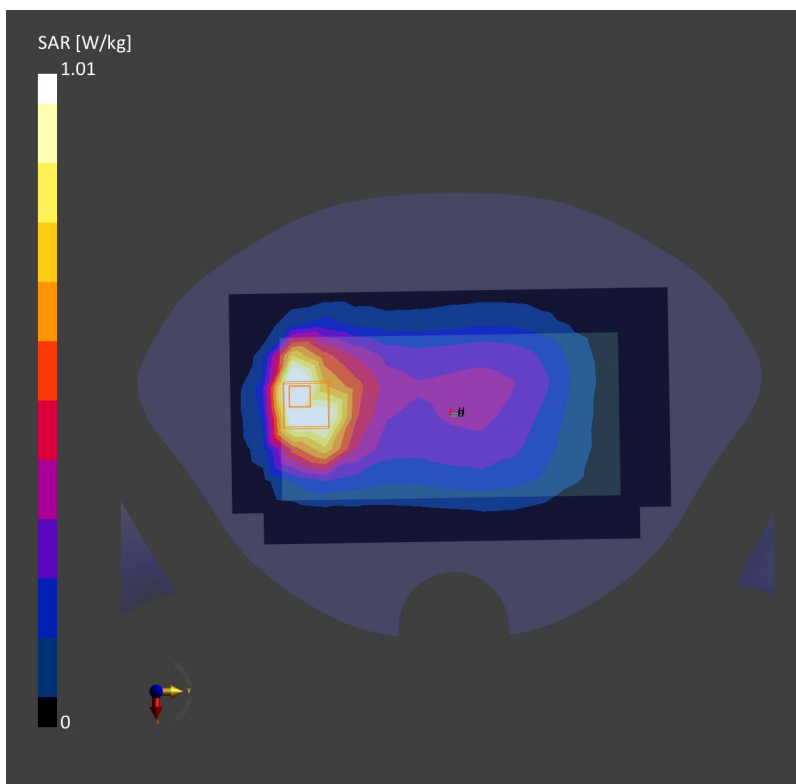

17_GSM1900_GPRS (2 Tx slots) _Back_5mm_Ch810

Communication System: PCS 1900; Frequency: 1909.8

Medium: HSL. Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.805 W/kg; SAR (10g) = 0.425 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.481 W/kg;

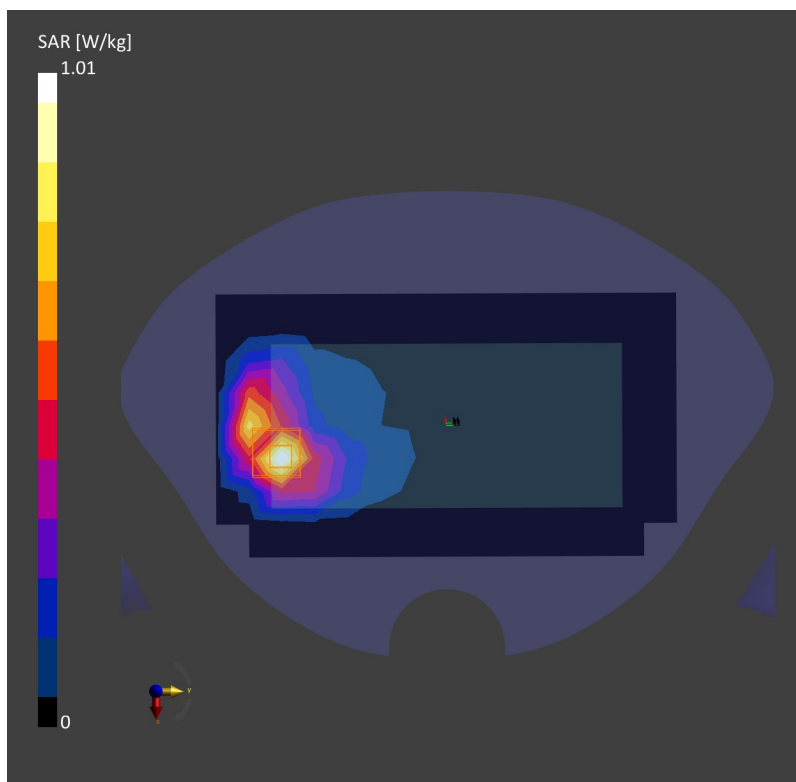

18_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9400

Communication System: Band 2, UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.940 W/kg; SAR (10g) = 0.498 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 1.11 W/kg; SAR (10g) = 0.534 W/kg;

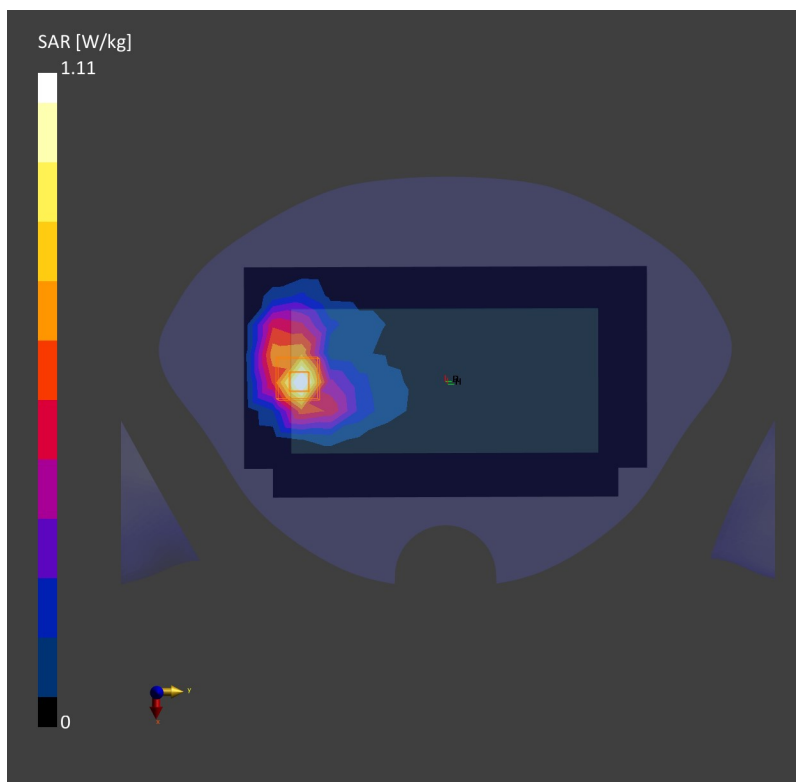

19_LTE Band 2_20M_QPSK_1RB_0Offset_Back_5mm_Ch18700

Communication System: Band 2, E-UTRA/FDD; Frequency: 1860.0

Medium: HSL. Medium parameters used: $f = 1860.0$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.679 W/kg; SAR (10g) = 0.376 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.10 dB

SAR (1g) = 0.961 W/kg; SAR (10g) = 0.465 W/kg;

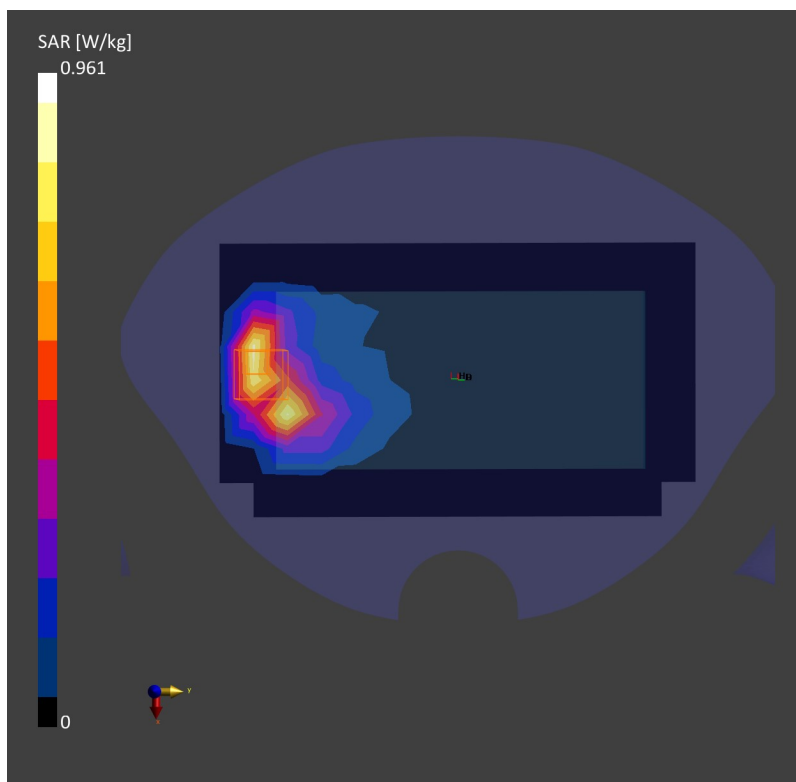

20_LTE Band 7_20M_QPSK_50RB_0Offset_Front_5mm_Ch21350

Communication System: Band 7, E-UTRA/FDD; Frequency: 2560.0

Medium: HSL. Medium parameters used: $f = 2560.0$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.522 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.858 W/kg; SAR (10g) = 0.434 W/kg;

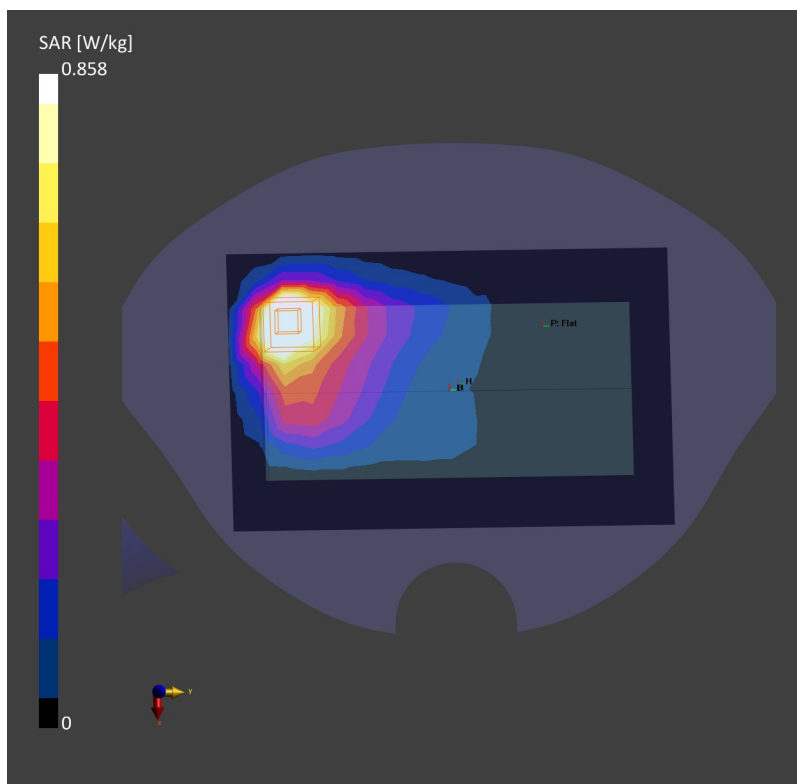

21_LTE Band 41_20M_QPSK_1RB_0Offset_Back_5mm_Ch40620

Communication System: Band 41, E-UTRA/TDD; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.800 W/kg; SAR (10g) = 0.398 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.10 dB

SAR (1g) = 0.903 W/kg; SAR (10g) = 0.411 W/kg;

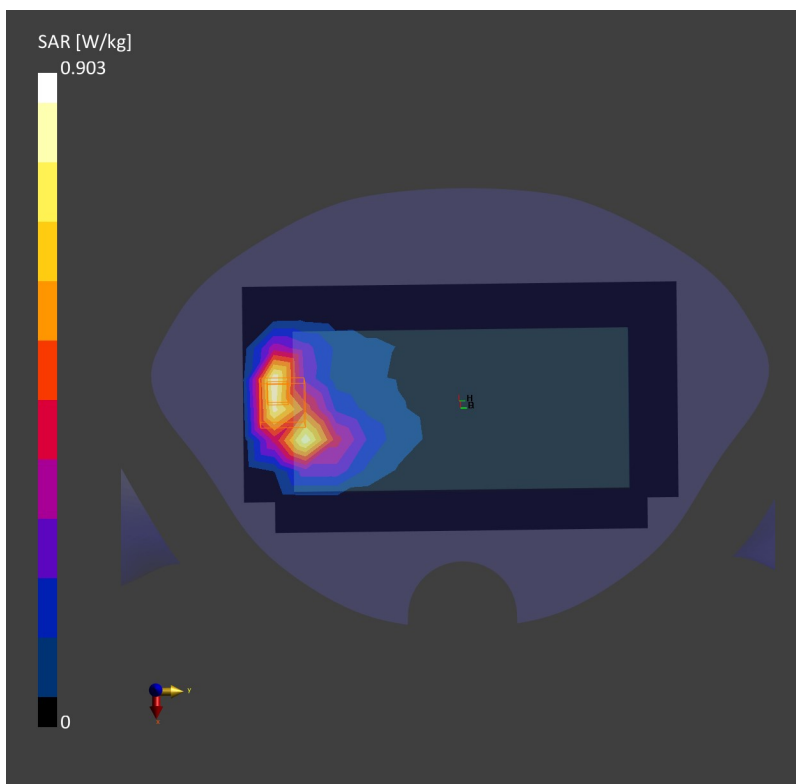

22_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.0

Medium: HSL. Medium parameters used: $f = 2412.0$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.29, 8.29, 8.29); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.499 W/kg; SAR (10g) = 0.279 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.08 dB

SAR (1g) = 0.548 W/kg; SAR (10g) = 0.303 W/kg;

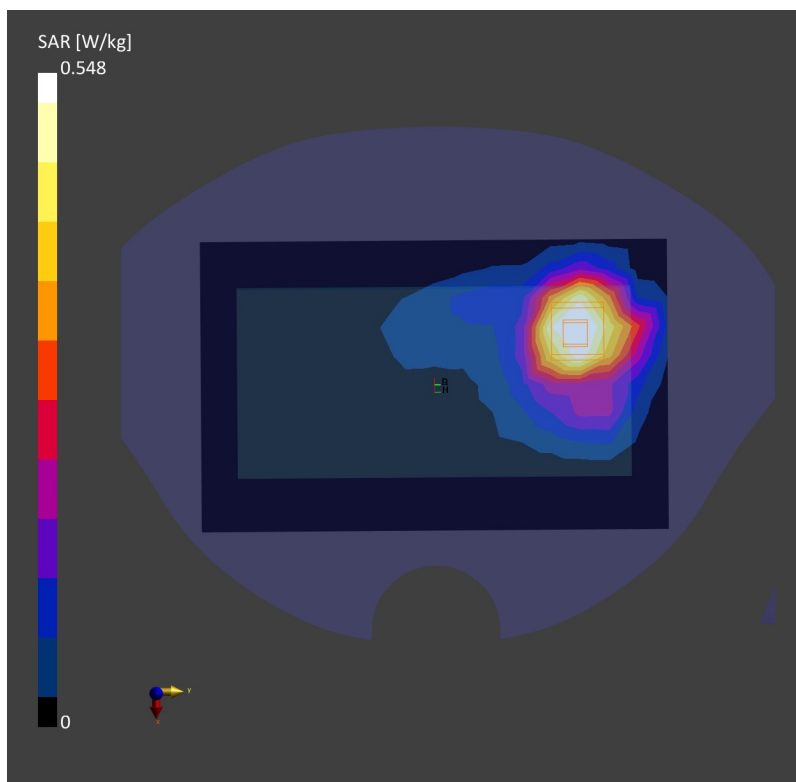

23_Bluetooth_1Mbps_Back_5mm_Ch78

Communication System: ISM 2.4 GHz Band; Frequency: 2480.0

Medium: HSL. Medium parameters used: $f = 2480.0$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.29, 8.29, 8.29); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.139 W/kg; SAR (10g) = 0.078 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.132 W/kg; SAR (10g) = 0.073 W/kg;

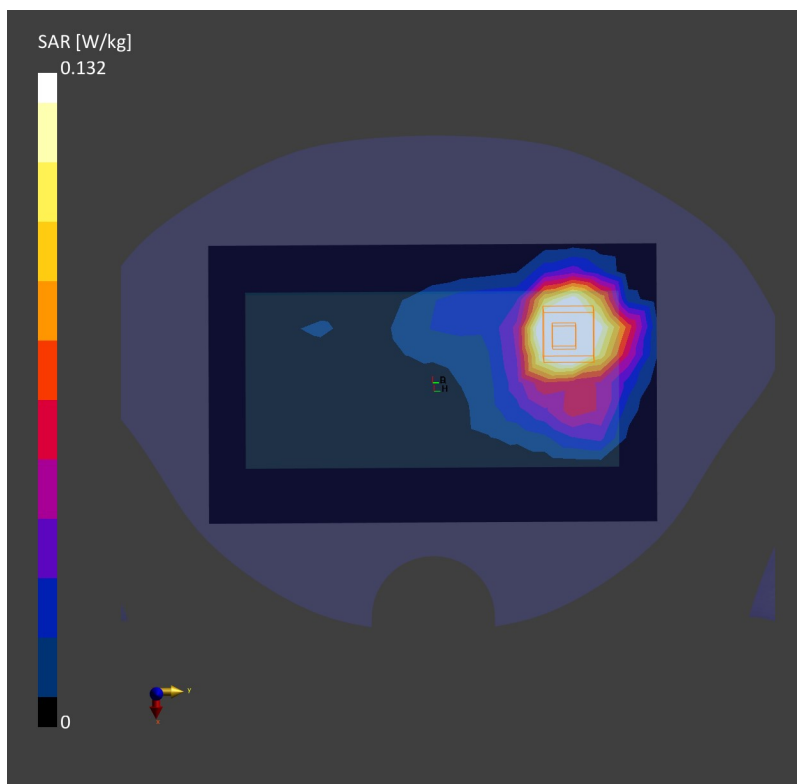

24_WLAN5GHz_802.11n-HT40 MCS0_Back_5mm_Ch46

Communication System: WLAN 5GHz; Frequency: 5230.0

Medium: HSL. Medium parameters used: $f = 5230.0$ MHz; $\sigma = 4.57$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.07, 6.07, 6.07); Calibrated: 2022-01-20
- Sensor-Surface: mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.661 W/kg; SAR (10g) = 0.219 W/kg;

Zoom Scan (24 mm x 24 mm x 22 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.712 W/kg; SAR (10g) = 0.255 W/kg;

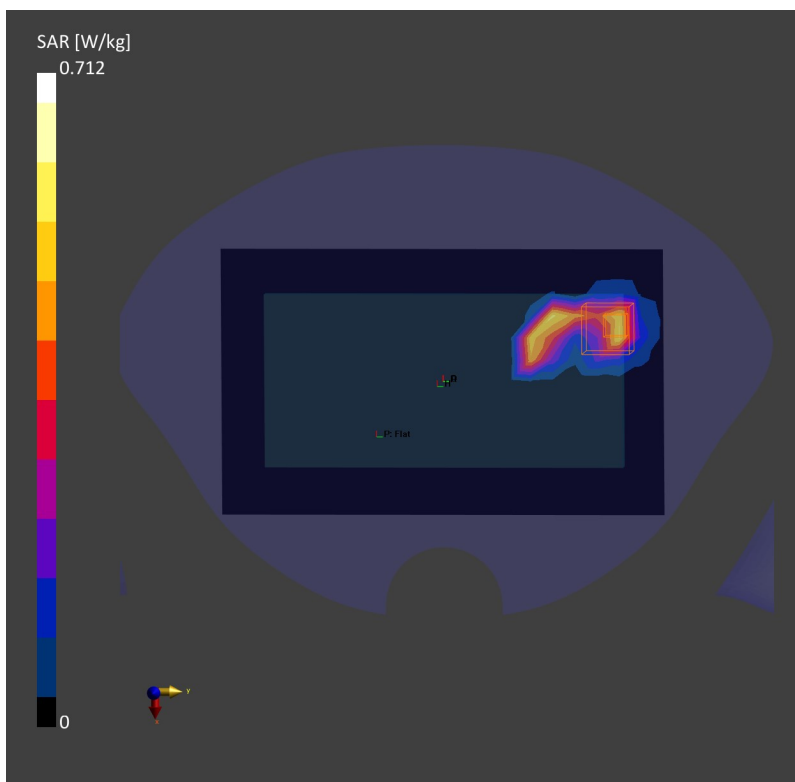

25_WLAN5GHz_802.11ac-VHT80 MCS0_Top Side_5mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL. Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.49, 5.49, 5.49); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.738 W/kg; SAR (10g) = 0.189 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.744 W/kg; SAR (10g) = 0.202 W/kg;

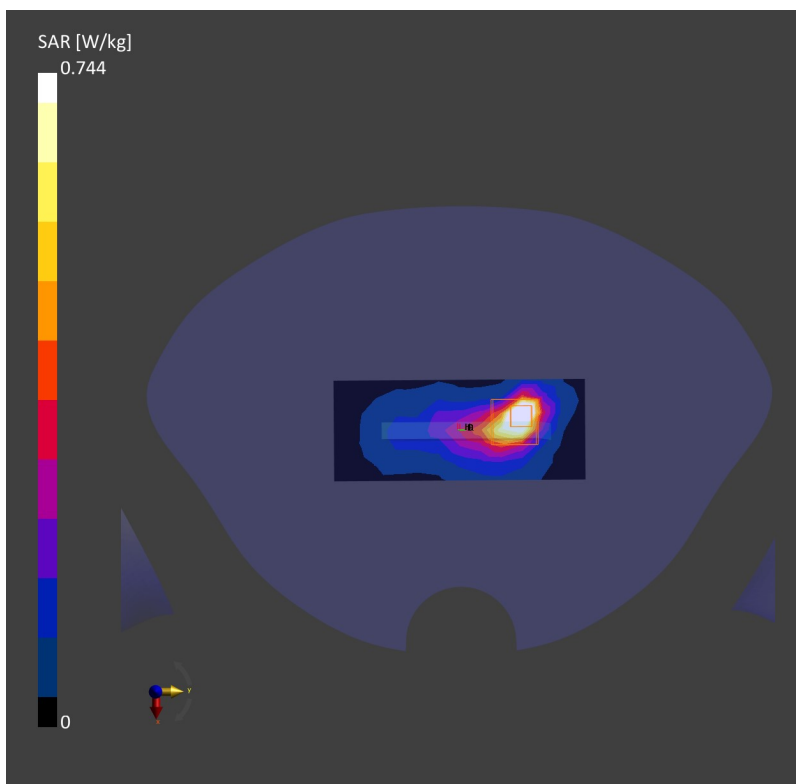

26_GSM850_GPRS (2 Tx slots)_Back_5mm_Ch189

Communication System: GSM 850; Frequency: 836.4

Medium: HSL. Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.20 W/kg; SAR (10g) = 0.719 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.618 W/kg;

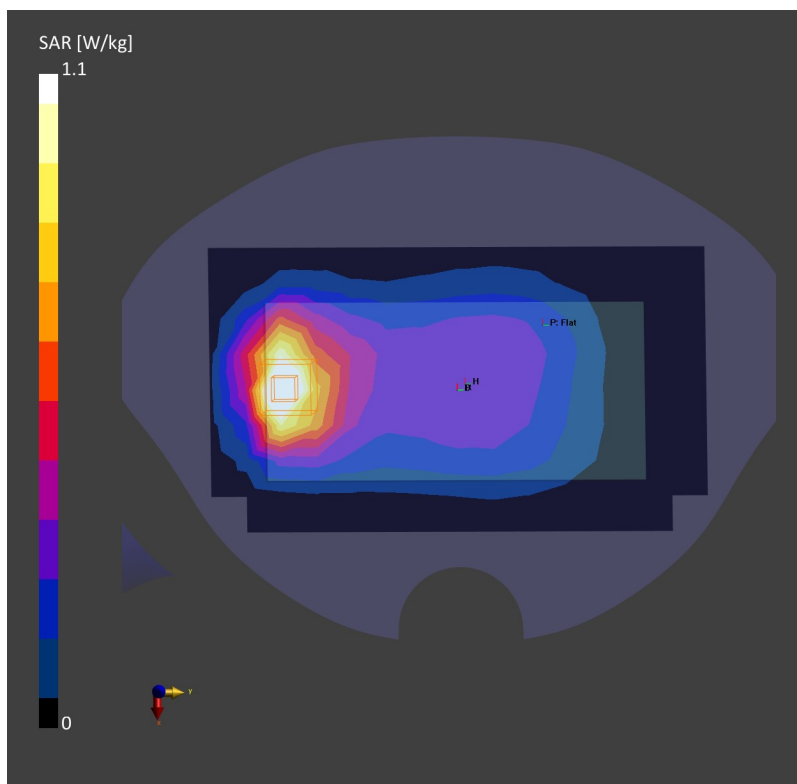

27_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4132

Communication System: Band 5, UTRA/FDD; Frequency: 826.4

Medium: HSL. Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.982 W/kg; SAR (10g) = 0.604 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.979 W/kg; SAR (10g) = 0.531 W/kg;

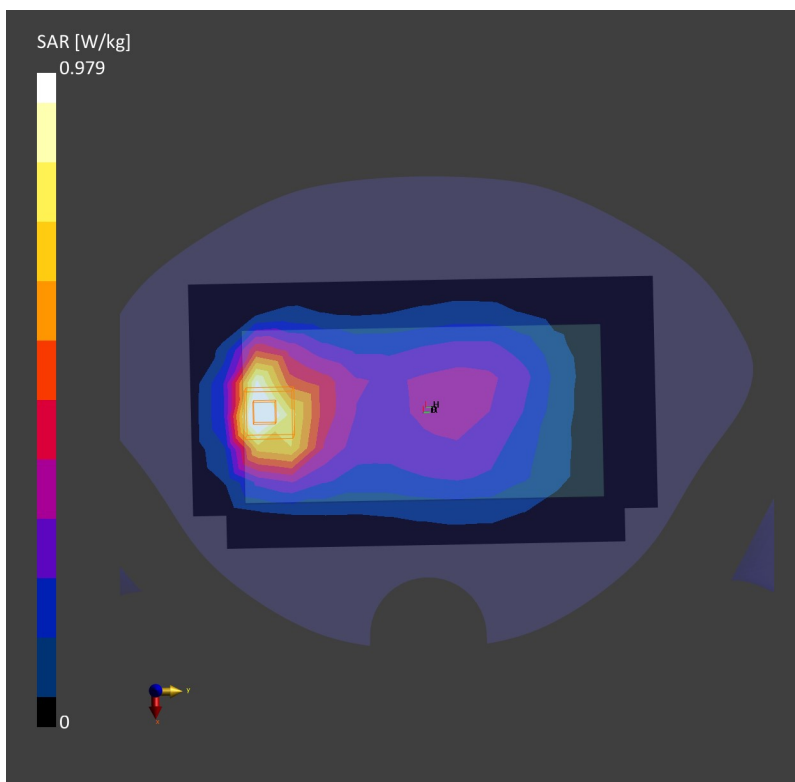

28_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5

Medium: HSL. Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.681 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.06 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.602 W/kg;

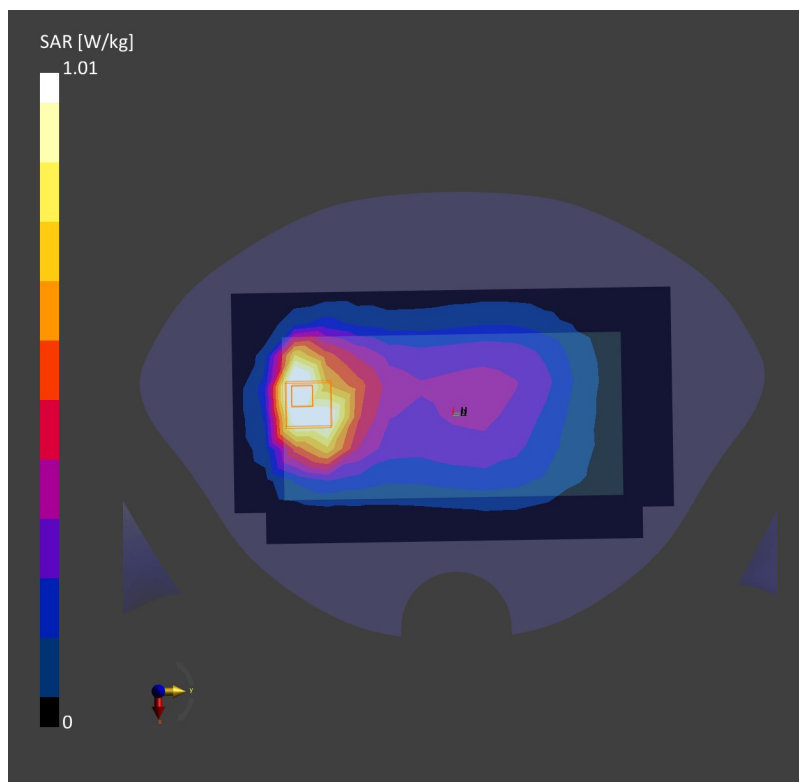

29_GSM1900_GPRS (2 Tx slots)_Back_5mm_Ch810

Communication System: PCS 1900; Frequency: 1909.8

Medium: HSL. Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.805 W/kg; SAR (10g) = 0.425 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.481 W/kg;

