



FCC Test Report

Test Report
On Behalf of
Cooler Master Technology Inc.
For
MK770

Model No.: MK-770-MCKR1-US, MK-770-MCKW1-US, MK-770-GKKR1-US,
MK-770-GKKW1-US

FCC ID: 2AR8X-MK770MCKR1US

Prepared For: Cooler Master Technology Inc.
7F., No. 398, Xinhua 1st Rd., Neihu Dist., Taipei City, 114065, Taiwan

Prepared By: Shenzhen HUAKE Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: June 19, 2023 ~ July 03, 2023

Date of Report: July 03, 2023

Report Number: HK2306192570-3E



Test Result Certification

Applicant's Name : Cooler Master Technology Inc.

Address : 7F., No. 398, Xinhua 1st Rd., Neihu Dist., Taipei City, 114065, Taiwan

Manufacturer's Name : CHUAND ELECTRONIC & TECHNOLOGY CO., LTD.

Address : Sijia Industrial Zone, Shijie Town, Dongguan City, P. R. China

Product Description

Trade Mark : Cooler Master

Product Name : MK770

Model and/or Type Reference : MK-770-MCKR1-US, MK-770-MCKW1-US, MK-770-GKKR1-US, MK-770-GKKW1-US

FCC Rules and Regulations Part 15 Subpart C Section 15.249

Standards : ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :

Date (s) of Performance of Tests : June 19, 2023 ~ July 03, 2023

Date of Issue : July 03, 2023

Test Result : Pass

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)

**Table of Contents****Page**

1 . Test Summary	5
1.1 . Test Procedures and Results	5
1.2 . Information of the Test Laboratory	5
1.3 . Measurement Uncertainty	5
2 . General Information	6
2.1 . General Description of EUT	6
2.2 . Operation of EUT during Testing	7
2.3 . Description of Test Setup	8
2.4 . Measurement Instruments List	9
3 . Conducted Emissions Test	10
3.1. Conducted Power Line Emission Limit	10
3.2. Test Setup	10
3.3. Test Procedure	10
3.4. Test Result	11
4. Radiated Emission Test	13
4.1. Radiation Limit	13
4.2. Test Setup	13
4.3. Test Procedure	14
4.4. Test Result	14
5. Band Edge	20
5.1. Limits	20
5.2. Test Procedure	20
5.3. Test Result	21
6. Occupied Bandwidth Measurement	23
6.1. Test Setup	23
6.2. Test Procedure	23
6.3. Measurement Equipment Used	23
6.4. Test Result	23
7. Antenna Requirement	25
8. Photograph of Test	26
9. Photos of the EUT	28



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	July 03, 2023	Jason Zhou



1. Test Summary

1.1. Test Procedures and Results

DESCRIPTION OF TEST	SECTION NUMBER	RESULT
CONDUCTED EMISSIONS TEST	15.207	COMPLIANT
RADIATED EMISSION TEST	15.249(a)/15.209	COMPLIANT
BAND EDGE	15.249(d)/15.205	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	15.215(c)	COMPLIANT
ANTENNA REQUIREMENT	15.203	COMPLIANT

1.2. Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.3. Measurement Uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.71dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.28dB, k=2



2. General Information

2.1. General Description of EUT

Equipment:	MK770
Model Name:	MK-770-MCKR1-US
Series Model:	MK-770-MCKW1-US, MK-770-GKKR1-US, MK-770-GKKW1-US
Model Difference:	All model's the function, software and electric circuit are the same, only with product color, Keyboard axis color and model named different. Test sample model: MK-770-MCKR1-US.
FCC ID:	2AR8X-MK770MCKR1US
Antenna Type:	PCB Antenna
Antenna Gain:	1.82dBi
Operation Frequency:	2403-2477MHz
Number of Channels:	38CH
Modulation Type:	GFSK
Power Source:	DC 3.7V from Battery or DC 5V from Type-C
Power Rating:	DC 3.7V from Battery or DC 5V from Type-C

**2.1.1. Carrier Frequency of Channels**

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403	15	2431	29	2459
2	2405	16	2433	30	2461
3	2407	17	2435	31	2463
4	2409	18	2437	32	2465
5	2411	19	2439	33	2467
6	2413	20	2441	34	2469
7	2415	21	2443	35	2471
8	2417	22	2445	36	2473
9	2419	23	2447	37	2475
10	2421	24	2449	38	2477
11	2423	25	2451		
12	2425	26	2453		
13	2427	27	2455		
14	2429	28	2457		

2.2. Operation of EUT during Testing

Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2403MHz


Middle Channel: 2441MHz

High Channel: 2477MHz



2.3. Description of Test Setup

Operation of EUT during Conducted Testing and Radiation below 1GHz Testing:

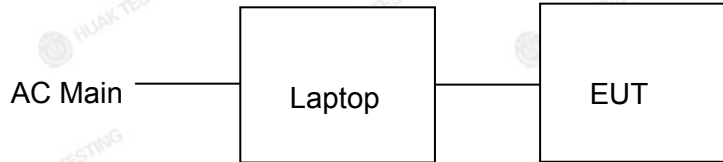

Operation of EUT during Radiation above 1GHz testing:



Laptop information

Model: TP00096A

Input: DC 20V, 2.25~3.25A

Output: 5VDC, 0.5A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.4. Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Feb. 17, 2023	1 Year
2.	Receiver	R&S	ESR-7	HKE-005	Feb. 17, 2023	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 17, 2023	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Feb. 17, 2023	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Feb. 17, 2023	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 17, 2023	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Feb. 17, 2023	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Feb. 17, 2023	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 17, 2023	1 Year
11.	Pre-amplifier	EMCI	EMC051845S E	HKE-015	Feb. 17, 2023	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Feb. 17, 2023	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JY3120-B Version	HKE-083	N/A	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Feb. 17, 2023	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Feb. 17, 2023	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Feb. 17, 2023	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 09, 2021	3 Year
19.	Hight gain antenna	Schwarzbeck	LB-180400KF	HKE-054	Feb. 17, 2023	1 Year



3. Conducted Emissions Test

3.1. Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following.

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2. Test Setup

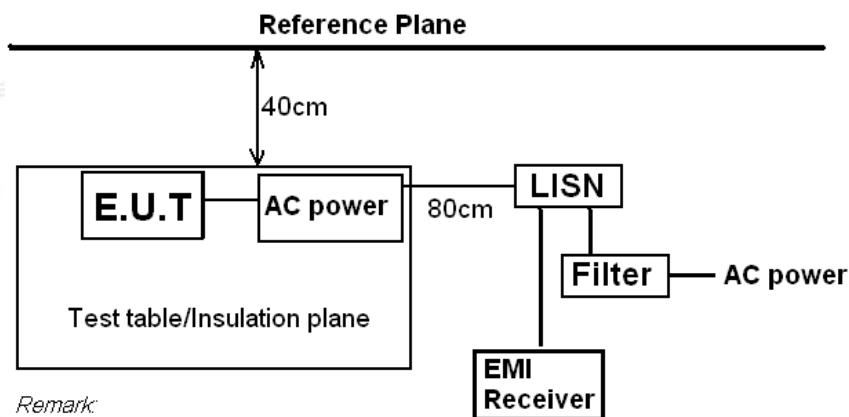

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m


3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.



3.4. Test Result

Test Specification: Line

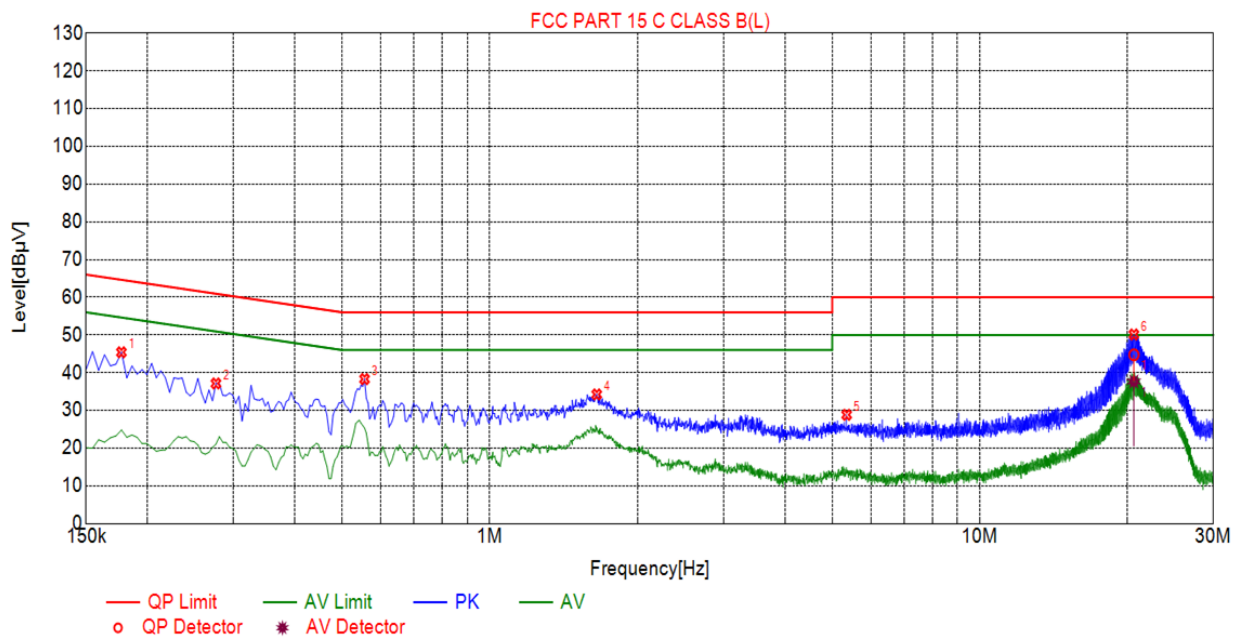

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1770	45.41	20.05	64.63	19.22	25.36	PK	L
2	0.2760	37.14	20.04	60.94	23.80	17.10	PK	L
3	0.5550	38.30	20.06	56.00	17.70	18.24	PK	L
4	1.6530	34.24	20.12	56.00	21.76	14.12	PK	L
5	5.3520	28.83	20.26	60.00	31.17	8.57	PK	L
6	20.6430	50.13	20.12	60.00	9.87	30.01	PK	L

Final Data List

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	20.6430	20.12	44.74	60.00	15.26	24.62	37.67	50.00	12.33	17.55	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

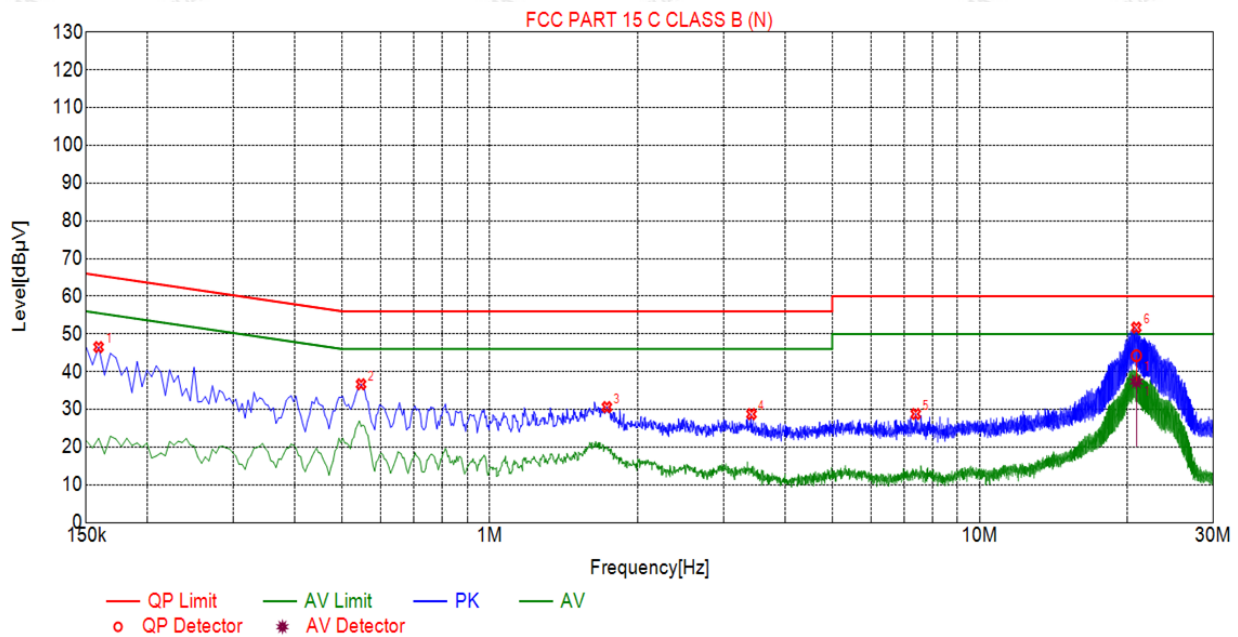

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1590	46.52	20.01	65.52	19.00	26.51	PK	N
2	0.5460	36.68	20.06	56.00	19.32	16.62	PK	N
3	1.7340	30.61	20.13	56.00	25.39	10.48	PK	N
4	3.4215	28.76	20.24	56.00	27.24	8.52	PK	N
5	7.4040	28.79	20.18	60.00	31.21	8.61	PK	N
6	20.8815	51.70	20.13	60.00	8.30	31.57	PK	N

Final Data List

NO.	Freq. [MHz]	Correction factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	20.8815	20.13	44.24	60.00	15.76	24.11	37.39	50.00	12.61	17.26	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level = Test receiver reading + correction factor



4. Radiated Emission Test

4.1. Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.490	300	$20\log 2400/F$ (kHz)	$2400/F$ (kHz)
0.490-1.705	30	$20\log 24000/F$ (kHz)	$24000/F$ (kHz)
1.705-30	30	$20\log 30$	30
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2. Test Setup

(1) Radiated Emission Test-Up Frequency Below 30MHz

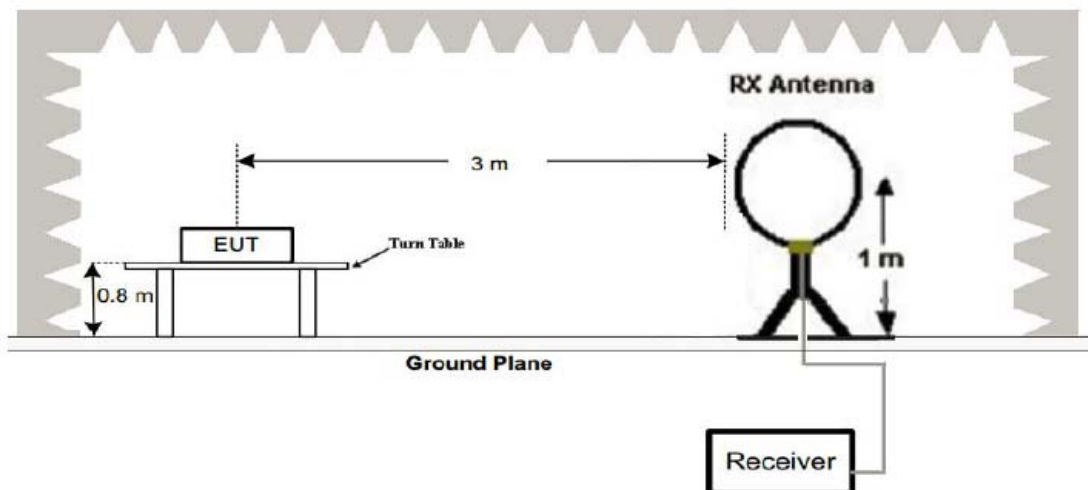


(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

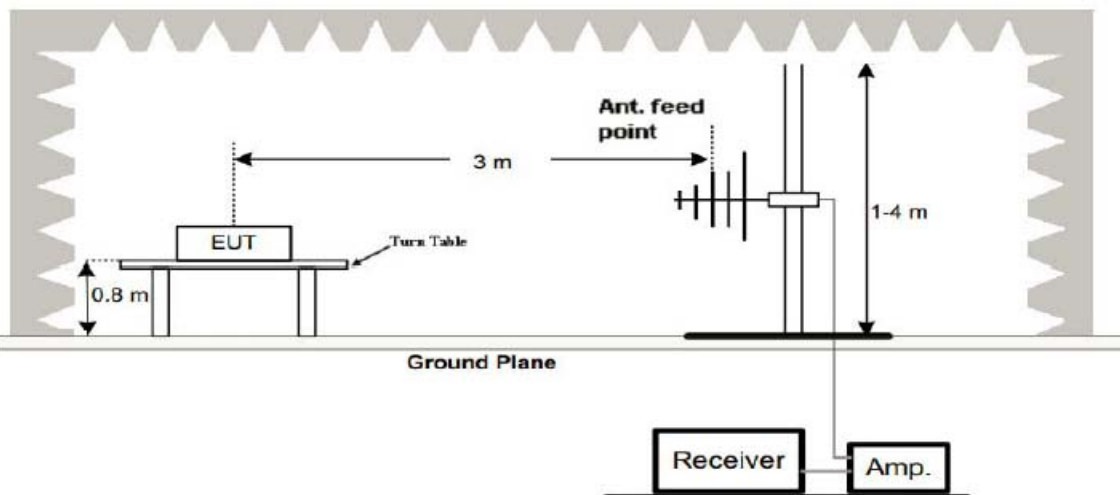



(3) Radiated Emission Test-Up Frequency Above 1GHz

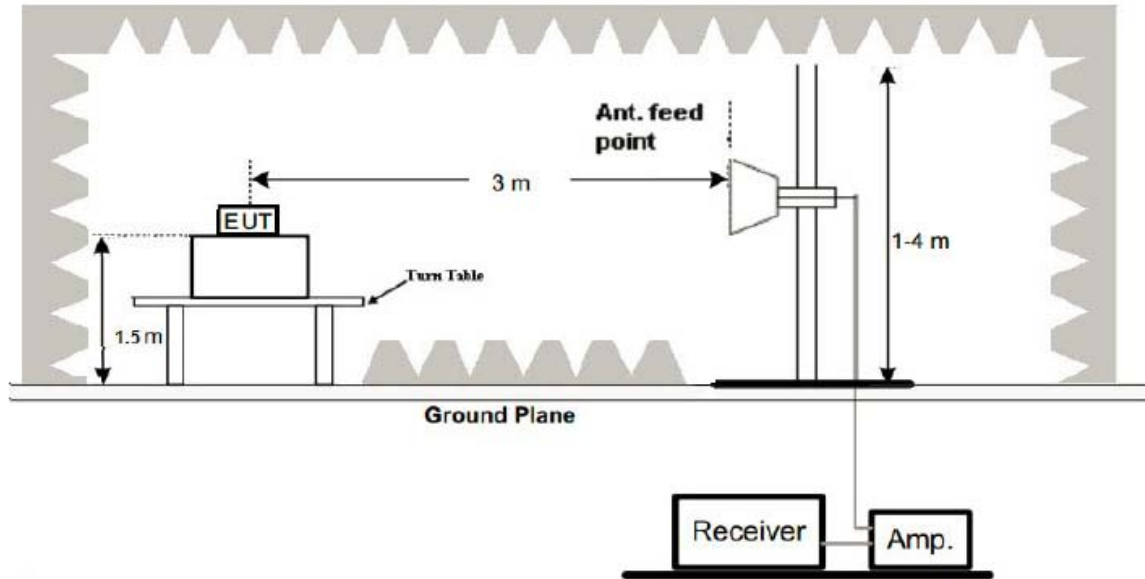

4.3. Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4. Test Result


PASS

All the test modes completed for test. The worst case of Radiated Emission is CH 01; the test data of this mode was reported.



Below 1GHz Test Results:

Antenna polarity: H

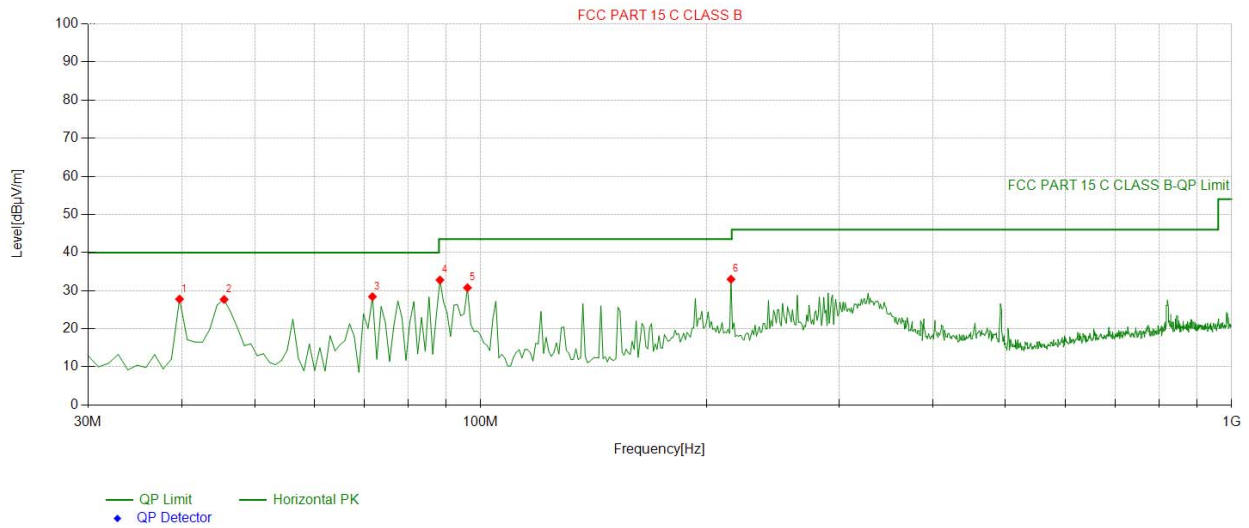


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.70971	-16.45	44.22	27.77	40.00	12.23	100	132	Horizontal
2	45.535536	-16.76	44.44	27.68	40.00	12.32	100	158	Horizontal
3	71.751752	-19.97	48.38	28.41	40.00	11.59	100	351	Horizontal
4	88.258258	-20.79	53.58	32.79	43.50	10.71	100	351	Horizontal
5	96.026026	-20.38	51.13	30.75	43.50	12.75	100	334	Horizontal
6	215.45545	-19.71	52.69	32.98	43.50	10.52	100	108	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



Antenna polarity: V

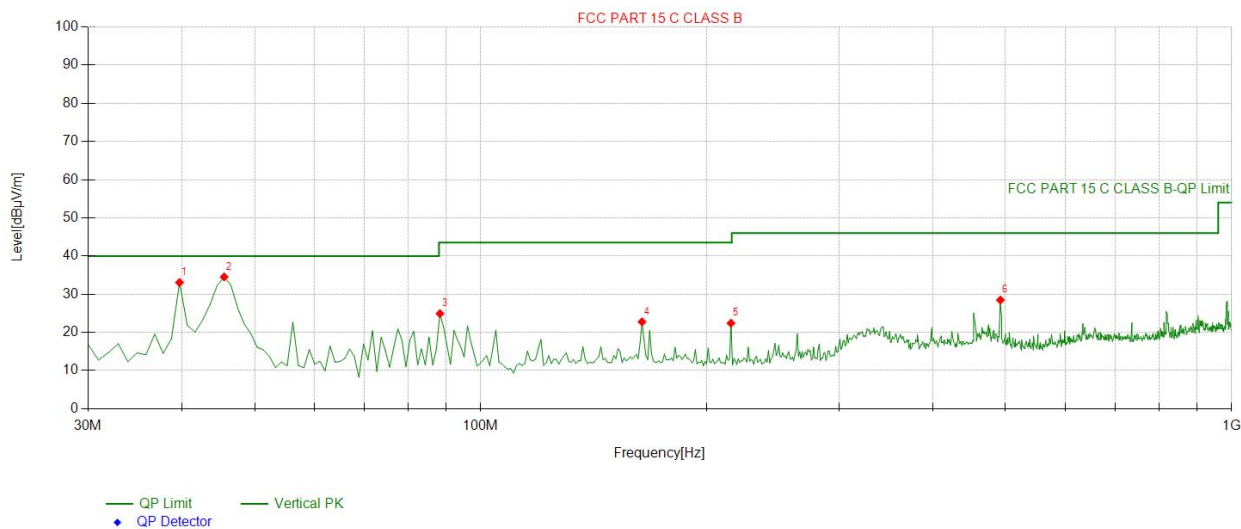

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.70971	-16.45	49.52	33.07	40.00	6.93	100	94	Vertical
2	45.535536	-16.76	51.28	34.52	40.00	5.48	100	71	Vertical
3	88.258258	-20.79	45.70	24.91	43.50	18.59	100	68	Vertical
4	163.99399	-16.39	39.15	22.76	43.50	20.74	100	268	Vertical
5	215.45545	-19.71	42.11	22.40	43.50	21.10	100	352	Vertical
6	492.18218	-14.00	42.47	28.47	46.00	17.53	100	38	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

**Above 1 GHz Test Results:****CH Low (2403MHz)****Horizontal:**

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2403	103.62	-5.84	97.78	114	-16.22	peak
2403	86.71	-5.84	80.87	94	-13.13	AVG
4806	54.29	-3.64	50.65	74	-23.35	peak
4806	41.63	-3.64	37.99	54	-16.01	AVG
7209	52.08	-0.95	51.13	74	-22.87	peak
7209	40.22	-0.95	39.27	54	-14.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2403	105.21	-5.84	99.37	114	-14.63	peak
2403	83.22	-5.84	77.38	94	-16.62	AVG
4806	54.29	-3.64	50.65	74	-23.35	peak
4806	46.12	-3.64	42.48	54	-11.52	AVG
7209	52.78	-0.95	51.83	74	-22.17	peak
7209	41.36	-0.95	40.41	54	-13.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.



CH Middle (2441MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2441	106.98	-5.71	101.27	114	-12.73	peak
2441	76.25	-5.71	70.54	94	-23.46	AVG
4882	53.84	-3.51	50.33	74	-23.67	peak
4882	43.29	-3.51	39.78	54	-14.22	AVG
7323	50.91	-0.82	50.09	74	-23.91	peak
7323	43.55	-0.82	42.73	54	-11.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2441	104.89	-5.71	99.18	114	-14.82	peak
2441	82.16	-5.71	76.45	94	-17.55	AVG
4882	56.71	-3.51	53.2	74	-20.8	peak
4882	44.92	-3.51	41.41	54	-12.59	AVG
7323	53.28	-0.82	52.46	74	-21.54	peak
7323	42.73	-0.82	41.91	54	-12.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.						



CH High (2477MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2477	106.98	-5.65	101.33	114	-12.67	peak
2477	81.24	-5.65	75.59	94	-18.41	AVG
4954	55.23	-3.43	51.8	74	-22.2	peak
4954	43.09	-3.43	39.66	54	-14.34	AVG
7431	51.86	-0.75	51.11	74	-22.89	peak
7431	41.26	-0.75	40.51	54	-13.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2477	106.58	-5.65	100.93	114	-13.07	peak
2477	81.26	-5.65	75.61	94	-18.39	AVG
4954	53.24	-3.43	49.81	74	-24.19	peak
4954	46.91	-3.43	43.48	54	-10.52	AVG
7431	51.22	-0.75	50.47	74	-23.53	peak
7431	43.98	-0.75	43.23	54	-10.77	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.



5. Band Edge

5.1. Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2. Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 1MHz and VBW to 3MHz, to measure the conducted peak band edge.



5.3. Test Result

PASS

Radiated Band Edge Test:

Operation Mode: TX CH Low (2403MHz)

Horizontal (Worst case):

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.26	-5.81	50.45	74	-23.55	peak
2310	/	-5.81	/	54	/	AVG
2390	55.13	-5.84	49.29	74	-24.71	peak
2390	/	-5.84	/	54	/	AVG
2400	51.98	-5.84	46.14	74	-27.86	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.92	-5.81	52.11	74	-21.89	peak
2310	/	-5.81	/	54	/	AVG
2390	55.28	-5.84	49.44	74	-24.56	peak
2390	/	-5.84	/	54	/	AVG
2400	53.74	-5.84	47.9	74	-26.1	peak
2400	/	-5.84	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.						



Operation Mode: TX CH High (2477MHz)

Horizontal (Worst case):

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.12	-5.65	48.47	74	-25.53	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	50.98	-5.65	45.33	74	-28.67	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.18	-5.65	50.53	74	-23.47	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	53.29	-5.65	47.64	74	-26.36	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



6. Occupied Bandwidth Measurement

6.1. Test Setup

Same as Radiated Emission Measurement

6.2. Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW= 10KHz. VBW= 30 KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

6.3. Measurement Equipment Used

Same as Radiated Emission Measurement

6.4. Test Result

PASS

Frequency	20dB Bandwidth (MHz)	Result
2403 MHz	1.043	PASS
2441 MHz	1.042	PASS
2477 MHz	1.043	PASS

CH: 2403MHz






CH: 2441MHz



CH: 2477MHz

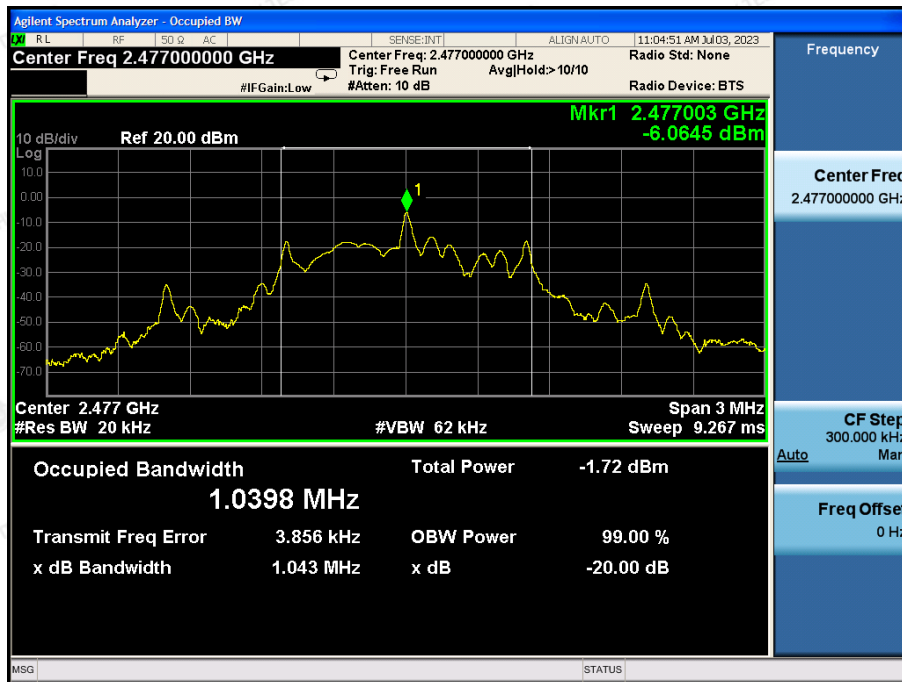



7. Antenna Requirement


Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is a PCB Antenna, is a permanently attached antenna on the PCB. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 1.82dBi.


Antenna

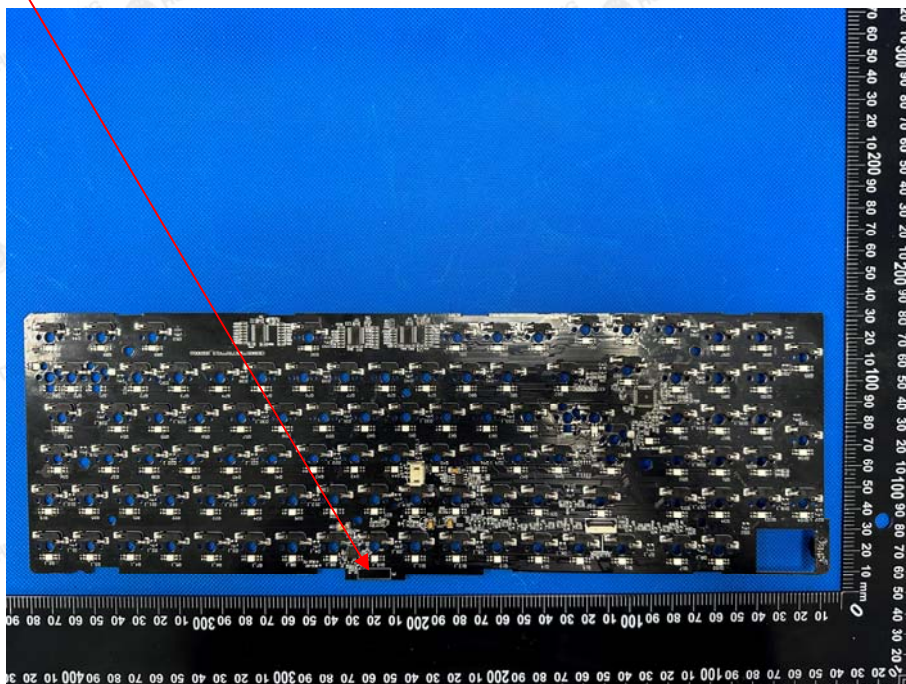



8. Photograph of Test

Radiated Emission

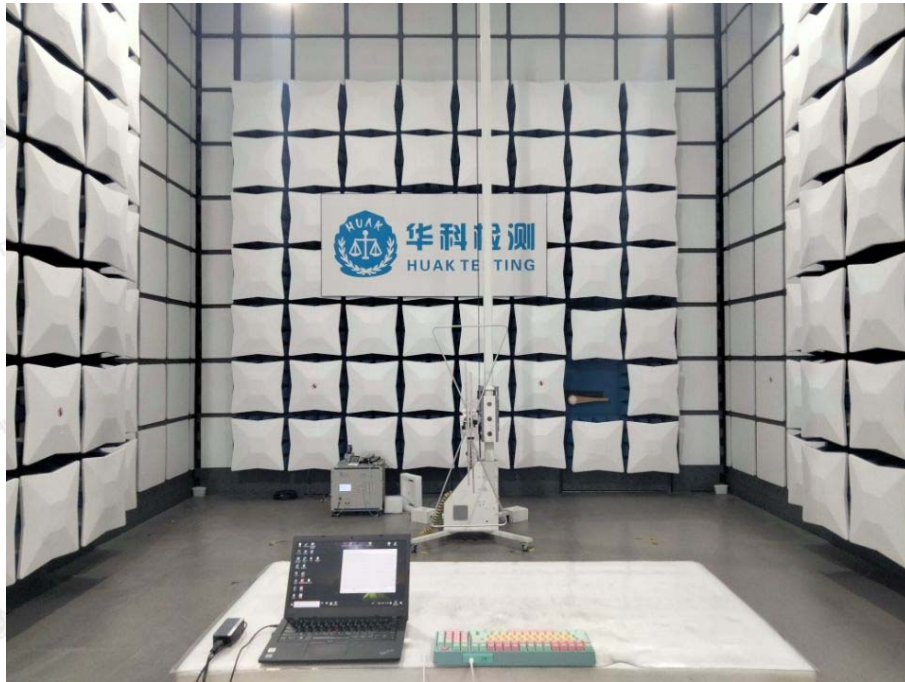



Conducted Emission





9. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----

