

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test report file number : E045R-015

Applicant : IOne Inc.

Address : Gusang Bldg., 2F., 1009-5, Daechi-Dong, Gangnam-Gu, Seoul 135-280, Korea

Manufacturer : IOne Inc.

Address : Gusang Bldg., 2F., 1009-5, Daechi-Dong, Gangnam-Gu, Seoul 135-280 Korea

Type of Equipment : Wireless LAN Device

FCC ID. : RV5AIRGATE2000K

Model Name : AirGate2000K

Serial number : None

Total page of Report : 35 pages (including this page)

Date of Incoming : November 11, 2003

Date of issue : May 07, 2004


SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.247.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: 
G. W. Lee/ Chief Engineer
EMC & Telecom Div.

Reviewed by: 
Y. K. Kwon/ Director
EMC & Telecom Div.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-007(Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

ONETECH Corp.

ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY	7
2.6 TEST FACILITY	7
3. GENERAL INFORMATION	8
3.1 PRODUCT DESCRIPTION	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	8
4. EUT MODIFICATIONS	8
5. SYSTEM TEST CONFIGURATION	9
5.1 JUSTIFICATION	9
5.3 PERIPHERAL EQUIPMENT	9
5.4 MODE OF OPERATION DURING THE TEST	9
5.5 CONFIGURATION OF TEST SYSTEM	10
5.6 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	11
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	11
6.2 GENERAL RADIATED EMISSIONS TESTS	11
7. MINIMUM 6DB BANDWIDTH	12
7.1 OPERATING ENVIRONMENT	12
7.2 TEST SET-UP	12
7.3 TEST EQUIPMENT USED	12
7.4 TEST DATA	13
8. MAXIMUM PEAK OUTPUT POWER	17
8.1 OPERATING ENVIRONMENT	17

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-007(Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

8.2 TEST SET-UP	17
8.3 TEST EQUIPMENT USED	17
8.4 TEST DATA	18
9. MAXIMUM PERMISSIBLE EXPOSURE	22
9.1 RF EXPOSURE CALCULATION	22
7.2 CALCULATED MPE SAFE DISTANCE	22
10. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	23
10.1 OPERATING ENVIRONMENT	23
10.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	23
10.3 TEST SET-UP FOR RADIATED MEASUREMENT	23
10.4 TEST EQUIPMENT USED	23
10.5. TEST DATA	24
10.5.1. TEST DATA FOR CONDUCTED EMISSION	24
10.5.2. TEST DATA FOR RADIATED EMISSION	29
10.5.2.1. RADIATED EMISSION WHICH FALL IN THE RESTRICTED BAND	29
10.5.2.2. SPURIOUS & HARMONIC RADIATED EMISSION	30
11. PEAK POWER SPECTRUL DENSITY	32
11.1 OPERATING ENVIRONMENT	32
11.2 TEST SET-UP	32
11.3 TEST EQUIPMENT USED	32
11.4 TEST DATA	33
12. RADIATED EMISSION TEST, GENERAL REQUIREMENT	36
12.1 OPERATING ENVIRONMENT	36
12.2 TEST SET-UP	36
12.3 MEASUREMENT UNCERTAINTY	36
12.4 TEST EQUIPMENT USED	36
12.5 TEST DATA	37
13. CONDUCTED EMISSION TEST	38
13.1 OPERATING ENVIRONMENT	38
13.2 TEST SET-UP	38
13.3 MEASUREMENT UNCERTAINTY	38
13.4 TEST EQUIPMENT USED	38

13.5 TEST DATA	39
-----------------------------	-----------

1. VERIFICATION OF COMPLIANCE

APPLICANT : IPOne Inc.
 ADDRESS : Gusang Bldg., 2F., 1009-5, Daechi-Dong, Gangnam-Gu, Seoul 135-280, Korea
 CONTACT PERSON : Jeengee Kim / Principal Engineer
 TELEPHONE NO : +82-2-3011-0916
 FCC ID : RV5AIRGATE2000K
 MODEL NO/NAME : AirGate2000K
 SERIAL NUMBER : N/A
 DATE : May 07, 2004

DEVICE TYPE	Wireless LAN Device - <i>DIGITAL TRANSMISSION SYSTEM</i>
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	1 METER(S) OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.207 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 and is not affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Output Power	Met the Limit / PASS
15.247 (b) (5)	Radio Frequency Exposure Level	Met the Limit / PASS
15.247 (c)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (c)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (d)	Peak Power Spectral Density	Met the Limit / PASS
15.209 and 15.109	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207 and 15.107	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4/2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myeon, Gwangju-Si, Gyeonggi-Do 464-080 Korea. Description details of test facilities were submitted to the Federal Communications Commission on January 18, 2002 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV, SEMKO and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

3. GENERAL INFORMATION

3.1 Product Description

The IOne Inc., Model Airgate 2000K (referred to as the EUT in this report) is an Access Point, which is consisting of which is consisting of two Ethernet interface. One of the two Ethernet interface is 'WAN' interface and the other is 'LAN' interface. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Wireless LAN Device
SPREAD SPECTRUM TYPE	DSSS
STANDARD	IEEE 802.11b
PROTOCOL	CSMA/CA
OPERATING FREQUENCY	2.412 ~ 2.462 GHz
OUTPUT POWER	Typ. 20dBm
DATA TRANSFER RATE	11 Mbps
CHANNEL	11 Channels
MODULATION TYPE	DBPSK, DQPSK, CCK
DUTY CYCCLE	100%
ANTENNA	SMA Type OMNI
ANTENNA GAIN	2.0dBi
LIST OF EACH OSC. ORCRY. FREQ.(FREQ.>=1MHz)	12.0, 25.0 MHz
NUMBER OF LAYER	Main Board: 6 Layers
POWER REQUIREMENT	DC 5V, 1.5A from AC/DC Adapter
TEMPERATURE CONDITION	Operation: -100°C ~ 50°C, Storage: -20°C ~ 70°C
EXTERNAL CONNECTOR	2 SMA Type Antenna Connectors, DC Input Port, 3 RJ 45 Ports

3.2 Alternative type(s)/model(s); also covered by this test report.

No other model differences have been mentioned.

4. EUT MODIFICATIONS

None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	IPOne Inc.	N/A	N/A
RF MODULE	Senao International Co., Ltd	SL-2511CD PLUS EXT2 MERCURY	N/A

5.3 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
Airgate2000K	IPOne Inc.	RV5AIRGATE2000K	Wireless LAN Device (EUT)	HOST
HES12-050240-8	Hitron Electronics	N/A	AC/DC Adapter	EUT
PLL011	Dell Computer Corp.	DoC	Notebook PC (HOST)	EUT
ADP-70EB	Delta Electronics	N/A	AC/DC Adapter	HOST
X06-08477	Dell Computer Corp.	DoC	Mouse	HOST
2225C	HP	DS16XU2225	Printer	HOST

5.4 Mode of operation during the test

The EUT has a detachable antenna, so the antenna was fitted in a manner typical of normal intended use and the transmitting signal was modulated as specified by the manufacturer. The transmitting signal was set at maximum output power. For transmitting and receiving the RF signal between HOST and Notebook PC, software using Hyper terminal program was used supplied by the manufacturer.

5.5 Configuration of Test System

Line Conducted Test: The power cord of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power lines Conducted Emission tests were performed by using the procedure in ANSI C63.4/2001 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4/2001 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is counter clockwise SMA Type, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Stand-by mode	
Charging mode	
TX mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Stand-by mode	
Charging mode	
TX mode	X

7. MINIMUM 6dB BANDWIDTH

7.1 Operating environment

Temperature : 19°C

Relative humidity : 36 %

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.



7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Due Cal
■ -	8564E	HP	Spectrum Analyzer	3650A00756	July 10, 2004

All test equipment used is calibrated on a regular basis.

7.4 Test data

- Test Date : January 06, 2004
 - Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2412	11170	500	11120
Middle	2437	10400	500	9900
High	2462	10300	500	9800


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Dan-Gi Lee / Project Engineer



Low Channel

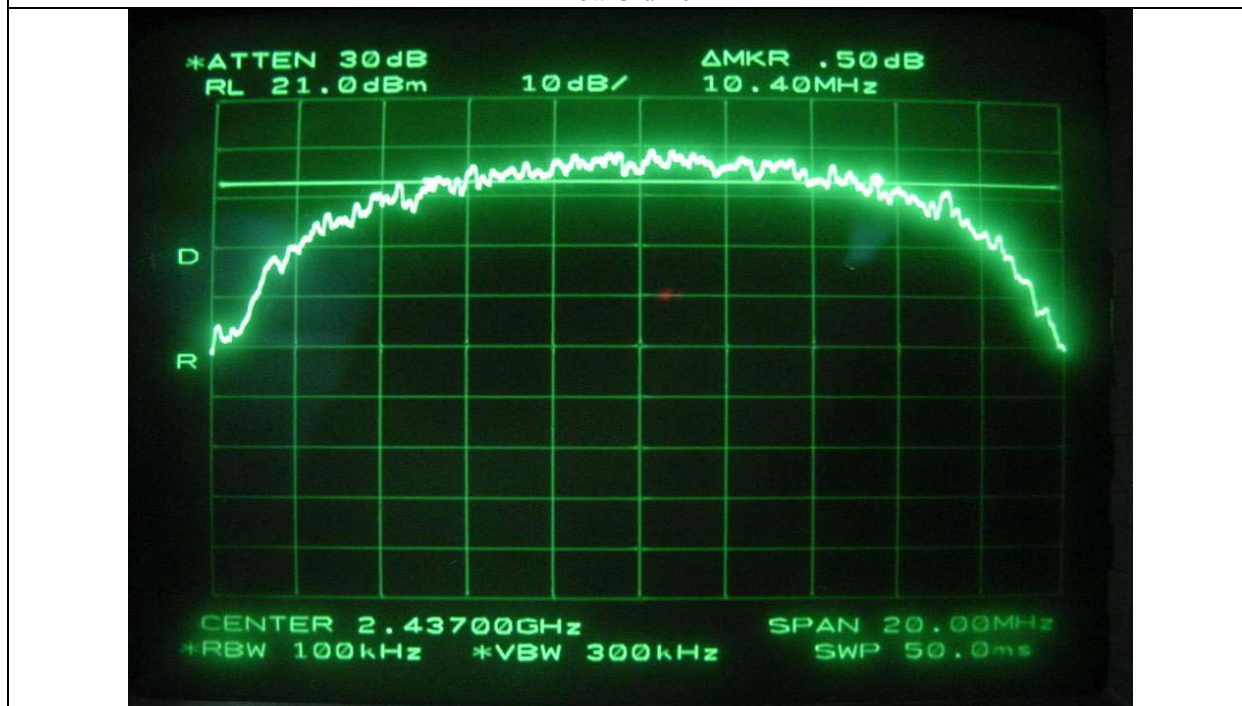

Middle Channel

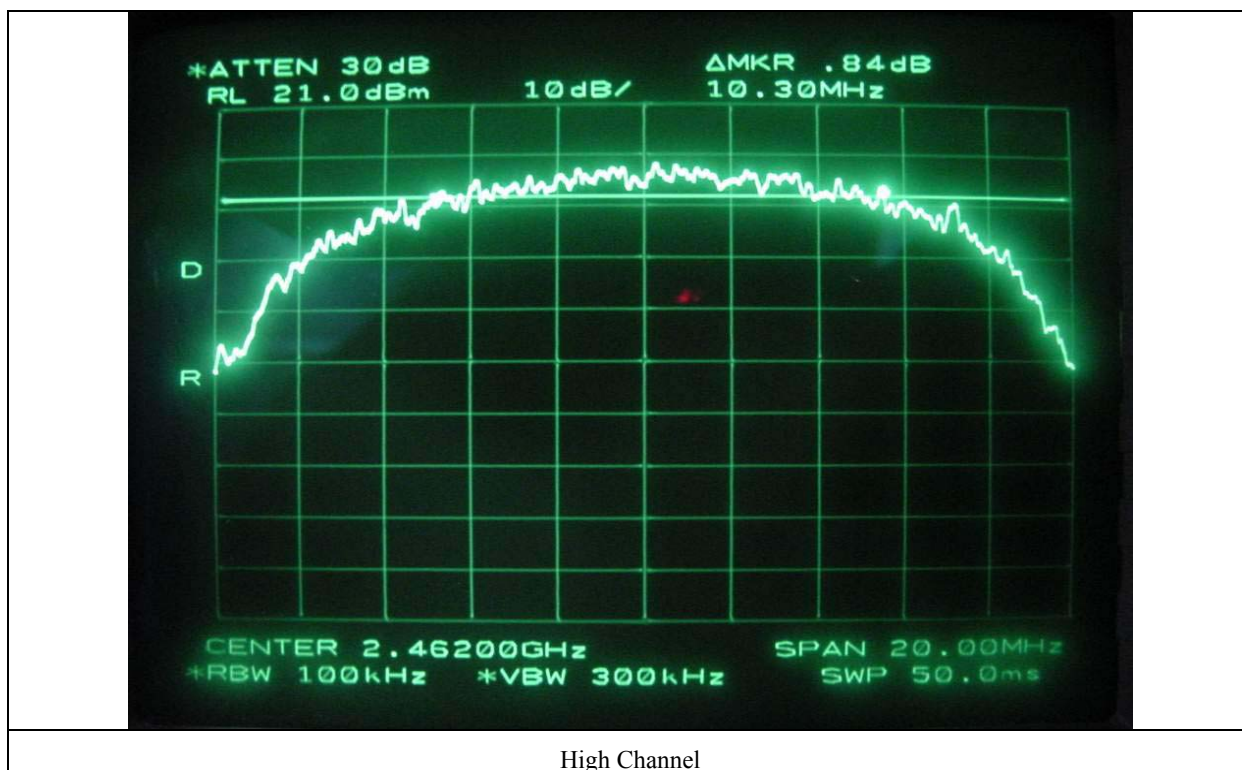

8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment

Temperature : 19°C

Relative humidity : 36 %

8.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.



8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due Cal
■ - 8564E	HP	Spectrum Analyzer	3650A00756	July 10, 2004

All test equipment used is calibrated on a regular basis.

8.4 Test data

- Test Date : January 06, 2004

- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	99% Occupied Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2412	14.83	25.30	30.0	-4.70
Middle	2437	14.92	25.40	30.0	-4.60
High	2462	14.92	25.20	30.0	-4.80




Tested by: Dan-Gi Lee / Project Engineer



Low Channel



Middle Channel

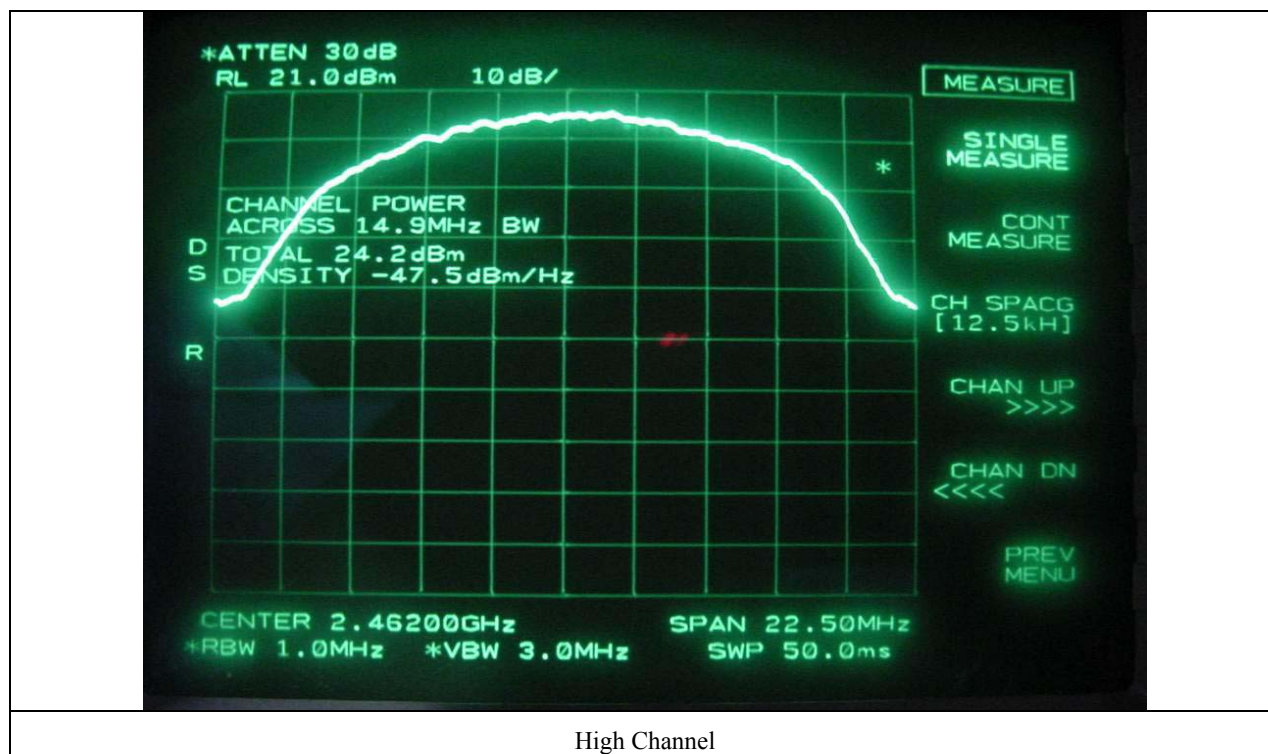

9. MAXIMUM PERMISSIBLE EXPOSURE

9.1 RF Exposure Calculation

According to the FCC rule 1.1310 table 1B, the limit for the maximum permissible RF exposure for an uncontrolled environment is 1mW/cm².

The electric field generated for a 1mW/cm² exposure is calculated as follows:

$$E = \sqrt{(30 * P * G) / d}, \text{ and } S = E^2 / Z = E^2 / 3770, \text{ because } 1\text{mW} / \text{cm}^2 = 10\text{W} / \text{m}^2$$

Where

S = Power density in mW/cm², Z = Impedance of free space, 377Ω

E = Electric field strength in Volts/m, G = Numeric antenna gain, and d = distance in meter

Combining equations and rearranging the terms to express the distance as a function of the remaining variable

$$d = \sqrt{(30 * P * G) / (3770 * S)}$$

Changing to units of mW and cm, using P (mW) = P (W) / 1000, d (cm) = 100 * d (m)

$$d = 0.282 * \sqrt{(P * G) / S}$$

Where

d = distance in cm, P = Power in mW, G = Numeric antenna gain, and S = Power density in mW/cm²

7.2 Calculated MPE Safe Distance

According to above equation, the following result was obtained.

Peak Output Power		Antenna Gain	Calculated RF Exposure Separation Distance (cm)
(dBm)	(mW)	dBi	
25.40	346.74	2.0	7.426

Following Caution on the manual will be described.

“CAUTION: Exposure to Radio Frequency Radiation.

Antenna shall be mounted in such a manner to minimize the potential for human contact during normal operation. The antenna should not be contacted during operation to avoid the possibility of exceeding the FCC radio frequency exposure limit.”

10. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

10.1 Operating environment

Temperature : 19°C

Relative humidity : 36 %

10.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.



10.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3meters, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The frequency spectrum from 30MHz to 25GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

10.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Due Cal.
■ -	8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	July 10, 2004
■ -	8449B	Hewlett-Packard	Preamplifier	3008A00833	June 10, 2004
□ -	83051A	Agilent	Preamplifier	3950M00201	June 10, 2004
■ -	MA220	HD	Turn Table	N/A	N/A
■ -	HD240	HD	Antenna Mast	N/A	N/A
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	June 6, 2004
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A


All test equipment used is calibrated on a regular basis.

10.5. Test data


10.5.1. Test data for conducted emission




Low Channel

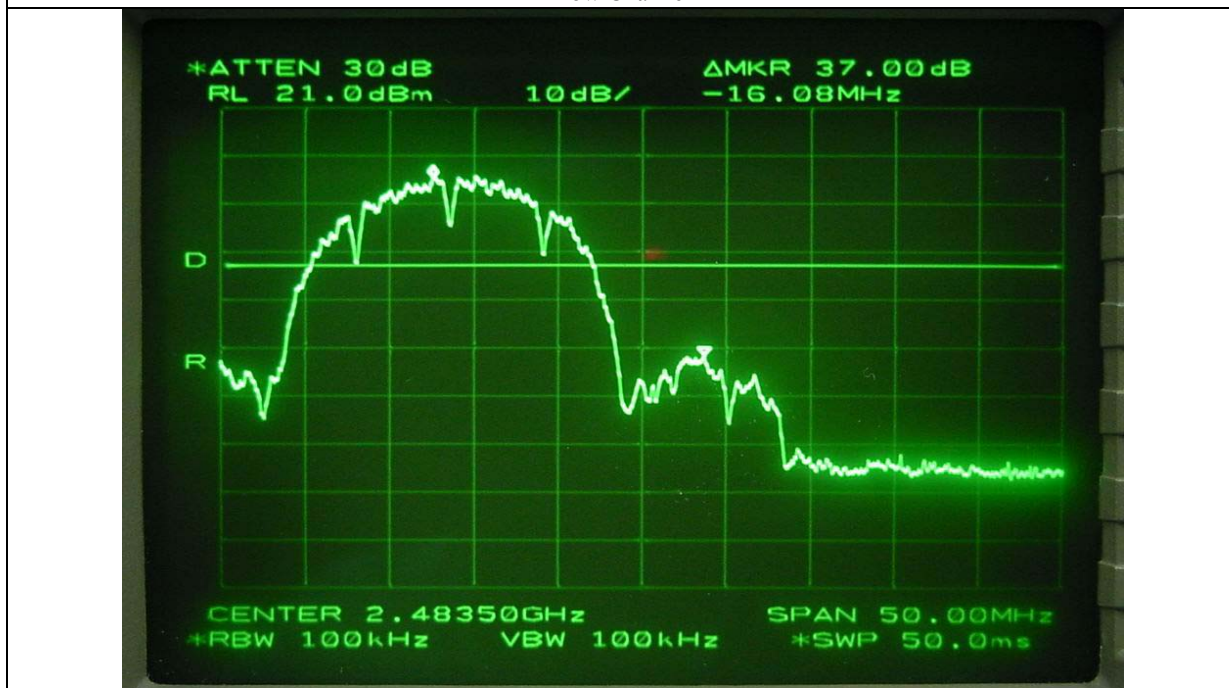


High Channel

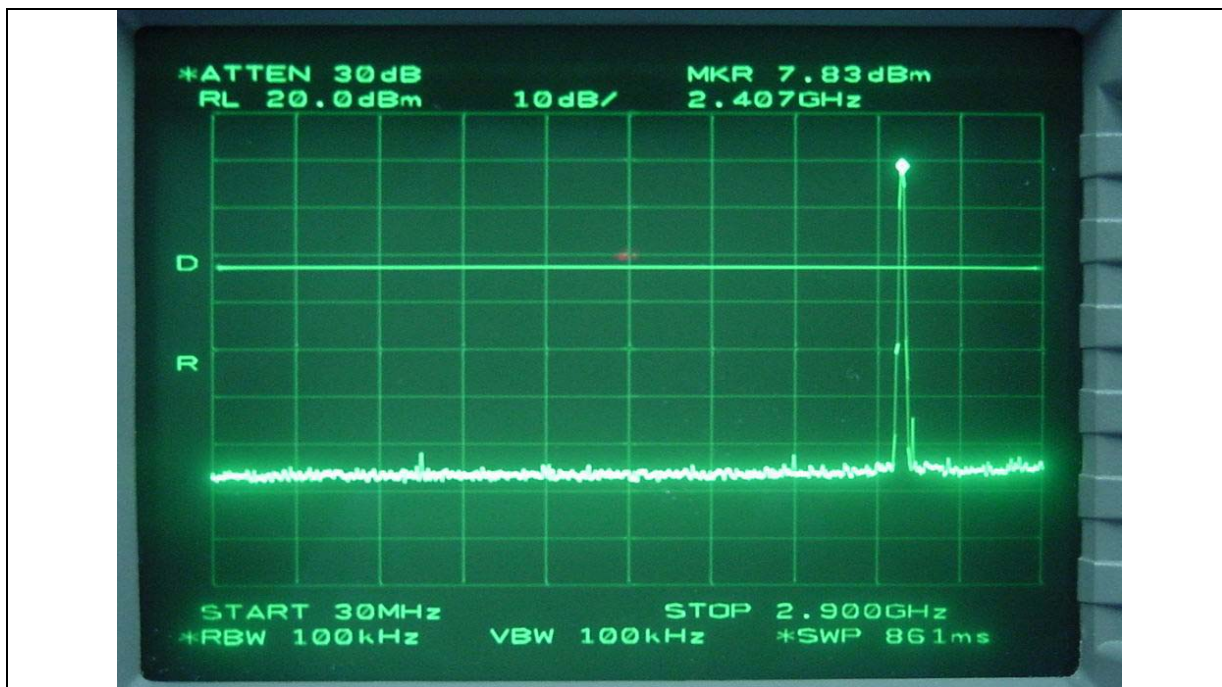


Low Channel

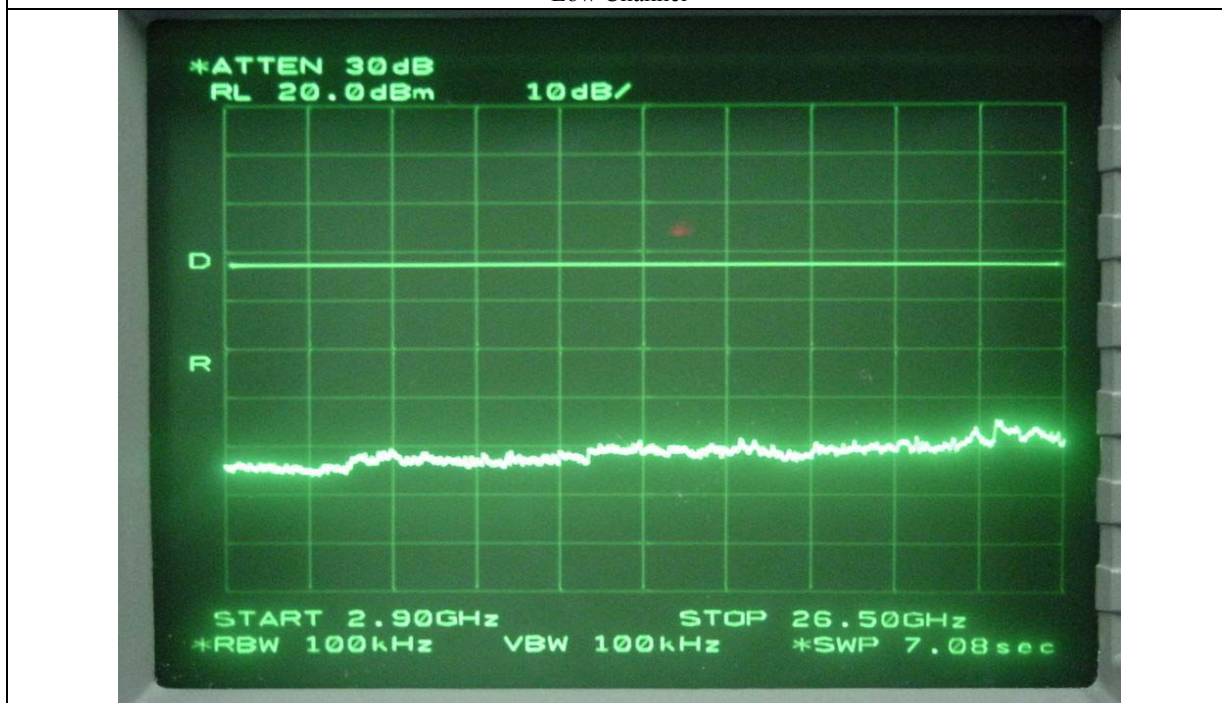


Low Channel

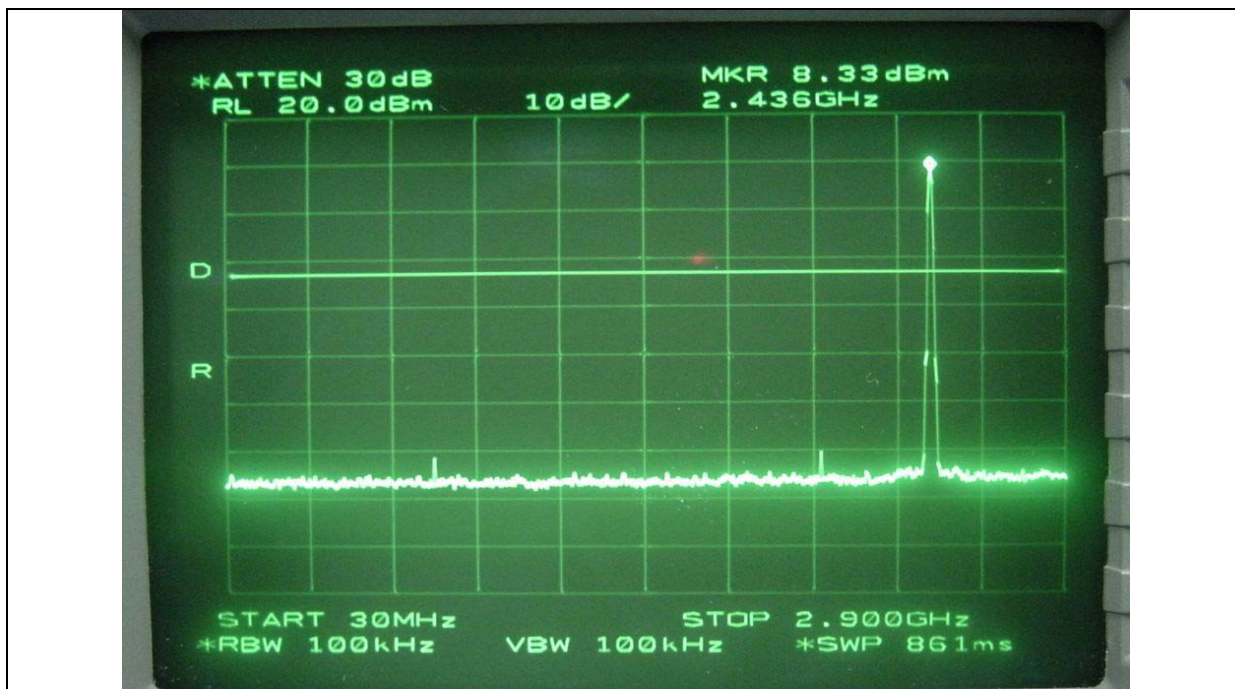


Middle Channel

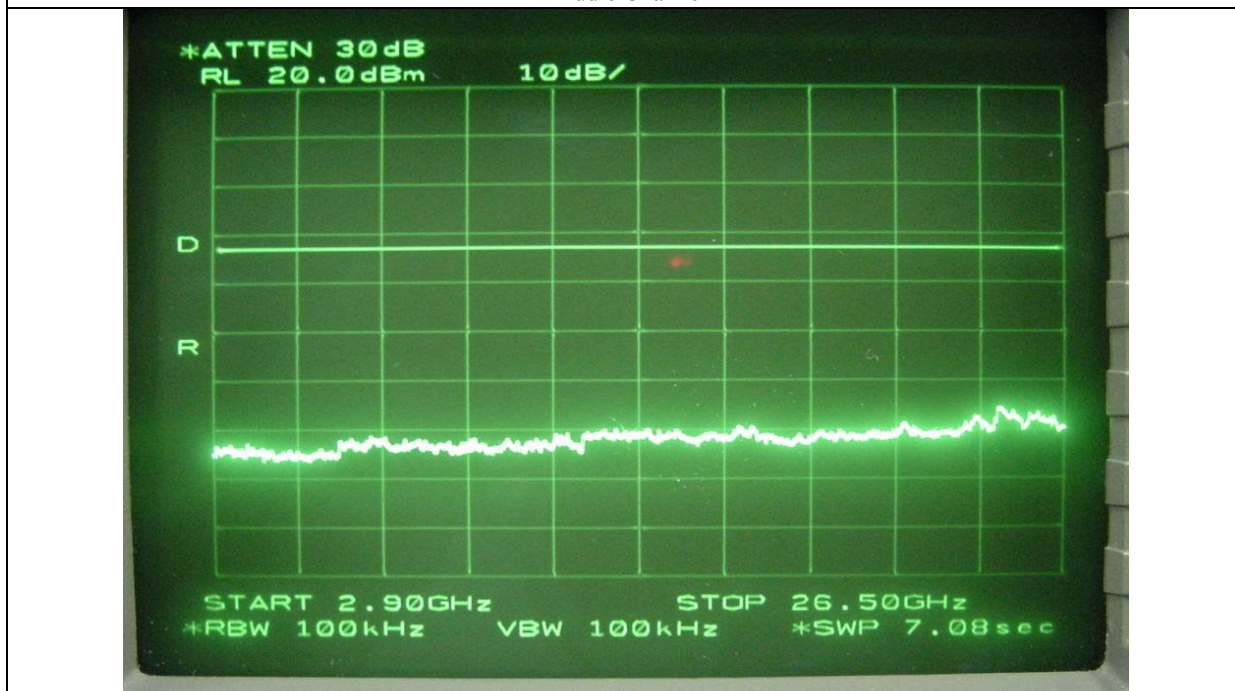

Middle Channel

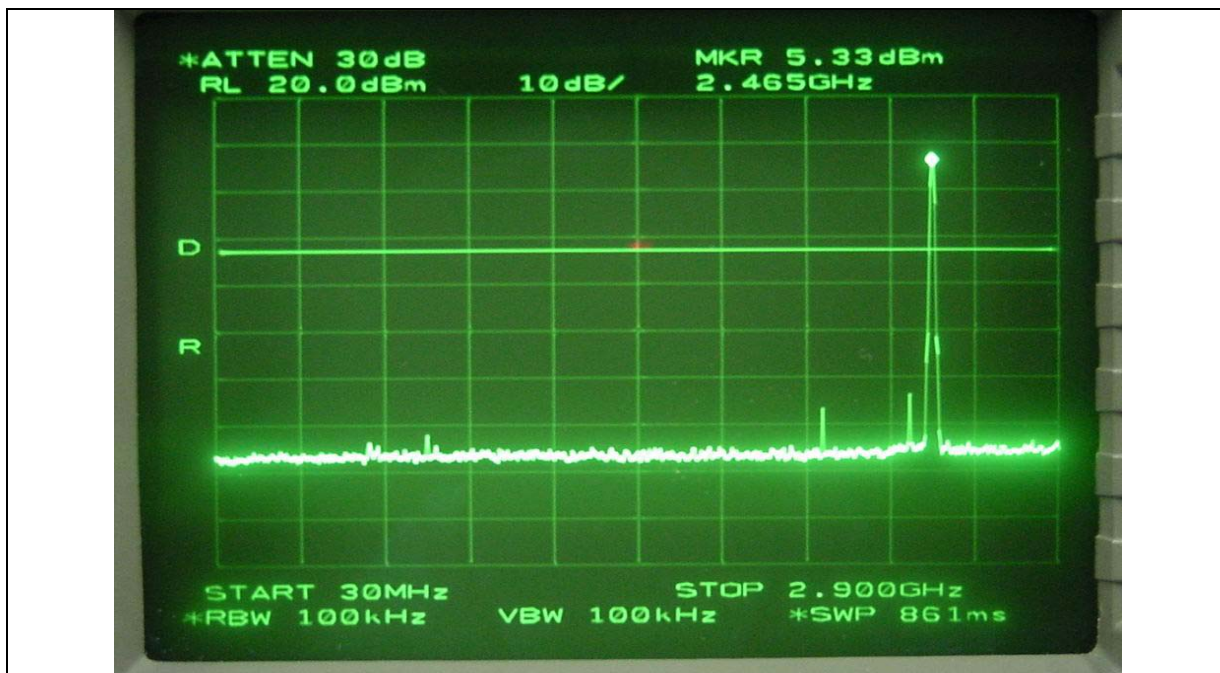

High Channel

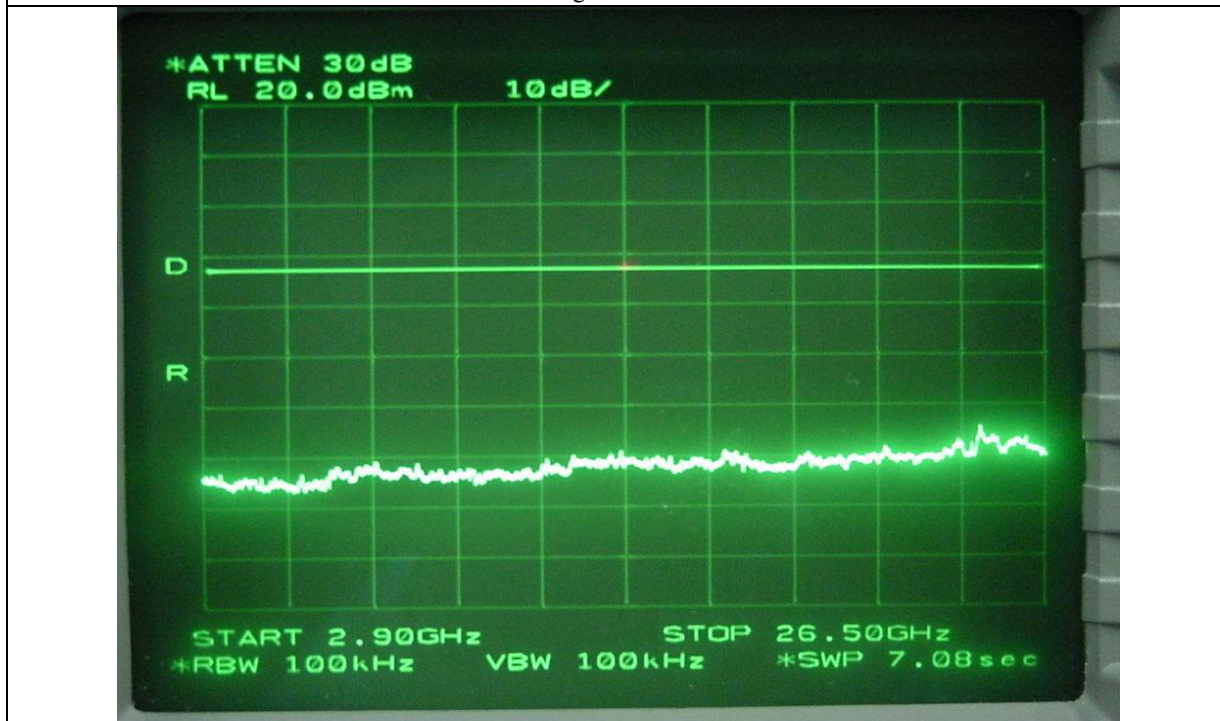

High Channel

10.5.2. Test data for radiated emission

10.5.2.1. Radiated Emission which fall in the Restricted Band

- Test Date : January 08, 2004
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25GHz
- Measurement distance : 1m
- Operating Condition : Low / High Channel
- Result : PASSED BY -1.92 dB at High Channel with Average Detector Mode

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel										
2387.20	41.90	Peak	H	27.62	2.5	-	9.5	62.52	74.0	-11.48
	40.80	Peak	V					65.92	74.0	-8.08
	31.10	Average	H					51.72	54.0	-2.28
	29.50	Average	V					50.12	54.0	-3.88
Test Data for High Channel										
2486.32	42.60	Peak	H	27.58	2.6	-	9.5	63.50	74.0	-10.50
	43.20	Peak	V					63.88	74.0	-10.12
	30.60	Average	H					51.28	54.0	-2.72
	31.40	Average	V					52.08	54.0	-1.92

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Dan-Gi Lee / Project Engineer

10.5.2.2. Spurious & Harmonic Radiated Emission

- Test Date : January 08, 2004
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 25 GHz
- Measurement distance : 1m
- Result : PASSED BY -5.91 dB at High Channel with Average Detector

Frequency (GHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel										
2.411	92.50	Peak	H	27.62	2.6	-	9.5	121.72	-	
	86.20	Peak	V					108.72	-	
4.813*	44.70	Peak	H	31.26	4.7	25.2	9.5	46.16	74.00	-27.84
	32.30	Average	H					33.56	54.00	-20.44
7.235*	51.30	Peak	H	36.59	6.5	25.1	9.5	59.79	74.00	-14.21
	39.10	Average	H					47.59	54.00	-6.41
Test Data for Middle Channel										
2.438	92.60	Peak	H	27.62	2.6	-	9.5	119.12	-	
	87.20	Peak	V					108.22	-	
4.874*	44.20	Peak	H	31.41	4.7	25.2	9.5	45.61	74.00	-28.39
	32.10	Average	H					33.51	54.00	-20.49
7.311*	49.80	Peak	H	36.59	6.6	25.2	9.5	58.29	74.00	-15.71
	37.90	Average	H					46.39	54.00	-7.61

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

-Continued

Frequency (GHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for High Channel										
2.464	99.10	Peak	H	27.58	2.6	-	9.5	129.28	-	
	85.00	Peak	V					115.18	-	
4.924*	45.10	Peak	H	31.41	4.7	25.0	9.5	46.71	74.00	-27.29
	32.50	Average	H					34.11	54.00	-19.89
7.388*	51.90	Peak	H	36.59	6.6	25.2	9.5	60.39	74.00	-13.61
	39.60	Average	H					48.09	54.00	-5.91

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Dan-Gi Lee / Project Engineer

11. PEAK POWER SPECTRUL DENSITY

11.1 Operating environment

Temperature : 19°C

Relative humidity : 36 %

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is set to 3 times the resolution bandwidth, and sweep time was set to span / 3 kHz. The sweep time was allowed to be longer than span / 3 kHz for a full response of the mixer in the spectrum analyzer.

The maximum level from the EUT in a 3 kHz bandwidth was measured with above condition.



11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due Cal
■ - 8564E	HP	Spectrum Analyzer	3650A00756	July 10, 2004

All test equipment used is calibrated on a regular basis.

11.4 Test data

- Test Date : January 06, 2004
- Result : PASSED BY -14.83 dB at Middle Channel


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2412	-12.83	8.0	-20.83
Middle	2437	-6.83	8.0	-14.83
High	2462	-7.83	8.0	-15.83

Tabulated test data for Peak Power Spectral Density.


Remark: See next page for measurement data.




Tested by: Dan-Gi Lee / Project Engineer

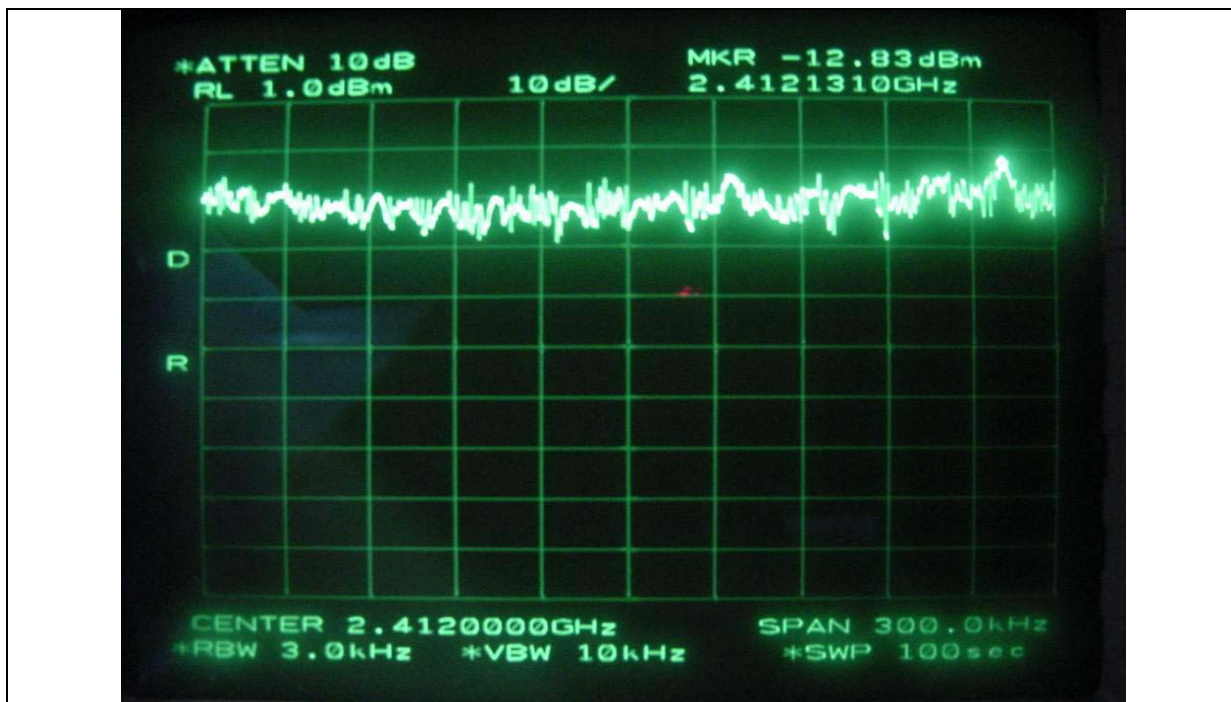

Low Channel

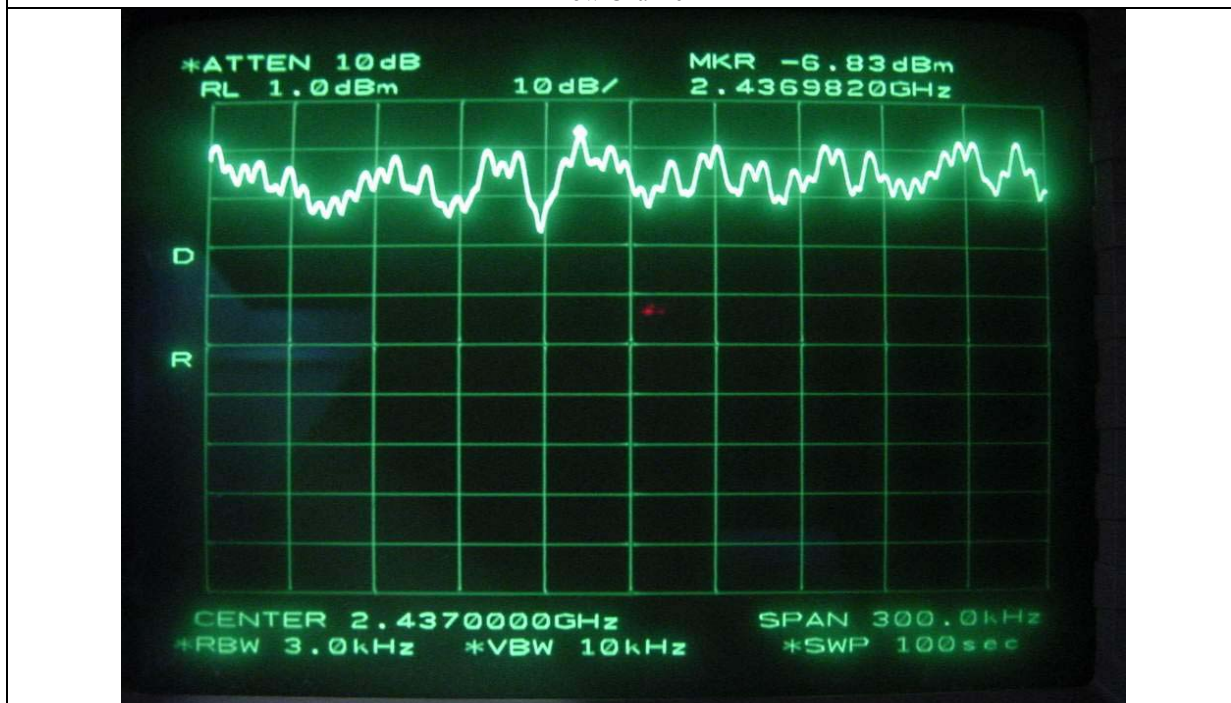

Middle Channel

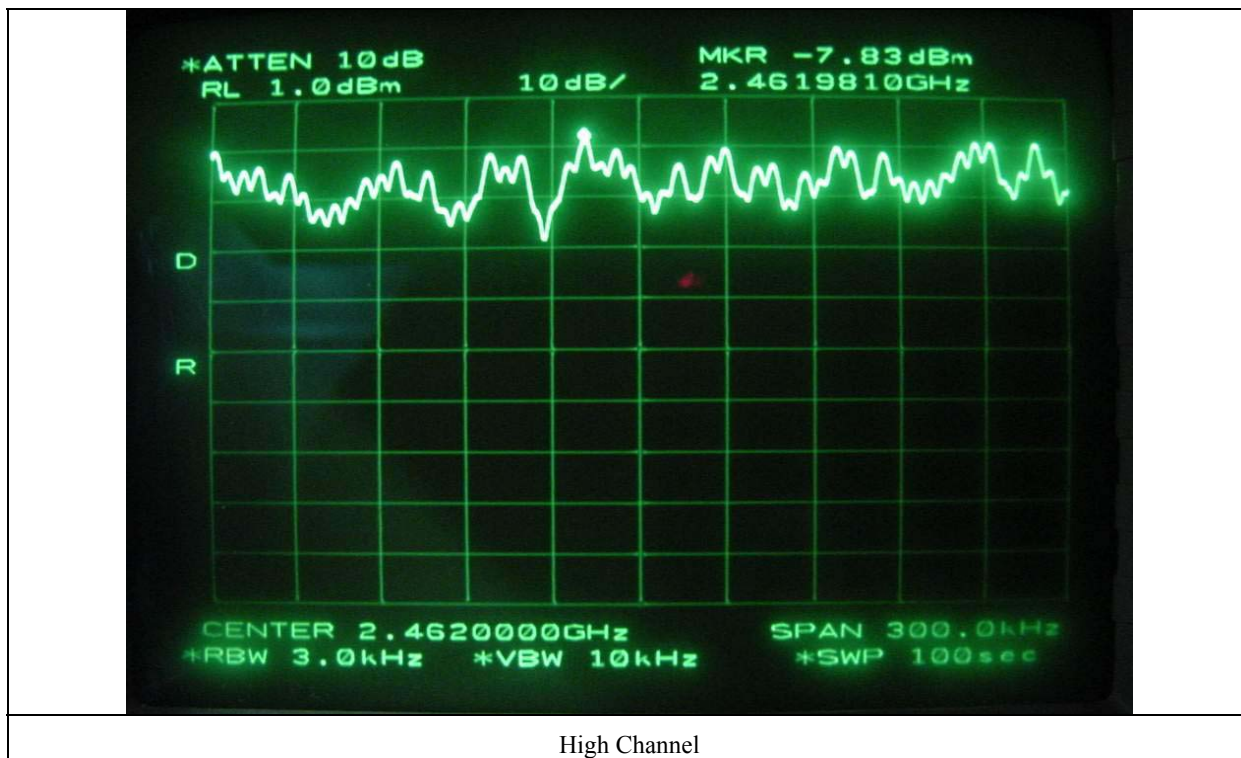

12. RADIATED EMISSION TEST, GENERAL REQUIREMENT

12.1 Operating environment

Temperature : 13°C

Relative humidity : 41 %

12.2 Test set-up

The radiated emissions measurements were on the 3 meters, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30MHz to 1000MHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

Test set-up photos are included in appendix VI.

12.3 Measurement uncertainty

Radiated emission electric field intensity, 30 MHz ~ 200 MHz : ±4.3 dB

Radiated emission electric field intensity, 200 MHz ~ 1000 MHz : ±4.1 dB

12.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Due Cal.
■ -	ESVS10	Rohde & Schwarz	EMI Test Receiver	827864/005	Nov. 01, 2004
■ -	85650A	Hewlett Packard	Quasi-Peak Adapter	3107A01542	July 10, 2004
■ -	8568B	Hewlett-Packard	Spectrum Analyzer	3109A05456	July 10, 2004
■ -	85685A	Hewlett-Packard	RF Preselector	3107A01264	July 10, 2004
□ -	8449B	Hewlett-Packard	RF Amplifier	3008A00833	June 10, 2004
□ -	8447F	Hewlett-Packard	RF Amplifier	3113A04554	June 10, 2004
■ -	MA220	HD	Turn Table	N/A	N/A
■ -	HD240	HD	Antenna Mast	N/A	N/A
■ -	3104C	EMCO	Biconical Antenna	9109-4441	July 11, 2004
■ -	3146	EMCO	Log Periodic Antenna	9109-3214	July 11, 2004
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.

12.5 Test data

- Test Date : January 09, 2004
- Resolution bandwidth : 120 kHz
- Frequency range : 30MHz ~ 1000MHz
- Measurement distance : 3m
- Operating Condition : Low/Middle/High Channel

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
75.00	28.10	V	7.07	1.00	36.17	40.00	-3.83
175.98	21.90	H	15.89	1.44	39.23	43.50	-4.27
199.98	20.98	H	16.89	1.57	39.44	43.50	-4.06
359.70	26.10	H	14.51	2.32	42.93	46.00	-3.07
449.50	20.80	H	16.29	2.55	39.64	46.00	-6.36
524.70	18.90	H	17.53	2.73	39.16	46.00	-6.84
724.00	14.80	H	20.80	3.44	39.04	46.00	-6.96
824.00	14.00	H	21.86	3.75	39.61	46.00	-6.39

Tabulated test data for Radiated Electromagnetic Field

Remark: "H": Horizontal, "V": Vertical



Tested by: Dan-Gi Lee / Project Engineer

13. CONDUCTED EMISSION TEST

13.1 Operating environment

Temperature : 21°C

Relative humidity : 35 %

13.2 Test set-up

The conducted emission measurements of power line were performed in a shielded room. The EUT was placed on a wooden table, 0.8 meters height above the floor. Power was fed to the EUT through a 50 ohm/ 50 microhenry Line Impedance Stabilization Network (LISN). The ground plane was electrically bonded to the shield room ground system and all power lines entering the shield room were filtered.

13.3 Measurement uncertainty

Conducted emission, quasi-peak detect : ±3.0 dB

Conducted emission, average detect : ±3.0 dB

13.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Due Cal.
■ -	ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	Apr. 29, 2005
■ -	3825/2	EMCO	AMN	9109-1869	Oct. 20, 2004
■ -	N/A	HanKook Shield room	Shield Room	N/A	N/A
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.

13.5 Test data

- Test Date : January 09, 2004
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz
- Result : PASSED BY -7.12 dB at 0.31 MHz with Average Detector

Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Detector Mode	Limits		Emission level	Limits	
0.15	H	57.65	P	66.00	-8.35	43.49	56.00	-12.51
0.31	H	45.77	P	59.97	-14.20	42.85	49.97	-7.12
0.62	H	43.36	P	56.00	-12.64	33.66	46.00	-12.34
0.77	H	45.52	P	56.00	-10.48	37.18	46.00	-8.82
1.24	H	43.88	P	56.00	-12.12	31.63	46.00	-14.67
1.40	H	42.99	P	56.00	-13.01	29.04	46.00	-16.96

Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detector.

See next page for an overview sweep performed with peak and average detector.



Tested by: Dan-Gi Lee / Project Engineer

