



REPORT No.: SZ15120174W04

FCC RF TEST REPORT

APPLICANT : SZ DJI TECHNOLOGY CO., LTD

PRODUCT NAME : RONIN-MX

MODEL NAME : RM-10

TRADE NAME : DJI

BRAND NAME : DJI

FCC ID : SS3-RM101604

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2016-05-03



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION.....4

1. TECHNICAL INFORMATION5

1.1 APPLICANT INFORMATION5

1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION5

1.2.1 IDENTIFICATION OF ALL USED EUTS5

1.3 TEST STANDARDS AND RESULTS6

1.3.1 TEST ENVIRONMENT CONDITIONS6

2. 47 CFR PART 15C REQUIREMENTS.....7

2.1 ANTENNA REQUIREMENT7

2.1.1 APPLICABLE STANDARD7

2.1.2 RESULT: COMPLIANT7

2.2 PEAK OUTPUT POWER.....7

2.2.1 REQUIREMENT7

2.2.2 TEST DESCRIPTION7

2.2.3 TEST PROCEDURE7

2.2.4 TEST RESULT.....8

2.3 6DB BANDWIDTH.....10

2.3.1 REQUIREMENT.....10

2.3.2 TEST DESCRIPTION10

2.3.3 TEST PROCEDURE10

2.3.4 TEST RESULT.....11

2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE13

2.4.1 REQUIREMENT.....13

2.4.2 TEST DESCRIPTION13

2.4.3 TEST RESULT.....13

2.5 POWER SPECTRAL DENSITY (PSD)17

2.5.1 REQUIREMENT.....17

2.5.2 TEST DESCRIPTION17

2.5.3 TEST PROCEDURE17

2.5.4 TEST RESULT.....17

2.6 RESTRICTED FREQUENCY BANDS20



2.6.1	REQUIREMENT.....	20
2.6.2	TEST DESCRIPTION	20
2.6.3	TEST RESULT.....	21
2.7	RADIATED EMISSION	24
2.7.1	REQUIREMENT.....	24
2.7.2	TEST DESCRIPTION	25
2.7.3	TEST RESULT.....	27

ANNEX A GENERAL INFORMATION.....	31
---	-----------

Change History		
Issue	Date	Reason for change
1.0	2016-05-03	First edition



REPORT No.: SZ15120174W04

TEST REPORT DECLARATION

Applicant	SZ DJI TECHNOLOGY CO., LTD
Applicant Address	14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave, Nanshan District, Shenzhen, China
Manufacturer	SZ DJI TECHNOLOGY CO., LTD
Manufacturer Address	14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave, Nanshan District, Shenzhen, China
Product Name	RONIN-MX
Model Name	RM-10
Brand Name	DJI
HW Version	V1.0
SW Version	V1.0
Test Standards	47 CFR Part 15 Subpart C
Test Date	2015-10-10 to 2016-04-02
Test Result	PASS

Tested by : Zou Jian
Zou Jian

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Peng Huarui
Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	SZ DJI TECHNOLOGY CO., LTD
Address:	14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave, Nanshan District, Shenzhen, China

1.2 Equipment under Test (EUT) Description

Brand Name:	DJI
Trade Name:	DJI
Model Name:	RM-10
Frequency Range:	The frequency range used is 2402MHz - 2480MHz (40 channels, at intervals of 2MHz);
Modulation Type:	GFSK
Antenna Type:	Dedicated Antenna
Antenna Gain:	5.96dBi
Power supply:	Battery (Output Power: DC14.4V)
Operate Voltage:	12V DC~16.8V DC

NOTE:

The EUT is a RONIN-MX, it contain Bluetooth 4.0 LE Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth 4.0 LE is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	V1.0	V1.0



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(b)	Peak Output Power	Oct 13, 2015	<u>PASS</u>
3	15.247(a)	Bandwidth	Oct 13, 2015	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	Oct 13, 2015	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	Apr 02, 2016	<u>PASS</u>
6	15.207	Conducted Emission	N.A	<u>N.A</u> Note
7	15.209 ,15.247(d)	Radiated Emission	Apr 02, 2016	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	Oct 13, 2015	<u>PASS</u>
Note: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.				

The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014 and ANSI C63.10-2013.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 Peak Output Power


2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2 Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:



The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please reference ANNEX A (1.4).

2.2.3 Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer:

a) Set analyzer center frequency to channel center frequency.



- b) Set the RBW to 1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the peak amplitude level.


2.2.4 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Refer to Plot	Limit		Verdict
		dBm	W		dBm	W	
0	2402	-0.018	0.000996	Plot A	30	1	PASS
19	2440	-0.784	0.000835	Plot B			PASS
39	2480	-1.425	0.00072	Plot C			PASS


B. Test Plots:

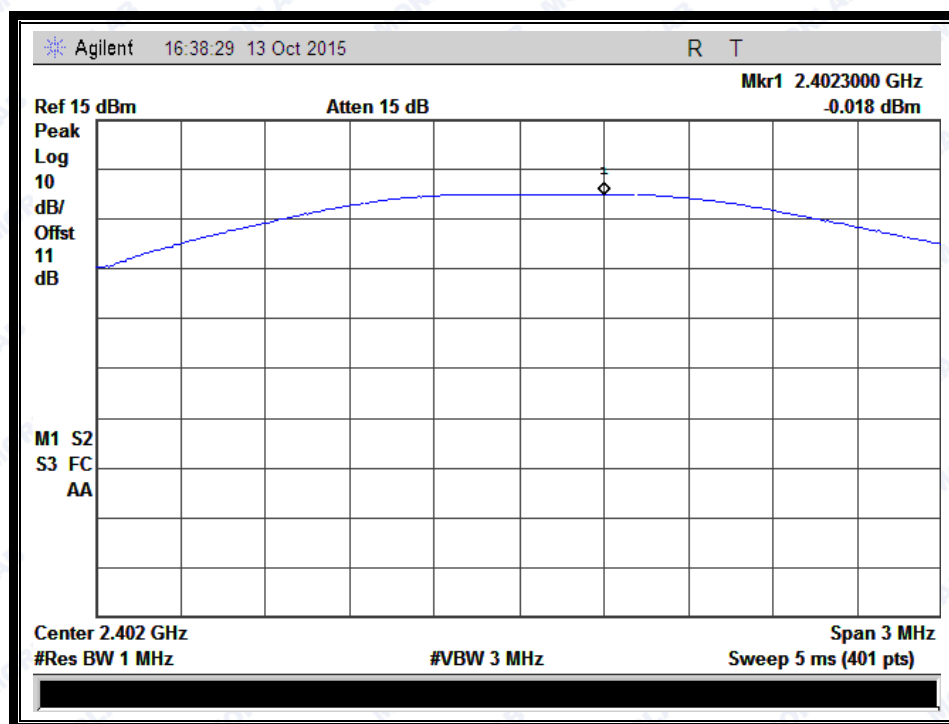


(Plot A: Channel 0: 2402MHz)



REPORT No.: SZ15120174W04

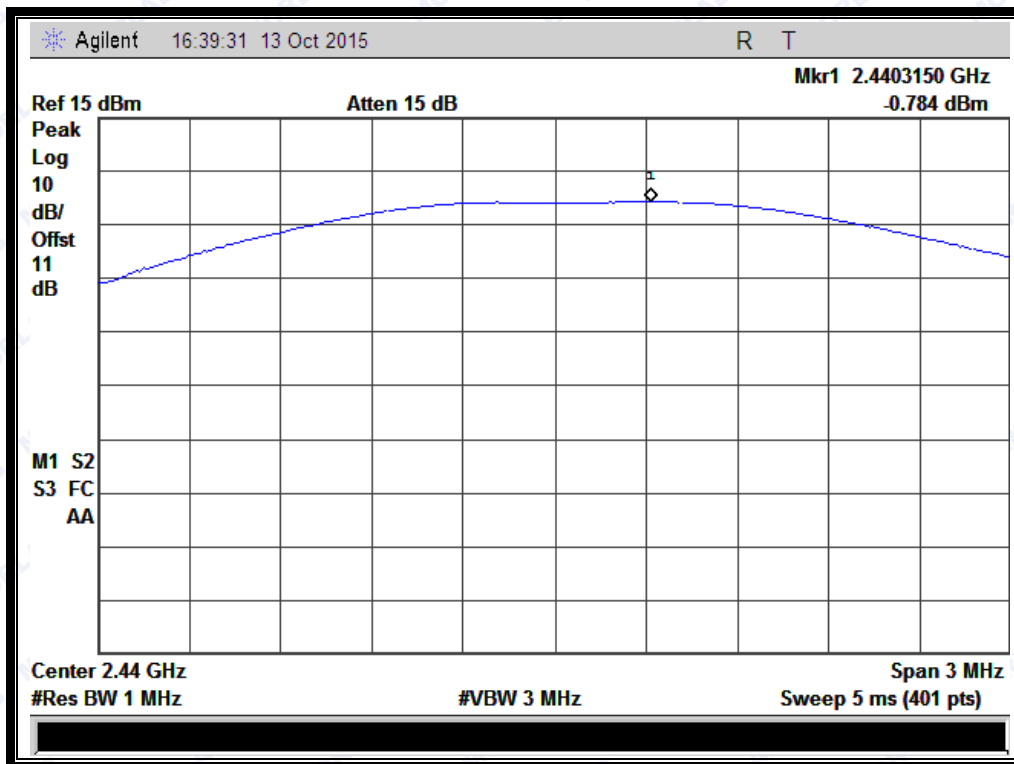

(Plot B: Channel 19: 2440MHz)

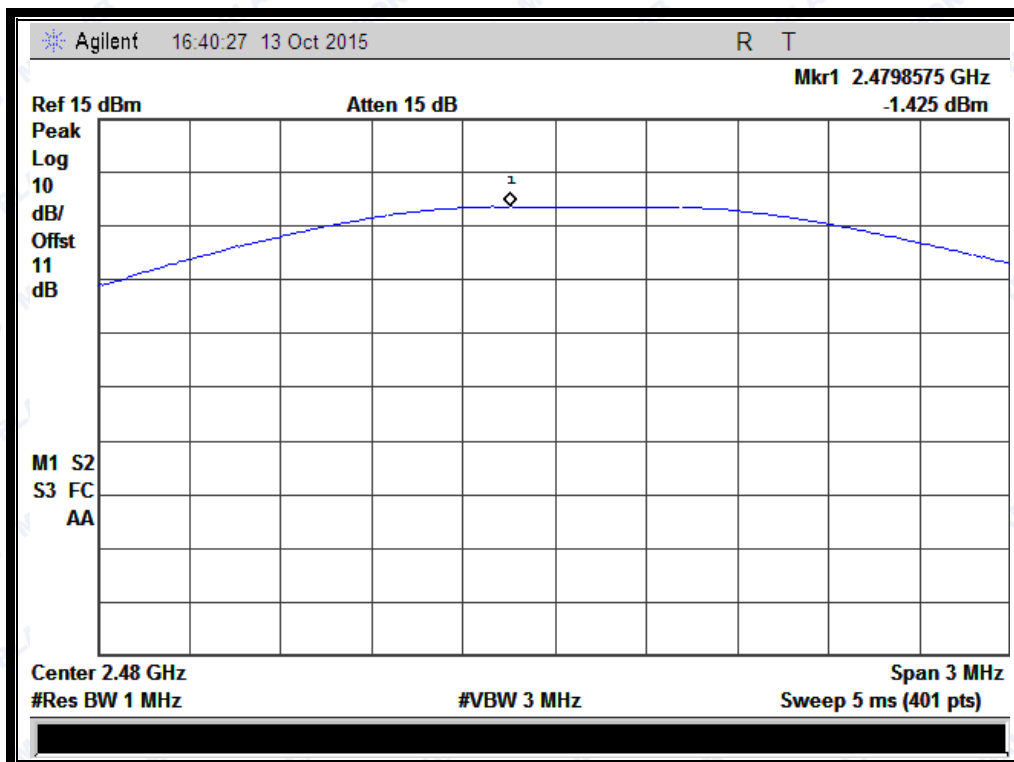

(Plot C: Channel 39: 2480MHz)


2.3 6dB Bandwidth

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:

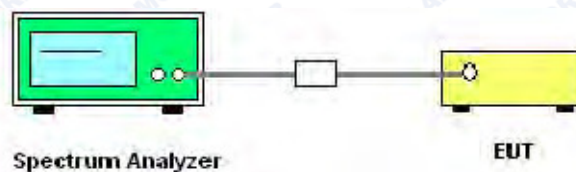

The EUT which is powered by the battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3 Test procedure

The steps for the first option are as follows:

- (1) Set analyzer center frequency to channel center frequency.
 - a) Set RBW = 100 kHz.
 - b) Set the VBW=300 kHz.
 - c) Detector = peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

(2) The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100 \text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth



measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.


2.3.4 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
0	2402	0.7141	Plot A	≥ 500	PASS
19	2440	0.7340	Plot B	≥ 500	PASS
39	2480	0.7333	Plot C	≥ 500	PASS


B. Test Plots:

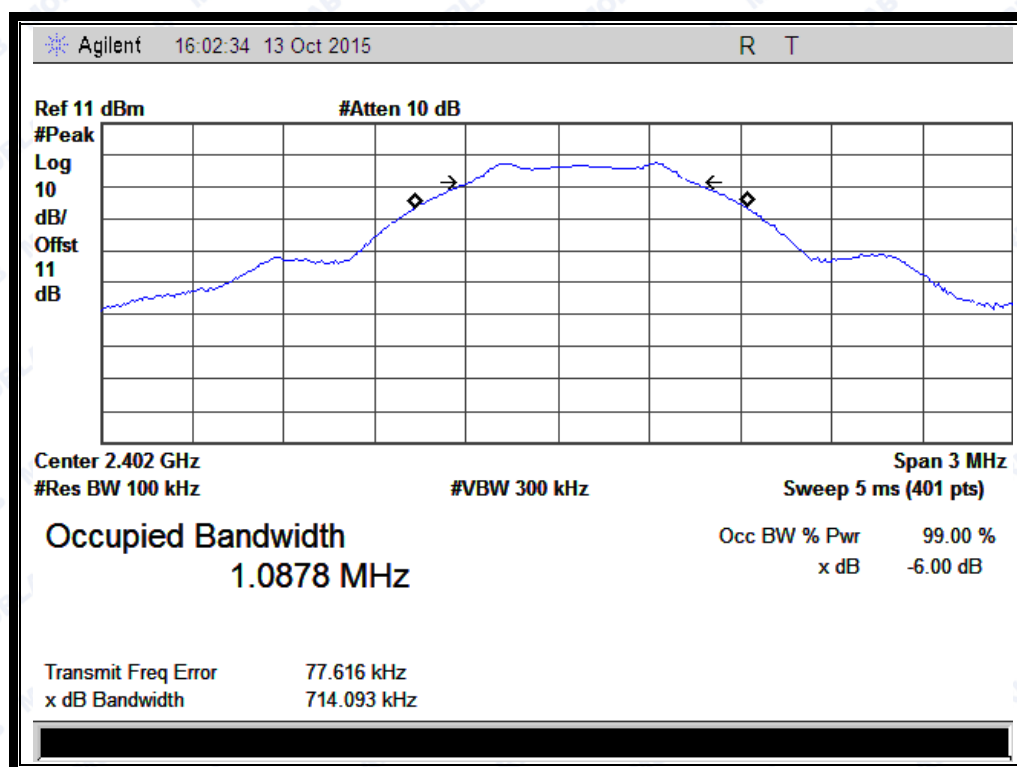


(Plot A: Channel 0: 2402MHz)



REPORT No.: SZ15120174W04

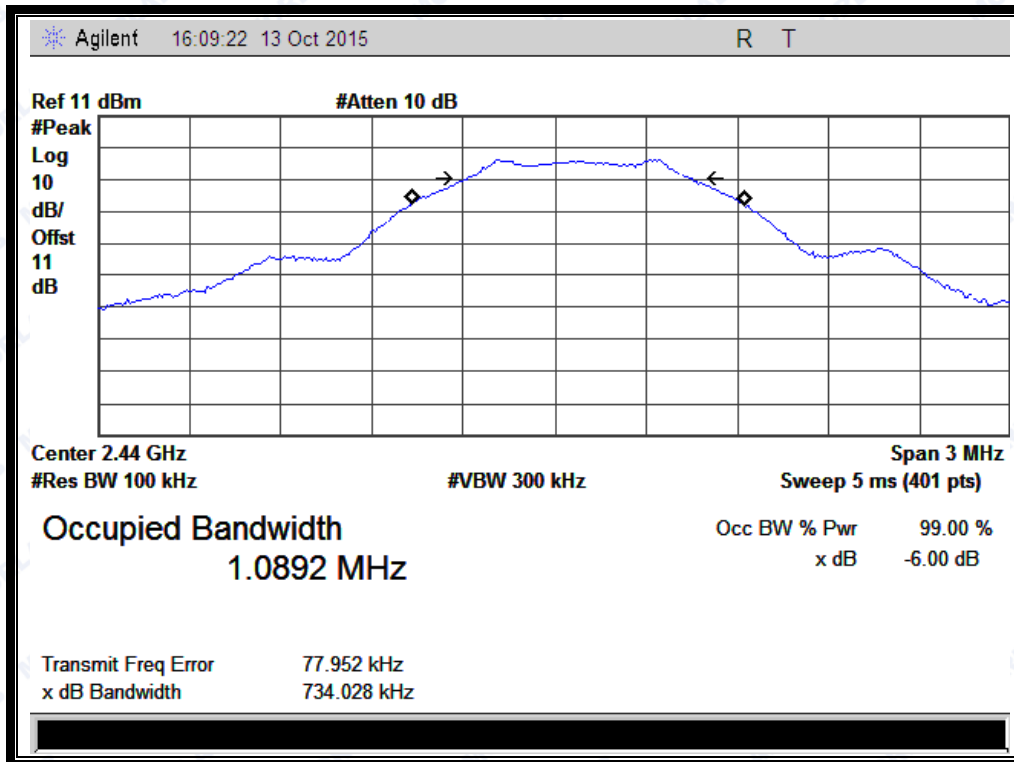

(Plot B: Channel 19: 2440 MHz)

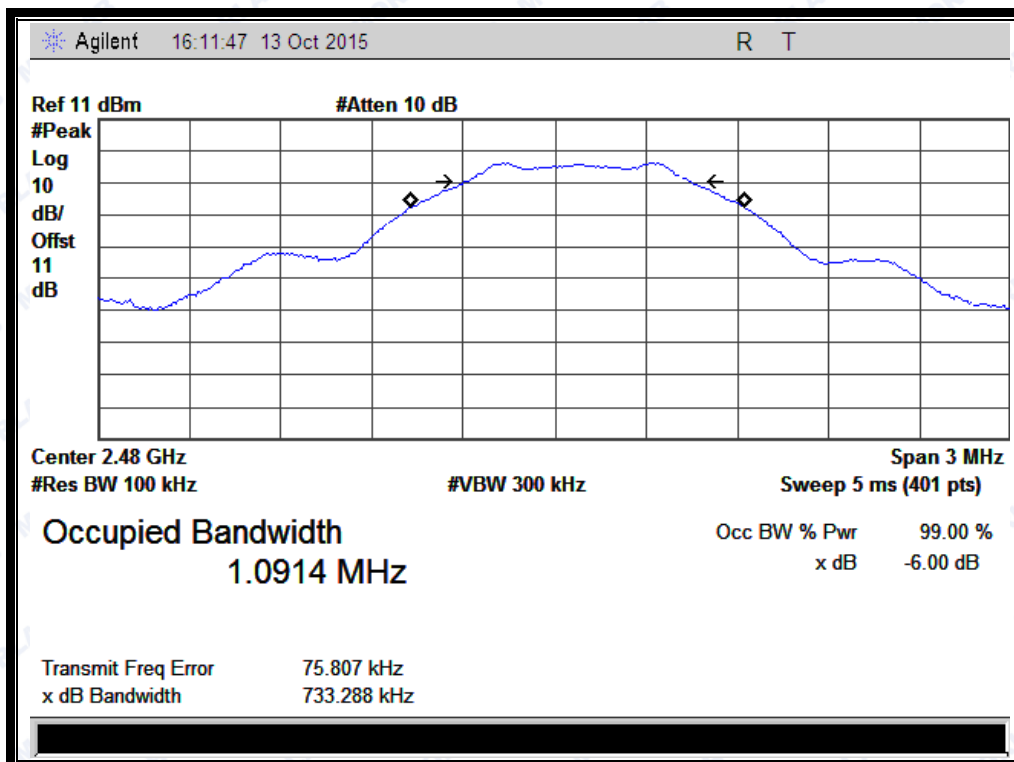

(Plot C: Channel 39: 2480MHz)


2.4 Conducted Spurious Emissions and Band Edge

2.4.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:

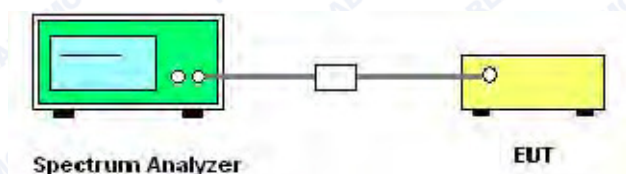

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A (1.4).

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-50.99	Plot A.1	-1.787	-21.787	PASS
19	2440	-51.92	Plot B.1	-1.781	-21.781	PASS
39	2480	-51.53	Plot C.1	-2.299	-22.299	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.



REPORT No.: SZ15120174W04

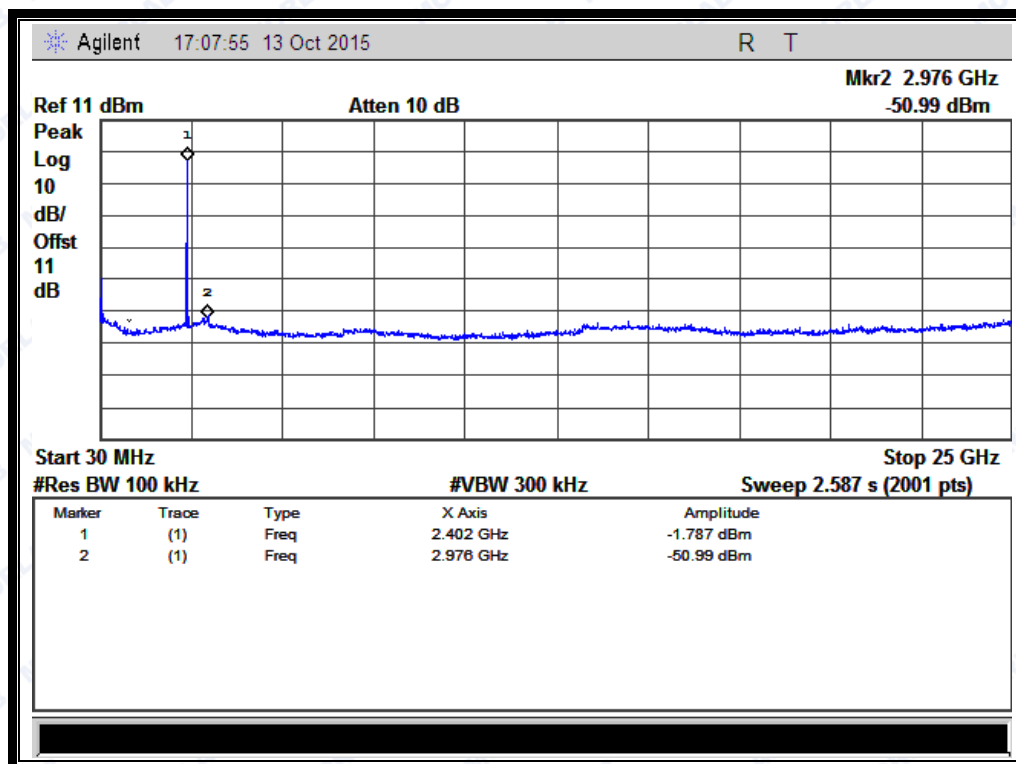


(Plot A.1: Channel = 0, 30MHz to 25GHz)

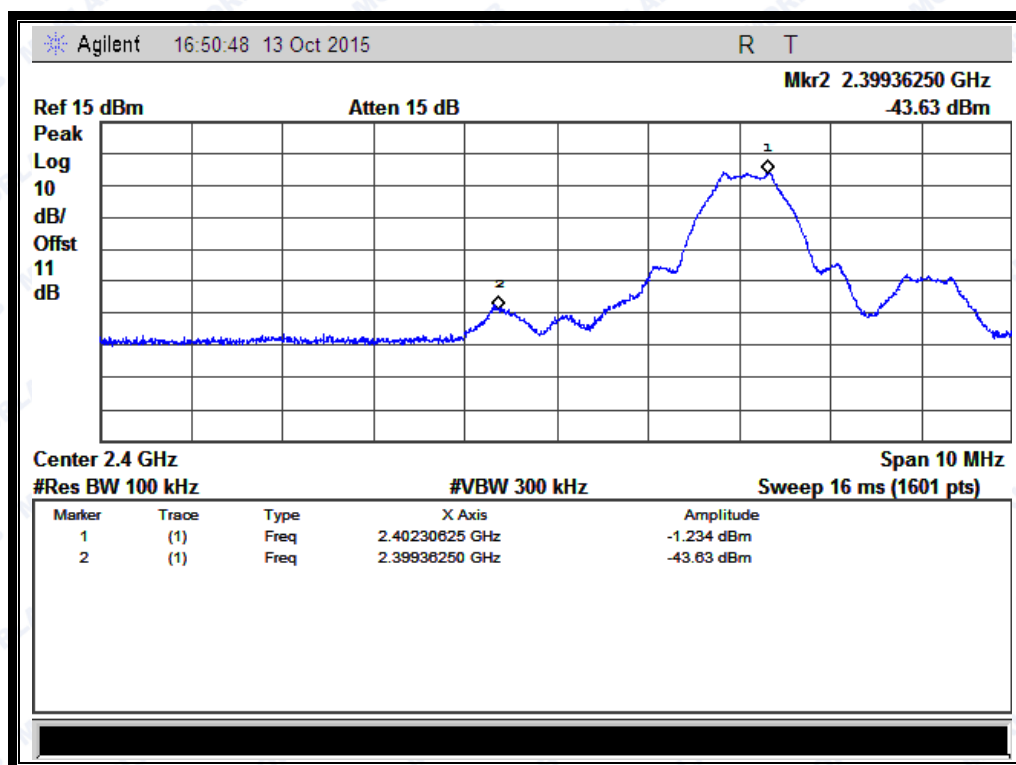


(Band Edge@ Channel = 0)



REPORT No.: SZ15120174W04

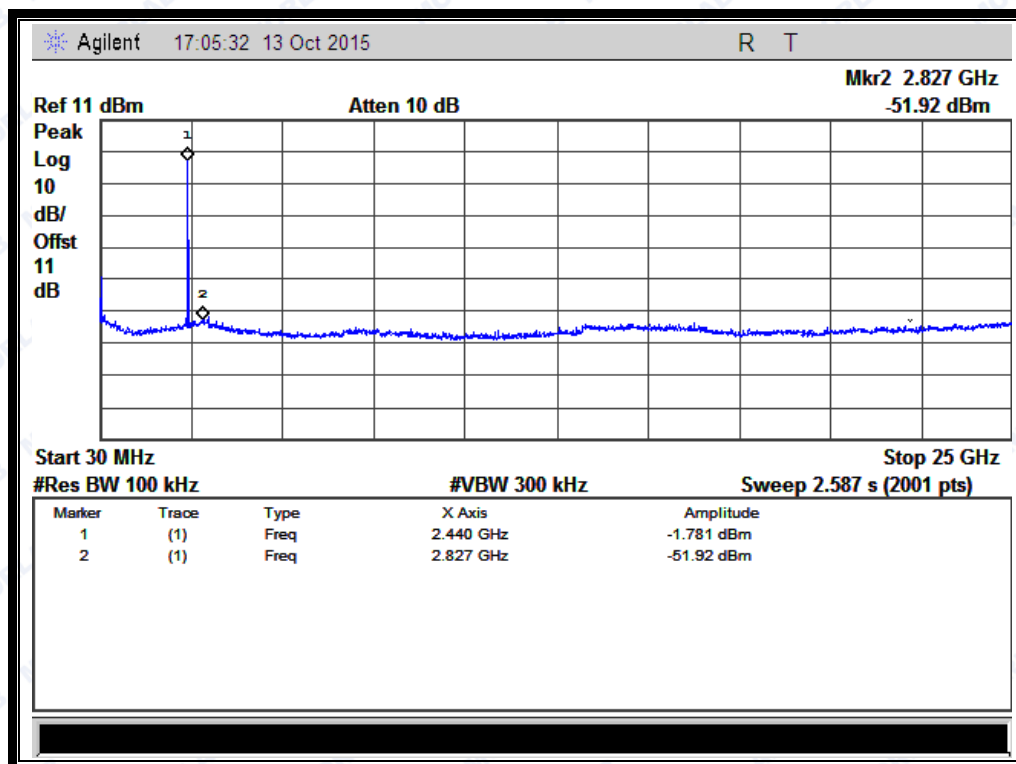


(Plot B.1: Channel = 19, 30MHz to 25GHz)

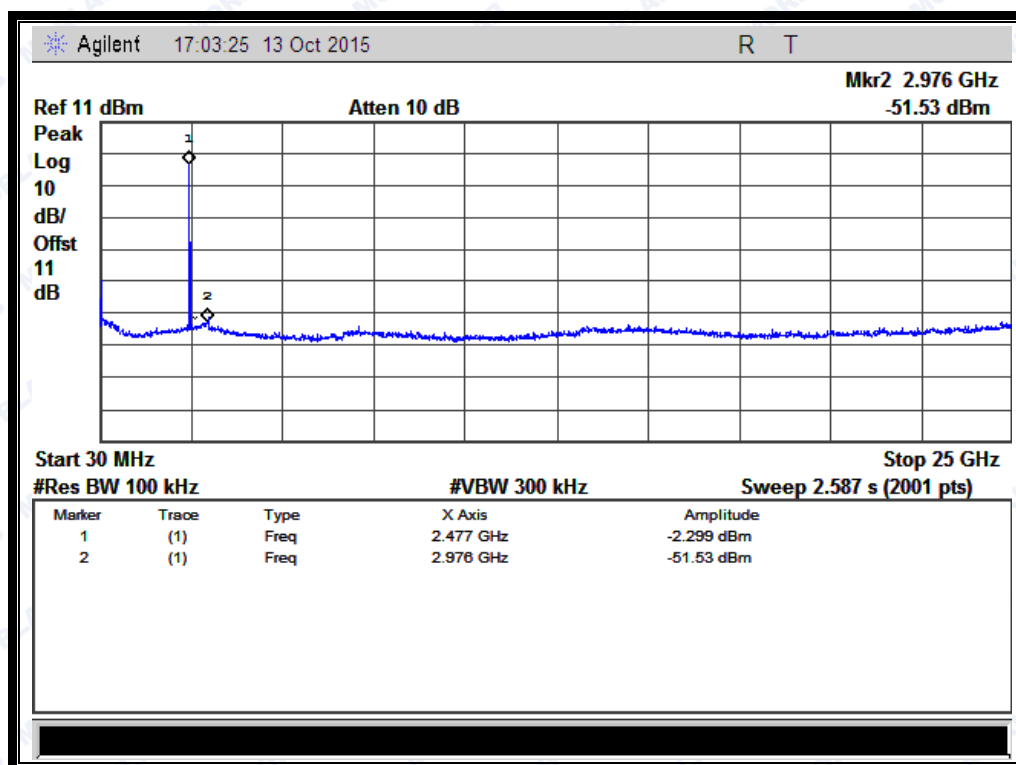

(Plot C.1: Channel = 39, 30MHz to 25GHz)



REPORT No.: SZ15120174W04

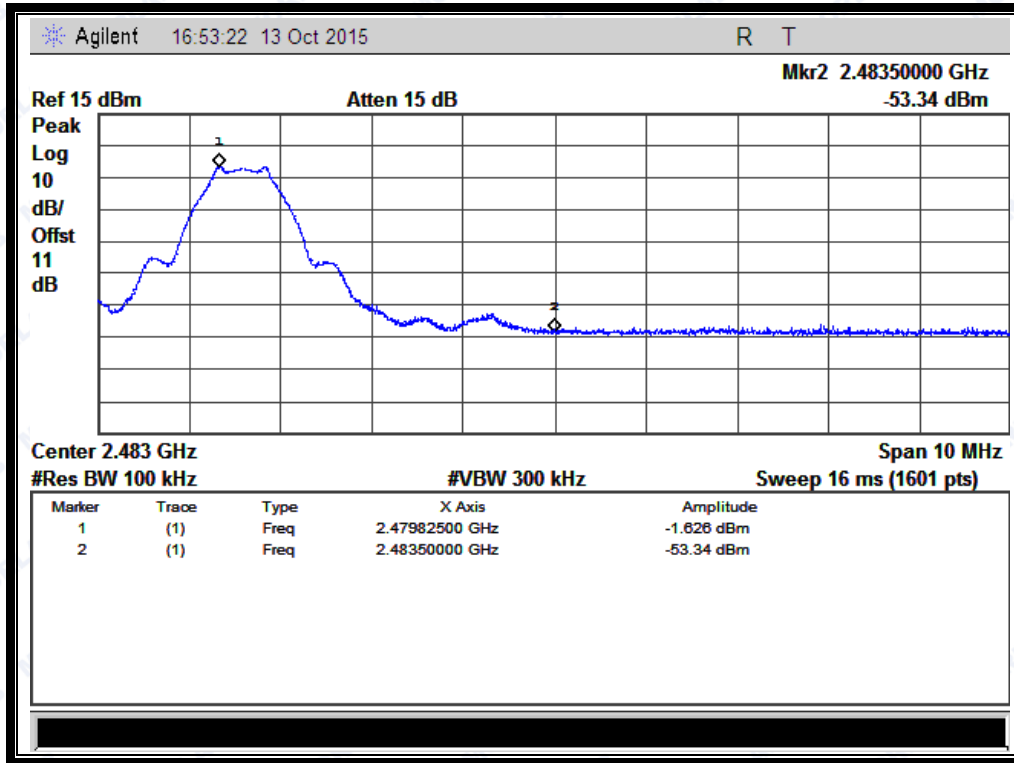

(Band Edge@ Channel = 39)


2.5 Power spectral density (PSD)

2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2 Test Description

A. Test Set:

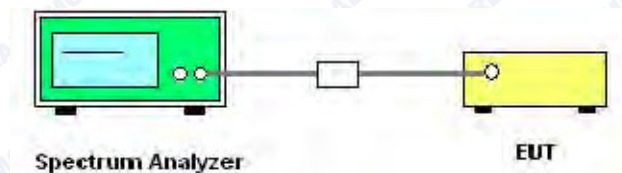

The EUT which is powered by the battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please reference ANNEX A (1.4).

2.5.3 Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- Set analyzer center frequency to channel center frequency.
- Set the span to 3MHz
- Set the RBW to 3 kHz
- Set the VBW to 10KHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

2.5.4 Test Result


The lowest, middle and highest channels are tested.

A. Test Verdict:



REPORT No.: SZ15120174W04


Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
0	2402	-12.05	Plot A	8	PASS
19	2440	-13.77	Plot B	8	PASS
39	2480	-13.63	Plot C	8	PASS
Measurement uncertainty: ± 1.3 dB					

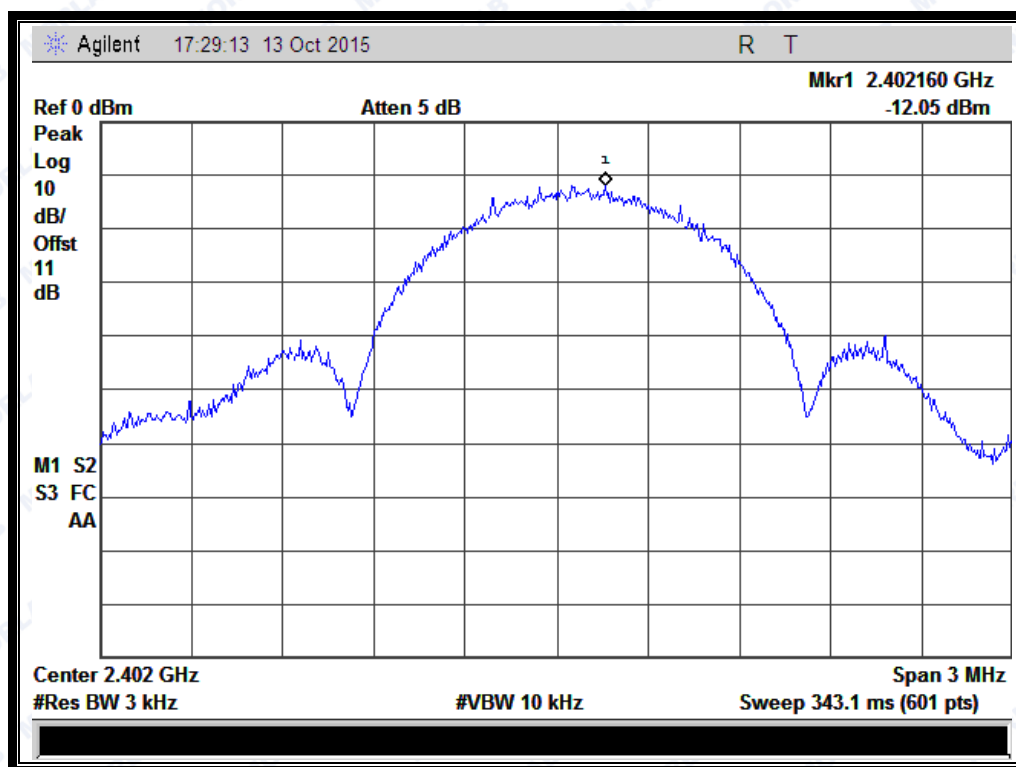B. Test Plots:


(Plot A: Channel = 0)



REPORT No.: SZ15120174W04

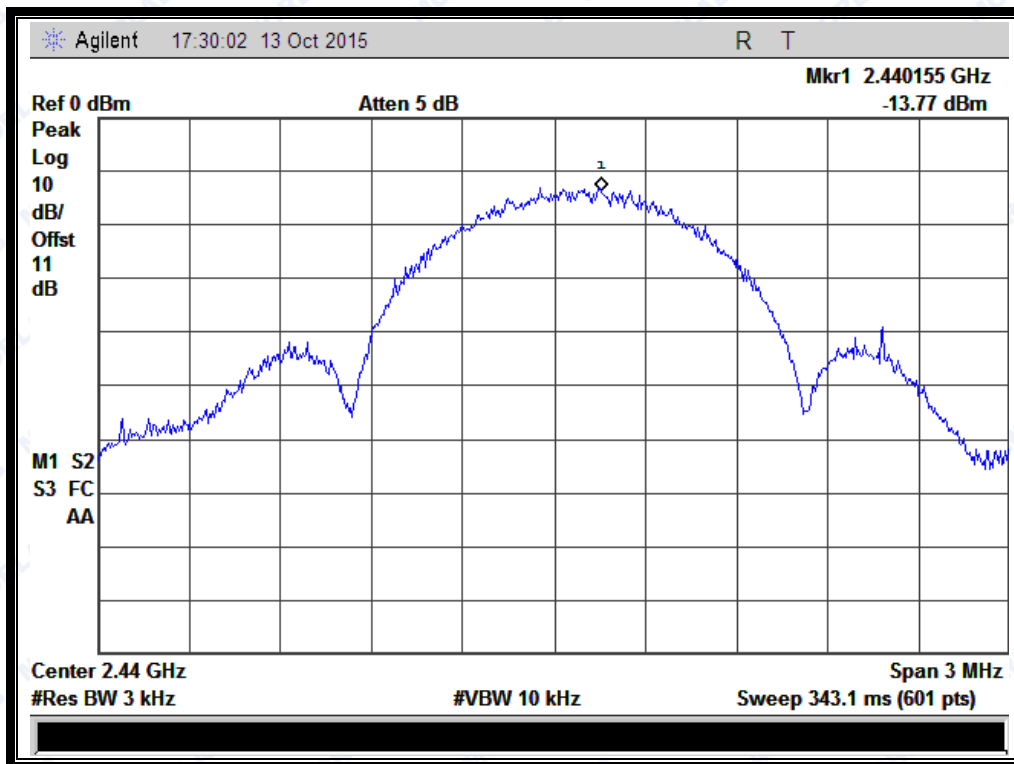

(Plot B: Channel = 19)

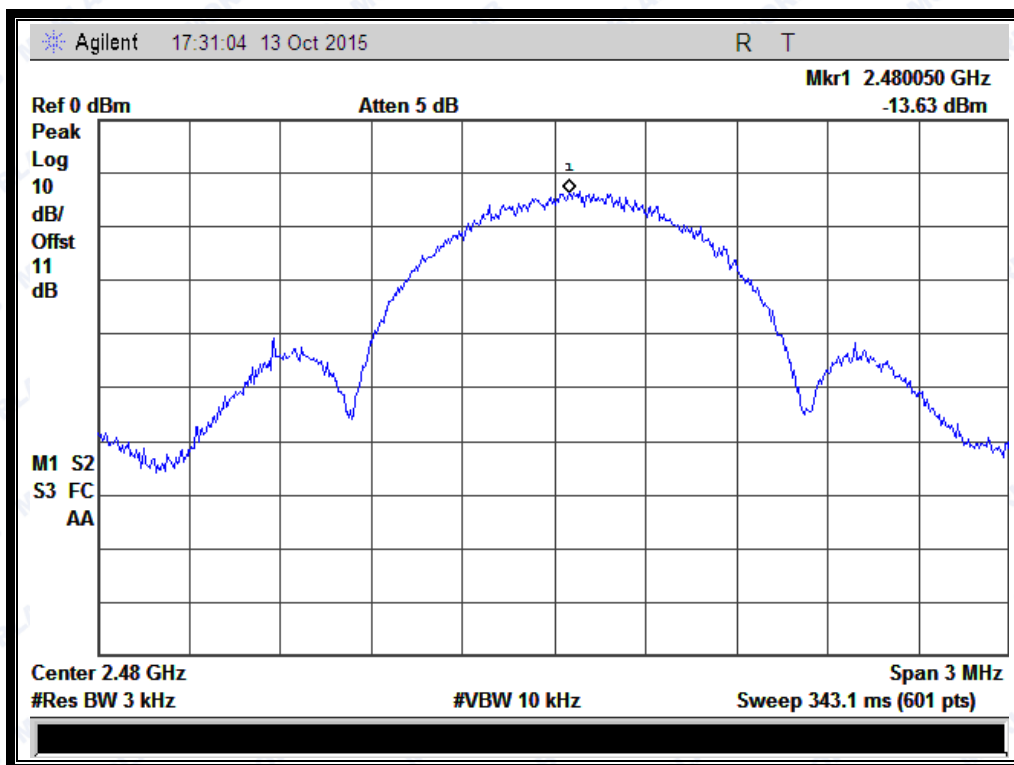

(Plot C: Channel = 39)


2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

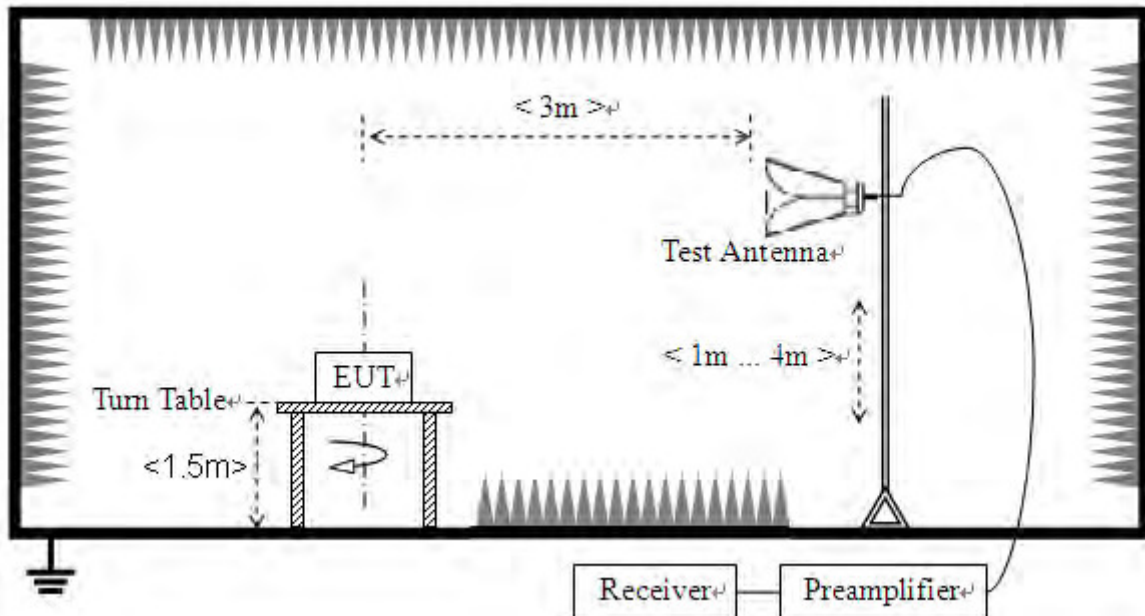

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.4).



2.6.3 Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2337.89	PK	46.56	-33.63	32.56	45.49	74	Pass
0	2338.06	AV	35.59	-33.63	32.56	34.52	54	Pass
39	2488.208	PK	46.32	-33.18	32.5	45.64	74	Pass
39	2483.61	AV	33.38	-33.18	32.5	32.7	54	Pass


B. Test Plots:



REPORT No.: SZ15120174W04

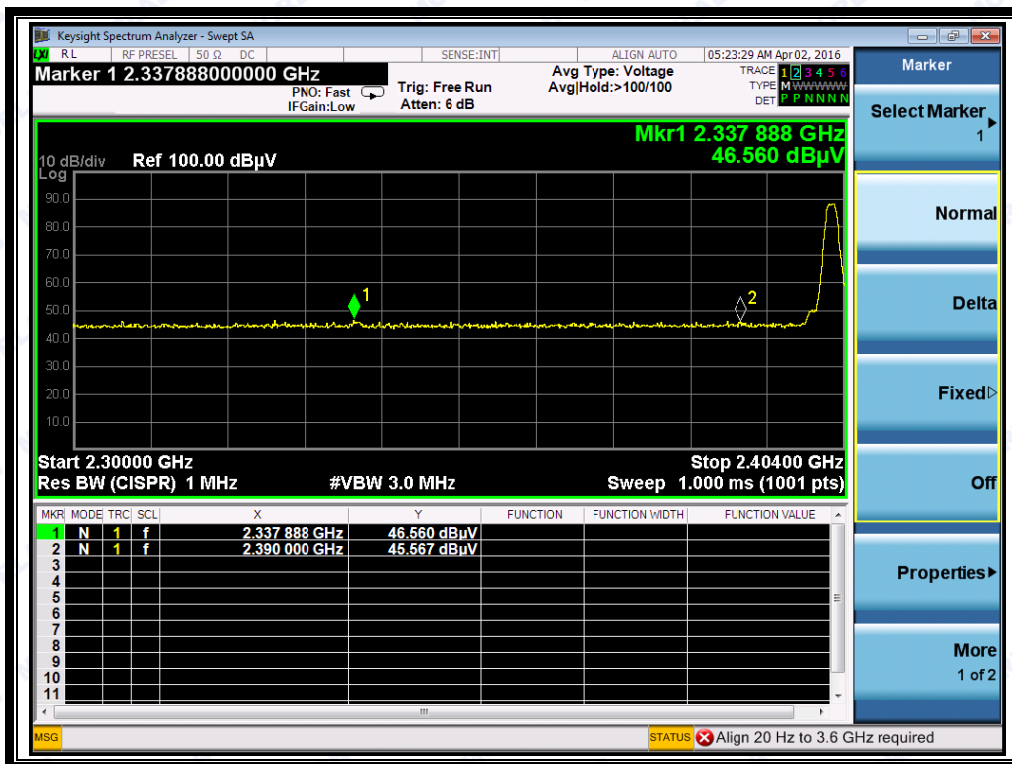

(Plot A1: Channel = 0 PEAK)

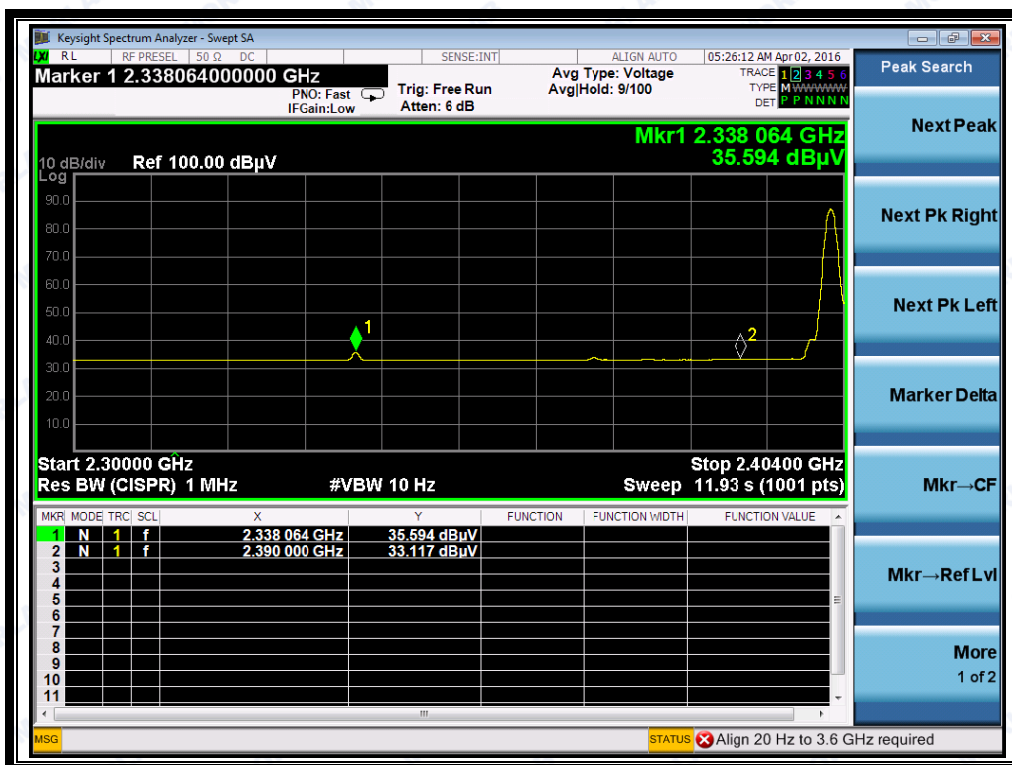


(Plot A2: Channel = 0 AVG)



REPORT No.: SZ15120174W04



(Plot B1: Channel = 39 PEAK)

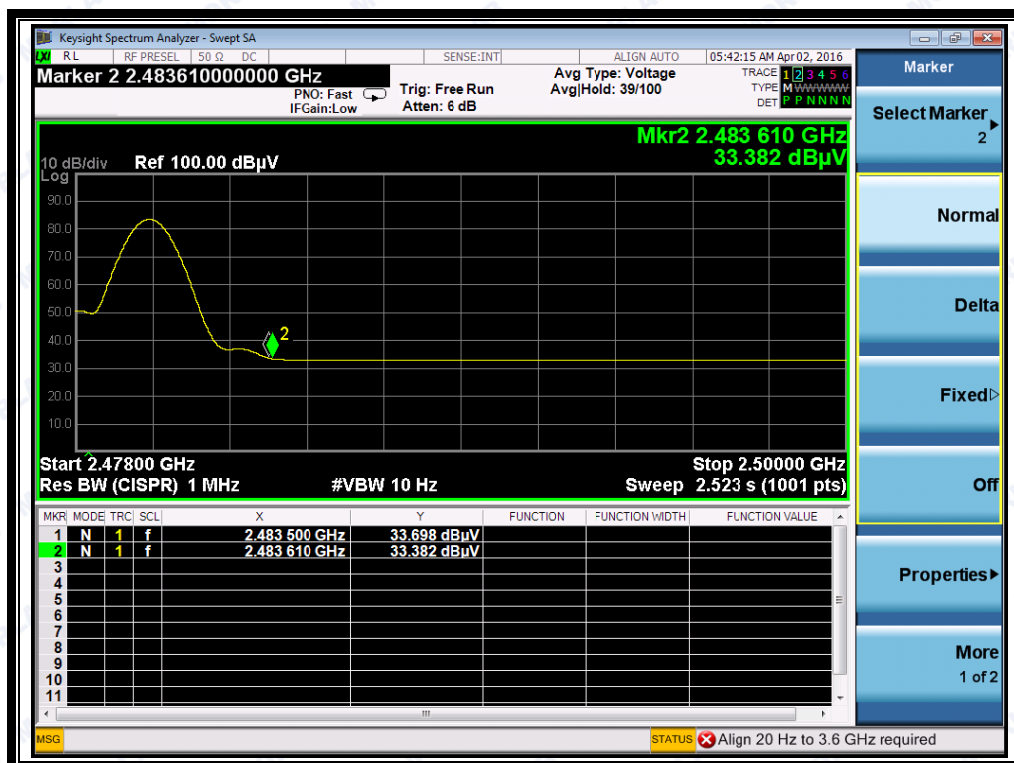

(Plot B2: Channel = 39 AVG)



2.7 Radiated Emission

2.7.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.7.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

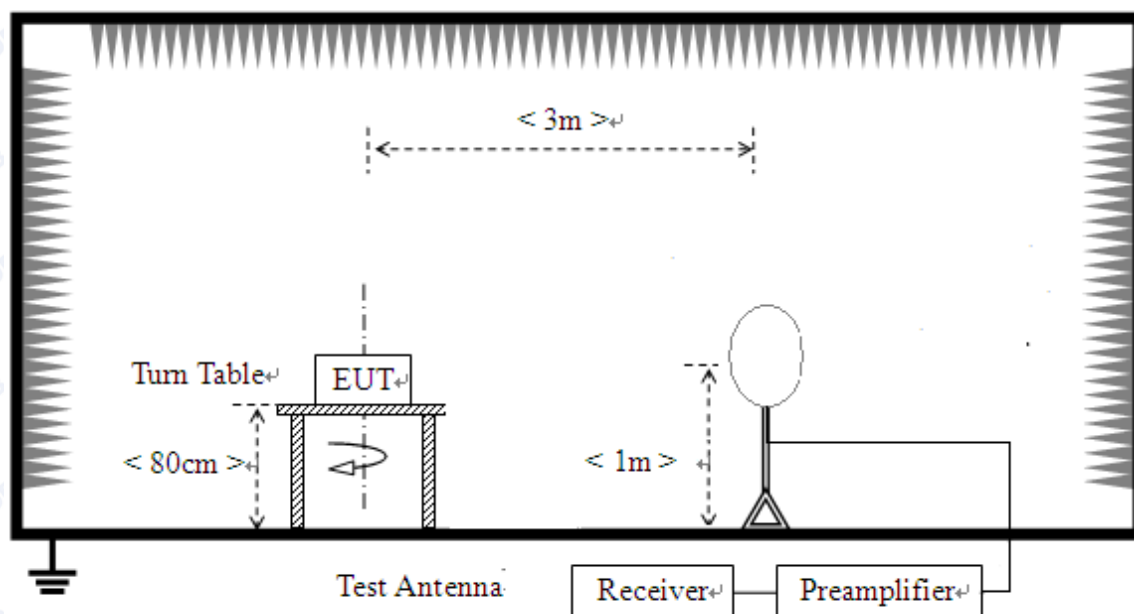

- 2) For radiated emissions from 30MHz to 1GHz

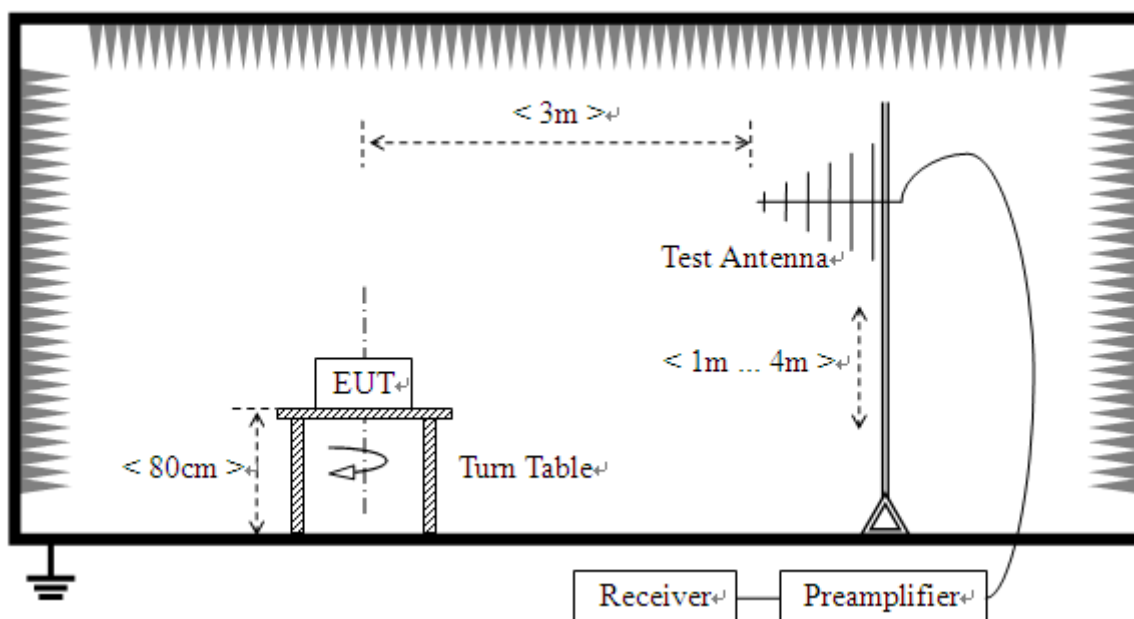

3) For radiated emissions above 1GHz

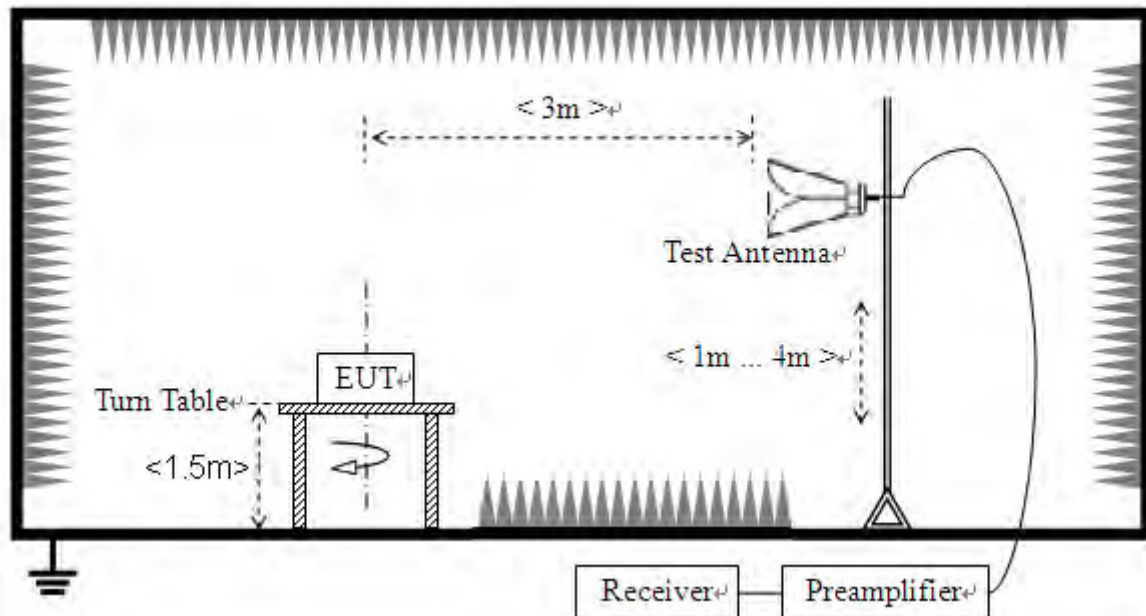

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4-2014. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10-2013.

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.4).



2.7.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.568	31.14	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
129.549	30.60	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
271.589	33.56	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2073.709	43.53	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5679.542	47.83	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
12201.164	48.73	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
37.284	38.30	37.94	27.47	N.A	40.00	N.A	Vertical	PASS
94.343	33.27	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
274.018	28.68	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
1985.354	42.06	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4331.224	46.30	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11753.082	49.36	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15120174W04

Plot for Channel = 19



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
139.262	30.19	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
276.446	35.66	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
782.691	30.72	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
1160.704	43.48	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
2352.861	47.33	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
11740.862	49.02	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
37.444	41.44	37.36	26.94	N.A	40.00	N.A	Vertical	PASS
94.343	33.15	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
274.018	30.26	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
1299.000	41.48	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4807.820	48.02	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
16176.869	50.79	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15120174W04

Plot for Channel = 39



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
45.782	27.11	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
131.977	29.11	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
293.442	35.19	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
1936.695	41.23	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5683.615	47.66	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
18580.215	50.89	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
37.168	43.45	37.08	26.50	N.A	40.00	N.A	Vertical	PASS
94.343	34.12	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
407.559	28.73	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2832.188	44.74	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
6384.252	46.43	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
18592.435	50.12	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013, ANSI C63.4-2014 and CISPR Publication 22; the FCC registration number is 695796.



REPORT No.: SZ15120174W04

1.4 Test Equipments Utilized**1.4.1 Conducted Test Equipments****Conducted Test Equipment**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2015.02.26	2016.02.25
2	Power Splitter	NW521	1506A	Weinschel	2015.02.26	2016.02.25
3	Attenuator 1	(n.a.)	10dB	Resnet	2015.02.26	2016.02.25
4	Attenuator 2	(n.a.)	3dB	Resnet	2015.02.26	2016.02.25
5	USB Wideband Power Sensor	MY52280010	U2021XA	Agilent	2015.02.26	2016.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2015.02.26	2016.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

Conducted Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2016.02.26	2017.02.25
2	Power Splitter	NW521	1506A	Weinschel	2016.02.26	2017.02.25
3	Attenuator 1	(n.a.)	10dB	Resnet	2016.02.26	2017.02.25
4	Attenuator 2	(n.a.)	3dB	Resnet	2016.02.26	2017.02.25
5	USB Wideband Power Sensor	MY52280010	U2021XA	Agilent	2016.02.26	2017.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2016.02.26	2017.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A



REPORT No.: SZ15120174W04

1.4.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2015.02.26	2016.02.25
3	Service Supplier	100448	CMU200	R&S	2015.02.26	2016.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2015.02.26	2016.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A

Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2016.02.26	2017.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2016.02.26	2017.02.25
3	Service Supplier	100448	CMU200	R&S	2016.02.26	2017.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2016.02.26	2017.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A

1.4.3 Radiated Test Equipments

Radiated Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
2	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2015.02.26	2016.02.25
3	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2015.02.26	2016.02.25
4	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2015.02.26	2016.02.25
5	Test Antenna - Loop	1519-022	HL050S7	R&S	2015.02.26	2016.02.25
6	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2015.02.26	2016.02.25
7	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A



REPORT No.: SZ15120174W04

Radiated Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	Receiver	US44210471	E7405A	Agilent	2016.02.26	2017.02.25
2	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2016.02.26	2017.02.25
3	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2016.02.26	2017.02.25
4	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2016.02.26	2017.02.25
5	Test Antenna - Loop	1519-022	HL050S7	R&S	2016.02.26	2017.02.25
6	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2016.02.26	2017.02.25
7	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

1.4.4 Climate Chamber**Climate Chamber**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2015.02.26	2016.02.25

Climate Chamber

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2016.02.26	2017.02.25

1.4.5 Vibration Table**Vibration Table**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2015.02.26	2016.02.25

Vibration Table

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2016.02.26	2017.02.25



REPORT No.: SZ15120174W04

1.4.6 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2015.02.26	2016.02.25

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2016.02.26	2017.02.25

***** END OF REPORT *****