

FCC TEST REPORT

Client Name : Ugreen Group Limited

Address : UGREEN Building, Longcheng Industrial Park,
Longguanxi Road, Longhua, ShenZhen, China

Product Name : Magnetic Wireless Charger

Date : Jan. 07, 2021



Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	8
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	16
5. Antenna Requirement.....	21
5.1. Test Standard and Requirement.....	21
5.2. Antenna Connected Construction.....	21
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	22
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	24
APPENDIX III -- INTERNAL PHOTOGRAPH.....	27

TEST REPORT

Applicant : Ugreen Group Limited
Manufacturer : Ugreen Group Limited
Product Name : Magnetic Wireless Charger
Model No. : CD245, 30233
Trade Mark : **UGREEN**
Rating(s) : Input Power: 5V---2A, 9V---2A, 12V---2A
Output Power: 15W Max
Output for iOS Devices: 7.5W
Test Standard(s) : **FCC Part15 Subpart C, Paragraph 15.209**
Test Method(s) : **ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Nov. 12, 2021

Date of Test

Nov. 12~ 24, 2021

Prepared By



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)



1. General Information

1.1. Client Information

Applicant	:	Ugreen Group Limited
Address	:	UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China
Manufacturer	:	Ugreen Group Limited
Address	:	UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China
Factory	:	SHENZHEN ZHIZE TECHNOLOGY CO., LTD
Address	:	1-4F, No.13, Langkou Industrial Park, Langkou Community, Dalang Street, Longhua District, Shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	Magnetic Wireless Charger
Model No.	:	CD245, 30233 (Note: All samples are the same except the model number, so we prepare "CD245" for test only.)
Trade Mark	:	UGREEN
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	111-205KHz
	Modulation Type:	FSK
	Antenna Type:	Inductive loop coil Antenna
	Antenna Gain(Peak):	0 dBi(Provided by customer)
	Adapter:	N/A

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: A2013 Input: AC 100-240V, 0.7A, 50-60Hz Output: 3.6-5.5V=3A/ 6.5-9V=2A/ 9-12V=1.5A
Wireless charging load	:	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2874 Power: 5W/7.5W/10W/15W Last Cal.: Oct. 26, 2020 Cal. Interval: 1 Year

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Wireless Charging Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Wireless Charging Mode



For Radiated Emission	
Final Test Mode	Description
Mode 1	Wireless Charging Mode

Note: (1)Test channel is 0.1276MHz.

(2) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load 15W) was recorded in the report.



1.5. Description Of Test Setup

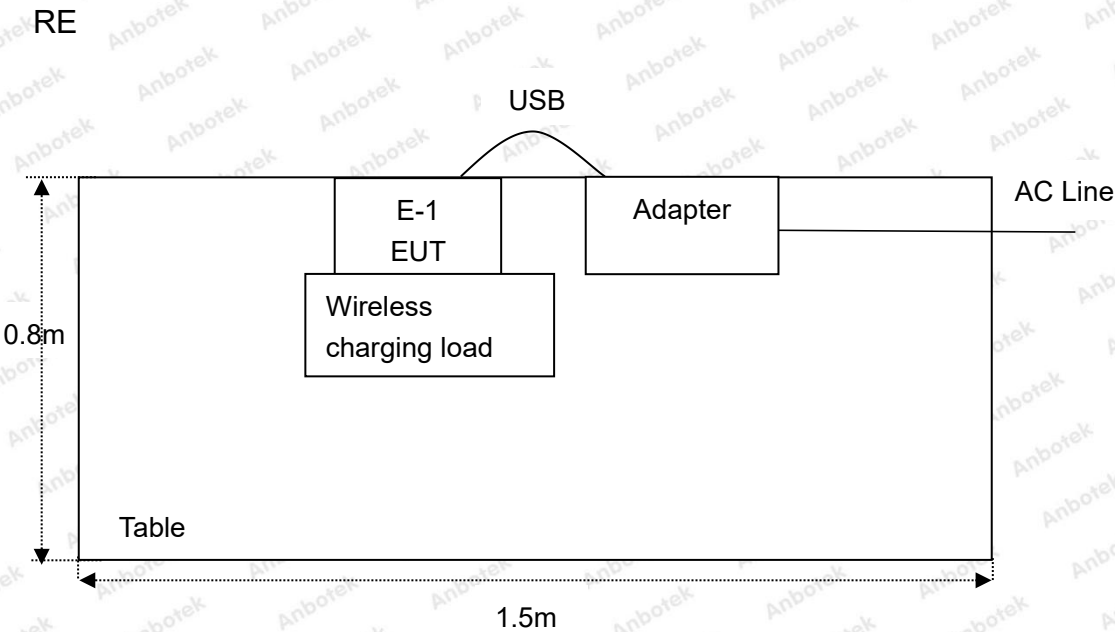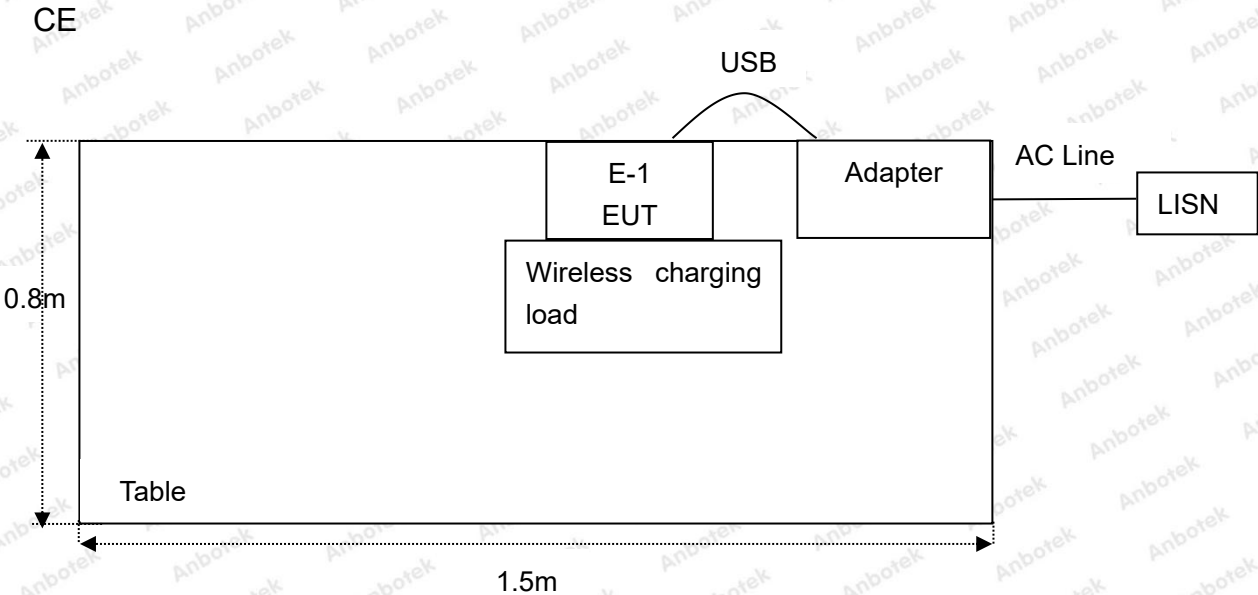

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year



1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

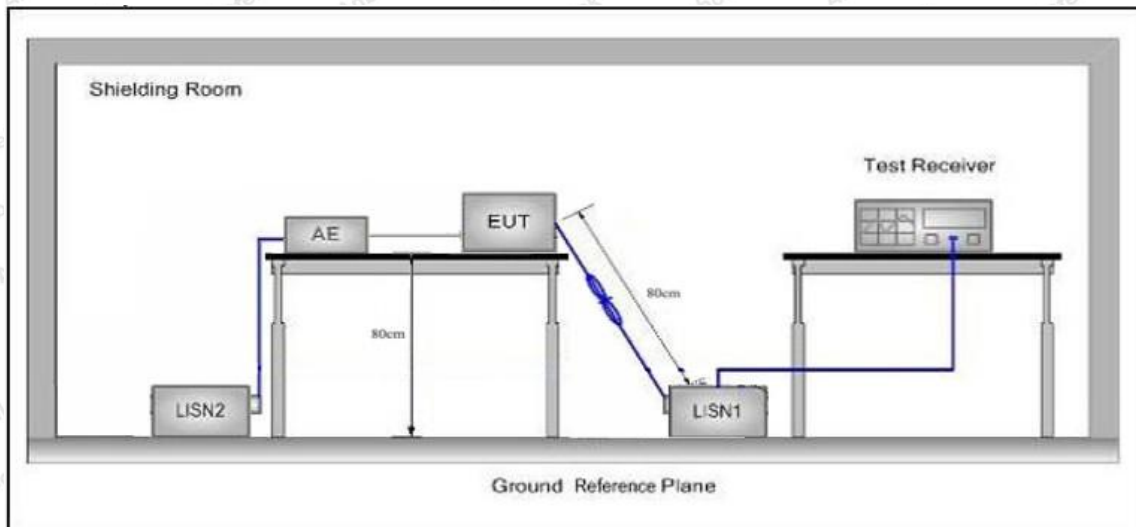

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (LISN). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

Code: AB-RF-05-a




Hotline

400-003-0500

www.anbotech.com

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 22.9°C Hum.: 46%

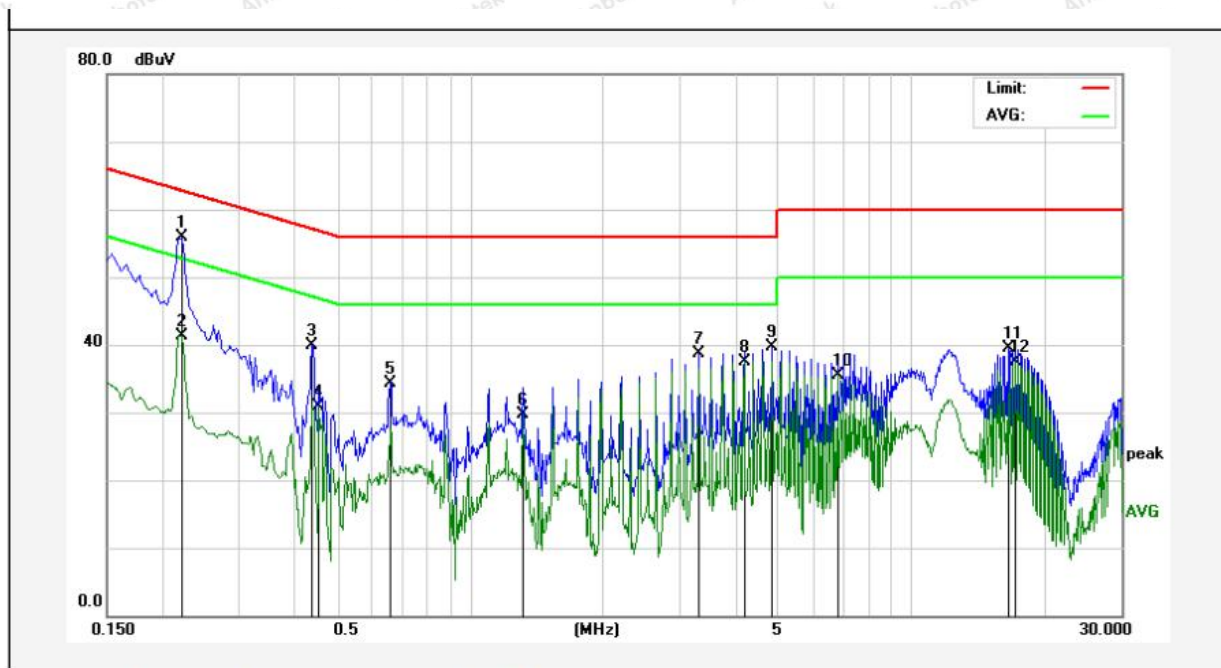

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2220	55.71	0.12	55.83	62.74	-6.91	QP	
2	0.2220	41.12	0.12	41.24	52.74	-11.50	AVG	
3	0.4380	39.78	0.13	39.91	57.10	-17.19	QP	
4	0.4540	30.73	0.13	30.86	46.80	-15.94	AVG	
5	0.6580	34.21	0.15	34.36	56.00	-21.64	QP	
6	1.3220	29.58	0.14	29.72	46.00	-16.28	AVG	
7	3.3020	38.55	0.12	38.67	56.00	-17.33	QP	
8	4.1819	37.41	0.11	37.52	46.00	-8.48	AVG	
9	4.8419	39.50	0.11	39.61	56.00	-16.39	QP	
10	6.8219	35.36	0.11	35.47	50.00	-14.53	AVG	
11	16.6059	39.29	0.18	39.47	60.00	-20.53	QP	
12	17.2658	37.38	0.18	37.56	50.00	-12.44	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.9°C Hum.: 46%

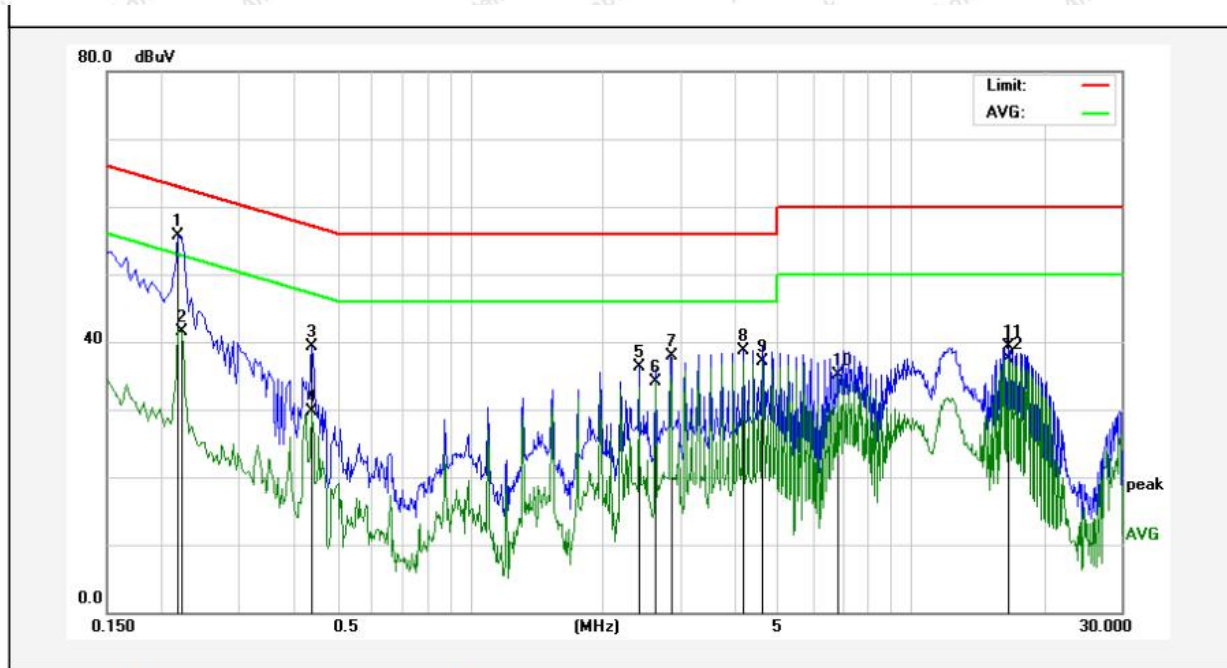

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2179	55.59	0.12	55.71	62.89	-7.18	QP	
2	0.2220	41.39	0.12	41.51	52.74	-11.23	AVG	
3	0.4380	39.21	0.13	39.34	57.10	-17.76	QP	
4	0.4380	29.55	0.13	29.68	47.10	-17.42	AVG	
5	2.4180	36.24	0.12	36.36	56.00	-19.64	QP	
6	2.6339	33.93	0.12	34.05	46.00	-11.95	AVG	
7	2.8540	37.71	0.12	37.83	56.00	-18.17	QP	
8	4.1738	38.61	0.11	38.72	56.00	-17.28	QP	
9	4.6139	36.97	0.11	37.08	46.00	-8.92	AVG	
10	6.8098	35.02	0.11	35.13	50.00	-14.87	AVG	
11	16.5819	39.12	0.18	39.30	60.00	-20.70	QP	
12	16.5819	37.27	0.18	37.45	50.00	-12.55	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 22.9°C Hum.: 46%

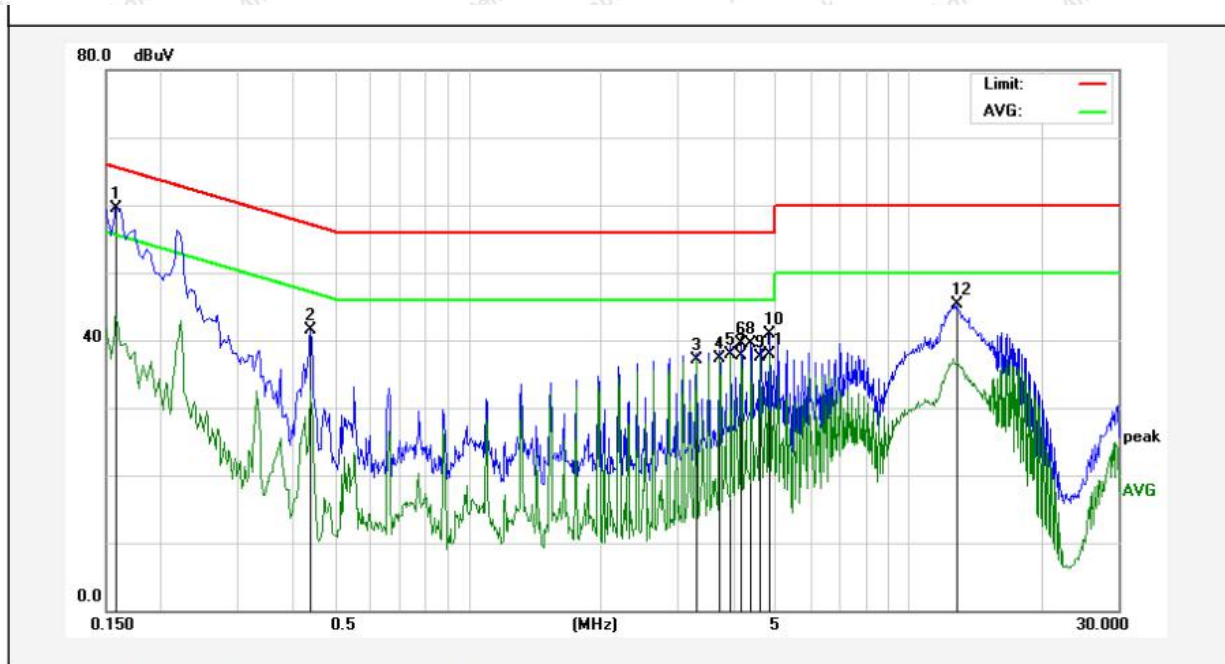

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	59.32	0.12	59.44	65.56	-6.12	QP	
2	0.4380	41.30	0.13	41.43	57.10	-15.67	QP	
3	3.2980	37.02	0.12	37.14	46.00	-8.86	AVG	
4	3.7380	37.13	0.12	37.25	46.00	-8.75	AVG	
5	3.9580	37.69	0.12	37.81	46.00	-8.19	AVG	
6	4.1779	39.40	0.11	39.51	56.00	-16.49	QP	
7	4.1779	37.53	0.11	37.64	46.00	-8.36	AVG	
8	4.3980	39.31	0.11	39.42	56.00	-16.58	QP	
9	4.6180	37.49	0.11	37.60	46.00	-8.40	AVG	
10	4.8380	40.79	0.11	40.90	56.00	-15.10	QP	
11	4.8380	37.71	0.11	37.82	46.00	-8.18	AVG	
12	12.9140	45.08	0.15	45.23	60.00	-14.77	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.9°C Hum.: 46%

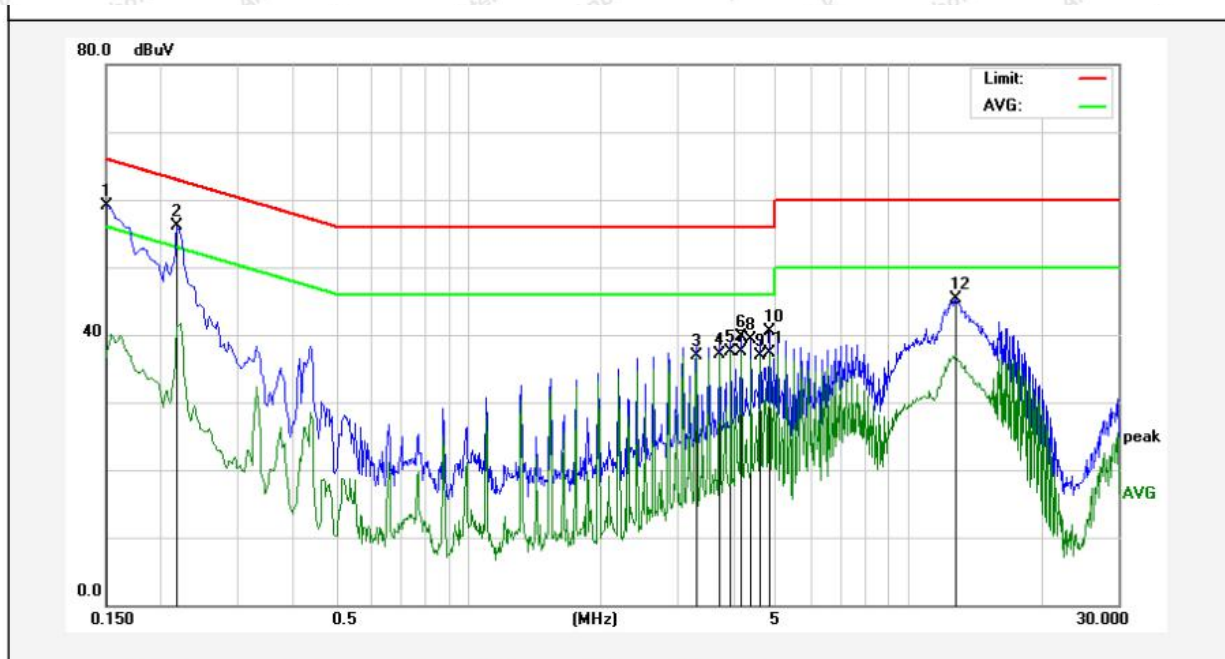

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	58.96	0.11	59.07	65.99	-6.92	QP	
2	0.2180	55.89	0.12	56.01	62.89	-6.88	QP	
3	3.2940	36.87	0.12	36.99	46.00	-9.01	AVG	
4	3.7340	37.00	0.12	37.12	46.00	-8.88	AVG	
5	3.9540	37.34	0.12	37.46	46.00	-8.54	AVG	
6	4.1740	39.52	0.11	39.63	56.00	-16.37	QP	
7	4.1740	37.42	0.11	37.53	46.00	-8.47	AVG	
8	4.3940	39.23	0.11	39.34	56.00	-16.66	QP	
9	4.6100	36.77	0.11	36.88	46.00	-9.12	AVG	
10	4.8300	40.31	0.11	40.42	56.00	-15.58	QP	
11	4.8300	37.12	0.11	37.23	46.00	-8.77	AVG	
12	12.7900	45.19	0.15	45.34	60.00	-14.66	QP	

4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

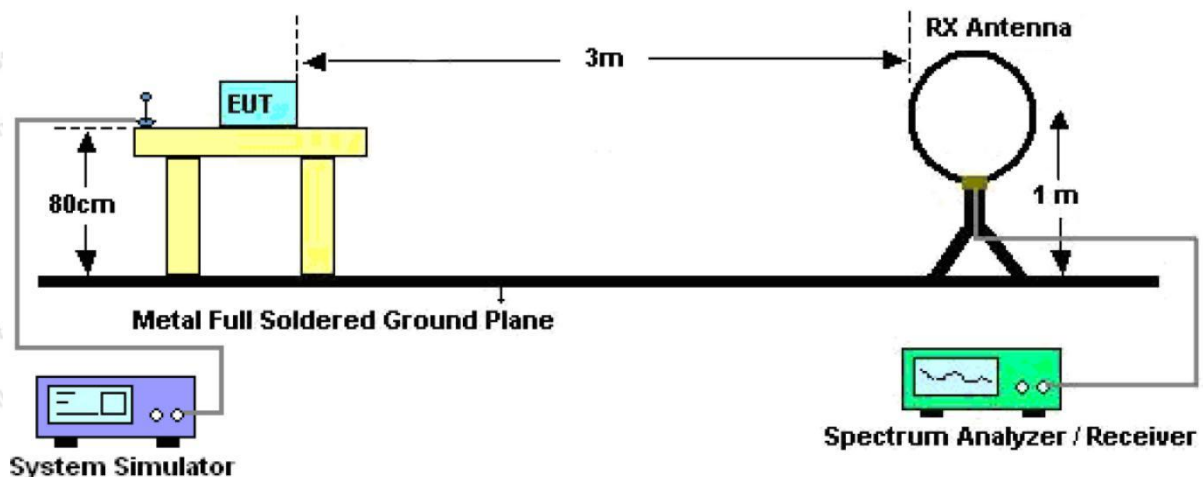


Figure 1. Below 30MHz

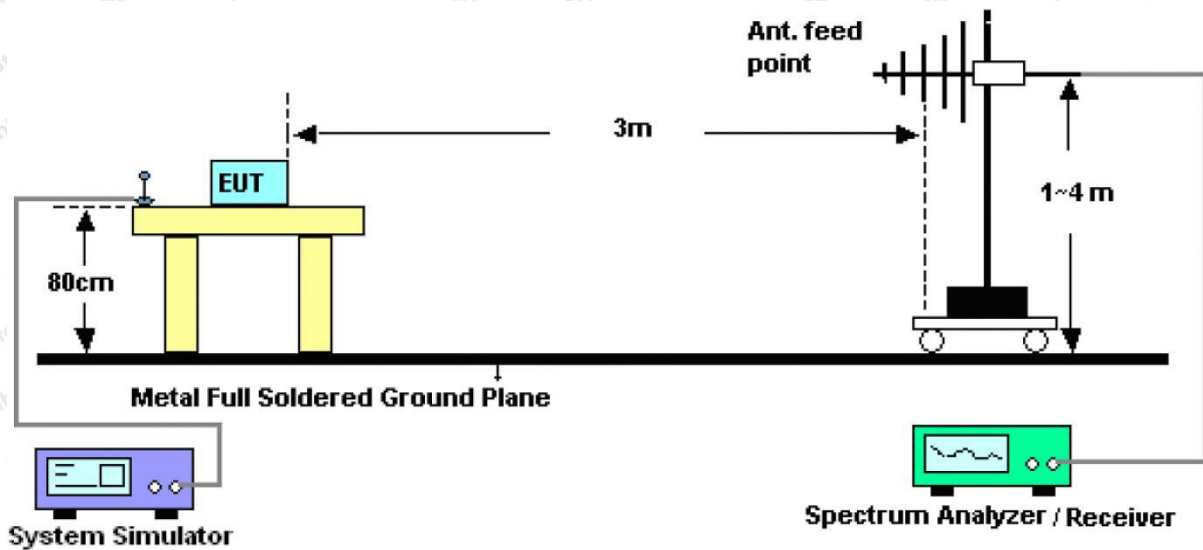


Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


4.4. Test Data

PASS

Note: The data is in TX mode, and this is the worst mode.


Test Results

(Between 9KHz – 30MHz)

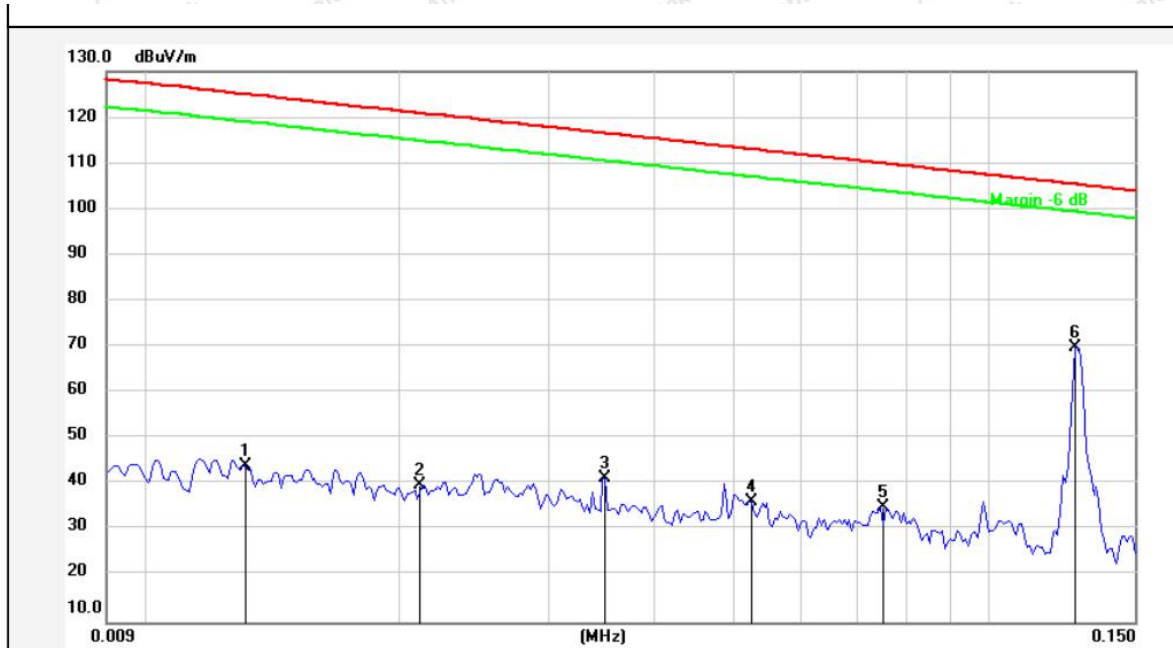Standard: FCC PART15 C _3m**Power Source:** AC 120V, 60Hz for adapter**Test item:** Radiation Test**Temp.(C)/Hum.(%RH):** 23.2°C/52%RH**Test Mode:** Mode 1**Distance:** 3m


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0131	23.94	20.16	44.10	125.07	-80.97	AV			
2	0.0212	19.59	20.32	39.91	120.91	-81.00	AV			
3	0.0352	20.77	20.48	41.25	116.53	-75.28	AV			
4	0.0526	15.76	20.38	36.14	113.07	-76.93	AV			
5	0.0748	14.55	20.37	34.92	110.03	-75.11	AV			
6	0.1276	49.60	20.34	69.94	105.42	-35.48	AV			



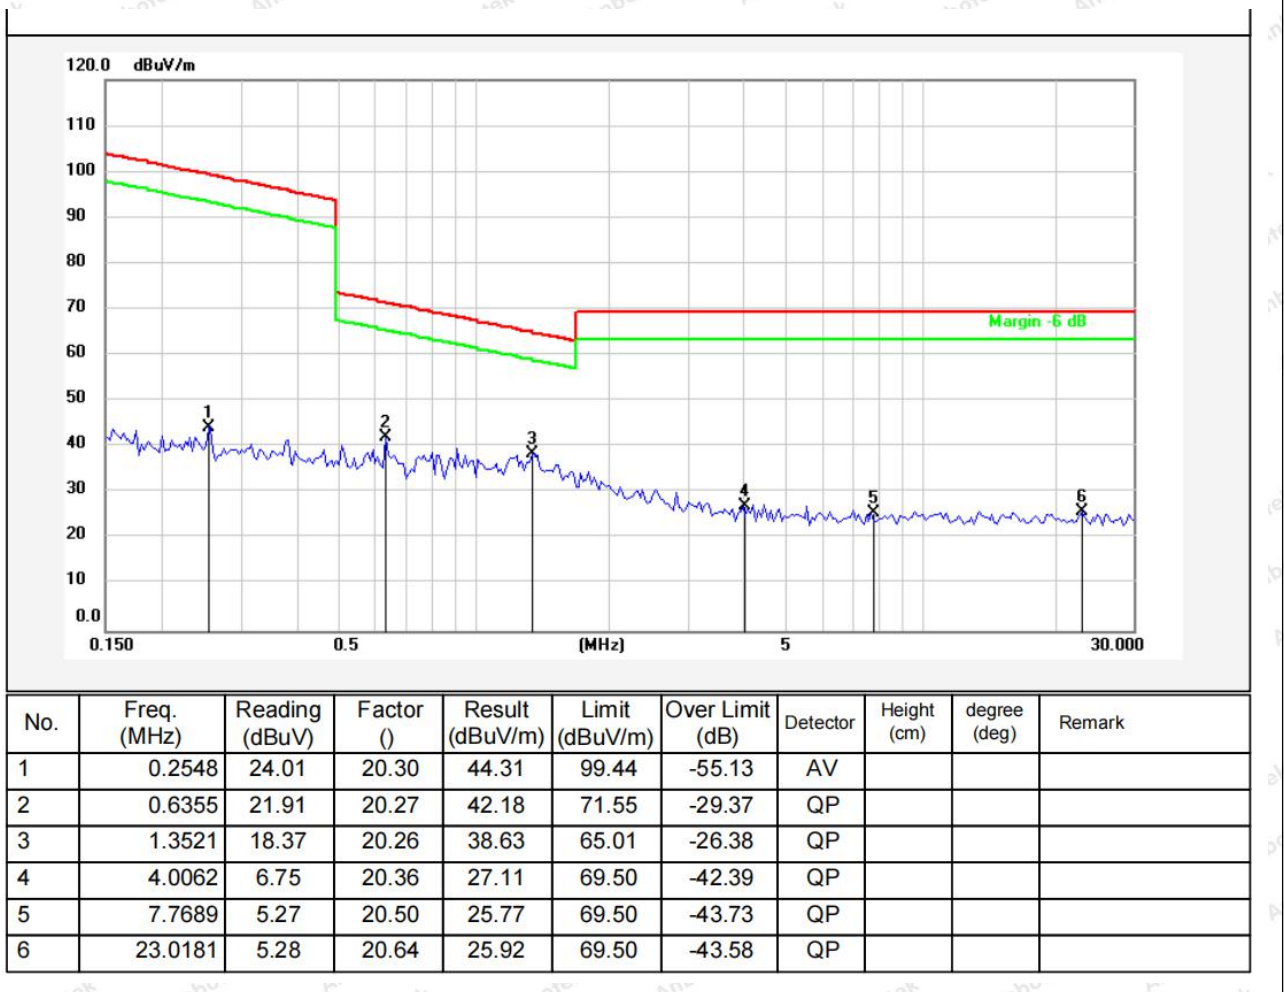


Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

(Between 30MHz –1000 MHz)

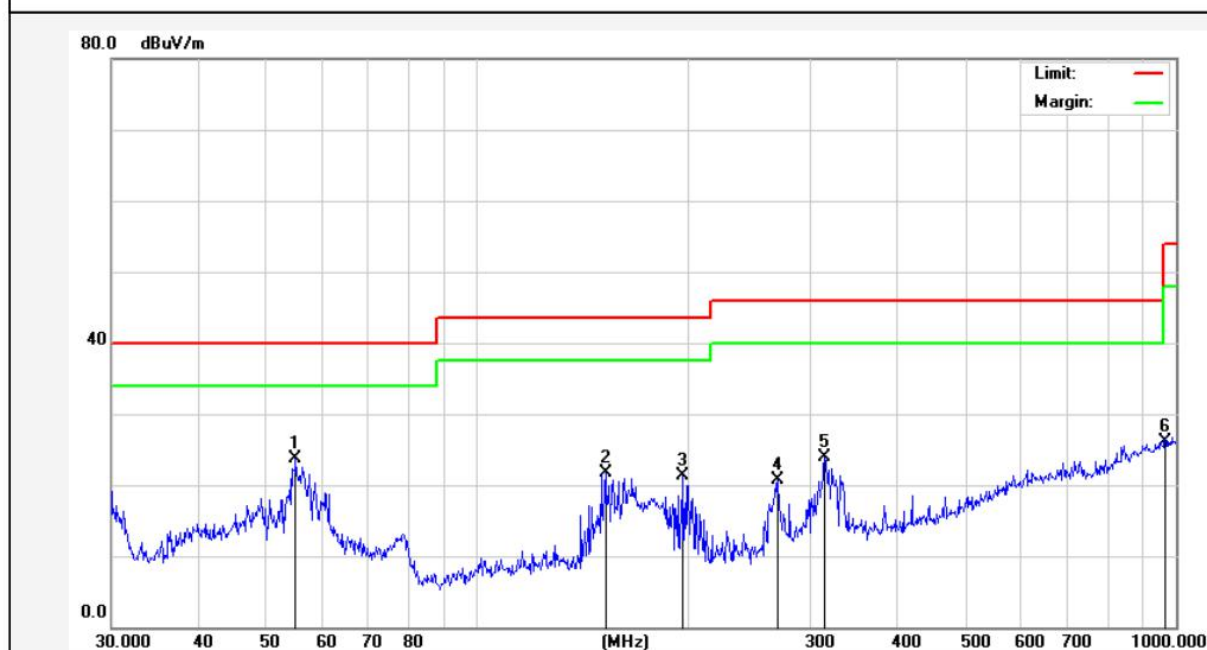Standard: FCC PART15 C _3m**Polarization:****Horizontal****Test item:** Radiation Test**Power Source:****AC 120V, 60Hz for adapter****Test Mode:** Mode 1**Temp.(C)/Hum.(%RH):****23.6℃/48%RH****Distance:** 3m

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	55.0274	41.33	-17.63	23.70	40.00	-16.30	QP			
2	152.6641	44.95	-23.17	21.78	43.50	-21.72	QP			
3	197.2001	43.71	-22.45	21.26	43.50	-22.24	QP			
4	269.4284	40.60	-19.82	20.78	46.00	-25.22	QP			
5	314.3765	40.66	-16.83	23.83	46.00	-22.17	QP			
6	962.1623	31.52	-5.44	26.08	54.00	-27.92	QP			

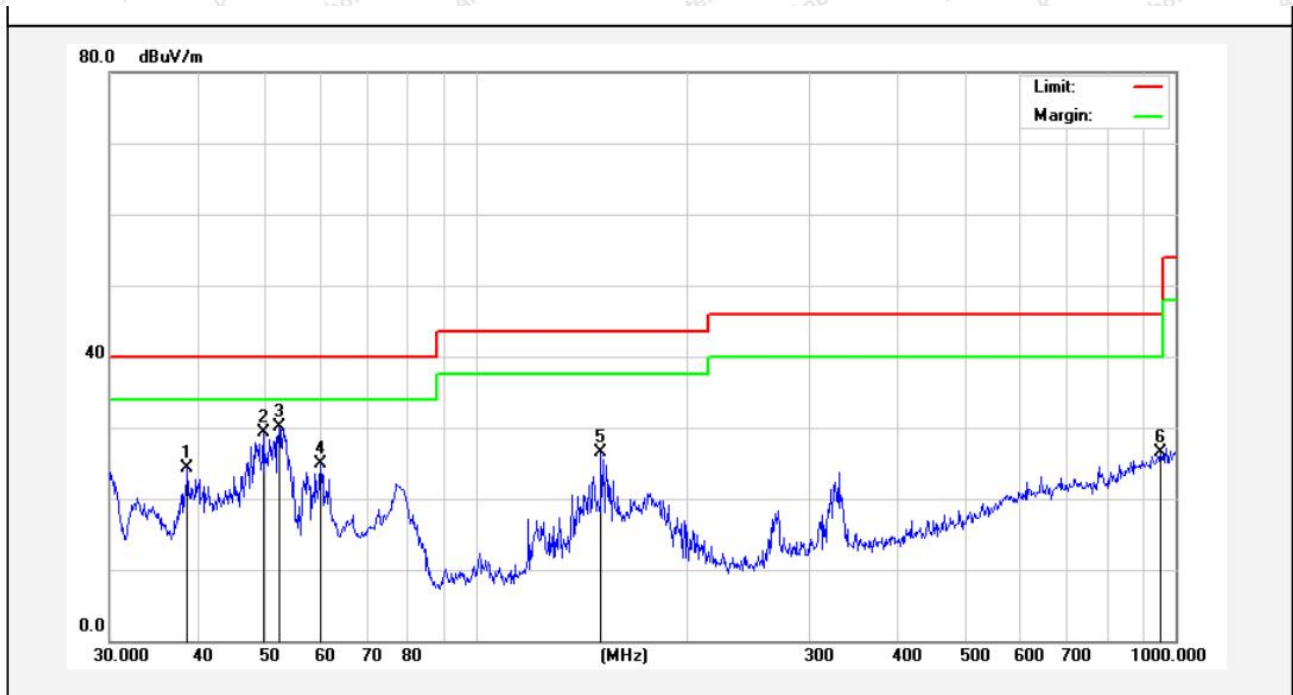Standard: FCC PART15 C _3m**Polarization:****Vertical****Test item:** Radiation Test**Power Source:****AC 120V, 60Hz for adapter****Test Mode:** Mode 1**Temp.(C)/Hum.(%RH):****23.6°C/48%RH****Distance:** 3m

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.7518	39.55	-15.20	24.35	40.00	-15.65	QP			
2	49.7068	45.10	-15.73	29.37	40.00	-10.63	QP			
3	52.3912	46.72	-16.66	30.06	40.00	-9.94	QP			
4	60.0691	42.43	-17.51	24.92	40.00	-15.08	QP			
5	151.0666	48.64	-22.05	26.59	43.50	-16.91	QP			
6	952.0937	32.06	-5.61	26.45	46.00	-19.55	QP			



5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement

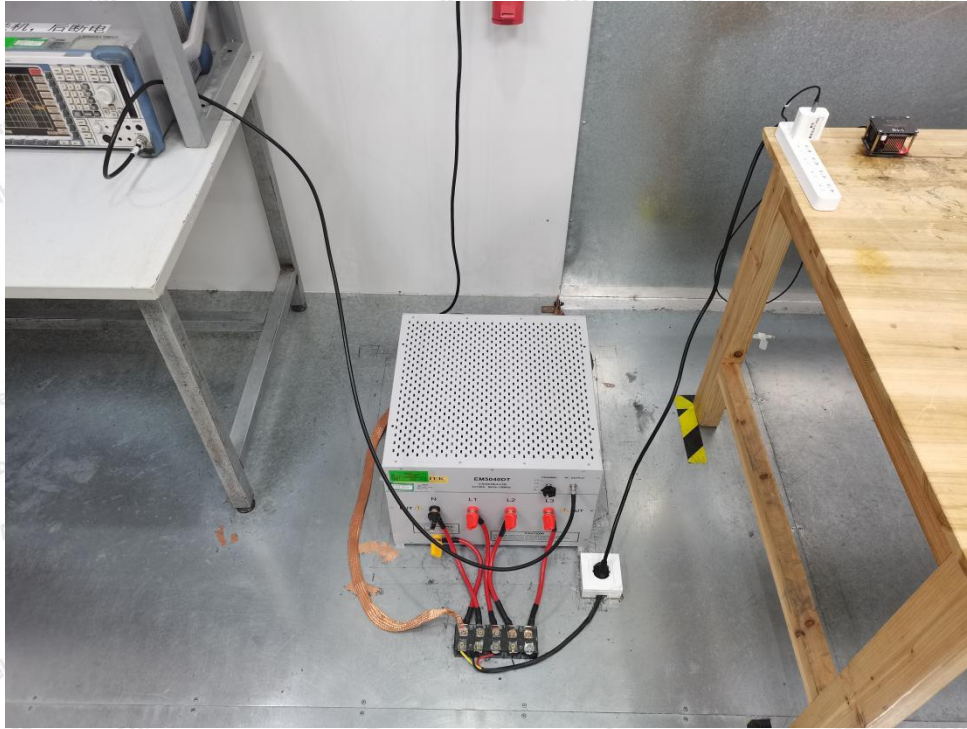


Photo of Radiation Emission Test








APPENDIX II -- EXTERNAL PHOTOGRAPH



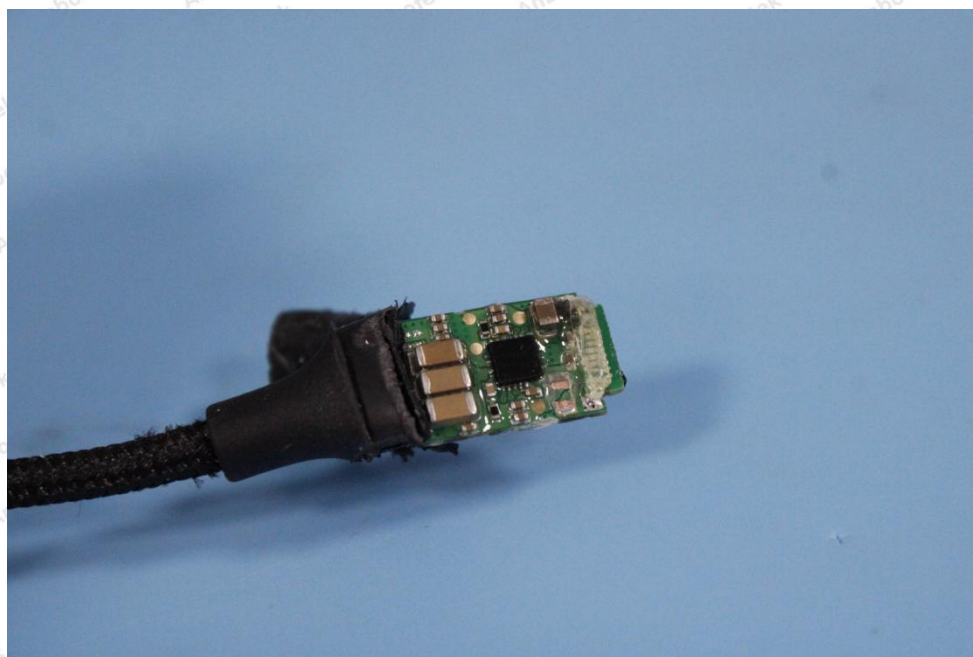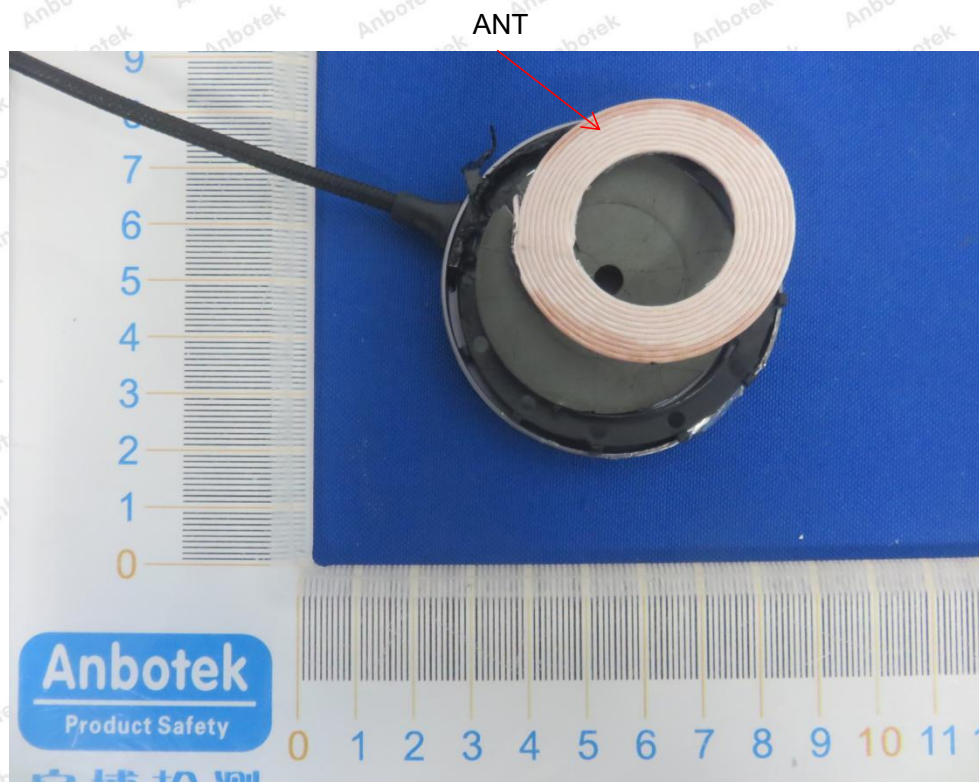

APPENDIX III -- INTERNAL PHOTOGRAPH

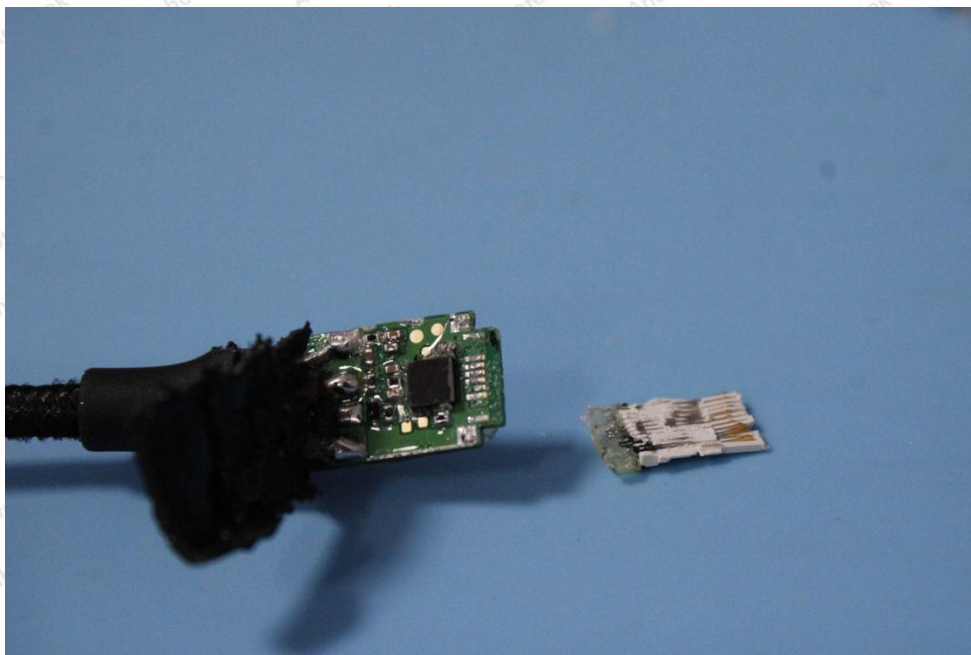

----- End of Report -----