



TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC1811-0118(1)
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-V405EBW
FCC ID : ZNFV405EBW
5. Test Method Used : IEEE 1528-2013, FCC SAR KDB Publications (Details in test report)
Test Specification : CFR §2.1093
6. Date of Test : 2018.11.07 ~ 2018.11.20
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to attached test report.

Affirmation	Tested by		Reviewed by	
	Name : HoSik Sim		Name : HakMin Kim	

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2018 . 11 . 30 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRRFCC1811-0118	Nov. 27, 2018	Initial issue
DRRFCC1811-0118(1)	Nov. 30, 2018	Revise of section 1.4

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 General Information	5
1.2 Power Reduction for SAR	7
1.3 Nominal and Maximum Output Power Specifications	7
1.4 DUT Antenna Locations	7
1.5 Simultaneous Transmission Capabilities	7
1.6 Miscellaneous SAR Test Considerations	8
1.7 Guidance Applied	9
1.8 Device Serial Numbers	9
2. LTE INFORMATION	10
3. INTROCUCTION	11
4. DOSIMETRIC ASSESSMENT	12
4.1 Measurement Procedure	12
5. DEFINITION OF REFERENCE POINTS	14
5.1 Ear Reference Point	14
5.2 Handset Reference Points	14
6. TEST CONFIGURATION POSITIONS FOR HANDSETS	15
6.1 Device Holder	15
6.2 Positioning for Cheek/Touch	15
6.3 Positioning for Ear / 15 ° Tilt	15
6.4 Body-Worn Accessory Configurations	16
6.5 Extremity Exposure Configurations	16
6.6 Wireless Router Configurations	17
6.7 Phablet Configurations	17
7. RF EXPOSURE LIMITS	18
8. FCC MEASUREMENT PROCEDURES	19
8.1 Measured and Reported SAR	19
8.2 Procedures Used to Establish RF Signal for SAR	19
8.3 SAR Measurement Conditions for WCDMA (UMTS)	19
8.3.1 Output Power Verification	19
8.3.2 Head SAR Measurements for Handsets	19
8.3.3 Body SAR Measurements	20
8.3.4 Release 5 HSDPA Data Devices	20
8.3.5 Release 6 HSUPA Data Devices	20
8.3.6 SAR Measurement Conditions for DC-HSDPA	21
8.4 SAR Measurement Conditions for LTE	22
8.4.1 Spectrum Plots for RB Configurations	22
8.4.2 MPR	22
8.4.3 A-MPR	22
8.4.4 Required RB Size and RB Offsets for SAR Testing	22
8.4.5 LTE TDD Consideration setup for SAR measurement	23
8.4.6 Downlink Only Carrier Aggregation	24
8.5 SAR Testing with 802.11 Transmitters	24
8.5.1 General Device Setup	24
8.5.2 U-NII and U-NII-2A	25
8.5.3 U-NII-2C and U-NII-3	25
8.5.4 Initial Test Position Procedure	25
8.5.5 2.4 GHz SAR Test Requirements	25
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection	26
8.5.7 Initial Test Configuration Procedure	26
8.5.8 Subsequent Test Configuration Procedures	26
8.5.9 MIMO SAR Considerations	26

9. RF CONDUCTED POWERS	27
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers	27
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers	28
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers	29
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers	42
9.5 Bluetooth Conducted Powers	45
10. SYSTEM VERIFICATION	47
10.1 Tissue Verification	47
10.2 Test System Verification	51
11. SAR TEST RESULTS	53
11.1 Head SAR Results	53
11.2 Standalone Body-Worn SAR Worn SAR Results	61
11.3 Standalone Hotspot SAR Results	67
11.4 Standalone Phablet SAR Results	74
11.5 SAR Test Notes	76
12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	79
12.1 Introduction	79
12.2 Simultaneous Transmission Procedures	79
12.3 Simultaneous Transmission Capabilities	79
12.4 Head SAR Simultaneous Transmission Analysis	81
12.5 Body-Worn Simultaneous Transmission Analysis	107
12.6 Hotspot SAR Simultaneous Transmission Analysis	120
12.7 Phablet SAR Simultaneous Transmission Analysis	139
12.8 Simultaneous Transmission Conclusion	139
13. SAR MEASUREMENT VARIABILITY	140
13.1 Measurement Variability	140
13.2 Measurement Uncertainty	140
14. EQUIPMENT LIST	141
15. MEASUREMENT UNCERTAINTIES	142
16. CONCLUSION	164
17. REFERENCES	165
APPENDIX A. – Probe Calibration Data	167
APPENDIX B. – Dipole Calibration Data	201
APPENDIX C. – SAR Tissue Specifications	266
APPENDIX D. – SAR SYSTEM VALIDATION	269
APPENDIX E. – Downlink LTE CA RF Conducted Powers	271
APPENDIX F. – Description of Test Equipment	276

1. DESCRIPTION OF DEVICE

1.1 General Information

EUT type	Mobile Phone				
FCC ID	ZNFV405EBW				
Equipment model name	LM-V405EBW				
Equipment add model name	LMV405EBW, V405EBW, LM-V405EAW, LMV405EAW, V405EAW, LM-V405EB, LMV405EB, V405EB, LM-V405EA, LMV405EA, V405EA • 12 models are same mechanical, electrical and functional except follows. - LM-V405EB, LMV405EB, V405EB, LM-V405EA, LMV405EA, V405EA: No differences - LM-V405EBW, LMV405EBW, V405EBW, LM-V405EAW, LMV405EAW, V405EAW: Dual SIM support(1 RF Path)				
Equipment serial no.	Identical prototype				
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1700, WCDMA 1900, LTE Band 12, 17, 13, 5, 4, 2, 41, 2.4 G W-LAN (802.11b/g/n-HT20/ac-VHT20), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/ac-VHT80), Bluetooth				
TX Frequency Range	Band	Mode	Operating Modes	Bandwidth	Frequency
	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 ~ 848.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1850.2 ~ 1909.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	826.4 ~ 846.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	1712.4 ~ 1752.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1852.4 ~ 1907.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 ~ 715.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	706.5 ~ 713.5 MHz
	LTE Band 13	LTE	Voice/Data	5/10MHz	779.5 ~ 784.5 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 ~ 848.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1754.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1850.7 ~ 1909.3 MHz
	LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2498.5 ~ 2687.5 MHz
	2.4 GHz W-LAN	802.11b/g/n/ac	Voice/Data	HT20/VHT20	2412 ~ 2472 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	Voice/Data	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5260 ~ 5320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	Voice/Data	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	Voice/Data	VHT80	5775 MHz
	Bluetooth	-	Data	-	2402 ~ 2480 MHz
RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	869.2 ~ 893.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1930.2 ~ 1989.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	871.4 ~ 891.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	2112.4 ~ 2152.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1932.4 ~ 1987.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	729.7 ~ 745.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	736.5 ~ 743.5 MHz
	LTE Band 13	LTE	Voice/Data	5/10MHz	748.5 ~ 753.5 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	869.7 ~ 893.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2154.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1930.7 ~ 1989.3 MHz
	LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2498.5 ~ 2687.5 MHz
	2.4 GHz W-LAN	802.11b/g/n/ac	Voice/Data	HT20/VHT20	2412 ~ 2472 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	Voice/Data	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT200	5260 ~ 5320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	Voice/Data	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	Voice/Data	VHT80	5775 MHz
	Bluetooth	-	Data	-	2402 ~ 2480 MHz

SAR Summary Table

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
PCE	GSM 850	0.14	0.65	-	-
PCE	GPRS 850	0.14	0.67	0.67	-
PCE	GSM 1900	< 0.1	0.28	-	-
PCE	GPRS 1900	< 0.1	0.34	0.52	-
PCE	WCDMA 850	0.15	0.61	0.61	-
PCE	WCDMA 1700	< 0.1	0.39	0.44	-
PCE	WCDMA 1900	< 0.1	0.51	0.59	-
PCE	LTE Band 12	0.19	0.62	0.62	-
PCE	LTE Band 17	-	-	-	-
PCE	LTE Band 13	0.18	0.69	0.69	-
PCE	LTE Band 5	< 0.1	0.55	0.55	-
PCE	LTE Band 4	< 0.1	0.39	0.44	-
PCE	LTE Band 2	< 0.1	0.35	0.67	-
PCE	LTE Band 41	0.36	0.47	0.47	-
DTS(SISO)	2.4 GHz W-LAN	0.36	0.33	0.33	-
DTS(MIMO)	2.4 GHz W-LAN	0.39	0.29	0.29	-
U-NII-1(SISO)	5.2 GHz W-LAN	-	-	0.28	-
U-NII-1(MIMO)	5.2 GHz W-LAN	-	-	0.34	-
U-NII-2A(SISO)	5.3 GHz W-LAN	0.65	0.28	-	0.96
U-NII-2A(MIMO)	5.3 GHz W-LAN	0.52	0.40	-	0.97
U-NII-2C(SISO)	5.6 GHz W-LAN	0.75	0.71	-	1.39
U-NII-2C(MIMO)	5.6 GHz W-LAN	0.78	0.76	-	1.68
U-NII-3(SISO)	5.8 GHz W-LAN	0.32	0.24	0.24	0.54
U-NII-3(MIMO)	5.8 GHz W-LAN	0.37	0.25	0.25	0.62
DSS	Bluetooth	0.13	< 0.1	< 0.1	-
Simultaneous SAR per KDB 690783 D01v01r03		1.18	1.50	1.07	-
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)				
Date(s) of Tests	2018.11.07 ~ 2018.11.20				
Antenna Type	Internal Antenna				
Functions	- GSM/GPRS/EDGE (GPRS/EDGE Class: 33) supported. * DTM not supported. - No simultaneous transmission between BT & 2.4GHz WLAN - Simultaneous transmission between [GSM, WCDMA voice & WLAN], [GPRS, WCDMA & WLAN], [LTE & WLAN]. - VoIP is supported. - W-LAN 2.4GHz is supported Hotspot. - W-LAN 5 GHz is supported Hotspot in UNII B1, B3.				

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in ZNFV405EBW_Antenna Location. Since the diagonal dimension of this device is > 160 mm and < 200 mm. it is considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS/EDGE 850	X	O	O	O	O	X
GSM/GPRS/EDGE 1900	X	O	O	O	X	O
WCDMA 850	X	O	O	O	O	X
WCDMA 1700	X	O	O	O	X	O
WCDMA 1900	X	O	O	O	X	O
LTE Band 12	X	O	O	O	O	X
LTE Band 17	X	O	O	O	O	X
LTE Band 13	X	O	O	O	O	X
LTE Band 5	X	O	O	O	O	X
LTE Band 4	X	O	O	O	X	O
LTE Band 2	X	O	O	O	X	O
LTE Band 41	X	X	O	O	O	X
2.4G W-LAN Ant.1	O	X	O	O	X	O
2.4G W-LAN Ant.2	O	X	O	O	X	O
2.4G W-LAN MIMO	O	X	O	O	X	O
5G W-LAN Ant.1	O Note 2	X	O	O	X	O Note 2
5G W-LAN Ant.2	O Note 2	X	O	O	X	O Note 2
5G W-LAN MIMO	O Note 2	X	O	O	X	O Note 2
Bluetooth	O	X	O	O	X	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: WLAN Hotspot UNII-1, 3 supported.

Note 3: O - Test / X - Not test.

Note 4: This DUT has NFC operations. The NFC antenna is integrated into the back side.

The SAR tests were performed with NFC antenna already incorporated.

A diagram showing the location of the device antenna can be found in ZNFV405EBW_Antenna Location.

1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4GHz, U-NII-1, U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn and hotspot **Bluetooth SAR were not required; [(15/10)*√2.480] = 2.4 (< 3.0)**. Per KDB Publication 447498 D01 v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v06, the 10g SAR exclusion threshold for distance < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, phablet **Bluetooth SAR was not required; [(15/5)*√2.480] = 4.8 (< 7.5)**. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160 mm and less than 200 mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C & U-NII-3 WLAN(CH 165), phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

Per FCC KDB Publication 648474 D04 v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01 (Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

2. LTE INFORMATION

LTE Information					
FCC ID	ZNFV405EBW				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 13 (779.5 ~ 784.5 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 4 (AWS) (1710.7 ~ 1754.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz) LTE Band 41 (2498.5 ~ 2687.5 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 : 5 MHz, 10 MHz LTE Band 13 : 5 MHz, 10 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41 : 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) ^{Note1}	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5(23755)	N/A	710.0(23790)	N/A	713.5(23825)
LTE Band 17: 10 MHz	709.0(23780)	N/A	710.0(23790)	N/A	711.0(23800)
LTE Band 13: 5 MHz	779.5(23205)	N/A	782.0(23230) ^{Note2}	N/A	784.5(23255)
LTE Band 13: 10 MHz	N/A	N/A	782.0(23230)	N/A	N/A
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) ^{Note3}	N/A	844.0 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175) ^{Note4}	N/A	1745.0 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
LTE Band 41: 5 MHz	2498.5 (39675)	2545.8 (40148)	2593.0 (40620)	2640.3 (41093)	2687.5 (41565)
LTE Band 41: 10 MHz	2501.0 (39700)	2547.0 (40160)	2593.0 (40620)	2639.0 (41080)	2685.0 (41540)
LTE Band 41: 15 MHz	2503.5 (39725)	2548.3 (40173)	2593.0 (40620)	2637.8 (41068)	2682.5 (41515)
LTE Band 41: 20 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
UE Category	LTE Rel.12 DL UE Cat 18, UL UE Cat 5 with only downlink carrier aggregation (not support uplink MIMO and uplink carrier aggregation)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 12. It supports only downlink carrier aggregation. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 12 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

Note(s)

- LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE B13 can not contain three non-overlapping channels of 5 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

3. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

4. DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4.1
Sample SAR Area Scan

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

5. DEFINITION OF REFERENCE POINTS

5.1 Ear Reference Point

Figure 5.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 5.1
Close-up side view
of ERP

5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 5.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at it’s top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5.2 Front, back and side view SAM Twin Phantom

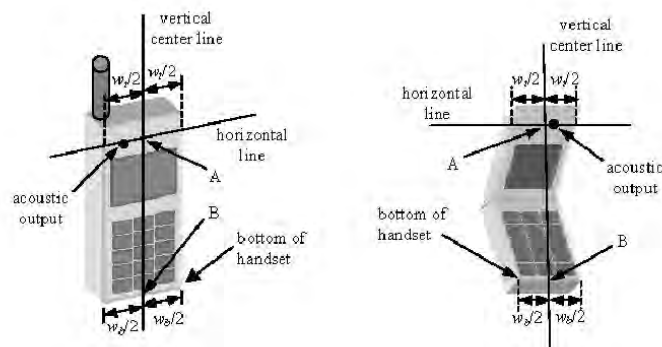


Figure 5.3 Handset Vertical Center & Horizontal Line Reference Points

6. TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.7 Phablet Configurations

For smart phones with a display diagonal $> 150 \text{ mm}$ or an overall diagonal dimension $> 160 \text{ mm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR $> 1.2 \text{ W/kg}$.

7. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.3 SAR Measurement Conditions for WCDMA (UMTS)

8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC, (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

Figure 9.1 Table 1

8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 9.2 Table 2

8.3.6 SAR Measurement Conditions for DC-HSDPA

In the following DB 941225 D01v03r01 procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.4.5 LTE TDD Consideration setup for SAR measurement

According to KDB 941225 D05 SAR for LTE Devices v02r05 for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configuration and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-	-	-
8	$24144 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U

$T_s = 1/(15000 * 2048)$ seconds

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 * [1/(15000 * 2048)] * 2 + 6 \text{ ms} = 63.33 \%$

8.4.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02, April 2018 TCB Workshop notes (LTE Carrier Aggregation) and May 2017 TCB Workshop (LTE 4x4 Downlink MIMO). The RCC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

8.5.9 MIMO SAR Considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]				Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS/EDGE 850	Maximum	34.2	34.2	30.2	28.2	27.2	27.2	27.2	26.2	25.2
	Nominal	33.7	33.7	29.7	27.7	26.7	26.7	26.7	25.7	24.7
GSM/GPRS/EDGE 1900	Maximum	30.7	30.7	27.7	26.7	25.7	26.2	26.2	25.7	24.7
	Nominal	30.2	30.2	27.2	26.2	25.2	25.7	25.7	25.2	24.2

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)									
		Voice	GPRS/EDGE Data (GMSK)					EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot	
GSM850	128	33.9	33.9	30.1	28.1	26.8	27.2	27.2	25.9	24.5	
	190	33.8	33.8	30.2	28.1	26.8	27.2	27.1	25.9	24.5	
	251	33.8	33.8	30.2	28.2	27.0	27.2	27.2	26.0	24.6	
PCS 1900	512	30.7	30.7	27.7	26.6	25.5	26.2	26.2	25.4	24.1	
	661	30.7	30.7	27.7	26.5	25.4	26.2	26.2	25.4	24.0	
	810	30.7	30.7	27.6	26.4	25.3	26.1	26.0	25.2	24.0	
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)									
		Voice	GPRS/EDGE Data (GMSK)					EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot	
GSM850	128	24.87	24.87	24.08	23.84	23.79	18.17	21.18	21.64	21.49	
	190	24.77	24.77	24.18	23.84	23.79	18.17	21.08	21.64	21.49	
	251	24.77	24.77	24.18	23.94	23.99	18.17	21.18	21.74	21.59	
PCS 1900	512	21.67	21.67	21.68	22.34	22.49	17.17	20.18	21.14	21.09	
	661	21.67	21.67	21.68	22.24	22.39	17.17	20.18	21.14	20.99	
	810	21.67	21.67	21.58	22.14	22.29	17.07	19.98	20.94	20.99	
GSM850	Frame Avg. Targets:	24.67	24.67	23.68	23.44	23.69	17.67	20.68	21.44	21.69	
PCS 1900		21.17	21.17	21.18	21.94	22.19	16.67	19.68	20.94	21.19	

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GPRS Multislot class: 33 (max 4 TX Uplink slots)
EDGE Multislot class: 33 (max 4 TX Uplink slots)
DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode			Cellular Band (dBm)	AWS Band (dBm)	PCS Band (dBm)	3GPP MPR (dB)	
99	WCDMA	Voice	Maximum	25.5	22.7	22.7	-	
			Nominal	25.0	22.2	22.2		
5	HSDPA	Subtest 1	Maximum	25.5	22.7	22.7	0	
			Nominal	25.0	22.2	22.2		
5		Subtest 2	Maximum	25.5	22.7	22.7	0	
			Nominal	25.0	22.2	22.2		
5		Subtest 3	Maximum	25.0	22.2	22.2	0.5	
			Nominal	24.5	21.7	21.7		
5		Subtest 4	Maximum	25.0	22.2	22.2	0.5	
			Nominal	24.5	21.7	21.7		
6		HSUPA	Subtest 1	Maximum	25.5	22.7	22.7	0
				Nominal	25.0	22.2	22.2	
6	Subtest 2		Maximum	23.5	20.7	20.7	2	
			Nominal	23.0	20.2	20.2		
6	Subtest 3		Maximum	24.5	21.7	21.7	1	
			Nominal	24.0	21.2	21.2		
6	Subtest 4		Maximum	23.5	20.7	20.7	2	
			Nominal	23.0	20.2	20.2		
6	Subtest 5		Maximum	25.5	22.7	22.7	0	
			Nominal	25.0	22.2	22.2		
8	DC-HSDPA	Subtest 1	Maximum	25.5	22.7	22.7	0	
			Nominal	25.0	22.2	22.2		
8		Subtest 2	Maximum	25.5	22.7	22.7	0	
			Nominal	25.0	22.2	22.2		
8		Subtest 3	Maximum	25.0	22.2	22.2	0.5	
			Nominal	24.5	21.7	21.7		
8		Subtest 4	Maximum	25.0	22.2	22.2	0.5	
			Nominal	24.5	21.7	21.7		

Table 9.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			AWS Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	25.18	25.19	25.11	22.16	22.31	22.35	22.57	22.57	22.52	-
99		12.2 kbps AMR	25.15	25.17	25.09	22.15	22.28	22.33	22.55	22.55	22.51	-
5	HSDPA	Subtest 1	25.13	25.18	25.07	22.15	22.28	22.34	22.53	22.55	22.51	0
5		Subtest 2	25.17	25.17	25.10	22.14	22.30	22.32	22.56	22.43	22.40	0
5		Subtest 3	24.67	24.78	24.61	21.71	21.84	21.87	21.92	21.96	21.93	0.5
5		Subtest 4	24.67	24.78	24.59	21.68	21.79	21.79	21.92	21.94	21.92	0.5
6	HSUPA	Subtest 1	24.44	24.54	24.40	21.92	22.04	22.10	22.18	22.20	22.19	0
6		Subtest 2	23.16	23.27	23.07	20.12	20.26	20.29	20.41	20.42	20.40	2
6		Subtest 3	24.15	24.26	24.09	21.12	21.26	21.27	21.37	21.40	21.35	1
6		Subtest 4	23.16	23.25	23.10	20.13	20.26	20.28	20.39	20.43	20.38	2
6		Subtest 5	25.15	25.17	25.05	22.09	22.23	22.26	22.28	22.29	22.27	0
8	DC-HSDPA	Subtest 1	25.04	25.14	24.97	22.11	22.21	22.25	22.45	22.51	22.44	0
8		Subtest 2	25.16	25.12	25.02	22.05	22.27	22.23	22.48	22.35	22.34	0
8		Subtest 3	24.58	24.73	24.52	21.65	21.80	21.79	21.84	21.90	21.92	0.5
8		Subtest 4	24.58	24.70	24.52	21.62	21.76	21.75	21.89	21.86	21.88	0.5

Table 9.2.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSUPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance.
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements.
- The DUT supports UE category 24 for HSDPA.



Figure 9.2 Power Measurement Setup

9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Modulated Average[dBm]
LTE Band 12	Maximum	25.5
	Nominal	25.0

Table 9.3.1 Nominal and Maximum Output Power Spec

1) LTE Band 12

LTE Band 12 Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23095 (707.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	25.14	0	0
	1	25	25.37		
	1	49	25.29		
	25	0	23.96	0-1	1
	25	12	24.07		
	25	25	24.04		
16QAM	50	0	24.05	0-1	1
	1	0	24.09		
	1	25	24.35		
	1	49	24.25	0-2	2
	25	0	23.09		
	25	12	23.20		
64QAM	25	25	23.18	0-2	2
	50	0	23.20		
	1	0	23.13		
	1	25	23.18	0-3	3
	1	49	23.13		
	25	0	22.09		
	25	12	22.18	0-3	3
	25	25	22.12		
	50	0	22.15		

Table 9.3.2 LTE Conducted Power

Note : LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power-- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.18	25.18	25.23	0	0
	1	12	25.32	25.34	25.33		
	1	24	25.24	25.25	25.27		
	12	0	24.01	24.01	23.90	0-1	1
	12	6	24.01	24.01	24.02		
	12	13	24.00	23.98	24.03		
	25	0	23.98	23.98	23.93	0-1	1
16QAM	1	0	24.12	24.08	24.16	0-1	1
	1	12	24.28	24.29	24.29		
	1	24	24.16	24.21	24.22		
	12	0	23.16	23.19	23.05	0-2	2
	12	6	23.15	23.18	23.22		
	12	13	23.14	23.15	23.19		
	25	0	23.12	23.13	23.05	0-2	2
64QAM	1	0	23.14	23.15	23.22	0-2	2
	1	12	23.28	23.31	23.15		
	1	24	23.22	23.24	23.27		
	12	0	22.12	22.16	22.08	0-3	3
	12	6	22.16	22.15	22.20		
	12	13	22.15	22.13	22.14		
	15	0	22.08	22.08	22.00	0-3	3

Table 9.3.3 LTE Conducted Power

LTE Band 12 Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.16	25.27	25.29	0	0
	1	7	25.15	25.23	25.30		
	1	14	25.23	25.24	25.29		
	8	0	23.86	23.97	23.99	0-1	1
	8	4	23.92	24.00	24.01		
	8	7	23.98	23.93	23.98		
	15	0	23.96	23.94	24.00	0-1	1
16QAM	1	0	24.08	24.23	24.24	0-1	1
	1	7	24.12	24.21	24.24		
	1	14	24.18	24.21	24.16		
	8	0	22.89	22.98	23.03	0-2	2
	8	4	23.10	23.03	23.04		
	8	7	22.99	23.00	22.98		
	15	0	22.97	22.96	23.02	0-2	2
64QAM	1	0	22.98	23.10	23.26	0-2	2
	1	7	22.96	23.06	23.28		
	1	14	23.04	23.07	23.27		
	8	0	22.02	22.15	22.14	0-3	3
	8	4	22.07	22.15	22.17		
	8	7	22.13	22.12	22.13		
	15	0	22.13	22.10	22.13	0-3	3

Table 9.3.4 LTE Conducted Power

LTE Band 12 Conducted Power~ 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.10	25.17	25.21	0	0
	1	2	25.20	25.25	25.29		
	1	5	25.11	25.19	25.20		
	3	0	25.12	25.21	25.18	0	0
	3	2	25.14	25.25	25.15		
	3	3	25.10	25.22	25.05		
	6	0	23.82	23.83	23.83	0-1	1
16QAM	1	0	24.10	24.11	24.14	0-1	1
	1	2	24.16	24.20	24.24		
	1	5	24.01	24.15	24.12		
	3	0	24.01	24.12	24.13	0-1	1
	3	2	24.03	24.16	24.15		
	3	3	23.99	24.09	23.90		
	6	0	22.87	22.85	22.88	0-2	2
64QAM	1	0	22.97	23.05	23.21	0-2	2
	1	2	23.19	23.10	23.14		
	1	5	22.95	23.04	23.05		
	3	0	23.12	23.20	22.99	0-2	2
	3	2	23.14	23.25	23.03		
	3	3	23.08	23.22	23.01		
	6	0	21.86	21.93	21.98	0-3	3

Table 9.3.5 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 13	Maximum	25.5
	Nominal	25.0

Table 9.3.6 Nominal and Maximum Output Power Spec

2) LTE Band 13

LTE Band 13 Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23230 (782.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	25.20	0	0
	1	25	25.31		
	1	49	25.23		
	25	0	23.98	0-1	1
	25	12	24.05		
	25	25	24.01		
16QAM	50	0	24.04	0-1	1
	1	0	24.02		
	1	25	24.31		
	1	49	24.07	0-2	2
	25	0	23.04		
	25	12	23.13		
64QAM	25	25	23.08	0-2	2
	50	0	23.11		
	1	0	23.15	0-2	2
	1	25	23.25		
	1	49	23.13		
	25	0	22.03	0-3	3
	25	12	22.12		
	25	25	22.04		
	50	0	22.10	0-3	3

Table 9.3.7 LTE Conducted Power

LTE Band 13 Conducted Power– 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23230 (782.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	24.97	0	0
	1	12	25.15		
	1	24	25.22		
	12	0	23.85	0-1	1
	12	6	23.84		
	12	13	23.81		
16QAM	25	0	23.84	0-1	1
	1	0	23.85		
	1	12	24.04		
	1	24	24.05	0-2	2
	12	0	22.85		
	12	6	22.84		
64QAM	12	13	22.88	0-2	2
	25	0	22.84		
	1	0	22.95	0-2	2
	1	12	22.97		
	1	24	23.14		
	12	0	21.90	0-3	3
	12	6	21.91		
	12	13	21.96		
	15	0	21.84	0-3	3

Table 9.3.8 LTE Conducted Power

Note : LTE B13 can not contain three non-overlapping channels of 5 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band & Mode		Modulated Average[dBm]
LTE Band 5	Maximum	25.5
	Nominal	25.0

Table 9.3.9 Nominal and Maximum Output Power Spec

3) LTE Band 5 (Cell)

LTE Band 5 (Cell) Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20525 (836.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	25.29	0	0
	1	25	25.17		
	1	49	25.02		
	25	0	24.04	0-1	1
	25	12	24.00		
	25	25	23.93		
16QAM	50	0	24.00	0-1	1
	1	0	24.24		
	1	25	24.05		
	1	49	23.91	0-2	2
	25	0	23.15		
	25	12	23.12		
64QAM	25	25	23.04	0-2	2
	50	0	23.09		
	1	0	23.16		
	1	25	23.10	0-3	3
	1	49	22.87		
	25	0	22.11		
	25	12	22.11	0-3	3
	25	25	22.03		
	50	0	22.08		

Table 9.3.10 LTE Conducted Power

Note : LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 5 (Cell) Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.04	25.16	25.17	0	0
	1	12	25.05	25.14	25.28		
	1	24	25.04	25.21	25.13		
	12	0	23.89	23.97	24.02	0-1	1
	12	6	23.99	23.93	24.05		
	12	13	23.95	23.94	24.01		
25	0	23.97	23.92	23.93	0-1	1	
16QAM	1	0	23.90	24.04	24.03	0-1	1
	1	12	23.95	24.03	24.14		
	1	24	23.94	24.03	23.94		
	12	0	22.94	23.07	23.10	0-2	2
	12	6	23.09	23.07	23.16		
	12	13	23.02	23.02	23.10		
25	0	23.05	23.05	23.02	0-2	2	
64QAM	1	0	22.88	23.15	23.13	0-2	2
	1	12	22.88	23.14	23.21		
	1	24	22.87	23.16	23.05		
	12	0	22.02	22.10	22.12	0-3	3
	12	6	22.15	22.12	22.20		
	12	13	22.06	22.06	22.14		
25	0	22.08	22.05	22.05	0-3	3	

Table 9.3.11 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.04	25.14	25.27	0	0
	1	7	24.96	25.08	24.85		
	1	14	24.96	25.02	24.83		
	8	0	23.83	23.91	23.99	0-1	1
	8	4	23.87	23.94	24.00		
	8	7	23.84	23.89	23.99		
	15	0	23.84	23.91	24.05	0-1	1
16QAM	1	0	23.92	23.96	24.12	0-1	1
	1	7	23.88	23.95	23.90		
	1	14	23.88	23.95	23.80		
	8	0	22.99	23.06	23.16	0-2	2
	8	4	23.03	23.09	23.17		
	8	7	22.95	23.04	23.12		
	15	0	22.99	23.04	23.11	0-2	2
64QAM	1	0	23.01	23.12	23.19	0-2	2
	1	7	22.82	23.05	22.85		
	1	14	22.89	22.83	22.82		
	8	0	22.00	22.07	22.15	0-3	3
	8	4	22.01	22.10	22.18		
	8	7	21.97	22.04	22.13		
	15	0	21.98	22.04	22.11	0-3	3

Table 9.3.12 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power~ 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.94	25.00	24.99	0	0
	1	2	25.00	25.07	24.81		
	1	5	24.91	24.97	24.88		
	3	0	24.95	25.01	24.91	0	0
	3	2	24.99	25.05	24.82		
	3	3	24.98	25.00	24.80		
	6	0	23.88	23.83	23.89	0-1	1
16QAM	1	0	23.81	23.93	24.02	0-1	1
	1	2	23.85	23.96	23.84		
	1	5	23.84	23.90	23.89		
	3	0	23.90	23.87	23.99	0-1	1
	3	2	23.85	23.90	23.82		
	3	3	23.81	23.85	23.87		
	6	0	22.93	22.93	23.08	0-2	2
64QAM	1	0	22.85	22.85	22.99	0-2	2
	1	2	22.83	22.89	23.00		
	1	5	22.83	22.83	22.80		
	3	0	22.87	22.99	22.95	0-2	2
	3	2	22.95	23.03	22.89		
	3	3	22.95	23.00	22.89		
	6	0	21.89	21.96	22.03	0-3	3

Table 9.3.13 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 4	Maximum	22.7
	Nominal	22.2

Table 9.3.14 Nominal and Maximum Output Power Spec

4) LTE Band 4

LTE Band 4 (AWS) Conducted Power– 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20175 (1732.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	22.41	0	0
	1	50	22.23		
	1	99	22.06		
	50	0	21.27	0-1	1
	50	25	21.19		
	50	50	21.11		
16QAM	100	0	21.16	0-1	1
	1	0	21.28		
	1	50	21.15		
	1	99	21.05	0-2	2
	50	0	20.38		
	50	25	20.28		
64QAM	50	50	20.23	0-2	2
	100	0	20.29		
	1	0	20.37		
	1	50	20.19	0-3	3
	1	99	20.03		
	50	0	19.39		
64QAM	50	25	19.38	0-3	3
	50	50	19.25		
	100	0	19.32		

Table 9.3.15 LTE Conducted Power

Note: LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 4 (AWS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.23	22.28	22.37	0	0
	1	36	22.02	22.20	22.21		
	1	74	22.10	22.19	22.12		
	36	0	21.03	21.22	21.13	0-1	1
	36	18	21.14	21.18	21.08		
	36	37	21.04	21.12	21.05		
16QAM	75	0	21.12	21.14	21.07	0-1	1
	1	0	21.14	21.18	21.22	0-1	1
	1	36	21.02	21.07	21.05		
	1	74	21.01	21.04	21.04		
	36	0	20.18	20.37	20.27	0-2	2
	36	18	20.19	20.26	20.18		
36	37	20.13	20.17	20.15			
64QAM	75	0	20.23	20.23	20.22	0-2	2
	1	0	20.15	20.26	20.31	0-2	2
	1	36	20.00	20.17	20.12		
	1	74	20.07	20.11	20.09		
	36	0	19.21	19.37	19.32	0-3	3
	36	18	19.28	19.35	19.27		
36	37	19.23	19.23	19.20			
	75	0	19.29	19.30	19.25	0-3	3

Table 9.3.16 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.11	22.22	22.28	0	0
	1	25	22.01	22.18	22.05		
	1	49	22.10	22.15	22.05		
	25	0	21.04	21.17	21.11	0-1	1
	25	12	21.01	21.16	21.03		
	25	25	21.07	21.05	21.08		
	50	0	21.10	21.10	21.02	0-1	1
16QAM	1	0	21.09	21.04	21.14	0-1	1
	1	25	21.07	21.02	21.04		
	1	49	21.00	21.02	21.03		
	25	0	20.13	20.30	20.19	0-2	2
	25	12	20.07	20.25	20.18		
	25	25	20.13	20.16	20.09		
	50	0	20.15	20.26	20.15	0-2	2
64QAM	1	0	20.11	20.16	20.28	0-2	2
	1	25	20.08	20.13	20.04		
	1	49	20.09	20.13	20.01		
	25	0	19.22	19.32	19.26	0-3	3
	25	12	19.20	19.33	19.22		
	25	25	19.25	19.23	19.16		
	50	0	19.28	19.28	19.21	0-3	3

Table 9.3.17 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.06	22.22	22.08	0	0
	1	12	22.07	22.24	22.09		
	1	24	22.01	22.17	22.09		
	12	0	21.04	21.13	21.00	0-1	1
	12	6	21.05	21.10	21.03		
	12	13	21.01	21.11	21.07		
	25	0	21.03	21.11	21.03	0-1	1
16QAM	1	0	21.04	21.09	21.08	0-1	1
	1	12	21.04	21.12	21.09		
	1	24	21.05	21.01	21.04		
	12	0	20.07	20.21	20.13	0-2	2
	12	6	20.07	20.24	20.08		
	12	13	20.00	20.16	20.11		
	25	0	20.06	20.19	20.10	0-2	2
64QAM	1	0	20.08	20.09	20.09	0-2	2
	1	12	20.10	20.24	20.12		
	1	24	20.08	20.11	20.03		
	12	0	19.12	19.28	19.18	0-3	3
	12	6	19.11	19.28	19.18		
	12	13	19.09	19.25	19.12		
	25	0	19.08	19.21	19.11	0-3	3

Table 9.3.18 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.09	22.15	22.07	0	0
	1	7	22.07	22.16	22.01		
	1	14	22.07	22.13	22.04		
	8	0	21.01	21.10	21.07	0-1	1
	8	4	21.06	21.11	21.01		
	8	7	21.02	21.06	21.07		
	15	0	21.06	21.07	21.09	0-1	1
16QAM	1	0	21.08	21.01	21.03	0-1	1
	1	7	21.00	21.04	21.01		
	1	14	21.05	21.19	21.06		
	8	0	20.11	20.21	20.12	0-2	2
	8	4	20.10	20.26	20.16		
	8	7	20.07	20.22	20.08		
	15	0	20.07	20.21	20.09	0-2	2
64QAM	1	0	20.07	20.24	20.10	0-2	2
	1	7	20.04	20.15	20.06		
	1	14	20.00	20.18	20.04		
	8	0	19.10	19.27	19.13	0-3	3
	8	4	19.12	19.20	19.18		
	8	7	19.11	19.23	19.12		
	15	0	19.11	19.25	19.12	0-3	3

Table 9.3.19 LTE Conducted Power

TE Band 4 (AWS) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.00	22.18	22.06	0	0
	1	2	22.09	22.26	22.12		
	1	5	22.02	22.19	22.05		
	3	0	22.06	22.18	22.09	0	0
	3	2	22.09	22.23	22.13		
	3	3	22.03	22.20	22.06		
	6	0	21.07	21.01	21.00	0-1	1
16QAM	1	0	21.09	21.07	21.04	0-1	1
	1	2	21.06	21.14	21.11		
	1	5	21.09	21.06	21.08		
	3	0	21.09	21.02	21.03	0-1	1
	3	2	21.02	21.09	21.06		
	3	3	21.08	21.03	21.09		
	6	0	20.08	20.09	20.07	0-2	2
64QAM	1	0	20.10	20.21	20.09	0-2	2
	1	2	20.15	20.30	20.17		
	1	5	20.03	20.23	20.11		
	3	0	20.07	20.24	20.08	0-2	2
	3	2	20.09	20.25	20.11		
	3	3	20.08	20.22	20.08		
	6	0	19.05	19.07	19.06	0-3	3

Table 9.3.20 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 2(PCS)	Maximum	22.7
	Nominal	22.2

Table 9.3.21 Nominal and Maximum Output Power Spec

5) LTE Band 2 (PCS)

LTE Band 2 (PCS) Conducted Power-- 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.25	22.03	22.02	0	0
	1	50	22.03	22.06	22.01		
	1	99	22.03	22.01	22.04		
	50	0	21.24	21.07	21.03	0-1	1
	50	25	21.13	21.06	21.05		
	50	50	21.10	21.02	21.01		
	100	0	21.18	21.07	21.02	0-1	1
16QAM	1	0	21.45	21.05	21.18	0-1	1
	1	50	21.18	21.08	21.00		
	1	99	21.19	21.01	21.04		
	50	0	20.30	20.12	20.06	0-2	2
	50	25	20.24	20.04	20.07		
	50	50	20.18	20.00	20.07		
	100	0	20.24	20.08	20.03	0-2	2
64QAM	1	0	20.38	20.06	20.18	0-2	2
	1	50	20.19	20.10	20.00		
	1	99	20.22	20.07	20.00		
	50	0	19.34	19.16	19.05	0-3	3
	50	25	19.23	19.10	19.01		
	50	50	19.18	19.09	19.08		
	100	0	19.26	19.05	19.06	0-3	3

Table 9.3.22 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.02	22.01	22.24	0	0
	1	36	22.06	22.06	22.14		
	1	74	22.00	22.03	22.14		
	36	0	21.02	21.01	21.24	0-1	1
	36	18	21.06	21.07	21.22		
	36	37	21.08	21.08	21.17		
	75	0	21.07	21.08	21.22	0-1	1
16QAM	1	0	21.13	21.13	21.43	0-1	1
	1	36	21.13	21.08	21.33		
	1	74	21.01	21.05	21.26		
	36	0	20.03	20.11	20.32	0-2	2
	36	18	20.05	20.14	20.25		
	36	37	20.09	20.18	20.24		
	75	0	20.04	20.16	20.27	0-2	2
64QAM	1	0	20.17	20.02	20.36	0-2	2
	1	36	20.09	20.01	20.27		
	1	74	20.09	20.01	20.33		
	36	0	19.05	19.14	19.36	0-3	3
	36	18	19.07	19.09	19.33		
	36	37	19.09	19.00	19.28		
	75	0	19.05	19.04	19.29	0-3	3

Table 9.3.23 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.07	22.03	22.24	0	0
	1	25	22.05	22.04	22.12		
	1	49	22.01	22.08	22.12		
	25	0	21.06	21.14	21.22	0-1	1
	25	12	21.04	21.14	21.18		
	25	25	21.09	21.07	21.13		
	50	0	21.01	21.11	21.15	0-1	1
16QAM	1	0	21.19	21.03	21.34	0-1	1
	1	25	21.11	21.02	21.28		
	1	49	21.11	21.02	21.23		
	25	0	20.15	20.09	20.27	0-2	2
	25	12	20.11	20.06	20.23		
	25	25	20.04	20.08	20.25		
	50	0	20.10	20.04	20.25	0-2	2
64QAM	1	0	20.26	20.00	20.43	0-2	2
	1	25	20.10	20.00	20.25		
	1	49	20.04	20.02	20.31		
	25	0	19.13	19.09	19.28	0-3	3
	25	12	19.12	19.06	19.26		
	25	25	19.05	19.01	19.22		
	50	0	19.09	19.04	19.26	0-3	3

Table 9.3.24 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.03	22.09	22.20	0	0
	1	12	22.02	22.10	22.17		
	1	24	22.03	22.01	22.13		
	12	0	21.01	21.11	21.14	0-1	1
	12	6	21.01	21.11	21.15		
	12	13	21.05	21.08	21.14		
	25	0	21.07	21.10	21.16	0-1	1
16QAM	1	0	21.21	21.03	21.38	0-1	1
	1	12	21.17	21.11	21.31		
	1	24	21.18	21.02	21.21		
	12	0	20.09	20.05	20.26	0-2	2
	12	6	20.08	20.02	20.26		
	12	13	20.08	20.01	20.19		
	25	0	20.07	20.03	20.22	0-2	2
64QAM	1	0	20.17	20.03	20.38	0-2	2
	1	12	20.21	20.14	20.36		
	1	24	20.12	20.09	20.30		
	12	0	19.12	19.04	19.26	0-3	3
	12	6	19.13	19.06	19.26		
	12	13	19.06	19.01	19.23		
	25	0	19.06	19.02	19.24	0-3	3

Table 9.3.25 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.06	22.03	22.12	0	0
	1	7	22.05	22.03	22.08		
	1	14	22.02	22.00	22.08		
	8	0	21.08	21.04	21.11	0-1	1
	8	4	21.10	21.06	21.12		
	8	7	21.08	21.02	21.10		
	15	0	21.07	21.07	21.14	0-1	1
16QAM	1	0	21.06	21.03	21.21	0-1	1
	1	7	21.09	21.09	21.26		
	1	14	21.07	21.10	21.26		
	8	0	20.11	20.18	20.23	0-2	2
	8	4	20.12	20.19	20.28		
	8	7	20.07	20.15	20.23		
	15	0	20.06	20.16	20.22	0-2	2
64QAM	1	0	20.15	20.05	20.31	0-2	2
	1	7	20.12	20.06	20.24		
	1	14	20.10	20.02	20.26		
	8	0	19.08	19.03	19.22	0-3	3
	8	4	19.11	19.06	19.26		
	8	7	19.08	19.01	19.20		
	15	0	19.08	19.00	19.20	0-3	3

Table 9.3.26 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.03	22.07	22.03	0	0
	1	2	22.08	22.03	22.10		
	1	5	22.01	22.03	22.09		
	3	0	22.08	22.08	22.07	0	0
	3	2	22.11	22.06	22.10		
	3	3	22.08	22.09	22.06		
	6	0	21.06	21.09	21.06	0-1	1
16QAM	1	0	21.07	21.08	21.14	0-1	1
	1	2	21.07	21.14	21.22		
	1	5	21.08	21.05	21.10		
	3	0	21.00	21.11	21.15	0-1	1
	3	2	21.03	21.12	21.18		
	3	3	21.09	21.09	21.13		
	6	0	20.08	20.15	20.21	0-2	2
64QAM	1	0	20.02	20.05	20.18	0-2	2
	1	2	20.06	20.00	20.11		
	1	5	20.02	20.05	20.15		
	3	0	20.03	20.04	20.25	0-2	2
	3	2	20.11	20.08	20.20		
	3	3	20.11	20.02	20.23		
	6	0	19.02	19.02	19.14	0-3	3

Table 9.3.27 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 41	Maximum	24.2
	Nominal	23.7

Table 9.3.28 Nominal and Maximum Output Power Spec

6) LTE Band 41

LTE Band 41 Conducted Power– 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	23.74	23.61	23.63	23.64	23.59	0	0
	1	50	23.55	23.58	23.51	23.54	23.53		
	1	99	23.58	23.58	23.55	23.56	23.55		
	50	0	22.64	22.57	22.58	22.56	22.57	0-1	1
	50	25	22.63	22.56	22.53	22.52	22.58		
	50	50	22.53	22.51	22.59	22.51	22.57		
100	0	22.59	22.58	22.58	22.58	22.58	0-1	1	
16QAM	1	0	22.86	22.59	22.74	22.71	22.77	0-1	1
	1	50	22.72	22.56	22.64	22.53	22.56		
	1	99	22.68	22.56	22.63	22.59	22.54		
	50	0	21.77	21.56	21.71	21.59	21.56	0-2	2
	50	25	21.67	21.53	21.67	21.59	21.52		
	50	50	21.62	21.60	21.61	21.57	21.55		
100	0	21.65	21.57	21.62	21.56	21.52	0-2	2	
64QAM	1	0	21.84	21.55	21.78	21.66	21.70	0-2	2
	1	50	21.66	21.54	21.57	21.53	21.51		
	1	99	21.63	21.57	21.63	21.58	21.59		
	50	0	20.73	20.57	20.67	20.59	20.57	0-3	3
	50	25	20.67	20.54	20.63	20.59	20.56		
	50	50	20.62	20.57	20.59	20.50	20.52		
100	0	20.64	20.59	20.67	20.56	20.55	0-3	3	

Table 9.3.29 LTE Conducted Power

LTE Band 41 Conducted Power– 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39725 (2503.5 MHz)	40173 (2548.3 MHz)	40620 (2593.0 MHz)	41068 (2637.8 MHz)	41515 (2682.5 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	23.66	23.60	23.63	23.54	23.54	0	0
	1	36	23.51	23.60	23.54	23.58	23.50		
	1	74	23.50	23.51	23.53	23.60	23.59		
	36	0	22.63	22.51	22.62	22.57	22.58	0-1	1
	36	18	22.59	22.52	22.57	22.51	22.53		
	36	37	22.55	22.52	22.51	22.56	22.59		
	75	0	22.57	22.56	22.53	22.57	22.54	0-1	1
16QAM	1	0	22.84	22.54	22.81	22.59	22.69	0-1	1
	1	36	22.69	22.58	22.68	22.66	22.54		
	1	74	22.62	22.51	22.61	22.51	22.58		
	36	0	21.63	21.57	21.63	21.60	21.59	0-2	2
	36	18	21.60	21.52	21.60	21.58	21.55		
	36	37	21.57	21.60	21.50	21.60	21.57		
	75	0	21.60	21.57	21.60	21.57	21.51	0-2	2
64QAM	1	0	21.77	21.59	21.77	21.62	21.66	0-2	2
	1	36	21.63	21.60	21.61	21.59	21.55		
	1	74	21.61	21.52	21.65	21.53	21.52		
	36	0	20.68	20.51	20.64	20.60	20.55	0-3	3
	36	18	20.65	20.51	20.60	20.60	20.53		
	36	37	20.59	20.60	20.52	20.57	20.56		
	75	0	20.59	20.57	20.62	20.57	20.54	0-3	3

Table 9.3.30 LTE Conducted Power

LTE Band 41 Conducted Power– 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39700 (2501.0 MHz)	40160 (2547.0 MHz)	40620 (2593.0 MHz)	41080 (2639.0 MHz)	41540 (2685.0 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	23.59	23.59	23.59	23.60	23.50	0	0
	1	25	23.59	23.60	23.50	23.60	23.50		
	1	49	23.58	23.57	23.54	23.58	23.56		
	25	0	22.62	22.52	22.58	22.60	22.54	0-1	1
	25	12	22.56	22.51	22.56	22.54	22.50		
	25	25	22.54	22.56	22.51	22.59	22.57		
	50	0	22.55	22.51	22.57	22.54	22.54	0-1	1
16QAM	1	0	22.77	22.57	22.74	22.68	22.66	0-1	1
	1	25	22.69	22.61	22.69	22.64	22.52		
	1	49	22.64	22.66	22.63	22.64	22.53		
	25	0	21.67	21.53	21.67	21.59	21.53	0-2	2
	25	12	21.66	21.52	21.66	21.53	21.56		
	25	25	21.65	21.55	21.63	21.58	21.57		
	50	0	21.67	21.57	21.63	21.59	21.59	0-2	2
64QAM	1	0	21.70	21.57	21.72	21.58	21.61	0-2	2
	1	25	21.66	21.58	21.67	21.57	21.50		
	1	49	21.59	21.53	21.57	21.58	21.51		
	25	0	20.73	20.59	20.69	20.64	20.55	0-3	3
	25	12	20.72	20.54	20.67	20.56	20.57		
	25	25	20.64	20.63	20.65	20.55	20.50		
	50	0	20.64	20.52	20.64	20.55	20.51	0-3	3

Table 9.3.31 LTE Conducted Power

LTE Band 41 Conducted Power– 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39675 (2498.5 MHz)	40148 (2545.8 MHz)	40620 (2593.0 MHz)	41093 (2640.3 MHz)	41565 (2687.5 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	23.55	23.56	23.51	23.63	23.57	0	0
	1	12	23.58	23.57	23.57	23.56	23.54		
	1	24	23.57	23.60	23.54	23.59	23.50		
	12	0	22.52	22.57	22.53	22.52	22.59	0-1	1
	12	6	22.58	22.51	22.54	22.58	22.56		
	12	13	22.55	22.57	22.57	22.52	22.54		
	25	0	22.55	22.56	22.50	22.58	22.51	0-1	1
16QAM	1	0	22.71	22.60	22.67	22.66	22.55	0-1	1
	1	12	22.75	22.62	22.75	22.72	22.59		
	1	24	22.63	22.51	22.60	22.60	22.57		
	12	0	21.69	21.57	21.64	21.54	21.50	0-2	2
	12	6	21.69	21.51	21.65	21.52	21.50		
	12	13	21.65	21.59	21.62	21.57	21.55		
	25	0	21.68	21.57	21.65	21.59	21.55	0-2	2
64QAM	1	0	21.69	21.58	21.64	21.65	21.55	0-2	2
	1	12	21.75	21.60	21.67	21.54	21.58		
	1	24	21.64	21.60	21.58	21.57	21.58		
	12	0	20.64	20.57	20.67	20.54	20.54	0-3	3
	12	6	20.65	20.56	20.65	20.58	20.56		
	12	13	20.66	20.59	20.60	20.57	20.57		
	25	0	20.66	20.57	20.62	20.51	20.51	0-3	3

Table 9.3.32 LTE Conducted Power

9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
2.4	802.11b	1~10	16.5	15.5	16.5	15.5	-	-
		11	16.5	15.5	16.5	15.5	-	-
		12~13	2.0	1.0	2.0	1.0	-	-
	802.11g	1~10	16.5	15.5	16.5	15.5	19.5	18.5
		11	13.5	12.5	13.5	12.5	16.5	15.5
		12~13	2.0	1.0	2.0	1.0	5.0	4.0
	802.11n	1~10	15.5	14.5	15.5	14.5	18.5	17.5
		11	13.5	12.5	13.5	12.5	16.5	15.5
		12~13	2.0	1.0	2.0	1.0	5.0	4.0
	802.11ac	1~10	15.5	14.5	15.5	14.5	18.5	17.5
		11	13.5	12.5	13.5	12.5	16.5	15.5
		12~13	2.0	1.0	2.0	1.0	5.0	4.0

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq.	Channel	IEEE 802.11 (2.4 GHz) Conducted Power[dBm]			
	(MHz)		Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11b	2412	1	16.26	16.16	-	-
	2437	6	16.21	16.24	-	-
	2462	11	16.25	16.28	-	-
	2467	12	1.65	1.47	-	-
	2472	13	1.78	1.53	-	-
802.11g	2412	1	16.04	15.83	18.95	-
	2437	6	15.77	16.01	18.52	-
	2462	11	12.60	12.84	15.73	-
	2467	12	1.19	1.25	4.23	-
	2472	13	1.47	1.09	4.29	-
802.11n (HT-20)	2412	1	14.96	14.45	17.72	17.86
	2437	6	14.75	14.61	17.69	17.84
	2462	11	12.44	12.63	15.55	15.66
	2467	12	0.87	0.95	3.92	3.71
	2472	13	1.34	1.01	4.19	3.91
802.11ac (VHT-20)	2412	1	14.55	14.71	17.64	17.54
	2437	6	14.30	14.89	17.62	17.67
	2462	11	12.42	12.67	15.56	15.35
	2467	12	0.46	0.86	3.67	3.82
	2472	13	0.83	1.07	3.96	3.93

Table 9.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
5 (UNII)	802.11a	36, 40	15.0	14.0	15.0	14.0	18.0	17.0
		44-48						
		52, 56						
		60, 64						
		100						
		104-140						
		144						
		149-153	12.0	11.0	12.0	11.0	15.0	14.0
		157, 161, 165						
	802.11n/ac (20MHz)	36, 40	15.0	14.0	15.0	14.0	18.0	17.0
		44-48						
		52, 56						
		60, 64						
		100						
		104-140						
		144						
		149-153	12.0	11.0	12.0	11.0	15.0	14.0
		157, 161, 165						
	802.11n/ac (40MHz)	38	14.8	13.8	14.8	13.8	17.8	16.8
		46						
		54						
		62						
		102						
		110						
		118						
		126						
		134						
		142						
		151	11.8	10.8	11.8	10.8	14.8	13.8
		159						
	802.11ac (80MHz)	42	12.0	11.0	12.0	11.0	15.0	14.0
		58						
		106						
		122						
		138						
		155	11.8	10.8	11.8	10.8	14.8	13.8

Table 9.4.3 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11a	5180	36	14.77	14.81	17.80	-
	5200	40	14.82	14.85	17.85	-
	5220	44	14.79	14.90	17.86	-
	5240	48	14.57	14.80	17.70	-
	5260	52	14.63	14.77	17.71	-
	5280	56	14.60	14.83	17.73	-
	5300	60	14.52	14.71	17.63	-
	5320	64	14.42	14.82	17.63	-
	5500	100	14.61	14.91	17.77	-
	5600	120	14.63	14.84	17.75	-
	5660	132	14.75	14.93	17.85	-
	5720	144	14.43	14.89	17.68	-
	5745	149	11.34	11.66	14.51	-
	5785	157	11.47	11.73	14.61	-
	5825	165	11.46	11.66	14.57	-

Table 9.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11n (HT-20)	5180	36	14.91	14.67	17.80	17.90
	5200	40	14.95	14.55	17.76	17.84
	5220	44	14.99	14.72	17.87	17.94
	5240	48	14.81	14.60	17.72	17.91
	5260	52	14.96	14.63	17.81	17.85
	5280	56	14.89	14.47	17.70	17.83
	5300	60	14.84	14.65	17.76	17.88
	5320	64	14.78	14.56	17.68	17.86
	5500	100	14.76	14.80	17.79	17.81
	5600	120	14.51	14.86	17.70	17.70
	5660	132	14.69	14.78	17.75	17.93
	5720	144	14.59	14.53	17.57	17.75
	5745	149	11.24	11.49	14.38	14.50
	5785	157	11.52	11.56	14.55	14.59
	5825	165	11.35	11.31	14.34	14.57

Table 9.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-20)	5180	36	14.95	14.66	17.82	17.82
	5200	40	14.92	14.70	17.82	17.80
	5220	44	14.97	14.64	17.82	17.87
	5240	48	14.77	14.72	17.76	17.87
	5260	52	14.94	14.69	17.83	17.85
	5280	56	14.84	14.64	17.75	17.82
	5300	60	14.86	14.69	17.79	17.82
	5320	64	14.85	14.78	17.83	17.82
	5500	100	14.79	14.96	17.89	17.85
	5600	120	14.29	14.88	17.61	17.74
	5660	132	14.67	14.77	17.73	17.76
	5720	144	14.56	14.88	17.73	17.61
	5745	149	11.29	11.54	14.43	14.47
	5785	157	11.59	11.67	14.64	14.50
	5825	165	11.30	11.48	14.40	14.39

Table 9.4.6 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11n (HT-40)	5190	38	14.38	14.52	17.46	17.43
	5230	46	14.11	14.48	17.31	17.38
	5270	54	14.06	14.58	17.34	17.39
	5310	62	14.06	14.48	17.29	17.30
	5510	102	14.50	14.70	17.61	17.56
	5590	118	14.37	14.72	17.56	17.51
	5670	134	14.20	14.78	17.51	17.63
	5710	142	14.33	14.66	17.51	17.44
	5755	151	11.53	11.73	14.64	14.79
	5795	159	11.67	11.74	14.72	14.71

Table 9.4.7 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-40)	5190	38	14.23	14.48	17.37	17.39
	5230	46	14.26	14.58	17.43	17.47
	5270	54	14.22	14.55	17.40	17.34
	5310	62	14.05	14.43	17.25	17.27
	5510	102	14.43	14.78	17.62	17.60
	5590	118	14.42	14.79	17.62	17.52
	5670	134	14.36	14.77	17.58	17.57
	5710	142	14.08	14.50	17.31	17.44
	5755	151	11.60	11.79	14.71	14.69
	5795	159	11.52	11.74	14.64	14.75

Table 9.4.8 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-80)	5210	42	11.37	11.60	14.50	14.31
	5290	58	10.94	11.42	14.20	14.60
	5530	106	10.87	11.52	14.22	14.26
	5610	122	11.02	11.59	14.32	14.19
	5690	138	11.24	11.54	14.40	14.24
	5775	155	11.18	11.50	14.35	14.23

Table 9.4.9 IEEE 802.11ac VHT80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

9.5 Bluetooth Conducted Powers

Burst Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	13.0
	Nominal	12.0
Bluetooth 2 Mbps	Maximum	12.5
	Nominal	11.5
Bluetooth 3 Mbps	Maximum	12.5
	Nominal	11.5
Bluetooth LE	Maximum	8.5
	Nominal	7.5

Table 9.5.1 Nominal and Maximum Output Power Spec (Burst)

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	11.85
	Nominal	10.85
Bluetooth 2 Mbps	Maximum	11.35
	Nominal	10.35
Bluetooth 3 Mbps	Maximum	11.35
	Nominal	10.35
Bluetooth (LE / 1Mbps)	Maximum	7.81
	Nominal	6.81
Bluetooth (LE / 2Mbps)	Maximum	6.09
	Nominal	5.09

Table 9.5.2 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency (MHz)	Burst AVG Output Power (1Mbps) (dBm)	Frame AVG Output Power (1Mbps) (dBm)	Burst AVG Output Power (2Mbps) (dBm)	Frame AVG Output Power (2Mbps) (dBm)	Burst AVG Output Power (3Mbps) (dBm)	Frame AVG Output Power (3Mbps) (dBm)
Low	2402	11.11	9.96	10.53	9.38	10.56	9.41
Mid	2441	11.46	10.31	10.88	9.73	10.90	9.75
High	2480	11.98	10.83	11.39	10.24	11.41	10.26

Table 9.5.3 Bluetooth Burst and Frame Average RF Power

Channel	Frequency (MHz)	Burst AVG Output Power(LE / 1Mbps) (dBm)	Frame AVG Output Power(LE / 1Mbps) (dBm)	Burst AVG Output Power(LE / 2Mbps) (dBm)	Frame AVG Output Power(LE / 2Mbps) (dBm)
Low	2402	7.42	6.73	7.41	5.00
Mid	2440	7.85	7.16	7.82	5.41
High	2480	8.06	7.37	8.02	5.61

Table 9.5.4 Bluetooth LE Burst and Frame Average RF Power

Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

- 1) Enter DUT mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 9.5.1(A).
- 3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.
- 4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

- 1) Enter LE mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 9.5.1(B).
- 3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.
- 4) Power levels were measured by a Power Meter.

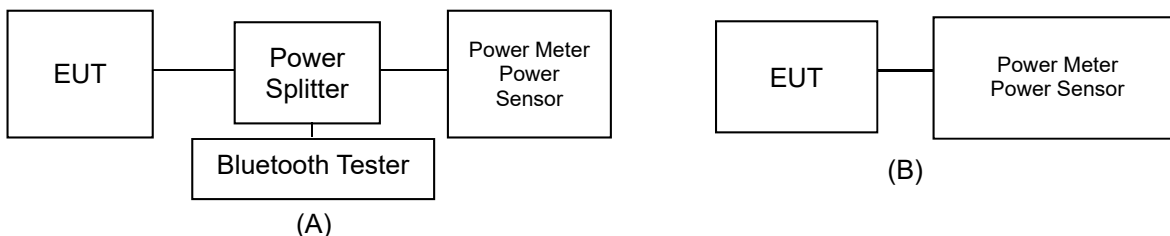


Figure 9.5.1 Average Power Measurement Setup

- Bluetooth Transmission Plot

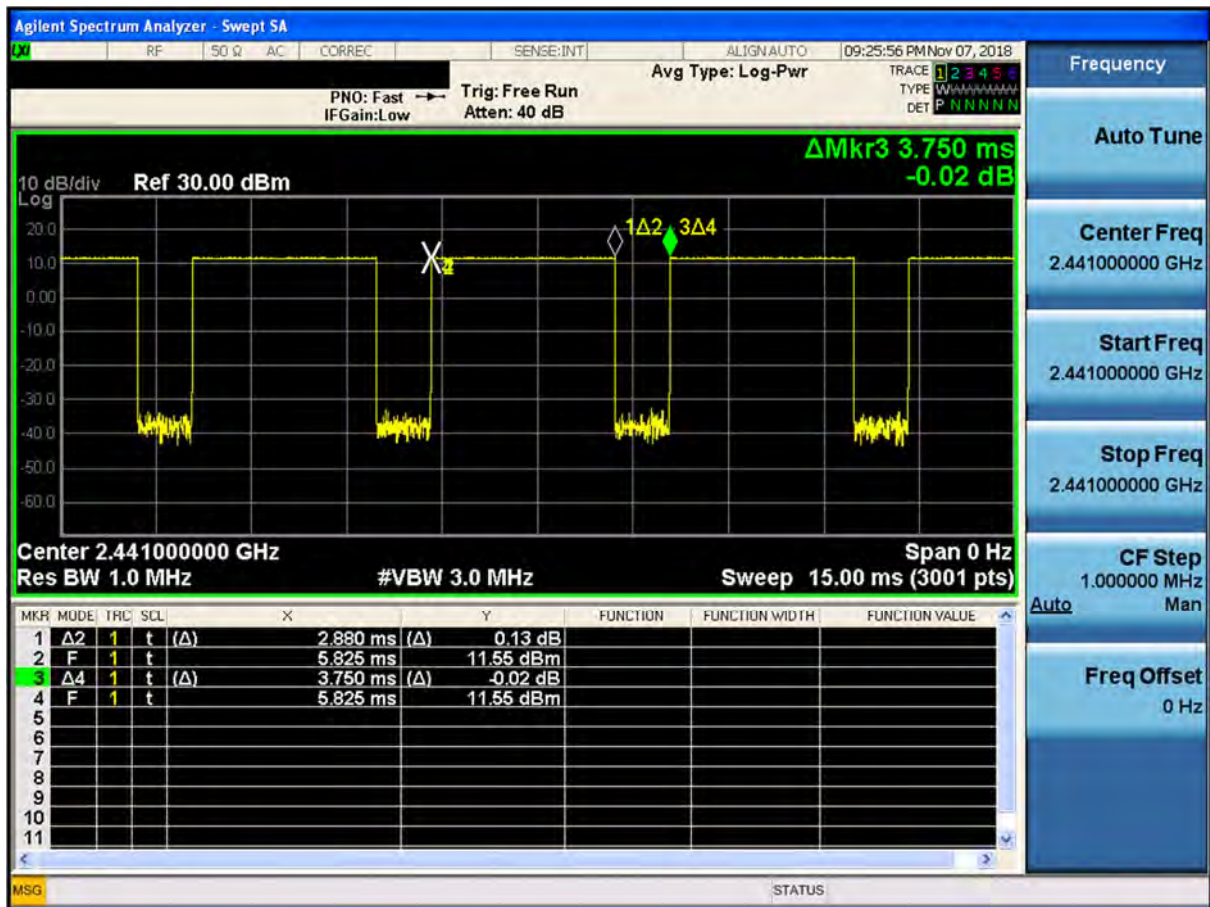


Figure 9.5.2 Bluetooth Transmission Plot

- Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

10. SYSTEM VERIFICATION

10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Nov. 17. 2018	750 Head	21.0	22.0	707.5	42.129	0.887	42.958	0.883	1.97	-0.45
				750.0	41.900	0.890	42.378	0.916	1.14	2.92
Nov. 17. 2018	750 Body	21.0	21.9	707.5	55.699	0.960	57.617	0.935	3.44	-2.60
				750.0	55.531	0.963	57.210	0.974	3.02	1.14
Nov. 19. 2018	750 Head	21.1	22.1	750.0	41.900	0.890	42.096	0.892	0.47	0.22
				782.0	41.749	0.894	41.714	0.922	-0.08	3.13
Nov. 19. 2018	750 Body	21.1	21.9	750.0	55.531	0.963	55.136	0.932	-0.71	-3.22
				782.0	55.406	0.966	54.793	0.962	-1.11	-0.41
Nov. 07. 2018	835 Head	21.8	22.5	824.2	41.552	0.899	42.384	0.905	2.00	0.67
				835.0	41.500	0.900	42.283	0.914	1.89	1.56
				836.6	41.500	0.901	42.268	0.915	1.85	1.55
				848.8	41.500	0.914	42.154	0.925	1.58	1.20
Nov. 07. 2018	835 Body	21.8	22.3	824.2	55.243	0.969	53.503	0.967	-3.15	-0.21
				835.0	55.200	0.970	53.374	0.977	-3.31	0.72
				836.6	55.197	0.971	53.356	0.979	-3.34	0.82
				848.8	55.160	0.986	53.244	0.990	-3.47	0.41
Nov. 14. 2018	835 Head	21.2	22.2	826.4	41.542	0.899	42.475	0.908	2.25	1.00
				835.0	41.500	0.900	42.401	0.915	2.17	1.67
				836.6	41.500	0.901	42.390	0.916	2.14	1.66
				846.6	41.500	0.912	42.299	0.924	1.93	1.32
Nov. 14. 2018	835 Body	21.2	22.1	826.4	55.235	0.969	53.755	0.970	-2.68	0.10
				835.0	55.200	0.970	53.649	0.979	-2.81	0.93
				836.6	55.197	0.971	53.634	0.980	-2.83	0.93
				846.6	55.166	0.984	53.528	0.990	-2.97	0.61
Nov. 15. 2018	835 Head	20.9	21.8	829.0	41.528	0.899	42.502	0.911	2.35	1.33
				835.0	41.500	0.900	42.441	0.916	2.27	1.78
				836.5	41.500	0.901	42.429	0.917	2.24	1.78
				844.0	41.500	0.910	42.356	0.923	2.06	1.43
Nov. 15. 2018	835 Body	20.9	21.7	829.0	55.223	0.970	53.834	0.974	-2.52	0.41
				835.0	55.200	0.970	53.769	0.979	-2.59	0.93
				836.5	55.197	0.971	53.754	0.981	-2.61	1.03
				844.0	55.172	0.981	53.667	0.988	-2.73	0.71
Nov. 12. 2018	1800 Head	21.4	22.3	1712.4	40.126	1.350	39.686	1.302	-1.10	-3.56
				1732.4	40.097	1.361	39.654	1.320	-1.10	-3.01
				1752.6	40.069	1.373	39.611	1.338	-1.14	-2.55
				1800.0	40.000	1.400	39.475	1.377	-1.31	-1.64
Nov. 12. 2018	1800 Body	21.4	22.2	1712.4	53.596	1.464	54.567	1.447	1.81	-1.16
				1732.4	53.556	1.477	54.513	1.466	1.79	-0.74
				1752.6	53.516	1.489	54.454	1.486	1.75	-0.20
				1800.0	53.300	1.520	54.323	1.529	1.92	0.59
Nov. 16. 2018	1800 Head	21.7	22.4	1720.0	40.114	1.354	40.539	1.298	1.06	-4.14
				1732.5	40.097	1.361	40.485	1.311	0.97	-3.67
				1745.0	40.079	1.369	40.441	1.322	0.90	-3.43
				1800.0	40.000	1.400	40.264	1.375	0.66	-1.79
Nov. 16. 2018	1800 Body	21.7	22.2	1720.0	53.580	1.469	54.233	1.465	1.22	-0.27
				1732.5	53.556	1.477	54.206	1.476	1.21	-0.07
				1745.0	53.530	1.485	54.171	1.489	1.20	0.27
				1800.0	53.300	1.520	54.023	1.542	1.36	1.45

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Nov. 08. 2018	1900 Head	21.4	22.2	1850.2	40.000	1.400	40.275	1.349	0.69	-3.64
				1880.0	40.000	1.400	40.212	1.376	0.53	-1.71
				1900.0	40.000	1.400	40.138	1.394	0.34	-0.43
				1909.8	40.000	1.400	40.105	1.404	0.26	0.29
Nov. 08. 2018	1900 Body	21.4	22.3	1850.2	53.300	1.520	52.713	1.479	-1.10	-2.70
				1880.0	53.300	1.520	52.630	1.507	-1.26	-0.86
				1900.0	53.300	1.520	52.562	1.525	-1.38	0.33
				1909.8	53.300	1.520	52.535	1.534	-1.44	0.92
Nov. 09. 2018	1900 Head	21.6	22.4	1852.4	40.000	1.400	40.742	1.351	1.85	-3.50
				1880.0	40.000	1.400	40.661	1.379	1.65	-1.50
				1900.0	40.000	1.400	40.581	1.397	1.45	-0.21
				1907.6	40.000	1.400	40.550	1.405	1.37	0.36
Nov. 09. 2018	1900 Body	21.6	22.2	1852.4	53.300	1.520	53.199	1.489	-0.19	-2.04
				1880.0	53.300	1.520	53.136	1.506	-0.31	-0.92
				1900.0	53.300	1.520	53.077	1.524	-0.42	0.26
				1907.6	53.300	1.520	53.058	1.531	-0.45	0.72
Nov. 13. 2018	1900 Head	20.8	21.7	1860.0	40.000	1.400	40.829	1.348	2.07	-3.71
				1880.0	40.000	1.400	40.755	1.366	1.89	-2.43
				1900.0	40.000	1.400	40.686	1.386	1.72	-1.00
Nov. 13. 2018	1900 Body	20.8	21.9	1860.0	53.300	1.520	52.690	1.466	-1.14	-3.55
				1880.0	53.300	1.520	52.639	1.484	-1.24	-2.37
				1900.0	53.300	1.520	52.590	1.503	-1.33	-1.12
Nov. 15. 2018	2450 Head	21.6	21.5	2402.0	39.282	1.757	38.972	1.743	-0.79	-0.80
				2412.0	39.265	1.766	38.938	1.753	-0.83	-0.74
				2437.0	39.222	1.788	38.859	1.781	-0.93	-0.39
				2441.0	39.215	1.792	38.844	1.785	-0.95	-0.39
				2450.0	39.200	1.800	38.813	1.795	-0.99	-0.28
				2462.0	39.184	1.813	38.780	1.808	-1.03	-0.28
				2467.0	39.177	1.818	38.766	1.814	-1.05	-0.22
				2472.0	39.171	1.823	38.750	1.819	-1.07	-0.22
Nov. 13. 2018	2450 Body	22.3	22.1	2480.0	39.160	1.832	38.723	1.828	-1.12	-0.22
				2402.0	52.764	1.904	51.369	1.910	-2.64	0.32
				2412.0	52.751	1.914	51.344	1.921	-2.67	0.37
				2437.0	52.717	1.938	51.280	1.951	-2.73	0.67
				2441.0	52.712	1.941	52.382	1.966	-0.63	1.29
				2450.0	52.700	1.950	51.239	1.967	-2.77	0.87
				2462.0	52.685	1.967	51.212	1.981	-2.80	0.71
				2467.0	52.678	1.974	51.199	1.987	-2.81	0.66
				2472.0	52.672	1.981	51.185	1.992	-2.82	0.56
				2480.0	52.662	1.993	51.161	2.001	-2.85	0.40

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Nov. 20. 2018	2600 Head	21.2	22.4	2506.0	39.125	1.860	40.106	1.879	2.51	1.02
				2549.5	39.068	1.906	39.962	1.929	2.29	1.21
				2593.0	39.009	1.953	39.815	1.977	2.07	1.23
				2600.0	39.000	1.960	39.787	1.985	2.02	1.28
				2636.5	38.955	2.000	39.646	2.025	1.77	1.25
				2680.0	38.900	2.048	39.482	2.073	1.50	1.22
Nov. 20. 2018	2600 Body	21.2	22.2	2506.0	52.629	2.029	50.900	1.990	-3.29	-1.92
				2549.5	52.574	2.090	50.794	2.044	-3.39	-2.20
				2593.0	52.518	2.153	50.685	2.095	-3.49	-2.69
				2600.0	52.509	2.163	50.666	2.104	-3.51	-2.73
				2636.5	52.463	2.214	50.562	2.149	-3.62	-2.94
				2680.0	52.407	2.276	50.449	2.202	-3.74	-3.25
Nov. 20. 2018	5200 Body	20.5	20.9	5180.0	49.041	5.276	48.410	5.449	-1.29	3.28
				5190.0	49.028	5.288	48.365	5.460	-1.35	3.25
				5200.0	49.014	5.299	48.317	5.473	-1.42	3.28
				5210.0	49.001	5.311	48.272	5.487	-1.49	3.31
				5220.0	48.987	5.323	48.237	5.503	-1.53	3.38
				5230.0	48.974	5.334	48.199	5.515	-1.58	3.39
Nov. 16. 2018	5300 Head	20.6	20.8	5240.0	48.960	5.346	48.160	5.528	-1.63	3.40
				5260.0	35.940	4.720	35.594	4.727	-0.96	0.15
				5270.0	35.930	4.730	35.564	4.740	-1.02	0.21
				5280.0	35.920	4.740	35.547	4.752	-1.04	0.25
				5290.0	35.910	4.750	35.536	4.760	-1.04	0.21
				5300.0	35.900	4.760	35.510	4.766	-1.09	0.13
Nov. 19. 2018	5300 Body	20.3	20.6	5310.0	35.890	4.770	35.477	4.776	-1.15	0.13
				5320.0	35.880	4.780	35.451	4.786	-1.20	0.13
				5260.0	48.933	5.369	47.858	5.534	-2.20	3.07
				5270.0	48.919	5.381	47.818	5.548	-2.25	3.10
				5280.0	48.906	5.393	47.789	5.563	-2.28	3.15
				5290.0	48.892	5.404	47.761	5.573	-2.31	3.13
Nov. 19. 2018	5300 Body	20.3	20.6	5300.0	48.879	5.416	47.724	5.584	-2.36	3.10
				5310.0	48.865	5.428	47.682	5.598	-2.42	3.13
				5320.0	48.851	5.439	47.649	5.613	-2.46	3.20

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Nov. 08. 2018	5600 Head	20.7	20.5	5500.0	35.650	4.965	35.858	5.016	0.58	1.03
				5510.0	35.635	4.976	35.840	5.025	0.58	0.98
				5530.0	35.605	4.997	35.773	5.046	0.47	0.98
				5550.0	35.575	5.018	35.722	5.069	0.41	1.02
				5580.0	35.530	5.049	35.639	5.100	0.31	1.01
				5600.0	35.500	5.070	35.588	5.127	0.25	1.12
				5660.0	35.440	5.130	35.462	5.186	0.06	1.09
				5670.0	35.430	5.140	35.440	5.193	0.03	1.03
				5690.0	35.410	5.160	35.384	5.214	-0.07	1.05
				5710.0	35.390	5.180	35.334	5.240	-0.16	1.16
				5720.0	35.380	5.190	35.325	5.250	-0.16	1.16
Nov. 09. 2018	5600 Body	20.8	20.9	5500.0	48.607	5.650	47.709	5.808	-1.85	2.80
				5510.0	48.594	5.661	47.685	5.818	-1.87	2.77
				5530.0	48.566	5.685	47.624	5.848	-1.94	2.87
				5550.0	48.539	5.708	47.589	5.881	-1.96	3.03
				5580.0	48.499	5.743	47.511	5.922	-2.04	3.12
				5600.0	48.471	5.766	47.471	5.955	-2.06	3.28
				5660.0	48.390	5.836	47.337	6.039	-2.18	3.48
				5670.0	48.376	5.848	47.311	6.050	-2.20	3.45
				5690.0	48.349	5.872	47.267	6.080	-2.24	3.54
				5710.0	48.322	5.895	47.224	6.111	-2.27	3.66
				5720.0	48.309	5.907	47.228	6.126	-2.24	3.71
Nov. 12. 2018	5800 Head	20.3	20.6	5745.0	35.355	5.215	35.533	5.307	0.50	1.76
				5755.0	35.345	5.225	35.495	5.317	0.42	1.76
				5775.0	35.325	5.245	35.424	5.329	0.28	1.60
				5785.0	35.315	5.255	35.379	5.334	0.18	1.50
				5795.0	35.305	5.265	35.328	5.341	0.07	1.44
				5800.0	35.300	5.270	35.305	5.345	0.01	1.42
				5825.0	35.275	5.296	35.206	5.368	-0.20	1.36
Nov. 13. 2018	5800 Body	20.7	20.9	5745.0	48.275	5.936	48.000	6.108	-0.57	2.90
				5755.0	48.261	5.947	47.974	6.123	-0.59	2.96
				5775.0	48.234	5.971	47.936	6.149	-0.62	2.98
				5785.0	48.220	5.982	47.913	6.162	-0.64	3.01
				5795.0	48.207	5.994	47.885	6.176	-0.67	3.04
				5800.0	48.200	6.000	47.877	6.184	-0.67	3.07
				5825.0	48.166	6.029	47.823	6.220	-0.71	3.17

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r'(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r'} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

10.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 10.2.1 System Verification Results (1g)


SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
D	750	D750V3, SN:1049	Nov. 17. 2018	Head	21.0	22.0	3933	250	8.32	2.00	8.00	-3.85
D	750	D750V3, SN:1049	Nov. 17. 2018	Body	21.0	21.9	3933	250	8.70	2.28	9.12	4.83
D	750	D750V3, SN:1049	Nov. 19. 2018	Head	21.1	22.1	3933	250	8.32	1.98	7.92	-4.81
D	750	D750V3, SN:1049	Nov. 19. 2018	Body	21.1	21.9	3933	250	8.70	2.18	8.72	0.23
D	835	D835V2, SN:4d159	Nov. 07. 2018	Head	21.8	22.5	3933	250	9.36	2.25	9.00	-3.85
D	835	D835V2, SN:4d159	Nov. 07. 2018	Body	21.8	22.3	3933	250	9.56	2.34	9.36	-2.09
D	835	D835V2, SN:4d159	Nov. 14. 2018	Head	21.2	22.2	3933	250	9.36	2.33	9.32	-0.43
D	835	D835V2, SN:4d159	Nov. 14. 2018	Body	21.2	22.1	3933	250	9.56	2.45	9.80	2.51
D	835	D835V2, SN:4d159	Nov. 15. 2018	Head	20.9	21.8	3933	250	9.36	2.41	9.64	2.99
D	835	D835V2, SN:4d159	Nov. 15. 2018	Body	20.9	21.7	3933	250	9.56	2.31	9.24	-3.35
D	1800	D1800V2, SN:2d202	Nov. 12. 2018	Head	21.4	22.3	3933	100	38.7	4.04	40.40	4.39
D	1800	D1800V2, SN:2d202	Nov. 12. 2018	Body	21.4	22.2	3933	100	38.8	4.07	40.70	4.90
D	1800	D1800V2, SN:2d202	Nov. 16. 2018	Head	21.7	22.4	3933	100	38.7	3.98	39.80	2.84
D	1800	D1800V2, SN:2d202	Nov. 16. 2018	Body	21.7	22.2	3933	100	38.8	3.84	38.40	-1.03
D	1900	D1900V2, SN:5d176	Nov. 08. 2018	Head	21.4	22.2	3933	100	40.7	4.05	40.50	-0.49
D	1900	D1900V2, SN:5d176	Nov. 08. 2018	Body	21.4	22.3	3933	100	39.7	4.14	41.40	4.28
D	1900	D1900V2, SN:5d176	Nov. 09. 2018	Head	21.6	22.4	3933	100	40.7	4.15	41.50	1.97
D	1900	D1900V2, SN:5d176	Nov. 09. 2018	Body	21.6	22.2	3933	100	39.7	4.05	40.50	2.02
D	1900	D1900V2, SN:5d176	Nov. 13. 2018	Head	20.8	21.7	3933	100	40.7	4.25	42.50	4.42
D	1900	D1900V2, SN:5d176	Nov. 13. 2018	Body	20.8	21.9	3933	100	39.7	4.17	41.70	5.04
E	2450	D2450V2, SN: 920	Nov. 15. 2018	Head	21.6	21.5	3916	100	51.9	5.43	54.30	4.62
E	2450	D2450V2, SN: 920	Nov. 13. 2018	Body	22.3	22.1	3916	100	52.1	5.28	52.80	1.34
D	2600	D2600V2, SN: 1103	Nov. 20. 2018	Head	21.2	22.4	3933	100	56.4	5.95	59.50	5.50
D	2600	D2600V2, SN: 1103	Nov. 20. 2018	Body	21.2	22.2	3933	100	55.7	5.43	54.30	-2.51
C	5200	D5GHzV2, SN:1212	Nov. 20. 2018	Body	20.5	20.9	3916	100	72.7	7.10	71.00	-2.34
C	5300	D5GHzV2, SN:1212	Nov. 16. 2018	Head	20.6	20.8	3916	100	81.1	7.92	79.20	-2.34
C	5300	D5GHzV2, SN:1212	Nov. 19. 2018	Body	20.3	20.6	3916	100	75.2	7.07	70.70	-5.98
C	5600	D5GHzV2, SN:1212	Nov. 08. 2018	Head	20.7	20.5	3916	100	83.6	8.06	80.60	-3.59
C	5600	D5GHzV2, SN:1212	Nov. 09. 2018	Body	20.8	20.9	3916	100	78.9	7.59	75.90	-3.80
C	5800	D5GHzV2, SN:1212	Nov. 12. 2018	Head	20.3	20.6	3916	100	79.5	7.68	76.80	-3.40
C	5800	D5GHzV2, SN:1212	Nov. 13. 2018	Body	20.7	20.9	3916	100	75.7	7.23	72.30	-4.49

Table 10.2.2 System Verification Results (10g)
SYSTEM DIPOLE VERIFICATION TARGET & MEASURED

SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
C	5300	D5GHzV2, SN:1212	Nov. 19. 2018	Body	20.3	20.6	3916	100	20.9	2.00	20.00	-4.31
C	5600	D5GHzV2, SN:1212	Nov. 09. 2018	Body	20.8	20.9	3916	100	21.8	2.09	20.90	-4.13
C	5800	D5GHzV2, SN:1212	Nov. 13. 2018	Body	20.7	20.9	3916	100	20.8	1.99	19.90	-4.33

Note1 : System Verification was measured with input 250 mW, 100 mW and normalized to 1W.

Note2 : Full system validation status and results can be found in Attachment 3.


Figure 10.1 Dipole Verification Test Setup Diagram & Photo

11. SAR TEST RESULTS

11.1 Head SAR Results

Table 11.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	34.20	33.80	0.010	Left Touch	FCC #1	1	1:8.3	0.125	1.096	0.137	A1
836.6	190	GSM850	GSM	34.20	33.80	-0.070	Right Touch	FCC #1	1	1:8.3	0.059	1.096	0.065	
836.6	190	GSM850	GSM	34.20	33.80	0.140	Left Tilt	FCC #1	1	1:8.3	0.045	1.096	0.049	
836.6	190	GSM850	GSM	34.20	33.80	-0.050	Right Tilt	FCC #1	1	1:8.3	0.037	1.096	0.041	
836.6	190	GSM850	GPRS	34.20	33.80	0.050	Left Touch	FCC #1	1	1:8.3	0.126	1.096	0.138	A2
836.6	190	GSM850	GPRS	34.20	33.80	0.030	Right Touch	FCC #1	1	1:8.3	0.068	1.096	0.075	
836.6	190	GSM850	GPRS	34.20	33.80	0.010	Left Tilt	FCC #1	1	1:8.3	0.046	1.096	0.050	
836.6	190	GSM850	GPRS	34.20	33.80	-0.000	Right Tilt	FCC #1	1	1:8.3	0.038	1.096	0.042	
836.6	190	GSM850	GPRS	34.20	33.80	0.050	Left Touch	FCC #1	1	1:8.3	0.126	1.096	0.138	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	30.70	30.70	0.180	Left Touch	FCC #1	1	1:8.3	0.067	1.000	0.067	A3
1880.0	661	PCS1900	PCS	30.70	30.70	0.190	Right Touch	FCC #1	1	1:8.3	0.061	1.000	0.061	
1880.0	661	PCS1900	PCS	30.70	30.70	0.040	Left Tilt	FCC #1	1	1:8.3	0.033	1.000	0.033	
1880.0	661	PCS1900	PCS	30.70	30.70	-0.140	Right Tilt	FCC #1	1	1:8.3	0.032	1.000	0.032	
1880.0	661	PCS1900	GPRS	25.70	25.40	0.010	Left Touch	FCC #1	4	1:2.075	0.083	1.072	0.089	A4
1880.0	661	PCS1900	GPRS	25.70	25.40	0.170	Right Touch	FCC #1	4	1:2.075	0.072	1.072	0.077	
1880.0	661	PCS1900	GPRS	25.70	25.40	0.150	Left Tilt	FCC #1	4	1:2.075	0.037	1.072	0.040	
1880.0	661	PCS1900	GPRS	25.70	25.40	0.060	Right Tilt	FCC #1	4	1:2.075	0.037	1.072	0.040	
1880.0	661	PCS1900	GPRS	25.70	25.40	0.130	Left Touch	FCC #1	4	1:2.075	0.078	1.072	0.084	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	25.50	25.19	0.130	Left Touch	FCC #1	1:1	0.138	1.074	0.148	A5
836.6	4183	WCDMA 850	RMC	25.50	25.19	-0.080	Right Touch	FCC #1	1:1	0.089	1.074	0.096	
836.6	4183	WCDMA 850	RMC	25.50	25.19	0.120	Left Tilt	FCC #1	1:1	0.052	1.074	0.056	
836.6	4183	WCDMA 850	RMC	25.50	25.19	-0.080	Right Tilt	FCC #1	1:1	0.054	1.074	0.058	
836.6	4183	WCDMA 850	RMC	25.50	25.19	0.120	Left Touch	FCC #1	1:1	0.132	1.074	0.142	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.4 WCDMA 1700 Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	0.070	Left Touch	FCC #1	1:1	0.057	1.094	0.062	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	0.090	Right Touch	FCC #1	1:1	0.062	1.094	0.068	A6
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	0.190	Left Tilt	FCC #1	1:1	0.044	1.094	0.048	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	-0.030	Right Tilt	FCC #1	1:1	0.046	1.094	0.050	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	0.100	Right Touch	FCC #1	1:1	0.060	1.094	0.066	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.5 WCDMA 1900 Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.190	Left Touch	FCC #1	1:1	0.084	1.030	0.087	
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.110	Right Touch	FCC #1	1:1	0.088	1.030	0.091	A7
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.010	Left Tilt	FCC #1	1:1	0.039	1.030	0.040	
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	0.130	Right Tilt	FCC #1	1:1	0.037	1.030	0.038	
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	0.030	Right Touch	FCC #1	1:1	0.083	1.030	0.085	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.6 LTE Band 12 Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.50	25.37	0.020	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.163	1.030	0.168	
707.5	23095	LTE B12	10	24.50	24.07	0.080	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.120	1.104	0.132	
707.5	23095	LTE B12	10	25.50	25.37	0.180	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.182	1.030	0.187	A8
707.5	23095	LTE B12	10	24.50	24.07	0.120	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.114	1.104	0.126	
707.5	23095	LTE B12	10	25.50	25.37	-0.090	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.081	1.030	0.083	
707.5	23095	LTE B12	10	24.50	24.07	0.090	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.062	1.104	0.068	
707.5	23095	LTE B12	10	25.50	25.37	0.020	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.061	1.030	0.063	
707.5	23095	LTE B12	10	24.50	24.07	0.050	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.036	1.104	0.040	
707.5	23095	LTE B12	10	25.50	25.37	0.110	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.180	1.030	0.185	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.7 LTE Band 13 Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
782.0	23230	LTE B13	10	25.50	25.31	0.050	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.175	1.045	0.183	A9
782.0	23230	LTE B13	10	24.50	24.05	-0.100	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.111	1.109	0.123	
782.0	23230	LTE B13	10	25.50	25.31	0.040	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.147	1.045	0.154	
782.0	23230	LTE B13	10	24.50	24.05	-0.030	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.096	1.109	0.106	
782.0	23230	LTE B13	10	25.50	25.31	0.010	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.078	1.045	0.082	
782.0	23230	LTE B13	10	24.50	24.05	0.090	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.050	1.109	0.055	
782.0	23230	LTE B13	10	25.50	25.31	0.080	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.082	1.045	0.086	
782.0	23230	LTE B13	10	24.50	24.05	0.120	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.053	1.109	0.059	
782.0	23230	LTE B13	10	25.50	25.31	-0.070	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.170	1.045	0.178	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.8 LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	25.50	25.29	0.100	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.081	1.050	0.085	A10
836.5	20525	LTE B5	10	24.50	24.04	-0.070	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.054	1.112	0.060	
836.5	20525	LTE B5	10	25.50	25.29	-0.180	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.062	1.050	0.065	
836.5	20525	LTE B5	10	24.50	24.04	-0.060	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.040	1.112	0.044	
836.5	20525	LTE B5	10	25.50	25.29	0.070	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.031	1.050	0.033	
836.5	20525	LTE B5	10	24.50	24.04	-0.180	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.013	1.112	0.014	
836.5	20525	LTE B5	10	25.50	25.29	0.140	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.032	1.050	0.034	
836.5	20525	LTE B5	10	24.50	24.04	0.140	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.018	1.112	0.020	
836.5	20525	LTE B5	10	25.50	25.29	-0.110	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.079	1.050	0.083	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.9 LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1732.5	20175	LTE B4	20	22.70	22.41	0.040	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.044	1.069	0.047	
1732.5	20175	LTE B4	20	21.70	21.27	-0.180	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.039	1.104	0.043	
1732.5	20175	LTE B4	20	22.70	22.41	0.140	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.055	1.069	0.059	A11
1732.5	20175	LTE B4	20	21.70	21.27	0.000	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.042	1.104	0.046	
1732.5	20175	LTE B4	20	22.70	22.41	0.130	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.024	1.069	0.026	
1732.5	20175	LTE B4	20	21.70	21.27	-0.100	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.021	1.104	0.023	
1732.5	20175	LTE B4	20	22.70	22.41	0.050	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.026	1.069	0.028	
1732.5	20175	LTE B4	20	21.70	21.27	0.080	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.025	1.104	0.028	
1732.5	20175	LTE B4	20	22.70	22.41	-0.100	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.054	1.069	0.058	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.10 LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1860.0	18700	LTE B2	20	22.70	22.25	-0.070	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.067	1.109	0.074	
1860.0	18700	LTE B2	20	21.70	21.24	-0.190	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.056	1.112	0.062	
1860.0	18700	LTE B2	20	22.70	22.25	0.130	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.074	1.109	0.082	A12
1860.0	18700	LTE B2	20	21.70	21.24	0.100	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.060	1.112	0.067	
1860.0	18700	LTE B2	20	22.70	22.25	-0.120	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.041	1.109	0.045	
1860.0	18700	LTE B2	20	21.70	21.24	0.020	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.033	1.112	0.037	
1860.0	18700	LTE B2	20	22.70	22.25	0.180	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.042	1.109	0.047	
1860.0	18700	LTE B2	20	21.70	21.24	0.100	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.033	1.112	0.037	
1860.0	18700	LTE B2	20	22.70	22.25	0.160	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.066	1.109	0.073	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.11 LTE Band 41 Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2506.0	39750	LTE B41	20	24.20	23.74	0.180	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.137	1.112	0.152	
2506.0	39750	LTE B41	20	23.20	22.64	0.060	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.099	1.138	0.113	
2506.0	39750	LTE B41	20	24.20	23.74	-0.020	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.320	1.112	0.356	A13
2506.0	39750	LTE B41	20	23.20	22.64	-0.020	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.243	1.138	0.277	
2506.0	39750	LTE B41	20	24.20	23.74	-0.150	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.091	1.112	0.101	
2506.0	39750	LTE B41	20	23.20	22.64	-0.110	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.070	1.138	0.080	
2506.0	39750	LTE B41	20	24.20	23.74	0.020	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.068	1.112	0.076	
2506.0	39750	LTE B41	20	23.20	22.64	0.120	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.050	1.138	0.057	
2506.0	39750	LTE B41	20	24.20	23.74	-0.030	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.314	1.112	0.349	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.1.12 DTS Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plot s #
MHz	Ch														
2412.0	1	802.11b (Ant.1)	16.50	16.26	0.090	Left Touch	FCC #2	0.091	1	98.8	0.084	1.057	1.012	0.090	
2412.0	1	802.11b (Ant.1)	16.50	16.26	-0.050	Right Touch	FCC #2	0.412	1	98.8	0.333	1.057	1.012	0.356	A14
2412.0	1	802.11b (Ant.1)	16.50	16.26	0.130	Left Tilt	FCC #2	0.130	1	98.8	0.134	1.057	1.012	0.143	
2412.0	1	802.11b (Ant.1)	16.50	16.26	-0.030	Right Tilt	FCC #2	0.429	1	98.8	0.293	1.057	1.012	0.313	
2462.0	11	802.11b (Ant.2)	16.50	16.28	-0.160	Left Touch	FCC #2	0.043	1	98.8	0.039	1.052	1.012	0.042	
2462.0	11	802.11b (Ant.2)	16.50	16.28	0.000	Right Touch	FCC #2	0.090	1	98.8	0.075	1.052	1.012	0.080	A15
2462.0	11	802.11b (Ant.2)	16.50	16.28	0.030	Left Tilt	FCC #2	0.035	1	98.8	0.032	1.052	1.012	0.034	
2462.0	11	802.11b (Ant.2)	16.50	16.28	0.150	Right Tilt	FCC #2	0.043	1	98.8	0.036	1.052	1.012	0.038	
2412.0	1	802.11g (MIMO)	19.50	18.95	0.060	Left Touch	FCC #2	0.140	1	97.6	0.108	1.135	1.025	0.126	
2412.0	1	802.11g (MIMO)	19.50	18.95	-0.010	Right Touch	FCC #2	0.379	1	97.6	0.326	1.135	1.025	0.379	
2412.0	1	802.11g (MIMO)	19.50	18.95	0.090	Left Tilt	FCC #2	0.142	1	97.6	0.133	1.135	1.025	0.155	
2412.0	1	802.11g (MIMO)	19.50	18.95	0.050	Right Tilt	FCC #2	0.306	1	97.6	0.335	1.135	1.025	0.390	A16
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.356	2437	802.11g	OFDM	16.5	1.000	0.356	X
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.356	2437	802.11n	OFDM	15.5	0.794	0.283	X
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.356	2437	802.11ac	OFDM	15.5	0.794	0.283	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.080	2437	802.11g	OFDM	16.5	1.000	0.080	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.080	2437	802.11n	OFDM	15.5	0.794	0.064	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.080	2437	802.11ac	OFDM	15.5	0.794	0.064	X
2412.0	1	802.11g (MIMO)	OFDM	19.5	0.390	2437	802.11n	OFDM	18.5	0.794	0.310	X
2412.0	1	802.11g (MIMO)	OFDM	19.5	0.390	2437	802.11ac	OFDM	18.5	0.794	0.310	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.1.13 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5260.0	52	802.11a (Ant.1)	15.00	14.63	-0.180	Left Touch	FCC #2	0.298	6	97.6	0.257	1.089	1.025	0.287	
5260.0	52	802.11a (Ant.1)	15.00	14.63	-0.070	Right Touch	FCC #2	0.424	6	97.6	0.526	1.089	1.025	0.587	
5260.0	52	802.11a (Ant.1)	15.00	14.63	0.170	Left Tilt	FCC #2	0.321	6	97.6	0.308	1.089	1.025	0.344	
5260.0	52	802.11a (Ant.1)	15.00	14.63	0.140	Right Tilt	FCC #2	0.527	6	97.6	0.586	1.089	1.025	0.654	A17
5280.0	56	802.11a (Ant.2)	15.00	14.83	0.000	Left Touch	FCC #2	0.003	6	97.6	0.008	1.040	1.025	0.008	
5280.0	56	802.11a (Ant.2)	15.00	14.83	0.000	Right Touch	FCC #2	0.019	6	97.6	0.017	1.040	1.025	0.018	A18
5280.0	56	802.11a (Ant.2)	15.00	14.83	0.000	Left Tilt	FCC #2	0.019	6	97.6	0.010	1.040	1.025	0.011	
5280.0	56	802.11a (Ant.2)	15.00	14.83	0.000	Right Tilt	FCC #2	0.016	6	97.6	0.013	1.040	1.025	0.014	
5280.0	56	802.11a (MIMO)	18.00	17.73	-0.080	Left Touch	FCC #2	0.301	6	97.6	0.232	1.089	1.025	0.259	
5280.0	56	802.11a (MIMO)	18.00	17.73	-0.120	Right Touch	FCC #2	0.354	6	97.6	0.327	1.089	1.025	0.365	
5280.0	56	802.11a (MIMO)	18.00	17.73	-0.090	Left Tilt	FCC #2	0.297	6	97.6	0.277	1.089	1.025	0.309	
5280.0	56	802.11a (MIMO)	18.00	17.73	0.130	Right Tilt	FCC #2	0.441	6	97.6	0.463	1.089	1.025	0.517	A19
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for UNII-1 and UNII-2A SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5260.0	52	802.11a (Ant.1)	OFDM	15.0	0.654	5200	802.11a	OFDM	15.0	1.000	0.654	X
5280.0	56	802.11a (Ant.2)	OFDM	15.0	0.018	5220	802.11a	OFDM	15.0	1.000	0.018	X
5280.0	56	802.11a (MIMO)	OFDM	18.0	0.517	5220	802.11a	OFDM	18.0	1.000	0.517	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.1.14 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5660.0	132	802.11a (Ant.1)	15.00	14.75	0.070	Left Touch	FCC #2	0.316	6	97.6	0.297	1.059	1.025	0.322	
5660.0	132	802.11a (Ant.1)	15.00	14.75	0.050	Right Touch	FCC #2	0.617	6	97.6	0.591	1.059	1.025	0.641	
5660.0	132	802.11a (Ant.1)	15.00	14.75	-0.010	Left Tilt	FCC #2	0.414	6	97.6	0.402	1.059	1.025	0.436	
5660.0	132	802.11a (Ant.1)	15.00	14.75	-0.010	Right Tilt	FCC #2	0.597	6	97.6	0.688	1.059	1.025	0.747	A20
5660.0	132	802.11a (Ant.2)	15.00	14.93	0.000	Left Touch	FCC #2	0.034	6	97.6	0.014	1.016	1.025	0.015	
5660.0	132	802.11a (Ant.2)	15.00	14.93	0.000	Right Touch	FCC #2	0.030	6	97.6	0.021	1.016	1.025	0.022	A21
5660.0	132	802.11a (Ant.2)	15.00	14.93	0.000	Left Tilt	FCC #2	0.040	6	97.6	0.017	1.016	1.025	0.017	
5660.0	132	802.11a (Ant.2)	15.00	14.93	0.000	Right Tilt	FCC #2	0.011	6	97.6	0.011	1.016	1.025	0.012	
5660.0	132	802.11a (MIMO)	18.00	17.85	-0.110	Left Touch	FCC #2	0.345	6	97.6	0.318	1.059	1.025	0.345	
5660.0	132	802.11a (MIMO)	18.00	17.85	0.050	Right Touch	FCC #2	0.577	6	97.6	0.649	1.059	1.025	0.704	
5660.0	132	802.11a (MIMO)	18.00	17.85	0.100	Left Tilt	FCC #2	0.418	6	97.6	0.410	1.059	1.025	0.445	
5660.0	132	802.11a (MIMO)	18.00	17.85	-0.050	Right Tilt	FCC #2	0.692	6	97.6	0.716	1.059	1.025	0.777	A22
5785.0	157	802.11a (Ant.1)	12.00	11.47	-0.120	Left Touch	FCC #2	0.169	6	97.6	0.125	1.130	1.025	0.145	
5785.0	157	802.11a (Ant.1)	12.00	11.47	0.010	Right Touch	FCC #2	0.201	6	97.6	0.190	1.130	1.025	0.220	
5785.0	157	802.11a (Ant.1)	12.00	11.47	0.190	Left Tilt	FCC #2	0.190	6	97.6	0.163	1.130	1.025	0.189	
5785.0	157	802.11a (Ant.1)	12.00	11.47	-0.110	Right Tilt	FCC #2	0.275	6	97.6	0.277	1.130	1.025	0.321	A23
5785.0	157	802.11a (Ant.2)	12.00	11.73	0.000	Left Touch	FCC #2	0.002	6	97.6	0.010	1.064	1.025	0.010	
5785.0	157	802.11a (Ant.2)	12.00	11.73	0.000	Right Touch	FCC #2	0.023	6	97.6	0.019	1.064	1.025	0.021	A24
5785.0	157	802.11a (Ant.2)	12.00	11.73	0.000	Left Tilt	FCC #2	0.014	6	97.6	0.014	1.064	1.025	0.015	
5785.0	157	802.11a (Ant.2)	12.00	11.73	0.000	Right Tilt	FCC #2	0.026	6	97.6	0.017	1.064	1.025	0.019	
5785.0	157	802.11a (MIMO)	15.00	14.61	-0.140	Left Touch	FCC #2	0.189	6	97.6	0.133	1.130	1.025	0.154	
5785.0	157	802.11a (MIMO)	15.00	14.61	0.130	Right Touch	FCC #2	0.210	6	97.6	0.215	1.130	1.025	0.249	
5785.0	157	802.11a (MIMO)	15.00	14.61	-0.070	Left Tilt	FCC #2	0.198	6	97.6	0.166	1.130	1.025	0.192	
5785.0	157	802.11a (MIMO)	15.00	14.61	0.070	Right Tilt	FCC #2	0.315	6	97.6	0.321	1.130	1.025	0.372	A25
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11.1.15 Bluetooth Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	11.85	10.31	0.160	Left Touch	FCC #2	1	76.8	0.020	1.424	1.302	0.037	
2441.0	39	Bluetooth	11.85	10.31	0.050	Right Touch	FCC #2	1	76.8	0.062	1.424	1.302	0.115	
2441.0	39	Bluetooth	11.85	10.31	0.020	Left Tilt	FCC #2	1	76.8	0.032	1.424	1.302	0.059	
2441.0	39	Bluetooth	11.85	10.31	-0.080	Right Tilt	FCC #2	1	76.8	0.072	1.424	1.302	0.134	A26
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

11.2 Standalone Body-Worn SAR Worn SAR Results

Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	34.20	33.80	-0.020	10 mm [Front]	FCC #1	1	1:8.3	0.437	1.096	0.479	
836.6	190	GSM850	GSM	34.20	33.80	-0.010	10 mm [Rear]	FCC #1	1	1:8.3	0.595	1.096	0.652	A27
836.6	190	GSM850	GPRS	34.20	33.80	0.030	10 mm [Front]	FCC #1	1	1:8.3	0.457	1.096	0.501	
836.6	190	GSM850	GPRS	34.20	33.80	-0.070	10 mm [Rear]	FCC #1	1	1:8.3	0.611	1.096	0.670	A28
836.6	190	GSM850	GPRS	34.20	33.80	-0.030	10 mm [Rear]	FCC #1	1	1:8.3	0.586	1.096	0.642	
1880.0	661	PCS1900	PCS	30.70	30.70	0.010	10 mm [Front]	FCC #1	1	1:8.3	0.269	1.000	0.269	
1880.0	661	PCS1900	PCS	30.70	30.70	-0.010	10 mm [Rear]	FCC #1	1	1:8.3	0.275	1.000	0.275	A29
1880.0	661	PCS1900	GPRS	25.70	25.40	0.020	10 mm [Front]	FCC #1	4	1:2.075	0.295	1.072	0.316	
1880.0	661	PCS1900	GPRS	25.70	25.40	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.317	1.072	0.340	A30
836.6	4183	WCDMA 850	RMC	25.50	25.19	-0.000	10 mm [Front]	FCC #1	N/A	1:1	0.365	1.074	0.392	
836.6	4183	WCDMA 850	RMC	25.50	25.19	0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.566	1.074	0.608	A31
836.6	4183	WCDMA 850	RMC	25.50	25.19	0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.554	1.074	0.595	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	0.070	10 mm [Front]	FCC #1	N/A	1:1	0.318	1.094	0.348	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.356	1.094	0.389	A32
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.050	10 mm [Front]	FCC #1	N/A	1:1	0.429	1.030	0.442	
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.493	1.030	0.508	A33
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.2.2 LTE B12, B13, B5, B4 Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.50	25.37	0.030	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.454	1.030	0.468	
707.5	23095	LTE B12	10	24.50	24.07	0.040	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.318	1.104	0.351	
707.5	23095	LTE B12	10	25.50	25.37	0.020	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.606	1.030	0.624	A34
707.5	23095	LTE B12	10	24.50	24.07	-0.040	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.428	1.104	0.473	
707.5	23095	LTE B12	10	25.50	25.37	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.602	1.030	0.620	
782.0	23230	LTE B13	10	25.50	25.31	0.030	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.572	1.045	0.598	
782.0	23230	LTE B13	10	24.50	24.05	0.050	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.402	1.109	0.446	
782.0	23230	LTE B13	10	25.50	25.31	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.659	1.045	0.689	A35
782.0	23230	LTE B13	10	24.50	24.05	-0.010	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.499	1.109	0.553	
782.0	23230	LTE B13	10	25.50	25.31	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.650	1.045	0.679	
836.5	20525	LTE B5	10	25.50	25.29	-0.040	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.305	1.050	0.320	
836.5	20525	LTE B5	10	24.50	24.04	-0.070	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.208	1.112	0.231	
836.5	20525	LTE B5	10	25.50	25.29	0.060	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.520	1.050	0.546	A36
836.5	20525	LTE B5	10	24.50	24.04	0.060	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.338	1.112	0.376	
836.5	20525	LTE B5	10	25.50	25.29	0.040	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.519	1.050	0.545	
1732.5	20175	LTE B4	20	22.70	22.41	-0.020	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.245	1.069	0.262	
1732.5	20175	LTE B4	20	21.70	21.27	-0.040	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.219	1.104	0.242	
1732.5	20175	LTE B4	20	22.70	22.41	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.360	1.069	0.385	A37
1732.5	20175	LTE B4	20	21.70	21.27	-0.000	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.311	1.104	0.343	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.2.3 LTE B2/B41 Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1860.0	18700	LTE B2	20	22.70	22.25	-0.020	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.273	1.109	0.303	
1860.0	18700	LTE B2	20	21.70	21.24	-0.030	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.217	1.112	0.241	
1860.0	18700	LTE B2	20	22.70	22.25	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.311	1.109	0.345	A38
1860.0	18700	LTE B2	20	21.70	21.24	0.000	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.249	1.112	0.277	
2506.0	39750	LTE B41	20	24.20	23.74	0.030	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.309	1.112	0.344	
2506.0	39750	LTE B41	20	23.20	22.64	-0.020	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.292	1.138	0.332	
2506.0	39750	LTE B41	20	24.20	23.74	-0.090	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.422	1.112	0.469	A39
2506.0	39750	LTE B41	20	23.20	22.64	-0.090	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.392	1.138	0.446	
2506.0	39750	LTE B41	20	24.20	23.74	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.408	1.112	0.454	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.2.4 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2412.0	1	802.11b (Ant.1)	16.50	16.26	0.030	10 mm [Front]	FCC #2	0.035	1	98.8	0.037	1.057	1.012	0.040	
2412.0	1	802.11b (Ant.1)	16.50	16.26	-0.050	10 mm [Rear]	FCC #2	0.090	1	98.8	0.095	1.057	1.012	0.102	A40
2462.0	11	802.11b (Ant.2)	16.50	16.28	0.090	10 mm [Front]	FCC #2	0.016	1	98.8	0.010	1.052	1.012	0.011	
2462.0	11	802.11b (Ant.2)	16.50	16.28	0.090	10 mm [Rear]	FCC #2	0.276	1	98.8	0.307	1.052	1.012	0.327	A41
2412.0	1	802.11g (MIMO)	19.50	18.95	0.020	10 mm [Front]	FCC #2	0.041	1	97.6	0.044	1.135	1.025	0.051	
2412.0	1	802.11g (MIMO)	19.50	18.95	-0.070	10 mm [Rear]	FCC #2	0.209	1	97.6	0.251	1.135	1.025	0.292	A42
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.102	2437	802.11g	OFDM	16.5	1.000	0.102	X
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.102	2437	802.11n	OFDM	15.5	0.794	0.081	X
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.102	2437	802.11ac	OFDM	15.5	0.794	0.081	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.327	2437	802.11g	OFDM	16.5	1.000	0.327	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.327	2437	802.11n	OFDM	15.5	0.794	0.260	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.327	2437	802.11ac	OFDM	15.5	0.794	0.260	X
2412.0	1	802.11g (MIMO)	OFDM	19.5	0.292	2437	802.11n	OFDM	18.5	0.794	0.232	X
2412.0	1	802.11g (MIMO)	OFDM	19.5	0.292	2437	802.11ac	OFDM	18.5	0.794	0.232	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5260.0	52	802.11a (Ant.1)	15.00	14.63	-0.090	10 mm [Front]	FCC #2	0.053	6	97.6	0.037	1.089	1.025	0.041	
5260.0	52	802.11a (Ant.1)	15.00	14.63	0.050	10 mm [Rear]	FCC #2	0.090	6	97.6	0.072	1.089	1.025	0.080	A43
5280.0	56	802.11a (Ant.2)	15.00	14.83	0.010	10 mm [Front]	FCC #2	0.044	6	97.6	0.025	1.040	1.025	0.026	
5280.0	56	802.11a (Ant.2)	15.00	14.83	-0.020	10 mm [Rear]	FCC #2	0.270	6	97.6	0.264	1.040	1.025	0.281	A44
5280.0	56	802.11a (MIMO)	18.00	17.73	0.130	10 mm [Front]	FCC #2	0.035	6	97.6	0.018	1.089	1.025	0.020	
5280.0	56	802.11a (MIMO)	18.00	17.73	-0.050	10 mm [Rear]	FCC #2	0.341	6	97.6	0.362	1.089	1.025	0.404	A45
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for UNII-1 and UNII-2A SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5260.0	52	802.11a (Ant.1)	OFDM	15.0	0.080	5200	802.11a	OFDM	15.0	1.000	0.080	X
5280.0	56	802.11a (Ant.2)	OFDM	15.0	0.281	5220	802.11a	OFDM	15.0	1.000	0.281	X
5280.0	56	802.11a (MIMO)	OFDM	18.0	0.404	5220	802.11a	OFDM	18.0	1.000	0.404	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.2.6 UNII Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5660.0	132	802.11a (Ant.1)	15.00	14.75	-0.090	10 mm [Front]	FCC #2	0.064	6	97.6	0.059	1.059	1.025	0.064	
5660.0	132	802.11a (Ant.1)	15.00	14.75	0.040	10 mm [Rear]	FCC #2	0.185	6	97.6	0.186	1.059	1.025	0.202	A46
5660.0	132	802.11a (Ant.2)	15.00	14.93	0.000	10 mm [Front]	FCC #2	0.011	6	97.6	0.008	1.016	1.025	0.008	
5660.0	132	802.11a (Ant.2)	15.00	14.93	-0.190	10 mm [Rear]	FCC #2	0.586	6	97.6	0.683	1.016	1.025	0.711	A47
5660.0	132	802.11a (MIMO)	18.00	17.85	-0.160	10 mm [Front]	FCC #2	0.067	6	97.6	0.062	1.059	1.025	0.067	
5660.0	132	802.11a (MIMO)	18.00	17.85	-0.130	10 mm [Rear]	FCC #2	0.601	6	97.6	0.700	1.059	1.025	0.760	A48
5785.0	157	802.11a (Ant.1)	12.00	11.47	0.080	10 mm [Front]	FCC #2	0.031	6	97.6	0.011	1.130	1.025	0.013	
5785.0	157	802.11a (Ant.1)	12.00	11.47	-0.100	10 mm [Rear]	FCC #2	0.090	6	97.6	0.084	1.130	1.025	0.097	A49
5785.0	157	802.11a (Ant.2)	12.00	11.73	-0.090	10 mm [Front]	FCC #2	0.049	6	97.6	0.028	1.064	1.025	0.031	
5785.0	157	802.11a (Ant.2)	12.00	11.73	-0.100	10 mm [Rear]	FCC #2	0.211	6	97.6	0.224	1.064	1.025	0.244	A50
5785.0	157	802.11a (MIMO)	15.00	14.61	-0.180	10 mm [Front]	FCC #2	0.034	6	97.6	0.020	1.130	1.025	0.024	
5785.0	157	802.11a (MIMO)	15.00	14.61	0.000	10 mm [Rear]	FCC #2	0.203	6	97.6	0.217	1.130	1.025	0.251	A51
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11.2.7 Bluetooth Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	11.85	10.31	0.040	10 mm [Front]	FCC #2	1	76.8	0.005	1.424	1.302	0.010	
2441.0	39	Bluetooth	11.85	10.31	-0.160	10 mm [Rear]	FCC #2	1	76.8	0.021	1.424	1.302	0.039	A52
ANSI / IEEE C95.1-1992~ SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

11.3 Standalone Hotspot SAR Results

Table 11.3.1 GPRS/WCDMA Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	34.20	33.80	-0.060	10 mm [Bottom]	FCC #1	1	1:8.3	0.208	1.096	0.228	
836.6	190	GSM850	GPRS	34.20	33.80	0.030	10 mm [Front]	FCC #1	1	1:8.3	0.457	1.096	0.501	
836.6	190	GSM850	GPRS	34.20	33.80	-0.070	10 mm [Rear]	FCC #1	1	1:8.3	0.611	1.096	0.670	A28
836.6	190	GSM850	GPRS	34.20	33.80	0.000	10 mm [Right]	FCC #1	1	1:8.3	0.339	1.096	0.372	
836.6	190	GSM850	GPRS	34.20	33.80	-0.030	10 mm [Rear]	FCC #1	1	1:8.3	0.586	1.096	0.642	
1880.0	661	PCS1900	GPRS	25.70	25.40	-0.010	10 mm [Bottom]	FCC #1	4	1:2.075	0.480	1.072	0.515	A53
1880.0	661	PCS1900	GPRS	25.70	25.40	0.020	10 mm [Front]	FCC #1	4	1:2.075	0.295	1.072	0.316	
1880.0	661	PCS1900	GPRS	25.70	25.40	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.317	1.072	0.340	
1880.0	661	PCS1900	GPRS	25.70	25.40	-0.010	10 mm [Left]	FCC #1	4	1:2.075	0.162	1.072	0.174	
1880.0	661	PCS1900	GPRS	25.70	25.40	-0.080	10 mm [Bottom]	FCC #1	4	1:2.075	0.454	1.072	0.487	
836.6	4183	WCDMA 850	RMC	25.50	25.19	-0.060	10 mm [Bottom]	FCC #1	N/A	1:1	0.291	1.074	0.313	
836.6	4183	WCDMA 850	RMC	25.50	25.19	-0.000	10 mm [Front]	FCC #1	N/A	1:1	0.365	1.074	0.392	
836.6	4183	WCDMA 850	RMC	25.50	25.19	0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.566	1.074	0.608	A31
836.6	4183	WCDMA 850	RMC	25.50	25.19	-0.170	10 mm [Right]	FCC #1	N/A	1:1	0.255	1.074	0.274	
836.6	4183	WCDMA 850	RMC	25.50	25.19	0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.554	1.074	0.595	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	-0.020	10 mm [Bottom]	FCC #1	N/A	1:1	0.402	1.094	0.440	A54
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	0.070	10 mm [Front]	FCC #1	N/A	1:1	0.318	1.094	0.348	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.356	1.094	0.389	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	-0.190	10 mm [Left]	FCC #1	N/A	1:1	0.215	1.094	0.235	
1732.4	1412	WCDMA 1700	RMC	22.70	22.31	-0.030	10 mm [Bottom]	FCC #1	N/A	1:1	0.386	1.094	0.422	
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.050	10 mm [Bottom]	FCC #1	N/A	1:1	0.572	1.030	0.589	A55
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.050	10 mm [Front]	FCC #1	N/A	1:1	0.429	1.030	0.442	
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.493	1.030	0.508	
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.190	10 mm [Left]	FCC #1	N/A	1:1	0.316	1.030	0.325	
1880.0	9400	WCDMA 1900	RMC	22.70	22.57	-0.030	10 mm [Bottom]	FCC #1	N/A	1:1	0.556	1.030	0.573	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.3.2 LTE B12, B13, B5 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.50	25.37	-0.130	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.185	1.030	0.191	
707.5	23095	LTE B12	10	24.50	24.07	-0.110	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.122	1.104	0.135	
707.5	23095	LTE B12	10	25.50	25.37	0.030	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.454	1.030	0.468	
707.5	23095	LTE B12	10	24.50	24.07	0.040	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.318	1.104	0.351	
707.5	23095	LTE B12	10	25.50	25.37	0.020	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.606	1.030	0.624	A34
707.5	23095	LTE B12	10	24.50	24.07	-0.040	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.428	1.104	0.473	
707.5	23095	LTE B12	10	25.50	25.37	0.140	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.293	1.030	0.302	
707.5	23095	LTE B12	10	24.50	24.07	-0.070	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.205	1.104	0.226	
707.5	23095	LTE B12	10	25.50	25.37	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.602	1.030	0.620	
782.0	23230	LTE B13	10	25.50	25.31	-0.100	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.189	1.045	0.198	
782.0	23230	LTE B13	10	24.50	24.05	-0.130	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.134	1.109	0.149	
782.0	23230	LTE B13	10	25.50	25.31	0.030	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.572	1.045	0.598	
782.0	23230	LTE B13	10	24.50	24.05	0.050	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.402	1.109	0.446	
782.0	23230	LTE B13	10	25.50	25.31	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.659	1.045	0.689	A35
782.0	23230	LTE B13	10	24.50	24.05	-0.010	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.499	1.109	0.553	
782.0	23230	LTE B13	10	25.50	25.31	-0.180	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.290	1.045	0.303	
782.0	23230	LTE B13	10	24.50	24.05	-0.150	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.204	1.109	0.226	
782.0	23230	LTE B13	10	25.50	25.31	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.650	1.045	0.679	
836.5	20525	LTE B5	10	25.50	25.29	-0.080	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.223	1.050	0.234	
836.5	20525	LTE B5	10	24.50	24.04	-0.070	1	10 mm [Bottom]	FCC #1	QPSK	25	0	1:1	0.156	1.112	0.173	
836.5	20525	LTE B5	10	25.50	25.29	-0.040	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.305	1.050	0.320	
836.5	20525	LTE B5	10	24.50	24.04	-0.070	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.208	1.112	0.231	
836.5	20525	LTE B5	10	25.50	25.29	0.060	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.520	1.050	0.546	A36
836.5	20525	LTE B5	10	24.50	24.04	0.060	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.338	1.112	0.376	
836.5	20525	LTE B5	10	25.50	25.29	-0.160	0	10 mm [Right]	FCC #1	QPSK	1	0	1:1	0.390	1.050	0.410	
836.5	20525	LTE B5	10	24.50	24.04	-0.170	1	10 mm [Right]	FCC #1	QPSK	25	0	1:1	0.272	1.112	0.302	
836.5	20525	LTE B5	10	25.50	25.29	0.040	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.519	1.050	0.545	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note(s):

1. Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.3.3 LTE B4 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1732.5	20175	LTE B4	20	22.70	22.41	-0.170	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.413	1.069	0.441	A56
1732.5	20175	LTE B4	20	21.70	21.27	-0.170	1	10 mm [Bottom]	FCC #1	QPSK	50	0	1:1	0.382	1.104	0.422	
1732.5	20175	LTE B4	20	22.70	22.41	-0.020	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.245	1.069	0.262	
1732.5	20175	LTE B4	20	21.70	21.27	-0.040	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.219	1.104	0.242	
1732.5	20175	LTE B4	20	22.70	22.41	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.360	1.069	0.385	
1732.5	20175	LTE B4	20	21.70	21.27	-0.000	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.311	1.104	0.343	
1732.5	20175	LTE B4	20	22.70	22.41	0.120	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.165	1.069	0.176	
1732.5	20175	LTE B4	20	21.70	21.27	0.110	1	10 mm [Left]	FCC #1	QPSK	50	0	1:1	0.153	1.104	0.169	
1732.5	20175	LTE B4	20	22.70	22.41	-0.130	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.413	1.069	0.441	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.3.4 LTE B2 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1860.0	18700	LTE B2	20	22.70	22.25	-0.140	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.602	1.109	0.668	A57
1860.0	18700	LTE B2	20	21.70	21.24	-0.110	1	10 mm [Bottom]	FCC #1	QPSK	50	0	1:1	0.474	1.112	0.527	
1860.0	18700	LTE B2	20	22.70	22.25	-0.020	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.273	1.109	0.303	
1860.0	18700	LTE B2	20	21.70	21.24	-0.030	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.217	1.112	0.241	
1860.0	18700	LTE B2	20	22.70	22.25	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.311	1.109	0.345	
1860.0	18700	LTE B2	20	21.70	21.24	0.000	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.249	1.112	0.277	
1860.0	18700	LTE B2	20	22.70	22.25	-0.020	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.200	1.109	0.222	
1860.0	18700	LTE B2	20	21.70	21.24	0.010	1	10 mm [Left]	FCC #1	QPSK	50	0	1:1	0.154	1.112	0.171	
1860.0	18700	LTE B2	20	22.70	22.25	-0.120	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.594	1.109	0.659	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.3.5 LTE B41 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2506.0	39750	LTE B41	20	24.20	23.74	0.030	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.309	1.112	0.344	
2506.0	39750	LTE B41	20	23.20	22.64	-0.020	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.292	1.138	0.332	
2506.0	39750	LTE B41	20	24.20	23.74	-0.090	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.422	1.112	0.469	A39
2506.0	39750	LTE B41	20	23.20	22.64	-0.090	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.392	1.138	0.446	
2506.0	39750	LTE B41	20	24.20	23.74	-0.100	0	10 mm [Right]	FCC #1	QPSK	1	0	1:1	0.422	1.112	0.469	A58
2506.0	39750	LTE B41	20	23.20	22.64	0.130	1	10 mm [Right]	FCC #1	QPSK	50	0	1:1	0.373	1.138	0.424	
2506.0	39750	LTE B41	20	24.20	23.74	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.408	1.112	0.454	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note(s):

- Blue entries represent SIM2(This is a SIM card that can be installed in place of a memory card.) measurements.

Table 11.3.6 DTS Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2412.0	1	802.11b (Ant.1)	16.50	16.26	-0.090	10 mm [Top]	FCC #2	0.078	1	98.8	0.073	1.057	1.012	0.078	
2412.0	1	802.11b (Ant.1)	16.50	16.26	0.030	10 mm [Front]	FCC #2	0.035	1	98.8	0.037	1.057	1.012	0.040	
2412.0	1	802.11b (Ant.1)	16.50	16.26	-0.050	10 mm [Rear]	FCC #2	0.090	1	98.8	0.095	1.057	1.012	0.102	A40
2412.0	1	802.11b (Ant.1)	16.50	16.26	0.160	10 mm [Left]	FCC #2	0.055	1	98.8	0.048	1.057	1.012	0.051	
2462.0	11	802.11b (Ant.2)	16.50	16.28	-0.150	10 mm [Top]	FCC #2	0.019	1	98.8	0.017	1.052	1.012	0.018	
2462.0	11	802.11b (Ant.2)	16.50	16.28	0.090	10 mm [Front]	FCC #2	0.016	1	98.8	0.010	1.052	1.012	0.011	
2462.0	11	802.11b (Ant.2)	16.50	16.28	0.090	10 mm [Rear]	FCC #2	0.276	1	98.8	0.307	1.052	1.012	0.327	A41
2462.0	11	802.11b (Ant.2)	16.50	16.28	-0.120	10 mm [Left]	FCC #2	0.102	1	98.8	0.109	1.052	1.012	0.116	
2412.0	1	802.11g (MIMO)	19.50	18.95	0.180	10 mm [Top]	FCC #2	0.074	1	97.6	0.079	1.135	1.025	0.092	
2412.0	1	802.11g (MIMO)	19.50	18.95	0.020	10 mm [Front]	FCC #2	0.041	1	97.6	0.044	1.135	1.025	0.051	
2412.0	1	802.11g (MIMO)	19.50	18.95	-0.070	10 mm [Rear]	FCC #2	0.209	1	97.6	0.251	1.135	1.025	0.292	A42
2412.0	1	802.11g (MIMO)	19.50	18.95	-0.170	10 mm [Left]	FCC #2	0.095	1	97.6	0.097	1.135	1.025	0.113	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.102	2437	802.11g	OFDM	16.5	1.000	0.102	X
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.102	2437	802.11n	OFDM	15.5	0.794	0.081	X
2412.0	1	802.11b (Ant.1)	DSSS	16.5	0.102	2437	802.11ac	OFDM	15.5	0.794	0.081	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.327	2437	802.11g	OFDM	16.5	1.000	0.327	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.327	2437	802.11n	OFDM	15.5	0.794	0.260	X
2462.0	11	802.11b (Ant.2)	DSSS	16.5	0.327	2437	802.11ac	OFDM	15.5	0.794	0.260	X
2412.0	1	802.11g (MIMO)	OFDM	19.5	0.292	2437	802.11n	OFDM	18.5	0.794	0.232	X
2412.0	1	802.11g (MIMO)	OFDM	19.5	0.292	2437	802.11ac	OFDM	18.5	0.794	0.232	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.3.7 UNII Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5200.0	40	802.11a (Ant.1)	15.00	14.82	-0.020	10 mm [Top]	FCC #2	0.042	6	97.6	0.033	1.042	1.025	0.035	
5200.0	40	802.11a (Ant.1)	15.00	14.82	-0.070	10 mm [Front]	FCC #2	0.038	6	97.6	0.020	1.042	1.025	0.021	
5200.0	40	802.11a (Ant.1)	15.00	14.82	0.160	10 mm [Rear]	FCC #2	0.078	6	97.6	0.074	1.042	1.025	0.079	A59
5200.0	40	802.11a (Ant.1)	15.00	14.82	-0.030	10 mm [Left]	FCC #2	0.049	6	97.6	0.037	1.042	1.025	0.039	
5220.0	44	802.11a (Ant.2)	15.00	14.90	-0.010	10 mm [Top]	FCC #2	0.033	6	97.6	0.022	1.023	1.025	0.023	
5220.0	44	802.11a (Ant.2)	15.00	14.90	-0.000	10 mm [Front]	FCC #2	0.025	6	97.6	0.011	1.023	1.025	0.012	
5220.0	44	802.11a (Ant.2)	15.00	14.90	-0.110	10 mm [Rear]	FCC #2	0.257	6	97.6	0.262	1.023	1.025	0.275	A60
5220.0	44	802.11a (Ant.2)	15.00	14.90	0.060	10 mm [Left]	FCC #2	0.086	6	97.6	0.071	1.023	1.025	0.075	
5220.0	44	802.11a (MIMO)	18.00	17.86	0.070	10 mm [Top]	FCC #2	0.034	6	97.6	0.026	1.042	1.025	0.028	
5220.0	44	802.11a (MIMO)	18.00	17.86	-0.070	10 mm [Front]	FCC #2	0.035	6	97.6	0.021	1.042	1.025	0.022	
5220.0	44	802.11a (MIMO)	18.00	17.86	0.010	10 mm [Rear]	FCC #2	0.292	6	97.6	0.314	1.042	1.025	0.335	A61
5220.0	44	802.11a (MIMO)	18.00	17.86	0.000	10 mm [Left]	FCC #2	0.122	6	97.6	0.101	1.042	1.025	0.108	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11.3.8 UNII Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5785.0	157	802.11a (Ant.1)	12.00	11.47	0.060	10 mm [Top]	FCC #2	0.068	6	97.6	0.055	1.130	1.025	0.063	
5785.0	157	802.11a (Ant.1)	12.00	11.47	0.080	10 mm [Front]	FCC #2	0.031	6	97.6	0.011	1.130	1.025	0.013	
5785.0	157	802.11a (Ant.1)	12.00	11.47	-0.100	10 mm [Rear]	FCC #2	0.090	6	97.6	0.084	1.130	1.025	0.097	A49
5785.0	157	802.11a (Ant.1)	12.00	11.47	-0.180	10 mm [Left]	FCC #2	0.048	6	97.6	0.040	1.130	1.025	0.046	
5785.0	157	802.11a (Ant.2)	12.00	11.73	0.030	10 mm [Top]	FCC #2	0.008	6	97.6	0.005	1.064	1.025	0.006	
5785.0	157	802.11a (Ant.2)	12.00	11.73	-0.090	10 mm [Front]	FCC #2	0.049	6	97.6	0.028	1.064	1.025	0.031	
5785.0	157	802.11a (Ant.2)	12.00	11.73	-0.100	10 mm [Rear]	FCC #2	0.211	6	97.6	0.224	1.064	1.025	0.244	A50
5785.0	157	802.11a (Ant.2)	12.00	11.73	0.090	10 mm [Left]	FCC #2	0.059	6	97.6	0.048	1.064	1.025	0.053	
5785.0	157	802.11a (MIMO)	15.00	14.61	0.090	10 mm [Top]	FCC #2	0.075	6	97.6	0.067	1.130	1.025	0.077	
5785.0	157	802.11a (MIMO)	15.00	14.61	-0.180	10 mm [Front]	FCC #2	0.034	6	97.6	0.020	1.130	1.025	0.024	
5785.0	157	802.11a (MIMO)	15.00	14.61	0.000	10 mm [Rear]	FCC #2	0.203	6	97.6	0.217	1.130	1.025	0.251	A51
5785.0	157	802.11a (MIMO)	15.00	14.61	0.150	10 mm [Left]	FCC #2	0.068	6	97.6	0.056	1.130	1.025	0.064	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note : UNII-3 Band CH 165(5825 MHz) is not support Hotspot mode as described on operational description, so other required CHs are tested.

Table 11.3.9 Bluetooth Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	11.85	10.31	0.140	10 mm [Top]	FCC #2	1	76.8	0.017	1.424	1.302	0.032	
2441.0	39	Bluetooth	11.85	10.31	0.040	10 mm [Front]	FCC #2	1	76.8	0.005	1.424	1.302	0.010	
2441.0	39	Bluetooth	11.85	10.31	-0.160	10 mm [Rear]	FCC #2	1	76.8	0.021	1.424	1.302	0.039	A52
2441.0	39	Bluetooth	11.85	10.31	0.140	10 mm [Left]	FCC #2	1	76.8	0.010	1.424	1.302	0.018	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

11.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

Table 11.4.1 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5260.0	52	802.11a (Ant.1)	15.00	14.63	-0.010	0 mm [Top]	FCC #2	0.409	6	97.6	0.453	1.089	1.025	0.505	A62
5260.0	52	802.11a (Ant.1)	15.00	14.63	-0.030	0 mm [Front]	FCC #2	0.272	6	97.6	0.293	1.089	1.025	0.327	
5260.0	52	802.11a (Ant.1)	15.00	14.63	-0.120	0 mm [Rear]	FCC #2	0.261	6	97.6	0.275	1.089	1.025	0.307	
5260.0	52	802.11a (Ant.1)	15.00	14.63	-0.030	0 mm [Left]	FCC #2	0.159	6	97.6	0.150	1.089	1.025	0.167	
5280.0	56	802.11a (Ant.2)	15.00	14.83	0.060	0 mm [Top]	FCC #2	0.022	6	97.6	0.012	1.040	1.025	0.013	
5280.0	56	802.11a (Ant.2)	15.00	14.83	0.100	0 mm [Front]	FCC #2	0.009	6	97.6	0.007	1.040	1.025	0.008	
5280.0	56	802.11a (Ant.2)	15.00	14.83	0.010	0 mm [Rear]	FCC #2	0.726	6	97.6	0.901	1.040	1.025	0.960	A63
5280.0	56	802.11a (Ant.2)	15.00	14.83	-0.070	0 mm [Left]	FCC #2	0.085	6	97.6	0.091	1.040	1.025	0.097	
5280.0	56	802.11a (MIMO)	18.00	17.73	-0.180	0 mm [Top]	FCC #2	0.317	6	97.6	0.362	1.089	1.025	0.404	
5280.0	56	802.11a (MIMO)	18.00	17.73	0.190	0 mm [Front]	FCC #2	0.277	6	97.6	0.259	1.089	1.025	0.289	
5280.0	56	802.11a (MIMO)	18.00	17.73	-0.090	0 mm [Rear]	FCC #2	0.835	6	97.6	0.872	1.089	1.025	0.973	A64
5280.0	56	802.11a (MIMO)	18.00	17.73	-0.030	0 mm [Left]	FCC #2	0.220	6	97.6	0.190	1.089	1.025	0.212	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Table 11.4.2 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5660.0	132	802.11a (Ant.1)	15.00	14.75	-0.140	0 mm [Top]	FCC #2	0.571	6	97.6	0.596	1.059	1.019	0.643	A65
5660.0	132	802.11a (Ant.1)	15.00	14.75	0.000	0 mm [Front]	FCC #2	0.406	6	97.6	0.449	1.059	1.019	0.485	
5660.0	132	802.11a (Ant.1)	15.00	14.75	-0.120	0 mm [Rear]	FCC #2	0.500	6	97.6	0.590	1.059	1.019	0.637	
5660.0	132	802.11a (Ant.1)	15.00	14.75	-0.000	0 mm [Left]	FCC #2	0.253	6	97.6	0.256	1.059	1.019	0.276	
5660.0	132	802.11a (Ant.2)	15.00	14.93	-0.160	0 mm [Top]	FCC #2	0.038	6	97.6	0.026	1.016	1.019	0.027	
5660.0	132	802.11a (Ant.2)	15.00	14.93	0.060	0 mm [Front]	FCC #2	0.018	6	97.6	0.011	1.016	1.019	0.011	
5660.0	132	802.11a (Ant.2)	15.00	14.93	-0.020	0 mm [Rear]	FCC #2	1.100	6	97.6	1.340	1.016	1.019	1.387	A66
5660.0	132	802.11a (Ant.2)	15.00	14.93	0.000	0 mm [Left]	FCC #2	0.202	6	97.6	0.214	1.016	1.019	0.222	
5660.0	132	802.11a (MIMO)	18.00	17.85	0.090	0 mm [Top]	FCC #2	0.709	6	97.6	0.762	1.059	1.019	0.822	
5660.0	132	802.11a (MIMO)	18.00	17.85	0.020	0 mm [Front]	FCC #2	0.390	6	97.6	0.482	1.059	1.019	0.520	
5660.0	132	802.11a (MIMO)	18.00	17.85	-0.060	0 mm [Rear]	FCC #2	1.470	6	97.6	1.560	1.059	1.019	1.683	A67
5660.0	132	802.11a (MIMO)	18.00	17.85	-0.010	0 mm [Left]	FCC #2	0.433	6	97.6	0.413	1.059	1.019	0.446	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Table 11.4.3 UNII Phablet SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5825.0	165	802.11a (Ant.1)	12.00	11.46	0.090	0 mm [Top]	FCC #2	0.222	6	97.6	0.275	1.132	1.025	0.319	A68
5825.0	165	802.11a (Ant.1)	12.00	11.46	-0.130	0 mm [Front]	FCC #2	0.166	6	97.6	0.185	1.132	1.025	0.215	
5825.0	165	802.11a (Ant.1)	12.00	11.46	-0.130	0 mm [Rear]	FCC #2	0.241	6	97.6	0.270	1.132	1.025	0.313	
5825.0	165	802.11a (Ant.1)	12.00	11.46	0.140	0 mm [Left]	FCC #2	0.109	6	97.6	0.106	1.132	1.025	0.123	
5825.0	165	802.11a (Ant.2)	12.00	11.66	-0.150	0 mm [Top]	FCC #2	0.010	6	97.6	0.006	1.081	1.025	0.007	
5825.0	165	802.11a (Ant.2)	12.00	11.66	-0.130	0 mm [Front]	FCC #2	0.001	6	97.6	0.003	1.081	1.025	0.003	
5825.0	165	802.11a (Ant.2)	12.00	11.66	0.070	0 mm [Rear]	FCC #2	0.498	6	97.6	0.486	1.081	1.025	0.538	A69
5825.0	165	802.11a (Ant.2)	12.00	11.66	0.000	0 mm [Left]	FCC #2	0.064	6	97.6	0.066	1.081	1.025	0.073	
5825.0	165	802.11a (MIMO)	15.00	14.57	0.130	0 mm [Top]	FCC #2	0.244	6	97.6	0.298	1.132	1.025	0.346	
5825.0	165	802.11a (MIMO)	15.00	14.57	-0.080	0 mm [Front]	FCC #2	0.191	6	97.6	0.198	1.132	1.025	0.230	
5825.0	165	802.11a (MIMO)	15.00	14.57	-0.160	0 mm [Rear]	FCC #2	0.456	6	97.6	0.533	1.132	1.025	0.618	A70
5825.0	165	802.11a (MIMO)	15.00	14.57	-0.180	0 mm [Left]	FCC #2	0.151	6	97.6	0.141	1.132	1.025	0.164	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Note : UNII-3 Band CH 165 (5825 MHz) is not support Hotspot mode as described on operational description of this device, so phablet SAR is tested on this CH.

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported boy-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not > $\frac{1}{2}$ dB, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required.
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. Per KDB Publication 941225 D05Av01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
6. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
7. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r05. Testing was performed using UL-DL configuration 0 with 6 UL sub frames and 2S sub frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633 (cf=1.58).
8. SAR test reduction is applied using the following criteria:
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.
6. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by making a SAR measurement with both antennas transmitting simultaneously.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.

12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

12.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 12.3.1 Simultaneous Transmission Scenarios

No.	Capable TX Configuration	GSM 850/1900 (Voice)	GPRS/EDGE 850/1900 (Data)	WCDMA B5/B4/B2 (Voice)	WCDMA B5/B4/B2 (Data)	LTE B12/B17/B13/ B5/B4/B2/B41	WiFi 2.4GHz 802.11b/g/n/ac	WiFi 5GHz 802.11a/n/ac	Bluetooth 2.4GHz
1	GSM 850/1900 (Voice)		No	No	No	No	Yes	Yes	Yes
2	GPRS/EDGE 850/1900 (Data)	No		No	No	No	Yes	Yes	Yes
3	WCDMA B5/B4/B2 (Voice)	No	No		No	No	Yes	Yes	Yes
4	WCDMA B5/B4/B2 (Data)	No	No	No		No	Yes	Yes	Yes
5	LTE B12/B17/B13/ B5/B4/B2/B41	No	No	No	No		Yes	Yes	Yes
6	WiFi 2.4GHz 802.11b/g/n/ac	Yes	Yes	Yes	Yes	Yes		Yes	No
7	WiFi 5GHz 802.11a/n/ac	Yes	Yes	Yes	Yes	Yes	Yes		Yes
8	Bluetooth 2.4GHz	Yes	Yes	Yes	Yes	Yes	No	Yes	

Table 12.3.2 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Phablet SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	Yes	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
3	GSM Voice + Bluetooth 2.4 GHz	Yes	Yes	N/A	Yes	
4	GSM Voice + Wi-Fi 2.4 GHz MIMO	Yes	Yes	N/A	Yes	
5	GSM Voice + Wi-Fi 5 GHz MIMO	Yes	Yes	N/A	Yes	
6	GSM Voice + Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 5GHz Ant.2	Yes	Yes	N/A	Yes	
7	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	N/A	Yes	
8	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
9	WCDMA + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
10	WCDMA + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
11	WCDMA + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	Yes	
12	WCDMA + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
13	WCDMA + Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 5GHz Ant.2	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
14	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
15	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
16	LTE + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
17	LTE + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
18	LTE + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	Yes	
19	LTE + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
20	LTE + Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 5GHz Ant.2	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
21	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
22	GPRS/EDGE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
23	GPRS/EDGE + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
24	GPRS/EDGE + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
25	GPRS/EDGE + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	Yes	
26	GPRS/EDGE + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
27	GPRS/EDGE + Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 5GHz Ant.2	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
28	GPRS/EDGE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.

Notes:

1. WiFi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC).
2. WiFi 5GHz is supported Hotspot in UNII B1,B3 and WiFi-Direct(GO/GC) in UNII B1,B3.
3. LTE, WCDMA, GPRS/EDGE is supported Hotspot.
4. VoIP is supported in LTE, WCDMA, GSM
5. Bluetooth and WiFi can not transmit simultaneously at 2.4G band.
6. GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.
7. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
8. Per the manufacturer, WiFi Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WiFi direct are included in the above table.

12.4 Head SAR Simultaneous Transmission Analysis

Table 12.4.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.090	0.008	0.227	0.145	0.235
		Right Touch	0.065	0.356	0.018	0.421	0.083	0.439
		Left Tilt	0.049	0.143	0.011	0.192	0.060	0.203
		Right Tilt	0.041	0.313	0.014	0.354	0.055	0.368
	GPRS 850	Left Touch	0.138	0.090	0.008	0.228	0.146	0.236
		Right Touch	0.075	0.356	0.018	0.431	0.093	0.449
		Left Tilt	0.050	0.143	0.011	0.193	0.061	0.204
		Right Tilt	0.042	0.313	0.014	0.355	0.056	0.369
	GSM 1900	Left Touch	0.067	0.090	0.008	0.157	0.075	0.165
		Right Touch	0.061	0.356	0.018	0.417	0.079	0.435
		Left Tilt	0.033	0.143	0.011	0.176	0.044	0.187
		Right Tilt	0.032	0.313	0.014	0.345	0.046	0.359
	GPRS 1900	Left Touch	0.089	0.090	0.008	0.179	0.097	0.187
		Right Touch	0.077	0.356	0.018	0.433	0.095	0.451
		Left Tilt	0.040	0.143	0.011	0.183	0.051	0.194
		Right Tilt	0.040	0.313	0.014	0.353	0.054	0.367
	WCDMA 850	Left Touch	0.148	0.090	0.008	0.238	0.156	0.246
		Right Touch	0.096	0.356	0.018	0.452	0.114	0.470
		Left Tilt	0.056	0.143	0.011	0.199	0.067	0.210
		Right Tilt	0.058	0.313	0.014	0.371	0.072	0.385
	WCDMA 1700	Left Touch	0.062	0.090	0.008	0.152	0.070	0.160
		Right Touch	0.068	0.356	0.018	0.424	0.086	0.442
		Left Tilt	0.048	0.143	0.011	0.191	0.059	0.202
		Right Tilt	0.050	0.313	0.014	0.363	0.064	0.377
	WCDMA 1900	Left Touch	0.087	0.090	0.008	0.177	0.095	0.185
		Right Touch	0.091	0.356	0.018	0.447	0.109	0.465
		Left Tilt	0.040	0.143	0.011	0.183	0.051	0.194
		Right Tilt	0.038	0.313	0.014	0.351	0.052	0.365
	LTE Band 12	Left Touch	0.168	0.090	0.008	0.258	0.176	0.266
		Right Touch	0.187	0.356	0.018	0.543	0.205	0.561
		Left Tilt	0.083	0.143	0.011	0.226	0.094	0.237
		Right Tilt	0.063	0.313	0.014	0.376	0.077	0.390
	LTE Band 13	Left Touch	0.183	0.090	0.008	0.273	0.191	0.281
		Right Touch	0.154	0.356	0.018	0.510	0.172	0.528
		Left Tilt	0.082	0.143	0.011	0.225	0.093	0.236
		Right Tilt	0.086	0.313	0.014	0.399	0.100	0.413
	LTE Band 5	Left Touch	0.085	0.090	0.008	0.175	0.093	0.183
		Right Touch	0.065	0.356	0.018	0.421	0.083	0.439
		Left Tilt	0.033	0.143	0.011	0.176	0.044	0.187
		Right Tilt	0.034	0.313	0.014	0.347	0.048	0.361
	LTE Band 4	Left Touch	0.047	0.090	0.008	0.137	0.055	0.145
		Right Touch	0.059	0.356	0.018	0.415	0.077	0.433
		Left Tilt	0.026	0.143	0.011	0.169	0.037	0.180
		Right Tilt	0.028	0.313	0.014	0.341	0.042	0.355
	LTE Band 2	Left Touch	0.074	0.090	0.008	0.164	0.082	0.172
		Right Touch	0.082	0.356	0.018	0.438	0.100	0.456
		Left Tilt	0.045	0.143	0.011	0.188	0.056	0.199
		Right Tilt	0.047	0.313	0.014	0.360	0.061	0.374
	LTE Band 41	Left Touch	0.152	0.090	0.008	0.242	0.160	0.250
		Right Touch	0.356	0.356	0.018	0.712	0.374	0.730
		Left Tilt	0.101	0.143	0.011	0.244	0.112	0.255
		Right Tilt	0.076	0.313	0.014	0.389	0.090	0.403

Table 12.4.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1+ 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.090	0.015	0.227	0.152	0.242
		Right Touch	0.065	0.356	0.022	0.421	0.087	0.443
		Left Tilt	0.049	0.143	0.017	0.192	0.066	0.209
		Right Tilt	0.041	0.313	0.012	0.354	0.053	0.366
	GPRS 850	Left Touch	0.138	0.090	0.015	0.228	0.153	0.243
		Right Touch	0.075	0.356	0.022	0.431	0.097	0.453
		Left Tilt	0.050	0.143	0.017	0.193	0.067	0.210
		Right Tilt	0.042	0.313	0.012	0.355	0.054	0.367
	GSM 1900	Left Touch	0.067	0.090	0.015	0.157	0.082	0.172
		Right Touch	0.061	0.356	0.022	0.417	0.083	0.439
		Left Tilt	0.033	0.143	0.017	0.176	0.050	0.193
		Right Tilt	0.032	0.313	0.012	0.345	0.044	0.357
	GPRS 1900	Left Touch	0.089	0.090	0.015	0.179	0.104	0.194
		Right Touch	0.077	0.356	0.022	0.433	0.099	0.455
		Left Tilt	0.040	0.143	0.017	0.183	0.057	0.200
		Right Tilt	0.040	0.313	0.012	0.353	0.052	0.365
	WCDMA 850	Left Touch	0.148	0.090	0.015	0.238	0.163	0.253
		Right Touch	0.096	0.356	0.022	0.452	0.118	0.474
		Left Tilt	0.056	0.143	0.017	0.199	0.073	0.216
		Right Tilt	0.058	0.313	0.012	0.371	0.070	0.383
	WCDMA 1700	Left Touch	0.062	0.090	0.015	0.152	0.077	0.167
		Right Touch	0.068	0.356	0.022	0.424	0.090	0.446
		Left Tilt	0.048	0.143	0.017	0.191	0.065	0.208
		Right Tilt	0.050	0.313	0.012	0.363	0.062	0.375
	WCDMA 1900	Left Touch	0.087	0.090	0.015	0.177	0.102	0.192
		Right Touch	0.091	0.356	0.022	0.447	0.113	0.469
		Left Tilt	0.040	0.143	0.017	0.183	0.057	0.200
		Right Tilt	0.038	0.313	0.012	0.351	0.050	0.363
	LTE Band 12	Left Touch	0.168	0.090	0.015	0.258	0.183	0.273
		Right Touch	0.187	0.356	0.022	0.543	0.209	0.565
		Left Tilt	0.083	0.143	0.017	0.226	0.100	0.243
		Right Tilt	0.063	0.313	0.012	0.376	0.075	0.388
	LTE Band 13	Left Touch	0.183	0.090	0.015	0.273	0.198	0.288
		Right Touch	0.154	0.356	0.022	0.510	0.176	0.532
		Left Tilt	0.082	0.143	0.017	0.225	0.099	0.242
		Right Tilt	0.086	0.313	0.012	0.399	0.098	0.411
	LTE Band 5	Left Touch	0.085	0.090	0.015	0.175	0.100	0.190
		Right Touch	0.065	0.356	0.022	0.421	0.087	0.443
		Left Tilt	0.033	0.143	0.017	0.176	0.050	0.193
		Right Tilt	0.034	0.313	0.012	0.347	0.046	0.359
	LTE Band 4	Left Touch	0.047	0.090	0.015	0.137	0.062	0.152
		Right Touch	0.059	0.356	0.022	0.415	0.081	0.437
		Left Tilt	0.026	0.143	0.017	0.169	0.043	0.186
		Right Tilt	0.028	0.313	0.012	0.341	0.040	0.353
	LTE Band 2	Left Touch	0.074	0.090	0.015	0.164	0.089	0.179
		Right Touch	0.082	0.356	0.022	0.438	0.104	0.460
		Left Tilt	0.045	0.143	0.017	0.188	0.062	0.205
		Right Tilt	0.047	0.313	0.012	0.360	0.059	0.372
	LTE Band 41	Left Touch	0.152	0.090	0.015	0.242	0.167	0.257
		Right Touch	0.356	0.356	0.022	0.712	0.378	0.734
		Left Tilt	0.101	0.143	0.017	0.244	0.118	0.261
		Right Tilt	0.076	0.313	0.012	0.389	0.088	0.401

Table 12.4.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.8 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.090	0.010	0.227	0.147	0.237
		Right Touch	0.065	0.356	0.021	0.421	0.086	0.442
		Left Tilt	0.049	0.143	0.015	0.192	0.064	0.207
		Right Tilt	0.041	0.313	0.019	0.354	0.060	0.373
	GPRS 850	Left Touch	0.138	0.090	0.010	0.228	0.148	0.238
		Right Touch	0.075	0.356	0.021	0.431	0.096	0.452
		Left Tilt	0.050	0.143	0.015	0.193	0.065	0.208
		Right Tilt	0.042	0.313	0.019	0.355	0.061	0.374
	GSM 1900	Left Touch	0.067	0.090	0.010	0.157	0.077	0.167
		Right Touch	0.061	0.356	0.021	0.417	0.082	0.438
		Left Tilt	0.033	0.143	0.015	0.176	0.048	0.191
		Right Tilt	0.032	0.313	0.019	0.345	0.051	0.364
	GPRS 1900	Left Touch	0.089	0.090	0.010	0.179	0.099	0.189
		Right Touch	0.077	0.356	0.021	0.433	0.098	0.454
		Left Tilt	0.040	0.143	0.015	0.183	0.055	0.198
		Right Tilt	0.040	0.313	0.019	0.353	0.059	0.372
	WCDMA 850	Left Touch	0.148	0.090	0.010	0.238	0.158	0.248
		Right Touch	0.096	0.356	0.021	0.452	0.117	0.473
		Left Tilt	0.056	0.143	0.015	0.199	0.071	0.214
		Right Tilt	0.058	0.313	0.019	0.371	0.077	0.390
	WCDMA 1700	Left Touch	0.062	0.090	0.010	0.152	0.072	0.162
		Right Touch	0.068	0.356	0.021	0.424	0.089	0.445
		Left Tilt	0.048	0.143	0.015	0.191	0.063	0.206
		Right Tilt	0.050	0.313	0.019	0.363	0.069	0.382
	WCDMA 1900	Left Touch	0.087	0.090	0.010	0.177	0.097	0.187
		Right Touch	0.091	0.356	0.021	0.447	0.112	0.468
		Left Tilt	0.040	0.143	0.015	0.183	0.055	0.198
		Right Tilt	0.038	0.313	0.019	0.351	0.057	0.370
	LTE Band 12	Left Touch	0.168	0.090	0.010	0.258	0.178	0.268
		Right Touch	0.187	0.356	0.021	0.543	0.208	0.564
		Left Tilt	0.083	0.143	0.015	0.226	0.098	0.241
		Right Tilt	0.063	0.313	0.019	0.376	0.082	0.395
	LTE Band 13	Left Touch	0.183	0.090	0.010	0.273	0.193	0.283
		Right Touch	0.154	0.356	0.021	0.510	0.175	0.531
		Left Tilt	0.082	0.143	0.015	0.225	0.097	0.240
		Right Tilt	0.086	0.313	0.019	0.399	0.105	0.418
	LTE Band 5	Left Touch	0.085	0.090	0.010	0.175	0.095	0.185
		Right Touch	0.065	0.356	0.021	0.421	0.086	0.442
		Left Tilt	0.033	0.143	0.015	0.176	0.048	0.191
		Right Tilt	0.034	0.313	0.019	0.347	0.053	0.366
	LTE Band 4	Left Touch	0.047	0.090	0.010	0.137	0.057	0.147
		Right Touch	0.059	0.356	0.021	0.415	0.080	0.436
		Left Tilt	0.026	0.143	0.015	0.169	0.041	0.184
		Right Tilt	0.028	0.313	0.019	0.341	0.047	0.360
	LTE Band 2	Left Touch	0.074	0.090	0.010	0.164	0.084	0.174
		Right Touch	0.082	0.356	0.021	0.438	0.103	0.459
		Left Tilt	0.045	0.143	0.015	0.188	0.060	0.203
		Right Tilt	0.047	0.313	0.019	0.360	0.066	0.379
	LTE Band 41	Left Touch	0.152	0.090	0.010	0.242	0.162	0.252
		Right Touch	0.356	0.356	0.021	0.712	0.377	0.733
		Left Tilt	0.101	0.143	0.015	0.244	0.116	0.259
		Right Tilt	0.076	0.313	0.019	0.389	0.095	0.408

Table 12.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.287	0.174	0.424	0.461
		Right Touch	0.065	0.115	0.587	0.180	0.652	0.767
		Left Tilt	0.049	0.059	0.344	0.108	0.393	0.452
		Right Tilt	0.041	0.134	0.654	0.175	0.695	0.829
	GPRS 850	Left Touch	0.138	0.037	0.287	0.175	0.425	0.462
		Right Touch	0.075	0.115	0.587	0.190	0.662	0.777
		Left Tilt	0.050	0.059	0.344	0.109	0.394	0.453
		Right Tilt	0.042	0.134	0.654	0.176	0.696	0.830
	GSM 1900	Left Touch	0.067	0.037	0.287	0.104	0.354	0.391
		Right Touch	0.061	0.115	0.587	0.176	0.648	0.763
		Left Tilt	0.033	0.059	0.344	0.092	0.377	0.436
		Right Tilt	0.032	0.134	0.654	0.166	0.686	0.820
	GPRS 1900	Left Touch	0.089	0.037	0.287	0.126	0.376	0.413
		Right Touch	0.077	0.115	0.587	0.192	0.664	0.779
		Left Tilt	0.040	0.059	0.344	0.099	0.384	0.443
		Right Tilt	0.040	0.134	0.654	0.174	0.694	0.828
	WCDMA 850	Left Touch	0.148	0.037	0.287	0.185	0.435	0.472
		Right Touch	0.096	0.115	0.587	0.211	0.683	0.798
		Left Tilt	0.056	0.059	0.344	0.115	0.400	0.459
		Right Tilt	0.058	0.134	0.654	0.192	0.712	0.846
	WCDMA 1700	Left Touch	0.062	0.037	0.287	0.099	0.349	0.386
		Right Touch	0.068	0.115	0.587	0.183	0.655	0.770
		Left Tilt	0.048	0.059	0.344	0.107	0.392	0.451
		Right Tilt	0.050	0.134	0.654	0.184	0.704	0.838
	WCDMA 1900	Left Touch	0.087	0.037	0.287	0.124	0.374	0.411
		Right Touch	0.091	0.115	0.587	0.206	0.678	0.793
		Left Tilt	0.040	0.059	0.344	0.099	0.384	0.443
		Right Tilt	0.038	0.134	0.654	0.172	0.692	0.826
	LTE Band 12	Left Touch	0.168	0.037	0.287	0.205	0.455	0.492
		Right Touch	0.187	0.115	0.587	0.302	0.774	0.889
		Left Tilt	0.083	0.059	0.344	0.142	0.427	0.486
		Right Tilt	0.063	0.134	0.654	0.197	0.717	0.851
	LTE Band 13	Left Touch	0.183	0.037	0.287	0.220	0.470	0.507
		Right Touch	0.154	0.115	0.587	0.269	0.741	0.856
		Left Tilt	0.082	0.059	0.344	0.141	0.426	0.485
		Right Tilt	0.086	0.134	0.654	0.220	0.740	0.874
	LTE Band 5	Left Touch	0.085	0.037	0.287	0.122	0.372	0.409
		Right Touch	0.065	0.115	0.587	0.180	0.652	0.767
		Left Tilt	0.033	0.059	0.344	0.092	0.377	0.436
		Right Tilt	0.034	0.134	0.654	0.168	0.688	0.822
	LTE Band 4	Left Touch	0.047	0.037	0.287	0.084	0.334	0.371
		Right Touch	0.059	0.115	0.587	0.174	0.646	0.761
		Left Tilt	0.026	0.059	0.344	0.085	0.370	0.429
		Right Tilt	0.028	0.134	0.654	0.162	0.682	0.816
	LTE Band 2	Left Touch	0.074	0.037	0.287	0.111	0.361	0.398
		Right Touch	0.082	0.115	0.587	0.197	0.669	0.784
		Left Tilt	0.045	0.059	0.344	0.104	0.389	0.448
		Right Tilt	0.047	0.134	0.654	0.181	0.701	0.835
	LTE Band 41	Left Touch	0.152	0.037	0.287	0.189	0.439	0.476
		Right Touch	0.356	0.115	0.587	0.471	0.943	1.058
		Left Tilt	0.101	0.059	0.344	0.160	0.445	0.504
		Right Tilt	0.076	0.134	0.654	0.210	0.730	0.864

Table 12.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.008	0.174	0.145	0.182
		Right Touch	0.065	0.115	0.018	0.180	0.083	0.198
		Left Tilt	0.049	0.059	0.011	0.108	0.060	0.119
		Right Tilt	0.041	0.134	0.014	0.175	0.055	0.189
	GPRS 850	Left Touch	0.138	0.037	0.008	0.175	0.146	0.183
		Right Touch	0.075	0.115	0.018	0.190	0.093	0.208
		Left Tilt	0.050	0.059	0.011	0.109	0.061	0.120
		Right Tilt	0.042	0.134	0.014	0.176	0.056	0.190
	GSM 1900	Left Touch	0.067	0.037	0.008	0.104	0.075	0.112
		Right Touch	0.061	0.115	0.018	0.176	0.079	0.194
		Left Tilt	0.033	0.059	0.011	0.092	0.044	0.103
		Right Tilt	0.032	0.134	0.014	0.166	0.046	0.180
	GPRS 1900	Left Touch	0.089	0.037	0.008	0.126	0.097	0.134
		Right Touch	0.077	0.115	0.018	0.192	0.095	0.210
		Left Tilt	0.040	0.059	0.011	0.099	0.051	0.110
		Right Tilt	0.040	0.134	0.014	0.174	0.054	0.188
	WCDMA 850	Left Touch	0.148	0.037	0.008	0.185	0.156	0.193
		Right Touch	0.096	0.115	0.018	0.211	0.114	0.229
		Left Tilt	0.056	0.059	0.011	0.115	0.067	0.126
		Right Tilt	0.058	0.134	0.014	0.192	0.072	0.206
	WCDMA 1700	Left Touch	0.062	0.037	0.008	0.099	0.070	0.107
		Right Touch	0.068	0.115	0.018	0.183	0.086	0.201
		Left Tilt	0.048	0.059	0.011	0.107	0.059	0.118
		Right Tilt	0.050	0.134	0.014	0.184	0.064	0.198
	WCDMA 1900	Left Touch	0.087	0.037	0.008	0.124	0.095	0.132
		Right Touch	0.091	0.115	0.018	0.206	0.109	0.224
		Left Tilt	0.040	0.059	0.011	0.099	0.051	0.110
		Right Tilt	0.038	0.134	0.014	0.172	0.052	0.186
	LTE Band 12	Left Touch	0.168	0.037	0.008	0.205	0.176	0.213
		Right Touch	0.187	0.115	0.018	0.302	0.205	0.320
		Left Tilt	0.083	0.059	0.011	0.142	0.094	0.153
		Right Tilt	0.063	0.134	0.014	0.197	0.077	0.211
	LTE Band 13	Left Touch	0.183	0.037	0.008	0.220	0.191	0.228
		Right Touch	0.154	0.115	0.018	0.269	0.172	0.287
		Left Tilt	0.082	0.059	0.011	0.141	0.093	0.152
		Right Tilt	0.086	0.134	0.014	0.220	0.100	0.234
	LTE Band 5	Left Touch	0.085	0.037	0.008	0.122	0.093	0.130
		Right Touch	0.065	0.115	0.018	0.180	0.083	0.198
		Left Tilt	0.033	0.059	0.011	0.092	0.044	0.103
		Right Tilt	0.034	0.134	0.014	0.168	0.048	0.182
	LTE Band 4	Left Touch	0.047	0.037	0.008	0.084	0.055	0.092
		Right Touch	0.059	0.115	0.018	0.174	0.077	0.192
		Left Tilt	0.026	0.059	0.011	0.085	0.037	0.096
		Right Tilt	0.028	0.134	0.014	0.162	0.042	0.176
	LTE Band 2	Left Touch	0.074	0.037	0.008	0.111	0.082	0.119
		Right Touch	0.082	0.115	0.018	0.197	0.100	0.215
		Left Tilt	0.045	0.059	0.011	0.104	0.056	0.115
		Right Tilt	0.047	0.134	0.014	0.181	0.061	0.195
	LTE Band 41	Left Touch	0.152	0.037	0.008	0.189	0.160	0.197
		Right Touch	0.356	0.115	0.018	0.471	0.374	0.489
		Left Tilt	0.101	0.059	0.011	0.160	0.112	0.171
		Right Tilt	0.076	0.134	0.014	0.210	0.090	0.224

Table 12.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.259	0.174	0.396	0.433
		Right Touch	0.065	0.115	0.365	0.180	0.430	0.545
		Left Tilt	0.049	0.059	0.309	0.108	0.358	0.417
		Right Tilt	0.041	0.134	0.517	0.175	0.558	0.692
	GPRS 850	Left Touch	0.138	0.037	0.259	0.175	0.397	0.434
		Right Touch	0.075	0.115	0.365	0.190	0.440	0.555
		Left Tilt	0.050	0.059	0.309	0.109	0.359	0.418
		Right Tilt	0.042	0.134	0.517	0.176	0.559	0.693
	GSM 1900	Left Touch	0.067	0.037	0.259	0.104	0.326	0.363
		Right Touch	0.061	0.115	0.365	0.176	0.426	0.541
		Left Tilt	0.033	0.059	0.309	0.092	0.342	0.401
		Right Tilt	0.032	0.134	0.517	0.166	0.549	0.683
	GPRS 1900	Left Touch	0.089	0.037	0.259	0.126	0.348	0.385
		Right Touch	0.077	0.115	0.365	0.192	0.442	0.557
		Left Tilt	0.040	0.059	0.309	0.099	0.349	0.408
		Right Tilt	0.040	0.134	0.517	0.174	0.557	0.691
	WCDMA 850	Left Touch	0.148	0.037	0.259	0.185	0.407	0.444
		Right Touch	0.096	0.115	0.365	0.211	0.461	0.576
		Left Tilt	0.056	0.059	0.309	0.115	0.365	0.424
		Right Tilt	0.058	0.134	0.517	0.192	0.575	0.709
	WCDMA 1700	Left Touch	0.062	0.037	0.259	0.099	0.321	0.358
		Right Touch	0.068	0.115	0.365	0.183	0.433	0.548
		Left Tilt	0.048	0.059	0.309	0.107	0.357	0.416
		Right Tilt	0.050	0.134	0.517	0.184	0.567	0.701
	WCDMA 1900	Left Touch	0.087	0.037	0.259	0.124	0.346	0.383
		Right Touch	0.091	0.115	0.365	0.206	0.456	0.571
		Left Tilt	0.040	0.059	0.309	0.099	0.349	0.408
		Right Tilt	0.038	0.134	0.517	0.172	0.555	0.689
	LTE Band 12	Left Touch	0.168	0.037	0.259	0.205	0.427	0.464
		Right Touch	0.187	0.115	0.365	0.302	0.552	0.667
		Left Tilt	0.083	0.059	0.309	0.142	0.392	0.451
		Right Tilt	0.063	0.134	0.517	0.197	0.580	0.714
	LTE Band 13	Left Touch	0.183	0.037	0.259	0.220	0.442	0.479
		Right Touch	0.154	0.115	0.365	0.269	0.519	0.634
		Left Tilt	0.082	0.059	0.309	0.141	0.391	0.450
		Right Tilt	0.086	0.134	0.517	0.220	0.603	0.737
	LTE Band 5	Left Touch	0.085	0.037	0.259	0.122	0.344	0.381
		Right Touch	0.065	0.115	0.365	0.180	0.430	0.545
		Left Tilt	0.033	0.059	0.309	0.092	0.342	0.401
		Right Tilt	0.034	0.134	0.517	0.168	0.551	0.685
	LTE Band 4	Left Touch	0.047	0.037	0.259	0.084	0.306	0.343
		Right Touch	0.059	0.115	0.365	0.174	0.424	0.539
		Left Tilt	0.026	0.059	0.309	0.085	0.335	0.394
		Right Tilt	0.028	0.134	0.517	0.162	0.545	0.679
	LTE Band 2	Left Touch	0.074	0.037	0.259	0.111	0.333	0.370
		Right Touch	0.082	0.115	0.365	0.197	0.447	0.562
		Left Tilt	0.045	0.059	0.309	0.104	0.354	0.413
		Right Tilt	0.047	0.134	0.517	0.181	0.564	0.698
	LTE Band 41	Left Touch	0.152	0.037	0.259	0.189	0.411	0.448
		Right Touch	0.356	0.115	0.365	0.471	0.721	0.836
		Left Tilt	0.101	0.059	0.309	0.160	0.410	0.469
		Right Tilt	0.076	0.134	0.517	0.210	0.593	0.727

Table 12.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.322	0.174	0.459	0.496
		Right Touch	0.065	0.115	0.641	0.180	0.706	0.821
		Left Tilt	0.049	0.059	0.436	0.108	0.485	0.544
		Right Tilt	0.041	0.134	0.747	0.175	0.788	0.922
	GPRS 850	Left Touch	0.138	0.037	0.322	0.175	0.460	0.497
		Right Touch	0.075	0.115	0.641	0.190	0.716	0.831
		Left Tilt	0.050	0.059	0.436	0.109	0.486	0.545
		Right Tilt	0.042	0.134	0.747	0.176	0.789	0.923
	GSM 1900	Left Touch	0.067	0.037	0.322	0.104	0.389	0.426
		Right Touch	0.061	0.115	0.641	0.176	0.702	0.817
		Left Tilt	0.033	0.059	0.436	0.092	0.469	0.528
		Right Tilt	0.032	0.134	0.747	0.166	0.779	0.913
	GPRS 1900	Left Touch	0.089	0.037	0.322	0.126	0.411	0.448
		Right Touch	0.077	0.115	0.641	0.192	0.718	0.833
		Left Tilt	0.040	0.059	0.436	0.099	0.476	0.535
		Right Tilt	0.040	0.134	0.747	0.174	0.787	0.921
	WCDMA 850	Left Touch	0.148	0.037	0.322	0.185	0.470	0.507
		Right Touch	0.096	0.115	0.641	0.211	0.737	0.852
		Left Tilt	0.056	0.059	0.436	0.115	0.492	0.551
		Right Tilt	0.058	0.134	0.747	0.192	0.805	0.939
	WCDMA 1700	Left Touch	0.062	0.037	0.322	0.099	0.384	0.421
		Right Touch	0.068	0.115	0.641	0.183	0.709	0.824
		Left Tilt	0.048	0.059	0.436	0.107	0.484	0.543
		Right Tilt	0.050	0.134	0.747	0.184	0.797	0.931
	WCDMA 1900	Left Touch	0.087	0.037	0.322	0.124	0.409	0.446
		Right Touch	0.091	0.115	0.641	0.206	0.732	0.847
		Left Tilt	0.040	0.059	0.436	0.099	0.476	0.535
		Right Tilt	0.038	0.134	0.747	0.172	0.785	0.919
	LTE Band 12	Left Touch	0.168	0.037	0.322	0.205	0.490	0.527
		Right Touch	0.187	0.115	0.641	0.302	0.828	0.943
		Left Tilt	0.083	0.059	0.436	0.142	0.519	0.578
		Right Tilt	0.063	0.134	0.747	0.197	0.810	0.944
	LTE Band 13	Left Touch	0.183	0.037	0.322	0.220	0.505	0.542
		Right Touch	0.154	0.115	0.641	0.269	0.795	0.910
		Left Tilt	0.082	0.059	0.436	0.141	0.518	0.577
		Right Tilt	0.086	0.134	0.747	0.220	0.833	0.967
	LTE Band 5	Left Touch	0.085	0.037	0.322	0.122	0.407	0.444
		Right Touch	0.065	0.115	0.641	0.180	0.706	0.821
		Left Tilt	0.033	0.059	0.436	0.092	0.469	0.528
		Right Tilt	0.034	0.134	0.747	0.168	0.781	0.915
	LTE Band 4	Left Touch	0.047	0.037	0.322	0.084	0.369	0.406
		Right Touch	0.059	0.115	0.641	0.174	0.700	0.815
		Left Tilt	0.026	0.059	0.436	0.085	0.462	0.521
		Right Tilt	0.028	0.134	0.747	0.162	0.775	0.909
	LTE Band 2	Left Touch	0.074	0.037	0.322	0.111	0.396	0.433
		Right Touch	0.082	0.115	0.641	0.197	0.723	0.838
		Left Tilt	0.045	0.059	0.436	0.104	0.481	0.540
		Right Tilt	0.047	0.134	0.747	0.181	0.794	0.928
	LTE Band 41	Left Touch	0.152	0.037	0.322	0.189	0.474	0.511
		Right Touch	0.356	0.115	0.641	0.471	0.997	1.112
		Left Tilt	0.101	0.059	0.436	0.160	0.537	0.596
		Right Tilt	0.076	0.134	0.747	0.210	0.823	0.957

Table 12.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.015	0.174	0.152	0.189
		Right Touch	0.065	0.115	0.022	0.180	0.087	0.202
		Left Tilt	0.049	0.059	0.017	0.108	0.066	0.125
		Right Tilt	0.041	0.134	0.012	0.175	0.053	0.187
	GPRS 850	Left Touch	0.138	0.037	0.015	0.175	0.153	0.190
		Right Touch	0.075	0.115	0.022	0.190	0.097	0.212
		Left Tilt	0.050	0.059	0.017	0.109	0.067	0.126
		Right Tilt	0.042	0.134	0.012	0.176	0.054	0.188
	GSM 1900	Left Touch	0.067	0.037	0.015	0.104	0.082	0.119
		Right Touch	0.061	0.115	0.022	0.176	0.083	0.198
		Left Tilt	0.033	0.059	0.017	0.092	0.050	0.109
		Right Tilt	0.032	0.134	0.012	0.166	0.044	0.178
	GPRS 1900	Left Touch	0.089	0.037	0.015	0.126	0.104	0.141
		Right Touch	0.077	0.115	0.022	0.192	0.099	0.214
		Left Tilt	0.040	0.059	0.017	0.099	0.057	0.116
		Right Tilt	0.040	0.134	0.012	0.174	0.052	0.186
	WCDMA 850	Left Touch	0.148	0.037	0.015	0.185	0.163	0.200
		Right Touch	0.096	0.115	0.022	0.211	0.118	0.233
		Left Tilt	0.056	0.059	0.017	0.115	0.073	0.132
		Right Tilt	0.058	0.134	0.012	0.192	0.070	0.204
	WCDMA 1700	Left Touch	0.062	0.037	0.015	0.099	0.077	0.114
		Right Touch	0.068	0.115	0.022	0.183	0.090	0.205
		Left Tilt	0.048	0.059	0.017	0.107	0.065	0.124
		Right Tilt	0.050	0.134	0.012	0.184	0.062	0.196
	WCDMA 1900	Left Touch	0.087	0.037	0.015	0.124	0.102	0.139
		Right Touch	0.091	0.115	0.022	0.206	0.113	0.228
		Left Tilt	0.040	0.059	0.017	0.099	0.057	0.116
		Right Tilt	0.038	0.134	0.012	0.172	0.050	0.184
	LTE Band 12	Left Touch	0.168	0.037	0.015	0.205	0.183	0.220
		Right Touch	0.187	0.115	0.022	0.302	0.209	0.324
		Left Tilt	0.083	0.059	0.017	0.142	0.100	0.159
		Right Tilt	0.063	0.134	0.012	0.197	0.075	0.209
	LTE Band 13	Left Touch	0.183	0.037	0.015	0.220	0.198	0.235
		Right Touch	0.154	0.115	0.022	0.269	0.176	0.291
		Left Tilt	0.082	0.059	0.017	0.141	0.099	0.158
		Right Tilt	0.086	0.134	0.012	0.220	0.098	0.232
	LTE Band 5	Left Touch	0.085	0.037	0.015	0.122	0.100	0.137
		Right Touch	0.065	0.115	0.022	0.180	0.087	0.202
		Left Tilt	0.033	0.059	0.017	0.092	0.050	0.109
		Right Tilt	0.034	0.134	0.012	0.168	0.046	0.180
	LTE Band 4	Left Touch	0.047	0.037	0.015	0.084	0.062	0.099
		Right Touch	0.059	0.115	0.022	0.174	0.081	0.196
		Left Tilt	0.026	0.059	0.017	0.085	0.043	0.102
		Right Tilt	0.028	0.134	0.012	0.162	0.040	0.174
	LTE Band 2	Left Touch	0.074	0.037	0.015	0.111	0.089	0.126
		Right Touch	0.082	0.115	0.022	0.197	0.104	0.219
		Left Tilt	0.045	0.059	0.017	0.104	0.062	0.121
		Right Tilt	0.047	0.134	0.012	0.181	0.059	0.193
	LTE Band 41	Left Touch	0.152	0.037	0.015	0.189	0.167	0.204
		Right Touch	0.356	0.115	0.022	0.471	0.378	0.493
		Left Tilt	0.101	0.059	0.017	0.160	0.118	0.177
		Right Tilt	0.076	0.134	0.012	0.210	0.088	0.222

Table 12.4.9 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.345	0.174	0.482	0.519
		Right Touch	0.065	0.115	0.704	0.180	0.769	0.884
		Left Tilt	0.049	0.059	0.445	0.108	0.494	0.553
		Right Tilt	0.041	0.134	0.777	0.175	0.818	0.952
	GPRS 850	Left Touch	0.138	0.037	0.345	0.175	0.483	0.520
		Right Touch	0.075	0.115	0.704	0.190	0.779	0.894
		Left Tilt	0.050	0.059	0.445	0.109	0.495	0.554
		Right Tilt	0.042	0.134	0.777	0.176	0.819	0.953
	GSM 1900	Left Touch	0.067	0.037	0.345	0.104	0.412	0.449
		Right Touch	0.061	0.115	0.704	0.176	0.765	0.880
		Left Tilt	0.033	0.059	0.445	0.092	0.478	0.537
		Right Tilt	0.032	0.134	0.777	0.166	0.809	0.943
	GPRS 1900	Left Touch	0.089	0.037	0.345	0.126	0.434	0.471
		Right Touch	0.077	0.115	0.704	0.192	0.781	0.896
		Left Tilt	0.040	0.059	0.445	0.099	0.485	0.544
		Right Tilt	0.040	0.134	0.777	0.174	0.817	0.951
	WCDMA 850	Left Touch	0.148	0.037	0.345	0.185	0.493	0.530
		Right Touch	0.096	0.115	0.704	0.211	0.800	0.915
		Left Tilt	0.056	0.059	0.445	0.115	0.501	0.560
		Right Tilt	0.058	0.134	0.777	0.192	0.835	0.969
	WCDMA 1700	Left Touch	0.062	0.037	0.345	0.099	0.407	0.444
		Right Touch	0.068	0.115	0.704	0.183	0.772	0.887
		Left Tilt	0.048	0.059	0.445	0.107	0.493	0.552
		Right Tilt	0.050	0.134	0.777	0.184	0.827	0.961
	WCDMA 1900	Left Touch	0.087	0.037	0.345	0.124	0.432	0.469
		Right Touch	0.091	0.115	0.704	0.206	0.795	0.910
		Left Tilt	0.040	0.059	0.445	0.099	0.485	0.544
		Right Tilt	0.038	0.134	0.777	0.172	0.815	0.949
	LTE Band 12	Left Touch	0.168	0.037	0.345	0.205	0.513	0.550
		Right Touch	0.187	0.115	0.704	0.302	0.891	1.006
		Left Tilt	0.083	0.059	0.445	0.142	0.528	0.587
		Right Tilt	0.063	0.134	0.777	0.197	0.840	0.974
	LTE Band 13	Left Touch	0.183	0.037	0.345	0.220	0.528	0.565
		Right Touch	0.154	0.115	0.704	0.269	0.858	0.973
		Left Tilt	0.082	0.059	0.445	0.141	0.527	0.586
		Right Tilt	0.086	0.134	0.777	0.220	0.863	0.997
	LTE Band 5	Left Touch	0.085	0.037	0.345	0.122	0.430	0.467
		Right Touch	0.065	0.115	0.704	0.180	0.769	0.884
		Left Tilt	0.033	0.059	0.445	0.092	0.478	0.537
		Right Tilt	0.034	0.134	0.777	0.168	0.811	0.945
	LTE Band 4	Left Touch	0.047	0.037	0.345	0.084	0.392	0.429
		Right Touch	0.059	0.115	0.704	0.174	0.763	0.878
		Left Tilt	0.026	0.059	0.445	0.085	0.471	0.530
		Right Tilt	0.028	0.134	0.777	0.162	0.805	0.939
	LTE Band 2	Left Touch	0.074	0.037	0.345	0.111	0.419	0.456
		Right Touch	0.082	0.115	0.704	0.197	0.786	0.901
		Left Tilt	0.045	0.059	0.445	0.104	0.490	0.549
		Right Tilt	0.047	0.134	0.777	0.181	0.824	0.958
	LTE Band 41	Left Touch	0.152	0.037	0.345	0.189	0.497	0.534
		Right Touch	0.356	0.115	0.704	0.471	1.060	1.175
		Left Tilt	0.101	0.059	0.445	0.160	0.546	0.605
		Right Tilt	0.076	0.134	0.777	0.210	0.853	0.987

Table 12.4.10 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.145	0.174	0.282	0.319
		Right Touch	0.065	0.115	0.220	0.180	0.285	0.400
		Left Tilt	0.049	0.059	0.189	0.108	0.238	0.297
		Right Tilt	0.041	0.134	0.321	0.175	0.362	0.496
	GPRS 850	Left Touch	0.138	0.037	0.145	0.175	0.283	0.320
		Right Touch	0.075	0.115	0.220	0.190	0.295	0.410
		Left Tilt	0.050	0.059	0.189	0.109	0.239	0.298
		Right Tilt	0.042	0.134	0.321	0.176	0.363	0.497
	GSM 1900	Left Touch	0.067	0.037	0.145	0.104	0.212	0.249
		Right Touch	0.061	0.115	0.220	0.176	0.281	0.396
		Left Tilt	0.033	0.059	0.189	0.092	0.222	0.281
		Right Tilt	0.032	0.134	0.321	0.166	0.353	0.487
	GPRS 1900	Left Touch	0.089	0.037	0.145	0.126	0.234	0.271
		Right Touch	0.077	0.115	0.220	0.192	0.297	0.412
		Left Tilt	0.040	0.059	0.189	0.099	0.229	0.288
		Right Tilt	0.040	0.134	0.321	0.174	0.361	0.495
	WCDMA 850	Left Touch	0.148	0.037	0.145	0.185	0.293	0.330
		Right Touch	0.096	0.115	0.220	0.211	0.316	0.431
		Left Tilt	0.056	0.059	0.189	0.115	0.245	0.304
		Right Tilt	0.058	0.134	0.321	0.192	0.379	0.513
	WCDMA 1700	Left Touch	0.062	0.037	0.145	0.099	0.207	0.244
		Right Touch	0.068	0.115	0.220	0.183	0.288	0.403
		Left Tilt	0.048	0.059	0.189	0.107	0.237	0.296
		Right Tilt	0.050	0.134	0.321	0.184	0.371	0.505
	WCDMA 1900	Left Touch	0.087	0.037	0.145	0.124	0.232	0.269
		Right Touch	0.091	0.115	0.220	0.206	0.311	0.426
		Left Tilt	0.040	0.059	0.189	0.099	0.229	0.288
		Right Tilt	0.038	0.134	0.321	0.172	0.359	0.493
	LTE Band 12	Left Touch	0.168	0.037	0.145	0.205	0.313	0.350
		Right Touch	0.187	0.115	0.220	0.302	0.407	0.522
		Left Tilt	0.083	0.059	0.189	0.142	0.272	0.331
		Right Tilt	0.063	0.134	0.321	0.197	0.384	0.518
	LTE Band 13	Left Touch	0.183	0.037	0.145	0.220	0.328	0.365
		Right Touch	0.154	0.115	0.220	0.269	0.374	0.489
		Left Tilt	0.082	0.059	0.189	0.141	0.271	0.330
		Right Tilt	0.086	0.134	0.321	0.220	0.407	0.541
	LTE Band 5	Left Touch	0.085	0.037	0.145	0.122	0.230	0.267
		Right Touch	0.065	0.115	0.220	0.180	0.285	0.400
		Left Tilt	0.033	0.059	0.189	0.092	0.222	0.281
		Right Tilt	0.034	0.134	0.321	0.168	0.355	0.489
	LTE Band 4	Left Touch	0.047	0.037	0.145	0.084	0.192	0.229
		Right Touch	0.059	0.115	0.220	0.174	0.279	0.394
		Left Tilt	0.026	0.059	0.189	0.085	0.215	0.274
		Right Tilt	0.028	0.134	0.321	0.162	0.349	0.483
	LTE Band 2	Left Touch	0.074	0.037	0.145	0.111	0.219	0.256
		Right Touch	0.082	0.115	0.220	0.197	0.302	0.417
		Left Tilt	0.045	0.059	0.189	0.104	0.234	0.293
		Right Tilt	0.047	0.134	0.321	0.181	0.368	0.502
	LTE Band 41	Left Touch	0.152	0.037	0.145	0.189	0.297	0.334
		Right Touch	0.356	0.115	0.220	0.471	0.576	0.691
		Left Tilt	0.101	0.059	0.189	0.160	0.290	0.349
		Right Tilt	0.076	0.134	0.321	0.210	0.397	0.531

Table 12.4.11 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.010	0.174	0.147	0.184
		Right Touch	0.065	0.115	0.021	0.180	0.086	0.201
		Left Tilt	0.049	0.059	0.015	0.108	0.064	0.123
		Right Tilt	0.041	0.134	0.019	0.175	0.060	0.194
	GPRS 850	Left Touch	0.138	0.037	0.010	0.175	0.148	0.185
		Right Touch	0.075	0.115	0.021	0.190	0.096	0.211
		Left Tilt	0.050	0.059	0.015	0.109	0.065	0.124
		Right Tilt	0.042	0.134	0.019	0.176	0.061	0.195
	GSM 1900	Left Touch	0.067	0.037	0.010	0.104	0.077	0.114
		Right Touch	0.061	0.115	0.021	0.176	0.082	0.197
		Left Tilt	0.033	0.059	0.015	0.092	0.048	0.107
		Right Tilt	0.032	0.134	0.019	0.166	0.051	0.185
	GPRS 1900	Left Touch	0.089	0.037	0.010	0.126	0.099	0.136
		Right Touch	0.077	0.115	0.021	0.192	0.098	0.213
		Left Tilt	0.040	0.059	0.015	0.099	0.055	0.114
		Right Tilt	0.040	0.134	0.019	0.174	0.059	0.193
	WCDMA 850	Left Touch	0.148	0.037	0.010	0.185	0.158	0.195
		Right Touch	0.096	0.115	0.021	0.211	0.117	0.232
		Left Tilt	0.056	0.059	0.015	0.115	0.071	0.130
		Right Tilt	0.058	0.134	0.019	0.192	0.077	0.211
	WCDMA 1700	Left Touch	0.062	0.037	0.010	0.099	0.072	0.109
		Right Touch	0.068	0.115	0.021	0.183	0.089	0.204
		Left Tilt	0.048	0.059	0.015	0.107	0.063	0.122
		Right Tilt	0.050	0.134	0.019	0.184	0.069	0.203
	WCDMA 1900	Left Touch	0.087	0.037	0.010	0.124	0.097	0.134
		Right Touch	0.091	0.115	0.021	0.206	0.112	0.227
		Left Tilt	0.040	0.059	0.015	0.099	0.055	0.114
		Right Tilt	0.038	0.134	0.019	0.172	0.057	0.191
	LTE Band 12	Left Touch	0.168	0.037	0.010	0.205	0.178	0.215
		Right Touch	0.187	0.115	0.021	0.302	0.208	0.323
		Left Tilt	0.083	0.059	0.015	0.142	0.098	0.157
		Right Tilt	0.063	0.134	0.019	0.197	0.082	0.216
	LTE Band 13	Left Touch	0.183	0.037	0.010	0.220	0.193	0.230
		Right Touch	0.154	0.115	0.021	0.269	0.175	0.290
		Left Tilt	0.082	0.059	0.015	0.141	0.097	0.156
		Right Tilt	0.086	0.134	0.019	0.220	0.105	0.239
	LTE Band 5	Left Touch	0.085	0.037	0.010	0.122	0.095	0.132
		Right Touch	0.065	0.115	0.021	0.180	0.086	0.201
		Left Tilt	0.033	0.059	0.015	0.092	0.048	0.107
		Right Tilt	0.034	0.134	0.019	0.168	0.053	0.187
	LTE Band 4	Left Touch	0.047	0.037	0.010	0.084	0.057	0.094
		Right Touch	0.059	0.115	0.021	0.174	0.080	0.195
		Left Tilt	0.026	0.059	0.015	0.085	0.041	0.100
		Right Tilt	0.028	0.134	0.019	0.162	0.047	0.181
	LTE Band 2	Left Touch	0.074	0.037	0.010	0.111	0.084	0.121
		Right Touch	0.082	0.115	0.021	0.197	0.103	0.218
		Left Tilt	0.045	0.059	0.015	0.104	0.060	0.119
		Right Tilt	0.047	0.134	0.019	0.181	0.066	0.200
	LTE Band 41	Left Touch	0.152	0.037	0.010	0.189	0.162	0.199
		Right Touch	0.356	0.115	0.021	0.471	0.377	0.492
		Left Tilt	0.101	0.059	0.015	0.160	0.116	0.175
		Right Tilt	0.076	0.134	0.019	0.210	0.095	0.229

Table 12.4.12 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.137	0.037	0.154	0.174	0.291	0.328
		Right Touch	0.065	0.115	0.249	0.180	0.314	0.429
		Left Tilt	0.049	0.059	0.192	0.108	0.241	0.300
		Right Tilt	0.041	0.134	0.372	0.175	0.413	0.547
	GPRS 850	Left Touch	0.138	0.037	0.154	0.175	0.292	0.329
		Right Touch	0.075	0.115	0.249	0.190	0.324	0.439
		Left Tilt	0.050	0.059	0.192	0.109	0.242	0.301
		Right Tilt	0.042	0.134	0.372	0.176	0.414	0.548
	GSM 1900	Left Touch	0.067	0.037	0.154	0.104	0.221	0.258
		Right Touch	0.061	0.115	0.249	0.176	0.310	0.425
		Left Tilt	0.033	0.059	0.192	0.092	0.225	0.284
		Right Tilt	0.032	0.134	0.372	0.166	0.404	0.538
	GPRS 1900	Left Touch	0.089	0.037	0.154	0.126	0.243	0.280
		Right Touch	0.077	0.115	0.249	0.192	0.326	0.441
		Left Tilt	0.040	0.059	0.192	0.099	0.232	0.291
		Right Tilt	0.040	0.134	0.372	0.174	0.412	0.546
	WCDMA 850	Left Touch	0.148	0.037	0.154	0.185	0.302	0.339
		Right Touch	0.096	0.115	0.249	0.211	0.345	0.460
		Left Tilt	0.056	0.059	0.192	0.115	0.248	0.307
		Right Tilt	0.058	0.134	0.372	0.192	0.430	0.564
	WCDMA 1700	Left Touch	0.062	0.037	0.154	0.099	0.216	0.253
		Right Touch	0.068	0.115	0.249	0.183	0.317	0.432
		Left Tilt	0.048	0.059	0.192	0.107	0.240	0.299
		Right Tilt	0.050	0.134	0.372	0.184	0.422	0.556
	WCDMA 1900	Left Touch	0.087	0.037	0.154	0.124	0.241	0.278
		Right Touch	0.091	0.115	0.249	0.206	0.340	0.455
		Left Tilt	0.040	0.059	0.192	0.099	0.232	0.291
		Right Tilt	0.038	0.134	0.372	0.172	0.410	0.544
	LTE Band 12	Left Touch	0.168	0.037	0.154	0.205	0.322	0.359
		Right Touch	0.187	0.115	0.249	0.302	0.436	0.551
		Left Tilt	0.083	0.059	0.192	0.142	0.275	0.334
		Right Tilt	0.063	0.134	0.372	0.197	0.435	0.569
	LTE Band 13	Left Touch	0.183	0.037	0.154	0.220	0.337	0.374
		Right Touch	0.154	0.115	0.249	0.269	0.403	0.518
		Left Tilt	0.082	0.059	0.192	0.141	0.274	0.333
		Right Tilt	0.086	0.134	0.372	0.220	0.458	0.592
	LTE Band 5	Left Touch	0.085	0.037	0.154	0.122	0.239	0.276
		Right Touch	0.065	0.115	0.249	0.180	0.314	0.429
		Left Tilt	0.033	0.059	0.192	0.092	0.225	0.284
		Right Tilt	0.034	0.134	0.372	0.168	0.406	0.540
	LTE Band 4	Left Touch	0.047	0.037	0.154	0.084	0.201	0.238
		Right Touch	0.059	0.115	0.249	0.174	0.308	0.423
		Left Tilt	0.026	0.059	0.192	0.085	0.218	0.277
		Right Tilt	0.028	0.134	0.372	0.162	0.400	0.534
	LTE Band 2	Left Touch	0.074	0.037	0.154	0.111	0.228	0.265
		Right Touch	0.082	0.115	0.249	0.197	0.331	0.446
		Left Tilt	0.045	0.059	0.192	0.104	0.237	0.296
		Right Tilt	0.047	0.134	0.372	0.181	0.419	0.553
	LTE Band 41	Left Touch	0.152	0.037	0.154	0.189	0.306	0.343
		Right Touch	0.356	0.115	0.249	0.471	0.605	0.720
		Left Tilt	0.101	0.059	0.192	0.160	0.293	0.352
		Right Tilt	0.076	0.134	0.372	0.210	0.448	0.582

Table 12.4.13 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.090	0.227
		Right Touch	0.065	0.356	0.421
		Left Tilt	0.049	0.143	0.192
		Right Tilt	0.041	0.313	0.354
	GPRS 850	Left Touch	0.138	0.090	0.228
		Right Touch	0.075	0.356	0.431
		Left Tilt	0.050	0.143	0.193
		Right Tilt	0.042	0.313	0.355
	GSM 1900	Left Touch	0.067	0.090	0.157
		Right Touch	0.061	0.356	0.417
		Left Tilt	0.033	0.143	0.176
		Right Tilt	0.032	0.313	0.345
	GPRS 1900	Left Touch	0.089	0.090	0.179
		Right Touch	0.077	0.356	0.433
		Left Tilt	0.040	0.143	0.183
		Right Tilt	0.040	0.313	0.353
	WCDMA 850	Left Touch	0.148	0.090	0.238
		Right Touch	0.096	0.356	0.452
		Left Tilt	0.056	0.143	0.199
		Right Tilt	0.058	0.313	0.371
	WCDMA 1700	Left Touch	0.062	0.090	0.152
		Right Touch	0.068	0.356	0.424
		Left Tilt	0.048	0.143	0.191
		Right Tilt	0.050	0.313	0.363
	WCDMA 1900	Left Touch	0.087	0.090	0.177
		Right Touch	0.091	0.356	0.447
		Left Tilt	0.040	0.143	0.183
		Right Tilt	0.038	0.313	0.351
	LTE Band 12	Left Touch	0.168	0.090	0.258
		Right Touch	0.187	0.356	0.543
		Left Tilt	0.083	0.143	0.226
		Right Tilt	0.063	0.313	0.376
	LTE Band 13	Left Touch	0.183	0.090	0.273
		Right Touch	0.154	0.356	0.510
		Left Tilt	0.082	0.143	0.225
		Right Tilt	0.086	0.313	0.399
	LTE Band 5	Left Touch	0.085	0.090	0.175
		Right Touch	0.065	0.356	0.421
		Left Tilt	0.033	0.143	0.176
		Right Tilt	0.034	0.313	0.347
	LTE Band 4	Left Touch	0.047	0.090	0.137
		Right Touch	0.059	0.356	0.415
		Left Tilt	0.026	0.143	0.169
		Right Tilt	0.028	0.313	0.341
	LTE Band 2	Left Touch	0.074	0.090	0.164
		Right Touch	0.082	0.356	0.438
		Left Tilt	0.045	0.143	0.188
		Right Tilt	0.047	0.313	0.360
	LTE Band 41	Left Touch	0.152	0.090	0.242
		Right Touch	0.356	0.356	0.712
		Left Tilt	0.101	0.143	0.244
		Right Tilt	0.076	0.313	0.389

Table 12.4.14 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.042	0.179
		Right Touch	0.065	0.080	0.145
		Left Tilt	0.049	0.034	0.083
		Right Tilt	0.041	0.038	0.079
	GPRS 850	Left Touch	0.138	0.042	0.180
		Right Touch	0.075	0.080	0.155
		Left Tilt	0.050	0.034	0.084
		Right Tilt	0.042	0.038	0.080
	GSM 1900	Left Touch	0.067	0.042	0.109
		Right Touch	0.061	0.080	0.141
		Left Tilt	0.033	0.034	0.067
		Right Tilt	0.032	0.038	0.070
	GPRS 1900	Left Touch	0.089	0.042	0.131
		Right Touch	0.077	0.080	0.157
		Left Tilt	0.040	0.034	0.074
		Right Tilt	0.040	0.038	0.078
	WCDMA 850	Left Touch	0.148	0.042	0.190
		Right Touch	0.096	0.080	0.176
		Left Tilt	0.056	0.034	0.090
		Right Tilt	0.058	0.038	0.096
	WCDMA 1700	Left Touch	0.062	0.042	0.104
		Right Touch	0.068	0.080	0.148
		Left Tilt	0.048	0.034	0.082
		Right Tilt	0.050	0.038	0.088
	WCDMA 1900	Left Touch	0.087	0.042	0.129
		Right Touch	0.091	0.080	0.171
		Left Tilt	0.040	0.034	0.074
		Right Tilt	0.038	0.038	0.076
	LTE Band 12	Left Touch	0.168	0.042	0.210
		Right Touch	0.187	0.080	0.267
		Left Tilt	0.083	0.034	0.117
		Right Tilt	0.063	0.038	0.101
	LTE Band 13	Left Touch	0.183	0.042	0.225
		Right Touch	0.154	0.080	0.234
		Left Tilt	0.082	0.034	0.116
		Right Tilt	0.086	0.038	0.124
	LTE Band 5	Left Touch	0.085	0.042	0.127
		Right Touch	0.065	0.080	0.145
		Left Tilt	0.033	0.034	0.067
		Right Tilt	0.034	0.038	0.072
	LTE Band 4	Left Touch	0.047	0.042	0.089
		Right Touch	0.059	0.080	0.139
		Left Tilt	0.026	0.034	0.060
		Right Tilt	0.028	0.038	0.066
	LTE Band 2	Left Touch	0.074	0.042	0.116
		Right Touch	0.082	0.080	0.162
		Left Tilt	0.045	0.034	0.079
		Right Tilt	0.047	0.038	0.085
	LTE Band 41	Left Touch	0.152	0.042	0.194
		Right Touch	0.356	0.080	0.436
		Left Tilt	0.101	0.034	0.135
		Right Tilt	0.076	0.038	0.114

Table 12.4.15 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.126	0.263
		Right Touch	0.065	0.379	0.444
		Left Tilt	0.049	0.155	0.204
		Right Tilt	0.041	0.390	0.431
	GPRS 850	Left Touch	0.138	0.126	0.264
		Right Touch	0.075	0.379	0.454
		Left Tilt	0.050	0.155	0.205
		Right Tilt	0.042	0.390	0.432
	GSM 1900	Left Touch	0.067	0.126	0.193
		Right Touch	0.061	0.379	0.440
		Left Tilt	0.033	0.155	0.188
		Right Tilt	0.032	0.390	0.422
	GPRS 1900	Left Touch	0.089	0.126	0.215
		Right Touch	0.077	0.379	0.456
		Left Tilt	0.040	0.155	0.195
		Right Tilt	0.040	0.390	0.430
	WCDMA 850	Left Touch	0.148	0.126	0.274
		Right Touch	0.096	0.379	0.475
		Left Tilt	0.056	0.155	0.211
		Right Tilt	0.058	0.390	0.448
	WCDMA 1700	Left Touch	0.062	0.126	0.188
		Right Touch	0.068	0.379	0.447
		Left Tilt	0.048	0.155	0.203
		Right Tilt	0.050	0.390	0.440
	WCDMA 1900	Left Touch	0.087	0.126	0.213
		Right Touch	0.091	0.379	0.470
		Left Tilt	0.040	0.155	0.195
		Right Tilt	0.038	0.390	0.428
	LTE Band 12	Left Touch	0.168	0.126	0.294
		Right Touch	0.187	0.379	0.566
		Left Tilt	0.083	0.155	0.238
		Right Tilt	0.063	0.390	0.453
	LTE Band 13	Left Touch	0.183	0.126	0.309
		Right Touch	0.154	0.379	0.533
		Left Tilt	0.082	0.155	0.237
		Right Tilt	0.086	0.390	0.476
	LTE Band 5	Left Touch	0.085	0.126	0.211
		Right Touch	0.065	0.379	0.444
		Left Tilt	0.033	0.155	0.188
		Right Tilt	0.034	0.390	0.424
	LTE Band 4	Left Touch	0.047	0.126	0.173
		Right Touch	0.059	0.379	0.438
		Left Tilt	0.026	0.155	0.181
		Right Tilt	0.028	0.390	0.418
	LTE Band 2	Left Touch	0.074	0.126	0.200
		Right Touch	0.082	0.379	0.461
		Left Tilt	0.045	0.155	0.200
		Right Tilt	0.047	0.390	0.437
	LTE Band 41	Left Touch	0.152	0.126	0.278
		Right Touch	0.356	0.379	0.735
		Left Tilt	0.101	0.155	0.256
		Right Tilt	0.076	0.390	0.466

Table 12.4.16 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.287	0.424
		Right Touch	0.065	0.587	0.652
		Left Tilt	0.049	0.344	0.393
		Right Tilt	0.041	0.654	0.695
	GPRS 850	Left Touch	0.138	0.287	0.425
		Right Touch	0.075	0.587	0.662
		Left Tilt	0.050	0.344	0.394
		Right Tilt	0.042	0.654	0.696
	GSM 1900	Left Touch	0.067	0.287	0.354
		Right Touch	0.061	0.587	0.648
		Left Tilt	0.033	0.344	0.377
		Right Tilt	0.032	0.654	0.686
	GPRS 1900	Left Touch	0.089	0.287	0.376
		Right Touch	0.077	0.587	0.664
		Left Tilt	0.040	0.344	0.384
		Right Tilt	0.040	0.654	0.694
	WCDMA 850	Left Touch	0.148	0.287	0.435
		Right Touch	0.096	0.587	0.683
		Left Tilt	0.056	0.344	0.400
		Right Tilt	0.058	0.654	0.712
	WCDMA 1700	Left Touch	0.062	0.287	0.349
		Right Touch	0.068	0.587	0.655
		Left Tilt	0.048	0.344	0.392
		Right Tilt	0.050	0.654	0.704
	WCDMA 1900	Left Touch	0.087	0.287	0.374
		Right Touch	0.091	0.587	0.678
		Left Tilt	0.040	0.344	0.384
		Right Tilt	0.038	0.654	0.692
	LTE Band 12	Left Touch	0.168	0.287	0.455
		Right Touch	0.187	0.587	0.774
		Left Tilt	0.083	0.344	0.427
		Right Tilt	0.063	0.654	0.717
	LTE Band 13	Left Touch	0.183	0.287	0.470
		Right Touch	0.154	0.587	0.741
		Left Tilt	0.082	0.344	0.426
		Right Tilt	0.086	0.654	0.740
	LTE Band 5	Left Touch	0.085	0.287	0.372
		Right Touch	0.065	0.587	0.652
		Left Tilt	0.033	0.344	0.377
		Right Tilt	0.034	0.654	0.688
	LTE Band 4	Left Touch	0.047	0.287	0.334
		Right Touch	0.059	0.587	0.646
		Left Tilt	0.026	0.344	0.370
		Right Tilt	0.028	0.654	0.682
	LTE Band 2	Left Touch	0.074	0.287	0.361
		Right Touch	0.082	0.587	0.669
		Left Tilt	0.045	0.344	0.389
		Right Tilt	0.047	0.654	0.701
	LTE Band 41	Left Touch	0.152	0.287	0.439
		Right Touch	0.356	0.587	0.943
		Left Tilt	0.101	0.344	0.445
		Right Tilt	0.076	0.654	0.730

Table 12.4.17 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.008	0.145
		Right Touch	0.065	0.018	0.083
		Left Tilt	0.049	0.011	0.060
		Right Tilt	0.041	0.014	0.055
	GPRS 850	Left Touch	0.138	0.008	0.146
		Right Touch	0.075	0.018	0.093
		Left Tilt	0.050	0.011	0.061
		Right Tilt	0.042	0.014	0.056
	GSM 1900	Left Touch	0.067	0.008	0.075
		Right Touch	0.061	0.018	0.079
		Left Tilt	0.033	0.011	0.044
		Right Tilt	0.032	0.014	0.046
	GPRS 1900	Left Touch	0.089	0.008	0.097
		Right Touch	0.077	0.018	0.095
		Left Tilt	0.040	0.011	0.051
		Right Tilt	0.040	0.014	0.054
	WCDMA 850	Left Touch	0.148	0.008	0.156
		Right Touch	0.096	0.018	0.114
		Left Tilt	0.056	0.011	0.067
		Right Tilt	0.058	0.014	0.072
	WCDMA 1700	Left Touch	0.062	0.008	0.070
		Right Touch	0.068	0.018	0.086
		Left Tilt	0.048	0.011	0.059
		Right Tilt	0.050	0.014	0.064
	WCDMA 1900	Left Touch	0.087	0.008	0.095
		Right Touch	0.091	0.018	0.109
		Left Tilt	0.040	0.011	0.051
		Right Tilt	0.038	0.014	0.052
	LTE Band 12	Left Touch	0.168	0.008	0.176
		Right Touch	0.187	0.018	0.205
		Left Tilt	0.083	0.011	0.094
		Right Tilt	0.063	0.014	0.077
	LTE Band 13	Left Touch	0.183	0.008	0.191
		Right Touch	0.154	0.018	0.172
		Left Tilt	0.082	0.011	0.093
		Right Tilt	0.086	0.014	0.100
	LTE Band 5	Left Touch	0.085	0.008	0.093
		Right Touch	0.065	0.018	0.083
		Left Tilt	0.033	0.011	0.044
		Right Tilt	0.034	0.014	0.048
	LTE Band 4	Left Touch	0.047	0.008	0.055
		Right Touch	0.059	0.018	0.077
		Left Tilt	0.026	0.011	0.037
		Right Tilt	0.028	0.014	0.042
	LTE Band 2	Left Touch	0.074	0.008	0.082
		Right Touch	0.082	0.018	0.100
		Left Tilt	0.045	0.011	0.056
		Right Tilt	0.047	0.014	0.061
	LTE Band 41	Left Touch	0.152	0.008	0.160
		Right Touch	0.356	0.018	0.374
		Left Tilt	0.101	0.011	0.112
		Right Tilt	0.076	0.014	0.090

Table 12.4.18 Simultaneous Transmission Scenario: 2G/3G/4G + 5.3 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.259	0.396
		Right Touch	0.065	0.365	0.430
		Left Tilt	0.049	0.309	0.358
		Right Tilt	0.041	0.517	0.558
	GPRS 850	Left Touch	0.138	0.259	0.397
		Right Touch	0.075	0.365	0.440
		Left Tilt	0.050	0.309	0.359
		Right Tilt	0.042	0.517	0.559
	GSM 1900	Left Touch	0.067	0.259	0.326
		Right Touch	0.061	0.365	0.426
		Left Tilt	0.033	0.309	0.342
		Right Tilt	0.032	0.517	0.549
	GPRS 1900	Left Touch	0.089	0.259	0.348
		Right Touch	0.077	0.365	0.442
		Left Tilt	0.040	0.309	0.349
		Right Tilt	0.040	0.517	0.557
	WCDMA 850	Left Touch	0.148	0.259	0.407
		Right Touch	0.096	0.365	0.461
		Left Tilt	0.056	0.309	0.365
		Right Tilt	0.058	0.517	0.575
	WCDMA 1700	Left Touch	0.062	0.259	0.321
		Right Touch	0.068	0.365	0.433
		Left Tilt	0.048	0.309	0.357
		Right Tilt	0.050	0.517	0.567
	WCDMA 1900	Left Touch	0.087	0.259	0.346
		Right Touch	0.091	0.365	0.456
		Left Tilt	0.040	0.309	0.349
		Right Tilt	0.038	0.517	0.555
	LTE Band 12	Left Touch	0.168	0.259	0.427
		Right Touch	0.187	0.365	0.552
		Left Tilt	0.083	0.309	0.392
		Right Tilt	0.063	0.517	0.580
	LTE Band 13	Left Touch	0.183	0.259	0.442
		Right Touch	0.154	0.365	0.519
		Left Tilt	0.082	0.309	0.391
		Right Tilt	0.086	0.517	0.603
	LTE Band 5	Left Touch	0.085	0.259	0.344
		Right Touch	0.065	0.365	0.430
		Left Tilt	0.033	0.309	0.342
		Right Tilt	0.034	0.517	0.551
	LTE Band 4	Left Touch	0.047	0.259	0.306
		Right Touch	0.059	0.365	0.424
		Left Tilt	0.026	0.309	0.335
		Right Tilt	0.028	0.517	0.545
	LTE Band 2	Left Touch	0.074	0.259	0.333
		Right Touch	0.082	0.365	0.447
		Left Tilt	0.045	0.309	0.354
		Right Tilt	0.047	0.517	0.564
	LTE Band 41	Left Touch	0.152	0.259	0.411
		Right Touch	0.356	0.365	0.721
		Left Tilt	0.101	0.309	0.410
		Right Tilt	0.076	0.517	0.593

Table 12.4.19 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.322	0.459
		Right Touch	0.065	0.641	0.706
		Left Tilt	0.049	0.436	0.485
		Right Tilt	0.041	0.747	0.788
	GPRS 850	Left Touch	0.138	0.322	0.460
		Right Touch	0.075	0.641	0.716
		Left Tilt	0.050	0.436	0.486
		Right Tilt	0.042	0.747	0.789
	GSM 1900	Left Touch	0.067	0.322	0.389
		Right Touch	0.061	0.641	0.702
		Left Tilt	0.033	0.436	0.469
		Right Tilt	0.032	0.747	0.779
	GPRS 1900	Left Touch	0.089	0.322	0.411
		Right Touch	0.077	0.641	0.718
		Left Tilt	0.040	0.436	0.476
		Right Tilt	0.040	0.747	0.787
	WCDMA 850	Left Touch	0.148	0.322	0.470
		Right Touch	0.096	0.641	0.737
		Left Tilt	0.056	0.436	0.492
		Right Tilt	0.058	0.747	0.805
	WCDMA 1700	Left Touch	0.062	0.322	0.384
		Right Touch	0.068	0.641	0.709
		Left Tilt	0.048	0.436	0.484
		Right Tilt	0.050	0.747	0.797
	WCDMA 1900	Left Touch	0.087	0.322	0.409
		Right Touch	0.091	0.641	0.732
		Left Tilt	0.040	0.436	0.476
		Right Tilt	0.038	0.747	0.785
	LTE Band 12	Left Touch	0.168	0.322	0.490
		Right Touch	0.187	0.641	0.828
		Left Tilt	0.083	0.436	0.519
		Right Tilt	0.063	0.747	0.810
	LTE Band 13	Left Touch	0.183	0.322	0.505
		Right Touch	0.154	0.641	0.795
		Left Tilt	0.082	0.436	0.518
		Right Tilt	0.086	0.747	0.833
	LTE Band 5	Left Touch	0.085	0.322	0.407
		Right Touch	0.065	0.641	0.706
		Left Tilt	0.033	0.436	0.469
		Right Tilt	0.034	0.747	0.781
	LTE Band 4	Left Touch	0.047	0.322	0.369
		Right Touch	0.059	0.641	0.700
		Left Tilt	0.026	0.436	0.462
		Right Tilt	0.028	0.747	0.775
	LTE Band 2	Left Touch	0.074	0.322	0.396
		Right Touch	0.082	0.641	0.723
		Left Tilt	0.045	0.436	0.481
		Right Tilt	0.047	0.747	0.794
	LTE Band 41	Left Touch	0.152	0.322	0.474
		Right Touch	0.356	0.641	0.997
		Left Tilt	0.101	0.436	0.537
		Right Tilt	0.076	0.747	0.823

Table 12.4.20 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.015	0.152
		Right Touch	0.065	0.022	0.087
		Left Tilt	0.049	0.017	0.066
		Right Tilt	0.041	0.012	0.053
	GPRS 850	Left Touch	0.138	0.015	0.153
		Right Touch	0.075	0.022	0.097
		Left Tilt	0.050	0.017	0.067
		Right Tilt	0.042	0.012	0.054
	GSM 1900	Left Touch	0.067	0.015	0.082
		Right Touch	0.061	0.022	0.083
		Left Tilt	0.033	0.017	0.050
		Right Tilt	0.032	0.012	0.044
	GPRS 1900	Left Touch	0.089	0.015	0.104
		Right Touch	0.077	0.022	0.099
		Left Tilt	0.040	0.017	0.057
		Right Tilt	0.040	0.012	0.052
	WCDMA 850	Left Touch	0.148	0.015	0.163
		Right Touch	0.096	0.022	0.118
		Left Tilt	0.056	0.017	0.073
		Right Tilt	0.058	0.012	0.070
	WCDMA 1700	Left Touch	0.062	0.015	0.077
		Right Touch	0.068	0.022	0.090
		Left Tilt	0.048	0.017	0.065
		Right Tilt	0.050	0.012	0.062
	WCDMA 1900	Left Touch	0.087	0.015	0.102
		Right Touch	0.091	0.022	0.113
		Left Tilt	0.040	0.017	0.057
		Right Tilt	0.038	0.012	0.050
	LTE Band 12	Left Touch	0.168	0.015	0.183
		Right Touch	0.187	0.022	0.209
		Left Tilt	0.083	0.017	0.100
		Right Tilt	0.063	0.012	0.075
	LTE Band 13	Left Touch	0.183	0.015	0.198
		Right Touch	0.154	0.022	0.176
		Left Tilt	0.082	0.017	0.099
		Right Tilt	0.086	0.012	0.098
	LTE Band 5	Left Touch	0.085	0.015	0.100
		Right Touch	0.065	0.022	0.087
		Left Tilt	0.033	0.017	0.050
		Right Tilt	0.034	0.012	0.046
	LTE Band 4	Left Touch	0.047	0.015	0.062
		Right Touch	0.059	0.022	0.081
		Left Tilt	0.026	0.017	0.043
		Right Tilt	0.028	0.012	0.040
	LTE Band 2	Left Touch	0.074	0.015	0.089
		Right Touch	0.082	0.022	0.104
		Left Tilt	0.045	0.017	0.062
		Right Tilt	0.047	0.012	0.059
	LTE Band 41	Left Touch	0.152	0.015	0.167
		Right Touch	0.356	0.022	0.378
		Left Tilt	0.101	0.017	0.118
		Right Tilt	0.076	0.012	0.088

Table 12.4.21 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.345	0.482
		Right Touch	0.065	0.704	0.769
		Left Tilt	0.049	0.445	0.494
		Right Tilt	0.041	0.777	0.818
	GPRS 850	Left Touch	0.138	0.345	0.483
		Right Touch	0.075	0.704	0.779
		Left Tilt	0.050	0.445	0.495
		Right Tilt	0.042	0.777	0.819
	GSM 1900	Left Touch	0.067	0.345	0.412
		Right Touch	0.061	0.704	0.765
		Left Tilt	0.033	0.445	0.478
		Right Tilt	0.032	0.777	0.809
	GPRS 1900	Left Touch	0.089	0.345	0.434
		Right Touch	0.077	0.704	0.781
		Left Tilt	0.040	0.445	0.485
		Right Tilt	0.040	0.777	0.817
	WCDMA 850	Left Touch	0.148	0.345	0.493
		Right Touch	0.096	0.704	0.800
		Left Tilt	0.056	0.445	0.501
		Right Tilt	0.058	0.777	0.835
	WCDMA 1700	Left Touch	0.062	0.345	0.407
		Right Touch	0.068	0.704	0.772
		Left Tilt	0.048	0.445	0.493
		Right Tilt	0.050	0.777	0.827
	WCDMA 1900	Left Touch	0.087	0.345	0.432
		Right Touch	0.091	0.704	0.795
		Left Tilt	0.040	0.445	0.485
		Right Tilt	0.038	0.777	0.815
	LTE Band 12	Left Touch	0.168	0.345	0.513
		Right Touch	0.187	0.704	0.891
		Left Tilt	0.083	0.445	0.528
		Right Tilt	0.063	0.777	0.840
	LTE Band 13	Left Touch	0.183	0.345	0.528
		Right Touch	0.154	0.704	0.858
		Left Tilt	0.082	0.445	0.527
		Right Tilt	0.086	0.777	0.863
	LTE Band 5	Left Touch	0.085	0.345	0.430
		Right Touch	0.065	0.704	0.769
		Left Tilt	0.033	0.445	0.478
		Right Tilt	0.034	0.777	0.811
	LTE Band 4	Left Touch	0.047	0.345	0.392
		Right Touch	0.059	0.704	0.763
		Left Tilt	0.026	0.445	0.471
		Right Tilt	0.028	0.777	0.805
	LTE Band 2	Left Touch	0.074	0.345	0.419
		Right Touch	0.082	0.704	0.786
		Left Tilt	0.045	0.445	0.490
		Right Tilt	0.047	0.777	0.824
	LTE Band 41	Left Touch	0.152	0.345	0.497
		Right Touch	0.356	0.704	1.060
		Left Tilt	0.101	0.445	0.546
		Right Tilt	0.076	0.777	0.853

Table 12.4.22 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.145	0.282
		Right Touch	0.065	0.220	0.285
		Left Tilt	0.049	0.189	0.238
		Right Tilt	0.041	0.321	0.362
	GPRS 850	Left Touch	0.138	0.145	0.283
		Right Touch	0.075	0.220	0.295
		Left Tilt	0.050	0.189	0.239
		Right Tilt	0.042	0.321	0.363
	GSM 1900	Left Touch	0.067	0.145	0.212
		Right Touch	0.061	0.220	0.281
		Left Tilt	0.033	0.189	0.222
		Right Tilt	0.032	0.321	0.353
	GPRS 1900	Left Touch	0.089	0.145	0.234
		Right Touch	0.077	0.220	0.297
		Left Tilt	0.040	0.189	0.229
		Right Tilt	0.040	0.321	0.361
	WCDMA 850	Left Touch	0.148	0.145	0.293
		Right Touch	0.096	0.220	0.316
		Left Tilt	0.056	0.189	0.245
		Right Tilt	0.058	0.321	0.379
	WCDMA 1700	Left Touch	0.062	0.145	0.207
		Right Touch	0.068	0.220	0.288
		Left Tilt	0.048	0.189	0.237
		Right Tilt	0.050	0.321	0.371
	WCDMA 1900	Left Touch	0.087	0.145	0.232
		Right Touch	0.091	0.220	0.311
		Left Tilt	0.040	0.189	0.229
		Right Tilt	0.038	0.321	0.359
	LTE Band 12	Left Touch	0.168	0.145	0.313
		Right Touch	0.187	0.220	0.407
		Left Tilt	0.083	0.189	0.272
		Right Tilt	0.063	0.321	0.384
	LTE Band 13	Left Touch	0.183	0.145	0.328
		Right Touch	0.154	0.220	0.374
		Left Tilt	0.082	0.189	0.271
		Right Tilt	0.086	0.321	0.407
	LTE Band 5	Left Touch	0.085	0.145	0.230
		Right Touch	0.065	0.220	0.285
		Left Tilt	0.033	0.189	0.222
		Right Tilt	0.034	0.321	0.355
	LTE Band 4	Left Touch	0.047	0.145	0.192
		Right Touch	0.059	0.220	0.279
		Left Tilt	0.026	0.189	0.215
		Right Tilt	0.028	0.321	0.349
	LTE Band 2	Left Touch	0.074	0.145	0.219
		Right Touch	0.082	0.220	0.302
		Left Tilt	0.045	0.189	0.234
		Right Tilt	0.047	0.321	0.368
	LTE Band 41	Left Touch	0.152	0.145	0.297
		Right Touch	0.356	0.220	0.576
		Left Tilt	0.101	0.189	0.290
		Right Tilt	0.076	0.321	0.397

Table 12.4.23 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.010	0.147
		Right Touch	0.065	0.021	0.086
		Left Tilt	0.049	0.015	0.064
		Right Tilt	0.041	0.019	0.060
	GPRS 850	Left Touch	0.138	0.010	0.148
		Right Touch	0.075	0.021	0.096
		Left Tilt	0.050	0.015	0.065
		Right Tilt	0.042	0.019	0.061
	GSM 1900	Left Touch	0.067	0.010	0.077
		Right Touch	0.061	0.021	0.082
		Left Tilt	0.033	0.015	0.048
		Right Tilt	0.032	0.019	0.051
	GPRS 1900	Left Touch	0.089	0.010	0.099
		Right Touch	0.077	0.021	0.098
		Left Tilt	0.040	0.015	0.055
		Right Tilt	0.040	0.019	0.059
	WCDMA 850	Left Touch	0.148	0.010	0.158
		Right Touch	0.096	0.021	0.117
		Left Tilt	0.056	0.015	0.071
		Right Tilt	0.058	0.019	0.077
	WCDMA 1700	Left Touch	0.062	0.010	0.072
		Right Touch	0.068	0.021	0.089
		Left Tilt	0.048	0.015	0.063
		Right Tilt	0.050	0.019	0.069
	WCDMA 1900	Left Touch	0.087	0.010	0.097
		Right Touch	0.091	0.021	0.112
		Left Tilt	0.040	0.015	0.055
		Right Tilt	0.038	0.019	0.057
	LTE Band 12	Left Touch	0.168	0.010	0.178
		Right Touch	0.187	0.021	0.208
		Left Tilt	0.083	0.015	0.098
		Right Tilt	0.063	0.019	0.082
	LTE Band 13	Left Touch	0.183	0.010	0.193
		Right Touch	0.154	0.021	0.175
		Left Tilt	0.082	0.015	0.097
		Right Tilt	0.086	0.019	0.105
	LTE Band 5	Left Touch	0.085	0.010	0.095
		Right Touch	0.065	0.021	0.086
		Left Tilt	0.033	0.015	0.048
		Right Tilt	0.034	0.019	0.053
	LTE Band 4	Left Touch	0.047	0.010	0.057
		Right Touch	0.059	0.021	0.080
		Left Tilt	0.026	0.015	0.041
		Right Tilt	0.028	0.019	0.047
	LTE Band 2	Left Touch	0.074	0.010	0.084
		Right Touch	0.082	0.021	0.103
		Left Tilt	0.045	0.015	0.060
		Right Tilt	0.047	0.019	0.066
	LTE Band 41	Left Touch	0.152	0.010	0.162
		Right Touch	0.356	0.021	0.377
		Left Tilt	0.101	0.015	0.116
		Right Tilt	0.076	0.019	0.095

Table 12.4.24 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.154	0.291
		Right Touch	0.065	0.249	0.314
		Left Tilt	0.049	0.192	0.241
		Right Tilt	0.041	0.372	0.413
	GPRS 850	Left Touch	0.138	0.154	0.292
		Right Touch	0.075	0.249	0.324
		Left Tilt	0.050	0.192	0.242
		Right Tilt	0.042	0.372	0.414
	GSM 1900	Left Touch	0.067	0.154	0.221
		Right Touch	0.061	0.249	0.310
		Left Tilt	0.033	0.192	0.225
		Right Tilt	0.032	0.372	0.404
	GPRS 1900	Left Touch	0.089	0.154	0.243
		Right Touch	0.077	0.249	0.326
		Left Tilt	0.040	0.192	0.232
		Right Tilt	0.040	0.372	0.412
	WCDMA 850	Left Touch	0.148	0.154	0.302
		Right Touch	0.096	0.249	0.345
		Left Tilt	0.056	0.192	0.248
		Right Tilt	0.058	0.372	0.430
	WCDMA 1700	Left Touch	0.062	0.154	0.216
		Right Touch	0.068	0.249	0.317
		Left Tilt	0.048	0.192	0.240
		Right Tilt	0.050	0.372	0.422
	WCDMA 1900	Left Touch	0.087	0.154	0.241
		Right Touch	0.091	0.249	0.340
		Left Tilt	0.040	0.192	0.232
		Right Tilt	0.038	0.372	0.410
	LTE Band 12	Left Touch	0.168	0.154	0.322
		Right Touch	0.187	0.249	0.436
		Left Tilt	0.083	0.192	0.275
		Right Tilt	0.063	0.372	0.435
	LTE Band 13	Left Touch	0.183	0.154	0.337
		Right Touch	0.154	0.249	0.403
		Left Tilt	0.082	0.192	0.274
		Right Tilt	0.086	0.372	0.458
	LTE Band 5	Left Touch	0.085	0.154	0.239
		Right Touch	0.065	0.249	0.314
		Left Tilt	0.033	0.192	0.225
		Right Tilt	0.034	0.372	0.406
	LTE Band 4	Left Touch	0.047	0.154	0.201
		Right Touch	0.059	0.249	0.308
		Left Tilt	0.026	0.192	0.218
		Right Tilt	0.028	0.372	0.400
	LTE Band 2	Left Touch	0.074	0.154	0.228
		Right Touch	0.082	0.249	0.331
		Left Tilt	0.045	0.192	0.237
		Right Tilt	0.047	0.372	0.419
	LTE Band 41	Left Touch	0.152	0.154	0.306
		Right Touch	0.356	0.249	0.605
		Left Tilt	0.101	0.192	0.293
		Right Tilt	0.076	0.372	0.448

Table 12.4.25 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.137	0.037	0.174
		Right Touch	0.065	0.115	0.180
		Left Tilt	0.049	0.059	0.108
		Right Tilt	0.041	0.134	0.175
	GPRS 850	Left Touch	0.138	0.037	0.175
		Right Touch	0.075	0.115	0.190
		Left Tilt	0.050	0.059	0.109
		Right Tilt	0.042	0.134	0.176
	GSM 1900	Left Touch	0.067	0.037	0.104
		Right Touch	0.061	0.115	0.176
		Left Tilt	0.033	0.059	0.092
		Right Tilt	0.032	0.134	0.166
	GPRS 1900	Left Touch	0.089	0.037	0.126
		Right Touch	0.077	0.115	0.192
		Left Tilt	0.040	0.059	0.099
		Right Tilt	0.040	0.134	0.174
	WCDMA 850	Left Touch	0.148	0.037	0.185
		Right Touch	0.096	0.115	0.211
		Left Tilt	0.056	0.059	0.115
		Right Tilt	0.058	0.134	0.192
	WCDMA 1700	Left Touch	0.062	0.037	0.099
		Right Touch	0.068	0.115	0.183
		Left Tilt	0.048	0.059	0.107
		Right Tilt	0.050	0.134	0.184
	WCDMA 1900	Left Touch	0.087	0.037	0.124
		Right Touch	0.091	0.115	0.206
		Left Tilt	0.040	0.059	0.099
		Right Tilt	0.038	0.134	0.172
	LTE Band 12	Left Touch	0.168	0.037	0.205
		Right Touch	0.187	0.115	0.302
		Left Tilt	0.083	0.059	0.142
		Right Tilt	0.063	0.134	0.197
	LTE Band 13	Left Touch	0.183	0.037	0.220
		Right Touch	0.154	0.115	0.269
		Left Tilt	0.082	0.059	0.141
		Right Tilt	0.086	0.134	0.220
	LTE Band 5	Left Touch	0.085	0.037	0.122
		Right Touch	0.065	0.115	0.180
		Left Tilt	0.033	0.059	0.092
		Right Tilt	0.034	0.134	0.168
	LTE Band 4	Left Touch	0.047	0.037	0.084
		Right Touch	0.059	0.115	0.174
		Left Tilt	0.026	0.059	0.085
		Right Tilt	0.028	0.134	0.162
	LTE Band 2	Left Touch	0.074	0.037	0.111
		Right Touch	0.082	0.115	0.197
		Left Tilt	0.045	0.059	0.104
		Right Tilt	0.047	0.134	0.181
	LTE Band 41	Left Touch	0.152	0.037	0.189
		Right Touch	0.356	0.115	0.471
		Left Tilt	0.101	0.059	0.160
		Right Tilt	0.076	0.134	0.210

Table 12.4.26 Simultaneous Transmission Scenario : 2.4 GHz W-LAN Ant.1 + 5 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	5.2G W-LAN Ant.2	Left Touch	0.090	0.008	0.098
		Right Touch	0.356	0.018	0.374
		Left Tilt	0.143	0.011	0.154
		Right Tilt	0.313	0.014	0.327
	5.6G W-LAN Ant.2	Left Touch	0.090	0.015	0.105
		Right Touch	0.356	0.022	0.378
		Left Tilt	0.143	0.017	0.160
		Right Tilt	0.313	0.012	0.325
	5.8G W-LAN Ant.2	Left Touch	0.090	0.010	0.100
		Right Touch	0.356	0.021	0.377
		Left Tilt	0.143	0.015	0.158
		Right Tilt	0.313	0.019	0.332

Table 12.4.27 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN Ant.1	Left Touch	0.037	0.287	0.324
		Right Touch	0.115	0.587	0.702
		Left Tilt	0.059	0.344	0.403
		Right Tilt	0.134	0.654	0.788
	5.6G W-LAN Ant.1	Left Touch	0.037	0.322	0.359
		Right Touch	0.115	0.641	0.756
		Left Tilt	0.059	0.436	0.495
		Right Tilt	0.134	0.747	0.881
	5.8G W-LAN Ant.1	Left Touch	0.037	0.145	0.182
		Right Touch	0.115	0.220	0.335
		Left Tilt	0.059	0.189	0.248
		Right Tilt	0.134	0.321	0.455

Table 12.4.28 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN Ant.2	Left Touch	0.037	0.008	0.045
		Right Touch	0.115	0.018	0.133
		Left Tilt	0.059	0.011	0.070
		Right Tilt	0.134	0.014	0.148
	5.6G W-LAN Ant.2	Left Touch	0.037	0.015	0.052
		Right Touch	0.115	0.022	0.137
		Left Tilt	0.059	0.017	0.076
		Right Tilt	0.134	0.012	0.146
	5.8G W-LAN Ant.2	Left Touch	0.037	0.010	0.047
		Right Touch	0.115	0.021	0.136
		Left Tilt	0.059	0.015	0.074
		Right Tilt	0.134	0.019	0.153

Table 12.4.29 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN MIMO	Left Touch	0.037	0.259	0.296
		Right Touch	0.115	0.365	0.480
		Left Tilt	0.059	0.309	0.368
		Right Tilt	0.134	0.517	0.651
	5.6G W-LAN MIMO	Left Touch	0.037	0.345	0.382
		Right Touch	0.115	0.704	0.819
		Left Tilt	0.059	0.445	0.504
		Right Tilt	0.134	0.777	0.911
	5.8G W-LAN MIMO	Left Touch	0.037	0.154	0.191
		Right Touch	0.115	0.249	0.364
		Left Tilt	0.059	0.192	0.251
		Right Tilt	0.134	0.372	0.506

12.5 Body-Worn Simultaneous Transmission Analysis

Table 12.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.040	0.026	0.519	0.505	0.545
		Rear	0.652	0.102	0.281	0.754	0.933	1.035
	GPRS 850	Front	0.501	0.040	0.026	0.541	0.527	0.567
		Rear	0.670	0.102	0.281	0.772	0.951	1.053
	GSM 1900	Front	0.269	0.040	0.026	0.309	0.295	0.335
		Rear	0.275	0.102	0.281	0.377	0.556	0.658
	GPRS 1900	Front	0.316	0.040	0.026	0.356	0.342	0.382
		Rear	0.340	0.102	0.281	0.442	0.621	0.723
	WCDMA 850	Front	0.392	0.040	0.026	0.432	0.418	0.458
		Rear	0.608	0.102	0.281	0.710	0.889	0.991
	WCDMA 1700	Front	0.348	0.040	0.026	0.388	0.374	0.414
		Rear	0.389	0.102	0.281	0.491	0.670	0.772
	WCDMA 1900	Front	0.442	0.040	0.026	0.482	0.468	0.508
		Rear	0.508	0.102	0.281	0.610	0.789	0.891
	LTE Band 12	Front	0.468	0.040	0.026	0.508	0.494	0.534
		Rear	0.624	0.102	0.281	0.726	0.905	1.007
	LTE Band 13	Front	0.598	0.040	0.026	0.638	0.624	0.664
		Rear	0.689	0.102	0.281	0.791	0.970	1.072
	LTE Band 5	Front	0.320	0.040	0.026	0.360	0.346	0.386
		Rear	0.546	0.102	0.281	0.648	0.827	0.929
	LTE Band 4	Front	0.262	0.040	0.026	0.302	0.288	0.328
		Rear	0.385	0.102	0.281	0.487	0.666	0.768
	LTE Band 2	Front	0.303	0.040	0.026	0.343	0.329	0.369
		Rear	0.345	0.102	0.281	0.447	0.626	0.728
	LTE Band 41	Front	0.344	0.040	0.026	0.384	0.370	0.410
		Rear	0.469	0.102	0.281	0.571	0.750	0.852

Table 12.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1+ 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.040	0.008	0.519	0.487	0.527
		Rear	0.652	0.102	0.711	0.754	1.363	1.465
	GPRS 850	Front	0.501	0.040	0.008	0.541	0.509	0.549
		Rear	0.670	0.102	0.711	0.772	1.381	1.483
	GSM 1900	Front	0.269	0.040	0.008	0.309	0.277	0.317
		Rear	0.275	0.102	0.711	0.377	0.986	1.088
	GPRS 1900	Front	0.316	0.040	0.008	0.356	0.324	0.364
		Rear	0.340	0.102	0.711	0.442	1.051	1.153
	WCDMA 850	Front	0.392	0.040	0.008	0.432	0.400	0.440
		Rear	0.608	0.102	0.711	0.710	1.319	1.421
	WCDMA 1700	Front	0.348	0.040	0.008	0.388	0.356	0.396
		Rear	0.389	0.102	0.711	0.491	1.100	1.202
	WCDMA 1900	Front	0.442	0.040	0.008	0.482	0.450	0.490
		Rear	0.508	0.102	0.711	0.610	1.219	1.321
	LTE Band 12	Front	0.468	0.040	0.008	0.508	0.476	0.516
		Rear	0.624	0.102	0.711	0.726	1.335	1.437
	LTE Band 13	Front	0.598	0.040	0.008	0.638	0.606	0.646
		Rear	0.689	0.102	0.711	0.791	1.400	1.502
	LTE Band 5	Front	0.320	0.040	0.008	0.360	0.328	0.368
		Rear	0.546	0.102	0.711	0.648	1.257	1.359
	LTE Band 4	Front	0.262	0.040	0.008	0.302	0.270	0.310
		Rear	0.385	0.102	0.711	0.487	1.096	1.198
	LTE Band 2	Front	0.303	0.040	0.008	0.343	0.311	0.351
		Rear	0.345	0.102	0.711	0.447	1.056	1.158
	LTE Band 41	Front	0.344	0.040	0.008	0.384	0.352	0.392
		Rear	0.469	0.102	0.711	0.571	1.180	1.282

Table 12.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.8 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.040	0.031	0.519	0.510	0.550
		Rear	0.652	0.102	0.244	0.754	0.896	0.998
	GPRS 850	Front	0.501	0.040	0.031	0.541	0.532	0.572
		Rear	0.670	0.102	0.244	0.772	0.914	1.016
	GSM 1900	Front	0.269	0.040	0.031	0.309	0.300	0.340
		Rear	0.275	0.102	0.244	0.377	0.519	0.621
	GPRS 1900	Front	0.316	0.040	0.031	0.356	0.347	0.387
		Rear	0.340	0.102	0.244	0.442	0.584	0.686
	WCDMA 850	Front	0.392	0.040	0.031	0.432	0.423	0.463
		Rear	0.608	0.102	0.244	0.710	0.852	0.954
	WCDMA 1700	Front	0.348	0.040	0.031	0.388	0.379	0.419
		Rear	0.389	0.102	0.244	0.491	0.633	0.735
	WCDMA 1900	Front	0.442	0.040	0.031	0.482	0.473	0.513
		Rear	0.508	0.102	0.244	0.610	0.752	0.854
	LTE Band 12	Front	0.468	0.040	0.031	0.508	0.499	0.539
		Rear	0.624	0.102	0.244	0.726	0.868	0.970
	LTE Band 13	Front	0.598	0.040	0.031	0.638	0.629	0.669
		Rear	0.689	0.102	0.244	0.791	0.933	1.035
	LTE Band 5	Front	0.320	0.040	0.031	0.360	0.351	0.391
		Rear	0.546	0.102	0.244	0.648	0.790	0.892
	LTE Band 4	Front	0.262	0.040	0.031	0.302	0.293	0.333
		Rear	0.385	0.102	0.244	0.487	0.629	0.731
	LTE Band 2	Front	0.303	0.040	0.031	0.343	0.334	0.374
		Rear	0.345	0.102	0.244	0.447	0.589	0.691
	LTE Band 41	Front	0.344	0.040	0.031	0.384	0.375	0.415
		Rear	0.469	0.102	0.244	0.571	0.713	0.815

Table 12.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.041	0.489	0.520	0.530
		Rear	0.652	0.039	0.080	0.691	0.732	0.771
	GPRS 850	Front	0.501	0.010	0.041	0.511	0.542	0.552
		Rear	0.670	0.039	0.080	0.709	0.750	0.789
	GSM 1900	Front	0.269	0.010	0.041	0.279	0.310	0.320
		Rear	0.275	0.039	0.080	0.314	0.355	0.394
	GPRS 1900	Front	0.316	0.010	0.041	0.326	0.357	0.367
		Rear	0.340	0.039	0.080	0.379	0.420	0.459
	WCDMA 850	Front	0.392	0.010	0.041	0.402	0.433	0.443
		Rear	0.608	0.039	0.080	0.647	0.688	0.727
	WCDMA 1700	Front	0.348	0.010	0.041	0.358	0.389	0.399
		Rear	0.389	0.039	0.080	0.428	0.469	0.508
	WCDMA 1900	Front	0.442	0.010	0.041	0.452	0.483	0.493
		Rear	0.508	0.039	0.080	0.547	0.588	0.627
	LTE Band 12	Front	0.468	0.010	0.041	0.478	0.509	0.519
		Rear	0.624	0.039	0.080	0.663	0.704	0.743
	LTE Band 13	Front	0.598	0.010	0.041	0.608	0.639	0.649
		Rear	0.689	0.039	0.080	0.728	0.769	0.808
	LTE Band 5	Front	0.320	0.010	0.041	0.330	0.361	0.371
		Rear	0.546	0.039	0.080	0.585	0.626	0.665
	LTE Band 4	Front	0.262	0.010	0.041	0.272	0.303	0.313
		Rear	0.385	0.039	0.080	0.424	0.465	0.504
	LTE Band 2	Front	0.303	0.010	0.041	0.313	0.344	0.354
		Rear	0.345	0.039	0.080	0.384	0.425	0.464
	LTE Band 41	Front	0.344	0.010	0.041	0.354	0.385	0.395
		Rear	0.469	0.039	0.080	0.508	0.549	0.588

Table 12.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.026	0.489	0.505	0.515
		Rear	0.652	0.039	0.281	0.691	0.933	0.972
	GPRS 850	Front	0.501	0.010	0.026	0.511	0.527	0.537
		Rear	0.670	0.039	0.281	0.709	0.951	0.990
	GSM 1900	Front	0.269	0.010	0.026	0.279	0.295	0.305
		Rear	0.275	0.039	0.281	0.314	0.556	0.595
	GPRS 1900	Front	0.316	0.010	0.026	0.326	0.342	0.352
		Rear	0.340	0.039	0.281	0.379	0.621	0.660
	WCDMA 850	Front	0.392	0.010	0.026	0.402	0.418	0.428
		Rear	0.608	0.039	0.281	0.647	0.889	0.928
	WCDMA 1700	Front	0.348	0.010	0.026	0.358	0.374	0.384
		Rear	0.389	0.039	0.281	0.428	0.670	0.709
	WCDMA 1900	Front	0.442	0.010	0.026	0.452	0.468	0.478
		Rear	0.508	0.039	0.281	0.547	0.789	0.828
	LTE Band 12	Front	0.468	0.010	0.026	0.478	0.494	0.504
		Rear	0.624	0.039	0.281	0.663	0.905	0.944
	LTE Band 13	Front	0.598	0.010	0.026	0.608	0.624	0.634
		Rear	0.689	0.039	0.281	0.728	0.970	1.009
	LTE Band 5	Front	0.320	0.010	0.026	0.330	0.346	0.356
		Rear	0.546	0.039	0.281	0.585	0.827	0.866
	LTE Band 4	Front	0.262	0.010	0.026	0.272	0.288	0.298
		Rear	0.385	0.039	0.281	0.424	0.666	0.705
	LTE Band 2	Front	0.303	0.010	0.026	0.313	0.329	0.339
		Rear	0.345	0.039	0.281	0.384	0.626	0.665
	LTE Band 41	Front	0.344	0.010	0.026	0.354	0.370	0.380
		Rear	0.469	0.039	0.281	0.508	0.750	0.789

Table 12.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.020	0.489	0.499	0.509
		Rear	0.652	0.039	0.404	0.691	1.056	1.095
	GPRS 850	Front	0.501	0.010	0.020	0.511	0.521	0.531
		Rear	0.670	0.039	0.404	0.709	1.074	1.113
	GSM 1900	Front	0.269	0.010	0.020	0.279	0.289	0.299
		Rear	0.275	0.039	0.404	0.314	0.679	0.718
	GPRS 1900	Front	0.316	0.010	0.020	0.326	0.336	0.346
		Rear	0.340	0.039	0.404	0.379	0.744	0.783
	WCDMA 850	Front	0.392	0.010	0.020	0.402	0.412	0.422
		Rear	0.608	0.039	0.404	0.647	1.012	1.051
	WCDMA 1700	Front	0.348	0.010	0.020	0.358	0.368	0.378
		Rear	0.389	0.039	0.404	0.428	0.793	0.832
	WCDMA 1900	Front	0.442	0.010	0.020	0.452	0.462	0.472
		Rear	0.508	0.039	0.404	0.547	0.912	0.951
	LTE Band 12	Front	0.468	0.010	0.020	0.478	0.488	0.498
		Rear	0.624	0.039	0.404	0.663	1.028	1.067
	LTE Band 13	Front	0.598	0.010	0.020	0.608	0.618	0.628
		Rear	0.689	0.039	0.404	0.728	1.093	1.132
	LTE Band 5	Front	0.320	0.010	0.020	0.330	0.340	0.350
		Rear	0.546	0.039	0.404	0.585	0.950	0.989
	LTE Band 4	Front	0.262	0.010	0.020	0.272	0.282	0.292
		Rear	0.385	0.039	0.404	0.424	0.789	0.828
	LTE Band 2	Front	0.303	0.010	0.020	0.313	0.323	0.333
		Rear	0.345	0.039	0.404	0.384	0.749	0.788
	LTE Band 41	Front	0.344	0.010	0.020	0.354	0.364	0.374
		Rear	0.469	0.039	0.404	0.508	0.873	0.912

Table 12.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.064	0.489	0.543	0.553
		Rear	0.652	0.039	0.202	0.691	0.854	0.893
	GPRS 850	Front	0.501	0.010	0.064	0.511	0.565	0.575
		Rear	0.670	0.039	0.202	0.709	0.872	0.911
	GSM 1900	Front	0.269	0.010	0.064	0.279	0.333	0.343
		Rear	0.275	0.039	0.202	0.314	0.477	0.516
	GPRS 1900	Front	0.316	0.010	0.064	0.326	0.380	0.390
		Rear	0.340	0.039	0.202	0.379	0.542	0.581
	WCDMA 850	Front	0.392	0.010	0.064	0.402	0.456	0.466
		Rear	0.608	0.039	0.202	0.647	0.810	0.849
	WCDMA 1700	Front	0.348	0.010	0.064	0.358	0.412	0.422
		Rear	0.389	0.039	0.202	0.428	0.591	0.630
	WCDMA 1900	Front	0.442	0.010	0.064	0.452	0.506	0.516
		Rear	0.508	0.039	0.202	0.547	0.710	0.749
	LTE Band 12	Front	0.468	0.010	0.064	0.478	0.532	0.542
		Rear	0.624	0.039	0.202	0.663	0.826	0.865
	LTE Band 13	Front	0.598	0.010	0.064	0.608	0.662	0.672
		Rear	0.689	0.039	0.202	0.728	0.891	0.930
	LTE Band 5	Front	0.320	0.010	0.064	0.330	0.384	0.394
		Rear	0.546	0.039	0.202	0.585	0.748	0.787
	LTE Band 4	Front	0.262	0.010	0.064	0.272	0.326	0.336
		Rear	0.385	0.039	0.202	0.424	0.587	0.626
	LTE Band 2	Front	0.303	0.010	0.064	0.313	0.367	0.377
		Rear	0.345	0.039	0.202	0.384	0.547	0.586
	LTE Band 41	Front	0.344	0.010	0.064	0.354	0.408	0.418
		Rear	0.469	0.039	0.202	0.508	0.671	0.710

Table 12.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.008	0.489	0.487	0.497
		Rear	0.652	0.039	0.711	0.691	1.363	1.402
	GPRS 850	Front	0.501	0.010	0.008	0.511	0.509	0.519
		Rear	0.670	0.039	0.711	0.709	1.381	1.420
	GSM 1900	Front	0.269	0.010	0.008	0.279	0.277	0.287
		Rear	0.275	0.039	0.711	0.314	0.986	1.025
	GPRS 1900	Front	0.316	0.010	0.008	0.326	0.324	0.334
		Rear	0.340	0.039	0.711	0.379	1.051	1.090
	WCDMA 850	Front	0.392	0.010	0.008	0.402	0.400	0.410
		Rear	0.608	0.039	0.711	0.647	1.319	1.358
	WCDMA 1700	Front	0.348	0.010	0.008	0.358	0.356	0.366
		Rear	0.389	0.039	0.711	0.428	1.100	1.139
	WCDMA 1900	Front	0.442	0.010	0.008	0.452	0.450	0.460
		Rear	0.508	0.039	0.711	0.547	1.219	1.258
	LTE Band 12	Front	0.468	0.010	0.008	0.478	0.476	0.486
		Rear	0.624	0.039	0.711	0.663	1.335	1.374
	LTE Band 13	Front	0.598	0.010	0.008	0.608	0.606	0.616
		Rear	0.689	0.039	0.711	0.728	1.400	1.439
	LTE Band 5	Front	0.320	0.010	0.008	0.330	0.328	0.338
		Rear	0.546	0.039	0.711	0.585	1.257	1.296
	LTE Band 4	Front	0.262	0.010	0.008	0.272	0.270	0.280
		Rear	0.385	0.039	0.711	0.424	1.096	1.135
	LTE Band 2	Front	0.303	0.010	0.008	0.313	0.311	0.321
		Rear	0.345	0.039	0.711	0.384	1.056	1.095
	LTE Band 41	Front	0.344	0.010	0.008	0.354	0.352	0.362
		Rear	0.469	0.039	0.711	0.508	1.180	1.219

Table 12.5.9 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.067	0.489	0.546	0.556
		Rear	0.652	0.039	0.760	0.691	1.412	1.451
	GPRS 850	Front	0.501	0.010	0.067	0.511	0.568	0.578
		Rear	0.670	0.039	0.760	0.709	1.430	1.469
	GSM 1900	Front	0.269	0.010	0.067	0.279	0.336	0.346
		Rear	0.275	0.039	0.760	0.314	1.035	1.074
	GPRS 1900	Front	0.316	0.010	0.067	0.326	0.383	0.393
		Rear	0.340	0.039	0.760	0.379	1.100	1.139
	WCDMA 850	Front	0.392	0.010	0.067	0.402	0.459	0.469
		Rear	0.608	0.039	0.760	0.647	1.368	1.407
	WCDMA 1700	Front	0.348	0.010	0.067	0.358	0.415	0.425
		Rear	0.389	0.039	0.760	0.428	1.149	1.188
	WCDMA 1900	Front	0.442	0.010	0.067	0.452	0.509	0.519
		Rear	0.508	0.039	0.760	0.547	1.268	1.307
	LTE Band 12	Front	0.468	0.010	0.067	0.478	0.535	0.545
		Rear	0.624	0.039	0.760	0.663	1.384	1.423
	LTE Band 13	Front	0.598	0.010	0.067	0.608	0.665	0.675
		Rear	0.689	0.039	0.760	0.728	1.449	1.488
	LTE Band 5	Front	0.320	0.010	0.067	0.330	0.387	0.397
		Rear	0.546	0.039	0.760	0.585	1.306	1.345
	LTE Band 4	Front	0.262	0.010	0.067	0.272	0.329	0.339
		Rear	0.385	0.039	0.760	0.424	1.145	1.184
	LTE Band 2	Front	0.303	0.010	0.067	0.313	0.370	0.380
		Rear	0.345	0.039	0.760	0.384	1.105	1.144
	LTE Band 41	Front	0.344	0.010	0.067	0.354	0.411	0.421
		Rear	0.469	0.039	0.760	0.508	1.229	1.268

Table 12.5.10 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.013	0.489	0.492	0.502
		Rear	0.652	0.039	0.097	0.691	0.749	0.788
	GPRS 850	Front	0.501	0.010	0.013	0.511	0.514	0.524
		Rear	0.670	0.039	0.097	0.709	0.767	0.806
	GSM 1900	Front	0.269	0.010	0.013	0.279	0.282	0.292
		Rear	0.275	0.039	0.097	0.314	0.372	0.411
	GPRS 1900	Front	0.316	0.010	0.013	0.326	0.329	0.339
		Rear	0.340	0.039	0.097	0.379	0.437	0.476
	WCDMA 850	Front	0.392	0.010	0.013	0.402	0.405	0.415
		Rear	0.608	0.039	0.097	0.647	0.705	0.744
	WCDMA 1700	Front	0.348	0.010	0.013	0.358	0.361	0.371
		Rear	0.389	0.039	0.097	0.428	0.486	0.525
	WCDMA 1900	Front	0.442	0.010	0.013	0.452	0.455	0.465
		Rear	0.508	0.039	0.097	0.547	0.605	0.644
	LTE Band 12	Front	0.468	0.010	0.013	0.478	0.481	0.491
		Rear	0.624	0.039	0.097	0.663	0.721	0.760
	LTE Band 13	Front	0.598	0.010	0.013	0.608	0.611	0.621
		Rear	0.689	0.039	0.097	0.728	0.786	0.825
	LTE Band 5	Front	0.320	0.010	0.013	0.330	0.333	0.343
		Rear	0.546	0.039	0.097	0.585	0.643	0.682
	LTE Band 4	Front	0.262	0.010	0.013	0.272	0.275	0.285
		Rear	0.385	0.039	0.097	0.424	0.482	0.521
	LTE Band 2	Front	0.303	0.010	0.013	0.313	0.316	0.326
		Rear	0.345	0.039	0.097	0.384	0.442	0.481
	LTE Band 41	Front	0.344	0.010	0.013	0.354	0.357	0.367
		Rear	0.469	0.039	0.097	0.508	0.566	0.605

Table 12.5.11 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.031	0.489	0.510	0.520
		Rear	0.652	0.039	0.244	0.691	0.896	0.935
	GPRS 850	Front	0.501	0.010	0.031	0.511	0.532	0.542
		Rear	0.670	0.039	0.244	0.709	0.914	0.953
	GSM 1900	Front	0.269	0.010	0.031	0.279	0.300	0.310
		Rear	0.275	0.039	0.244	0.314	0.519	0.558
	GPRS 1900	Front	0.316	0.010	0.031	0.326	0.347	0.357
		Rear	0.340	0.039	0.244	0.379	0.584	0.623
	WCDMA 850	Front	0.392	0.010	0.031	0.402	0.423	0.433
		Rear	0.608	0.039	0.244	0.647	0.852	0.891
	WCDMA 1700	Front	0.348	0.010	0.031	0.358	0.379	0.389
		Rear	0.389	0.039	0.244	0.428	0.633	0.672
	WCDMA 1900	Front	0.442	0.010	0.031	0.452	0.473	0.483
		Rear	0.508	0.039	0.244	0.547	0.752	0.791
	LTE Band 12	Front	0.468	0.010	0.031	0.478	0.499	0.509
		Rear	0.624	0.039	0.244	0.663	0.868	0.907
	LTE Band 13	Front	0.598	0.010	0.031	0.608	0.629	0.639
		Rear	0.689	0.039	0.244	0.728	0.933	0.972
	LTE Band 5	Front	0.320	0.010	0.031	0.330	0.351	0.361
		Rear	0.546	0.039	0.244	0.585	0.790	0.829
	LTE Band 4	Front	0.262	0.010	0.031	0.272	0.293	0.303
		Rear	0.385	0.039	0.244	0.424	0.629	0.668
	LTE Band 2	Front	0.303	0.010	0.031	0.313	0.334	0.344
		Rear	0.345	0.039	0.244	0.384	0.589	0.628
	LTE Band 41	Front	0.344	0.010	0.031	0.354	0.375	0.385
		Rear	0.469	0.039	0.244	0.508	0.713	0.752

Table 12.5.12 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.024	0.489	0.503	0.513
		Rear	0.652	0.039	0.251	0.691	0.903	0.942
	GPRS 850	Front	0.501	0.010	0.024	0.511	0.525	0.535
		Rear	0.670	0.039	0.251	0.709	0.921	0.960
	GSM 1900	Front	0.269	0.010	0.024	0.279	0.293	0.303
		Rear	0.275	0.039	0.251	0.314	0.526	0.565
	GPRS 1900	Front	0.316	0.010	0.024	0.326	0.340	0.350
		Rear	0.340	0.039	0.251	0.379	0.591	0.630
	WCDMA 850	Front	0.392	0.010	0.024	0.402	0.416	0.426
		Rear	0.608	0.039	0.251	0.647	0.859	0.898
	WCDMA 1700	Front	0.348	0.010	0.024	0.358	0.372	0.382
		Rear	0.389	0.039	0.251	0.428	0.640	0.679
	WCDMA 1900	Front	0.442	0.010	0.024	0.452	0.466	0.476
		Rear	0.508	0.039	0.251	0.547	0.759	0.798
	LTE Band 12	Front	0.468	0.010	0.024	0.478	0.492	0.502
		Rear	0.624	0.039	0.251	0.663	0.875	0.914
	LTE Band 13	Front	0.598	0.010	0.024	0.608	0.622	0.632
		Rear	0.689	0.039	0.251	0.728	0.940	0.979
	LTE Band 5	Front	0.320	0.010	0.024	0.330	0.344	0.354
		Rear	0.546	0.039	0.251	0.585	0.797	0.836
	LTE Band 4	Front	0.262	0.010	0.024	0.272	0.286	0.296
		Rear	0.385	0.039	0.251	0.424	0.636	0.675
	LTE Band 2	Front	0.303	0.010	0.024	0.313	0.327	0.337
		Rear	0.345	0.039	0.251	0.384	0.596	0.635
	LTE Band 41	Front	0.344	0.010	0.024	0.354	0.368	0.378
		Rear	0.469	0.039	0.251	0.508	0.720	0.759

Table 12.5.13 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.040	0.519
		Rear	0.652	0.102	0.754
	GPRS 850	Front	0.501	0.040	0.541
		Rear	0.670	0.102	0.772
	GSM 1900	Front	0.269	0.040	0.309
		Rear	0.275	0.102	0.377
	GPRS 1900	Front	0.316	0.040	0.356
		Rear	0.340	0.102	0.442
	WCDMA 850	Front	0.392	0.040	0.432
		Rear	0.608	0.102	0.710
	WCDMA 1700	Front	0.348	0.040	0.388
		Rear	0.389	0.102	0.491
	WCDMA 1900	Front	0.442	0.040	0.482
		Rear	0.508	0.102	0.610
	LTE Band 12	Front	0.468	0.040	0.508
		Rear	0.624	0.102	0.726
	LTE Band 13	Front	0.598	0.040	0.638
		Rear	0.689	0.102	0.791
	LTE Band 5	Front	0.320	0.040	0.360
		Rear	0.546	0.102	0.648
	LTE Band 4	Front	0.262	0.040	0.302
		Rear	0.385	0.102	0.487
	LTE Band 2	Front	0.303	0.040	0.343
		Rear	0.345	0.102	0.447
	LTE Band 41	Front	0.344	0.040	0.384
		Rear	0.469	0.102	0.571

Table 12.5.14 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.011	0.490
		Rear	0.652	0.327	0.979
	GPRS 850	Front	0.501	0.011	0.512
		Rear	0.670	0.327	0.997
	GSM 1900	Front	0.269	0.011	0.280
		Rear	0.275	0.327	0.602
	GPRS 1900	Front	0.316	0.011	0.327
		Rear	0.340	0.327	0.667
	WCDMA 850	Front	0.392	0.011	0.403
		Rear	0.608	0.327	0.935
	WCDMA 1700	Front	0.348	0.011	0.359
		Rear	0.389	0.327	0.716
	WCDMA 1900	Front	0.442	0.011	0.453
		Rear	0.508	0.327	0.835
	LTE Band 12	Front	0.468	0.011	0.479
		Rear	0.624	0.327	0.951
	LTE Band 13	Front	0.598	0.011	0.609
		Rear	0.689	0.327	1.016
	LTE Band 5	Front	0.320	0.011	0.331
		Rear	0.546	0.327	0.873
	LTE Band 4	Front	0.262	0.011	0.273
		Rear	0.385	0.327	0.712
	LTE Band 2	Front	0.303	0.011	0.314
		Rear	0.345	0.327	0.672
	LTE Band 41	Front	0.344	0.011	0.355
		Rear	0.469	0.327	0.796

Table 12.5.15 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.051	0.530
		Rear	0.652	0.292	0.944
	GPRS 850	Front	0.501	0.051	0.552
		Rear	0.670	0.292	0.962
	GSM 1900	Front	0.269	0.051	0.320
		Rear	0.275	0.292	0.567
	GPRS 1900	Front	0.316	0.051	0.367
		Rear	0.340	0.292	0.632
	WCDMA 850	Front	0.392	0.051	0.443
		Rear	0.608	0.292	0.900
	WCDMA 1700	Front	0.348	0.051	0.399
		Rear	0.389	0.292	0.681
	WCDMA 1900	Front	0.442	0.051	0.493
		Rear	0.508	0.292	0.800
	LTE Band 12	Front	0.468	0.051	0.519
		Rear	0.624	0.292	0.916
	LTE Band 13	Front	0.598	0.051	0.649
		Rear	0.689	0.292	0.981
	LTE Band 5	Front	0.320	0.051	0.371
		Rear	0.546	0.292	0.838
	LTE Band 4	Front	0.262	0.051	0.313
		Rear	0.385	0.292	0.677
	LTE Band 2	Front	0.303	0.051	0.354
		Rear	0.345	0.292	0.637
	LTE Band 41	Front	0.344	0.051	0.395
		Rear	0.469	0.292	0.761

Table 12.5.16 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.041	0.520
		Rear	0.652	0.080	0.732
	GPRS 850	Front	0.501	0.041	0.542
		Rear	0.670	0.080	0.750
	GSM 1900	Front	0.269	0.041	0.310
		Rear	0.275	0.080	0.355
	GPRS 1900	Front	0.316	0.041	0.357
		Rear	0.340	0.080	0.420
	WCDMA 850	Front	0.392	0.041	0.433
		Rear	0.608	0.080	0.688
	WCDMA 1700	Front	0.348	0.041	0.389
		Rear	0.389	0.080	0.469
	WCDMA 1900	Front	0.442	0.041	0.483
		Rear	0.508	0.080	0.588
	LTE Band 12	Front	0.468	0.041	0.509
		Rear	0.624	0.080	0.704
	LTE Band 13	Front	0.598	0.041	0.639
		Rear	0.689	0.080	0.769
	LTE Band 5	Front	0.320	0.041	0.361
		Rear	0.546	0.080	0.626
	LTE Band 4	Front	0.262	0.041	0.303
		Rear	0.385	0.080	0.465
	LTE Band 2	Front	0.303	0.041	0.344
		Rear	0.345	0.080	0.425
	LTE Band 41	Front	0.344	0.041	0.385
		Rear	0.469	0.080	0.549

Table 12.5.17 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.026	0.505
		Rear	0.652	0.281	0.933
	GPRS 850	Front	0.501	0.026	0.527
		Rear	0.670	0.281	0.951
	GSM 1900	Front	0.269	0.026	0.295
		Rear	0.275	0.281	0.556
	GPRS 1900	Front	0.316	0.026	0.342
		Rear	0.340	0.281	0.621
	WCDMA 850	Front	0.392	0.026	0.418
		Rear	0.608	0.281	0.889
	WCDMA 1700	Front	0.348	0.026	0.374
		Rear	0.389	0.281	0.670
	WCDMA 1900	Front	0.442	0.026	0.468
		Rear	0.508	0.281	0.789
	LTE Band 12	Front	0.468	0.026	0.494
		Rear	0.624	0.281	0.905
	LTE Band 13	Front	0.598	0.026	0.624
		Rear	0.689	0.281	0.970
	LTE Band 5	Front	0.320	0.026	0.346
		Rear	0.546	0.281	0.827
	LTE Band 4	Front	0.262	0.026	0.288
		Rear	0.385	0.281	0.666
	LTE Band 2	Front	0.303	0.026	0.329
		Rear	0.345	0.281	0.626
	LTE Band 41	Front	0.344	0.026	0.370
		Rear	0.469	0.281	0.750

Table 12.5.18 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.020	0.499
		Rear	0.652	0.404	1.056
	GPRS 850	Front	0.501	0.020	0.521
		Rear	0.670	0.404	1.074
	GSM 1900	Front	0.269	0.020	0.289
		Rear	0.275	0.404	0.679
	GPRS 1900	Front	0.316	0.020	0.336
		Rear	0.340	0.404	0.744
	WCDMA 850	Front	0.392	0.020	0.412
		Rear	0.608	0.404	1.012
	WCDMA 1700	Front	0.348	0.020	0.368
		Rear	0.389	0.404	0.793
	WCDMA 1900	Front	0.442	0.020	0.462
		Rear	0.508	0.404	0.912
	LTE Band 12	Front	0.468	0.020	0.488
		Rear	0.624	0.404	1.028
	LTE Band 13	Front	0.598	0.020	0.618
		Rear	0.689	0.404	1.093
	LTE Band 5	Front	0.320	0.020	0.340
		Rear	0.546	0.404	0.950
	LTE Band 4	Front	0.262	0.020	0.282
		Rear	0.385	0.404	0.789
	LTE Band 2	Front	0.303	0.020	0.323
		Rear	0.345	0.404	0.749
	LTE Band 41	Front	0.344	0.020	0.364
		Rear	0.469	0.404	0.873

Table 12.5.19 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.064	0.543
		Rear	0.652	0.202	0.854
	GPRS 850	Front	0.501	0.064	0.565
		Rear	0.670	0.202	0.872
	GSM 1900	Front	0.269	0.064	0.333
		Rear	0.275	0.202	0.477
	GPRS 1900	Front	0.316	0.064	0.380
		Rear	0.340	0.202	0.542
	WCDMA 850	Front	0.392	0.064	0.456
		Rear	0.608	0.202	0.810
	WCDMA 1700	Front	0.348	0.064	0.412
		Rear	0.389	0.202	0.591
	WCDMA 1900	Front	0.442	0.064	0.506
		Rear	0.508	0.202	0.710
	LTE Band 12	Front	0.468	0.064	0.532
		Rear	0.624	0.202	0.826
	LTE Band 13	Front	0.598	0.064	0.662
		Rear	0.689	0.202	0.891
	LTE Band 5	Front	0.320	0.064	0.384
		Rear	0.546	0.202	0.748
	LTE Band 4	Front	0.262	0.064	0.326
		Rear	0.385	0.202	0.587
	LTE Band 2	Front	0.303	0.064	0.367
		Rear	0.345	0.202	0.547
	LTE Band 41	Front	0.344	0.064	0.408
		Rear	0.469	0.202	0.671

Table 12.5.20 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.008	0.487
		Rear	0.652	0.711	1.363
	GPRS 850	Front	0.501	0.008	0.509
		Rear	0.670	0.711	1.381
	GSM 1900	Front	0.269	0.008	0.277
		Rear	0.275	0.711	0.986
	GPRS 1900	Front	0.316	0.008	0.324
		Rear	0.340	0.711	1.051
	WCDMA 850	Front	0.392	0.008	0.400
		Rear	0.608	0.711	1.319
	WCDMA 1700	Front	0.348	0.008	0.356
		Rear	0.389	0.711	1.100
	WCDMA 1900	Front	0.442	0.008	0.450
		Rear	0.508	0.711	1.219
	LTE Band 12	Front	0.468	0.008	0.476
		Rear	0.624	0.711	1.335
	LTE Band 13	Front	0.598	0.008	0.606
		Rear	0.689	0.711	1.400
	LTE Band 5	Front	0.320	0.008	0.328
		Rear	0.546	0.711	1.257
	LTE Band 4	Front	0.262	0.008	0.270
		Rear	0.385	0.711	1.096
	LTE Band 2	Front	0.303	0.008	0.311
		Rear	0.345	0.711	1.056
	LTE Band 41	Front	0.344	0.008	0.352
		Rear	0.469	0.711	1.180

Table 12.5.21 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.067	0.546
		Rear	0.652	0.760	1.412
	GPRS 850	Front	0.501	0.067	0.568
		Rear	0.670	0.760	1.430
	GSM 1900	Front	0.269	0.067	0.336
		Rear	0.275	0.760	1.035
	GPRS 1900	Front	0.316	0.067	0.383
		Rear	0.340	0.760	1.100
	WCDMA 850	Front	0.392	0.067	0.459
		Rear	0.608	0.760	1.368
	WCDMA 1700	Front	0.348	0.067	0.415
		Rear	0.389	0.760	1.149
	WCDMA 1900	Front	0.442	0.067	0.509
		Rear	0.508	0.760	1.268
	LTE Band 12	Front	0.468	0.067	0.535
		Rear	0.624	0.760	1.384
	LTE Band 13	Front	0.598	0.067	0.665
		Rear	0.689	0.760	1.449
	LTE Band 5	Front	0.320	0.067	0.387
		Rear	0.546	0.760	1.306
	LTE Band 4	Front	0.262	0.067	0.329
		Rear	0.385	0.760	1.145
	LTE Band 2	Front	0.303	0.067	0.370
		Rear	0.345	0.760	1.105
	LTE Band 41	Front	0.344	0.067	0.411
		Rear	0.469	0.760	1.229

Table 12.5.22 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.013	0.492
		Rear	0.652	0.097	0.749
	GPRS 850	Front	0.501	0.013	0.514
		Rear	0.670	0.097	0.767
	GSM 1900	Front	0.269	0.013	0.282
		Rear	0.275	0.097	0.372
	GPRS 1900	Front	0.316	0.013	0.329
		Rear	0.340	0.097	0.437
	WCDMA 850	Front	0.392	0.013	0.405
		Rear	0.608	0.097	0.705
	WCDMA 1700	Front	0.348	0.013	0.361
		Rear	0.389	0.097	0.486
	WCDMA 1900	Front	0.442	0.013	0.455
		Rear	0.508	0.097	0.605
	LTE Band 12	Front	0.468	0.013	0.481
		Rear	0.624	0.097	0.721
	LTE Band 13	Front	0.598	0.013	0.611
		Rear	0.689	0.097	0.786
	LTE Band 5	Front	0.320	0.013	0.333
		Rear	0.546	0.097	0.643
	LTE Band 4	Front	0.262	0.013	0.275
		Rear	0.385	0.097	0.482
	LTE Band 2	Front	0.303	0.013	0.316
		Rear	0.345	0.097	0.442
	LTE Band 41	Front	0.344	0.013	0.357
		Rear	0.469	0.097	0.566

Table 12.5.23 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.031	0.510
		Rear	0.652	0.244	0.896
	GPRS 850	Front	0.501	0.031	0.532
		Rear	0.670	0.244	0.914
	GSM 1900	Front	0.269	0.031	0.300
		Rear	0.275	0.244	0.519
	GPRS 1900	Front	0.316	0.031	0.347
		Rear	0.340	0.244	0.584
	WCDMA 850	Front	0.392	0.031	0.423
		Rear	0.608	0.244	0.852
	WCDMA 1700	Front	0.348	0.031	0.379
		Rear	0.389	0.244	0.633
	WCDMA 1900	Front	0.442	0.031	0.473
		Rear	0.508	0.244	0.752
	LTE Band 12	Front	0.468	0.031	0.499
		Rear	0.624	0.244	0.868
	LTE Band 13	Front	0.598	0.031	0.629
		Rear	0.689	0.244	0.933
	LTE Band 5	Front	0.320	0.031	0.351
		Rear	0.546	0.244	0.790
	LTE Band 4	Front	0.262	0.031	0.293
		Rear	0.385	0.244	0.629
	LTE Band 2	Front	0.303	0.031	0.334
		Rear	0.345	0.244	0.589
	LTE Band 41	Front	0.344	0.031	0.375
		Rear	0.469	0.244	0.713

Table 12.5.24 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.024	0.503
		Rear	0.652	0.251	0.903
	GPRS 850	Front	0.501	0.024	0.525
		Rear	0.670	0.251	0.921
	GSM 1900	Front	0.269	0.024	0.293
		Rear	0.275	0.251	0.526
	GPRS 1900	Front	0.316	0.024	0.340
		Rear	0.340	0.251	0.591
	WCDMA 850	Front	0.392	0.024	0.416
		Rear	0.608	0.251	0.859
	WCDMA 1700	Front	0.348	0.024	0.372
		Rear	0.389	0.251	0.640
	WCDMA 1900	Front	0.442	0.024	0.466
		Rear	0.508	0.251	0.759
	LTE Band 12	Front	0.468	0.024	0.492
		Rear	0.624	0.251	0.875
	LTE Band 13	Front	0.598	0.024	0.622
		Rear	0.689	0.251	0.940
	LTE Band 5	Front	0.320	0.024	0.344
		Rear	0.546	0.251	0.797
	LTE Band 4	Front	0.262	0.024	0.286
		Rear	0.385	0.251	0.636
	LTE Band 2	Front	0.303	0.024	0.327
		Rear	0.345	0.251	0.596
	LTE Band 41	Front	0.344	0.024	0.368
		Rear	0.469	0.251	0.720

Table 12.5.25 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.479	0.010	0.489
		Rear	0.652	0.039	0.691
	GPRS 850	Front	0.501	0.010	0.511
		Rear	0.670	0.039	0.709
	GSM 1900	Front	0.269	0.010	0.279
		Rear	0.275	0.039	0.314
	GPRS 1900	Front	0.316	0.010	0.326
		Rear	0.340	0.039	0.379
	WCDMA 850	Front	0.392	0.010	0.402
		Rear	0.608	0.039	0.647
	WCDMA 1700	Front	0.348	0.010	0.358
		Rear	0.389	0.039	0.428
	WCDMA 1900	Front	0.442	0.010	0.452
		Rear	0.508	0.039	0.547
	LTE Band 12	Front	0.468	0.010	0.478
		Rear	0.624	0.039	0.663
	LTE Band 13	Front	0.598	0.010	0.608
		Rear	0.689	0.039	0.728
	LTE Band 5	Front	0.320	0.010	0.330
		Rear	0.546	0.039	0.585
	LTE Band 4	Front	0.262	0.010	0.272
		Rear	0.385	0.039	0.424
	LTE Band 2	Front	0.303	0.010	0.313
		Rear	0.345	0.039	0.384
	LTE Band 41	Front	0.344	0.010	0.354
		Rear	0.469	0.039	0.508

Table 12.5.26 Simultaneous Transmission Scenario : 2.4 GHz W-LAN Ant.1 + 5 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.2G W-LAN Ant.2	Front	0.040	0.026	0.066
		Rear	0.102	0.281	0.383
	5.6G W-LAN Ant.2	Front	0.040	0.008	0.048
		Rear	0.102	0.711	0.813
	5.8G W-LAN Ant.2	Front	0.040	0.031	0.071
		Rear	0.102	0.244	0.346

Table 12.5.27 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN Ant.1	Front	0.010	0.041	0.051
		Rear	0.039	0.080	0.119
	5.6G W-LAN Ant.1	Front	0.010	0.064	0.074
		Rear	0.039	0.202	0.241
	5.8G W-LAN Ant.1	Front	0.010	0.013	0.023
		Rear	0.039	0.097	0.136

Table 12.5.28 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN Ant.2	Front	0.010	0.026	0.036
		Rear	0.039	0.281	0.320
	5.6G W-LAN Ant.2	Front	0.010	0.008	0.018
		Rear	0.039	0.711	0.750
	5.8G W-LAN Ant.2	Front	0.010	0.031	0.041
		Rear	0.039	0.244	0.283

Table 12.5.29 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN MIMO	Front	0.010	0.020	0.030
		Rear	0.039	0.404	0.443
	5.6G W-LAN MIMO	Front	0.010	0.067	0.077
		Rear	0.039	0.760	0.799
	5.8G W-LAN MIMO	Front	0.010	0.024	0.034
		Rear	0.039	0.251	0.290

12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("").

Table 12.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1+ 5.2 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.228	-	-	0.228	0.228	0.228
		Front	0.501	0.040	0.012	0.541	0.513	0.553
		Rear	0.670	0.102	0.275	0.772	0.945	1.047
		Right	0.372	-	-	0.372	0.372	0.372
		Left	-	0.051	0.075	0.051	0.075	0.126
	GPRS 1900	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.515	-	-	0.515	0.515	0.515
		Front	0.316	0.040	0.012	0.366	0.328	0.368
		Rear	0.340	0.102	0.275	0.442	0.615	0.717
		Right	-	-	-	-	-	-
		Left	0.174	0.051	0.075	0.225	0.249	0.300
	WCDMA 850	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.313	-	-	0.313	0.313	0.313
		Front	0.392	0.040	0.012	0.432	0.404	0.444
		Rear	0.608	0.102	0.275	0.710	0.883	0.985
		Right	0.274	-	-	0.274	0.274	0.274
		Left	-	0.051	0.075	0.051	0.075	0.126
	WCDMA 1700	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.440	-	-	0.440	0.440	0.440
		Front	0.348	0.040	0.012	0.388	0.360	0.400
		Rear	0.389	0.102	0.275	0.491	0.664	0.766
		Right	-	-	-	-	-	-
		Left	0.244	0.051	0.075	0.295	0.319	0.370
	WCDMA 1900	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.589	-	-	0.589	0.589	0.589
		Front	0.442	0.040	0.012	0.482	0.454	0.494
		Rear	0.508	0.102	0.275	0.610	0.783	0.885
		Right	-	-	-	-	-	-
		Left	0.325	0.051	0.075	0.376	0.400	0.451
	LTE Band 12	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.191	-	-	0.191	0.191	0.191
		Front	0.468	0.040	0.012	0.508	0.480	0.520
		Rear	0.624	0.102	0.275	0.726	0.899	1.001
		Right	0.302	-	-	0.302	0.302	0.302
		Left	-	0.051	0.075	0.051	0.075	0.126
	LTE Band 13	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.198	-	-	0.198	0.198	0.198
		Front	0.598	0.040	0.012	0.638	0.610	0.650
		Rear	0.689	0.102	0.275	0.791	0.964	1.066
		Right	0.303	-	-	0.303	0.303	0.303
		Left	-	0.051	0.075	0.051	0.075	0.126
	LTE Band 5	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.234	-	-	0.234	0.234	0.234
		Front	0.320	0.040	0.012	0.360	0.332	0.372
		Rear	0.546	0.102	0.275	0.648	0.821	0.923
		Right	0.410	-	-	0.410	0.410	0.410
		Left	-	0.051	0.075	0.051	0.075	0.126
	LTE Band 4	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.441	-	-	0.441	0.441	0.441
		Front	0.262	0.040	0.012	0.302	0.274	0.314
		Rear	0.385	0.102	0.275	0.487	0.660	0.762
		Right	-	-	-	-	-	-
		Left	0.176	0.051	0.075	0.227	0.251	0.302
	LTE Band 2	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	0.668	-	-	0.668	0.668	0.668
		Front	0.303	0.040	0.012	0.343	0.315	0.355
		Rear	0.345	0.102	0.275	0.447	0.620	0.722
		Right	-	-	-	-	-	-
		Left	0.222	0.051	0.075	0.273	0.297	0.348
	LTE Band 41	Top	-	0.078	0.023	0.078	0.023	0.101
		Bottom	-	-	-	-	-	-
		Front	0.344	0.040	0.012	0.384	0.356	0.396
		Rear	0.469	0.102	0.275	0.571	0.744	0.846
		Right	0.469	-	-	0.469	0.469	0.469
		Left	-	0.051	0.075	0.051	0.075	0.126

Table 12.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.8 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.228	-	-	0.228	0.228	0.228
		Front	0.501	0.040	0.031	0.541	0.532	0.572
		Rear	0.670	0.102	0.244	0.772	0.914	1.016
		Right	0.372	-	-	0.372	0.372	0.372
		Left	-	0.051	0.053	0.051	0.053	0.104
	GPRS 1900	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.515	-	-	0.515	0.515	0.515
		Front	0.316	0.040	0.031	0.356	0.347	0.387
		Rear	0.340	0.102	0.244	0.442	0.584	0.686
		Right	-	-	-	-	-	-
		Left	0.174	0.051	0.053	0.225	0.227	0.278
	WCDMA 850	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.313	-	-	0.313	0.313	0.313
		Front	0.392	0.040	0.031	0.432	0.423	0.463
		Rear	0.608	0.102	0.244	0.710	0.852	0.954
		Right	0.274	-	-	0.274	0.274	0.274
		Left	-	0.051	0.053	0.051	0.053	0.104
	WCDMA 1700	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.440	-	-	0.440	0.440	0.440
		Front	0.348	0.040	0.031	0.388	0.379	0.419
		Rear	0.389	0.102	0.244	0.491	0.633	0.735
		Right	-	-	-	-	-	-
		Left	0.244	0.051	0.053	0.295	0.297	0.348
	WCDMA 1900	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.589	-	-	0.589	0.589	0.589
		Front	0.442	0.040	0.031	0.482	0.473	0.513
		Rear	0.508	0.102	0.244	0.610	0.752	0.854
		Right	-	-	-	-	-	-
		Left	0.325	0.051	0.053	0.376	0.378	0.429
	LTE Band 12	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.191	-	-	0.191	0.191	0.191
		Front	0.468	0.040	0.031	0.508	0.499	0.539
		Rear	0.624	0.102	0.244	0.726	0.868	0.970
		Right	0.302	-	-	0.302	0.302	0.302
		Left	-	0.051	0.053	0.051	0.053	0.104
	LTE Band 13	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.198	-	-	0.198	0.198	0.198
		Front	0.598	0.040	0.031	0.638	0.629	0.669
		Rear	0.689	0.102	0.244	0.791	0.933	1.035
		Right	0.303	-	-	0.303	0.303	0.303
		Left	-	0.051	0.053	0.051	0.053	0.104
	LTE Band 5	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.234	-	-	0.234	0.234	0.234
		Front	0.320	0.040	0.031	0.360	0.351	0.391
		Rear	0.546	0.102	0.244	0.648	0.790	0.892
		Right	0.410	-	-	0.410	0.410	0.410
		Left	-	0.051	0.053	0.051	0.053	0.104
	LTE Band 4	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.441	-	-	0.441	0.441	0.441
		Front	0.262	0.040	0.031	0.302	0.293	0.333
		Rear	0.385	0.102	0.244	0.487	0.629	0.731
		Right	-	-	-	-	-	-
		Left	0.176	0.051	0.053	0.227	0.229	0.280
	LTE Band 2	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	0.668	-	-	0.668	0.668	0.668
		Front	0.303	0.040	0.031	0.343	0.334	0.374
		Rear	0.345	0.102	0.244	0.447	0.589	0.691
		Right	-	-	-	-	-	-
		Left	0.222	0.051	0.053	0.273	0.275	0.326
	LTE Band 41	Top	-	0.078	0.006	0.078	0.006	0.084
		Bottom	-	-	-	-	-	-
		Front	0.344	0.040	0.031	0.384	0.375	0.415
		Rear	0.469	0.102	0.244	0.571	0.713	0.815
		Right	0.469	-	-	0.469	0.469	0.469
		Left	-	0.051	0.053	0.051	0.053	0.104

Table 12.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.2 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.228	-	-	0.228	0.228	0.228
		Front	0.501	0.010	0.021	0.511	0.522	0.532
		Rear	0.670	0.039	0.079	0.709	0.749	0.788
		Right	0.372	-	-	0.372	0.372	0.372
		Left	-	0.018	0.039	0.018	0.039	0.057
	GPRS 1900	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.515	-	-	0.515	0.515	0.515
		Front	0.316	0.010	0.021	0.326	0.337	0.347
		Rear	0.340	0.039	0.079	0.379	0.419	0.458
		Right	-	-	-	-	-	-
		Left	0.174	0.018	0.039	0.192	0.213	0.231
	WCDMA 850	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.313	-	-	0.313	0.313	0.313
		Front	0.392	0.010	0.021	0.402	0.413	0.423
		Rear	0.608	0.039	0.079	0.647	0.687	0.726
		Right	0.274	-	-	0.274	0.274	0.274
		Left	-	0.018	0.039	0.018	0.039	0.058
	WCDMA 1700	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.440	-	-	0.440	0.440	0.440
		Front	0.348	0.010	0.021	0.358	0.369	0.379
		Rear	0.389	0.039	0.079	0.428	0.468	0.507
		Right	-	-	-	-	-	-
		Left	0.244	0.018	0.039	0.262	0.283	0.301
	WCDMA 1900	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.589	-	-	0.589	0.589	0.589
		Front	0.442	0.010	0.021	0.452	0.463	0.473
		Rear	0.508	0.039	0.079	0.547	0.587	0.626
		Right	-	-	-	-	-	-
		Left	0.325	0.018	0.039	0.343	0.364	0.382
	LTE Band 12	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.191	-	-	0.191	0.191	0.191
		Front	0.468	0.010	0.021	0.478	0.489	0.499
		Rear	0.624	0.039	0.079	0.663	0.703	0.742
		Right	0.302	-	-	0.302	0.302	0.302
		Left	-	0.018	0.039	0.018	0.039	0.057
	LTE Band 13	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.198	-	-	0.198	0.198	0.198
		Front	0.598	0.010	0.021	0.608	0.619	0.629
		Rear	0.689	0.039	0.079	0.728	0.768	0.807
		Right	0.303	-	-	0.303	0.303	0.303
		Left	-	0.018	0.039	0.018	0.039	0.057
	LTE Band 5	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.234	-	-	0.234	0.234	0.234
		Front	0.320	0.010	0.021	0.330	0.341	0.351
		Rear	0.546	0.039	0.079	0.585	0.625	0.664
		Right	0.410	-	-	0.410	0.410	0.410
		Left	-	0.018	0.039	0.018	0.039	0.057
	LTE Band 4	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.441	-	-	0.441	0.441	0.441
		Front	0.262	0.010	0.021	0.272	0.283	0.293
		Rear	0.385	0.039	0.079	0.424	0.464	0.503
		Right	-	-	-	-	-	-
		Left	0.176	0.018	0.039	0.194	0.215	0.233
	LTE Band 2	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	0.668	-	-	0.668	0.668	0.668
		Front	0.303	0.010	0.021	0.313	0.324	0.334
		Rear	0.345	0.039	0.079	0.384	0.424	0.463
		Right	-	-	-	-	-	-
		Left	0.222	0.018	0.039	0.240	0.261	0.279
	LTE Band 41	Top	-	0.032	0.035	0.032	0.035	0.067
		Bottom	-	-	-	-	-	-
		Front	0.344	0.010	0.021	0.354	0.365	0.375
		Rear	0.469	0.039	0.079	0.508	0.548	0.587
		Right	0.469	-	-	0.469	0.469	0.469
		Left	-	0.018	0.039	0.018	0.039	0.057

Table 12.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.2 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.228	-	-	0.228	0.228	0.228
		Front	0.501	0.010	0.012	0.511	0.513	0.523
		Rear	0.670	0.039	0.275	0.709	0.945	0.984
		Right	0.372	-	-	0.372	0.372	0.372
		Left	-	0.018	0.075	0.018	0.075	0.093
	GPRS 1900	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.515	-	-	0.515	0.515	0.515
		Front	0.316	0.010	0.012	0.326	0.328	0.338
		Rear	0.340	0.039	0.275	0.379	0.615	0.654
		Right	-	-	-	-	-	-
		Left	0.174	0.018	0.075	0.192	0.249	0.267
	WCDMA 850	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.313	-	-	0.313	0.313	0.313
		Front	0.392	0.010	0.012	0.402	0.404	0.414
		Rear	0.608	0.039	0.275	0.647	0.883	0.922
		Right	0.274	-	-	0.274	0.274	0.274
		Left	-	0.018	0.075	0.018	0.075	0.093
	WCDMA 1700	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.440	-	-	0.440	0.440	0.440
		Front	0.348	0.010	0.012	0.358	0.360	0.370
		Rear	0.389	0.039	0.275	0.428	0.664	0.703
		Right	-	-	-	-	-	-
		Left	0.244	0.018	0.075	0.262	0.319	0.337
	WCDMA 1900	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.589	-	-	0.589	0.589	0.589
		Front	0.442	0.010	0.012	0.452	0.454	0.464
		Rear	0.508	0.039	0.275	0.547	0.783	0.822
		Right	-	-	-	-	-	-
		Left	0.325	0.018	0.075	0.343	0.400	0.418
	LTE Band 12	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.191	-	-	0.191	0.191	0.191
		Front	0.468	0.010	0.012	0.478	0.480	0.490
		Rear	0.624	0.039	0.275	0.663	0.899	0.938
		Right	0.302	-	-	0.302	0.302	0.302
		Left	-	0.018	0.075	0.018	0.075	0.093
	LTE Band 13	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.198	-	-	0.198	0.198	0.198
		Front	0.598	0.010	0.012	0.608	0.610	0.620
		Rear	0.689	0.039	0.275	0.728	0.964	1.003
		Right	0.303	-	-	0.303	0.303	0.303
		Left	-	0.018	0.075	0.018	0.075	0.093
	LTE Band 5	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.234	-	-	0.234	0.234	0.234
		Front	0.320	0.010	0.012	0.330	0.332	0.342
		Rear	0.546	0.039	0.275	0.585	0.821	0.860
		Right	0.410	-	-	0.410	0.410	0.410
		Left	-	0.018	0.075	0.018	0.075	0.093
	LTE Band 4	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.441	-	-	0.441	0.441	0.441
		Front	0.262	0.010	0.012	0.272	0.274	0.284
		Rear	0.385	0.039	0.275	0.424	0.660	0.699
		Right	-	-	-	-	-	-
		Left	0.176	0.018	0.075	0.194	0.251	0.269
	LTE Band 2	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	0.668	-	-	0.668	0.668	0.668
		Front	0.303	0.010	0.012	0.313	0.315	0.325
		Rear	0.345	0.039	0.275	0.384	0.620	0.659
		Right	-	-	-	-	-	-
		Left	0.222	0.018	0.075	0.240	0.297	0.315
	LTE Band 41	Top	-	0.032	0.023	0.032	0.023	0.055
		Bottom	-	-	-	-	-	-
		Front	0.344	0.010	0.012	0.354	0.356	0.366
		Rear	0.469	0.039	0.275	0.508	0.744	0.783
		Right	0.469	-	-	0.469	0.469	0.469
		Left	-	0.018	0.075	0.018	0.075	0.093

Table 12.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.2 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.2G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.228	-	-	0.228	0.228	0.228
		Front	0.501	0.010	0.022	0.511	0.523	0.533
		Rear	0.670	0.039	0.335	0.709	1.005	1.044
		Right	0.372	-	-	0.372	0.372	0.372
		Left	-	0.018	0.108	0.018	0.108	0.126
	GPRS 1900	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.515	-	-	0.515	0.515	0.515
		Front	0.316	0.010	0.022	0.326	0.338	0.348
		Rear	0.340	0.039	0.335	0.379	0.675	0.714
		Right	-	-	-	-	-	-
		Left	0.174	0.018	0.108	0.192	0.282	0.300
	WCDMA 850	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.313	-	-	0.313	0.313	0.313
		Front	0.392	0.010	0.022	0.402	0.414	0.424
		Rear	0.608	0.039	0.335	0.647	0.943	0.982
		Right	0.274	-	-	0.274	0.274	0.274
		Left	-	0.018	0.108	0.018	0.108	0.126
	WCDMA 1700	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.440	-	-	0.440	0.440	0.440
		Front	0.348	0.010	0.022	0.358	0.370	0.380
		Rear	0.389	0.039	0.335	0.428	0.724	0.763
		Right	-	-	-	-	-	-
		Left	0.244	0.018	0.108	0.262	0.352	0.370
	WCDMA 1900	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.589	-	-	0.589	0.589	0.589
		Front	0.442	0.010	0.022	0.452	0.464	0.474
		Rear	0.508	0.039	0.335	0.547	0.843	0.882
		Right	-	-	-	-	-	-
		Left	0.325	0.018	0.108	0.343	0.433	0.451
	LTE Band 12	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.191	-	-	0.191	0.191	0.191
		Front	0.468	0.010	0.022	0.478	0.490	0.500
		Rear	0.624	0.039	0.335	0.663	0.959	0.998
		Right	0.302	-	-	0.302	0.302	0.302
		Left	-	0.018	0.108	0.018	0.108	0.126
	LTE Band 13	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.198	-	-	0.198	0.198	0.198
		Front	0.598	0.010	0.022	0.608	0.620	0.630
		Rear	0.689	0.039	0.335	0.728	1.024	1.063
		Right	0.303	-	-	0.303	0.303	0.303
		Left	-	0.018	0.108	0.018	0.108	0.126
	LTE Band 5	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.234	-	-	0.234	0.234	0.234
		Front	0.320	0.010	0.022	0.330	0.342	0.352
		Rear	0.546	0.039	0.335	0.585	0.881	0.920
		Right	0.410	-	-	0.410	0.410	0.410
		Left	-	0.018	0.108	0.018	0.108	0.126
	LTE Band 4	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.441	-	-	0.441	0.441	0.441
		Front	0.262	0.010	0.022	0.272	0.284	0.294
		Rear	0.385	0.039	0.335	0.424	0.720	0.759
		Right	-	-	-	-	-	-
		Left	0.176	0.018	0.108	0.194	0.284	0.302
	LTE Band 2	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	0.668	-	-	0.668	0.668	0.668
		Front	0.303	0.010	0.022	0.313	0.325	0.335
		Rear	0.345	0.039	0.335	0.384	0.680	0.719
		Right	-	-	-	-	-	-
		Left	0.222	0.018	0.108	0.240	0.330	0.348
	LTE Band 41	Top	-	0.032	0.028	0.032	0.028	0.060
		Bottom	-	-	-	-	-	-
		Front	0.344	0.010	0.022	0.354	0.366	0.376
		Rear	0.469	0.039	0.335	0.508	0.804	0.843
		Right	0.469	-	-	0.469	0.469	0.469
		Left	-	0.018	0.108	0.018	0.108	0.126

Table 12.6.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.228	-	-	0.228	0.228	0.228
		Front	0.501	0.010	0.013	0.511	0.514	0.524
		Rear	0.670	0.039	0.097	0.709	0.767	0.806
		Right	0.372	-	-	0.372	0.372	0.372
		Left	-	0.018	0.046	0.018	0.046	0.064
	GPRS 1900	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.515	-	-	0.515	0.515	0.515
		Front	0.316	0.010	0.013	0.326	0.329	0.339
		Rear	0.340	0.039	0.097	0.379	0.437	0.476
		Right	-	-	-	-	-	-
		Left	0.174	0.018	0.046	0.192	0.220	0.238
	WCDMA 850	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.313	-	-	0.313	0.313	0.313
		Front	0.392	0.010	0.013	0.402	0.405	0.415
		Rear	0.608	0.039	0.097	0.647	0.705	0.744
		Right	0.274	-	-	0.274	0.274	0.274
		Left	-	0.018	0.046	0.018	0.046	0.064
	WCDMA 1700	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.440	-	-	0.440	0.440	0.440
		Front	0.348	0.010	0.013	0.358	0.361	0.371
		Rear	0.389	0.039	0.097	0.428	0.486	0.525
		Right	-	-	-	-	-	-
		Left	0.244	0.018	0.046	0.262	0.290	0.308
	WCDMA 1900	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.589	-	-	0.589	0.589	0.589
		Front	0.442	0.010	0.013	0.452	0.455	0.465
		Rear	0.508	0.039	0.097	0.547	0.605	0.644
		Right	-	-	-	-	-	-
		Left	0.325	0.018	0.046	0.343	0.371	0.389
	LTE Band 12	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.191	-	-	0.191	0.191	0.191
		Front	0.468	0.010	0.013	0.478	0.481	0.491
		Rear	0.624	0.039	0.097	0.663	0.721	0.760
		Right	0.302	-	-	0.302	0.302	0.302
		Left	-	0.018	0.046	0.018	0.046	0.064
	LTE Band 13	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.198	-	-	0.198	0.198	0.198
		Front	0.598	0.010	0.013	0.608	0.611	0.621
		Rear	0.689	0.039	0.097	0.728	0.786	0.825
		Right	0.303	-	-	0.303	0.303	0.303
		Left	-	0.018	0.046	0.018	0.046	0.064
	LTE Band 5	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.234	-	-	0.234	0.234	0.234
		Front	0.320	0.010	0.013	0.330	0.333	0.343
		Rear	0.546	0.039	0.097	0.585	0.643	0.682
		Right	0.410	-	-	0.410	0.410	0.410
		Left	-	0.018	0.046	0.018	0.046	0.064
	LTE Band 4	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.441	-	-	0.441	0.441	0.441
		Front	0.262	0.010	0.013	0.272	0.275	0.285
		Rear	0.385	0.039	0.097	0.424	0.482	0.521
		Right	-	-	-	-	-	-
		Left	0.176	0.018	0.046	0.194	0.222	0.240
	LTE Band 2	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	0.668	-	-	0.668	0.668	0.668
		Front	0.303	0.010	0.013	0.313	0.316	0.326
		Rear	0.345	0.039	0.097	0.384	0.442	0.481
		Right	-	-	-	-	-	-
		Left	0.222	0.018	0.046	0.240	0.268	0.286
	LTE Band 41	Top	-	0.032	0.063	0.032	0.063	0.095
		Bottom	-	-	-	-	-	-
		Front	0.344	0.010	0.013	0.354	0.357	0.367
		Rear	0.469	0.039	0.097	0.508	0.566	0.605
		Right	0.469	-	-	0.469	0.469	0.469
		Left	-	0.018	0.046	0.018	0.046	0.064

Table 12.6.7 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.228	-	-	0.228	0.228	0.228
		Front	0.501	0.010	0.031	0.511	0.532	0.542
		Rear	0.670	0.039	0.244	0.709	0.914	0.953
		Right	0.372	-	-	0.372	0.372	0.372
		Left	-	0.018	0.053	0.018	0.053	0.071
	GPRS 1900	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.515	-	-	0.515	0.515	0.515
		Front	0.316	0.010	0.031	0.326	0.347	0.357
		Rear	0.340	0.039	0.244	0.379	0.584	0.623
		Right	-	-	-	-	-	-
		Left	0.174	0.018	0.053	0.192	0.227	0.245
	WCDMA 850	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.313	-	-	0.313	0.313	0.313
		Front	0.392	0.010	0.031	0.402	0.423	0.433
		Rear	0.608	0.039	0.244	0.647	0.852	0.891
		Right	0.274	-	-	0.274	0.274	0.274
		Left	-	0.018	0.053	0.018	0.053	0.071
	WCDMA 1700	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.440	-	-	0.440	0.440	0.440
		Front	0.348	0.010	0.031	0.358	0.379	0.389
		Rear	0.389	0.039	0.244	0.428	0.633	0.672
		Right	-	-	-	-	-	-
		Left	0.244	0.018	0.053	0.262	0.297	0.315
	WCDMA 1900	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.589	-	-	0.589	0.589	0.589
		Front	0.442	0.010	0.031	0.452	0.473	0.483
		Rear	0.508	0.039	0.244	0.547	0.752	0.791
		Right	-	-	-	-	-	-
		Left	0.325	0.018	0.053	0.343	0.378	0.396
	LTE Band 12	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.191	-	-	0.191	0.191	0.191
		Front	0.468	0.010	0.031	0.478	0.499	0.509
		Rear	0.624	0.039	0.244	0.663	0.868	0.907
		Right	0.302	-	-	0.302	0.302	0.302
		Left	-	0.018	0.053	0.018	0.053	0.071
	LTE Band 13	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.198	-	-	0.198	0.198	0.198
		Front	0.598	0.010	0.031	0.608	0.629	0.639
		Rear	0.689	0.039	0.244	0.728	0.933	0.972
		Right	0.303	-	-	0.303	0.303	0.303
		Left	-	0.018	0.053	0.018	0.053	0.071
	LTE Band 5	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.234	-	-	0.234	0.234	0.234
		Front	0.320	0.010	0.031	0.330	0.351	0.361
		Rear	0.546	0.039	0.244	0.585	0.790	0.829
		Right	0.410	-	-	0.410	0.410	0.410
		Left	-	0.018	0.053	0.018	0.053	0.071
	LTE Band 4	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.441	-	-	0.441	0.441	0.441
		Front	0.262	0.010	0.031	0.272	0.293	0.303
		Rear	0.385	0.039	0.244	0.424	0.629	0.668
		Right	-	-	-	-	-	-
		Left	0.176	0.018	0.053	0.194	0.229	0.247
	LTE Band 2	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	0.668	-	-	0.668	0.668	0.668
		Front	0.303	0.010	0.031	0.313	0.334	0.344
		Rear	0.345	0.039	0.244	0.384	0.589	0.628
		Right	-	-	-	-	-	-
		Left	0.222	0.018	0.053	0.240	0.275	0.293
	LTE Band 41	Top	-	0.032	0.006	0.032	0.006	0.038
		Bottom	-	-	-	-	-	-
		Front	0.344	0.010	0.031	0.354	0.375	0.385
		Rear	0.469	0.039	0.244	0.508	0.713	0.752
		Right	0.469	-	-	0.469	0.469	0.469
		Left	-	0.018	0.053	0.018	0.053	0.071

Table 12.6.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.228	-	-	0.228	0.228	0.228
		Front	0.501	0.010	0.024	0.511	0.525	0.535
		Rear	0.670	0.039	0.251	0.709	0.921	0.960
		Right	0.372	-	-	0.372	0.372	0.372
		Left	-	0.018	0.064	0.018	0.064	0.082
	GPRS 1900	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.515	-	-	0.515	0.515	0.515
		Front	0.316	0.010	0.024	0.326	0.340	0.350
		Rear	0.340	0.039	0.251	0.379	0.591	0.630
		Right	-	-	-	-	-	-
		Left	0.174	0.018	0.064	0.192	0.238	0.256
	WCDMA 850	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.313	-	-	0.313	0.313	0.313
		Front	0.392	0.010	0.024	0.402	0.416	0.426
		Rear	0.608	0.039	0.251	0.647	0.859	0.898
		Right	0.274	-	-	0.274	0.274	0.274
		Left	-	0.018	0.064	0.018	0.064	0.083
	WCDMA 1700	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.440	-	-	0.440	0.440	0.440
		Front	0.348	0.010	0.024	0.358	0.372	0.382
		Rear	0.389	0.039	0.251	0.428	0.640	0.679
		Right	-	-	-	-	-	-
		Left	0.244	0.018	0.064	0.262	0.308	0.326
	WCDMA 1900	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.589	-	-	0.589	0.589	0.589
		Front	0.442	0.010	0.024	0.452	0.466	0.476
		Rear	0.508	0.039	0.251	0.547	0.759	0.798
		Right	-	-	-	-	-	-
		Left	0.325	0.018	0.064	0.343	0.389	0.407
	LTE Band 12	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.191	-	-	0.191	0.191	0.191
		Front	0.468	0.010	0.024	0.478	0.492	0.502
		Rear	0.624	0.039	0.251	0.663	0.875	0.914
		Right	0.302	-	-	0.302	0.302	0.302
		Left	-	0.018	0.064	0.018	0.064	0.082
	LTE Band 13	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.198	-	-	0.198	0.198	0.198
		Front	0.598	0.010	0.024	0.608	0.622	0.632
		Rear	0.689	0.039	0.251	0.728	0.940	0.979
		Right	0.303	-	-	0.303	0.303	0.303
		Left	-	0.018	0.064	0.018	0.064	0.082
	LTE Band 5	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.234	-	-	0.234	0.234	0.234
		Front	0.320	0.010	0.024	0.330	0.344	0.354
		Rear	0.546	0.039	0.251	0.585	0.797	0.836
		Right	0.410	-	-	0.410	0.410	0.410
		Left	-	0.018	0.064	0.018	0.064	0.082
	LTE Band 4	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.441	-	-	0.441	0.441	0.441
		Front	0.262	0.010	0.024	0.272	0.286	0.296
		Rear	0.385	0.039	0.251	0.424	0.636	0.675
		Right	-	-	-	-	-	-
		Left	0.176	0.018	0.064	0.194	0.240	0.258
	LTE Band 2	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	0.668	-	-	0.668	0.668	0.668
		Front	0.303	0.010	0.024	0.313	0.327	0.337
		Rear	0.345	0.039	0.251	0.384	0.596	0.635
		Right	-	-	-	-	-	-
		Left	0.222	0.018	0.064	0.240	0.286	0.304
	LTE Band 41	Top	-	0.032	0.077	0.032	0.077	0.109
		Bottom	-	-	-	-	-	-
		Front	0.344	0.010	0.024	0.354	0.368	0.378
		Rear	0.469	0.039	0.251	0.508	0.720	0.759
		Right	0.469	-	-	0.469	0.469	0.469
		Left	-	0.018	0.064	0.018	0.064	0.082

Table 12.6.9 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.078	0.078
		Bottom	0.228	-	0.228
		Front	0.501	0.040	0.541
		Rear	0.670	0.102	0.772
		Right	0.372	-	0.372
		Left	-	0.051	0.051
	GPRS 1900	Top	-	0.078	0.078
		Bottom	0.515	-	0.515
		Front	0.316	0.040	0.356
		Rear	0.340	0.102	0.442
		Right	-	-	-
		Left	0.174	0.051	0.225
	WCDMA 850	Top	-	0.078	0.078
		Bottom	0.313	-	0.313
		Front	0.392	0.040	0.432
		Rear	0.608	0.102	0.710
		Right	0.274	-	0.274
		Left	-	0.051	0.051
	WCDMA 1700	Top	-	0.078	0.078
		Bottom	0.440	-	0.440
		Front	0.348	0.040	0.388
		Rear	0.389	0.102	0.491
		Right	-	-	-
		Left	0.244	0.051	0.295
	WCDMA 1900	Top	-	0.078	0.078
		Bottom	0.589	-	0.589
		Front	0.442	0.040	0.482
		Rear	0.508	0.102	0.610
		Right	-	-	-
		Left	0.325	0.051	0.376
	LTE Band 12	Top	-	0.078	0.078
		Bottom	0.191	-	0.191
		Front	0.468	0.040	0.508
		Rear	0.624	0.102	0.726
		Right	0.302	-	0.302
		Left	-	0.051	0.051
	LTE Band 13	Top	-	0.078	0.078
		Bottom	0.198	-	0.198
		Front	0.598	0.040	0.638
		Rear	0.689	0.102	0.791
		Right	0.303	-	0.303
		Left	-	0.051	0.051
	LTE Band 5	Top	-	0.078	0.078
		Bottom	0.234	-	0.234
		Front	0.320	0.040	0.360
		Rear	0.546	0.102	0.648
		Right	0.410	-	0.410
		Left	-	0.051	0.051
	LTE Band 4	Top	-	0.078	0.078
		Bottom	0.441	-	0.441
		Front	0.262	0.040	0.302
		Rear	0.385	0.102	0.487
		Right	-	-	-
		Left	0.176	0.051	0.227
	LTE Band 2	Top	-	0.078	0.078
		Bottom	0.668	-	0.668
		Front	0.303	0.040	0.343
		Rear	0.345	0.102	0.447
		Right	-	-	-
		Left	0.222	0.051	0.273
	LTE Band 41	Top	-	0.078	0.078
		Bottom	-	-	-
		Front	0.344	0.040	0.384
		Rear	0.469	0.102	0.571
		Right	0.469	-	0.469
		Left	-	0.051	0.051

Table 12.6.10 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.018	0.018
		Bottom	0.228	-	0.228
		Front	0.501	0.011	0.512
		Rear	0.670	0.327	0.997
		Right	0.372	-	0.372
		Left	-	0.116	0.116
	GPRS 1900	Top	-	0.018	0.018
		Bottom	0.515	-	0.515
		Front	0.316	0.011	0.327
		Rear	0.340	0.327	0.667
		Right	-	-	-
		Left	0.174	0.116	0.290
	WCDMA 850	Top	-	0.018	0.018
		Bottom	0.313	-	0.313
		Front	0.392	0.011	0.403
		Rear	0.608	0.327	0.935
		Right	0.274	-	0.274
		Left	-	0.116	0.116
	WCDMA 1700	Top	-	0.018	0.018
		Bottom	0.440	-	0.440
		Front	0.348	0.011	0.359
		Rear	0.389	0.327	0.716
		Right	-	-	-
		Left	0.244	0.116	0.360
	WCDMA 1900	Top	-	0.018	0.018
		Bottom	0.589	-	0.589
		Front	0.442	0.011	0.453
		Rear	0.508	0.327	0.835
		Right	-	-	-
		Left	0.325	0.116	0.441
	LTE Band 12	Top	-	0.018	0.018
		Bottom	0.191	-	0.191
		Front	0.468	0.011	0.479
		Rear	0.624	0.327	0.951
		Right	0.302	-	0.302
		Left	-	0.116	0.116
	LTE Band 13	Top	-	0.018	0.018
		Bottom	0.198	-	0.198
		Front	0.598	0.011	0.609
		Rear	0.689	0.327	1.016
		Right	0.303	-	0.303
		Left	-	0.116	0.116
	LTE Band 5	Top	-	0.018	0.018
		Bottom	0.234	-	0.234
		Front	0.320	0.011	0.331
		Rear	0.546	0.327	0.873
		Right	0.410	-	0.410
		Left	-	0.116	0.116
	LTE Band 4	Top	-	0.018	0.018
		Bottom	0.441	-	0.441
		Front	0.262	0.011	0.273
		Rear	0.385	0.327	0.712
		Right	-	-	-
		Left	0.176	0.116	0.292
	LTE Band 2	Top	-	0.018	0.018
		Bottom	0.668	-	0.668
		Front	0.303	0.011	0.314
		Rear	0.345	0.327	0.672
		Right	-	-	-
		Left	0.222	0.116	0.338
	LTE Band 41	Top	-	0.018	0.018
		Bottom	-	-	-
		Front	0.344	0.011	0.355
		Rear	0.469	0.327	0.796
		Right	0.469	-	0.469
		Left	-	0.116	0.116

Table 12.6.11 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.092	0.092
		Bottom	0.228	-	0.228
		Front	0.501	0.051	0.552
		Rear	0.670	0.292	0.962
		Right	0.372	-	0.372
		Left	-	0.113	0.113
	GPRS 1900	Top	-	0.092	0.092
		Bottom	0.515	-	0.515
		Front	0.316	0.051	0.367
		Rear	0.340	0.292	0.632
		Right	-	-	-
		Left	0.174	0.113	0.287
	WCDMA 850	Top	-	0.092	0.092
		Bottom	0.313	-	0.313
		Front	0.392	0.051	0.443
		Rear	0.608	0.292	0.900
		Right	0.274	-	0.274
		Left	-	0.113	0.113
	WCDMA 1700	Top	-	0.092	0.092
		Bottom	0.440	-	0.440
		Front	0.348	0.051	0.399
		Rear	0.389	0.292	0.681
		Right	-	-	-
		Left	0.244	0.113	0.357
	WCDMA 1900	Top	-	0.092	0.092
		Bottom	0.589	-	0.589
		Front	0.442	0.051	0.493
		Rear	0.508	0.292	0.800
		Right	-	-	-
		Left	0.325	0.113	0.438
	LTE Band 12	Top	-	0.092	0.092
		Bottom	0.191	-	0.191
		Front	0.468	0.051	0.519
		Rear	0.624	0.292	0.916
		Right	0.302	-	0.302
		Left	-	0.113	0.113
	LTE Band 13	Top	-	0.092	0.092
		Bottom	0.198	-	0.198
		Front	0.598	0.051	0.649
		Rear	0.689	0.292	0.981
		Right	0.303	-	0.303
		Left	-	0.113	0.113
	LTE Band 5	Top	-	0.092	0.092
		Bottom	0.234	-	0.234
		Front	0.320	0.051	0.371
		Rear	0.546	0.292	0.838
		Right	0.410	-	0.410
		Left	-	0.113	0.113
	LTE Band 4	Top	-	0.092	0.092
		Bottom	0.441	-	0.441
		Front	0.262	0.051	0.313
		Rear	0.385	0.292	0.677
		Right	-	-	-
		Left	0.176	0.113	0.289
	LTE Band 2	Top	-	0.092	0.092
		Bottom	0.668	-	0.668
		Front	0.303	0.051	0.354
		Rear	0.345	0.292	0.637
		Right	-	-	-
		Left	0.222	0.113	0.335
	LTE Band 41	Top	-	0.092	0.092
		Bottom	-	-	-
		Front	0.344	0.051	0.395
		Rear	0.469	0.292	0.761
		Right	0.469	-	0.469
		Left	-	0.113	0.113

Table 12.6.12 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.035	0.035
		Bottom	0.228	-	0.228
		Front	0.501	0.021	0.522
		Rear	0.670	0.079	0.749
		Right	0.372	-	0.372
		Left	-	0.039	0.039
	GPRS 1900	Top	-	0.035	0.035
		Bottom	0.515	-	0.515
		Front	0.316	0.021	0.337
		Rear	0.340	0.079	0.419
		Right	-	-	-
		Left	0.174	0.039	0.213
	WCDMA 850	Top	-	0.035	0.035
		Bottom	0.313	-	0.313
		Front	0.392	0.021	0.413
		Rear	0.608	0.079	0.687
		Right	0.274	-	0.274
		Left	-	0.039	0.039
	WCDMA 1700	Top	-	0.035	0.035
		Bottom	0.440	-	0.440
		Front	0.348	0.021	0.369
		Rear	0.389	0.079	0.468
		Right	-	-	-
		Left	0.244	0.039	0.283
	WCDMA 1900	Top	-	0.035	0.035
		Bottom	0.589	-	0.589
		Front	0.442	0.021	0.463
		Rear	0.508	0.079	0.587
		Right	-	-	-
		Left	0.325	0.039	0.364
	LTE Band 12	Top	-	0.035	0.035
		Bottom	0.191	-	0.191
		Front	0.468	0.021	0.489
		Rear	0.624	0.079	0.703
		Right	0.302	-	0.302
		Left	-	0.039	0.039
	LTE Band 13	Top	-	0.035	0.035
		Bottom	0.198	-	0.198
		Front	0.598	0.021	0.619
		Rear	0.689	0.079	0.768
		Right	0.303	-	0.303
		Left	-	0.039	0.039
	LTE Band 5	Top	-	0.035	0.035
		Bottom	0.234	-	0.234
		Front	0.320	0.021	0.341
		Rear	0.546	0.079	0.625
		Right	0.410	-	0.410
		Left	-	0.039	0.039
	LTE Band 4	Top	-	0.035	0.035
		Bottom	0.441	-	0.441
		Front	0.262	0.021	0.283
		Rear	0.385	0.079	0.464
		Right	-	-	-
		Left	0.176	0.039	0.215
	LTE Band 2	Top	-	0.035	0.035
		Bottom	0.668	-	0.668
		Front	0.303	0.021	0.324
		Rear	0.345	0.079	0.424
		Right	-	-	-
		Left	0.222	0.039	0.261
	LTE Band 41	Top	-	0.035	0.035
		Bottom	-	-	-
		Front	0.344	0.021	0.365
		Rear	0.469	0.079	0.548
		Right	0.469	-	0.469
		Left	-	0.039	0.039

Table 12.6.13 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.023	0.023
		Bottom	0.228	-	0.228
		Front	0.501	0.012	0.513
		Rear	0.670	0.275	0.945
		Right	0.372	-	0.372
		Left	-	0.075	0.075
	GPRS 1900	Top	-	0.023	0.023
		Bottom	0.515	-	0.515
		Front	0.316	0.012	0.328
		Rear	0.340	0.275	0.615
		Right	-	-	-
		Left	0.174	0.075	0.249
	WCDMA 850	Top	-	0.023	0.023
		Bottom	0.313	-	0.313
		Front	0.392	0.012	0.404
		Rear	0.608	0.275	0.883
		Right	0.274	-	0.274
		Left	-	0.075	0.075
	WCDMA 1700	Top	-	0.023	0.023
		Bottom	0.440	-	0.440
		Front	0.348	0.012	0.360
		Rear	0.389	0.275	0.664
		Right	-	-	-
		Left	0.244	0.075	0.319
	WCDMA 1900	Top	-	0.023	0.023
		Bottom	0.589	-	0.589
		Front	0.442	0.012	0.454
		Rear	0.508	0.275	0.783
		Right	-	-	-
		Left	0.325	0.075	0.400
	LTE Band 12	Top	-	0.023	0.023
		Bottom	0.191	-	0.191
		Front	0.468	0.012	0.480
		Rear	0.624	0.275	0.899
		Right	0.302	-	0.302
		Left	-	0.075	0.075
	LTE Band 13	Top	-	0.023	0.023
		Bottom	0.198	-	0.198
		Front	0.598	0.012	0.610
		Rear	0.689	0.275	0.964
		Right	0.303	-	0.303
		Left	-	0.075	0.075
	LTE Band 5	Top	-	0.023	0.023
		Bottom	0.234	-	0.234
		Front	0.320	0.012	0.332
		Rear	0.546	0.275	0.821
		Right	0.410	-	0.410
		Left	-	0.075	0.075
	LTE Band 4	Top	-	0.023	0.023
		Bottom	0.441	-	0.441
		Front	0.262	0.012	0.274
		Rear	0.385	0.275	0.660
		Right	-	-	-
		Left	0.176	0.075	0.251
	LTE Band 2	Top	-	0.023	0.023
		Bottom	0.668	-	0.668
		Front	0.303	0.012	0.315
		Rear	0.345	0.275	0.620
		Right	-	-	-
		Left	0.222	0.075	0.297
	LTE Band 41	Top	-	0.023	0.023
		Bottom	-	-	-
		Front	0.344	0.012	0.356
		Rear	0.469	0.275	0.744
		Right	0.469	-	0.469
		Left	-	0.075	0.075

Table 12.6.14 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.028	0.028
		Bottom	0.228	-	0.228
		Front	0.501	0.022	0.523
		Rear	0.670	0.335	1.005
		Right	0.372	-	0.372
		Left	-	0.108	0.108
	GPRS 1900	Top	-	0.028	0.028
		Bottom	0.515	-	0.515
		Front	0.316	0.022	0.338
		Rear	0.340	0.335	0.675
		Right	-	-	-
		Left	0.174	0.108	0.282
	WCDMA 850	Top	-	0.028	0.028
		Bottom	0.313	-	0.313
		Front	0.392	0.022	0.414
		Rear	0.608	0.335	0.943
		Right	0.274	-	0.274
		Left	-	0.108	0.108
	WCDMA 1700	Top	-	0.028	0.028
		Bottom	0.440	-	0.440
		Front	0.348	0.022	0.370
		Rear	0.389	0.335	0.724
		Right	-	-	-
		Left	0.244	0.108	0.352
	WCDMA 1900	Top	-	0.028	0.028
		Bottom	0.589	-	0.589
		Front	0.442	0.022	0.464
		Rear	0.508	0.335	0.843
		Right	-	-	-
		Left	0.325	0.108	0.433
	LTE Band 12	Top	-	0.028	0.028
		Bottom	0.191	-	0.191
		Front	0.468	0.022	0.490
		Rear	0.624	0.335	0.959
		Right	0.302	-	0.302
		Left	-	0.108	0.108
	LTE Band 13	Top	-	0.028	0.028
		Bottom	0.198	-	0.198
		Front	0.598	0.022	0.620
		Rear	0.689	0.335	1.024
		Right	0.303	-	0.303
		Left	-	0.108	0.108
	LTE Band 5	Top	-	0.028	0.028
		Bottom	0.234	-	0.234
		Front	0.320	0.022	0.342
		Rear	0.546	0.335	0.881
		Right	0.410	-	0.410
		Left	-	0.108	0.108
	LTE Band 4	Top	-	0.028	0.028
		Bottom	0.441	-	0.441
		Front	0.262	0.022	0.284
		Rear	0.385	0.335	0.720
		Right	-	-	-
		Left	0.176	0.108	0.284
	LTE Band 2	Top	-	0.028	0.028
		Bottom	0.668	-	0.668
		Front	0.303	0.022	0.325
		Rear	0.345	0.335	0.680
		Right	-	-	-
		Left	0.222	0.108	0.330
	LTE Band 41	Top	-	0.028	0.028
		Bottom	-	-	-
		Front	0.344	0.022	0.366
		Rear	0.469	0.335	0.804
		Right	0.469	-	0.469
		Left	-	0.108	0.108

Table 12.6.15 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.063	0.063
		Bottom	0.228	-	0.228
		Front	0.501	0.013	0.514
		Rear	0.670	0.097	0.767
		Right	0.372	-	0.372
		Left	-	0.046	0.046
	GPRS 1900	Top	-	0.063	0.063
		Bottom	0.515	-	0.515
		Front	0.316	0.013	0.329
		Rear	0.340	0.097	0.437
		Right	-	-	-
		Left	0.174	0.046	0.220
	WCDMA 850	Top	-	0.063	0.063
		Bottom	0.313	-	0.313
		Front	0.392	0.013	0.405
		Rear	0.608	0.097	0.705
		Right	0.274	-	0.274
		Left	-	0.046	0.046
	WCDMA 1700	Top	-	0.063	0.063
		Bottom	0.440	-	0.440
		Front	0.348	0.013	0.361
		Rear	0.389	0.097	0.486
		Right	-	-	-
		Left	0.244	0.046	0.290
	WCDMA 1900	Top	-	0.063	0.063
		Bottom	0.589	-	0.589
		Front	0.442	0.013	0.455
		Rear	0.508	0.097	0.605
		Right	-	-	-
		Left	0.325	0.046	0.371
	LTE Band 12	Top	-	0.063	0.063
		Bottom	0.191	-	0.191
		Front	0.468	0.013	0.481
		Rear	0.624	0.097	0.721
		Right	0.302	-	0.302
		Left	-	0.046	0.046
	LTE Band 13	Top	-	0.063	0.063
		Bottom	0.198	-	0.198
		Front	0.598	0.013	0.611
		Rear	0.689	0.097	0.786
		Right	0.303	-	0.303
		Left	-	0.046	0.046
	LTE Band 5	Top	-	0.063	0.063
		Bottom	0.234	-	0.234
		Front	0.320	0.013	0.333
		Rear	0.546	0.097	0.643
		Right	0.410	-	0.410
		Left	-	0.046	0.046
	LTE Band 4	Top	-	0.063	0.063
		Bottom	0.441	-	0.441
		Front	0.262	0.013	0.275
		Rear	0.385	0.097	0.482
		Right	-	-	-
		Left	0.176	0.046	0.222
	LTE Band 2	Top	-	0.063	0.063
		Bottom	0.668	-	0.668
		Front	0.303	0.013	0.316
		Rear	0.345	0.097	0.442
		Right	-	-	-
		Left	0.222	0.046	0.268
	LTE Band 41	Top	-	0.063	0.063
		Bottom	-	-	-
		Front	0.344	0.013	0.357
		Rear	0.469	0.097	0.566
		Right	0.469	-	0.469
		Left	-	0.046	0.046

Table 12.6.16 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.006	0.006
		Bottom	0.228	-	0.228
		Front	0.501	0.031	0.532
		Rear	0.670	0.244	0.914
		Right	0.372	-	0.372
		Left	-	0.053	0.053
	GPRS 1900	Top	-	0.006	0.006
		Bottom	0.515	-	0.515
		Front	0.316	0.031	0.347
		Rear	0.340	0.244	0.584
		Right	-	-	-
		Left	0.174	0.053	0.227
	WCDMA 850	Top	-	0.006	0.006
		Bottom	0.313	-	0.313
		Front	0.392	0.031	0.423
		Rear	0.608	0.244	0.852
		Right	0.274	-	0.274
		Left	-	0.053	0.053
	WCDMA 1700	Top	-	0.006	0.006
		Bottom	0.440	-	0.440
		Front	0.348	0.031	0.379
		Rear	0.389	0.244	0.633
		Right	-	-	-
		Left	0.244	0.053	0.297
	WCDMA 1900	Top	-	0.006	0.006
		Bottom	0.589	-	0.589
		Front	0.442	0.031	0.473
		Rear	0.508	0.244	0.752
		Right	-	-	-
		Left	0.325	0.053	0.378
	LTE Band 12	Top	-	0.006	0.006
		Bottom	0.191	-	0.191
		Front	0.468	0.031	0.499
		Rear	0.624	0.244	0.868
		Right	0.302	-	0.302
		Left	-	0.053	0.053
	LTE Band 13	Top	-	0.006	0.006
		Bottom	0.198	-	0.198
		Front	0.598	0.031	0.629
		Rear	0.689	0.244	0.933
		Right	0.303	-	0.303
		Left	-	0.053	0.053
	LTE Band 5	Top	-	0.006	0.006
		Bottom	0.234	-	0.234
		Front	0.320	0.031	0.351
		Rear	0.546	0.244	0.790
		Right	0.410	-	0.410
		Left	-	0.053	0.053
	LTE Band 4	Top	-	0.006	0.006
		Bottom	0.441	-	0.441
		Front	0.262	0.031	0.293
		Rear	0.385	0.244	0.629
		Right	-	-	-
		Left	0.176	0.053	0.229
	LTE Band 2	Top	-	0.006	0.006
		Bottom	0.668	-	0.668
		Front	0.303	0.031	0.334
		Rear	0.345	0.244	0.589
		Right	-	-	-
		Left	0.222	0.053	0.275
	LTE Band 41	Top	-	0.006	0.006
		Bottom	-	-	-
		Front	0.344	0.031	0.375
		Rear	0.469	0.244	0.713
		Right	0.469	-	0.469
		Left	-	0.053	0.053

Table 12.6.17 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.077	0.077
		Bottom	0.228	-	0.228
		Front	0.501	0.024	0.525
		Rear	0.670	0.251	0.921
		Right	0.372	-	0.372
		Left	-	0.064	0.064
	GPRS 1900	Top	-	0.077	0.077
		Bottom	0.515	-	0.515
		Front	0.316	0.024	0.340
		Rear	0.340	0.251	0.591
		Right	-	-	-
		Left	0.174	0.064	0.238
	WCDMA 850	Top	-	0.077	0.077
		Bottom	0.313	-	0.313
		Front	0.392	0.024	0.416
		Rear	0.608	0.251	0.859
		Right	0.274	-	0.274
		Left	-	0.064	0.064
	WCDMA 1700	Top	-	0.077	0.077
		Bottom	0.440	-	0.440
		Front	0.348	0.024	0.372
		Rear	0.389	0.251	0.640
		Right	-	-	-
		Left	0.244	0.064	0.308
	WCDMA 1900	Top	-	0.077	0.077
		Bottom	0.589	-	0.589
		Front	0.442	0.024	0.466
		Rear	0.508	0.251	0.759
		Right	-	-	-
		Left	0.325	0.064	0.389
	LTE Band 12	Top	-	0.077	0.077
		Bottom	0.191	-	0.191
		Front	0.468	0.024	0.492
		Rear	0.624	0.251	0.875
		Right	0.302	-	0.302
		Left	-	0.064	0.064
	LTE Band 13	Top	-	0.077	0.077
		Bottom	0.198	-	0.198
		Front	0.598	0.024	0.622
		Rear	0.689	0.251	0.940
		Right	0.303	-	0.303
		Left	-	0.064	0.064
	LTE Band 5	Top	-	0.077	0.077
		Bottom	0.234	-	0.234
		Front	0.320	0.024	0.344
		Rear	0.546	0.251	0.797
		Right	0.410	-	0.410
		Left	-	0.064	0.064
	LTE Band 4	Top	-	0.077	0.077
		Bottom	0.441	-	0.441
		Front	0.262	0.024	0.286
		Rear	0.385	0.251	0.636
		Right	-	-	-
		Left	0.176	0.064	0.240
	LTE Band 2	Top	-	0.077	0.077
		Bottom	0.668	-	0.668
		Front	0.303	0.024	0.327
		Rear	0.345	0.251	0.596
		Right	-	-	-
		Left	0.222	0.064	0.286
	LTE Band 41	Top	-	0.077	0.077
		Bottom	-	-	-
		Front	0.344	0.024	0.368
		Rear	0.469	0.251	0.720
		Right	0.469	-	0.469
		Left	-	0.064	0.064

Table 12.6.18 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.032	0.032
		Bottom	0.228	-	0.228
		Front	0.501	0.010	0.511
		Rear	0.670	0.039	0.709
		Right	0.372	-	0.372
		Left	-	0.018	0.018
	GPRS 1900	Top	-	0.032	0.032
		Bottom	0.515	-	0.515
		Front	0.316	0.010	0.326
		Rear	0.340	0.039	0.379
		Right	-	-	-
		Left	0.174	0.018	0.192
	WCDMA 850	Top	-	0.032	0.032
		Bottom	0.313	-	0.313
		Front	0.392	0.010	0.402
		Rear	0.608	0.039	0.647
		Right	0.274	-	0.274
		Left	-	0.018	0.018
	WCDMA 1700	Top	-	0.032	0.032
		Bottom	0.440	-	0.440
		Front	0.348	0.010	0.358
		Rear	0.389	0.039	0.428
		Right	-	-	-
		Left	0.244	0.018	0.262
	WCDMA 1900	Top	-	0.032	0.032
		Bottom	0.589	-	0.589
		Front	0.442	0.010	0.452
		Rear	0.508	0.039	0.547
		Right	-	-	-
		Left	0.325	0.018	0.343
	LTE Band 12	Top	-	0.032	0.032
		Bottom	0.191	-	0.191
		Front	0.468	0.010	0.478
		Rear	0.624	0.039	0.663
		Right	0.302	-	0.302
		Left	-	0.018	0.018
	LTE Band 13	Top	-	0.032	0.032
		Bottom	0.198	-	0.198
		Front	0.598	0.010	0.608
		Rear	0.689	0.039	0.728
		Right	0.303	-	0.303
		Left	-	0.018	0.018
	LTE Band 5	Top	-	0.032	0.032
		Bottom	0.234	-	0.234
		Front	0.320	0.010	0.330
		Rear	0.546	0.039	0.585
		Right	0.410	-	0.410
		Left	-	0.018	0.018
	LTE Band 4	Top	-	0.032	0.032
		Bottom	0.441	-	0.441
		Front	0.262	0.010	0.272
		Rear	0.385	0.039	0.424
		Right	-	-	-
		Left	0.176	0.018	0.194
	LTE Band 2	Top	-	0.032	0.032
		Bottom	0.668	-	0.668
		Front	0.303	0.010	0.313
		Rear	0.345	0.039	0.384
		Right	-	-	-
		Left	0.222	0.018	0.240
	LTE Band 41	Top	-	0.032	0.032
		Bottom	-	-	-
		Front	0.344	0.010	0.354
		Rear	0.469	0.039	0.508
		Right	0.469	-	0.469
		Left	-	0.018	0.018

Table 12.6.19 Simultaneous Transmission Scenario : 2.4 GHz W-LAN Ant.1+ 5 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN Ant.2	Top	0.078	0.023	0.101
		Bottom	-	-	-
		Front	0.040	0.012	0.052
		Rear	0.102	0.275	0.377
		Right	-	-	-
		Left	0.051	0.075	0.126
	5.8G W-LAN Ant.2	Top	0.078	0.006	0.084
		Bottom	-	-	-
		Front	0.040	0.031	0.071
		Rear	0.102	0.244	0.346
		Right	-	-	-
		Left	0.051	0.053	0.104

Table 12.6.20 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN Ant. 1	Top	0.032	0.035	0.067
		Bottom	-	-	-
		Front	0.010	0.021	0.031
		Rear	0.039	0.079	0.118
		Right	-	-	-
		Left	0.018	0.039	0.057
	5.8G W-LAN Ant. 1	Top	0.032	0.063	0.095
		Bottom	-	-	-
		Front	0.010	0.013	0.023
		Rear	0.039	0.097	0.136
		Right	-	-	-
		Left	0.018	0.046	0.064

Table 12.6.21 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN Ant.2	Top	0.032	0.023	0.055
		Bottom	-	-	-
		Front	0.010	0.012	0.022
		Rear	0.039	0.275	0.314
		Right	-	-	-
		Left	0.018	0.075	0.093
	5.8G W-LAN Ant.2	Top	0.032	0.006	0.038
		Bottom	-	-	-
		Front	0.010	0.031	0.041
		Rear	0.039	0.244	0.283
		Right	-	-	-
		Left	0.018	0.053	0.071

Table 12.6.22 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN MIMO	Top	0.032	0.028	0.060
		Bottom	-	-	-
		Front	0.010	0.022	0.032
		Rear	0.039	0.335	0.374
		Right	-	-	-
		Left	0.018	0.108	0.126
	5.8G W-LAN MIMO	Top	0.032	0.077	0.109
		Bottom	-	-	-
		Front	0.010	0.024	0.034
		Rear	0.039	0.251	0.290
		Right	-	-	-
		Left	0.018	0.064	0.082

12.7 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR (scaled to maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis was required to for Phablet Simultaneous Transmission Analysis.

12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

13. SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

14. EQUIPMENT LIST

Table 15.1.1 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	Robot	SPEAG	TX90XL	N/A	N/A	F13/5P9GA1/A/01
☒	Robot	SPEAG	TX90XL	N/A	N/A	F13/5RR2A1/A/01
☒	Robot	SPEAG	TX60L	N/A	N/A	F15/50NHA1/A/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5P9GA1/C/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5RR2A1/C/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F15/50NHA1/C/01
☒	Joystick	SPEAG	N/A	N/A	N/A	S-12450905
☒	Joystick	SPEAG	N/A	N/A	N/A	S-13200990
☒	Joystick	SPEAG	N/A	N/A	N/A	D21142605A
☒	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	IntelCorei7-4770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Probe Alignment Unit LB	N/A	LB5/80	N/A	N/A	SE UKS 030 AA
☒	Device Holder	SPEAG	Holder	N/A	N/A	SD000H01HA
☒	Device Holder	SPEAG	Holder	N/A	N/A	SD000H01HA
☒	Device Holder	SPEAG	Holder	N/A	N/A	SD000H01HA
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1783
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1782
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1786
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1895
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2018-08-22	2019-08-22	1396
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2018-03-19	2019-03-19	1394
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2018-05-25	2019-05-25	1392
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2018-09-25	2019-09-25	3933
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2018-04-25	2019-04-25	3916
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2018-07-26	2019-07-26	3930
☒	750MHz SAR Dipole	SPEAG	D750V3	2018-01-18	2020-01-18	1049
☒	835MHz SAR Dipole	SPEAG	D835V2	2018-08-23	2020-08-23	4d159
☒	1800MHz SAR Dipole	SPEAG	D1800V2	2018-04-26	2020-04-26	2d202
☒	1900MHz SAR Dipole	SPEAG	D1900V2	2018-08-27	2020-08-27	5d176
☒	2450MHz SAR Dipole	SPEAG	D2450V2	2018-08-24	2020-08-24	920
☒	2600MHz SAR Dipole	SPEAG	D2600V2	2018-02-16	2020-02-16	1103
☒	5GHz SAR Dipole	SPEAG	D5GHzV2	2018-02-15	2020-02-15	1212
☒	Network Analyzer	Agilent	E5071C	2018-02-02	2019-02-02	MY46111534
☒	Signal Generator	Agilent	E4438C	2018-07-04	2019-07-04	US41461520
☒	Amplifier	RFBAY,Inc	MPA-40-40	2017-12-28	2018-12-28	21151801
☒	Amplifier	EMPOWER	BBS3Q7ELU	2018-07-10	2019-07-10	1020
☒	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2018-07-06	2019-07-06	1005
☒	Power Meter	HP	EPM-442A	2017-12-27	2018-12-27	GB37170267
☒	Power Meter	HP	EPM-442A	2017-12-27	2018-12-27	GB37170413
☒	Power Meter	Anritsu	ML2495A	2018-07-04	2019-07-04	1435003
☒	Power Sensor	Anritsu	MA2490A	2018-07-04	2019-07-04	1409034
☒	Power Sensor	HP	8481A	2017-12-27	2018-12-27	US37294267
☒	Power Sensor	HP	8481A	2017-12-27	2018-12-27	3318A96566
☒	Power Sensor	HP	8481A	2017-12-27	2018-12-27	2702A65976
☒	Dual Directional Coupler	Agilent	778D-012	2017-12-27	2018-12-27	50228
☒	Directional Coupler	HP	772D	2018-07-03	2019-07-03	2889A01064
☒	Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2018-07-05	2019-07-05	165
☒	Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2017-12-27	2018-12-27	N/A
☒	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2018-07-05	2019-07-05	N/A
☒	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2017-12-27	2018-12-27	03942
☒	Attenuators(3 dB)	Agilent	8491B	2017-12-27	2018-12-27	MY39260700
☒	Attenuators(10 dB)	WEINSCHTEL	23-10-34	2017-12-27	2018-12-27	BP4387
☒	Dielectric Probe kit	SPEAG	DAK-3.5	2018-07-24	2019-07-24	1046
☒	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2018-07-04	2019-07-04	GB41321164
☒	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2018-03-07	2019-03-07	162709
☒	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2018-02-05	2019-02-05	101414
☒	Radio Communication Analyzer	KEYSIGHT	E7515A	2018-07-06	2019-07-06	MY55210201
☒	Radio Communication Analyzer	KEYSIGHT	E7515A	2017-12-27	2018-12-27	MY57270113
☒	Power Splitter	Anritsu	K241B	2017-12-27	2018-12-27	1301183
☒	Bluetooth Tester	TESCOM	TC-3000B	2017-12-26	2018-12-26	3000B770243

NOTE(S):

- The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.
- CBT(Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

15. MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.78	0.71	$\pm 3.3 \%$	$\pm 3.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.7 \%$	$\pm 11.5 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.4 \%$	$\pm 23.0 \%$	

The above measurement uncertainties are according to IEEE Std 1528

750 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.78	0.71	$\pm 2.9 \%$	$\pm 2.6 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.78	0.71	$\pm 3.4 \%$	$\pm 3.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.7 \%$	$\pm 11.5 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.4 \%$	$\pm 23.0 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Head (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6\%$	$\pm 6.6\%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3\%$	$\pm 1.3\%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14\%$	$\pm 0.14\%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46\%$	$\pm 0.46\%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46\%$	$\pm 0.46\%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4\%$	$\pm 4.4\%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0\%$	$\pm 0.0\%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.78	0.71	$\pm 3.4\%$	$\pm 3.1\%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9\%$	$\pm 1.0\%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9\%$	$\pm 0.8\%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2\%$	$\pm 0.3\%$	∞
Combined Standard Uncertainty						$\pm 12.0\%$	$\pm 11.8\%$	330
Expanded Uncertainty (k=2)						$\pm 24.0\%$	$\pm 23.6\%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6\%$	$\pm 6.6\%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3\%$	$\pm 1.3\%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14\%$	$\pm 0.14\%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46\%$	$\pm 0.46\%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46\%$	$\pm 0.46\%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4\%$	$\pm 4.4\%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0\%$	$\pm 0.0\%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0\%$	$\pm 2.8\%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9\%$	$\pm 1.0\%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9\%$	$\pm 0.8\%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2\%$	$\pm 0.3\%$	∞
Combined Standard Uncertainty						$\pm 11.9\%$	$\pm 11.7\%$	330
Expanded Uncertainty (k=2)						$\pm 23.8\%$	$\pm 23.4\%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6\%$	$\pm 6.6\%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3\%$	$\pm 1.3\%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14\%$	$\pm 0.14\%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46\%$	$\pm 0.46\%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46\%$	$\pm 0.46\%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4\%$	$\pm 4.4\%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0\%$	$\pm 0.0\%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.78	0.71	$\pm 2.9\%$	$\pm 2.6\%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9\%$	$\pm 1.1\%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8\%$	$\pm 0.7\%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2\%$	$\pm 0.3\%$	∞
Combined Standard Uncertainty						$\pm 11.8\%$	$\pm 11.7\%$	330
Expanded Uncertainty (k=2)						$\pm 23.6\%$	$\pm 23.4\%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.78	0.71	$\pm 2.9 \%$	$\pm 2.6 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.8 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.6 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.78	0.71	$\pm 3.3 \%$	$\pm 3.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.8 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.6 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

APPENDIX A. – Probe Calibration Data

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **DT&C (Dymstec)**

Certificate No: **EX3-3933_Sep18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3933**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 25, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3842U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	
Issued: September 27, 2018			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3933

September 25, 2018

Probe EX3DV4

SN:3933

Manufactured: July 24, 2013
Calibrated: September 25, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.50	0.52	0.19	$\pm 10.1 \%$
DCP (mV) ^B	104.5	98.7	93.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	144.0	$\pm 2.7 \%$
		Y	0.0	0.0	1.0		147.5	
		Z	0.0	0.0	1.0		142.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4– SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.76	10.76	10.76	0.35	1.00	± 12.0 %
835	41.5	0.90	10.26	10.26	10.26	0.46	0.83	± 12.0 %
900	41.5	0.97	9.91	9.91	9.91	0.43	0.80	± 12.0 %
1750	40.1	1.37	8.83	8.83	8.83	0.34	0.83	± 12.0 %
1900	40.0	1.40	8.54	8.54	8.54	0.25	0.80	± 12.0 %
2300	39.5	1.67	7.90	7.90	7.90	0.41	0.80	± 12.0 %
2450	39.2	1.80	7.61	7.61	7.61	0.21	1.16	± 12.0 %
2600	39.0	1.96	7.41	7.41	7.41	0.25	1.00	± 12.0 %
3500	37.9	2.91	7.30	7.30	7.30	0.27	1.20	± 13.1 %
3700	37.7	3.12	7.13	7.13	7.13	0.25	1.20	± 13.1 %
5200	36.0	4.66	5.24	5.24	5.24	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.02	5.02	5.02	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.87	4.87	4.87	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.71	4.71	4.71	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.77	4.77	4.77	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.43	10.43	10.43	0.32	1.02	± 12.0 %
835	55.2	0.97	10.27	10.27	10.27	0.44	0.80	± 12.0 %
900	55.0	1.05	10.20	10.20	10.20	0.42	0.80	± 12.0 %
1750	53.4	1.49	8.62	8.62	8.62	0.31	0.88	± 12.0 %
1900	53.3	1.52	8.21	8.21	8.21	0.38	0.80	± 12.0 %
2300	52.9	1.81	7.86	7.86	7.86	0.34	0.88	± 12.0 %
2450	52.7	1.95	7.75	7.75	7.75	0.34	0.95	± 12.0 %
2600	52.5	2.16	7.63	7.63	7.63	0.31	0.95	± 12.0 %
3500	51.3	3.31	7.13	7.13	7.13	0.30	1.25	± 13.1 %
3700	51.0	3.55	7.08	7.08	7.08	0.30	1.25	± 13.1 %
5200	49.0	5.30	4.67	4.67	4.67	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.51	4.51	4.51	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.14	4.14	4.14	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.01	4.01	4.01	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.10	4.10	4.10	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3933

September 25, 2018

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

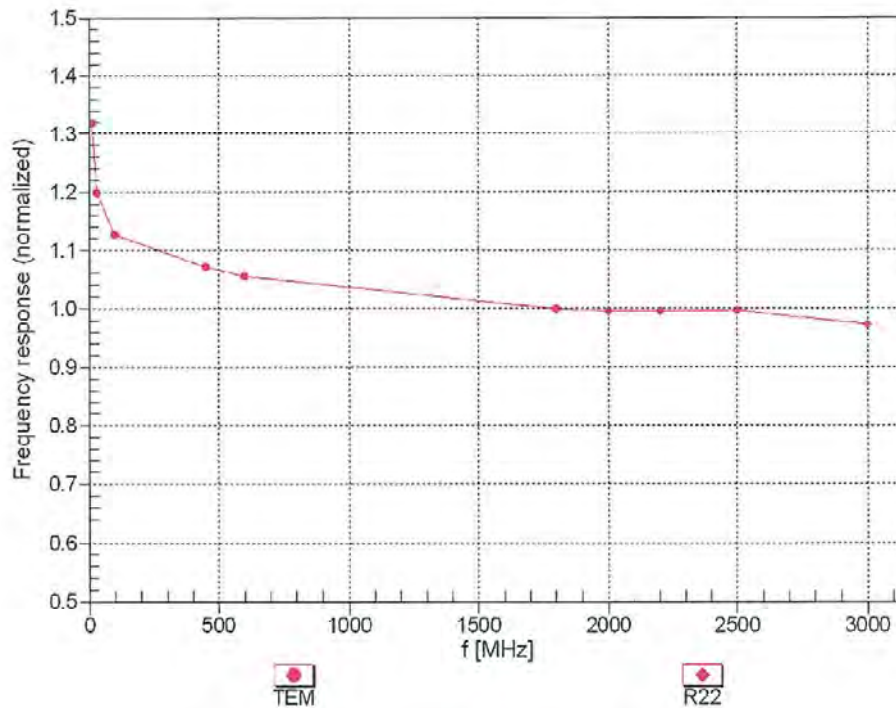

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)




EX3DV4- SN:3933

September 25, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

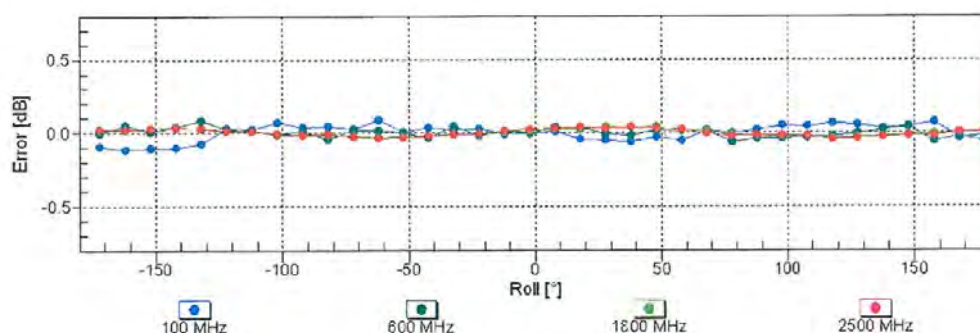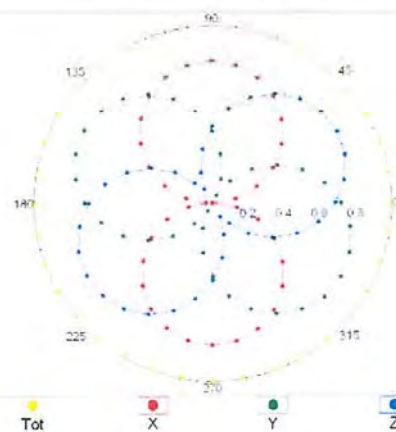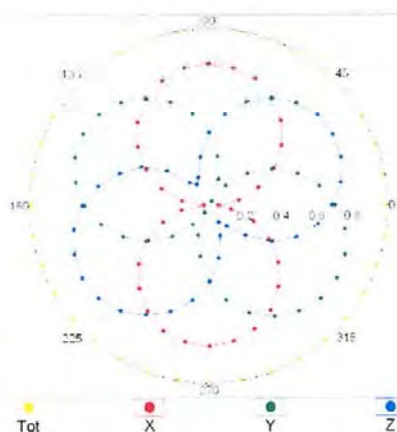


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4- SN:3933

September 25, 2018

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)

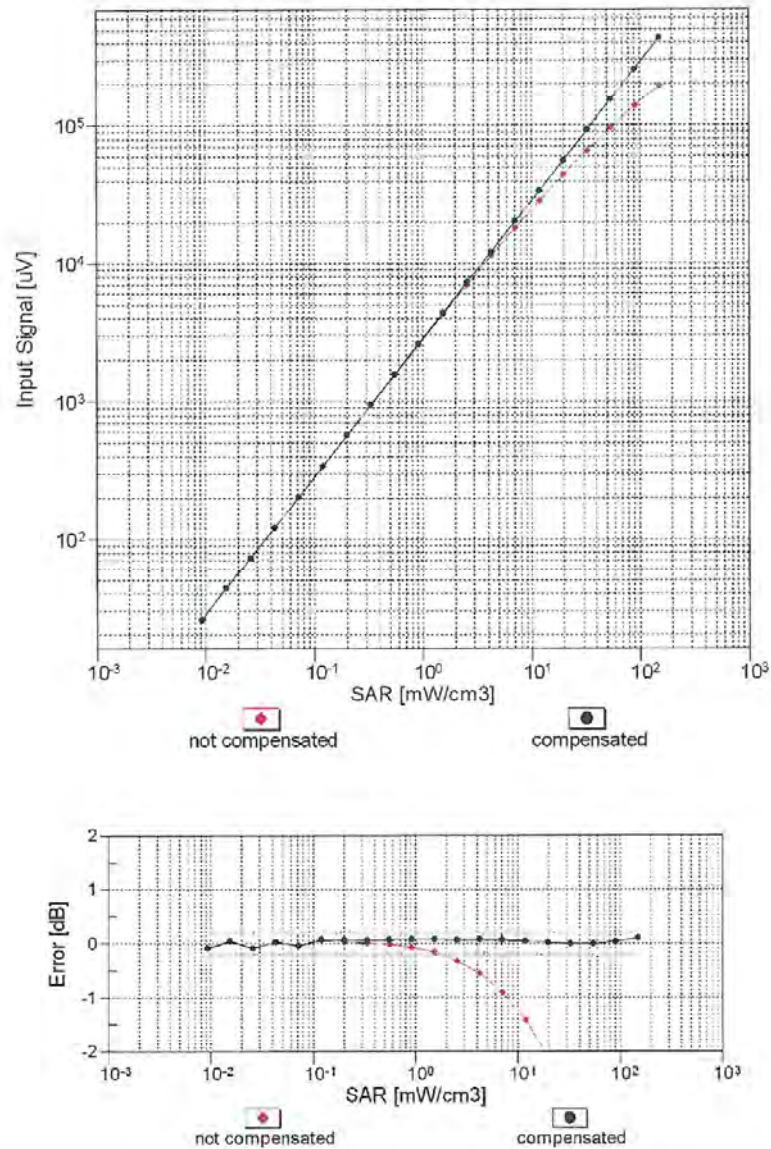


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


EX3DV4- SN:3933

September 25, 2018

Conversion Factor Assessment

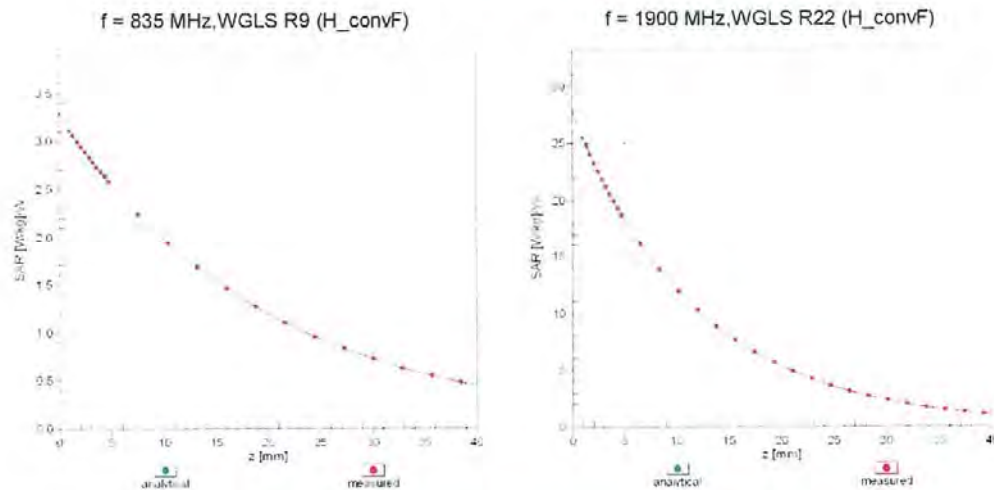

Deviation from Isotropy in Liquid

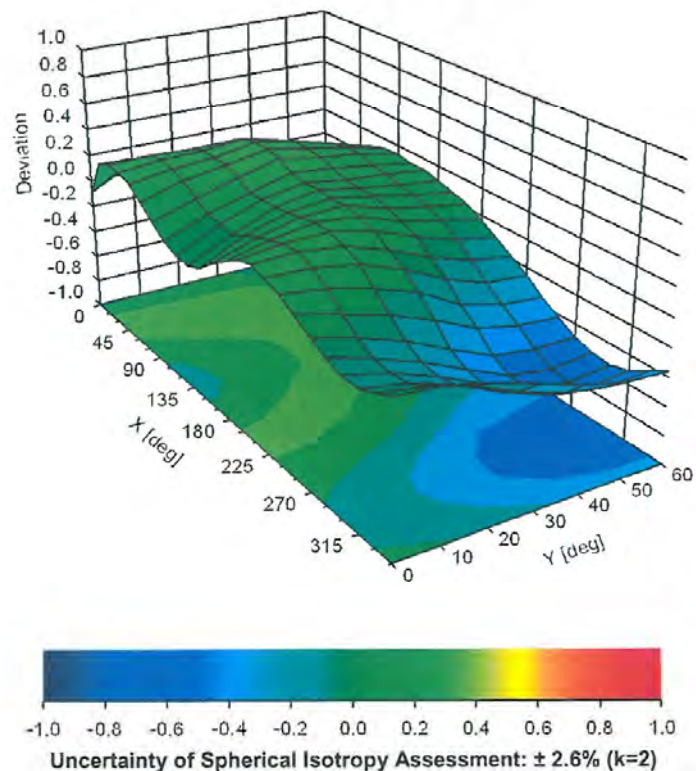Error (ϕ, θ), $f = 900 \text{ MHz}$ 

EX3DV4-- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	77.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm