Shenzhen Huatongwei International Inspection Co., Ltd.



1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



TEST REPORT

Report Reference No.....: CHTEW19060098 Report verification:

Project No.....: SHT1905047101EW

FCC ID.....: ZSW-10-018

Applicant's name.....: b mobile HK Limited

Address...... Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak

Street; Kwai Chung; New Territories; Hong Kong.

Manufacturer..... b mobile HK Limited

Address...... Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak

Street; Kwai Chung; New Territories; Hong Kong.

Test item description: Mobile Phone

Trade Mark Bmobile

Model/Type reference..... K401

Listed Model(s)

Standard: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of receipt of test sample........... May 21,2019

Date of testing...... May 22,2019- Jun 17,2019

Date of issue...... Jun 18,2019

Result...... PASS

Compiled by

(Position+Printed name+Signature): File administrators Silvia Li

Supervised by

(Position+Printed name+Signature): Project Engineer Aaron Fang

e administrators Silvia Li

oject Engineer Aaron Fang

Aaron.Fang

Approved by

(Position+Printed name+Signature): RF Manager Hans Hu

Homsty

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd.

Address...... 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Report No.: CHTEW19060098 Page: 2 of 58 Issued: 2019-06-18

Contents

<u>1.</u>	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
2	TEST DESCRIPTION	
<u>2.</u>	TEST DESCRIPTION	4
<u>3.</u>	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	TEST ENVIRONMENT	7
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	20 dB Bandwidth	19
5.5.	Carrier Frequencies Separation	23
5.6.	Hopping Channel Number	25
5.7.	Dwell Time	27
5.8.	Pseudorandom Frequency Hopping Sequence	34
5.9.	Restricted band (radiated)	35
5.10.	Band edge and Spurious Emissions (conducted)	37
5.11.	Spurious Emissions (radiated)	53
<u>6.</u>	TEST SETUP PHOTOS	57
7.	EXTERANAL AND INTERNAL PHOTOS	58
		00

Report No.: CHTEW19060098 Page: 3 of 58 Issued: 2019-06-18

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

<u>FCC Rules Part 15.247:</u> Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devicese

1.2. Report version

Revision No.	Date of issue	Description		
N/A	2019-06-18	Original		

Report No.: CHTEW19060098 Page: 4 of 58 Issued: 2019-06-18

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	PASS	Jiongsheng Feng
AC Power Line Conducted Emissions	15.207	PASS	Jiongsheng Feng
Conducted Peak Output Power	15.247 (b)(1)	PASS	Bruse.Li
20 dB Bandwidth	15.247 (a)(1)	PASS	Bruse.Li
Carrier Frequencies Separation	15.247 (a)(1)	PASS	Bruse.Li
Hopping Channel Number	15.247 (a)(1)	PASS	Bruse.Li
Dwell Time	15.247 (a)(1)	PASS	Bruse.Li
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS	Bruse.Li
Restricted band	15.247(d)/15.205	PASS	Bruse.Li
Radiated Emissions	15.247(d)/15.209	PASS	Bruse.Li

Note: The measurement uncertainty is not included in the test result.

Report No.: CHTEW19060098 Page: 5 of 58 Issued: 2019-06-18

3. **SUMMARY**

3.1. Client Information

Applicant: b mobile HK Limited		
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.	
Manufacturer:	b mobile HK Limited	
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.	

3.2. Product Description

Name of EUT:	Mobile Phone	
Trade Mark:	Bmobile	
Model No.:	K401	
Listed Model(s):	-	
IMEI:	Conducted: 355014053453823 Radiated: 355014053453959	
Power supply:	DC 3.7V	
Adapter information:	Input:100-240Va.c., 50/60Hz, 0.15A Output:5.0Vd.c., 500mA	
Hardware version:	ZX309-MB-V1.1	
Software version: Bmobile_K401_OM_LATAM_V001_5-10		
Bluetooth		
Version:	Supported BT4.0+EDR	
Modulation:	GFSK, π/4DQPSK, 8DPSK	
Operation frequency:	2402MHz~2480MHz	
Channel number:	79	
Channel separation:	1MHz	
Antenna type: PIFA Antenna		
Antenna gain:	3.5dBi	

Report No.: CHTEW19060098 Page: 6 of 58 Issued: 2019-06-18

3.3. Operation state

> Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
÷	:
39	2441
:	
77	2479
78	2480

> TEST MODE

_			_
For	RF	tact	items:

The engineering test program was provided and enabled to make EUT continuous transmit

For AC power line conducted emissions:

The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.

For Radiated suprious emissions test item:

The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

1	Manufacturer:	/
1	Model No.:	/
/	Manufacturer:	/
/	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

Report No.: CHTEW19060098 Page: 7 of 58 Issued: 2019-06-18

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd. Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

Report No.: CHTEW19060098 Page: 8 of 58 Issued: 2019-06-18

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.63 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.63 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.35 dB	(1)
Radiated Emissions below 1GHz	4.28 dB	(1)
Radiated Emissions above 1GHz	5.16 dB	(1)
Occupied Bandwidth	69 Hz	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96

Report No.: CHTEW19060098 Page: 9 of 58 Issued: 2019-06-18

4.5. Equipments Used during the Test

•	Conducted Emission					
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
•	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
•	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
•	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
•	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
•	Test Software	R&S	ES-K1	N/A	N/A	N/A
0	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
0	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
0	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
0	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
0	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
0	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26

•	Radiated Emission-6th test site					
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
•	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
•	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
•	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
•	Pre-Amplifer	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
•	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2018/09/28	2019/09/27
•	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2018/09/28	2019/09/27
•	Test Software	R&S	ES-K1	N/A	N/A	N/A
•	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
•	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

•	Radiated emission-7th test site											
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
•	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29						
•	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26						
•	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26						
•	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13						
•	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13						
•	Broadband Pre- amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25						
•	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14						
•	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14						
•	Test Software	Audix	E3	N/A	N/A	N/A						

Report No.: CHTEW19060098 Page: 10 of 58 Issued: 2019-06-18

•	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
•	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

•	RF Conducted Method											
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
•	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27						
•	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28						
0	Radio communication tester	R&S	CMW500	137688-Lv	2018/09/29	2019/09/28						
0	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A						
0	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A						
0	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A						
0	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A						

Report No.: CHTEW19060098 Page: 11 of 58 Issued: 2019-06-18

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of anantenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

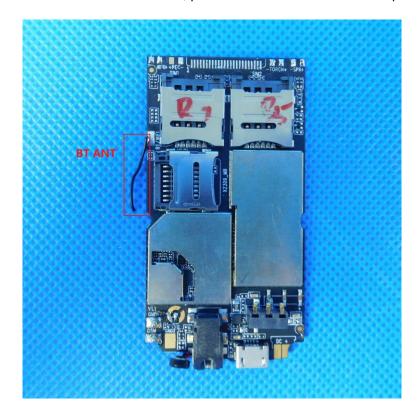

Report No.: CHTEW19060098 Page: 12 of 58 Issued: 2019-06-18

5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Eraguanay ranga (MHz)	Limit (dBuV)				
Frequency range (MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

^{*} Decreases with the logarithm of the frequency.

TEST CONFIGURATION

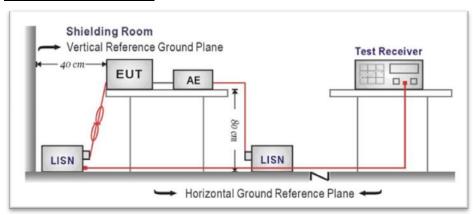

TEST PROCEDURE


- 1. The EUT was setup according to ANSI C63.10:2013 requirements.
- 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor,was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS


Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit Level

Report No.: CHTEW19060098 Page: 13 of 58 Issued: 2019-06-18

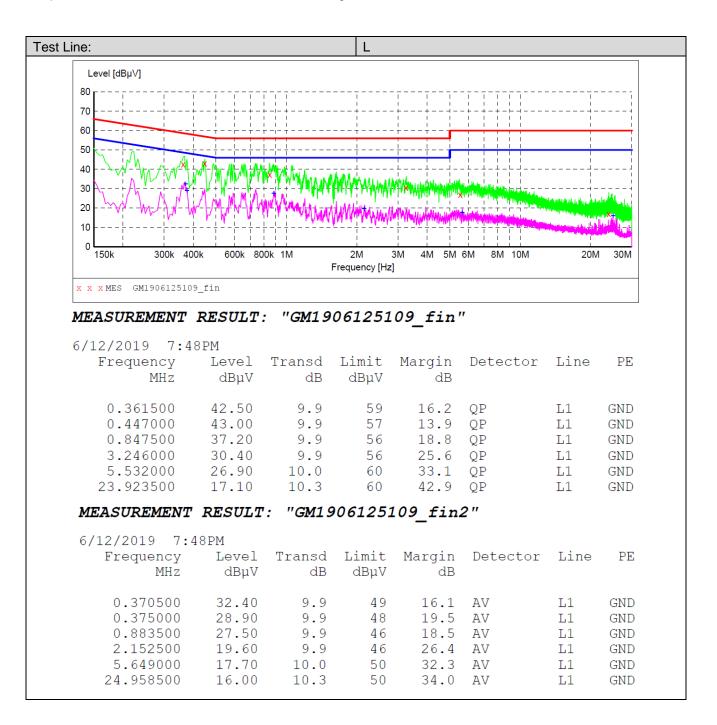

Report No.: CHTEW19060098 Page: 14 of 58 Issued: 2019-06-18

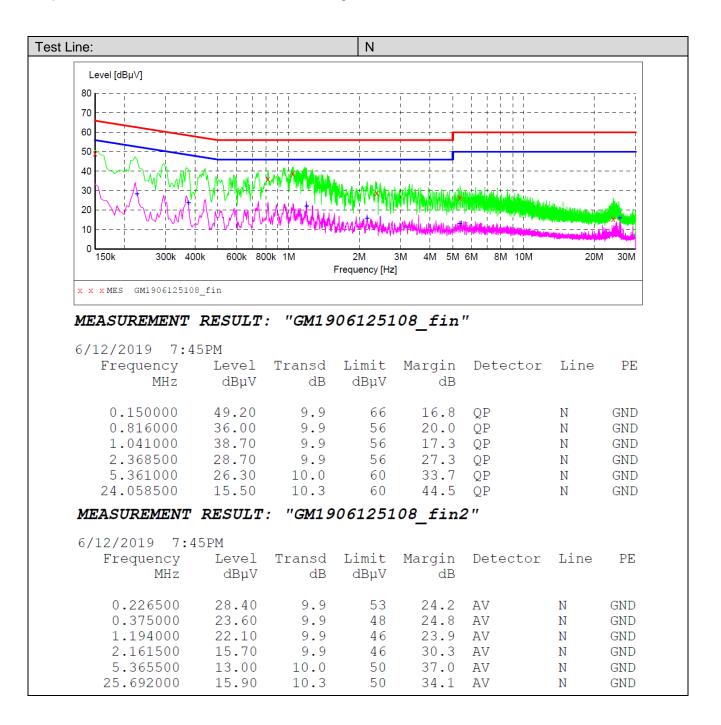

Report No.: CHTEW19060098 Page: 15 of 58 Issued: 2019-06-18


5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

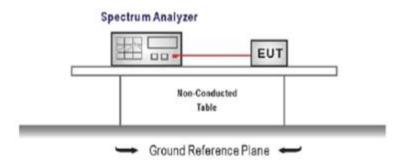

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW≥ the 20 dB bandwidth of the emission being measured, VBW≥RBW Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result	
	00	1.29			
GFSK	39	1.95	≤ 30.00	Pass	
	78	1.19			
	00	1.18			
π/4DQPSK	39	1.70	≤ 21.00	Pass	
	78	1.02			
	00	1.20			
8DPSK	39	1.72	≤ 21.00	Pass	
	78	1.07			

Report No.: CHTEW19060098 Page: 16 of 58 Issued: 2019-06-18

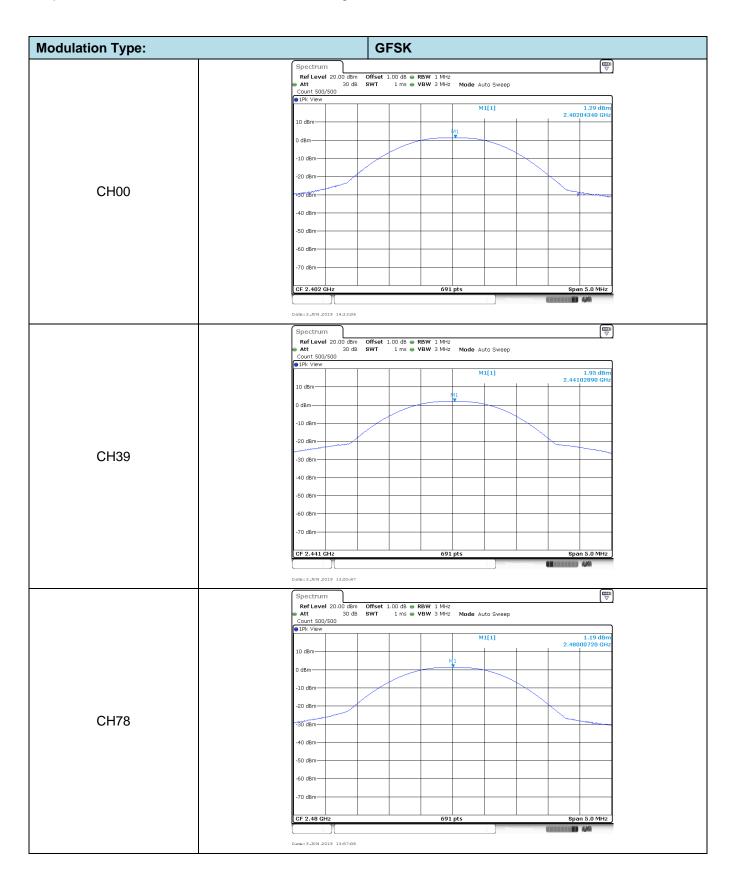

Report No.: CHTEW19060098 Page: 17 of 58 Issued: 2019-06-18



Report No.: CHTEW19060098 Page: 18 of 58 Issued: 2019-06-18




Report No.: CHTEW19060098 Page: 19 of 58 Issued: 2019-06-18

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

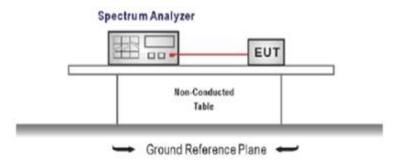

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result	
	00	0.93			
GFSK	39	0.93	-	Pass	
	78	0.93			
	00	1.29			
π/4DQPSK	39	1.29	-	Pass	
	78	1.29			
	00	1.28			
8DPSK	39	1.28	-	Pass	
	78	1.28			


Report No.: CHTEW19060098 Page: 20 of 58 Issued: 2019-06-18

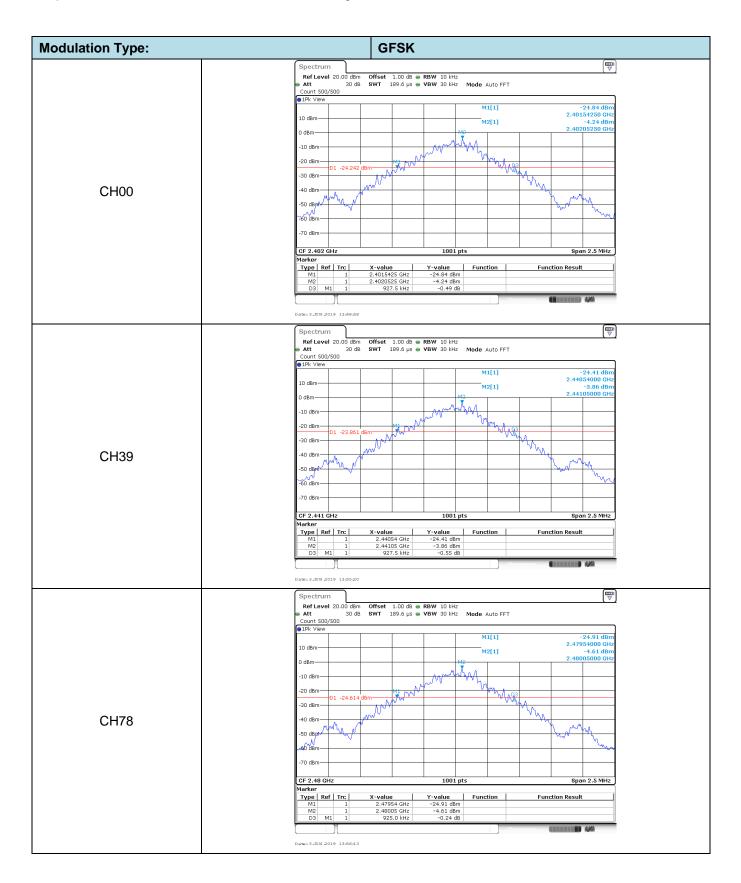

Report No.: CHTEW19060098 Page: 21 of 58 Issued: 2019-06-18

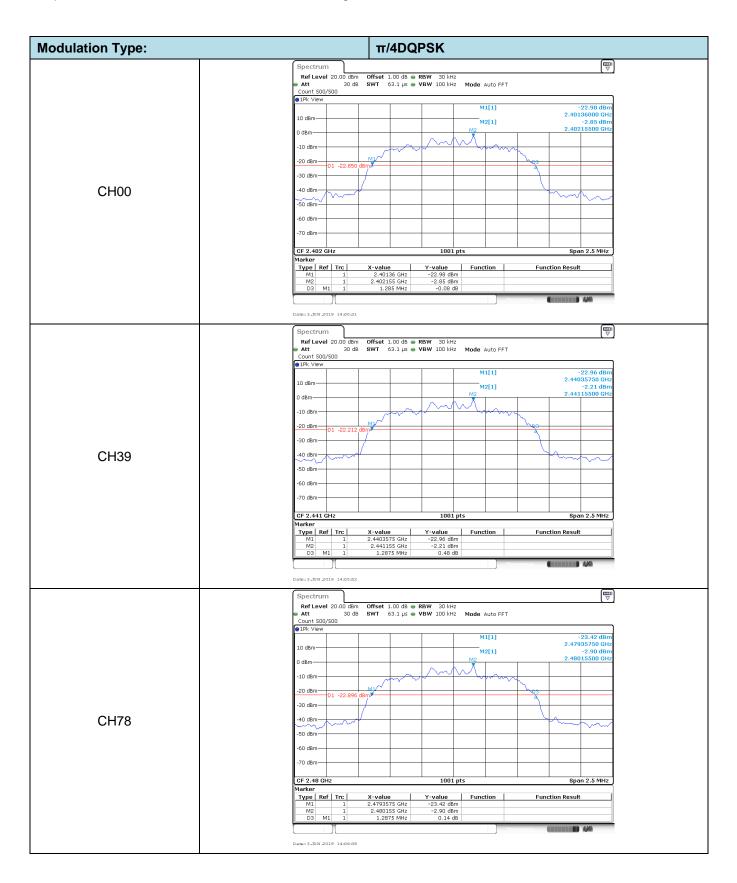

Report No.: CHTEW19060098 Page: 22 of 58 Issued: 2019-06-18

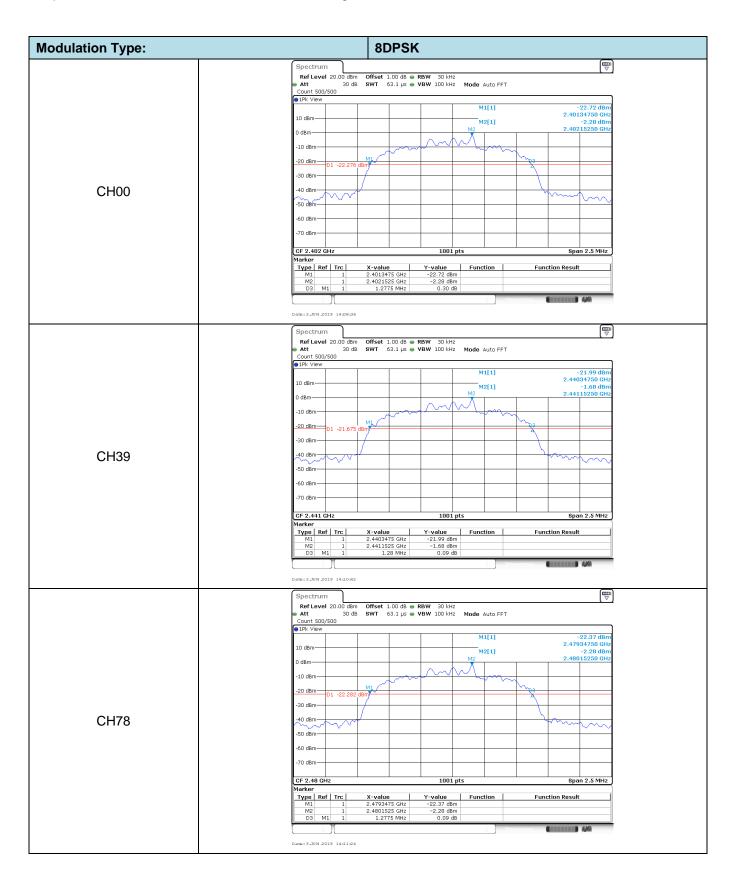

Report No.: CHTEW19060098 Page: 23 of 58 Issued: 2019-06-18

5.5. Carrier Frequencies Separation


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively,

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

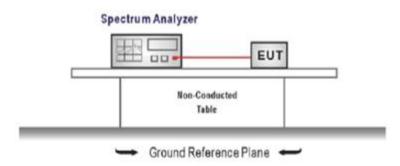

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - RBW ≥ 1% of the span, VBW ≥ RBW
 - Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.00	≥0.93	Pass
π/4DQPSK	39	1.00	≥0.86	Pass
8DPSK	39	1.00	≥0.85	Pass

Note:

^{*:} GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4. $\pi/4DQPSK$ limit = 2/3 * The maximum 20 dB Bandwidth for $\pi/4DQPSK$ modulation on the section 5.4. 8DPSK limit = 2/3 * The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4

Report No.: CHTEW19060098 Page: 24 of 58 Issued: 2019-06-18

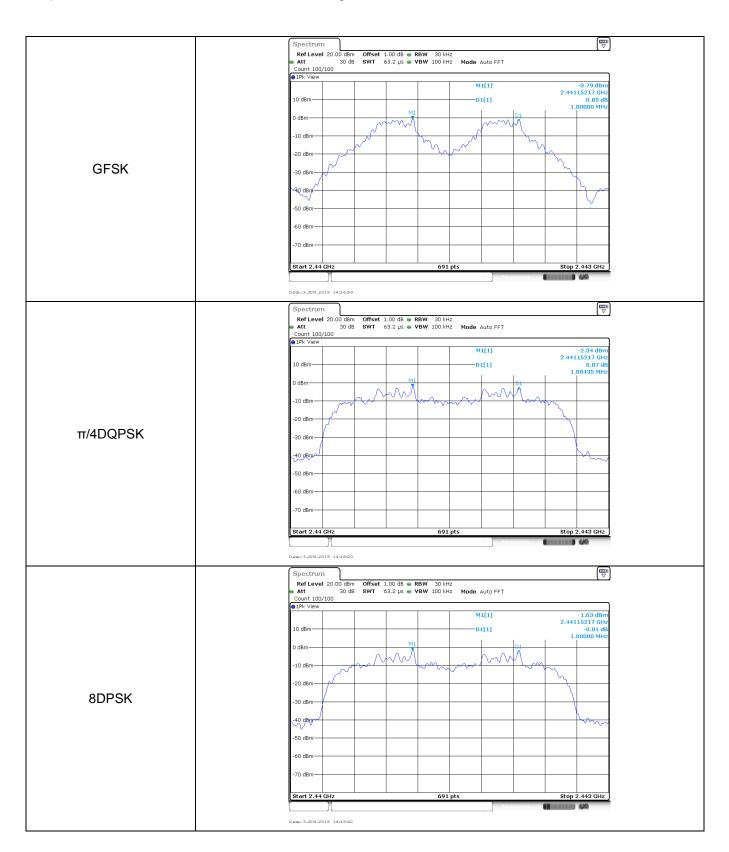


Report No.: CHTEW19060098 Page: 25 of 58 Issued: 2019-06-18

5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

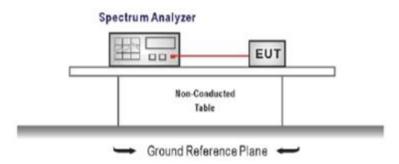

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW ≥ 1% of the span, VBW ≥ RBW

Sweep = auto, Detector function = peak, Trace = max hold

4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Modulation type	Channel number	Limit	Result
GFSK	79		
π/4DQPSK	79	≥15.00	Pass
8DPSK	79		

Report No.: CHTEW19060098 Page: 26 of 58 Issued: 2019-06-18

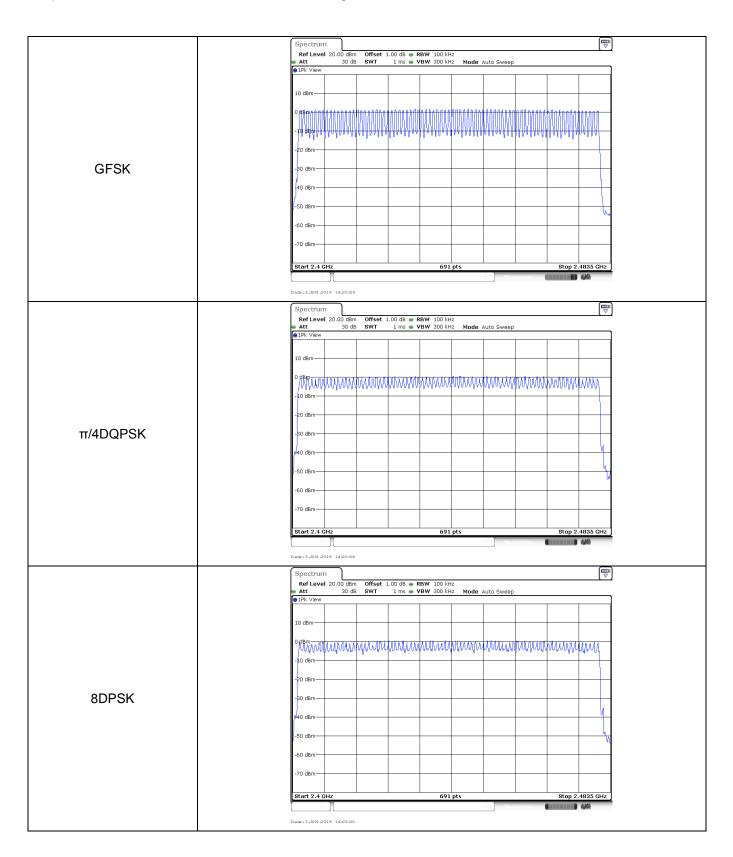


Report No.: CHTEW19060098 Page: 27 of 58 Issued: 2019-06-18

5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

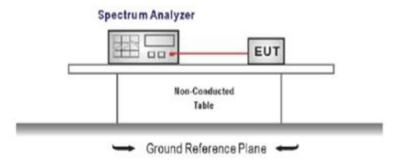

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings:
 - Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW \geq RBW
 - Sweep = as necessary to capture the entire dwell time per hopping channel,
 - Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Modulation type	Channel	Burst Width [ms/hop/ch]	Total Dwell time Hops[hop*ch] (Second)		Limit (Second)	Result
	DH1	0.38	317.00	0.12		
GFSK	DH3	1.63	1.63 156.00 0.26		≤ 0.40	Pass
	DH5	2.88	106.00	0.31		
	2DH1	0.38	315.00	0.12		
π/4DQPSK	QPSK 2DH3	1.64	158.00	0.26	≤ 0.40	Pass
	2DH5	2.88	111.00	0.32		
	3DH1	0.39	315.00	0.12		
8DPSK	3DH3	1.63	158.00	0.26	≤ 0.40	Pass
	3DH5	2.89	101.00	0.29		


Report No.: CHTEW19060098 Page: 28 of 58 Issued: 2019-06-18

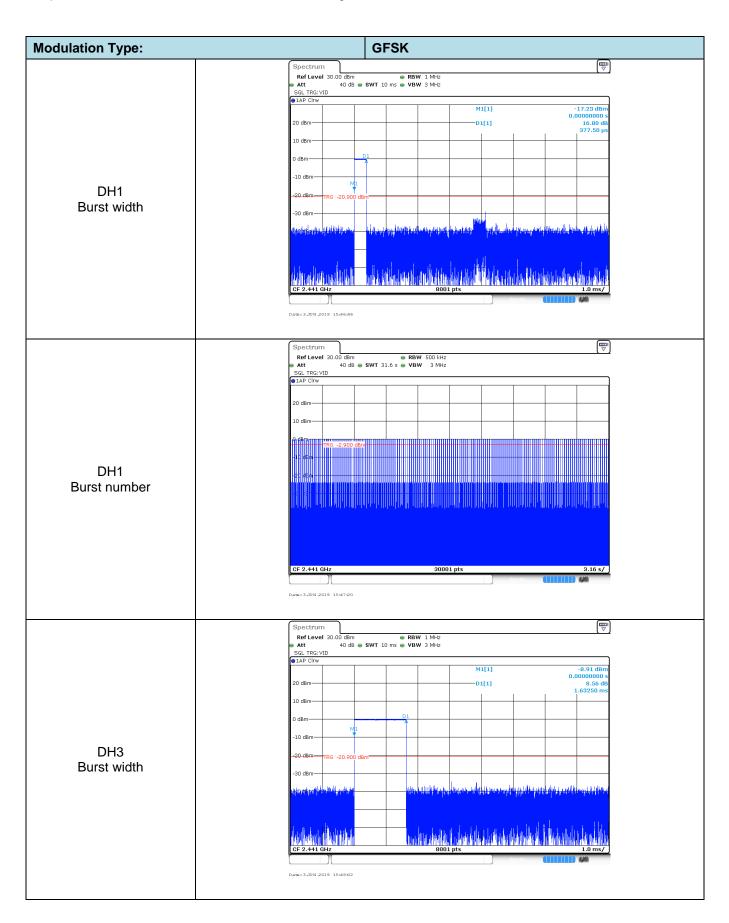


Report No.: CHTEW19060098 Page: 29 of 58 Issued: 2019-06-18

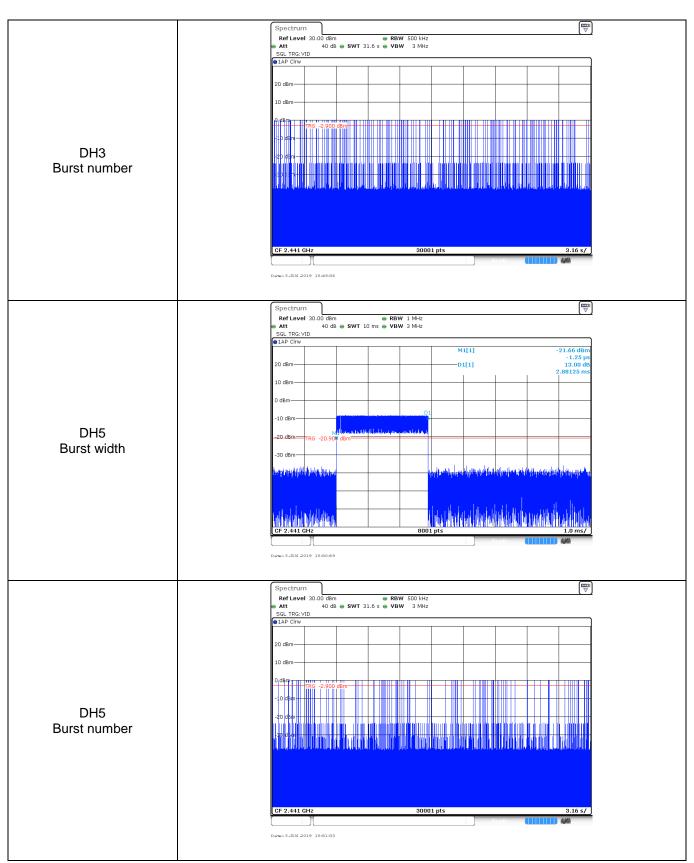


Report No.: CHTEW19060098 Page: 30 of 58 Issued: 2019-06-18

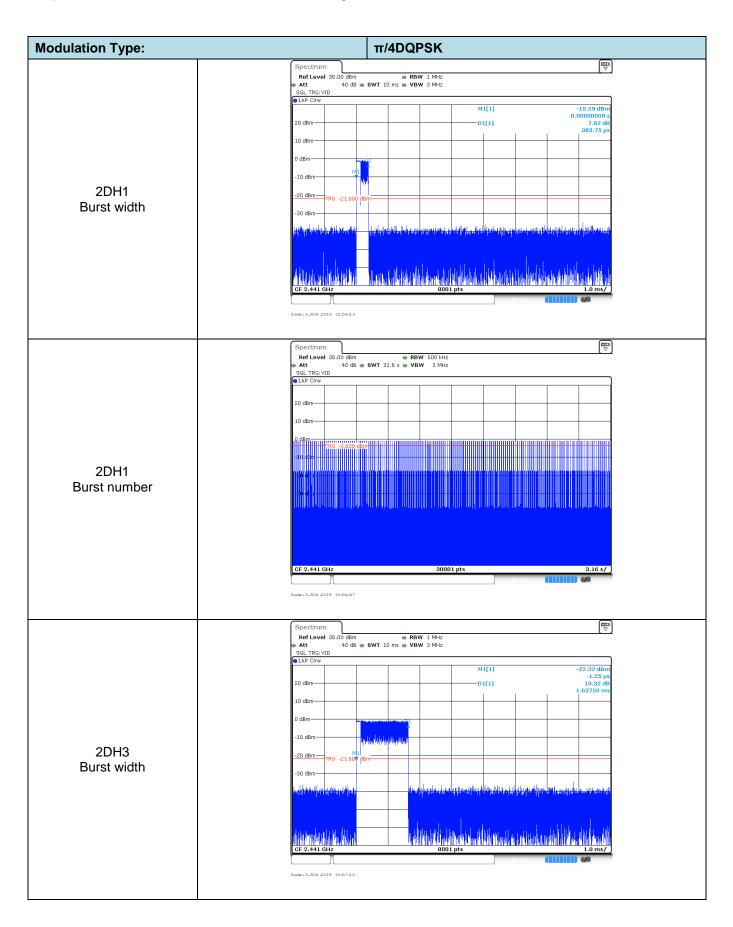


Report No.: CHTEW19060098 Page: 31 of 58 Issued: 2019-06-18

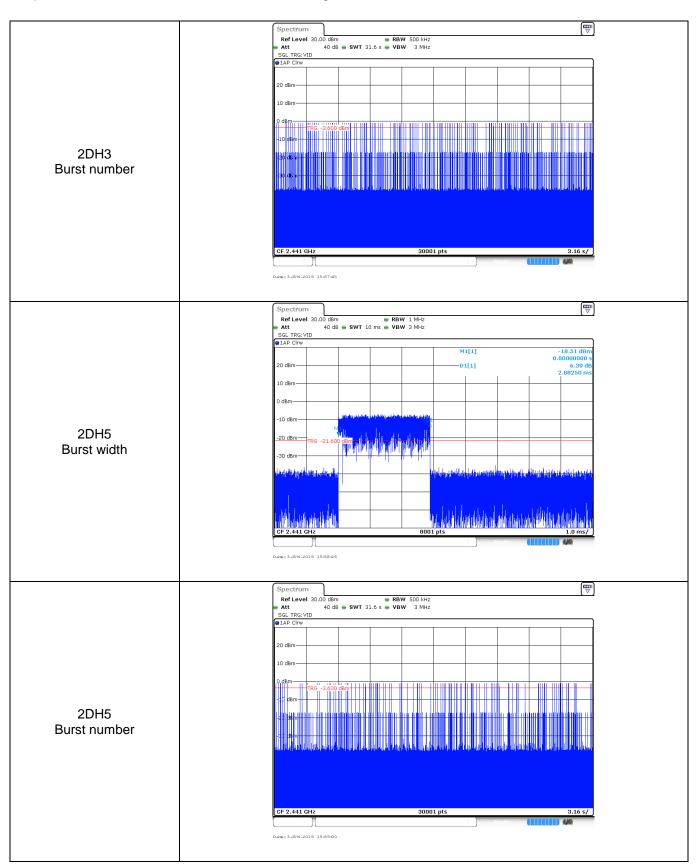

Report No.: CHTEW19060098 Page: 32 of 58 Issued: 2019-06-18

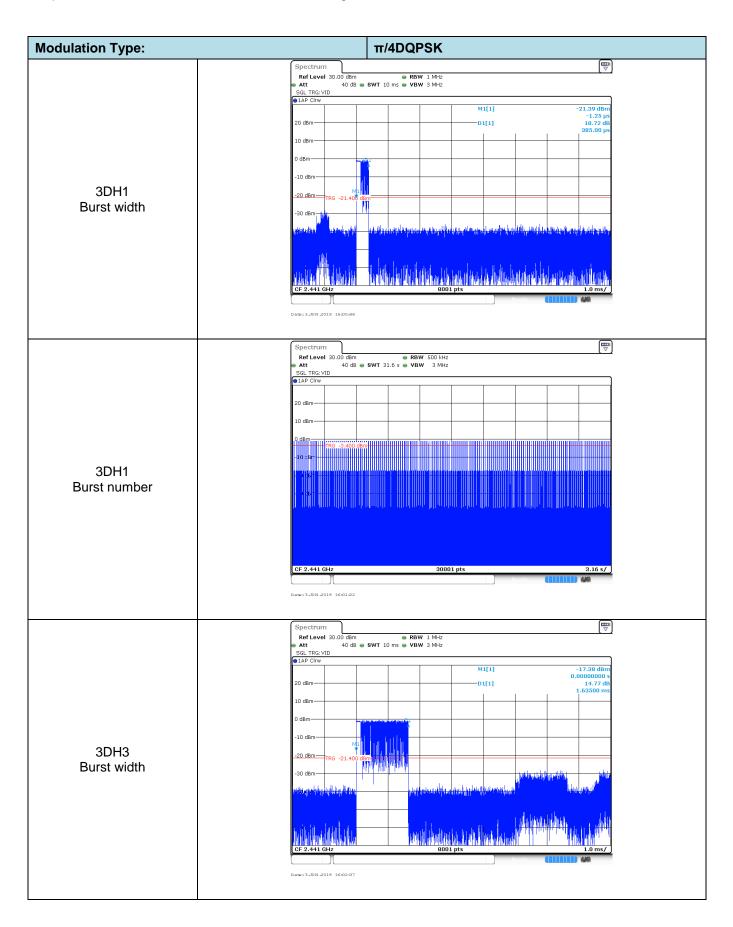

Report No.: CHTEW19060098 Page: 33 of 58 Issued: 2019-06-18

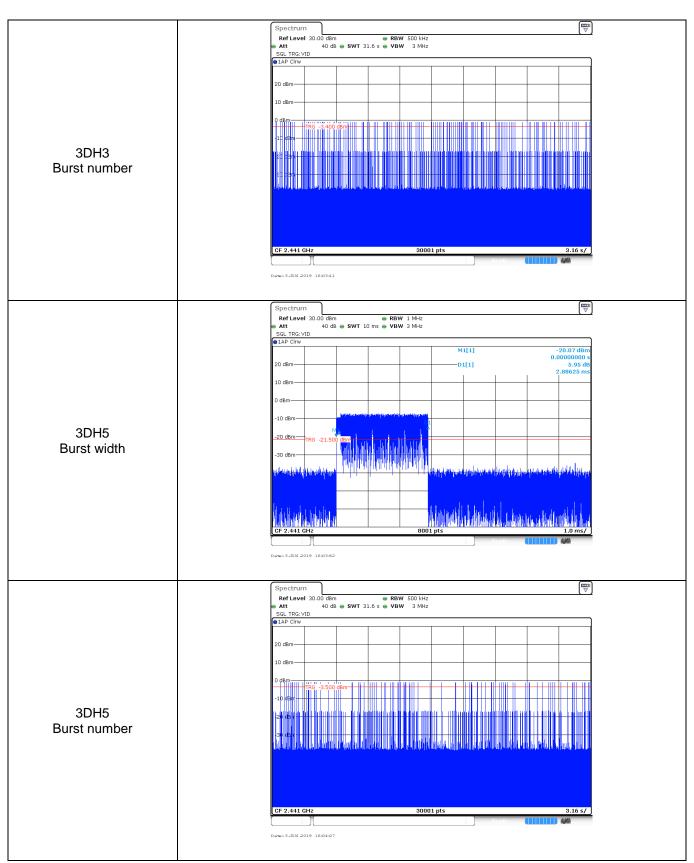

Report No.: CHTEW19060098 Page: 34 of 58 Issued: 2019-06-18

5.8. Pseudorandom Frequency Hopping Sequence


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier fre-quencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Al-ternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier fre-quencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to chan-nel frequencies that are selected at the system hopping rate from a pseudo ran-domly ordered list of hopping fre-quencies. Each frequency must be used equally on the average by each trans-mitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their cor-responding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the friststage. The sequence begins with the frist one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An explame of pseudorandom frequency hopping sequence as follows:



Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

Report No.: CHTEW19060098 Page: 35 of 58 Issued: 2019-06-18


5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

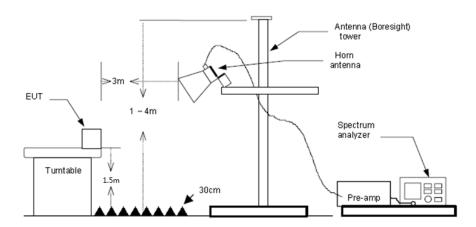

TEST PROCEDURE

- 1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- The receiver set as follow: RBW=1 MHz, VBW=3 MHz Peak detector for Peak value RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

Report No.: CHTEW19060098 Page: 36 of 58 Issued: 2019-06-18

Test channel:					CH00				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	31.49	28.05	6.62	37.65	28.51	74.00	-45.49	Horizontal	Peak
2390.00	31.24	27.65	6.75	37.87	27.77	74.00	-46.23	Horizontal	Peak
2310.00	33.04	28.05	6.62	37.65	30.06	74.00	-43.94	Vertical	Peak
2390.00	33.60	27.65	6.75	37.87	30.13	74.00	-43.87	Vertical	Peak
2310.00	19.82	28.05	6.62	37.65	16.84	54.00	-37.16	Horizontal	Average
2390.00	19.45	27.65	6.75	37.87	15.98	54.00	-38.02	Horizontal	Average
2310.00	20.52	28.05	6.62	37.65	17.54	54.00	-36.46	Vertical	Average
2390.00	20.21	27.65	6.75	37.87	16.74	54.00	-37.26	Vertical	Average

Test channel:					CH78				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	47.81	27.26	6.83	37.87	44.03	74.00	-29.97	Horizontal	Peak
2500.00	31.79	27.20	6.84	37.87	27.96	74.00	-46.04	Horizontal	Peak
2483.50	47.12	27.26	6.83	37.87	43.34	74.00	-30.66	Vertical	Peak
2500.00	32.26	27.20	6.84	37.87	28.43	74.00	-45.57	Vertical	Peak
2483.50	21.70	27.26	6.83	37.87	17.92	54.00	-36.08	Horizontal	Average
2500.00	19.06	27.20	6.84	37.87	15.23	54.00	-38.77	Horizontal	Average
2483.50	23.54	27.26	6.83	37.87	19.76	54.00	-34.24	Vertical	Average
2500.00	20.04	27.20	6.84	37.87	16.21	54.00	-37.79	Vertical	Average


Report No.: CHTEW19060098 Page: 37 of 58 Issued: 2019-06-18

5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

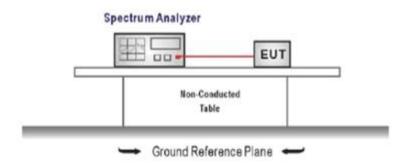

TEST PROCEDURE


- The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings:
 RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic.
 Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


 Report No.: CHTEW19060098 Page: 38 of 58 Issued: 2019-06-18

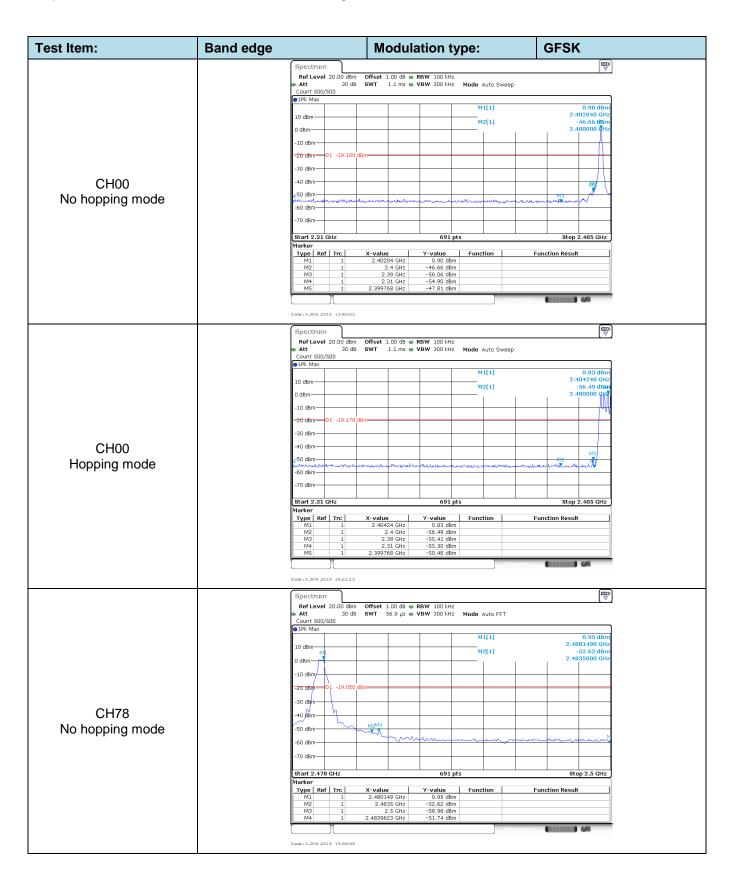


Report No.: CHTEW19060098 Page: 39 of 58 Issued: 2019-06-18

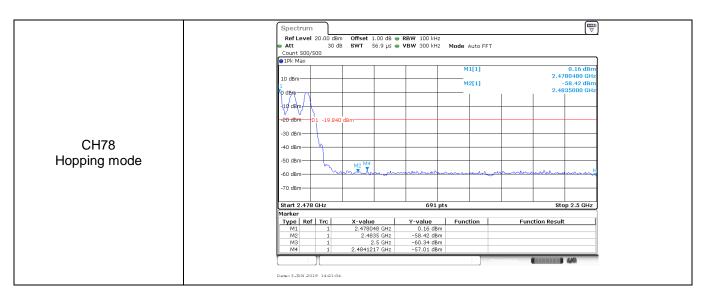


Report No.: CHTEW19060098 Page: 40 of 58 Issued: 2019-06-18

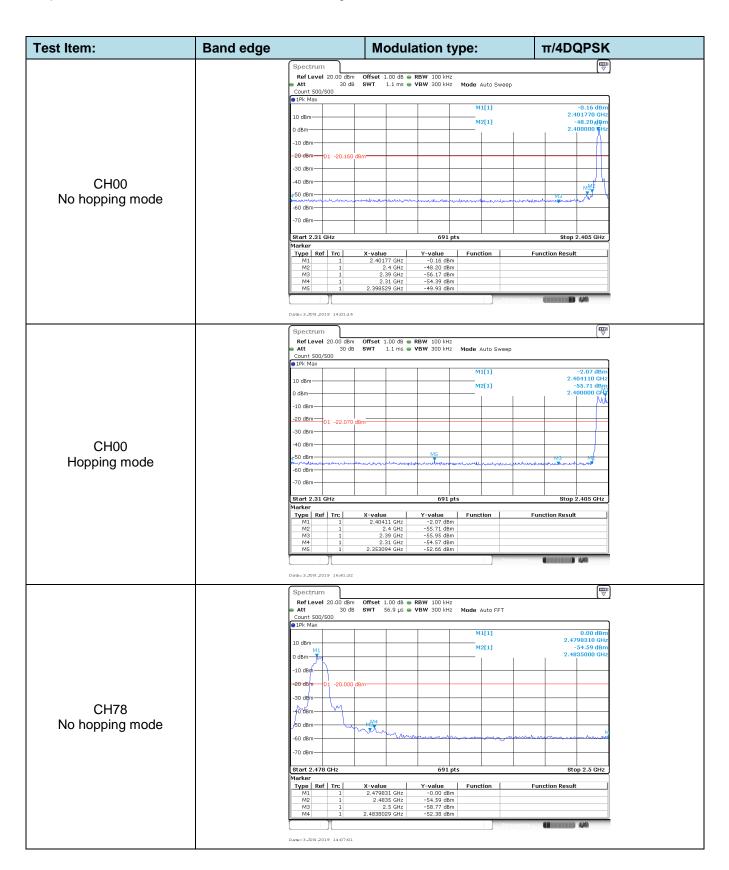


Report No.: CHTEW19060098 Page: 41 of 58 Issued: 2019-06-18

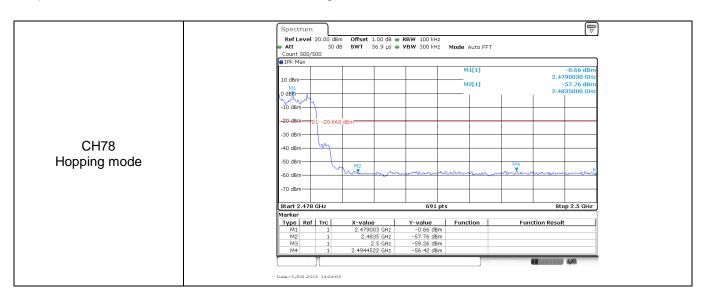


Report No.: CHTEW19060098 Page: 42 of 58 Issued: 2019-06-18

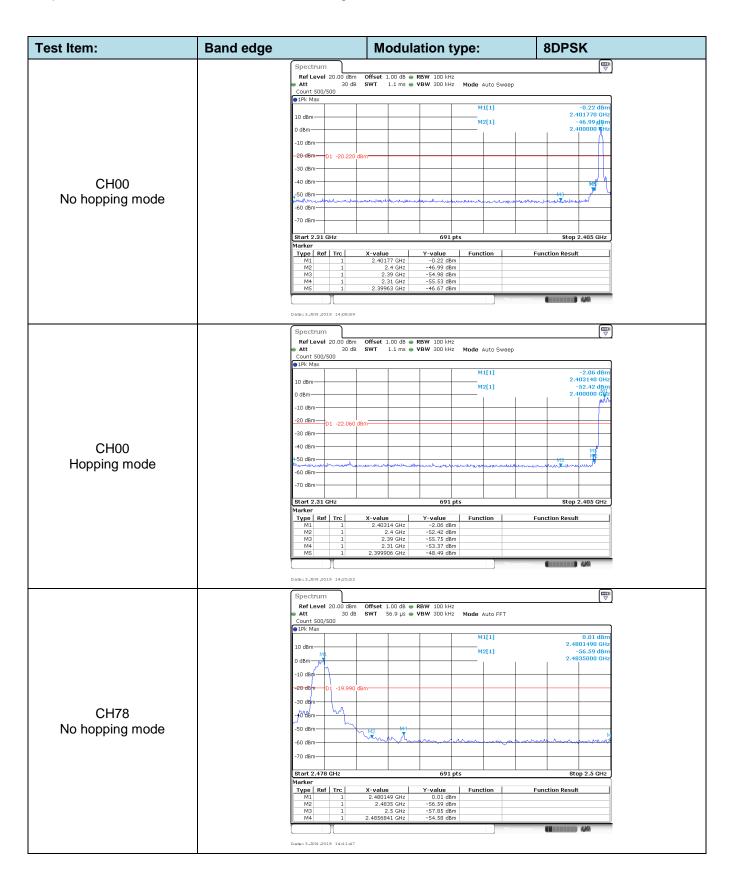


Report No.: CHTEW19060098 Page: 43 of 58 Issued: 2019-06-18

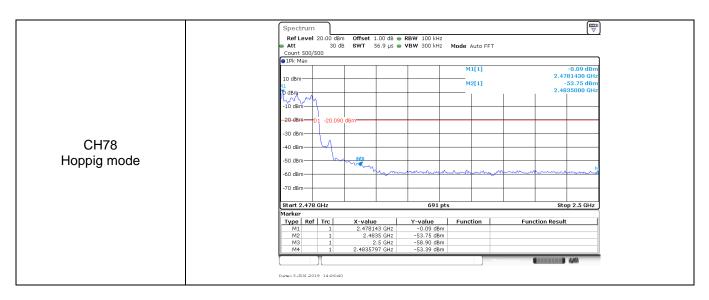


Report No.: CHTEW19060098 Page: 44 of 58 Issued: 2019-06-18

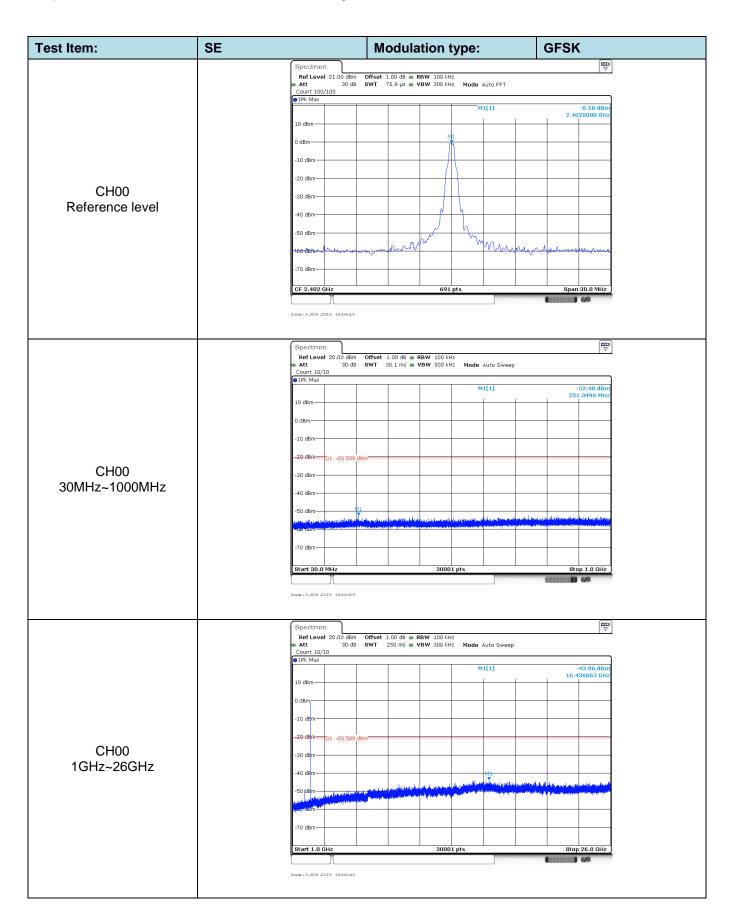


Report No.: CHTEW19060098 Page: 45 of 58 Issued: 2019-06-18

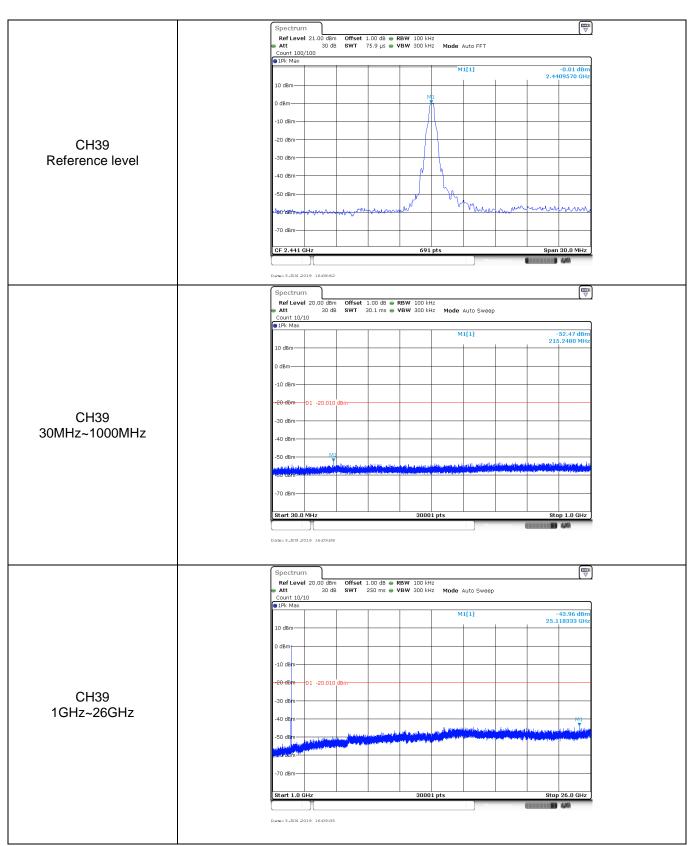


Report No.: CHTEW19060098 Page: 46 of 58 Issued: 2019-06-18

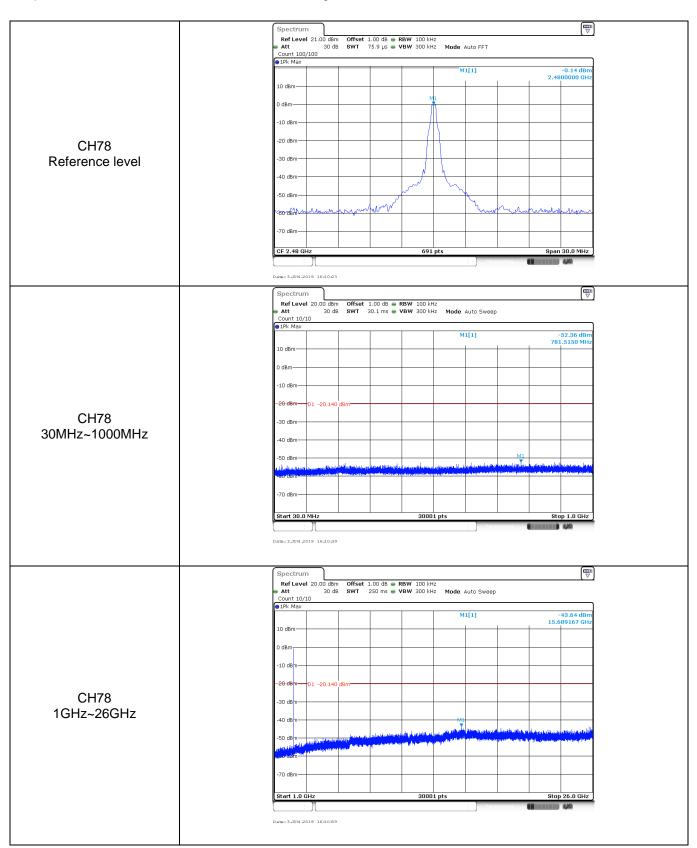


Report No.: CHTEW19060098 Page: 47 of 58 Issued: 2019-06-18

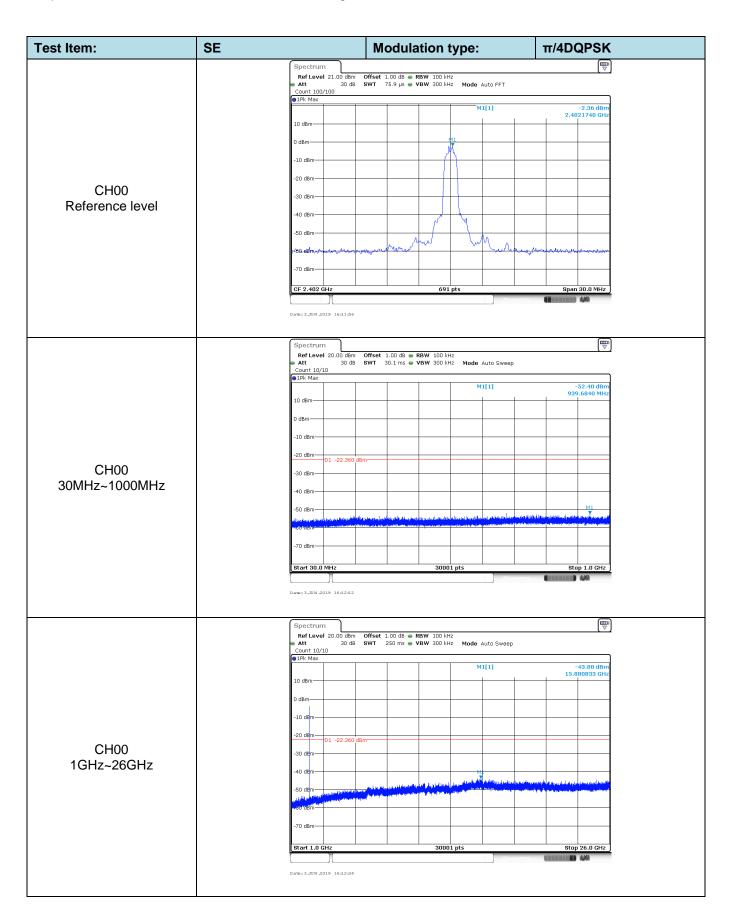


Report No.: CHTEW19060098 Page: 48 of 58 Issued: 2019-06-18

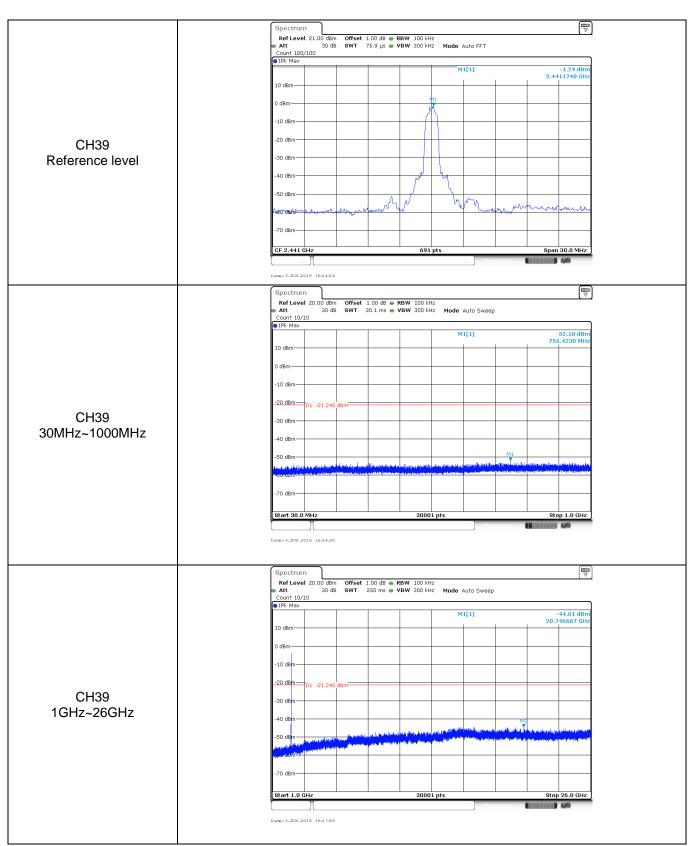


Report No.: CHTEW19060098 Page: 49 of 58 Issued: 2019-06-18

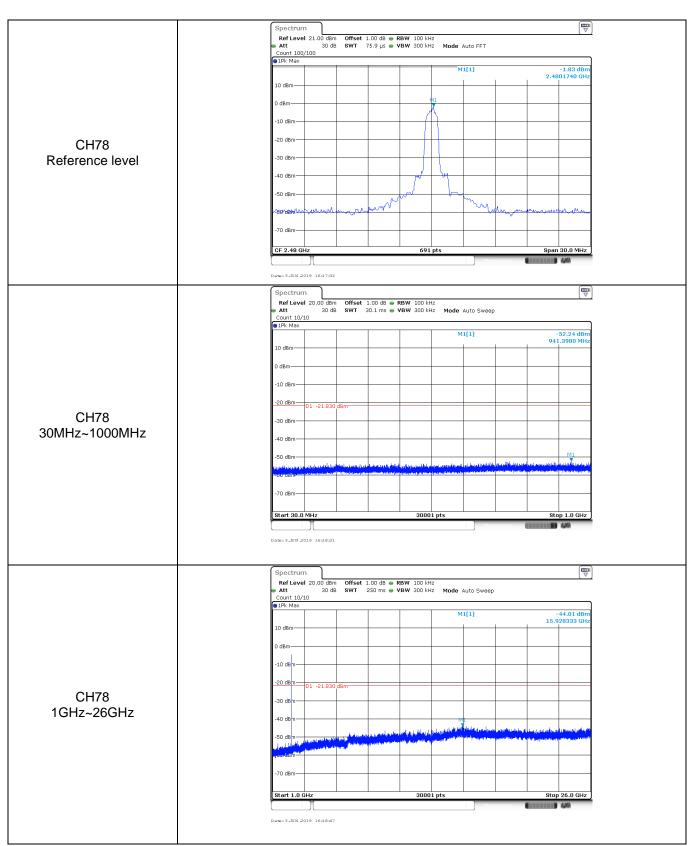


Report No.: CHTEW19060098 Page: 50 of 58 Issued: 2019-06-18

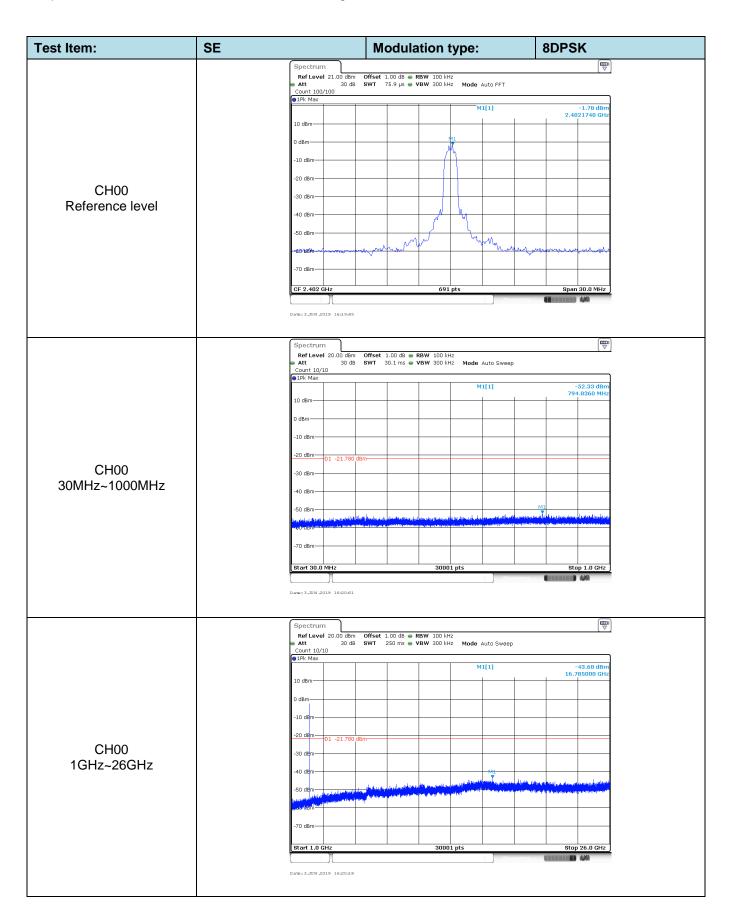

Report No.: CHTEW19060098 Page: 51 of 58 Issued: 2019-06-18

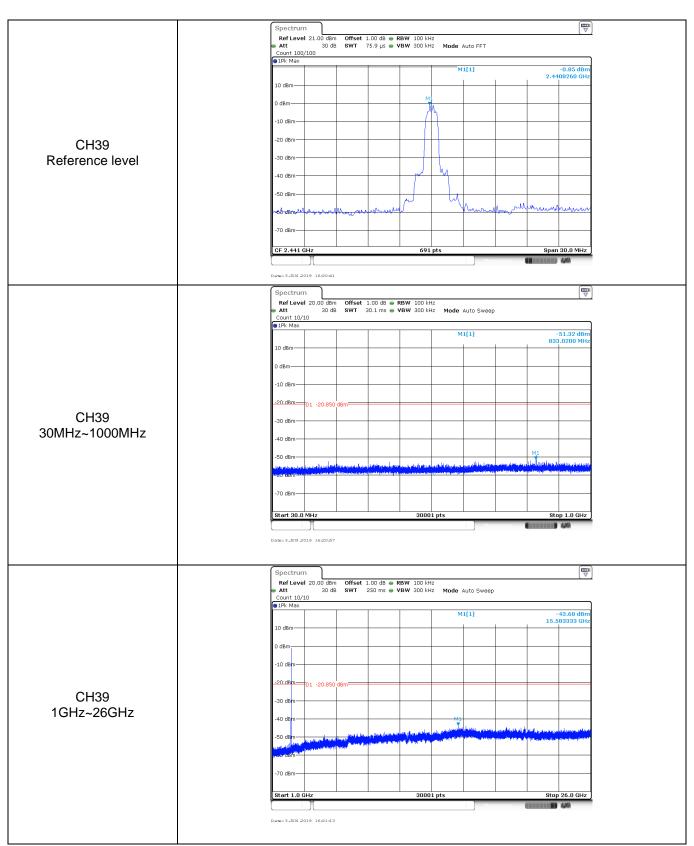

Report No.: CHTEW19060098 Page: 52 of 58 Issued: 2019-06-18

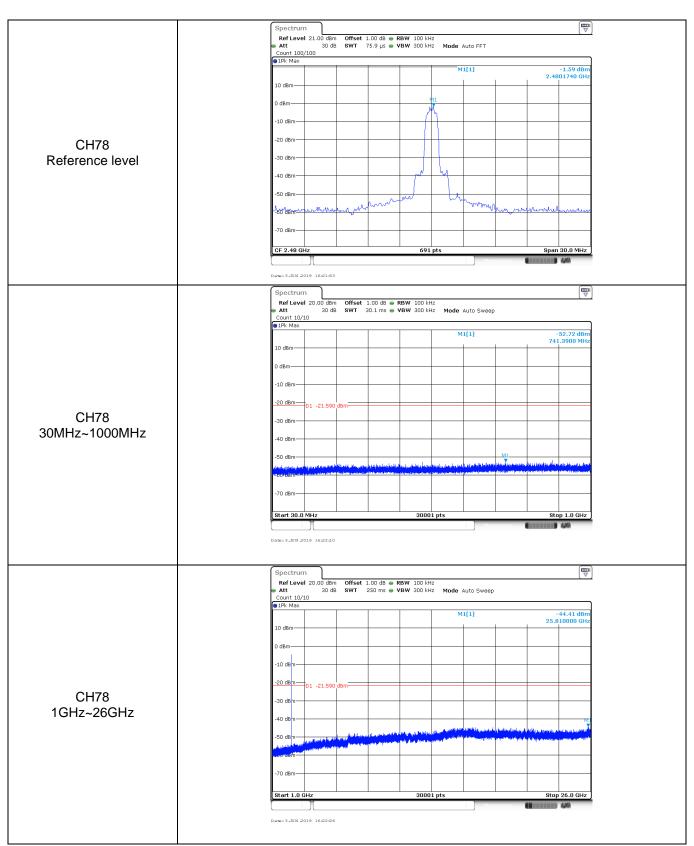

Report No.: CHTEW19060098 Page: 53 of 58 Issued: 2019-06-18

5.11. Spurious Emissions (radiated)


<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value						
30 MHz ~ 88 MHz	40.00	Quasi-peak						
88 MHz ~ 216 MHz	43.50	Quasi-peak						
216 MHz ~ 960 MHz	46.00	Quasi-peak						
960 MHz ~ 1 GHz	54.00	Quasi-peak						
Above 1 GHz	54.00	Average						
Above 1 GHZ	74.00	Peak						

TEST CONFIGURATION

Below 30 MHz

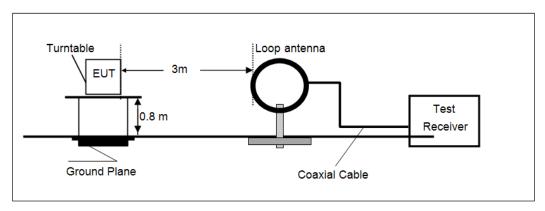


> 30 MHz ~1000 MHz

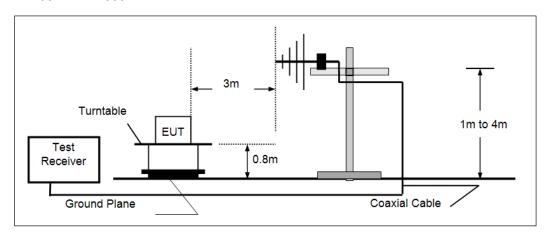

Above 1 GHz

Report No.: CHTEW19060098 Page: 54 of 58 Issued: 2019-06-18

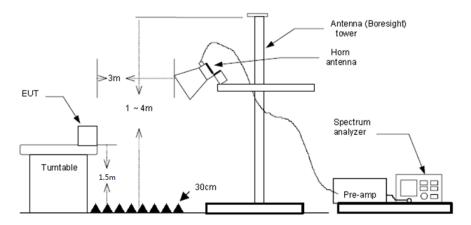

TEST PROCEDURE

- 1. The EUT was tested according to ANSI C63.10:2013.
- The EUT is placed on a turn table with 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(3) From 1 GHz to 10th harmonic:

RBW=1 MHz, VBW=3 MHz Peak detector for Peak value RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Note:

- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.


> 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Report No.: CHTEW19060098 Page: 55 of 58 Issued: 2019-06-18

30 MHz ~ 1 GHz

zation:		Verti	Vertical					
Level [dBµV/m]								
80								
				[
70		++					<u> </u>	-+
60							+ +	-+
50				<u> </u>			<u> </u>	·
40	<u>i i i</u>						<u> </u>	
		1 1 1		 		 	1 1	Mary Mary Mary
30	-++	++		+· !			the manufacture of the same	/****
20	- 		X	~~~~ 	~~~~~ <u>~</u>			- +
	-						÷	
10								
						į	i i	
	50M 60M 70I	M 100		2001		300M 40	00M 500M 60	00M 800M 1G
	50M 60M 70I	M 100		200l Frequency [Hz		300M 40	00M 500M 60	00M 800M 1G
0 30M 40M	50M 60M 70I	M 100				300M 40	00M 500M 60	00M 800M 1G
0 30M 40M		M 100				300M 40	00M 500M 60	00M 800M 1G
0 30M 40M 5	3306096_red		F	Frequency [Hz		300M 40	DOM 500M 60	00M 800M 1G
0 30M 40M S	3306096_red		F			300M 40	DOM 500M 60	00M 800M 1G
0 30M 40M 9 30M 40M 9 30M 40M 9 30M	3306096_red ************************************	: "GM19	053060S	Frequency [Hz	2]			
0 30M 40M S	3306096_red ************************************	: "GM19	0530609	Frequency [Hz		Height	Azimuth	
0 30M 40M 9 30M 40M 9 30M 40M 9 30M	3306096_red ************************************	: "GM19	053060S	Frequency [Hz 96_red" Margin	2]			
0 30M 40M 8 x x x MES GM1905 MEASUREMENT 5/30/2019 9: Frequency MHz 51.340000	3306096_red 7 RESULT: 28PM Level dBμV/m 22.90	: "GM19 Transd dB -4.9	0530609 Limit dBµV/m 40.0	P6_red" Margin dB	Det. QP	Height cm	Azimuth deg 14.00	Polarization VERTICAL
0 30M 40M 8 x x x MES GM1905 MEASUREMENT 5/30/2019 9: Frequency MHz 51.340000 55.220000	7 RESULT : 28PM Level dBμV/m 22.90 23.20	: "GM19 Transd dB -4.9 -5.3	0530609 Limit dBµV/m 40.0 40.0	96_red" Margin dB 17.1 16.8	Det. QP QP	Height cm 100.0 100.0	Azimuth deg 14.00 75.00	Polarization VERTICAL VERTICAL
0 30M 40M 5 X X X MES GM1905 MEASUREMENT 5/30/2019 9: Frequency MHz 51.340000 55.220000 105.660000	3306096_red 7 RESULT: 28PM Level dBμV/m 22.90 23.20 22.30	: "GM19 Transd dB -4.9 -5.3 -6.7	0530609 Limit dBμV/m 40.0 40.0 43.5	### Prequency [Hz ### P6_red" Margin dB 17.1 16.8 21.2	Det. QP QP QP QP	Height cm 100.0 100.0 100.0	Azimuth deg 14.00 75.00 158.00	Polarization VERTICAL VERTICAL VERTICAL
MEASUREMENT 5/30/2019 9: Frequency MHz 51.340000 55.220000 105.660000 307.420000	FESULT: 28PM Level dBμV/m 22.90 23.20 22.30 24.70	: "GM19 Transd dB -4.9 -5.3 -6.7 -3.4	0530609 Limit dBμV/m 40.0 40.0 43.5 46.0	P6_red" Margin dB 17.1 16.8 21.2 21.3	Det. QP QP QP QP QP QP	Height cm 100.0 100.0 100.0 100.0	Azimuth deg 14.00 75.00 158.00 254.00	Polarization VERTICAL VERTICAL VERTICAL VERTICAL VERTICAL
0 30M 40M 5 X X X MES GM1905 MEASUREMENT 5/30/2019 9: Frequency MHz 51.340000 55.220000 105.660000	3306096_red 7 RESULT: 28PM Level dBμV/m 22.90 23.20 22.30	: "GM19 Transd dB -4.9 -5.3 -6.7	0530609 Limit dBμV/m 40.0 40.0 43.5	### Prequency [Hz ### P6_red" Margin dB 17.1 16.8 21.2	Det. QP QP QP QP	Height cm 100.0 100.0 100.0	Azimuth deg 14.00 75.00 158.00	Polarization VERTICAL VERTICAL VERTICAL

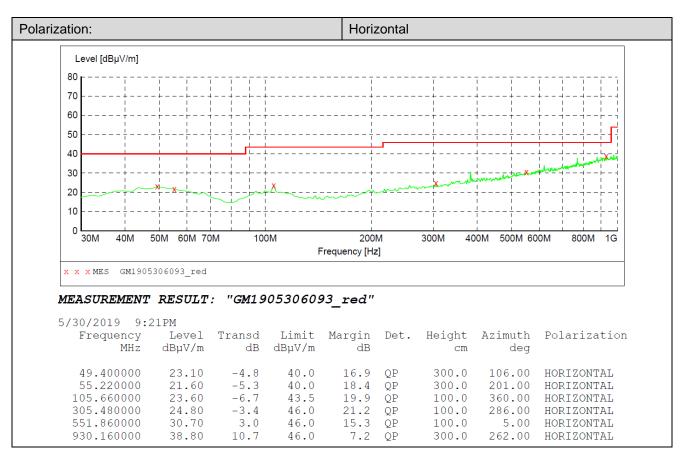

Report No.: CHTEW19060098 Page: 56 of 58 Issued: 2019-06-18

> 1 GHz ~ 25 GHz

CH00										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value	
1938.35	42.22	25.69	6.17	37.25	36.83	74.00	-37.17	Vertical	Peak	
3316.62	38.32	28.20	7.86	38.40	35.98	74.00	-38.02	Vertical	Peak	
4809.50	35.88	31.58	9.55	36.93	40.08	74.00	-33.92	Vertical	Peak	
7154.17	32.34	35.93	11.86	35.01	45.12	74.00	-28.88	Vertical	Peak	
1495.10	35.37	25.80	5.27	36.58	29.86	74.00	-44.14	Horizontal	Peak	
3805.33	35.08	29.61	8.51	38.23	34.97	74.00	-39.03	Horizontal	Peak	
4809.50	37.79	31.58	9.55	36.93	41.99	74.00	-32.01	Horizontal	Peak	
7547.01	32.96	36.15	12.55	34.94	46.72	74.00	-27.28	Horizontal	Peak	

	CH39										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value		
1573.19	36.51	25.14	5.49	36.69	30.45	74.00	-43.55	Vertical	Peak		
3883.62	34.53	29.68	8.62	38.18	34.65	74.00	-39.35	Vertical	Peak		
4883.52	45.81	31.43	9.59	36.73	50.10	74.00	-23.90	Vertical	Peak		
7319.96	35.56	36.30	11.99	34.92	48.93	74.00	-25.07	Vertical	Peak		
1525.86	35.15	25.56	5.36	36.62	29.45	74.00	-44.55	Horizontal	Peak		
3805.33	33.45	29.61	8.51	38.23	33.34	74.00	-40.66	Horizontal	Peak		
5560.50	31.66	31.84	10.24	36.05	37.69	74.00	-36.31	Horizontal	Peak		
7527.83	32.48	36.13	12.49	34.92	46.18	74.00	-27.82	Horizontal	Peak		

CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1195.05	36.91	26.26	4.65	36.57	31.25	74.00	-42.75	Vertical	Peak
3634.91	34.44	29.30	8.31	38.26	33.79	74.00	-40.21	Vertical	Peak
4958.68	42.78	31.46	9.64	36.52	47.36	74.00	-26.64	Vertical	Peak
8042.90	32.61	37.06	12.40	34.53	47.54	74.00	-26.46	Vertical	Peak
1502.73	35.63	25.77	5.29	36.59	30.10	74.00	-43.90	Horizontal	Peak
3824.76	34.51	29.62	8.53	38.22	34.44	74.00	-39.56	Horizontal	Peak
4958.68	43.18	31.46	9.64	36.52	47.76	74.00	-26.24	Horizontal	Peak
8770.01	32.81	37.76	13.07	34.32	49.32	74.00	-24.68	Horizontal	Peak

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Report No.: CHTEW19060098 Page: 57 of 58 Issued: 2019-06-18


6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)




Radiated Emissions



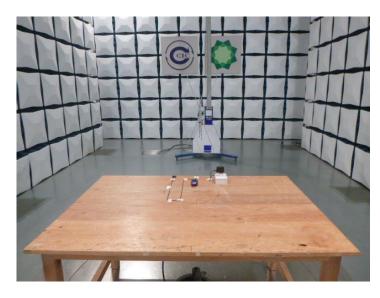

Report No.: CHTEW19060098 Page: 58 of 58 Issued: 2019-06-18

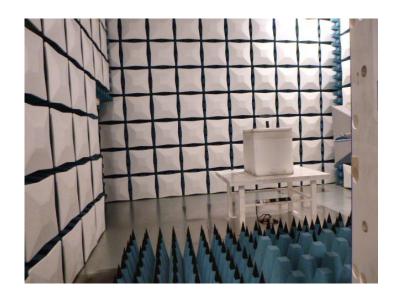

7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: CHTEW19060096

-----End of Report-----