

TEST REPORT

Reference No..... : WTN25X01014461W001
FCC ID : 2AZRV-FACEBUFFERPRO
Applicant : Manscaped Inc
Address : 10054 Old Grove Rd San Diego, CA 92131 USA
Manufacturer : Ningbo Unibono Appliance Co., Ltd.
Address : No.1 Chuangye Forth Road, Tax-protected Zone, Ningbo,Zhejiang, China
Product Name : The Face Buffer Pro
Model No..... : The Face Buffer Pro
Standards : **47 CFR FCC Part 18**
Date of Receipt sample : 2025-01-16
Date of Test..... : 2025-01-16 to 2025-02-27
Date of Issue : 2025-02-27
Test Report Form No. : WTX_FCC Part 18_001
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

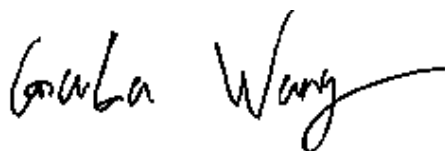

Gala Wang/ Project Engineer

Approved by:



Silin Chen/ Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	14
3. CONDUCTED EMISSIONS	15
3.1 STANDARD APPLICABLE.....	15
3.2 TEST PROCEDURE.....	15
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	15
3.4 ENVIRONMENTAL CONDITIONS	15
3.5 TEST RECEIVER SETUP	16
3.6 SUMMARY OF TEST RESULTS/PLOTS	16
4. RADIATED EMISSIONS.....	19
4.1 TEST PROCEDURE.....	19
4.2 TEST RECEIVER SETUP	20
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	20
4.4 ENVIRONMENTAL CONDITIONS	21
4.5 SUMMARY OF TEST RESULTS/PLOTS	21
APPENDIX PHOTOGRAPHS.....	24

Report version

Version No.	Date of issue	Description
Rev.00	2025-02-27	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	The Face Buffer Pro
Trade Name:	/
Model No.:	The Face Buffer Pro
Adding Model(s):	/
Rated Voltage:	Type C Input: 5V
Power Adapter Model:	Model:ZL-005Z0501000US01 Input:100-240V~50/60Hz 0.3A Max Output:5.0V-1000mA
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	112~205kHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Rated Current:	Input : 1A
Rated Power:	Wireless Receiver: 5W
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

47 CFR FCC Part 18: Industrial, Scientific, and medical medical equipment.

MP5-1986: FCC METHODS OF MESUREMENTS OF RADIO NOISE EMISSIONS FROM INDUSTRIAL, SCIENTIFIC, AND MEDICAL EQUIPMENT.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 and FCC MP-5:1986, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Receiver 5W	Battery DC3.7V

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Type-C Cable	0.9	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	IOTTE	CHCRIO160	/
Wireless charger	OPPO	OAWV03	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Radiated Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
WTXE1103A 1003	Attenuator	Pasternack	PE4007-4	/	2024-02-24	2025-02-23
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2024-07-03	2025-01-03
					2025-01-03	2025-07-02
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2024-03-15	2025-03-14
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14

WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2024-03-15	2025-03-14
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2024-07-03	2025-07-02
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2024-07-03	2025-07-02
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28

WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2024-07-03	2025-07-02
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2024-12-08	2025-12-07
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2024-07-03	2025-07-02
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2024-07-03	2025-07-02

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2025-02-23	2026-02-22
WTXE1103A 1003	Attenuator	Pasternack	PE4007-4	/	2025-02-23	2026-02-22
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2025-02-23	2026-02-22
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2025-02-23	2026-02-22
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2025-02-23	2026-02-22
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2025-02-23	2026-02-22
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2025-02-23	2026-02-22
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2025-02-23	2026-02-22
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2025-02-23	2026-02-22
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2025-02-23	2026-02-22
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2025-02-23	2026-02-22
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104A	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22

1033-3						
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2025-02-23	2026-02-22
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2025-02-23	2026-02-22
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2025-02-23	2026-02-22
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2025-02-23	2026-02-22
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2025-02-23	2026-02-22
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1104A	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22

1035-1						
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2024-12-08	2025-12-07
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2025-02-23	2026-02-22
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2025-02-23	2026-02-22
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2025-02-23	2026-02-22
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2025-02-23	2026-02-22
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2025-02-23	2026-02-22
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission A)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission B)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission C)	Farad	EZ-EMC	RA-03A1-2 (1.1.4.2)
EMI Test Software (Conducted Emission Room 1#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3
EMI Test Software (Conducted Emission Room 2#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§18.307 (b)	Conducted Emission	Compliant
§18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

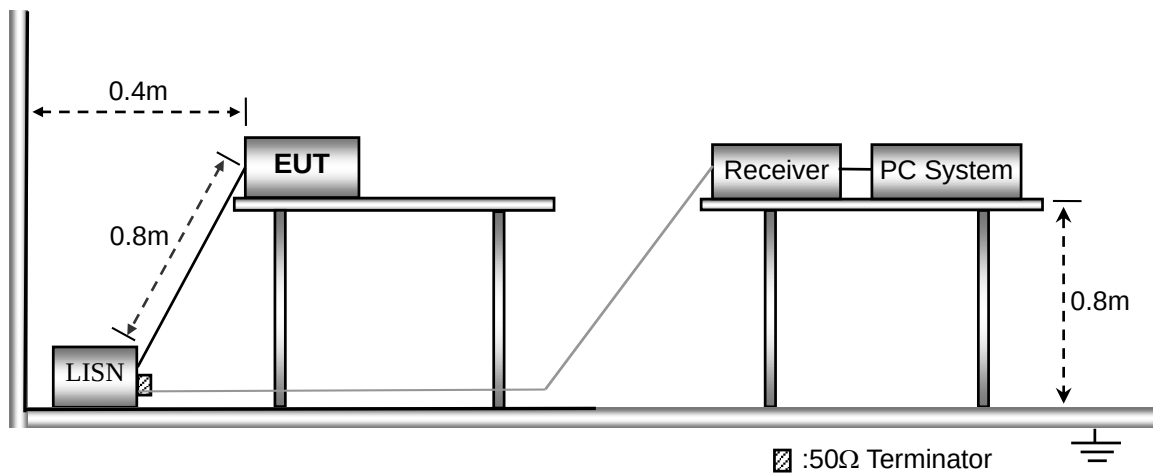

3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

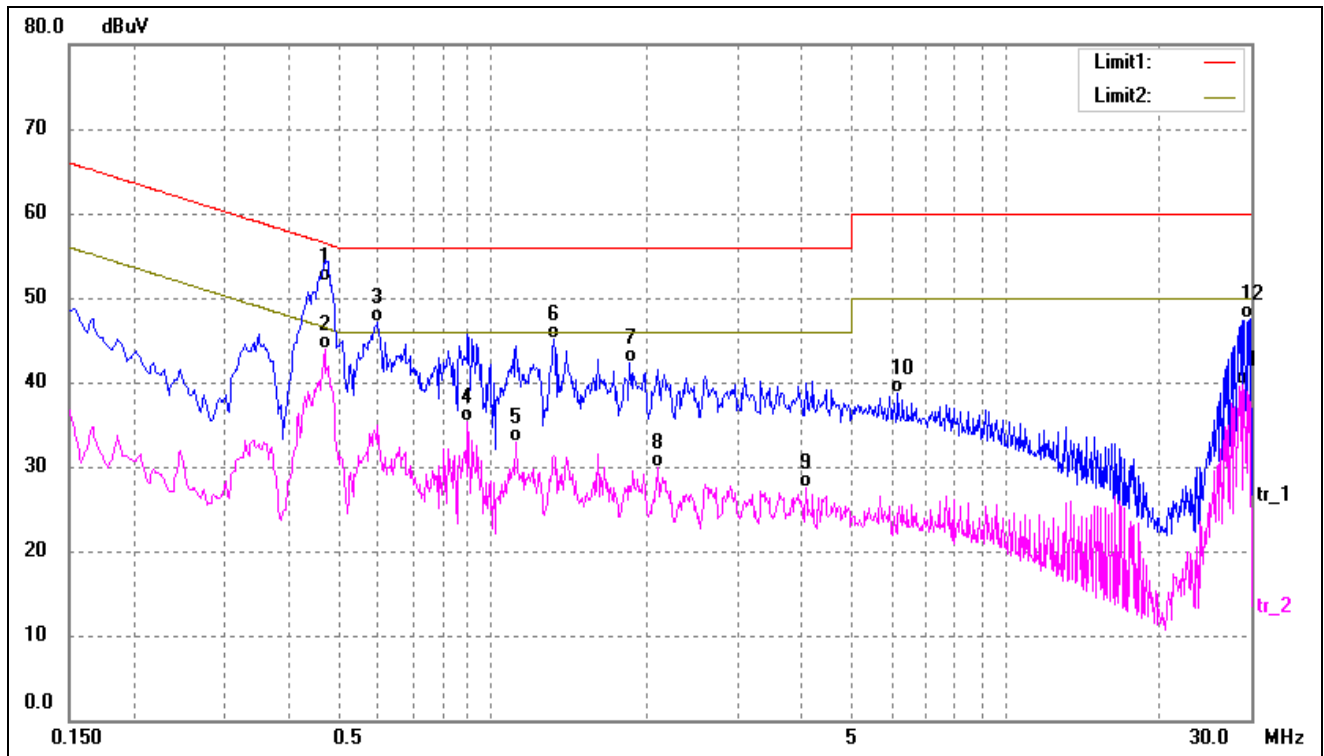

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4700	42.24	9.73	51.97	56.51	-4.54	QP
2*	0.4700	34.13	9.73	43.86	46.51	-2.65	AVG
3	0.5980	37.48	9.72	47.20	56.00	-8.80	QP
4	0.8980	25.56	9.67	35.23	46.00	-10.77	AVG
5	1.1140	23.26	9.66	32.92	46.00	-13.08	AVG
6	1.3180	35.48	9.65	45.13	56.00	-10.87	QP
7	1.8580	32.66	9.63	42.29	56.00	-13.71	QP
8	2.1020	20.23	9.62	29.85	46.00	-16.15	AVG
9	4.0820	17.87	9.67	27.54	46.00	-18.46	AVG
10	6.1860	28.88	9.76	38.64	60.00	-21.36	QP
11	28.9500	29.77	9.95	39.72	50.00	-10.28	AVG
12	29.9380	37.55	9.92	47.47	60.00	-12.53	QP

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

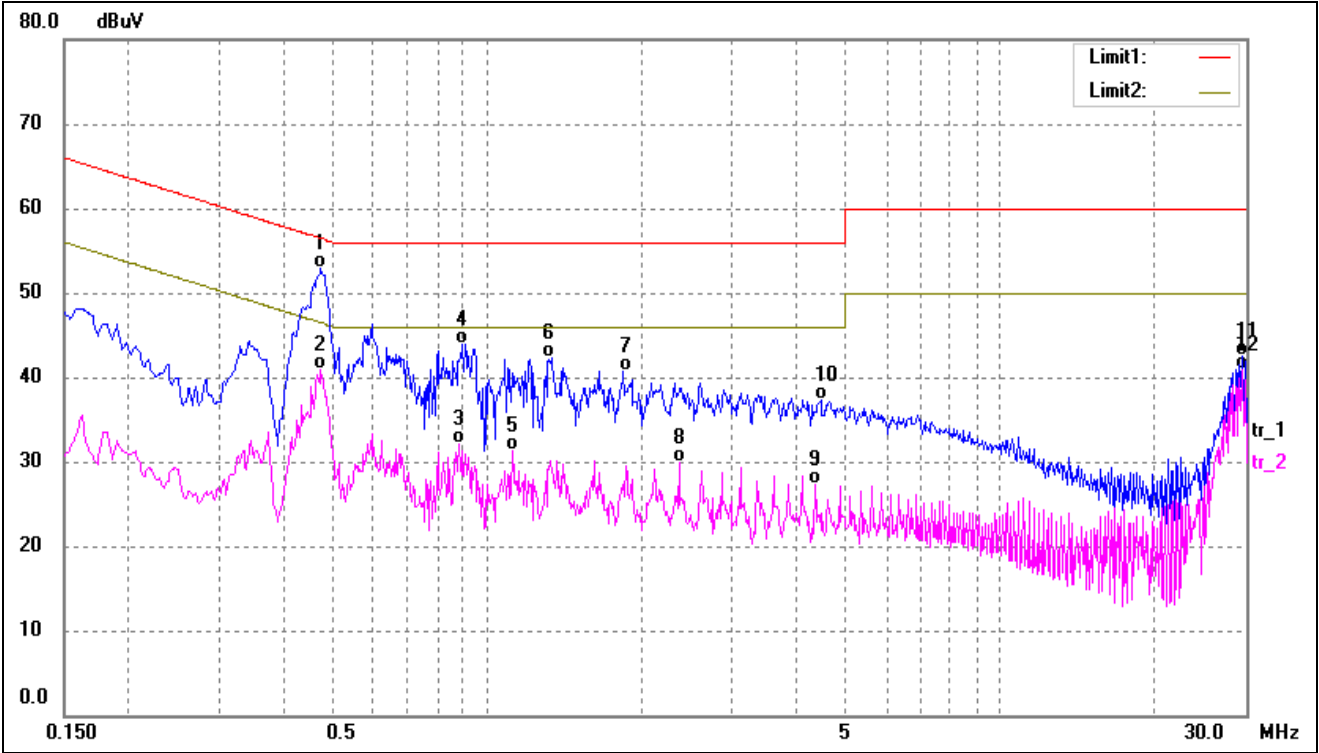

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.4740	43.25	9.73	52.98	56.44	-3.46	QP
2	0.4740	31.18	9.73	40.91	46.44	-5.53	AVG
3	0.8820	22.37	9.68	32.05	46.00	-13.95	AVG
4	0.8980	34.17	9.67	43.84	56.00	-12.16	QP
5	1.1220	21.69	9.66	31.35	46.00	-14.65	AVG
6	1.3340	32.63	9.65	42.28	56.00	-13.72	QP
7	1.8420	31.03	9.63	40.66	56.00	-15.34	QP
8	2.3660	20.24	9.62	29.86	46.00	-16.14	AVG
9	4.3580	17.63	9.68	27.31	46.00	-18.69	AVG
10	4.4580	27.53	9.68	37.21	56.00	-18.79	QP
11	29.3740	32.63	9.94	42.57	60.00	-17.43	QP
12	29.3740	30.91	9.94	40.85	50.00	-9.15	AVG


4. Radiated Emissions

4.1 Test Procedure


The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

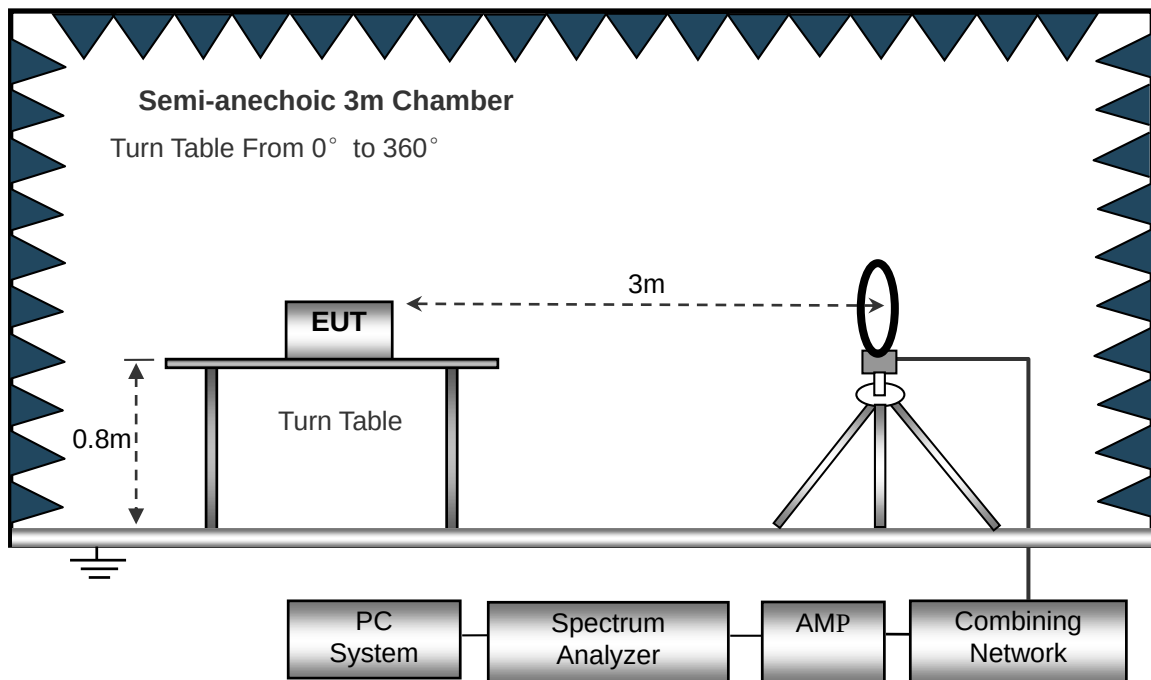

The test setup for emission measurement from 30 MHz to 1 GHz..

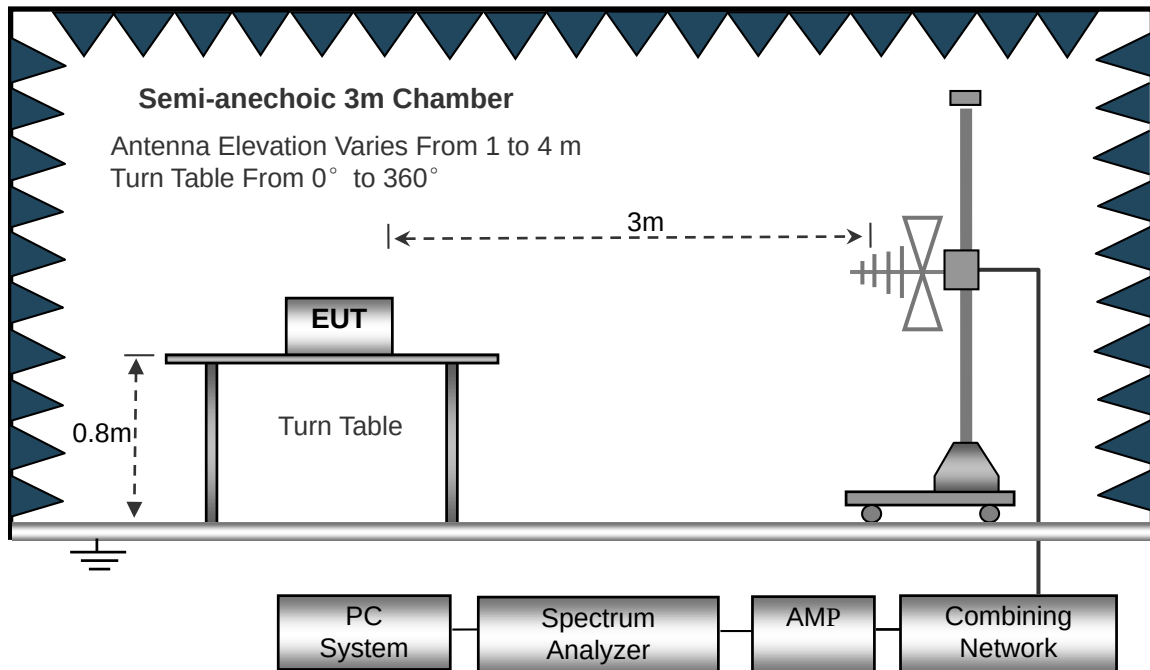

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10kHz

VBW =30kHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120kHz,

VBW=300kHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


4.4 Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

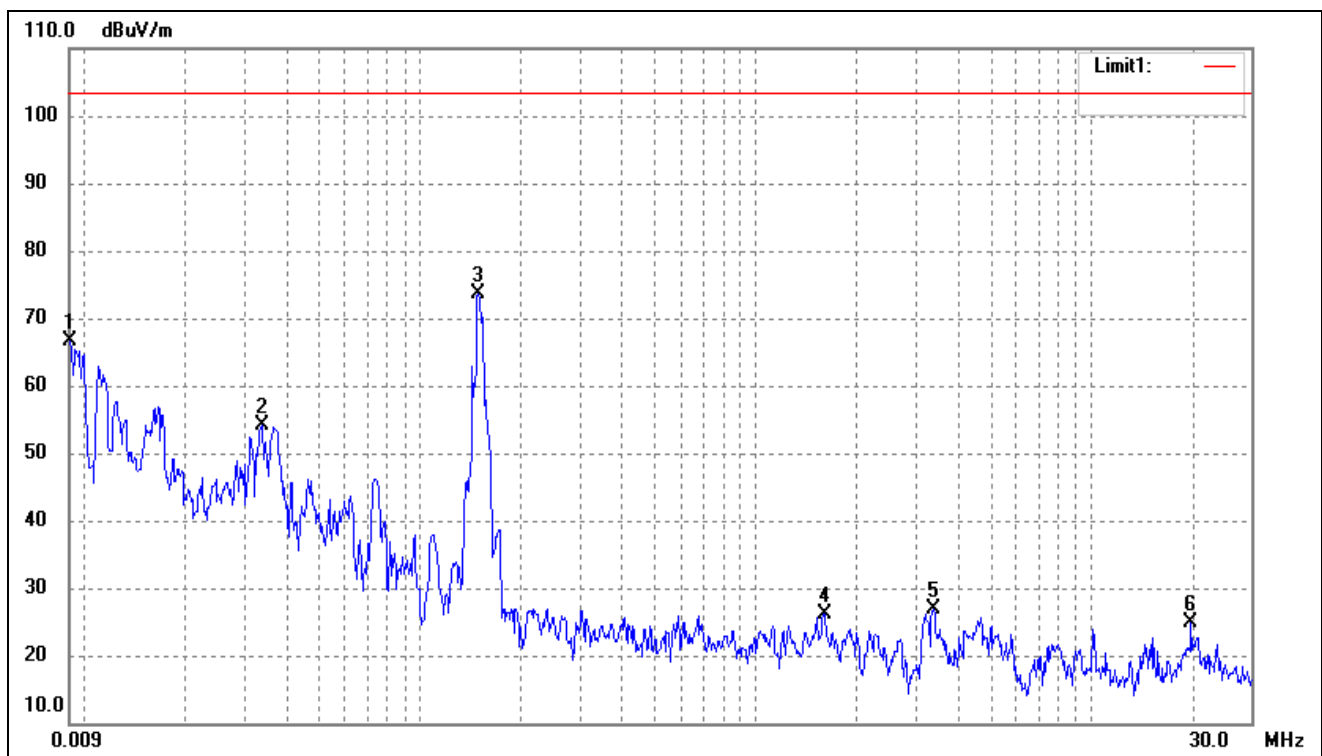


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0091	72.84	-6.22	66.62	103.50	-36.88	-	-	peak
2	0.0338	60.89	-6.88	54.01	103.50	-49.49	-	-	peak
3	0.1490	81.60	-8.00	73.60	103.50	-29.90	-	-	peak
4	1.6046	33.96	-7.89	26.07	103.50	-77.43	-	-	peak
5	3.3843	34.41	-7.65	26.76	103.50	-76.74	-	-	peak
6	19.8360	32.49	-7.73	24.76	103.50	-78.74	-	-	peak

Plot of Radiated Emissions Test Data (Above 30MHz)

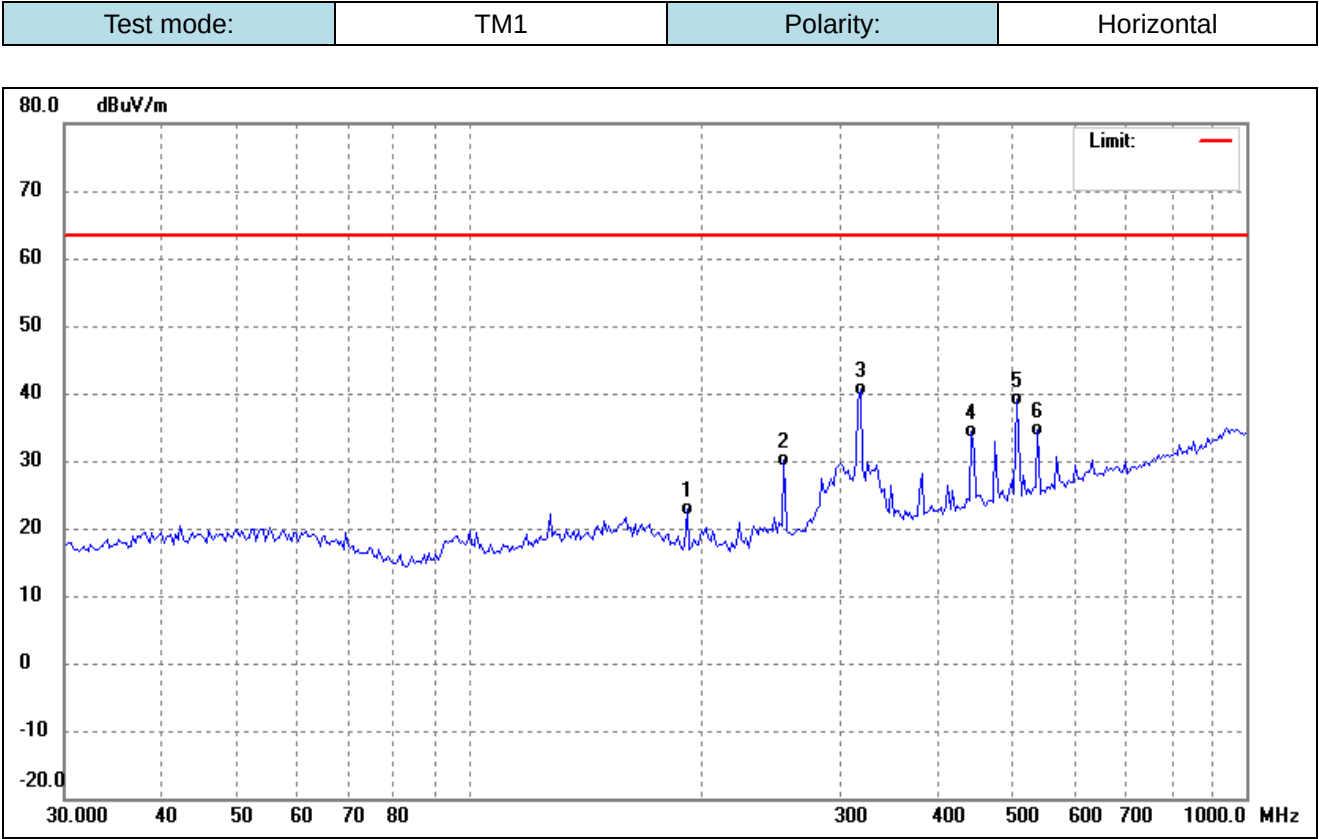

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	190.4411	33.70	-10.86	22.84	63.50	-40.66	-	-	QP
2	254.0312	39.79	-9.54	30.25	63.50	-33.25	-	-	QP
3	318.0875	48.08	-7.47	40.61	63.50	-22.89	-	-	QP
4	442.5722	39.67	-5.35	34.32	63.50	-29.18	-	-	QP
5	505.7891	43.86	-4.69	39.17	63.50	-24.33	-	-	QP
6	538.8106	38.47	-3.90	34.57	63.50	-28.93	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

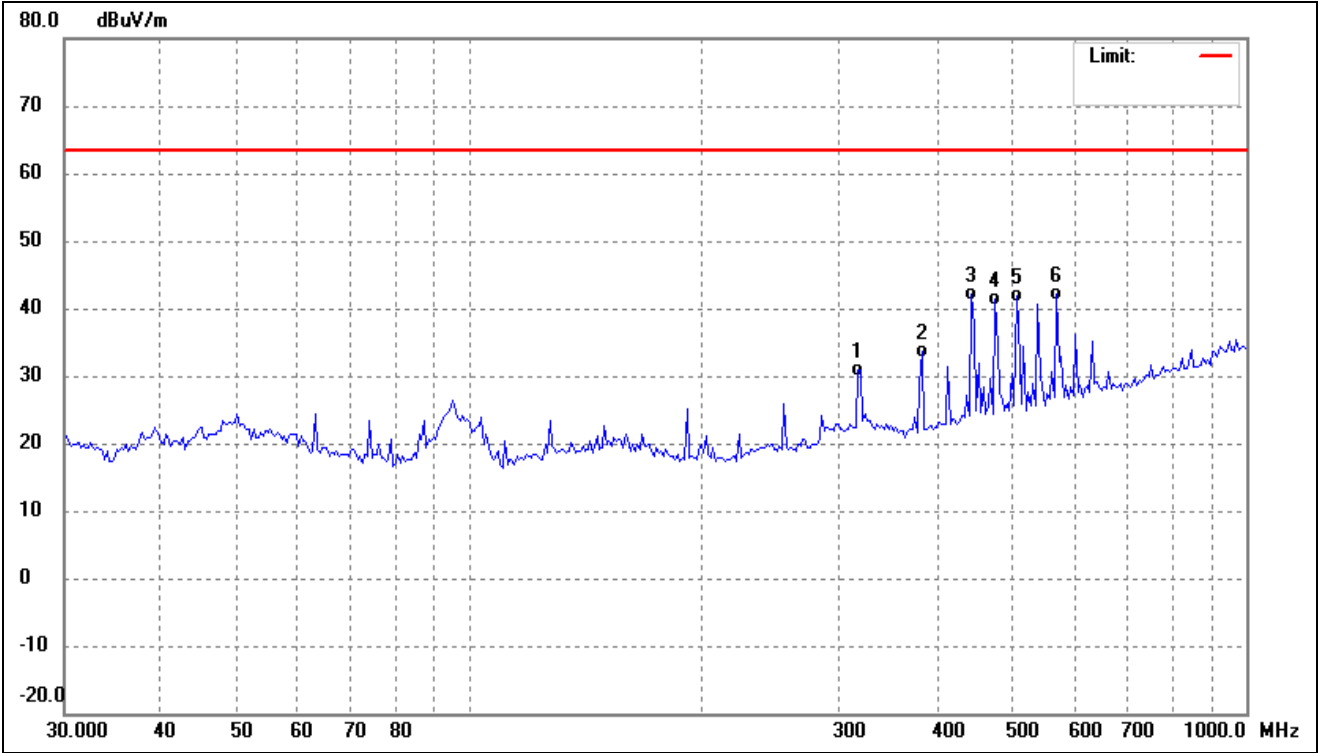

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	315.8601	38.40	-7.52	30.88	63.50	-32.62	-	-	QP
2	381.8520	40.04	-6.50	33.54	63.50	-29.96	-	-	QP
3	442.5722	47.44	-5.35	42.09	63.50	-21.41	-	-	QP
4	474.7913	46.34	-4.99	41.35	63.50	-22.15	-	-	QP
5	505.7891	46.61	-4.68	41.93	63.50	-21.57	-	-	QP
6	569.9688	45.16	-2.98	42.18	63.50	-21.32	-	-	QP

Remark: '-Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****