



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 1 of 64

**Applicant** : inMusic Brand, Inc.  
200 Scenic View Drive, Cumberland, RI 02864 U.S.A

**Supplier / Manufacturer** : inMusic Brand, Inc.  
200 Scenic View Drive, Cumberland, RI 02864 U.S.A

**Description of Sample(s)** : Submitted sample(s) said to be  
Product: Drum Module or Digital Drum Set  
Brand Name: **ALESIS**  
Model No.: LDMF  
FCC ID: Y4O-LDMF

**Date Samples Received** : 2024-03-15

**Date Tested** : 2024-03-15 to 2024-03-25

**Investigation Requested** : Perform Electro Magnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.10:2013 for FCC Certification.

**Conclusions** : The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remarks** : WIFI (802.11b/g/n20)  
For additional model(s) details, please see page 3

**Test by** Susu

  
*Brian Chan*  
Dr.CHAN Kwok Hung, Brian  
Authorized Signatory



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 2 of 64

### CONTENT:

Cover	Page 1 of 64
Content	Page 2 of 64
<b><u>1.0 General Details</u></b>	
1.1 Test Laboratory	Page 3 of 64
1.2 Equipment Under Test [EUT] Description of EUT operation	Page 3 of 64
1.3 Antenna Details	Page 3 of 64
1.4 Date of Order	Page 3 of 64
1.5 Submitted Sample(s)	Page 3 of 64
1.6 Test Duration	Page 3 of 64
1.7 Country of Origin	Page 3 of 64
<b><u>2.0 Technical Details</u></b>	
2.1 Investigations Requested	Page 4-5 of 64
2.2 Test Standards and Results Summary	Page 6 of 64
<b><u>3.0 Test Results</u></b>	
3.1 Emission	Page 7-58 of 64
<b><u>Appendix A</u></b>	
List of Measurement Equipment	Page 59 of 64
<b><u>Appendix B</u></b>	
Photographs	Page 60-64 of 64



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 3 of 64

### **1.0 General Details**

#### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate, New Territories, Hong Kong  
Telephone: 852 2666 1888  
Fax: 852 2664 4353

#### **1.2 Equipment Under Test [EUT]**

##### **Description of Sample(s)**

Product: Drum Module or Digital Drum Set  
Manufacturer: inMusic Brand, Inc.  
200 Scenic View Drive, Cumberland, RI 02864 U.S.A  
Brand Name: **ALESIS**  
Model Number: LDMF  
Additional Model Number: LDLR, CORE, Core, LDLS, LDLT, LDMF, STRATA CORE, Strata Core, LDLX, LDMX  
Rating: 12.0Vd.c. by adapter  
The AC/DC adapter was provided by the applicant with following details:  
Brand name: GQ; Model no.: GQ24-120200-AX  
Input: 100-240Va.c. 50-60Hz 1.0A Max, Output: 12.0Vd.c. 2.0A 24.0W

##### **1.2.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a Drum Module or Digital Drum Set. The transmission signal is digital modulated with channel frequency range 2412-2462MHz.

#### **1.3 Antenna Details**

Antenna Type: Internal antenna  
Antenna Gain: 2.0 dBi

#### **1.4 Date of Order**

2024-03-11

#### **1.5 Submitted Sample(s):**

1 Sample

#### **1.6 Test Duration**

2024-03-15 to 2024-03-25

#### **1.7 Country of Origin**

China

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 4 of 64


### 2.0 Technical Details

#### 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 Regulations and ANSI C63.10:2013 for FCC Certification.  
According FCC KDB 558074 DTS Measurement Guidance, Duty cycle  $\geq 98\%$ .  
The test mode sample is provided by manufacturer.

##### 2.1.0 Operating conditions for the EUT

The device was realized by test software, the power set is fixed value in software.

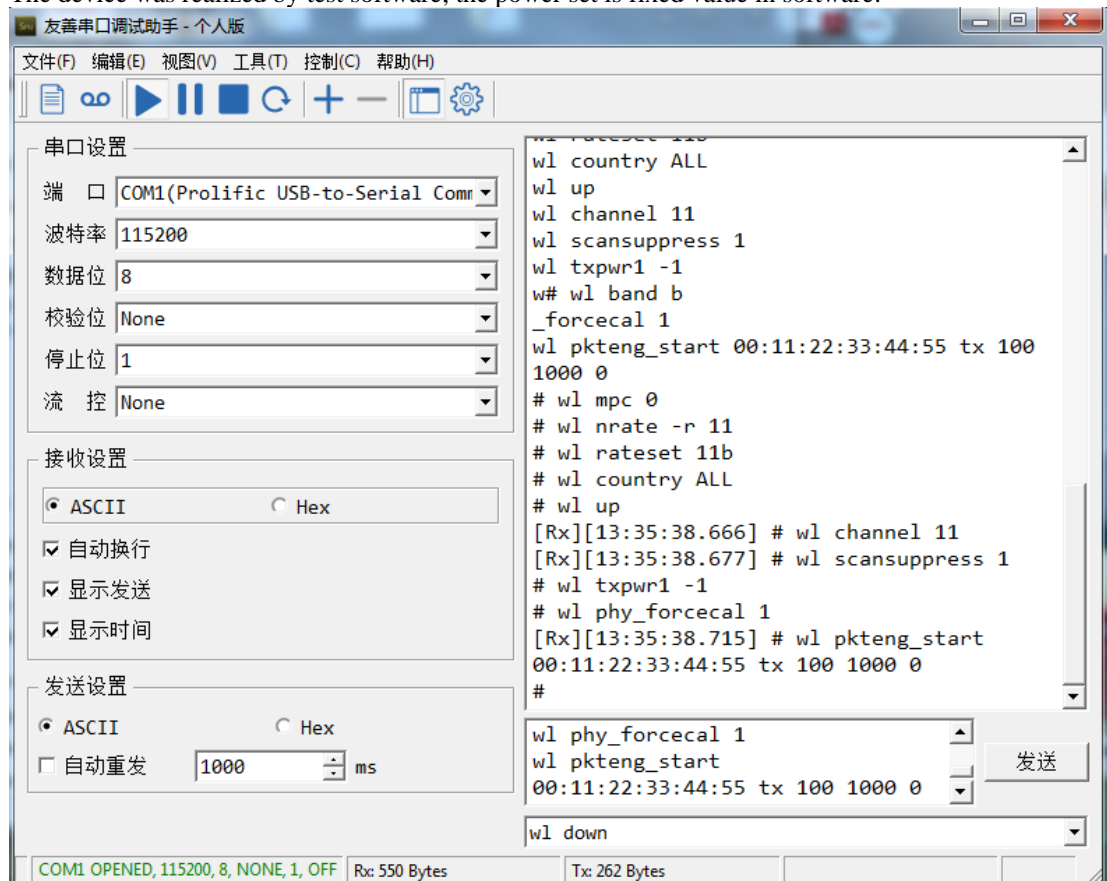

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010


Page 5 of 64

### 2.1.1 EUT Duty cycle

The EUT shall be configured or modified to transmit continuously. The intent is to test at 100% duty cycle; however, a small reduction in duty cycle (to no lower than 98%) is permitted if required by the EUT for amplitude control purposes.

The test mode sample is provided by manufacturer.

Test setup

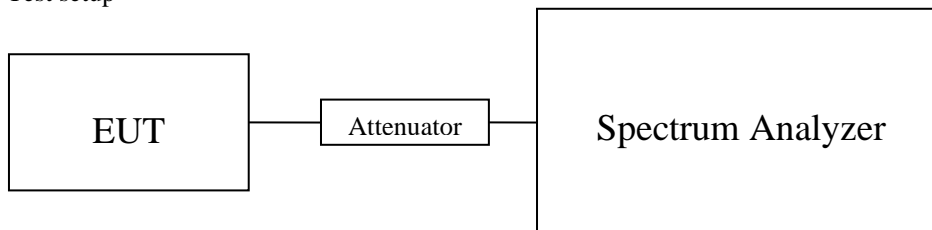


### Results

Mode	On Time (msec)	Period (msec)	Duty Cycle X (Linear)	Duty Cycle (%)*
802.11b	1	1	1	100
802.11g	1	1	1	100
802.11n20	1	1	1	100

-\*: If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Duty cycle: 802.11b

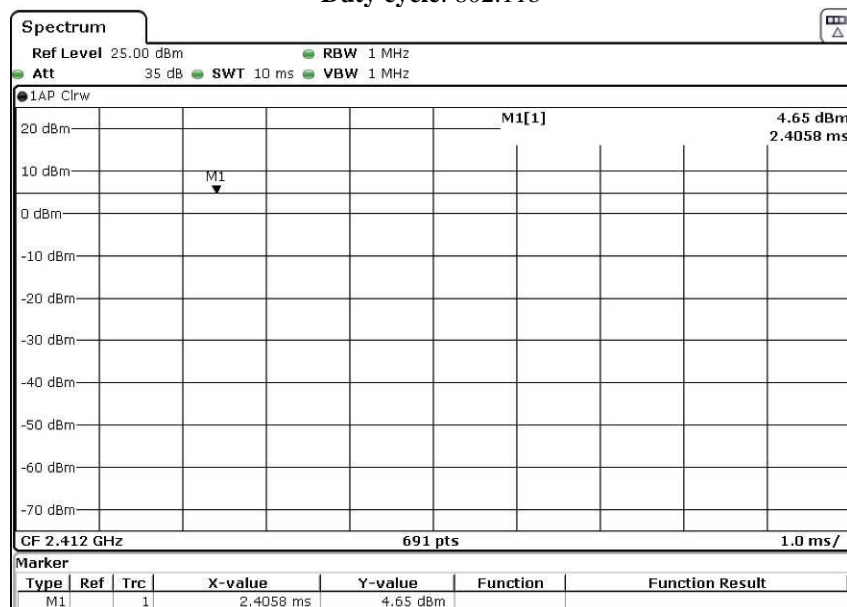

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 6 of 64

### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Output Power of Fundamental Emissions	FCC 47CFR 15.247(b)(3)	ANSI C63.10:2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10:2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10:2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Spectral Density	FCC 47CFR 15.247(e)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band Edge Emissions	FCC 47CFR 15.247(d)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taiipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 7 of 64

### **3.0 Test Results**

#### **3.1 Emission**

##### **3.1.1 Maximum Peak Output Power**

Test Requirement:	FCC 47CFR 15.247(b)(3)
Test Method:	ANSI C63.10: 2013
Test Date:	2024-03-19
Mode of Operation:	WIFI Tx mode

Ambient Temperature: 25°C


Relative Humidity: 51%

Atmospheric Pressure: 101 kPa

#### **Test Method:**

The RF output of the EUT was connected to the peak power meter. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

#### **Test Setup:**

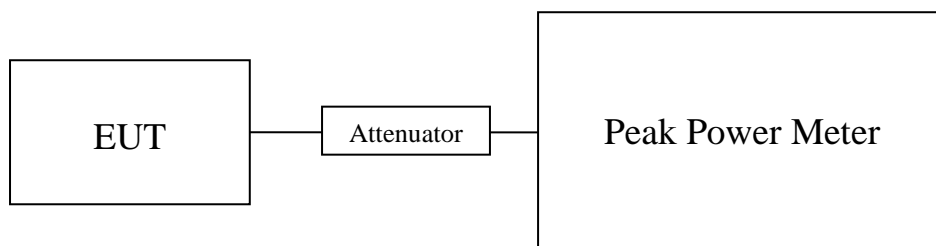

Note: a temporary antenna connector was soldered to the RF output.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: [hkstc@stc.group](mailto:hkstc@stc.group) Website: [www.stc.group](http://www.stc.group)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 8 of 64

### Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass					
Channel	Frequency(MHz)	Conducted power(dBm)	Antenna Gain(dBi)	E.I.R.P(dBm)	E.I.R.P (Watt)
Low	2412	15.8258	2.0	17.8258	0.060615
Middle	2437	16.2147	2.0	18.2147	0.066293
High	2462	16.8869	2.0	18.8869	0.077391

Results of Bluetooth Communication mode ( $\pi/4$ -DQPSK) (Fundamental Power): Pass					
Channel	Frequency(MHz)	Conducted power(dBm)	Antenna Gain(dBi)	E.I.R.P(dBm)	E.I.R.P (Watt)
Low	2412	16.5414	2.0	18.5414	0.071473
Middle	2437	17.1032	2.0	19.1032	0.081343
High	2462	17.7854	2.0	19.7854	0.095179

Results of Bluetooth Communication mode (8DPSK) (Fundamental Power): Pass					
Channel	Frequency(MHz)	Conducted power(dBm)	Antenna Gain(dBi)	E.I.R.P(dBm)	E.I.R.P (Watt)
Low	2412	16.1214	2.0	18.1214	0.064884
Middle	2437	16.6335	2.0	18.6335	0.073005
High	2462	17.1258	2.0	19.1258	0.081767

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB  
1GHz to 26GHz 1.7dB

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.





## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 9 of 64

### 3.1.2 Radiated Emissions

Test Requirement:	FCC 47CFR 15.209
Test Method:	ANSI C63.10:2013
Test Date:	2024-03-18
Mode of Operation:	WIFI Tx mode

Ambient Temperature: 24°C	Relative Humidity: 52%	Atmospheric Pressure: 101 kPa
---------------------------	------------------------	-------------------------------

#### Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with  
Registration Number: HK0001  
Test Firm Registration Number: 367672

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 10 of 64

### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av)

RBW: 10kHz  
VBW: 30kHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

30MHz – 1GHz (QP)

RBW: 120kHz  
VBW: 120kHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold


Above 1GHz (Pk)

RBW: 1MHz  
VBW: 1MHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

Above 1GHz (Av)

RBW: 1MHz  
VBW: 10Hz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

### **Test Setup:**

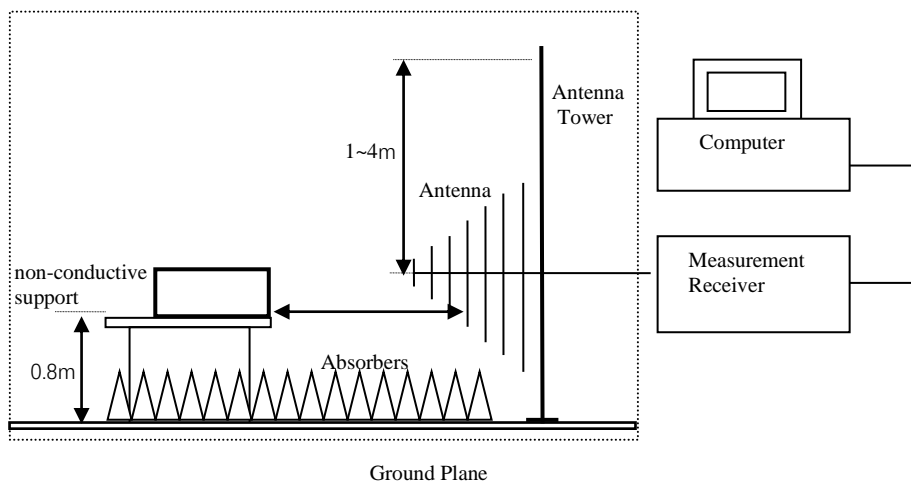

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: [hkstc@stc.group](mailto:hkstc@stc.group) Website: [www.stc.group](http://www.stc.group)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 11 of 64

### Limits for Radiated Emissions FCC 47 CFR 15.247 ]:

Frequency Range	Quasi-Peak Limits
[MHz]	[ $\mu$ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Tx mode (2412.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
Emissions detected are more than 20 dB below the FCC Limits						

### Result of Tx mode (2412.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB	
4824.0	57.4	0.82	58.2	74.0	15.8	Vertical
4824.0	57.8	0.52	58.3	74.0	15.7	Horizontal
7236.0	51.1	7.00	58.1	74.0	15.9	Vertical
7236.0	50.6	6.50	57.1	74.0	16.9	Horizontal
9648.0	47.2	8.50	55.7	74.0	18.3	Vertical
9648.0	47.1	8.30	55.4	74.0	18.6	Horizontal
12060.0	45.5	10.90	56.4	74.0	17.6	Vertical
12060.0	45.3	10.80	56.1	74.0	17.9	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13

Page 12 of 64

No. : HMD24030010

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4824.0	41.4	0.82	42.2	54.0	11.8	Vertical
4824.0	41.7	0.52	42.2	54.0	11.8	Horizontal
7236.0	35.6	7.00	42.6	54.0	11.4	Vertical
7236.0	35.5	6.50	42.0	54.0	12.0	Horizontal
9648.0	32.1	8.50	40.6	54.0	13.4	Vertical
9648.0	31.7	8.30	40.0	54.0	14.0	Horizontal
12060.0	30.3	10.90	41.2	54.0	12.8	Vertical
12060.0	29.7	10.80	40.5	54.0	13.5	Horizontal

Result of Tx mode (2437.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2437.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4874.0	57.2	0.82	58.0	74.0	16.0	Vertical
4874.0	57.1	0.52	57.6	74.0	16.4	Horizontal
7311.0	51.2	7.00	58.2	74.0	15.8	Vertical
7311.0	50.7	6.50	57.2	74.0	16.8	Horizontal
9748.0	48.1	8.50	56.6	74.0	17.4	Vertical
9748.0	47.5	8.30	55.8	74.0	18.2	Horizontal
12185.0	45.2	10.90	56.1	74.0	17.9	Vertical
12185.0	45.3	10.80	56.1	74.0	17.9	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13

Page 13 of 64

No. : HMD24030010

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4874.0	41.6	0.82	42.4	54.0	11.6	Vertical
4874.0	41.4	0.52	41.9	54.0	12.1	Horizontal
7311.0	35.3	7.00	42.3	54.0	11.7	Vertical
7311.0	34.6	6.50	41.1	54.0	12.9	Horizontal
9748.0	33.1	8.50	41.6	54.0	12.4	Vertical
9748.0	32.7	8.30	41.0	54.0	13.0	Horizontal
12185.0	30.4	10.90	41.3	54.0	12.7	Vertical
12185.0	30.2	10.80	41.0	54.0	13.0	Horizontal

Result of Tx mode (2462.0 MHz) (802.11b) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBμV	Correction Factor dB/m	Field Strength dBμV/m	Field Strength μV/m	Limit μV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2462.0 MHz) (802.11b) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
4924.0	57.7	0.82	58.5	74.0	15.5	Vertical
4924.0	57.8	0.52	58.3	74.0	15.7	Horizontal
7386.0	50.7	7.00	57.7	74.0	16.3	Vertical
7386.0	50.5	6.50	57.0	74.0	17.0	Horizontal
9848.0	47.9	8.50	56.4	74.0	17.6	Vertical
9848.0	47.9	8.30	56.2	74.0	17.8	Horizontal
12310.0	45.6	10.90	56.5	74.0	17.5	Vertical
12310.0	45.5	10.80	56.3	74.0	17.7	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 14 of 64

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4924.0	41.4	0.82	42.2	54.0	11.8	Vertical
4924.0	41.1	0.52	41.6	54.0	12.4	Horizontal
7386.0	35.3	7.00	42.3	54.0	11.7	Vertical
7386.0	34.7	6.50	41.2	54.0	12.8	Horizontal
9848.0	32.0	8.50	40.5	54.0	13.5	Vertical
9848.0	33.0	8.30	41.3	54.0	12.7	Horizontal
12310.0	29.2	10.90	40.1	54.0	13.9	Vertical
12310.0	30.2	10.80	41.0	54.0	13.0	Horizontal

Result of Tx mode (2412.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2412.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4824.0	56.7	0.82	57.5	74.0	16.5	Vertical
4824.0	56.8	0.52	57.3	74.0	16.7	Horizontal
7236.0	50.1	7.00	57.1	74.0	16.9	Vertical
7236.0	50.2	6.50	56.7	74.0	17.3	Horizontal
9648.0	47.3	8.50	55.8	74.0	18.2	Vertical
9648.0	47.1	8.30	55.4	74.0	18.6	Horizontal
12060.0	45.2	10.90	56.1	74.0	17.9	Vertical
12060.0	45.1	10.80	55.9	74.0	18.1	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 15 of 64

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4824.0	42.0	0.82	42.8	54.0	11.2	Vertical
4824.0	41.4	0.52	41.9	54.0	12.1	Horizontal
7236.0	34.9	7.00	41.9	54.0	12.1	Vertical
7236.0	35.4	6.50	41.9	54.0	12.1	Horizontal
9648.0	32.2	8.50	40.7	54.0	13.3	Vertical
9648.0	33.3	8.30	41.6	54.0	12.4	Horizontal
12060.0	30.5	10.90	41.4	54.0	12.6	Vertical
12060.0	30.0	10.80	40.8	54.0	13.2	Horizontal

Result of Tx mode (2437.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2437.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4874.0	56.9	0.82	57.7	74.0	16.3	Vertical
4874.0	57.5	0.52	58.0	74.0	16.0	Horizontal
7311.0	49.7	7.00	56.7	74.0	17.3	Vertical
7311.0	50.6	6.50	57.1	74.0	16.9	Horizontal
9748.0	47.8	8.50	56.3	74.0	17.7	Vertical
9748.0	47.7	8.30	56.0	74.0	18.0	Horizontal
12185.0	45.3	10.90	56.2	74.0	17.8	Vertical
12185.0	45.5	10.80	56.3	74.0	17.7	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 16 of 64

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4874.0	41.6	0.82	42.4	54.0	11.6	Vertical
4874.0	41.4	0.52	41.9	54.0	12.1	Horizontal
7311.0	34.6	7.00	41.6	54.0	12.4	Vertical
7311.0	35.2	6.50	41.7	54.0	12.3	Horizontal
9748.0	31.8	8.50	40.3	54.0	13.7	Vertical
9748.0	32.1	8.30	40.4	54.0	13.6	Horizontal
12185.0	30.7	10.90	41.6	54.0	12.4	Vertical
12185.0	30.5	10.80	41.3	54.0	12.7	Horizontal

Result of Tx mode (2462.0 MHz) (802.11g) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2462.0 MHz) (802.11g) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4924.0	57.2	0.82	58.0	74.0	16.0	Vertical
4924.0	57.3	0.52	57.8	74.0	16.2	Horizontal
7386.0	50.4	7.00	57.4	74.0	16.6	Vertical
7386.0	50.7	6.50	57.2	74.0	16.8	Horizontal
9848.0	47.6	8.50	56.1	74.0	17.9	Vertical
9848.0	47.9	8.30	56.2	74.0	17.8	Horizontal
12310.0	45.2	10.90	56.1	74.0	17.9	Vertical
12310.0	45.2	10.80	56.0	74.0	18.0	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.





## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 17 of 64

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4924.0	41.2	0.82	42.0	54.0	12.0	Vertical
4924.0	41.5	0.52	42.0	54.0	12.0	Horizontal
7386.0	35.4	7.00	42.4	54.0	11.6	Vertical
7386.0	35.3	6.50	41.8	54.0	12.2	Horizontal
9848.0	32.7	8.50	41.2	54.0	12.8	Vertical
9848.0	32.3	8.30	40.6	54.0	13.4	Horizontal
12310.0	30.8	10.90	41.7	54.0	12.3	Vertical
12310.0	31.2	10.80	42.0	54.0	12.0	Horizontal

Result of Tx mode (2412.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2412.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4824.0	56.8	0.82	57.6	74.0	16.4	Vertical
4824.0	57.4	0.52	57.9	74.0	16.1	Horizontal
7236.0	50.3	7.00	57.3	74.0	16.7	Vertical
7236.0	50.7	6.50	57.2	74.0	16.8	Horizontal
9648.0	47.4	8.50	55.9	74.0	18.1	Vertical
9648.0	47.2	8.30	55.5	74.0	18.5	Horizontal
12060.0	45.2	10.90	56.1	74.0	17.9	Vertical
12060.0	45.4	10.80	56.2	74.0	17.8	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 18 of 64

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
4824.0	41.4	0.82	42.2	54.0	11.8	Vertical
4824.0	41.5	0.52	42.0	54.0	12.0	Horizontal
7236.0	35.3	7.00	42.3	54.0	11.7	Vertical
7236.0	35.4	6.50	41.9	54.0	12.1	Horizontal
9648.0	32.5	8.50	41.0	54.0	13.0	Vertical
9648.0	33.7	8.30	42.0	54.0	12.0	Horizontal
12060.0	31.0	10.90	41.9	54.0	12.1	Vertical
12060.0	30.8	10.80	41.6	54.0	12.4	Horizontal

Result of Tx mode (2437.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dBμV	Correction Factor dB/m	Field Strength dBμV/m	Field Strength μV/m	Limit μV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2437.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
4874.0	57.4	0.82	58.2	74.0	15.8	Vertical
4874.0	57.3	0.52	57.8	74.0	16.2	Horizontal
7311.0	49.8	7.00	56.8	74.0	17.2	Vertical
7311.0	50.4	6.50	56.9	74.0	17.1	Horizontal
9748.0	47.2	8.50	55.7	74.0	18.3	Vertical
9748.0	47.6	8.30	55.9	74.0	18.1	Horizontal
12185.0	45.1	10.90	56.0	74.0	18.0	Vertical
12185.0	45.3	10.80	56.1	74.0	17.9	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 19 of 64

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4874.0	41.4	0.82	42.2	54.0	11.8	Vertical
4874.0	41.3	0.52	41.8	54.0	12.2	Horizontal
7311.0	34.9	7.00	41.9	54.0	12.1	Vertical
7311.0	35.5	6.50	42.0	54.0	12.0	Horizontal
9748.0	33.1	8.50	41.6	54.0	12.4	Vertical
9748.0	32.9	8.30	41.2	54.0	12.8	Horizontal
12185.0	30.4	10.90	41.3	54.0	12.7	Vertical
12185.0	30.8	10.80	41.6	54.0	12.4	Horizontal

Result of Tx mode (2462.0 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2462.0 MHz) (802.11n20) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4924.0	57.0	0.82	57.8	74.0	16.2	Vertical
4924.0	56.8	0.52	57.3	74.0	16.7	Horizontal
7386.0	49.8	7.00	56.8	74.0	17.2	Vertical
7386.0	50.5	6.50	57.0	74.0	17.0	Horizontal
9848.0	47.8	8.50	56.3	74.0	17.7	Vertical
9848.0	47.2	8.30	55.5	74.0	18.5	Horizontal
12310.0	45.3	10.90	56.2	74.0	17.8	Vertical
12310.0	45.1	10.80	55.9	74.0	18.1	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 20 of 64

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB	E-Field Polarity
4924.0	41.4	0.82	42.2	54.0	11.8	Vertical
4924.0	41.6	0.52	42.1	54.0	11.9	Horizontal
7386.0	34.5	7.00	41.5	54.0	12.5	Vertical
7386.0	34.7	6.50	41.2	54.0	12.8	Horizontal
9848.0	31.4	8.50	39.9	54.0	14.1	Vertical
9848.0	31.8	8.30	40.1	54.0	13.9	Horizontal
12310.0	31.0	10.90	41.9	54.0	12.1	Vertical
12310.0	30.7	10.80	41.5	54.0	12.5	Horizontal

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement (9kHz-30MHz): 2.0dB  
uncertainty (30MHz -1GHz): 4.9dB  
(1GHz -26GHz): 4.02dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 21 of 64

### Radiated Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

#### Result: RF Radiated Emissions (Lowest)-802.11b

Field Strength of Band-edge Compliance						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2390.0	62.7	-4.8	57.9	74.0	16.1	Vertical
2390.0	63.1	-4.7	58.4	74.0	15.6	Horizontal

Field Strength of Band-edge Compliance						
Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2390.0	51.3	-4.8	46.5	54.0	7.5	Vertical
2390.0	51.8	-4.7	47.1	54.0	6.9	Horizontal

#### Result: RF Radiated Emissions (Highest) -802.11b

Field Strength of Band-edge Compliance						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2483.5	65.4	-4.8	60.6	74.0	13.4	Vertical
2483.5	64.7	-4.7	60.0	74.0	14.0	Horizontal

Field Strength of Band-edge Compliance						
Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2483.5	52.9	-4.8	48.1	54.0	5.9	Vertical
2483.5	52.6	-4.7	47.9	54.0	6.1	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 22 of 64

**Result: RF Radiated Emissions (Lowest)-802.11g**

Field Strength of Band-edge Compliance						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2390.0	68.8	-4.8	64.0	74.0	10.0	Vertical
2390.0	68.7	-4.7	64.0	74.0	10.0	Horizontal

Field Strength of Band-edge Compliance						
Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2390.0	49.1	-4.8	44.3	54.0	9.7	Vertical
2390.0	48.7	-4.7	44.0	54.0	10.0	Horizontal

**Result: RF Radiated Emissions (Highest) -802.11g**

Field Strength of Band-edge Compliance						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2483.5	71.2	-4.8	66.4	74.0	7.6	Vertical
2483.5	71.1	-4.7	66.4	74.0	7.6	Horizontal

Field Strength of Band-edge Compliance						
Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2483.5	52.5	-4.8	47.7	54.0	6.3	Vertical
2483.5	50.9	-4.7	46.2	54.0	7.8	Horizontal



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 23 of 64

### Result: RF Radiated Emissions (Lowest)-802.11n20

Field Strength of Band-edge Compliance						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2390.0	66.1	-4.8	61.3	74.0	12.7	Horizontal
2390.0	65.0	-4.7	60.3	74.0	13.7	Horizontal

Field Strength of Band-edge Compliance						
Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2390.0	48.8	-4.8	44.0	54.0	10.0	Vertical
2390.0	47.9	-4.7	43.2	54.0	10.8	Horizontal

### Result: RF Radiated Emissions (Highest) -802.11n20

Field Strength of Band-edge Compliance						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2483.5	70.9	-4.8	66.1	74.0	7.9	Vertical
2483.5	69.9	-4.7	65.2	74.0	8.8	Horizontal

Field Strength of Band-edge Compliance						
Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
2483.5	53.8	-4.8	49.0	54.0	5.0	Horizontal
2483.5	53.5	-4.7	48.8	54.0	5.2	Horizontal



## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 24 of 64

### Results of WIFI TX mode (30MHz – 1GHz): Pass: Pass

Please refer to the following table for result details (The data is the worst cases)

Horizontal

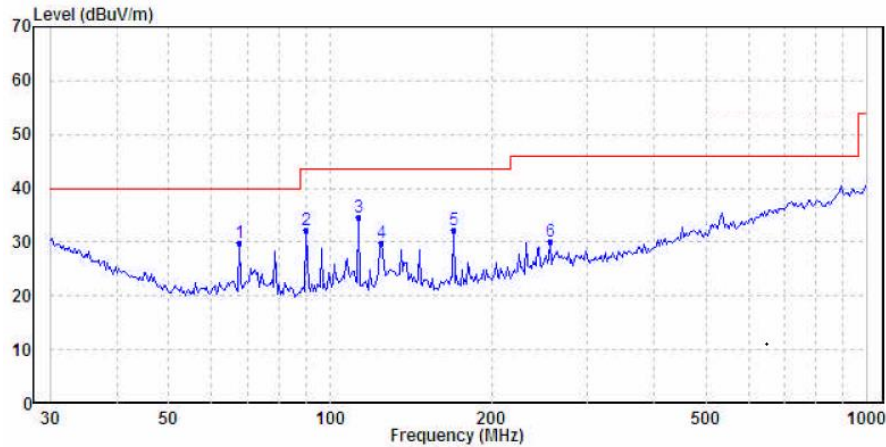

Ambient Temperature: 24.5C  
Relative Humidity : 51.8%  
Air Pressure : 100.9kPa

	Freq	Level	Limit	Over		
	MHz	dBuV/m	dBuV/m	Limit	Remark	Pol/Phase
				dB		
1	67.675	29.74	40.00	-10.26	QP	Horizontal
2	90.220	32.19	43.50	-11.31	QP	Horizontal
3	112.920	34.60	43.50	-8.90	QP	Horizontal
4	124.569	29.77	43.50	-13.73	QP	Horizontal
5	169.599	32.21	43.50	-11.29	QP	Horizontal
6	256.521	30.06	46.00	-15.94	QP	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 25 of 64

### Results of WIFI TX mode (30MHz – 1GHz): Pass: Pass

Please refer to the following table for result details (The data is the worst cases)

Vertical

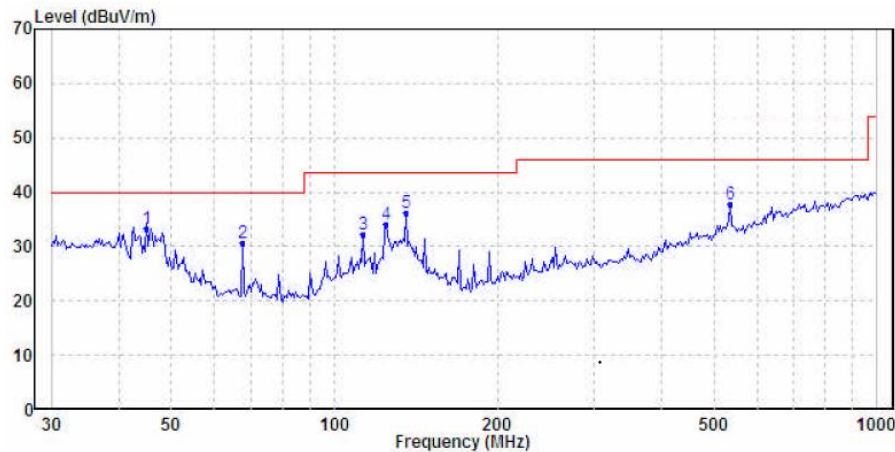

Ambient Temperature: 24.5C  
Relative Humidity : 51.8%  
Air Pressure : 100.9kPa

	Freq	Level	Limit	Over		
	MHz	dBuV/m	Line	Limit	Remark	Pol/Phase
				dB		
1	45.058	33.38	40.00	-6.62	QP	Vertical
2	67.675	30.69	40.00	-9.31	QP	Vertical
3	112.920	32.16	43.50	-11.34	QP	Vertical
4	124.569	34.05	43.50	-9.45	QP	Vertical
5	135.506	36.22	43.50	-7.28	QP	Vertical
6	535.707	37.78	46.00	-8.22	QP	Vertical

Remarks: Calculated measurement uncertainty (30MHz – 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 26 of 64

### 3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207  
Test Method: ANSI C63.10:2013  
Test Date: 2024-03-22  
Mode of Operation: WIFI TX  
Test Voltage: 120V a.c. 60Hz

Ambient Temperature: 25°C      Relative Humidity: 51%      Atmospheric Pressure: 101 kPa


#### Test Method:

The test was performed in accordance with ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### Receiver Setting:

Bandw. = 9 kHz, Meas. Time= 10.0 ms, Step Width = 5.0kHz  
Detector = MaxPeak and CISPR AV

#### Test Setup:

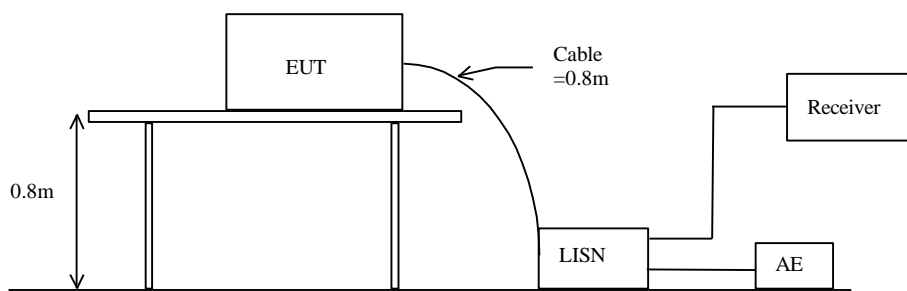

#### Limits for Conducted Emissions (FCC 47 CFR 15.207):

Frequency Range [MHz]	Quasi-Peak Limits [dBμV]	Average [dBμV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

#### Remarks:

Calculated measurement uncertainty (0.15MHz – 30MHz): 3.25dB

-\*- Emission(s) that is far below the corresponding limit line.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 27 of 64

### Results of WIFI TX mode (L): PASS

Please refer to the following diagram for individual results.

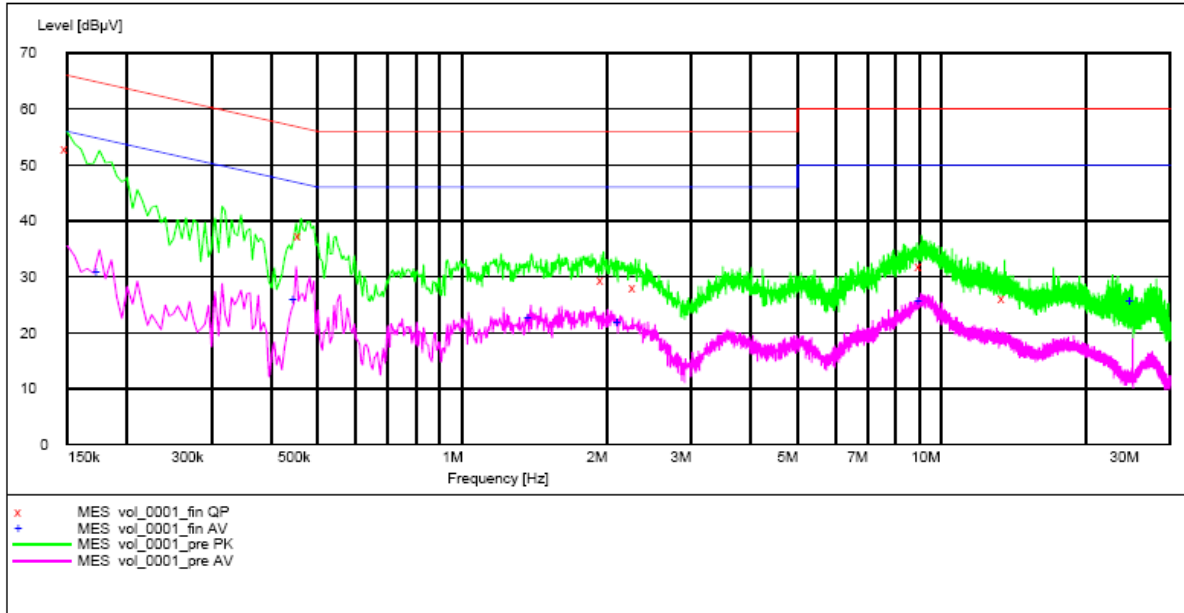

#### MEASUREMENT RESULT: "vol\_0001\_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.150000	52.80	9.7	66	13.2	L1	GND
0.460000	37.50	9.7	57	19.2	L1	GND
1.975000	29.50	9.8	56	26.5	L1	GND
2.300000	28.20	9.8	56	27.8	L1	GND
9.110000	31.90	10.0	60	28.1	L1	GND
13.560000	26.30	10.2	60	33.7	L1	GND

#### MEASUREMENT RESULT: "vol\_0001\_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.175000	30.90	9.7	55	23.8	L1	GND
0.450000	26.00	9.7	47	20.9	L1	GND
1.390000	22.60	9.8	46	23.4	L1	GND
2.135000	21.80	9.8	46	24.2	L1	GND
9.065000	25.70	10.0	50	24.3	L1	GND
25.060000	25.60	10.7	50	24.4	L1	GND

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 28 of 64

### Results of WIFI TX mode (N): PASS

Please refer to the following diagram for individual results.

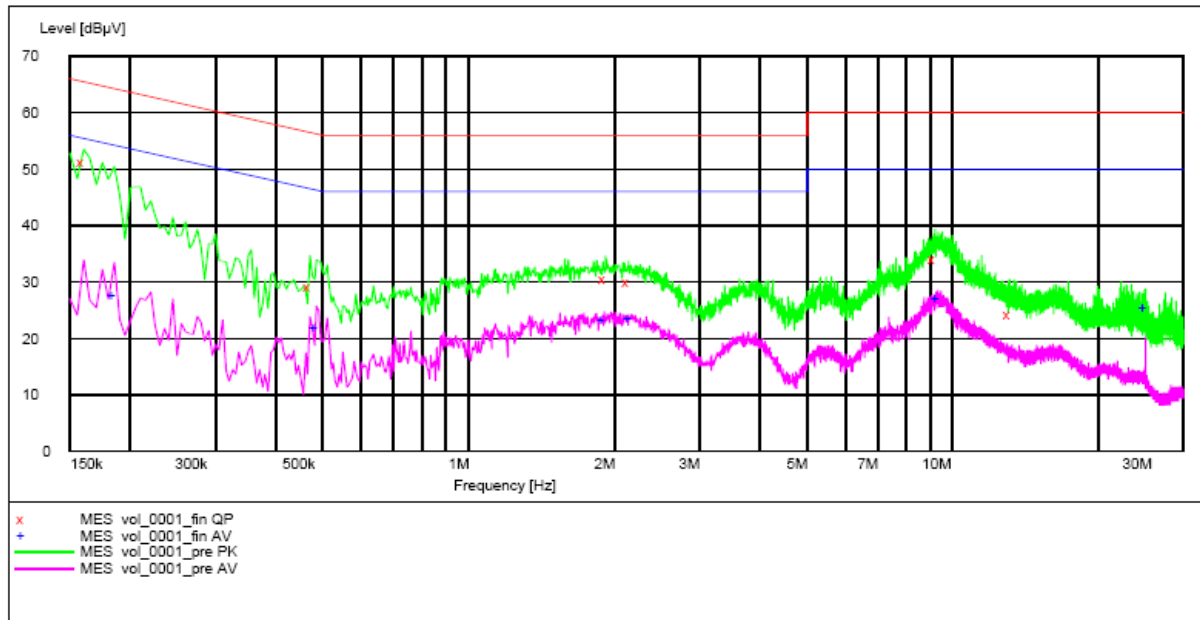

#### MEASUREMENT RESULT: "vol\_0001\_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.160000	51.30	9.7	66	14.2	N	GND
0.470000	29.30	9.7	57	27.2	N	GND
1.920000	30.60	9.8	56	25.4	N	GND
2.140000	29.90	9.8	56	26.1	N	GND
9.215000	34.10	10.0	60	25.9	N	GND
13.145000	24.20	10.1	60	35.8	N	GND

#### MEASUREMENT RESULT: "vol\_0001\_fin AV"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.185000	27.60	9.7	54	26.7	N	GND
0.485000	21.80	9.7	46	24.5	N	GND
1.905000	23.20	9.8	46	22.8	N	GND
2.160000	23.40	9.8	46	22.6	N	GND
9.330000	27.00	10.0	50	23.0	N	GND
25.060000	25.40	10.7	50	24.6	N	GND



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 29 of 64

### 3.1.4 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)  
Test Method: ANSI C63.10:2013  
Test Date: 2023-03-19  
Mode of Operation: WIFI TX mode

Ambient Temperature: 25°C      Relative Humidity: 51%      Atmospheric Pressure: 101 kPa

#### Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=100kHz , VBW= 300KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

#### Test Setup:

As Test Setup of clause 3.1.1 in this test report.

#### Test Limit:

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10 \log (3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$



## Test Report

Date : 2024-05-13

Page 30 of 64

No. : HMD24030010

**Results of WIFI TX Mode 802.11 b (Tx:2412MHz to 2462MHz): Pass (TX Unit)**

**Maximum power spectral density**

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-6.745	8dBm
2437.0	-6.472	8dBm
2462.0	-5.539	8dBm

**Results of WIFI TX Mode 802.11 g (Tx:2412MHz to 2462MHz): Pass (TX Unit)**

**Maximum power spectral density**

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-11.411	8dBm
2437.0	-10.882	8dBm
2462.0	-9.779	8dBm

**Results of WIFI TX Mode 802.11 n20 (Tx:2412MHz to 2462MHz): Pass (TX Unit)**

**Maximum power spectral density**

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2412.0	-11.666	8dBm
2437.0	-9.735	8dBm
2462.0	-9.739	8dBm

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Page 31 of 64

Marker 1 2.41273836000 GHz

PNO: Wide Trig: Free Run Avg Type: Log-Pwr  
IF Gain: Low #Atten: 26 dB Avg Hold: 15/100

TRACE 1 2 3 4 5 6  
TYPE: MANU  
DET: P N N N N N

Mkr1 2.412 738 GHz  
-6.745 dBm

10 dB/div  
Log

Ref 12.00 dBm

Center 2.412000 GHz  
#Res BW 3.0 kHz  
#VBW 10 kHz  
Span 11.54 MHz  
Sweep 1.216 s (1001 pts)

[illegible]




## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 32 of 64

CH 11 (2462.0 MHz)

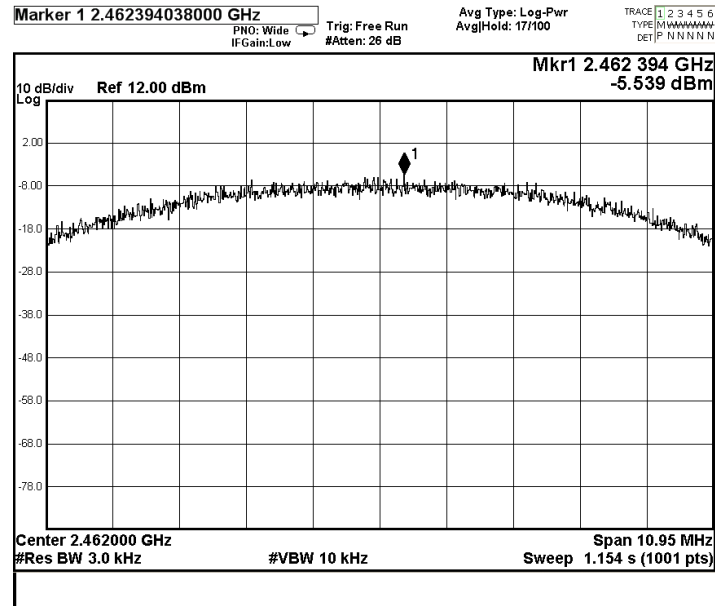

WiFi mode 802.11 g  
CH 1 (2412.0 MHz)

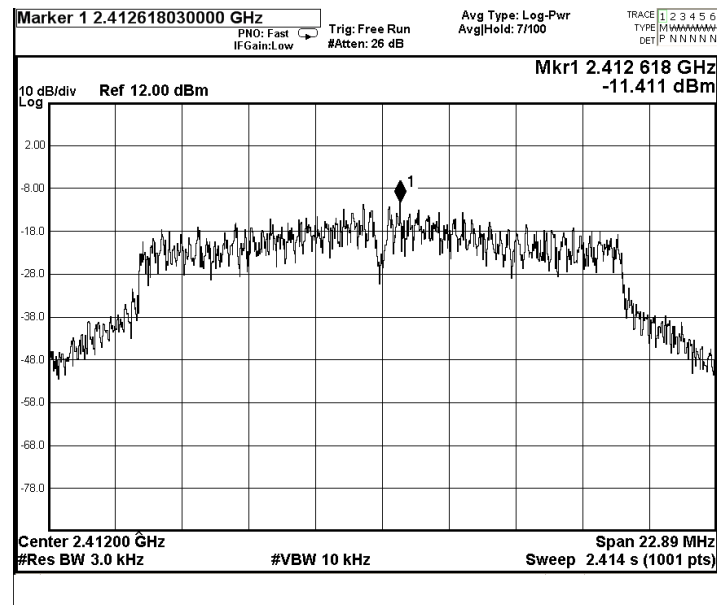

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.






## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 33 of 64

CH 6 (2437.0 MHz)

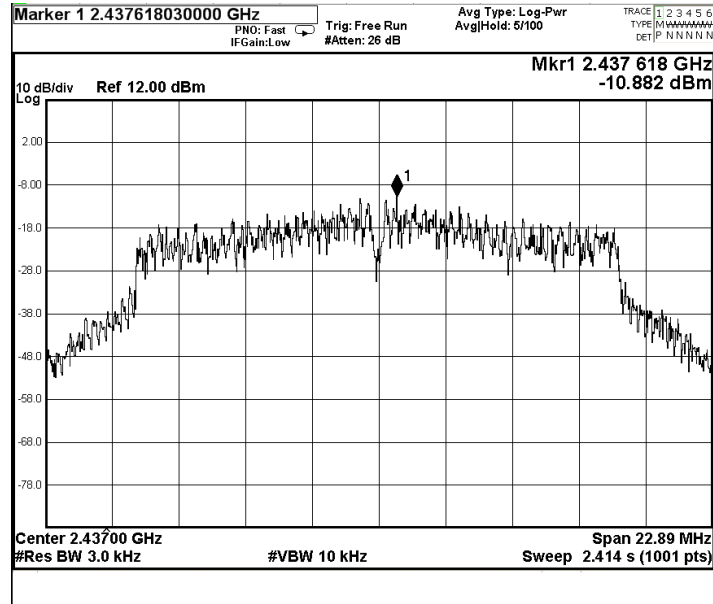

CH 11 (2462.0 MHz)

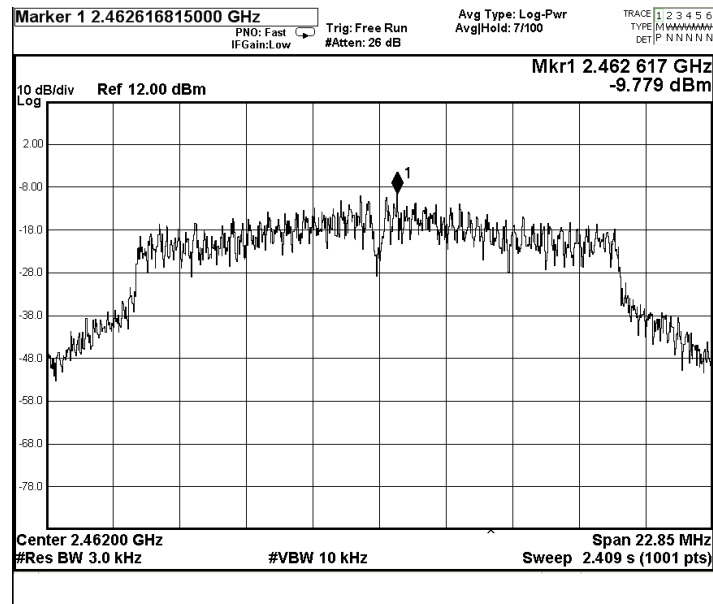

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 34 of 64

WiFi mode 802.11 n20  
CH 1 (2412.0 MHz)

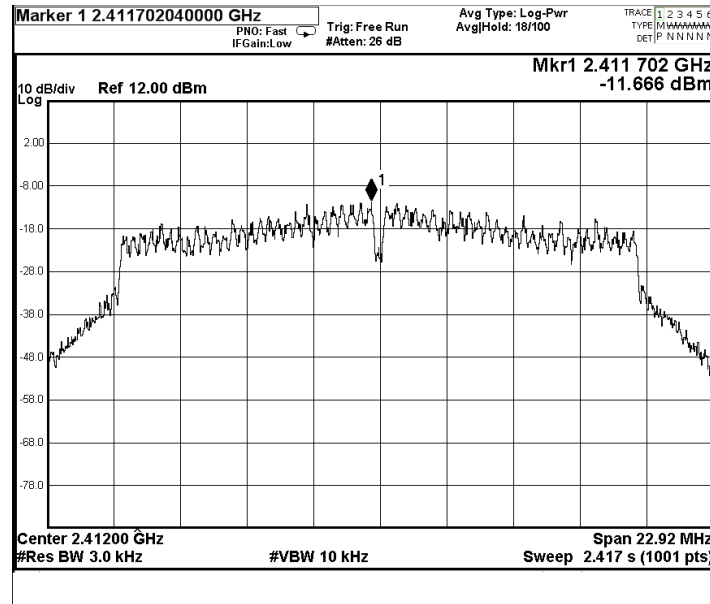

CH 6 (2437.0 MHz)

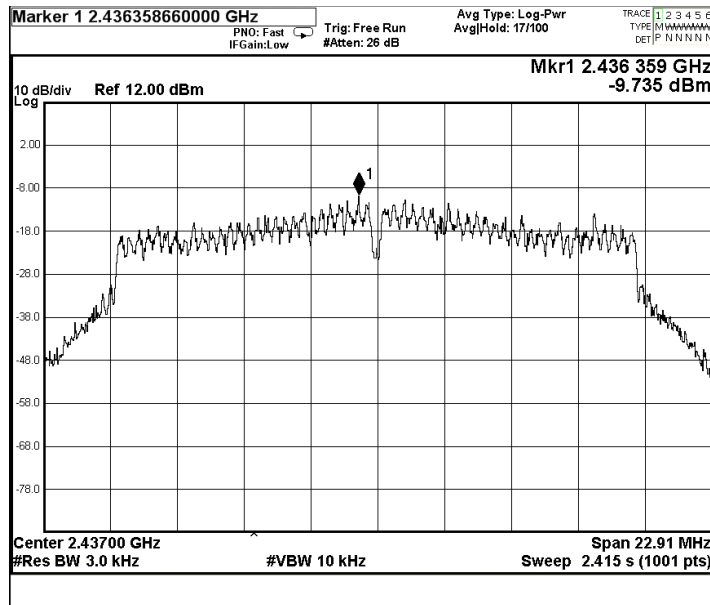

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 35 of 64

CH 11 (2462.0 MHz)

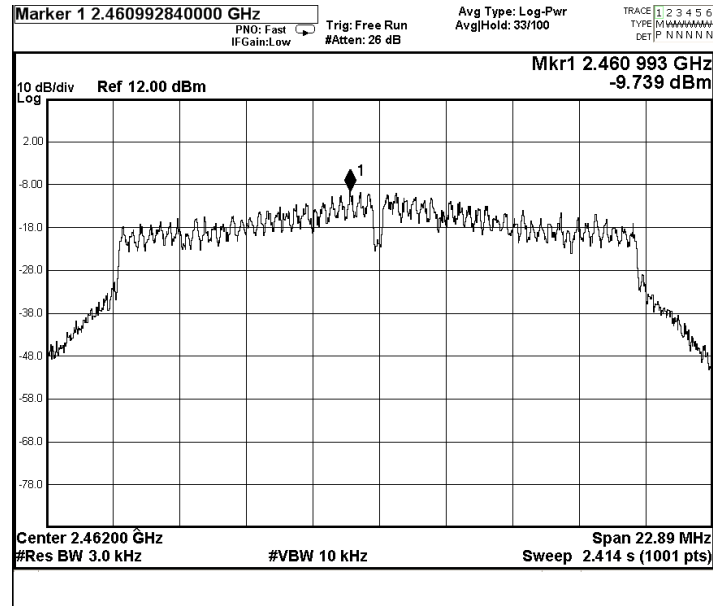

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 36 of 64

### 3.1.5 6dB Spectrum Bandwidth Measurement

Test Requirement: FCC 47CFR 15.247(a)(2)  
Test Method: ANSI C63.10:2013  
Test Date: 2024-03-20  
Mode of Operation: WIFI TX mode

Ambient Temperature: 25°C      Relative Humidity: 51%      Atmospheric Pressure: 101 kPa

#### Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### Spectrum Analyzer Setting:

RBW = 100kHz, VBW  $\geq 3 \times$  RBW, Sweep = Auto couple  
Detector = Peak, Trace = Max. hold

#### Test Setup:

As Test Setup of clause 3.1.1 in this test report.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 37 of 64

### Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	7.691	> 500

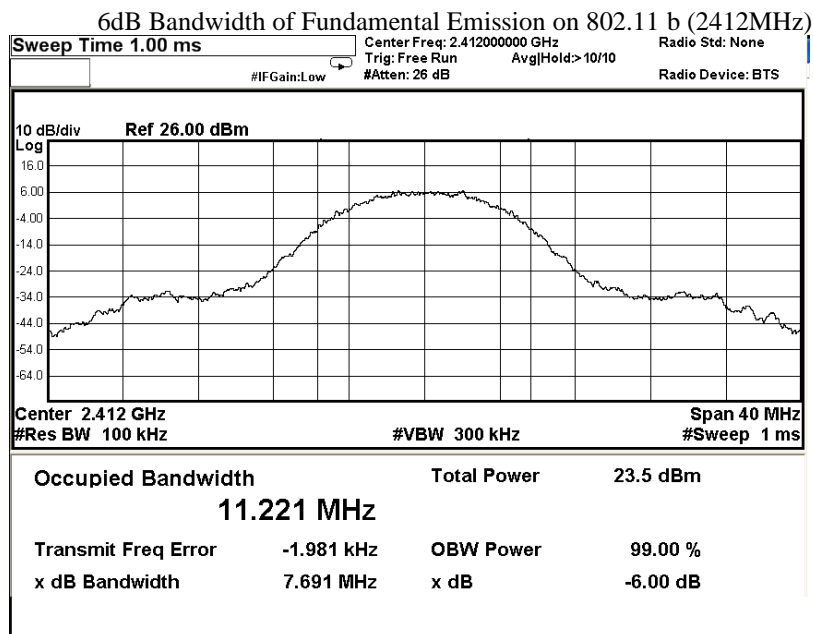

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 38 of 64

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	7.675	> 500

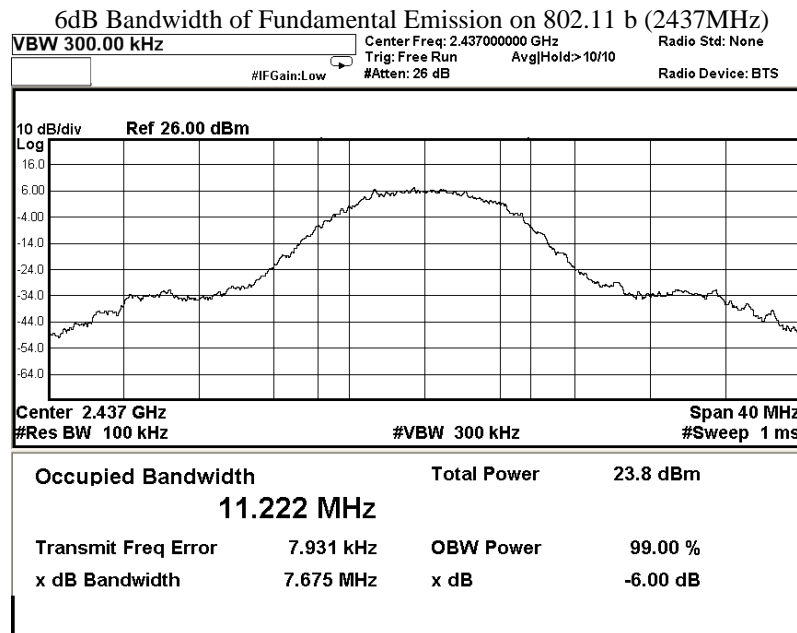

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 39 of 64

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	7.297	> 500

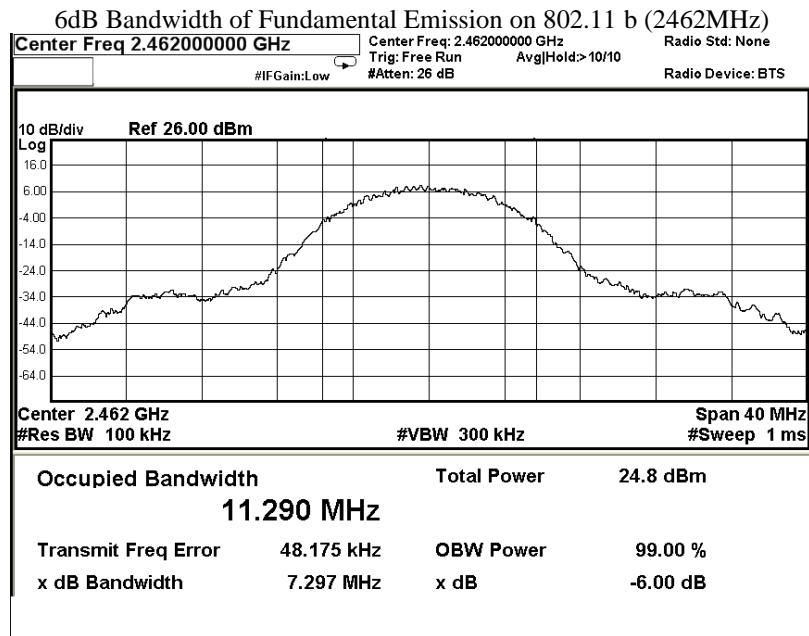

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 40 of 64

### Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	15.26	> 500

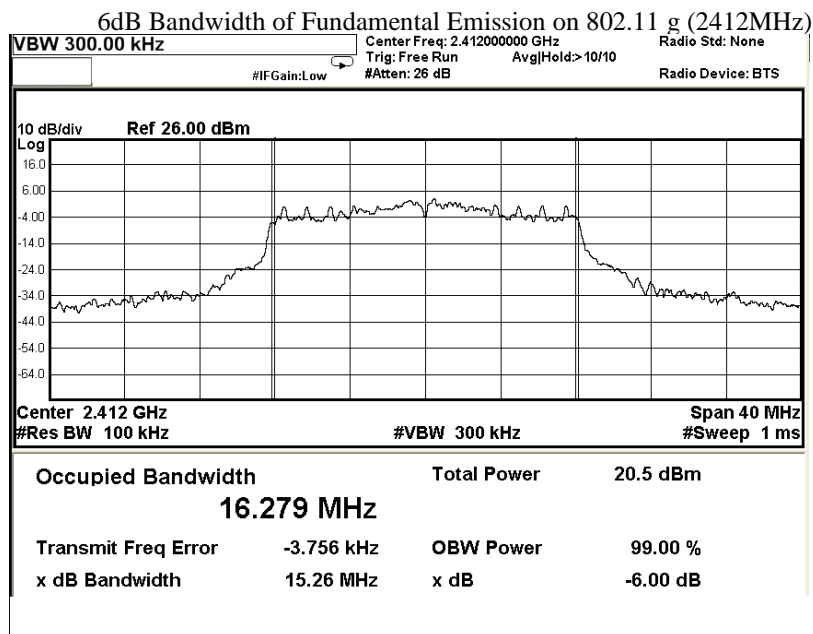

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.








## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 42 of 64

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	15.23	> 500

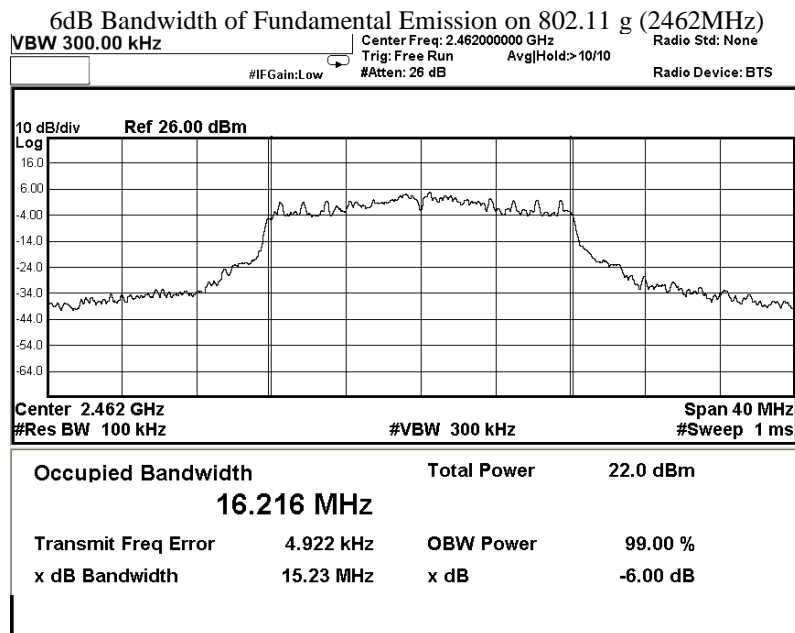

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 43 of 64

### Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2412.0	15.28	> 500

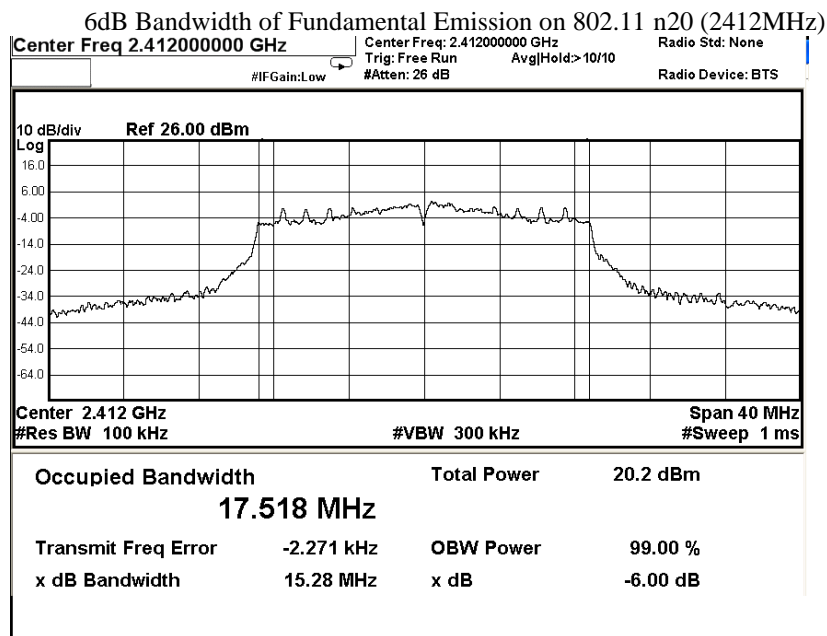

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 44 of 64

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2437.0	15.27	> 500

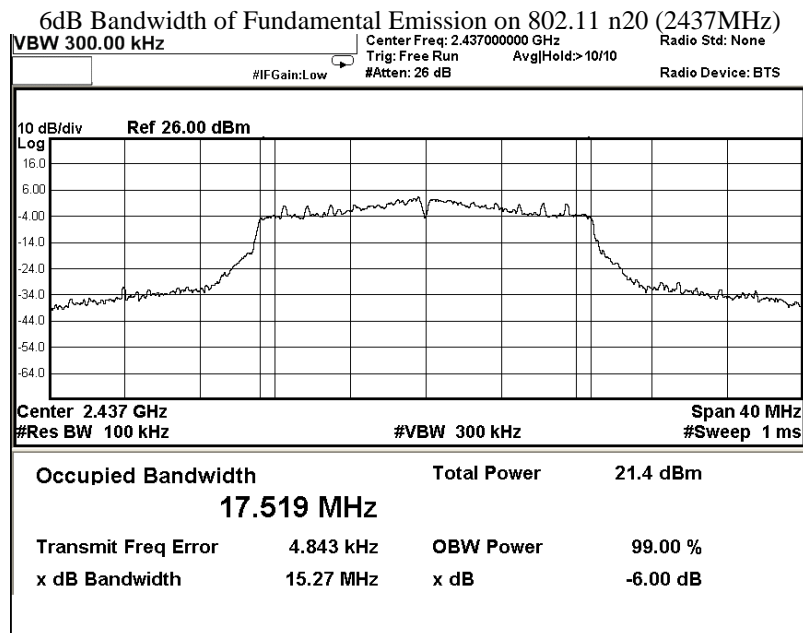

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 45 of 64

### Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range [MHz]	6dB Bandwidth [MHz]	FCC Limits [kHz]
2462.0	15.26	> 500

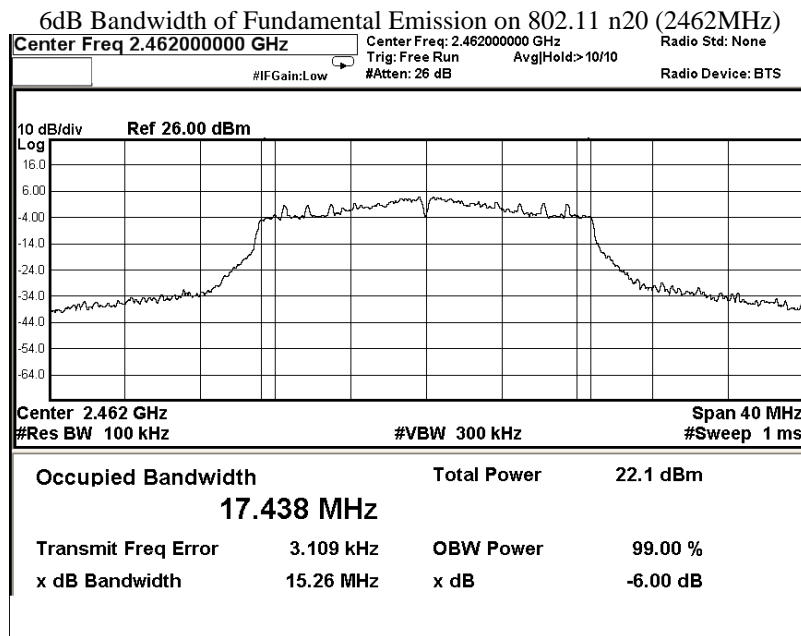

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 46 of 64

### 3.1.6 Band Edges Measurement

Test Requirement: FCC 47CFR 15.247  
Test Method: ANSI C63.10:2013  
Test Date: 2023-03-21  
Mode of Operation: WIFI TX mode

Ambient Temperature: 25°C      Relative Humidity: 51%      Atmospheric Pressure: 101 kPa

#### Test Method:

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW are set to 100kHz and VBW are set to 300kHz for this measurement.

#### Test Setup:

As Test Setup of clause 3.1.2 in this test report.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: [hkstc@stc.group](mailto:hkstc@stc.group) Website: [www.stc.group](http://www.stc.group)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 47 of 64


### Band-edge Compliance of RF Conducted Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: The worst-case measurement results were recorded in the test report  
The following plots include cable losses :0.3dB (There is no Attenuator )

Frequency Range	Reference level	Limit	The highest conducted band edge emission	Result
[MHz]	[dBm]	[dBm]	[dBm]	
2400 – Lowest Fundamental (2412)	2.831	-17.169	-34.118	Pass

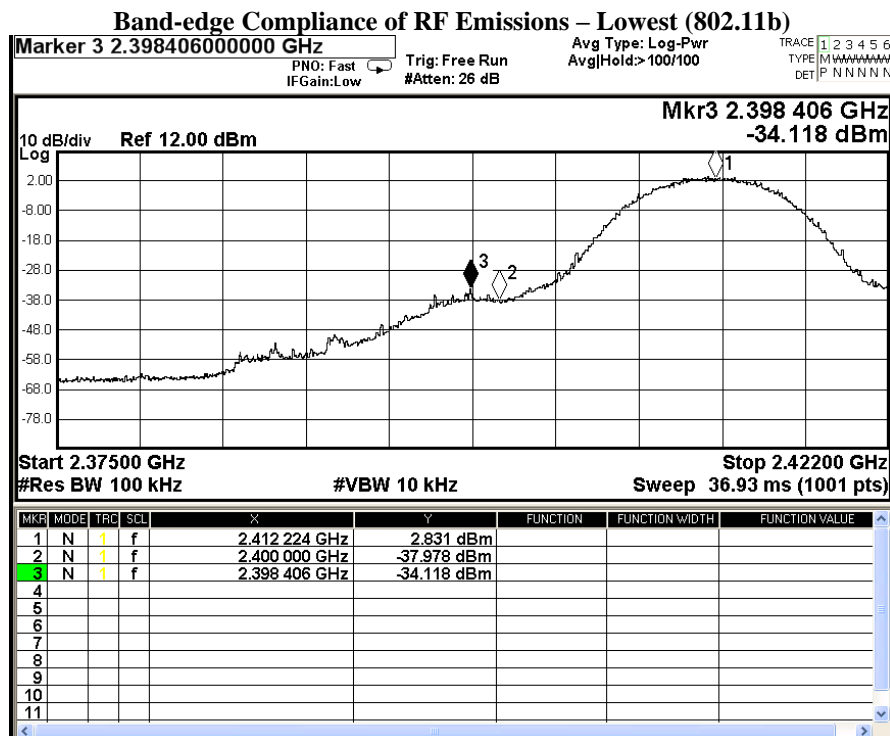

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 48 of 64

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Reference level	Limit	The highest conducted band edge emission	Result
[MHz]	[dBm]	[dBm]	[dBm]	
2483.5 – Highest Fundamental (2462)	3.956	-16.044	-51.992	Pass

### Band-edge Compliance of RF Emissions – Highest (802.11b)

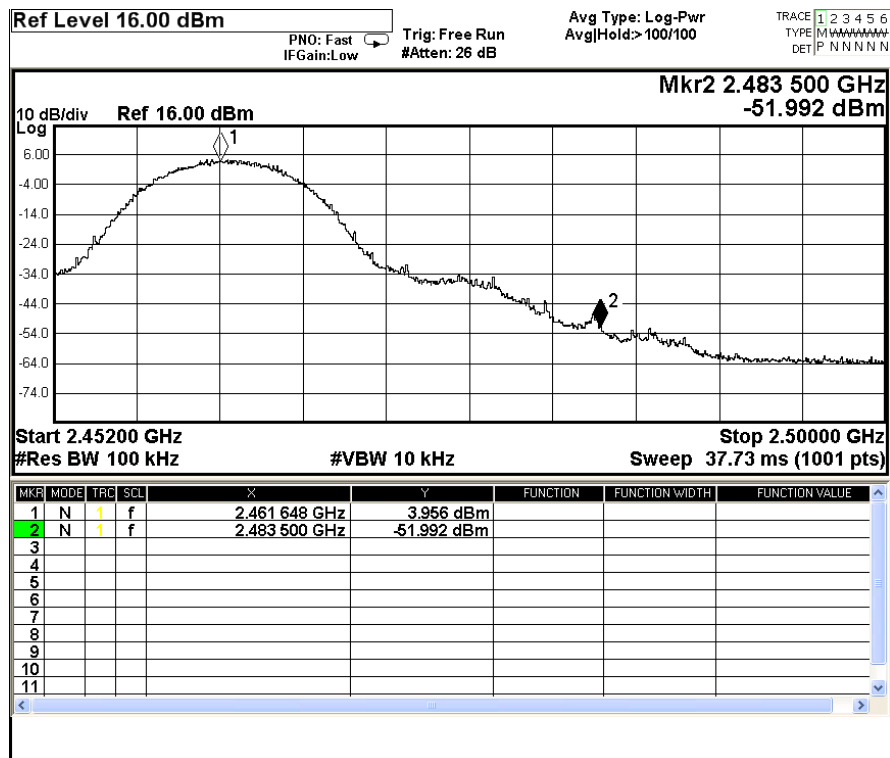

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.






## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 49 of 64

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Reference level	Limit	The highest conducted band edge emission	Result
[MHz]	[dBm]	[dBm]	[dBm]	
2400 – Lowest Fundamental (2412)	-1.159	-21.159	-34.640	Pass

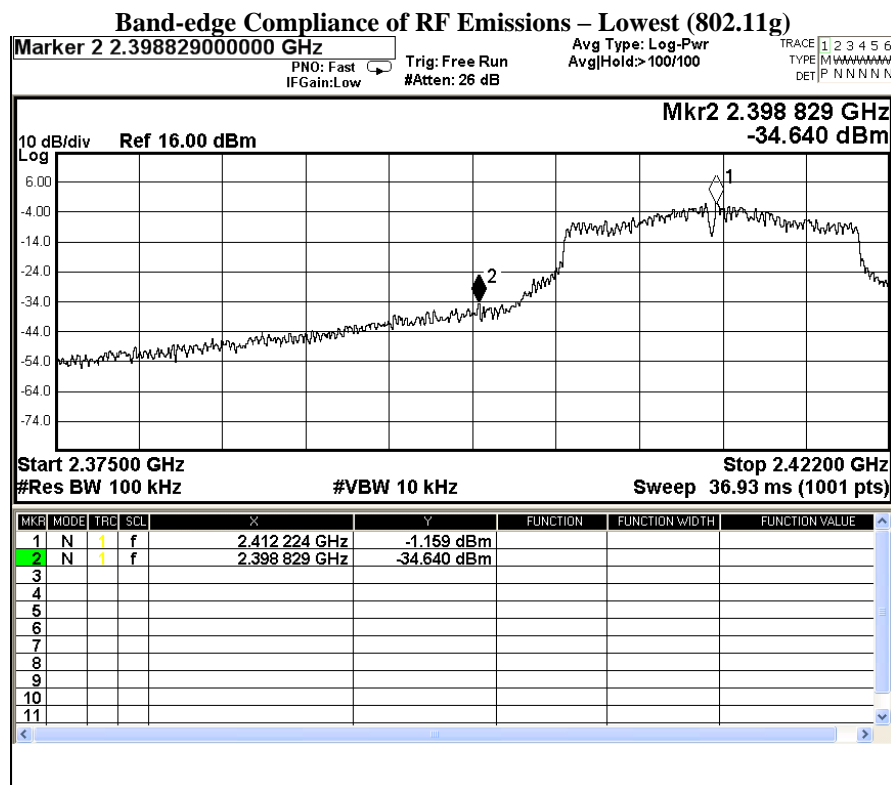

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Reference level	Limit	The highest conducted band edge emission	Result
[MHz]	[dBm]	[dBm]	[dBm]	
2483.5 – Highest Fundamental (2462)	0.680	-19.320	-44.635	Pass

### Band-edge Compliance of RF Emissions – Highest (802.11g)

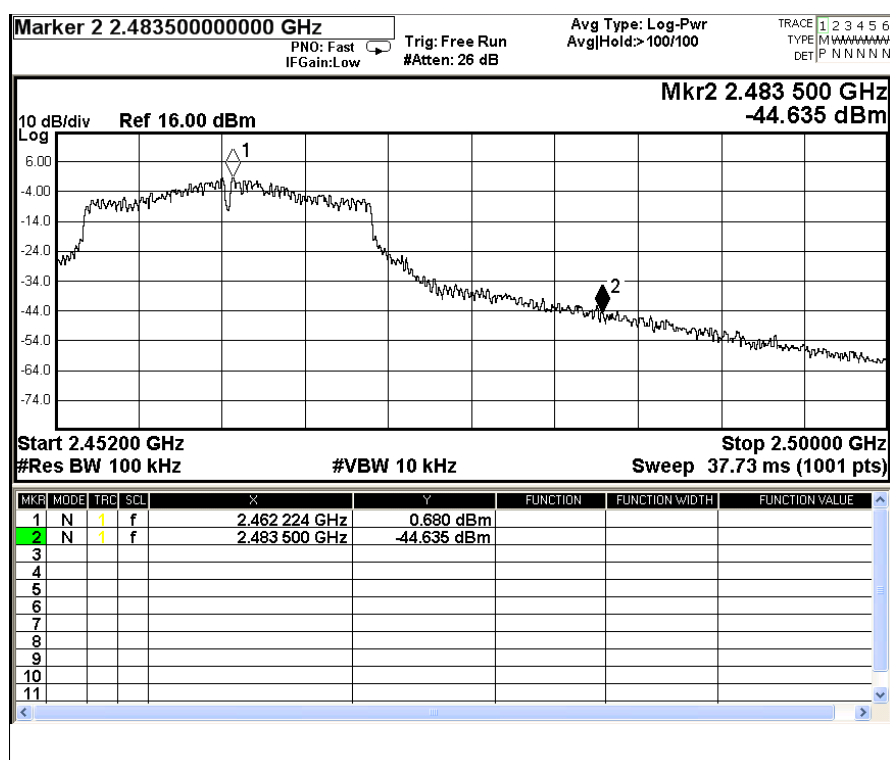

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: [hkstc@stc.group](mailto:hkstc@stc.group) Website: [www.stc.group](http://www.stc.group)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 51 of 64

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Reference level	Limit	The highest conducted band edge emission	Result
[MHz]	[dBm]	[dBm]	[dBm]	
2400 – Lowest Fundamental (2412)	-0.640	-20.640	-37.999	Pass

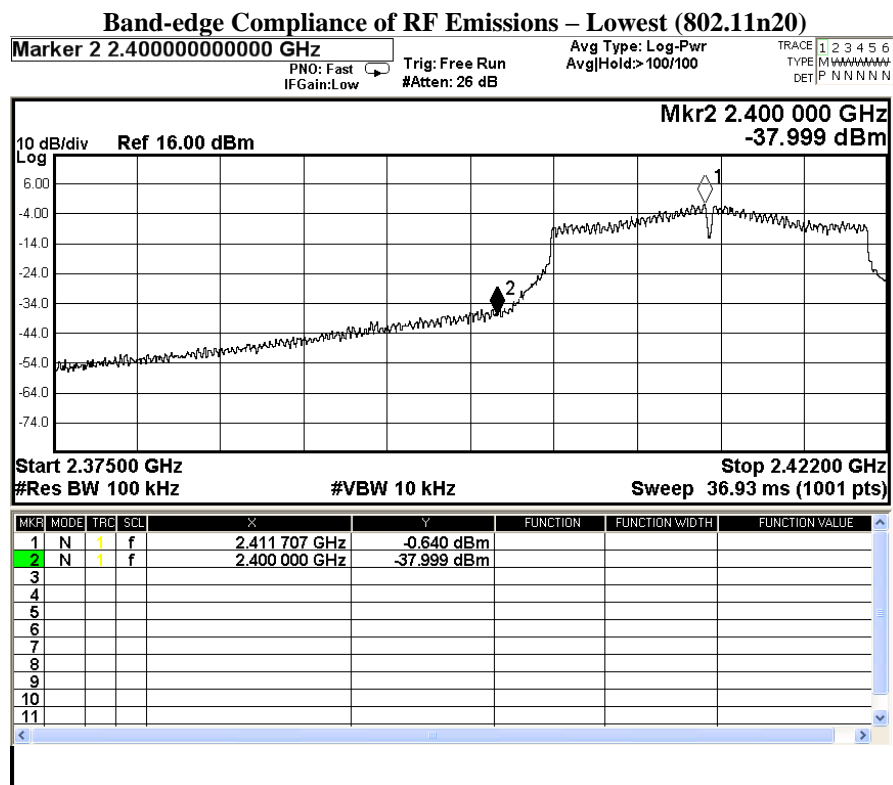

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 52 of 64

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Reference level	Limit	The highest conducted band edge emission	Result
[MHz]	[dBm]	[dBm]	[dBm]	
2483.5 – Highest Fundamental (2462)	0.092	-19.908	-43.856	Pass

### Band-edge Compliance of RF Emissions – Highest (802.11n20)

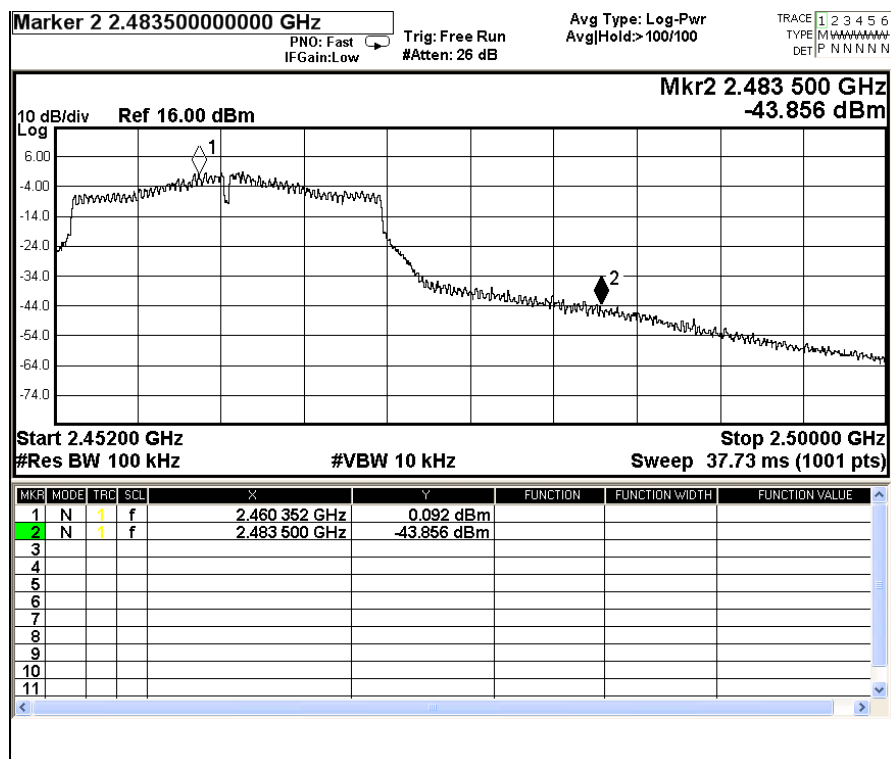

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010


Page 53 of 64

### RF Conducted Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: The worst-case measurement results were recorded in the test report  
The following plots include cable losses :0.3dB (There is no Attenuator )

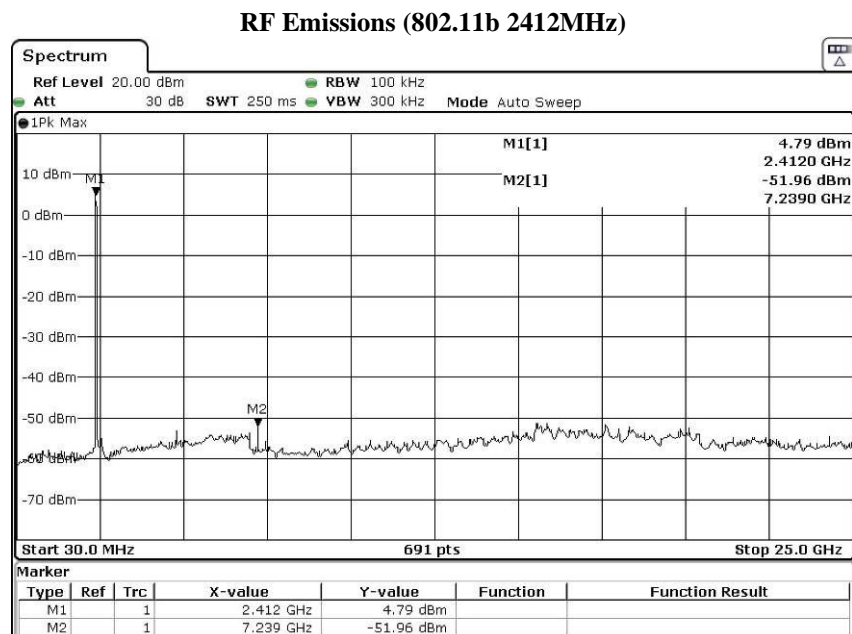

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: [hkstc@stc.group](mailto:hkstc@stc.group) Website: [www.stc.group](http://www.stc.group)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 54 of 64

### RF Emissions (802.11b 2437MHz)

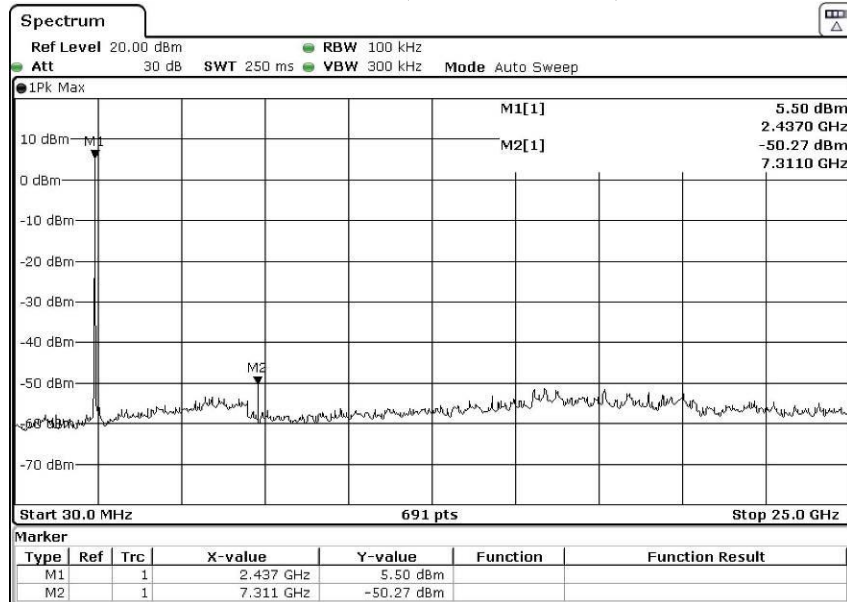

### RF Emissions (802.11b 2462MHz)

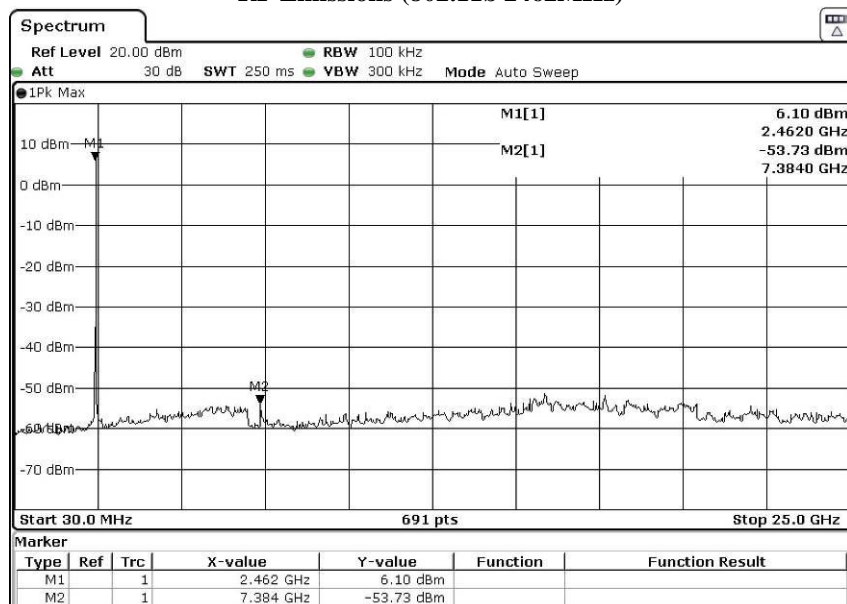

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 55 of 64

### RF Emissions (802.11g 2412MHz)

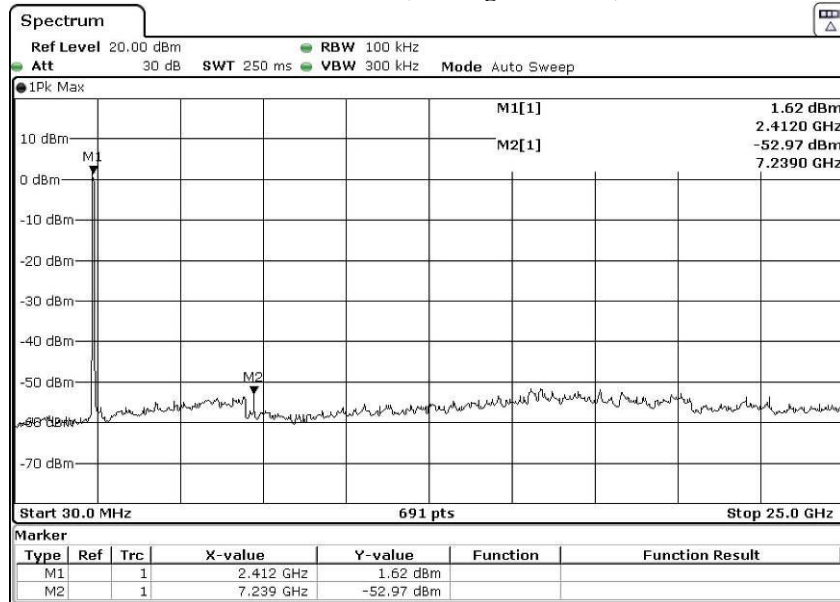

### RF Emissions (802.11g 2437MHz)

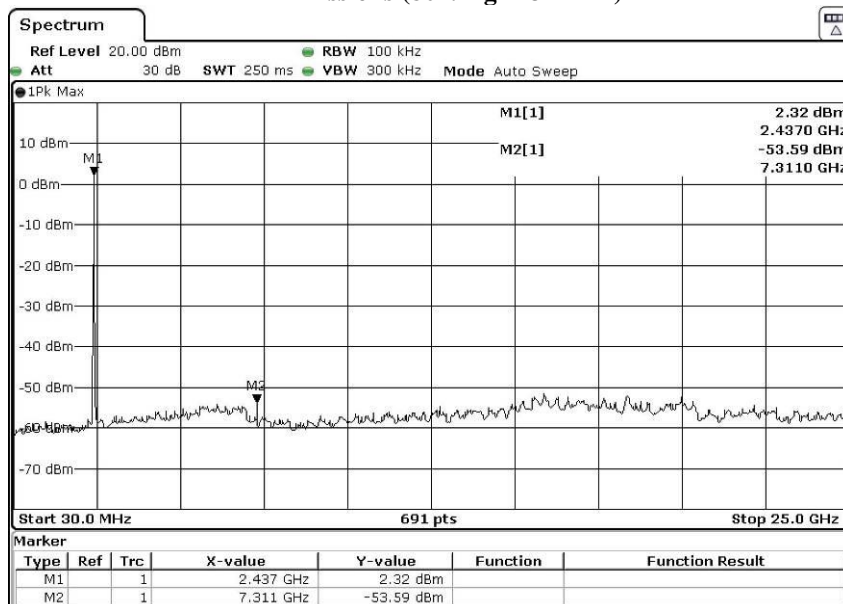

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: [hkstc@stc.group](mailto:hkstc@stc.group) Website: [www.stc.group](http://www.stc.group)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 56 of 64

### RF Emissions (802.11g 2462MHz)

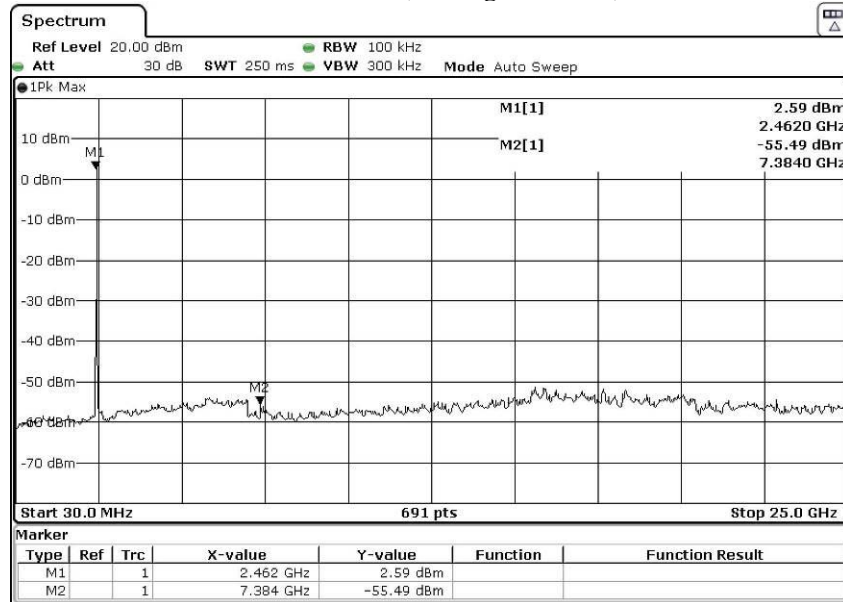

### RF Emissions (802.11n20 2412MHz)

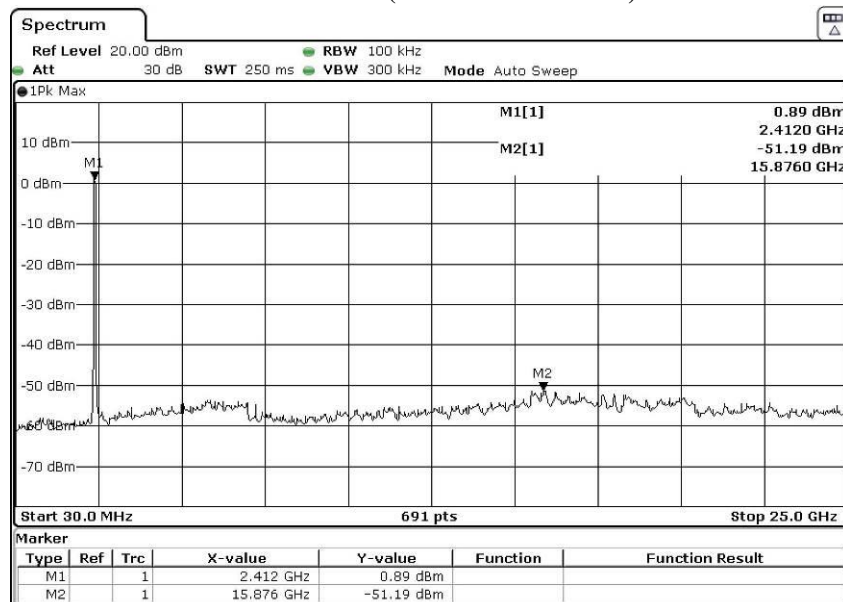

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.






## Test Report


Date : 2024-05-13  
No. : HMD24030010

Page 57 of 64

### RF Emissions (802.11n20 2437MHz)

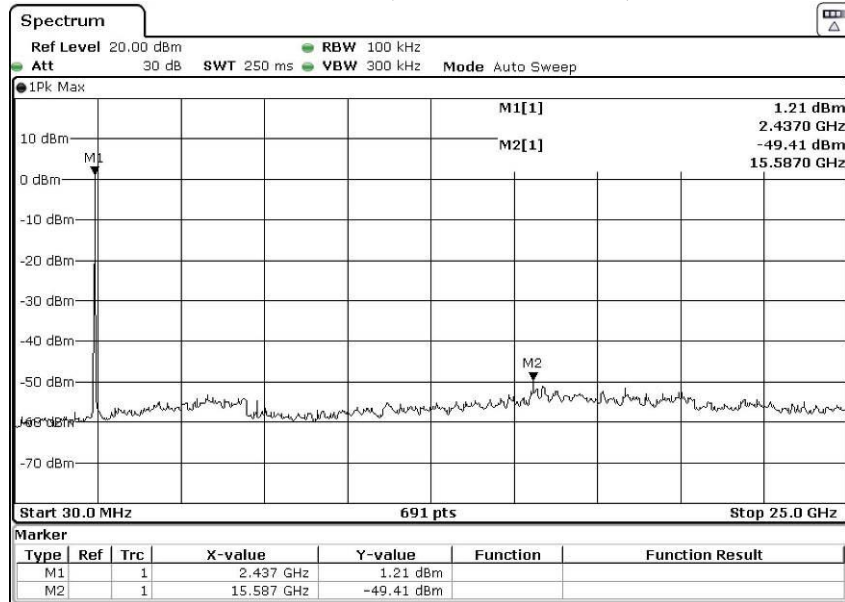

### RF Emissions (802.11n20 2462MHz)

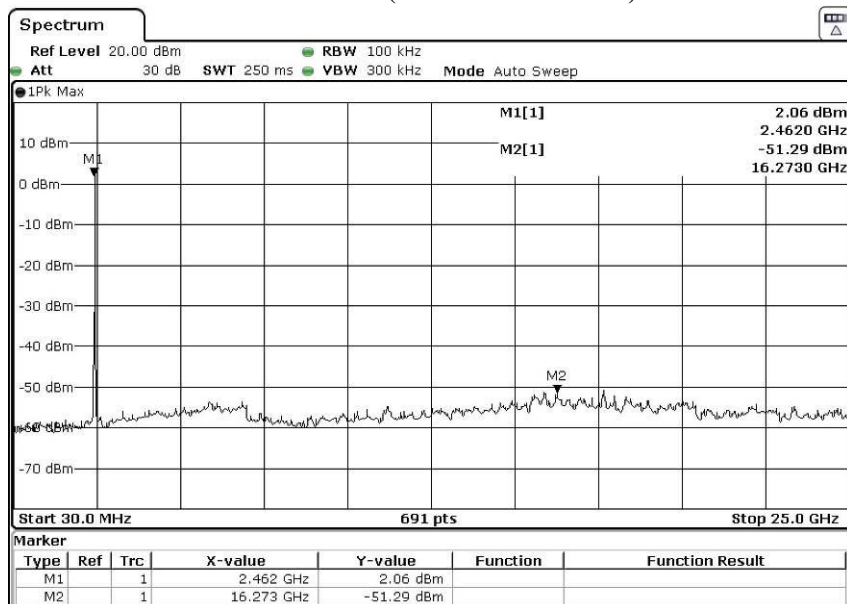

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 58 of 64

### 3.1.7 Antenna Requirement

Ambient Temperature: 25°C

Relative Humidity: 51%

Atmospheric Pressure: 101 kPa

**Test Requirements: § 15.203**

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

This is Internal antenna. There is no external antenna, the antenna gain = 2.0dBi. User is unable to remove or changed the Antenna.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: [hkstc@stc.group](mailto:hkstc@stc.group) Website: [www.stc.group](http://www.stc.group)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2024-05-13  
No. : HMD24030010

Page 59 of 64

### Appendix A

#### List of Measurement Equipment

##### Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3	--	2019-04-16	2024-04-16
EM356	ANTENNA POSITIONING TOWER	ETS-LINDGREN	2171B	00150346	N/A	N/A
EM293	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	N9020A	MY50510152	2023-03-21	2025-03-21
EM299	BROADBAND HORN ANTENNA	ETS-LINDGREN	3115	00114120	2023-01-25	2025-01-25
EM300	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-09	00130130	2023-01-16	2025-01-16
EM301	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-10	00130988	2023-02-15	2025-02-15
EM353	LOOP ANTENNA	ETS_LINDGREN	6502	00206533	2022-09-26	2024-09-26
EM355	BICONILOG ANTENNA	ETS-LINDGREN	3143B	00094856	2022-08-26	2024-08-26
EM200	DUAL CHANNEL POWER METER	R & S	NRVD	100592	2023-08-02	2025-08-02
EM012	PRE-AMPLIFIER	HP	HP8448B	3008A00262	2022-11-08	2025-11-08
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A

##### Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM232	LISN	SCHAFFNER	NNB41	04/100082	2023-05-30	2024-05-30
EM181	EMI TEST RECEIVER	R & S	ESIB7	100072	2023-05-22	2024-05-22
EM179	IMPULSE LIMITER	R & S	ESH3-Z2	357.8810.52/54	2023-03-17	2025-03-17
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057-99A	2022-02-06	2027-02-06
N/A	MEASUREMENT AND EVALUATION SOFTWARE	ROHDE & SCHWARZ	BSIB-K1	V1.20	N/A	N/A

#### Remarks:-

CM CORRECTIVE MAINTENANCE  
N/A NOT APPLICABLE  
TBD TO BE DETERMINED

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by The Hong Kong Standards & Testing Centre Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. Subject to clause 3, the Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall be at liberty to disclose the testing-related documents and/or files anytime to any third-party accreditation and/or recognition bodies for audit or other related purposes. No liabilities whatsoever shall attach to the Company's act of disclosure.
4. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
5. The results in Report apply only to the sample as received and do not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
6. When a statement of conformity to a specification or standard is provided, the ILAC-G8 Guidance document (and/or IEC Guide 115 in the electrotechnical sector) will be adopted as a decision rule for the determination of conformity unless it is inherent in the requested specification or standard, or otherwise specified in the Report.
7. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
8. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
9. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
10. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
11. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
12. Issuance records of the Report are available on the internet at [www.stc.group](http://www.stc.group). Further enquiry of validity or verification of the Reports should be addressed to the Company.