




CHANNEL 1

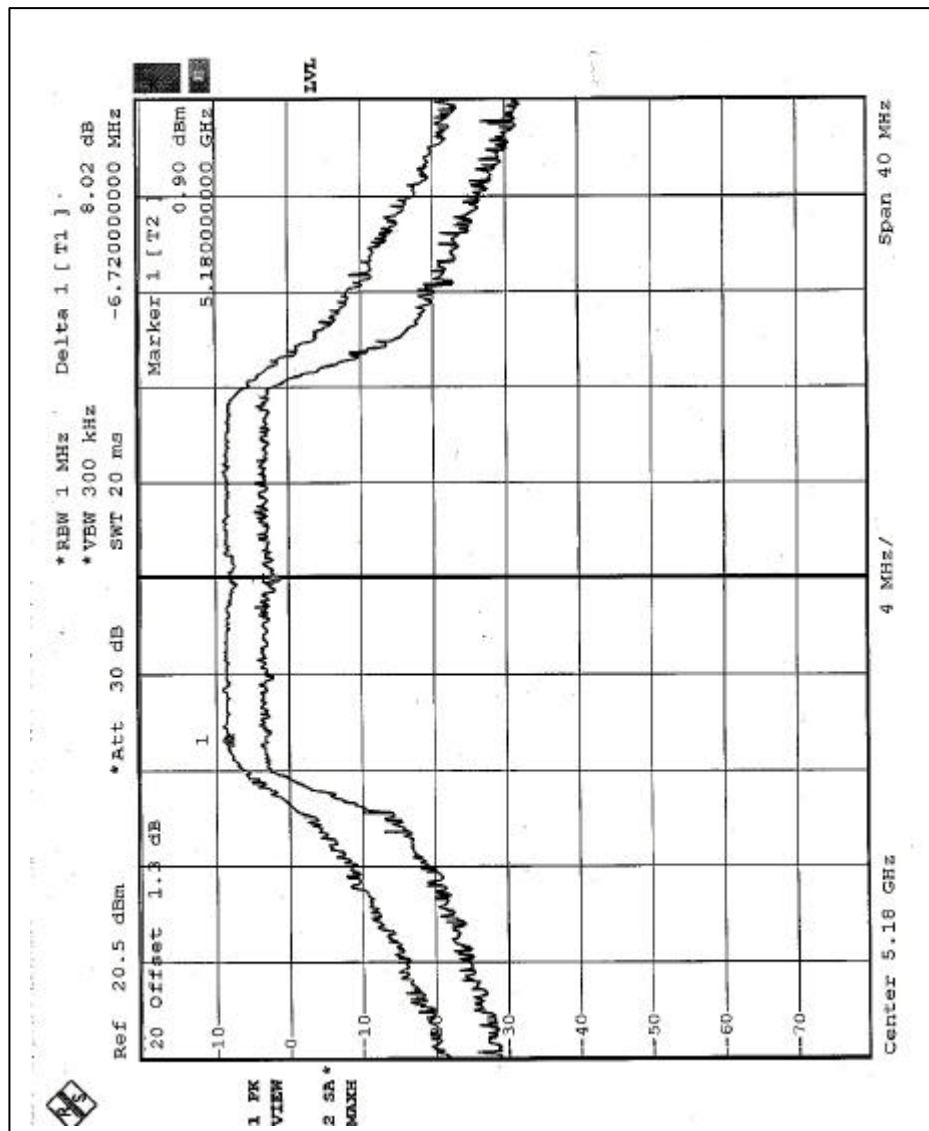

CHANNEL 5

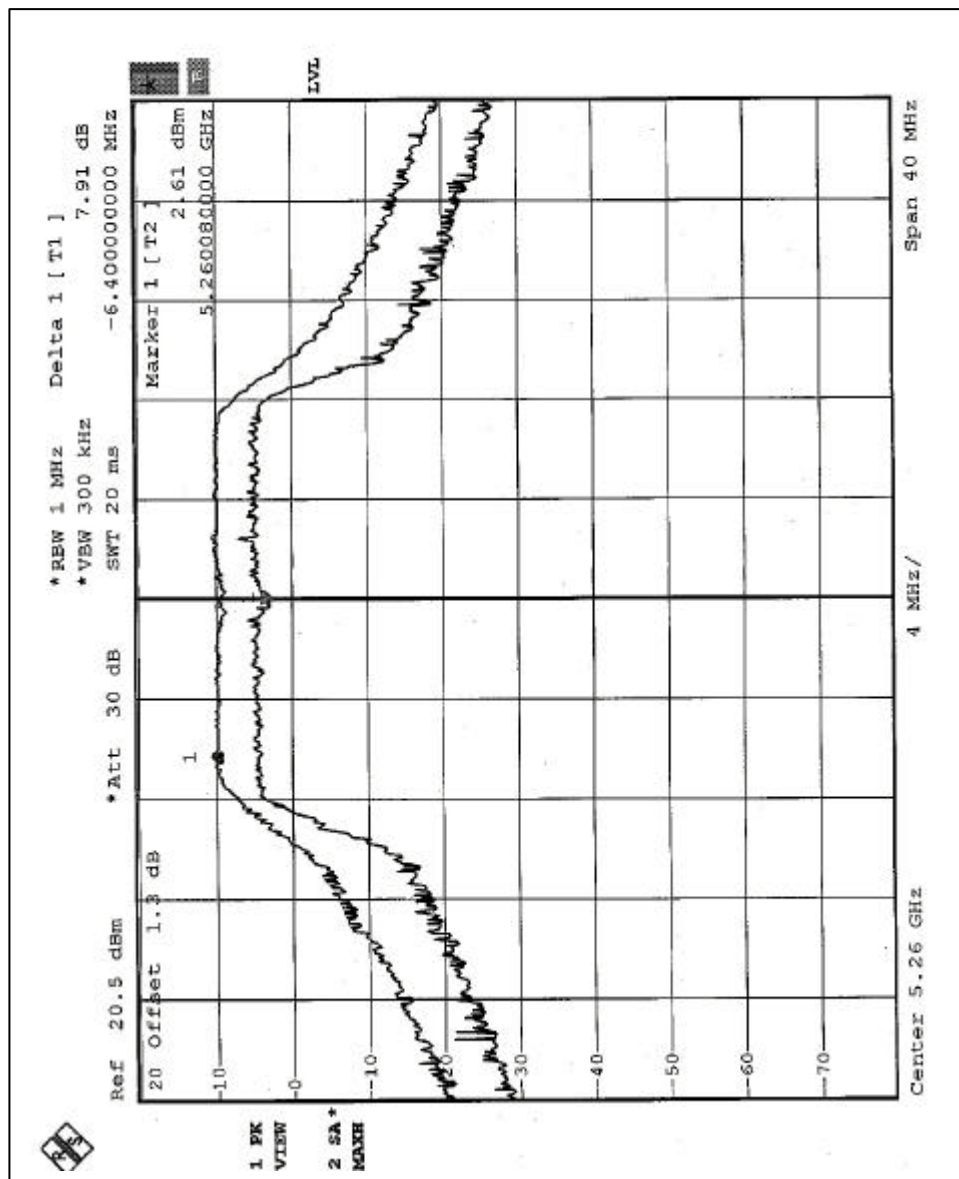

CHANNEL 8

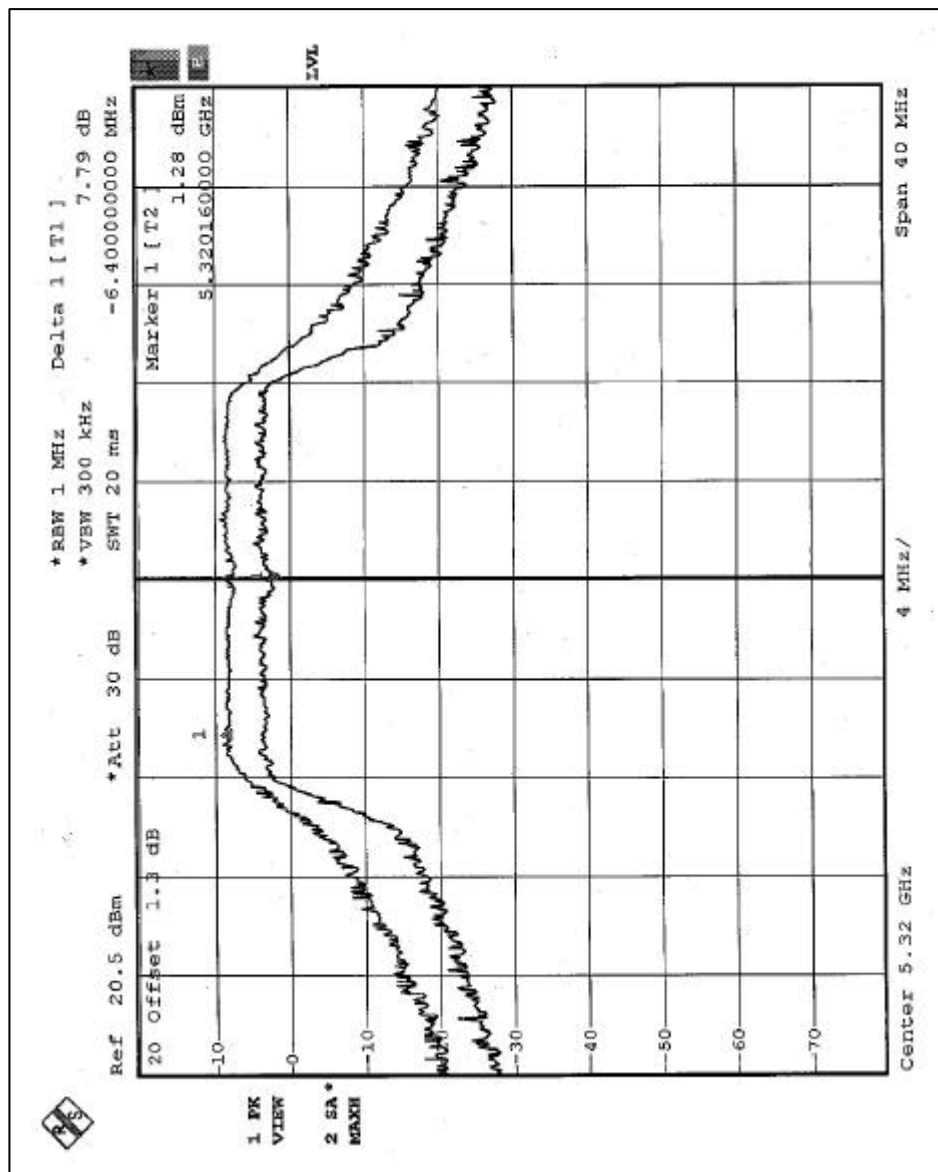





EUT	802.11a Cardbus	MODEL	A13QBF-PC
MODE	Turbo	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25eg. C, 66RH, 976 hPa	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5210	8.30	13	PASS
2	5250	7.41	13	PASS
3	5290	8.68	13	PASS


CHANNEL 1

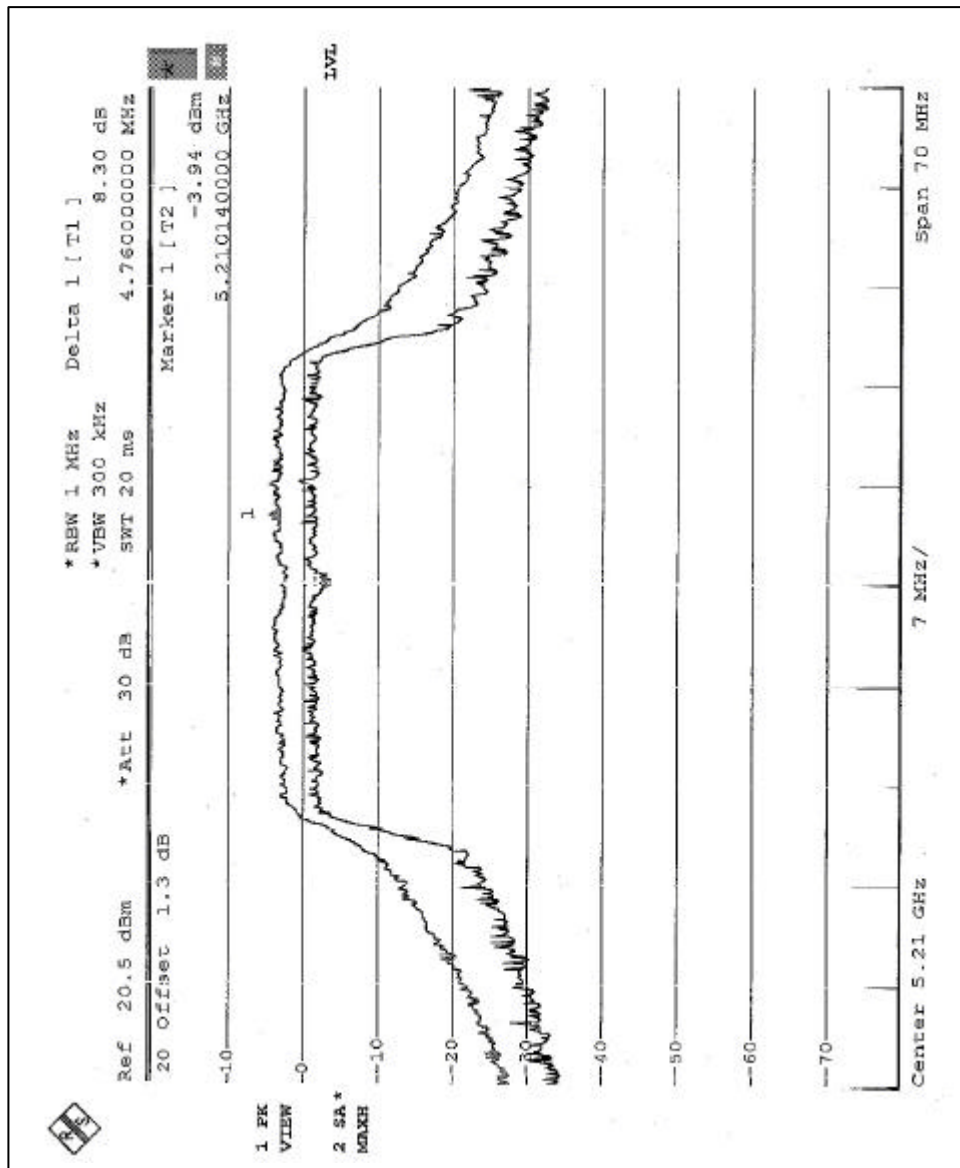

CHANNEL 2

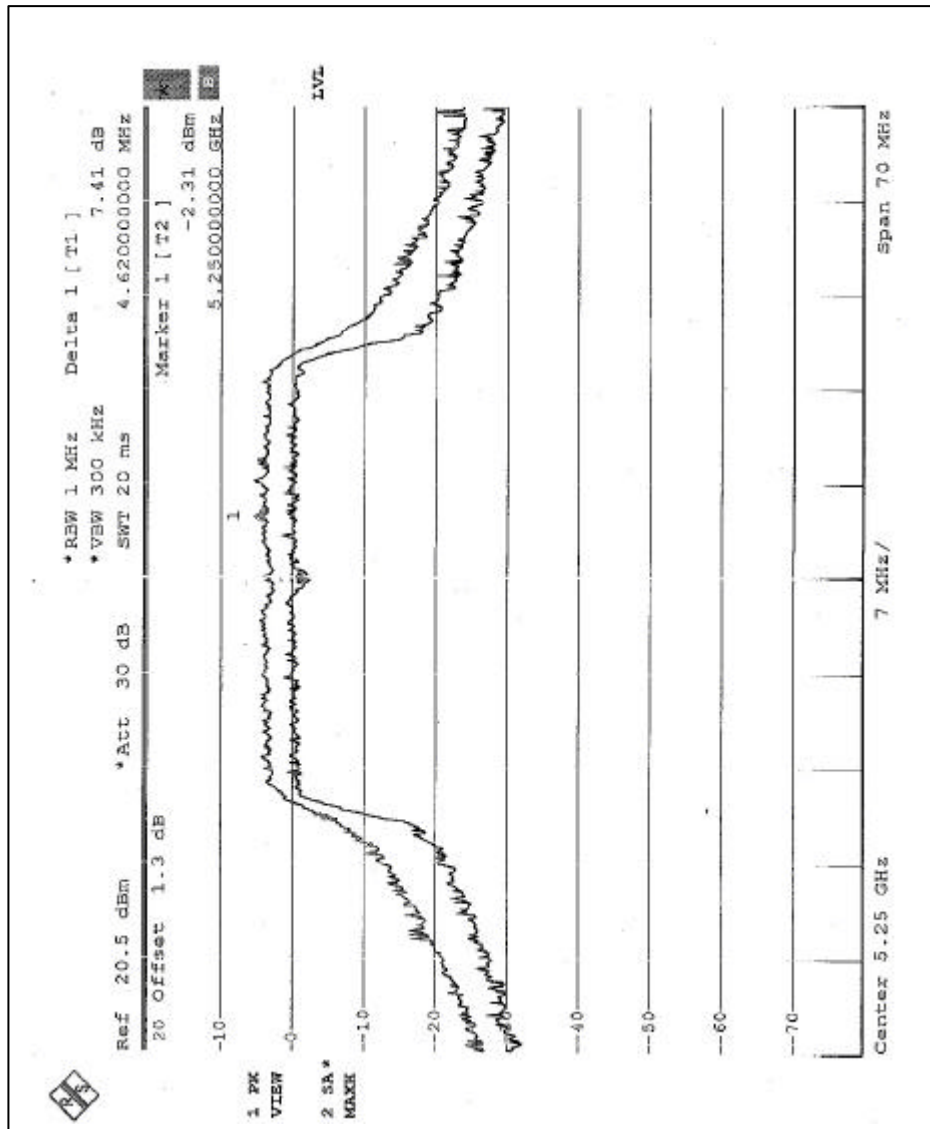

CHANNEL 3

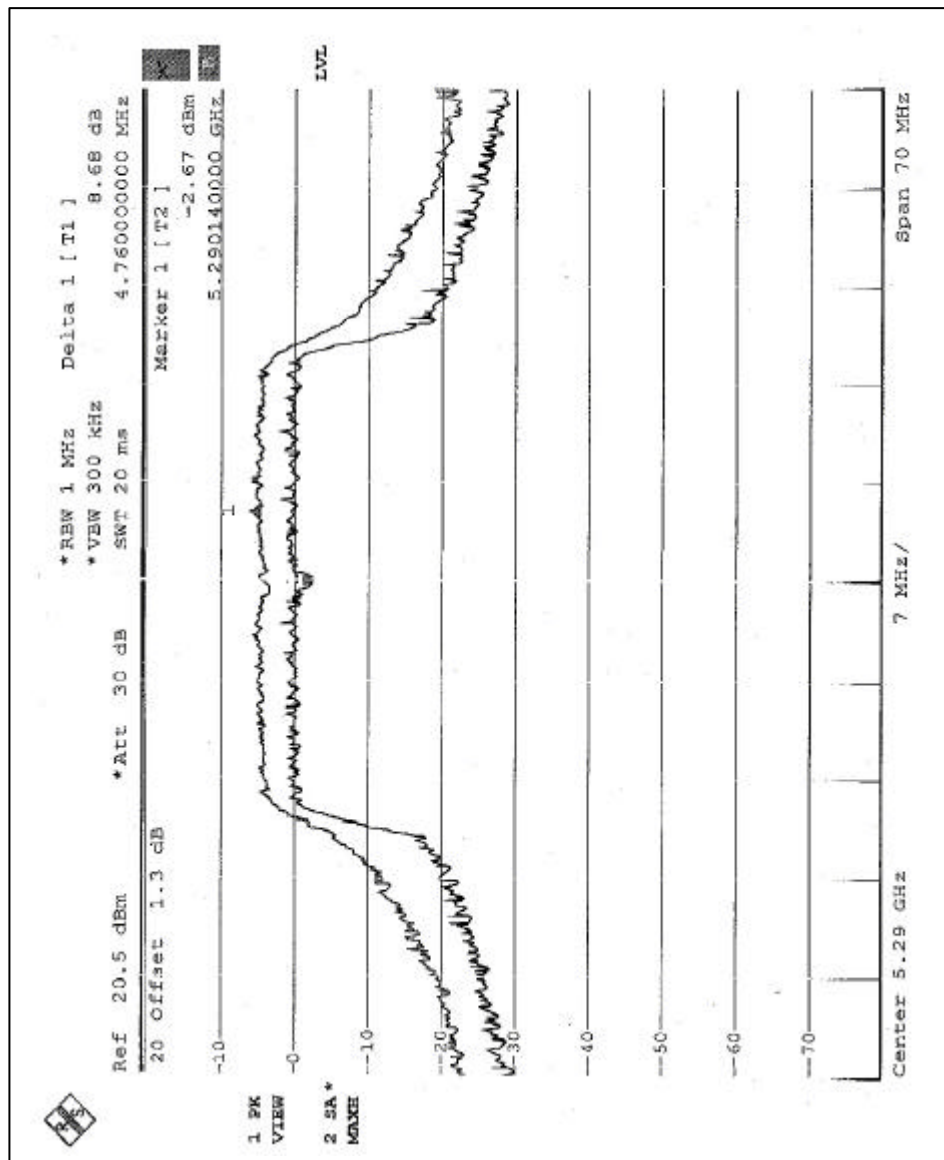

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	4dBm
5.25 – 5.35 GHz	11dBm
5.725 – 5.825 GHz	17dBm

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS


Same as 5.3.6

4.5.7 TEST RESULTS


EUT	802.11a Cardbus	MODEL	A13QBF-PC
MODE	Normal	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25eg. C, 66RH, 976 hPa	TESTED BY	Hank Chung

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1 MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5180	-1.07	4	PASS
4	5240	-1.33	4	PASS
5	5260	-0.87	11	PASS
8	5320	0.17	11	PASS


CHANNEL 1

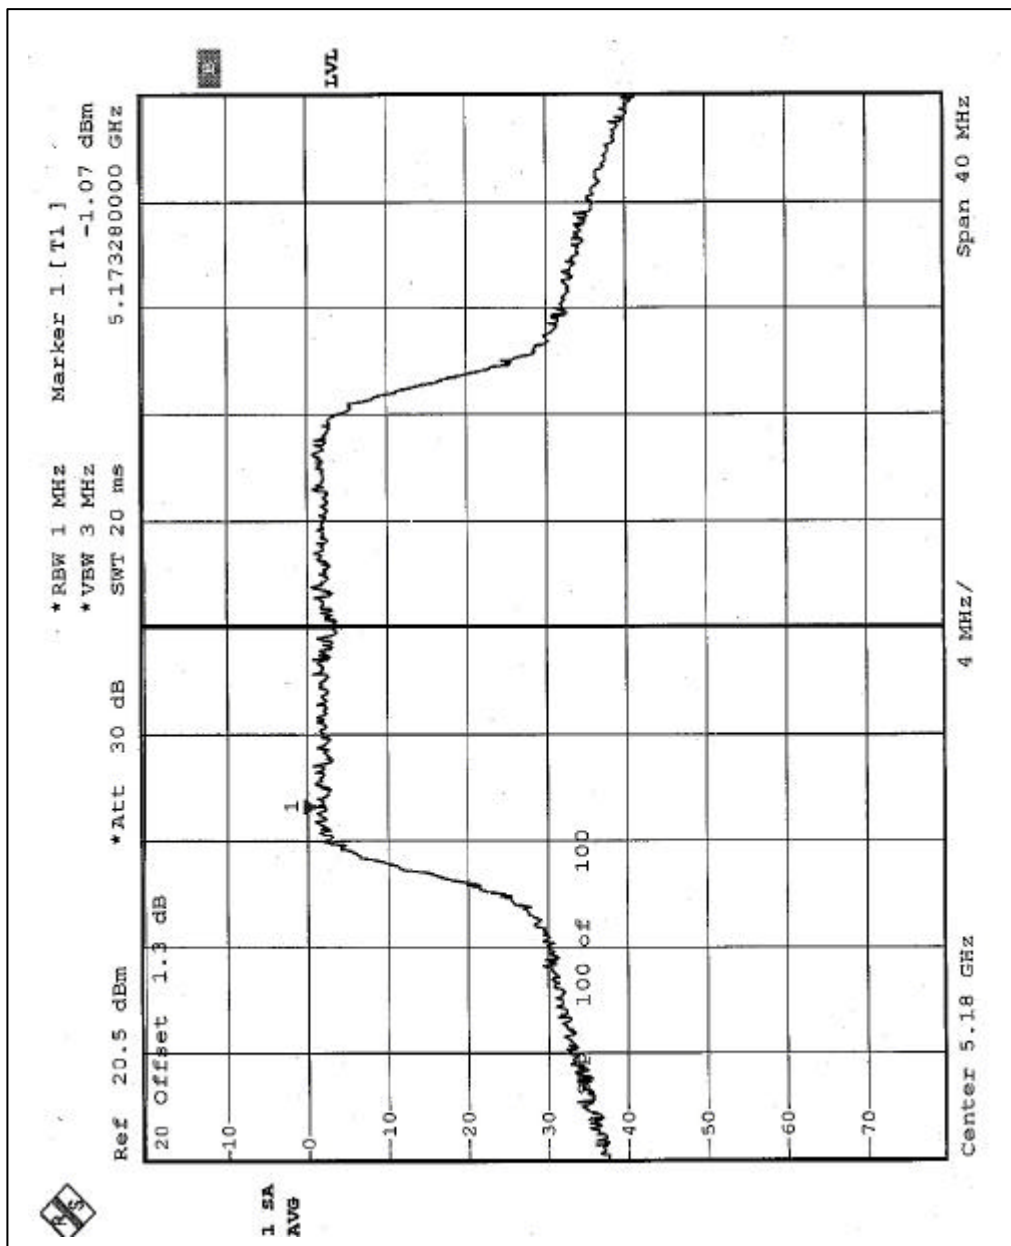


CHANNEL 4

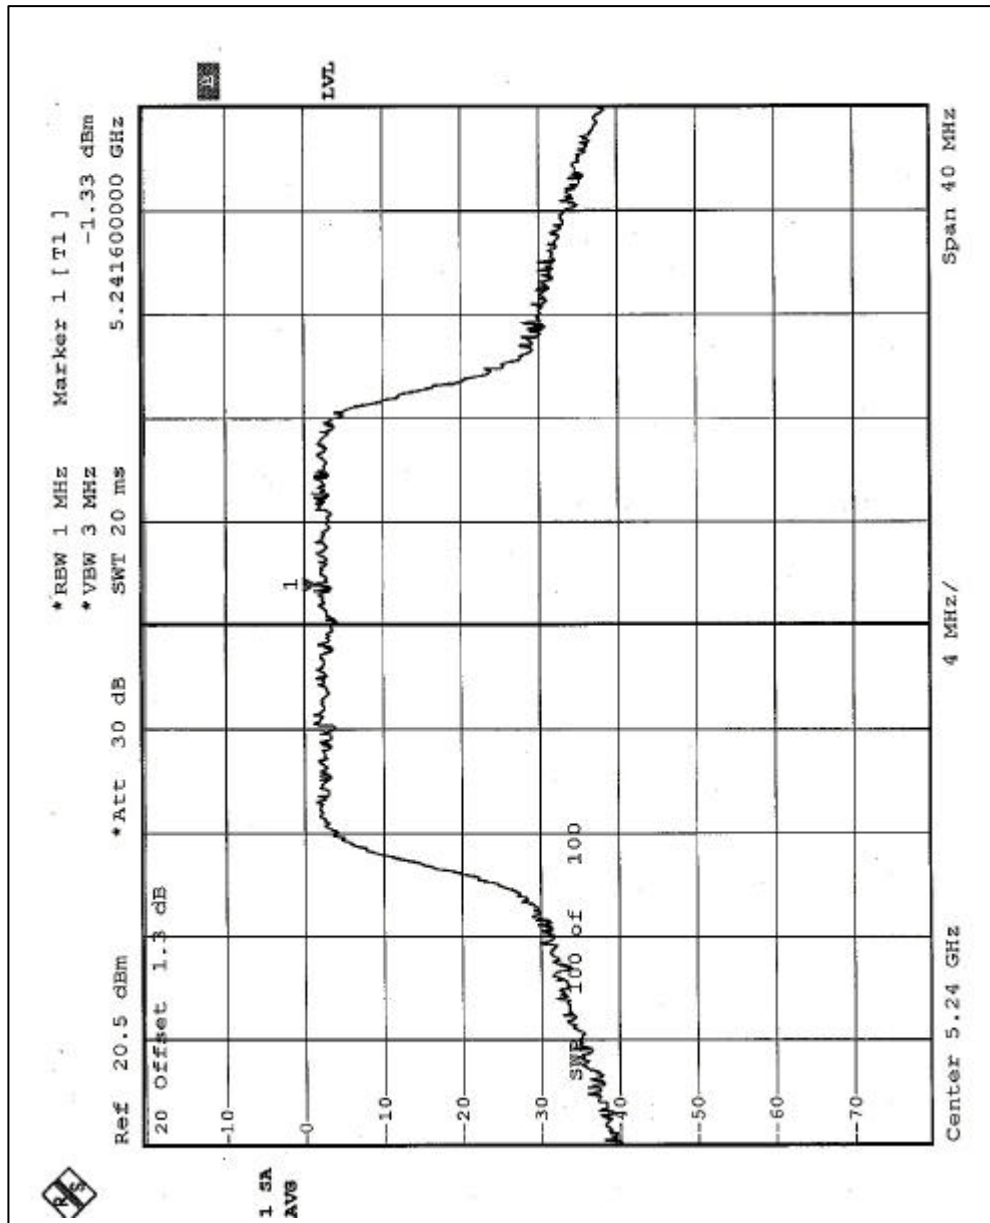

CHANNEL 5

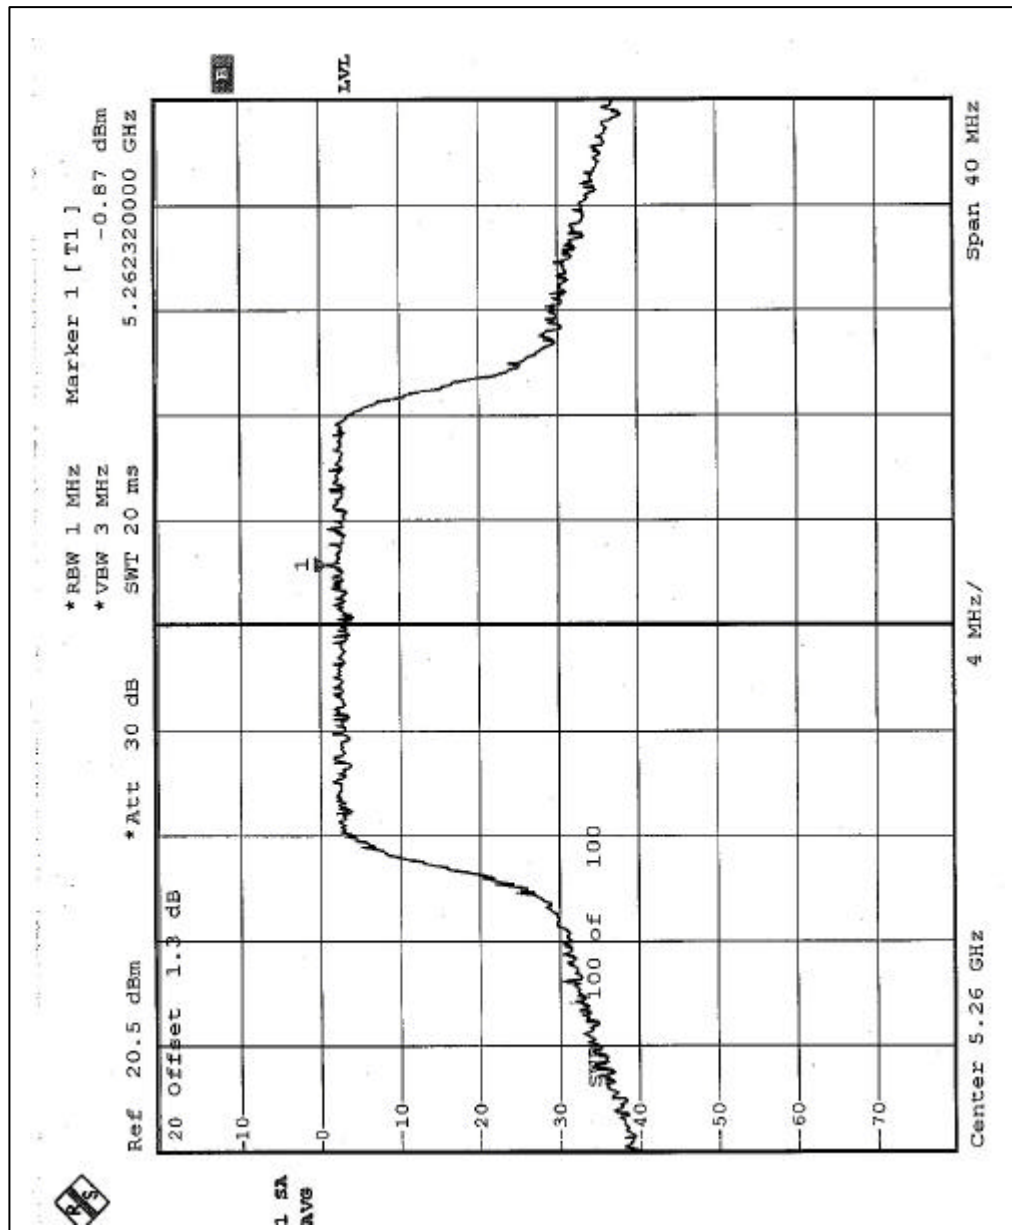


CHANNEL 8

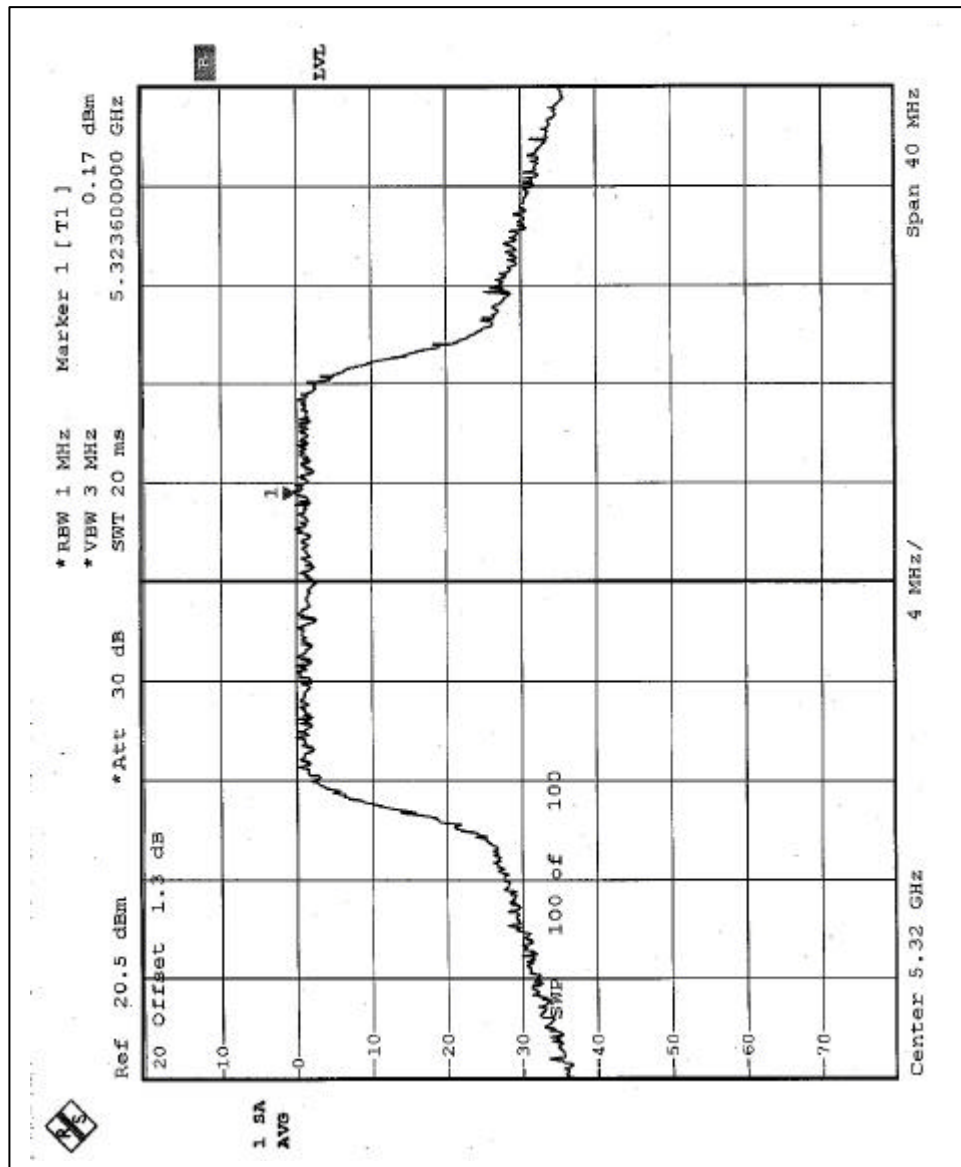


EUT	802.11a Cardbus	MODEL	A13QBF-PC
MODE	Turbo	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25eg. C, 66RH, 976 hPa	TESTED BY	Hank Chung

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1 MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5210	-5.31	4	PASS
2	5250	-5.34	4	PASS
3	5290	-5.01	11	PASS


CHANNEL 1

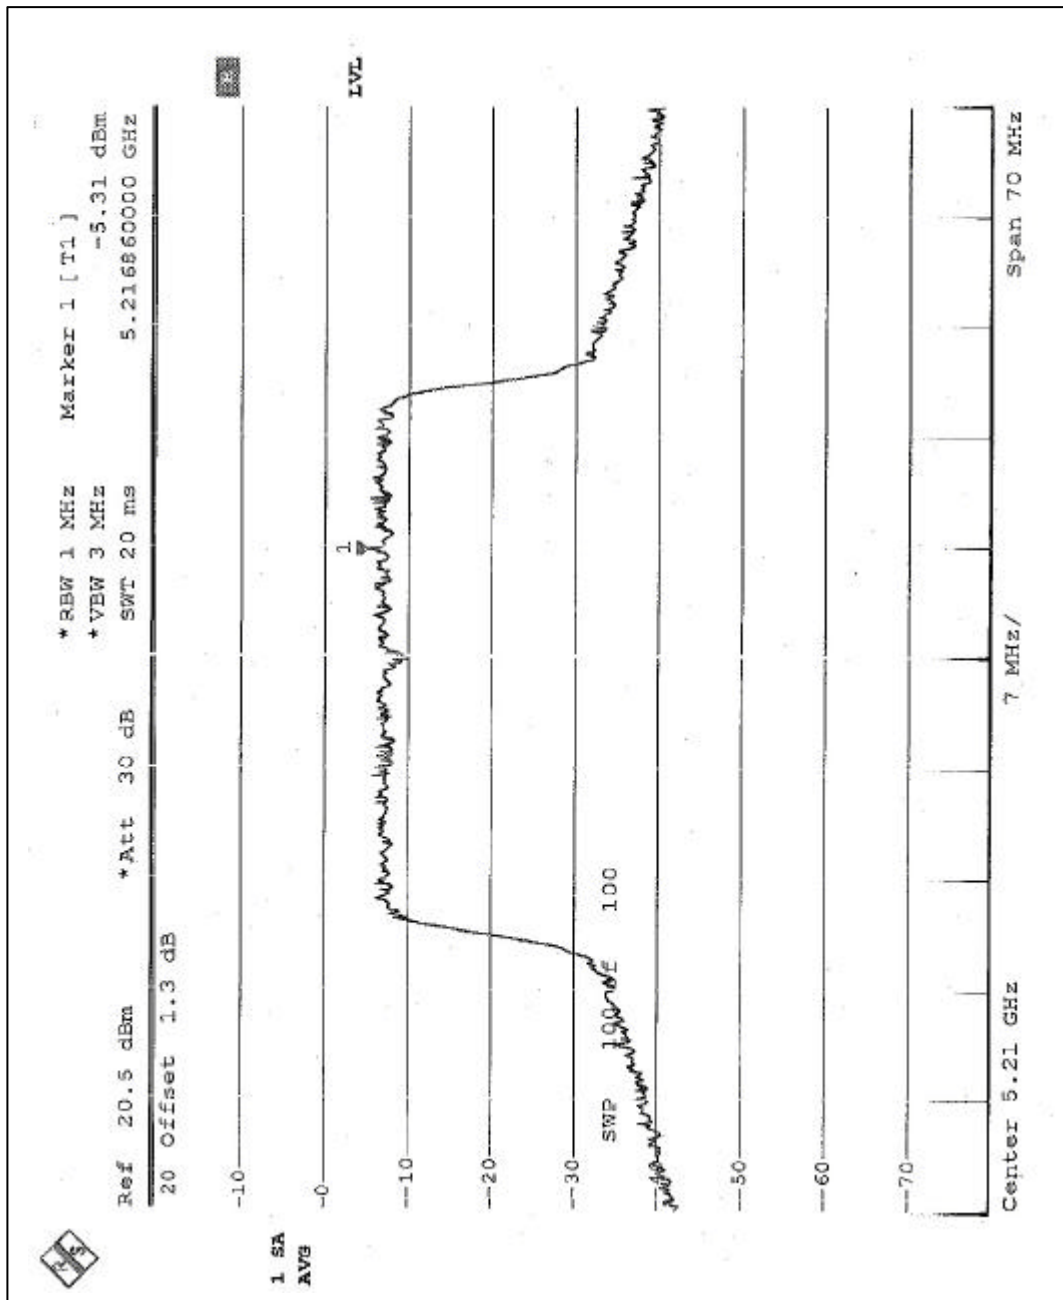

CHANNEL 2

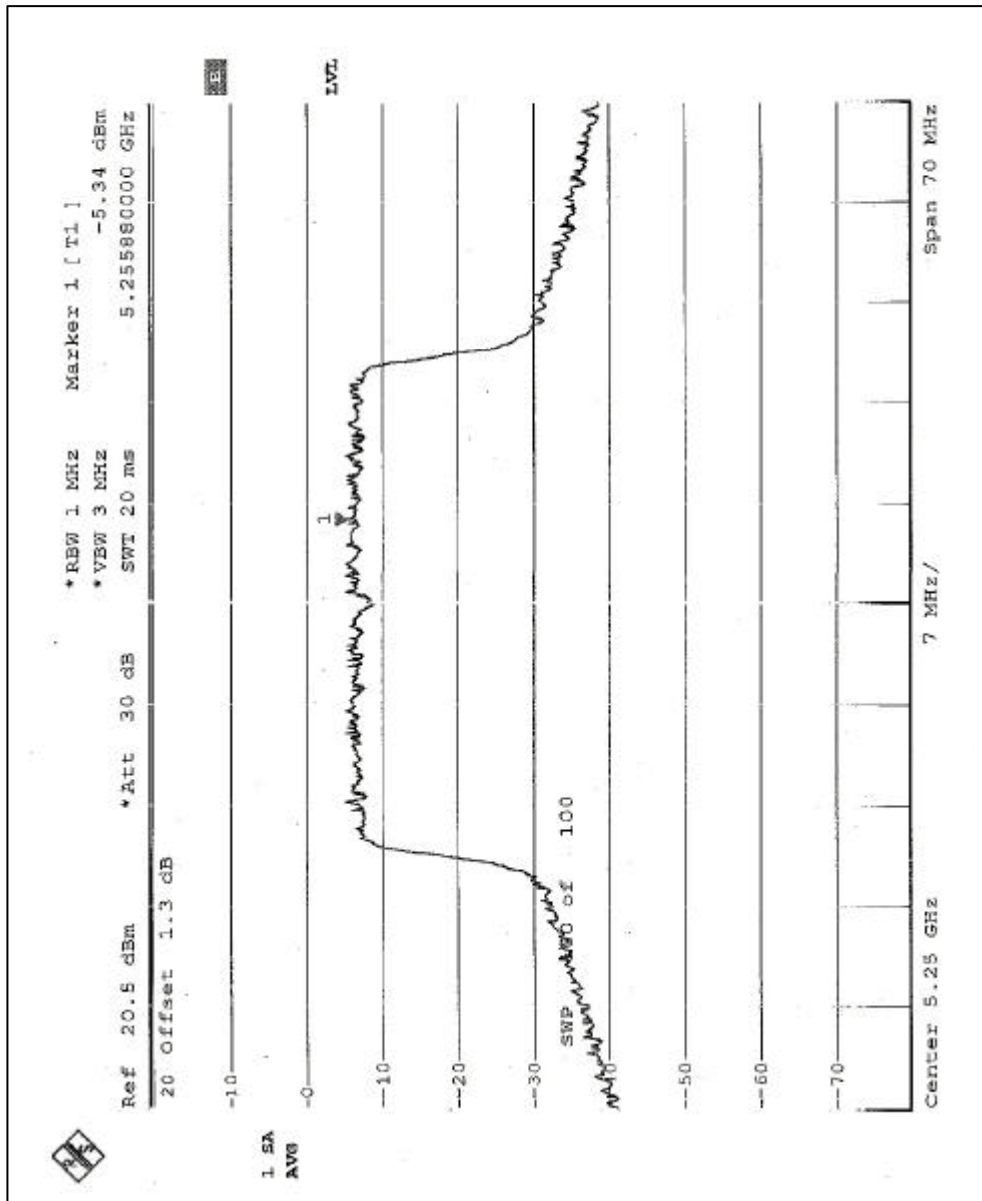

CHANNEL 3

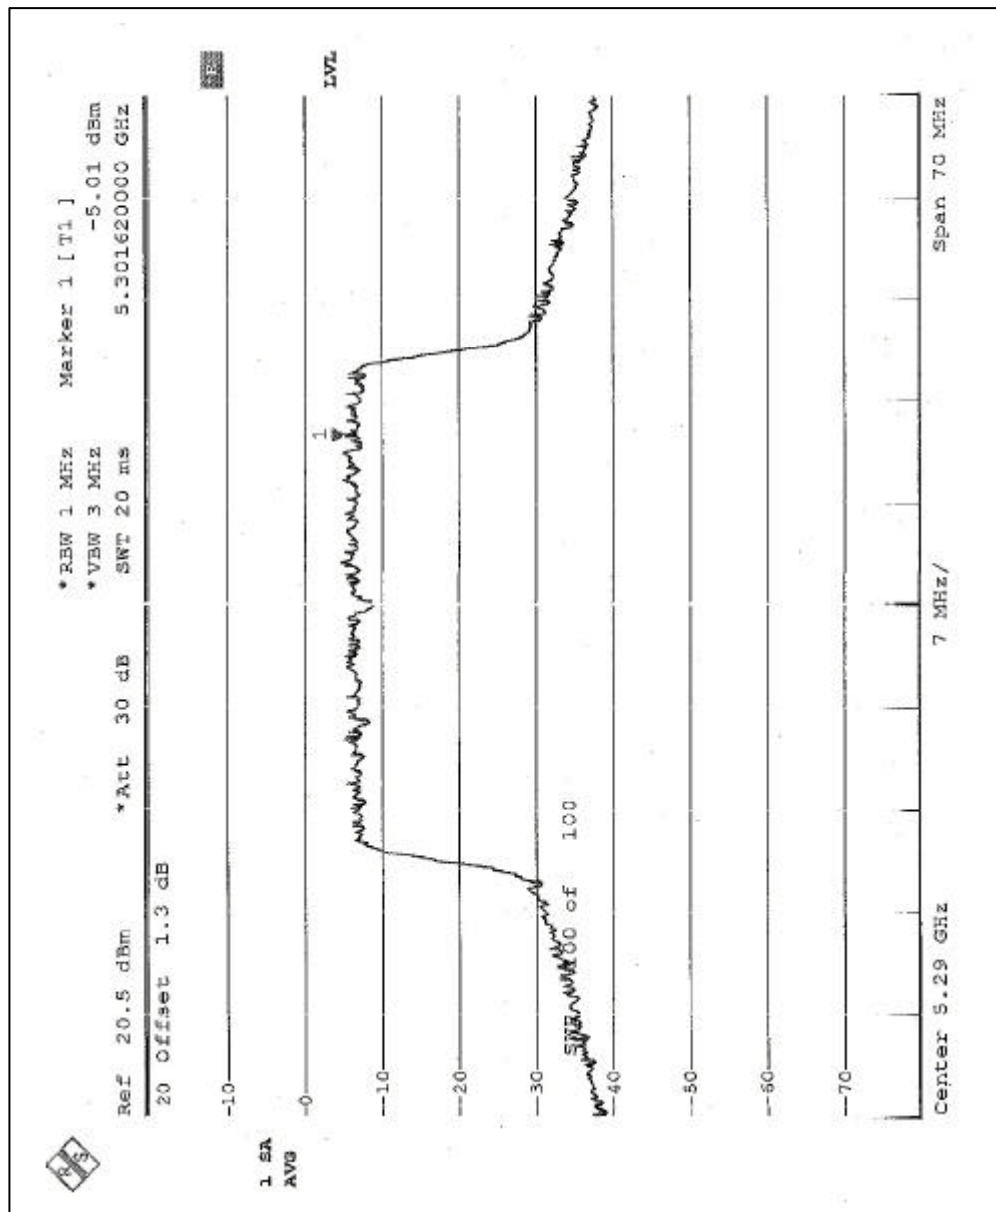

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

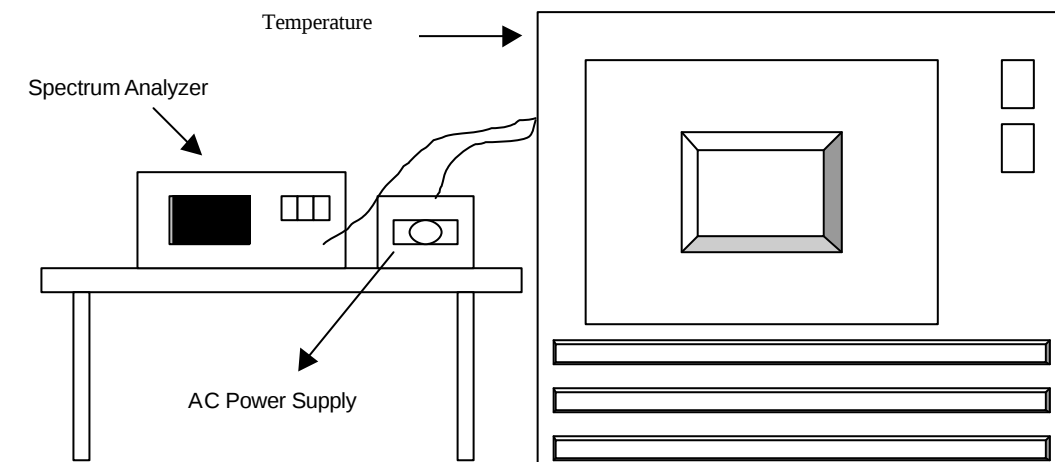

4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6

4.6.7 TEST RESULTS

Operating frequency: 5320MHz				Limit : $\pm 0.02\%$			
Temp. ()	Power supply (VAC)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	126.5	5319.9982	-0.000034%	5319.9981	-0.000036%	5319.9979	-0.000039%
	110.0	5319.9984	-0.000030%	5319.9982	-0.000034%	5319.9981	-0.000036%
	93.5	5319.9983	-0.000032%	5319.9981	-0.000036%	5319.9978	-0.000041%
40	126.5	5319.9942	-0.000109%	5319.9941	-0.000111%	5319.9939	-0.000115%
	110.0	5319.9944	-0.000105%	5319.9945	-0.000103%	5319.9947	-0.000100%
	93.5	5319.9942	-0.000109%	5319.9941	-0.000111%	5319.9940	-0.000113%
30	126.5	5319.9987	-0.000024%	5319.9986	-0.000026%	5319.9985	-0.000028%
	110.0	5319.9988	-0.000023%	5319.9987	-0.000024%	5319.9986	-0.000026%
	93.5	5319.9986	-0.000026%	5319.9985	-0.000028%	5319.9984	-0.000030%
20	126.5	5319.9991	-0.000017%	5319.9991	-0.000017%	5319.9990	-0.000019%
	110.0	5319.9992	-0.000015%	5319.9991	-0.000017%	5319.9990	-0.000019%
	93.5	5319.9991	-0.000017%	5319.999	-0.000019%	5319.9989	-0.000021%
10	126.5	5320.0014	0.000026%	5320.0015	0.000028%	5320.0017	0.000032%
	110.0	5320.0012	0.000023%	5320.0013	0.000024%	5320.0015	0.000028%
	93.5	5320.0011	0.000021%	5320.0012	0.000023%	5320.0013	0.000024%
0	126.5	5320.0002	0.000004%	5320.0004	0.000008%	5320.0008	0.000015%
	110.0	5320.0004	0.000008%	5320.0006	0.000011%	5320.0008	0.000015%
	93.5	5320.0003	0.000006%	5320.0005	0.000009%	5320.0007	0.000013%
-10	126.5	5320.003	0.000056%	5320.0029	0.000055%	5320.0028	0.000053%
	110.0	5320.0028	0.000053%	5320.0029	0.000055%	5320.0031	0.000058%
	93.5	5320.0027	0.000051%	5320.0029	0.000055%	5320.0031	0.000058%
-20	126.5	5320.0142	0.000267%	5320.0142	0.000267%	5320.0144	0.000271%
	110.0	5320.0140	0.000263%	5320.0141	0.000265%	5320.0143	0.000269%
	93.5	5320.0141	0.000265%	5320.0141	0.000265%	5320.0142	0.000267%
-30	126.5	5320.0168	0.000316%	5320.0169	0.000318%	5320.0172	0.000323%
	110.0	5320.0168	0.000316%	5320.0169	0.000318%	5320.0172	0.000323%
	93.5	5320.0169	0.000318%	5320.0170	0.000320%	5320.0172	0.000323%

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW of spectrum analyzer to 1MHz and VBW of spectrum analyzer to 300Hz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.




4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Average RBW=1MHz, VBW=300Hz) are attached on the following 4 pages.


Normal Mode: Channel 1 (5180 MHz)

The band edge emission plot on the following page shows 45.21dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 (normal mode) is 97.7dBuV/m, so the maximum field strength in restrict band is $97.7 - 45.21 = 52.49$ dBuV/m which is under 54dBuV/m limit.

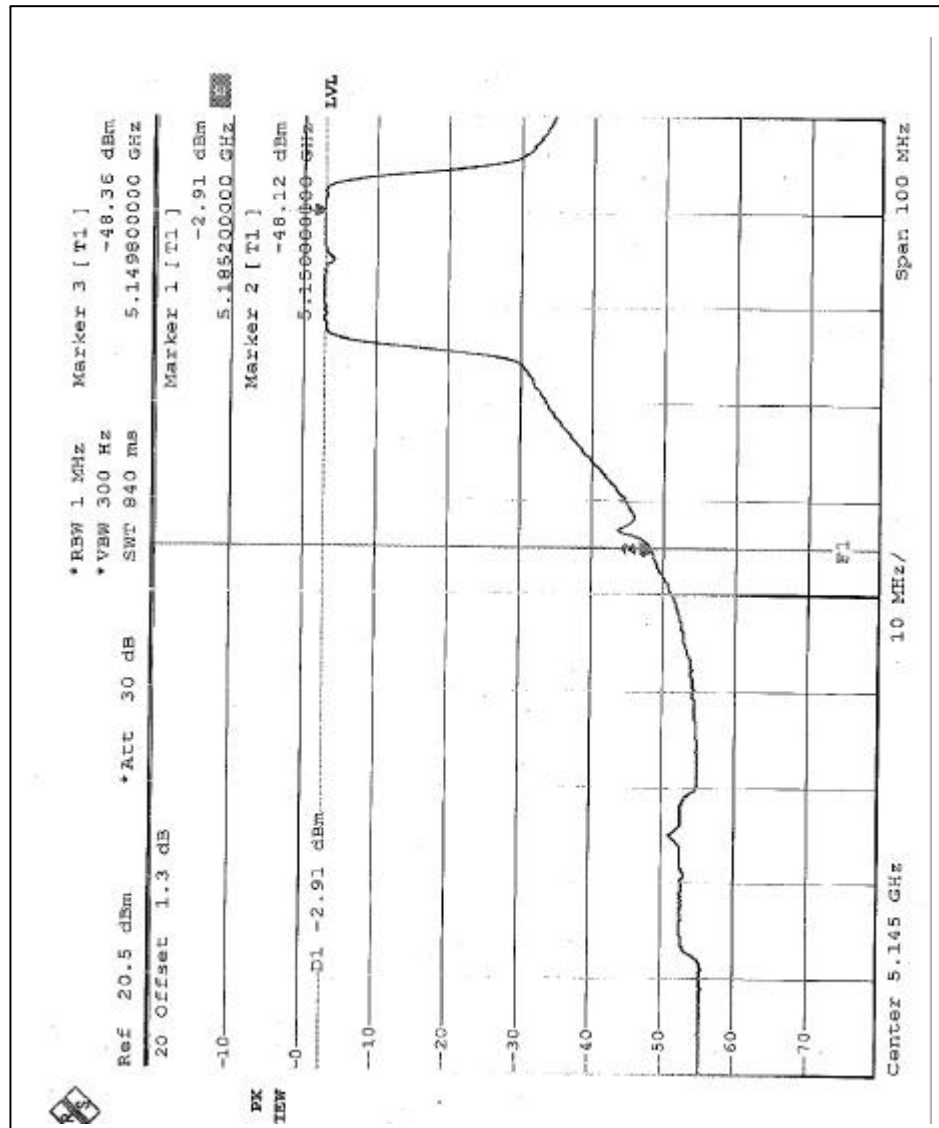


Normal Mode: Channel 8 (5320 MHz)

The band edge emission plot on the following page shows 45.34dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 (normal mode) is 99.1dBuV/m, so the maximum field strength in restrict band is $99.1 - 45.34 = 53.76$ dBuV/m which is under 54dBuV/m limit.

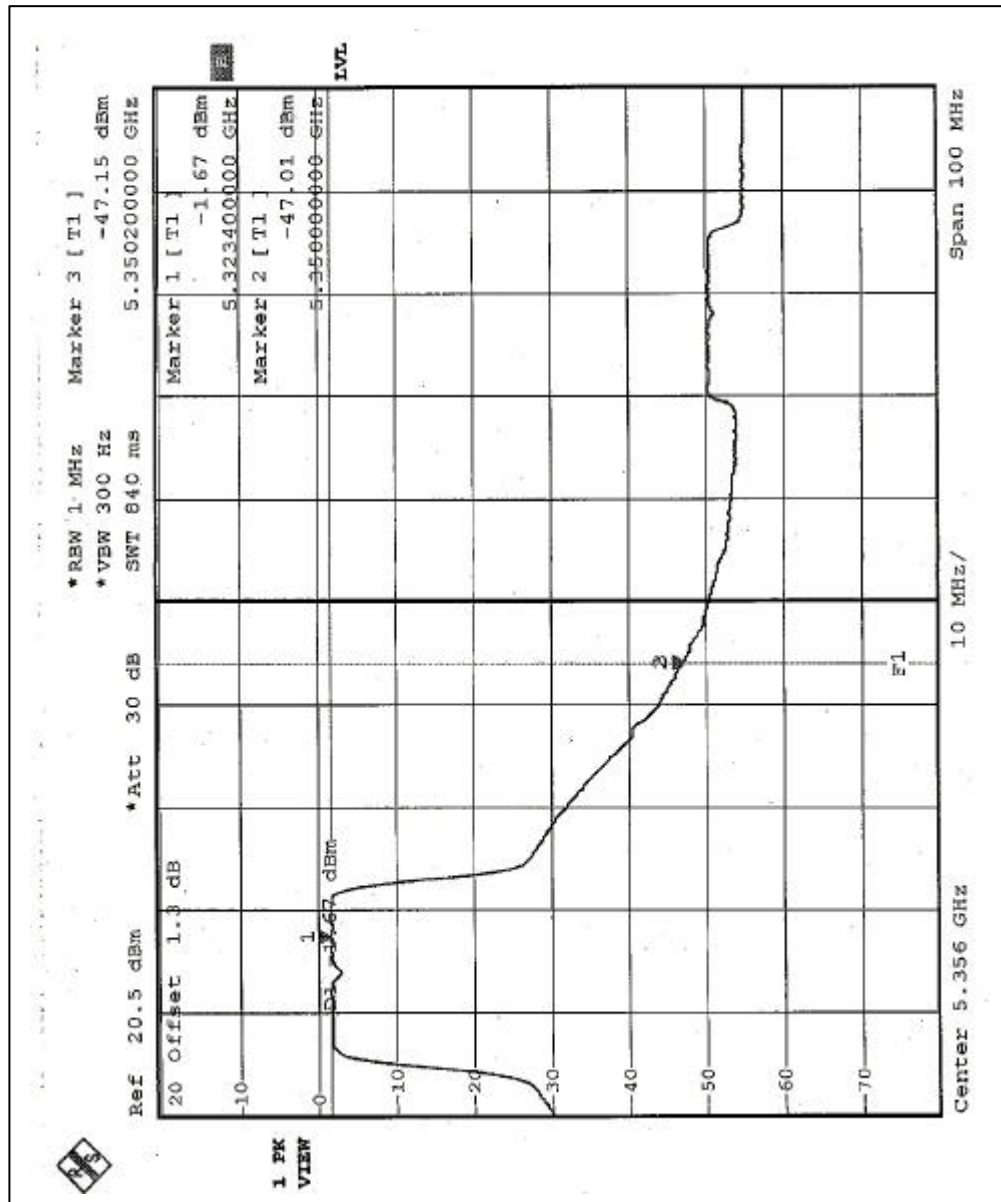


Turbo Mode: Channel 1 (5210 MHz)

The band edge emission plot on the following page shows 44.87dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 (turbo mode) is 95.00dBuV/m, so the maximum field strength in restrict band is $95.00 - 44.87 = 50.13$ dBuV/m which is under 54dBuV/m limit.

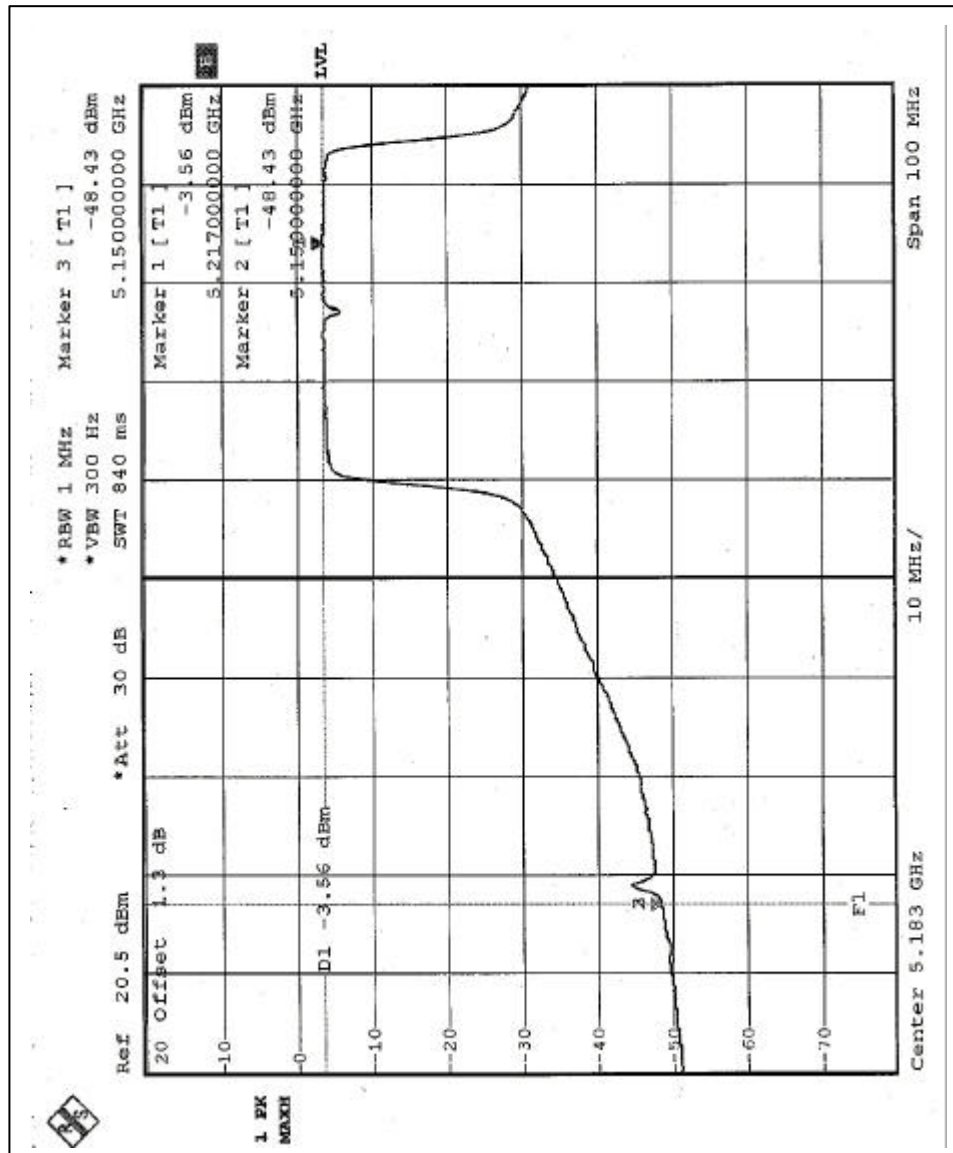

Turbo Mode: Channel 3 (5290 MHz)

The band edge emission plot on the following page shows 43.95dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 (turbo mode) is 97.0dBuV/m, so the maximum field strength in restrict band is $97.0 - 43.95 = 53.05$ dBuV/m which is under 54dBuV/m limit.

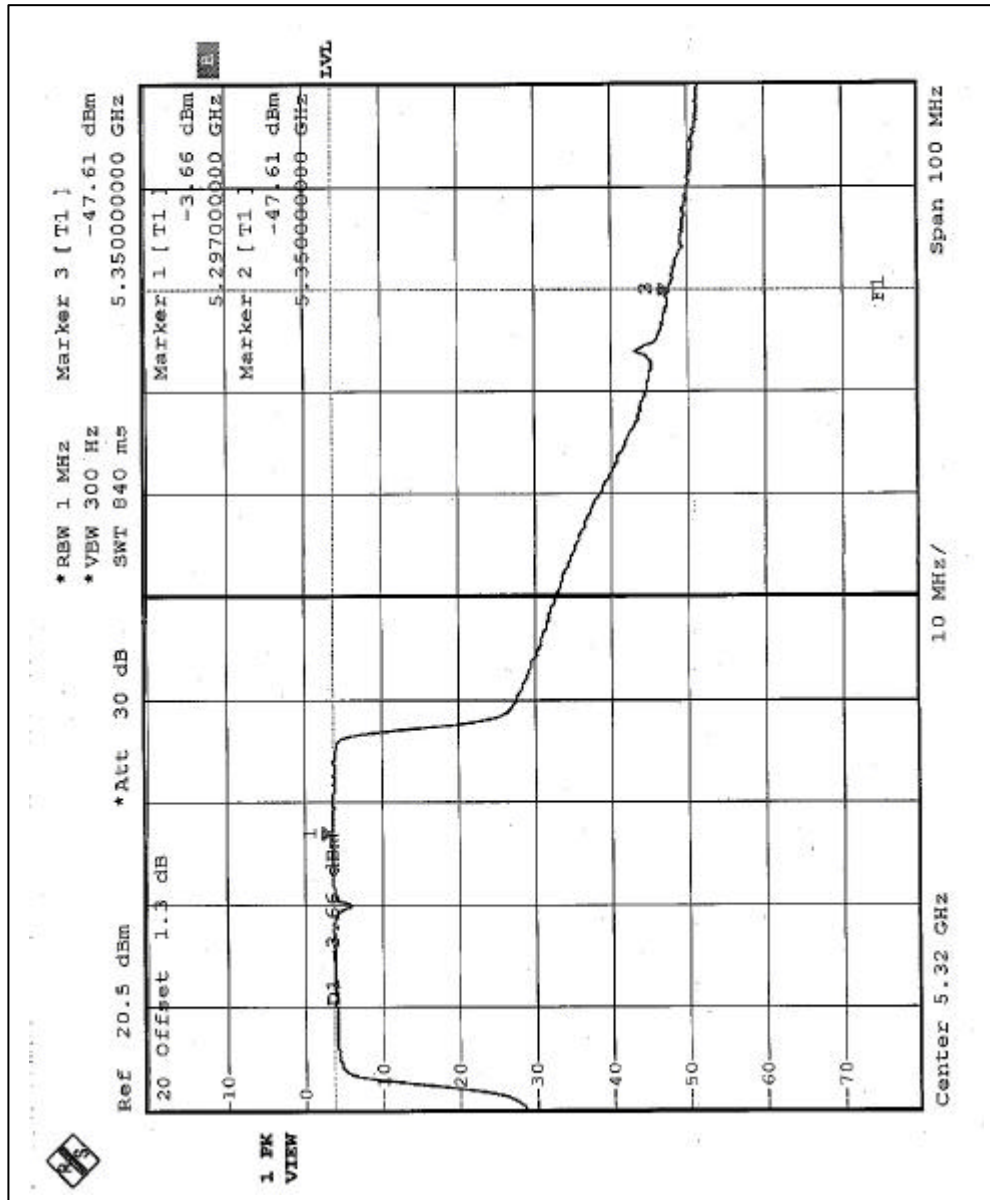



4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Omni-direction antenna with MMCX connector. The maximum Gain of the antenna is 5dBi

FOR FREQUENCY 5.725~5.850GHz**4.9 6dB BANDWIDTH MEASUREMENT****4.9.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT**

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.9.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.