



FCC TEST REPORT

REPORT NO.: RF920527R02B

MODEL NO.: WM601-I

RECEIVED: Jul. 10, 2003

TESTED: Jul. 16 to Sep. 05, 2003

APPLICANT: CYBERTAN TECHNOLOGY INC

ADDRESS: No.99, Park Avenue III, Science-based Industrial
Park, Hsinchu, Taiwan 308,R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



Lab Code: 200376-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST SETUP	10
4.1.4	EUT OPERATING CONDITIONS	11
4.1.5	TEST RESULTS.....	12
4.2	RADIATED EMISSION MEASUREMENT	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	14
4.2.2	TEST INSTRUMENTS	15
4.2.3	TEST PROCEDURES	16
4.2.4	TEST SETUP	17
4.2.5	EUT OPERATING CONDITIONS	17
4.2.6	TEST RESULTS (A)-Antenna 1.....	18
4.2.7	TEST RESULTS (A) - DSSS	20
4.2.8	TEST RESULTS (A) -OFDM.....	23
4.2.9	TEST RESULTS (B)-Antenna 3.....	26
4.2.10	TEST RESULTS (B) - DSSS	28
4.2.11	TEST RESULTS (B) -OFDM.....	31
4.3	MAXIMUM PEAK OUTPUT POWER	34
4.3.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	34
4.3.2	TEST INSTRUMENTS	34
4.3.3	TEST PROCEDURES	35
4.3.4	TEST SETUP	35
4.3.5	EUT OPERATING CONDITIONS	35
4.3.6	TEST RESULTS(A)-Antenna 1, DSSS	36
4.3.7	TEST RESULTS(A)-Antenna 1, OFDM.....	36
4.3.8	TEST RESULTS(B)-Antenna 3, DSSS	37



4.3.9	TEST RESULTS(B)-Antenna 3, OFDM.....	37
4.4	BAND EDGES MEASUREMENT.....	38
4.4.1	LIMITS OF BAND EDGES MEASUREMENT.....	38
4.4.2	TEST INSTRUMENTS.....	38
4.4.3	TEST PROCEDURE	38
4.4.4	EUT OPERATING CONDITION.....	38
4.4.5	TEST RESULTS - DSSS.....	39
4.4.6	TEST RESULTS-OFDM	42
4.5	ANTENNA REQUIREMENT.....	45
4.5.1	STANDARD APPLICABLE.....	45
4.5.2	ANTENNA CONNECTED CONSTRUCTION	45
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	46
6	INFORMATION ON THE TESTING LABORATORIES.....	49



1 CERTIFICATION

PRODUCT : 54G Wireless LAN module
BRAND NAME : CyberTAN
MODEL NO. : WM601-I
APPLICANT : CYBERTAN TECHNOLOGY INC
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Jul. 16 to Sep. 05, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Amanda Chu, **DATE:** Sep. 10, 2003
(Amanda Chu)

APPROVED BY: Eric Lin, **DATE:** Sep. 10, 2003
(Eric Lin, Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -19.3 dBuV at 0.201 MHz
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.1dBuV at 319.99MHz
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: This report is prepared for FCC class II permissive change. Only conducted emission, radiated emission, Maximum Peak Output Power and Band Edge Measurement conducted emission were presented in this test report.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	54G Wireless LAN module
MODEL NO.	WM601-I
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	CCK, OFDM, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	16.66dBm
ANTENNA TYPE	Dipole Antenna & PCB Antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

- This report is prepared for FCC class II permissive change. The difference compared with the original design is as the following:

◆ Add three new antennas:

No.	Model No.	Gain (dBi)	Antenna Type / Connector
1	IW-152RSB-117	4	Dipole antenna / with UFL connector (Internal) Reversed SMA connector (External)
2	IW-152RS8A-117	4	
* Model: IW-152RSB-117 & IW-152RS8A-117 the models are identical except for their model number.			
3	WPG-1000 Sn 4/L	0	PCB antenna / with UFL connector

- The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
- The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
- Only conducted emission, radiated emission, Maximum Peak Output Power and Band Edge Measurement conducted emission were presented in this test report.
- For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test. And test result (A) is for antenna 1, test result (B) is for antenna 3, which were mentioned on section 3.1.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 54G Wireless LAN module. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.


3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	Compaq	N800C	470048-515	FCC DoC
2	PRINTER	EPSON	LQ-300+	DCGY017079	FCC DoC

No.	Signal cable description
1	NA
2	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

Note: 1. All power cords of the above support units are unshielded (1.8m).

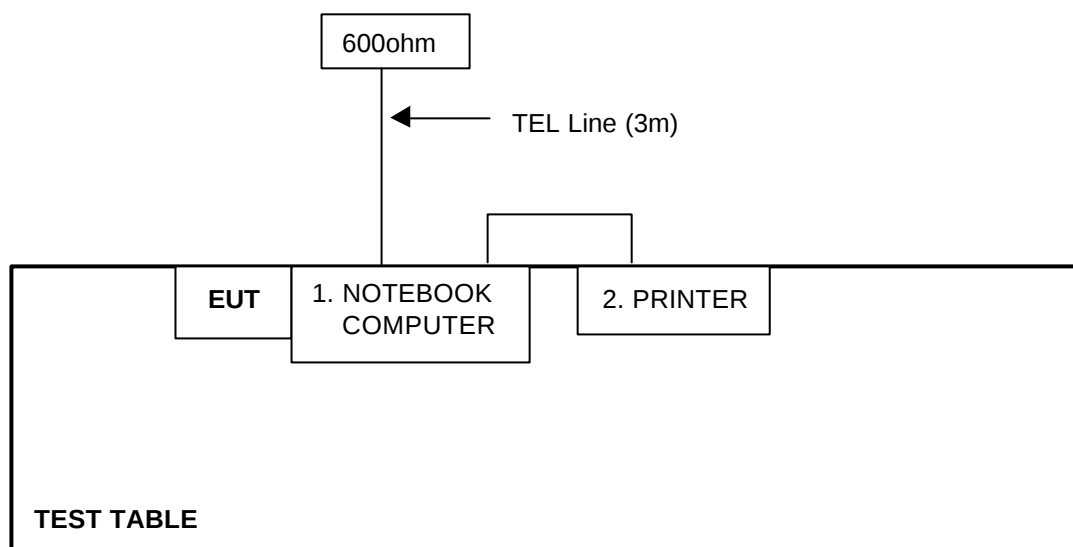

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Nov. 17, 2003
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 13, 2003
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2004
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2004
Terminator(for KYORITSU)	50	3	Apr. 11, 2004
Software	Cond-V2e	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

3. TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 TEST SETUP

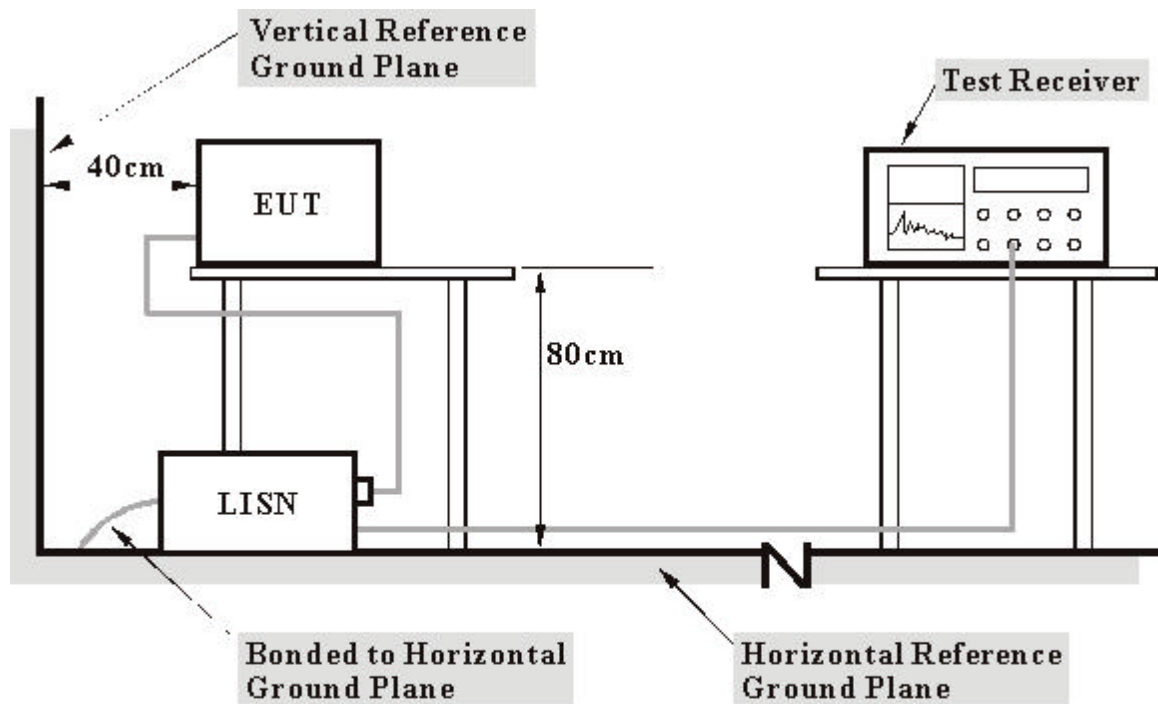

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.4 EUT OPERATING CONDITIONS


- a. Plug the EUT into the support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. Notebook computer sends "H" messages to printer, and the printer prints them on paper.
- d. Notebook computer plays audio messages to its own speaker continuously.

4.1.5 TEST RESULTS

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	27 deg. C, 69%RH, 968 hPa	TESTED BY	Larry Peng

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.20	42.49	-	42.69	-	63.74	53.74	-21.05	-
2	0.267	0.20	40.02	-	40.22	-	61.20	51.20	-20.98	-
3	0.466	0.21	34.63	-	34.84	-	56.58	46.58	-21.74	-
4	2.986	0.35	31.33	-	31.68	-	56.00	46.00	-24.32	-
5	13.926	1.04	29.75	-	30.79	-	60.00	50.00	-29.21	-
6	18.320	1.17	31.34	-	32.51	-	60.00	50.00	-27.49	-


- NOTES: (1) "*": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

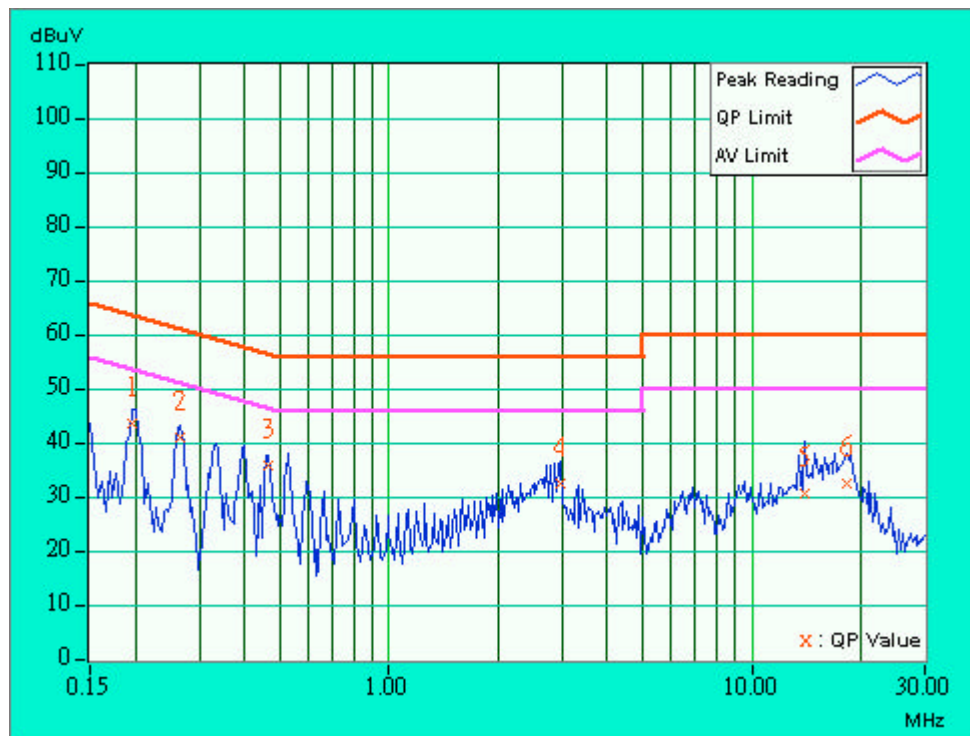

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	27 deg. C, 69%RH, 968 hPa	TESTED BY	Larry Peng

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.20	44.35	-	44.55	-	63.58	53.58	-19.03	-
2	0.267	0.20	41.14	-	41.34	-	61.20	51.20	-19.86	-
3	0.400	0.20	38.36	-	38.56	-	57.85	47.85	-19.29	-
4	2.861	0.34	28.50	-	28.84	-	56.00	46.00	-27.16	-
5	6.566	0.53	29.85	-	30.38	-	60.00	50.00	-29.62	-
6	17.703	0.90	31.83	-	32.73	-	60.00	50.00	-27.27	-

- NOTES: (1) "*": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

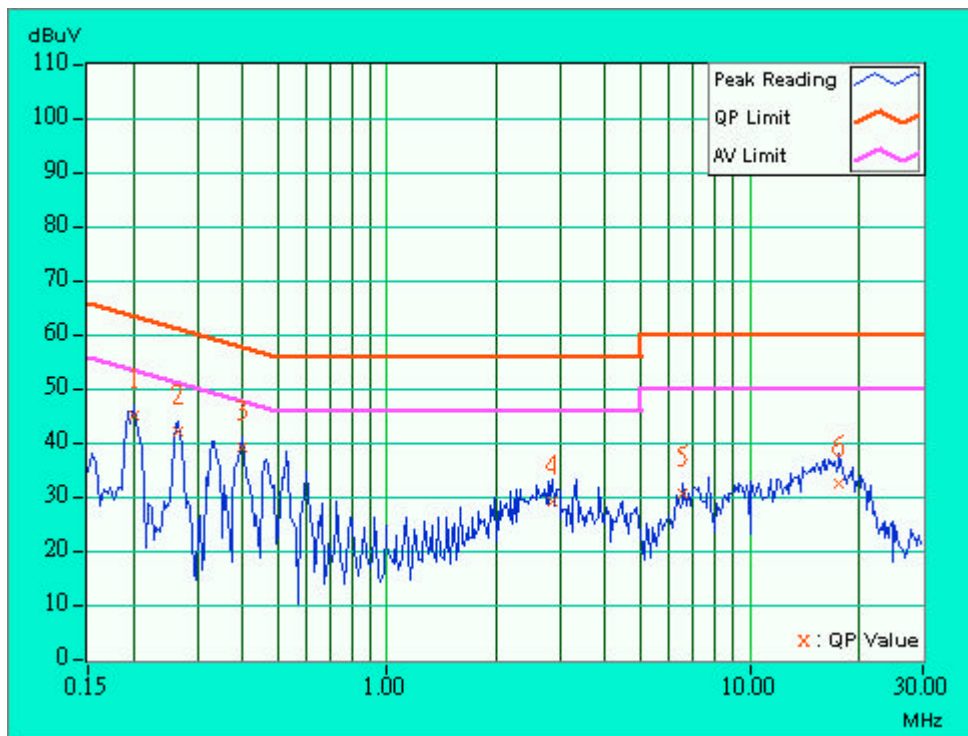



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Jul. 14, 2004
ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2004
CHASE RF Pre_Amplifier	CPA9232	1057	Apr. 24, 2004
HP Pre_Amplifier	8449B	3008A01281	June 27, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Nov. 03, 2003
CHASE Broadband Antenna	CBL6111c	2730	Jul 17, 2004
Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Jul. 31, 2003
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Jul. 29, 2003
RF CABLE (Chaintek) 1GHz-20GHz	Ak 9515-D	001	Aug, 20.2003
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Nov. 5, 2003
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.
7. The CANADA Site Registration No. is IC 3789-C.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

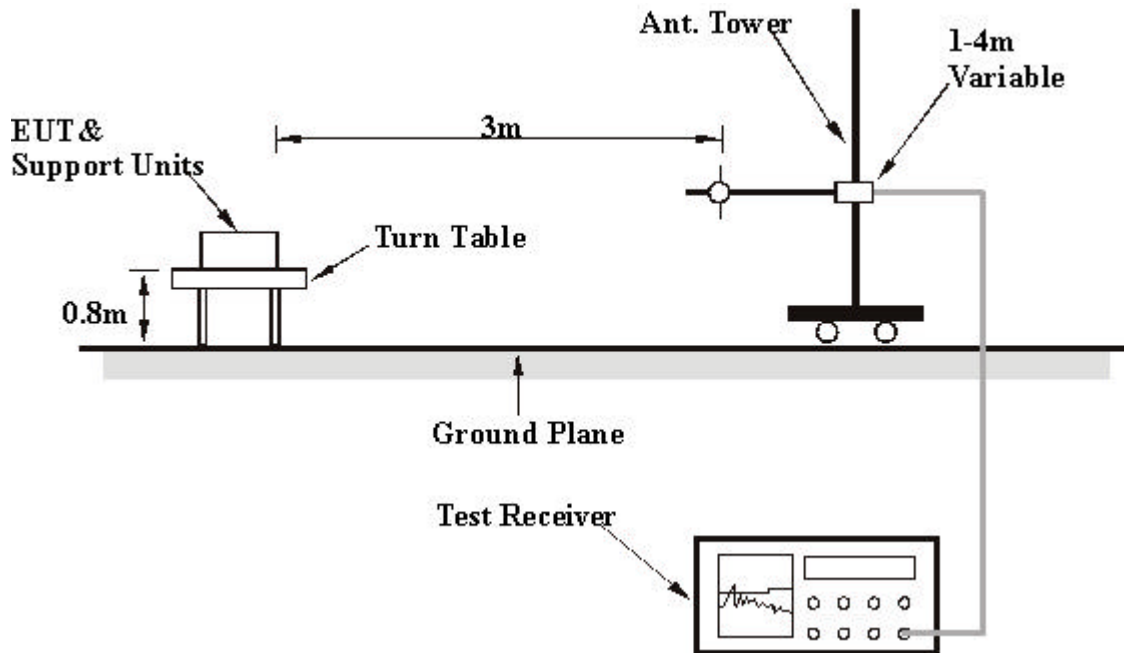

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS (A)-Antenna 1

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 59 % RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	35.7 QP	43.50	-7.80	1.73 H	14	24.20	11.50
2	160.01	34.2 QP	43.50	-9.30	1.63 H	9	23.90	10.30
3	200.01	41.5 QP	43.50	-2.00	1.66 H	236	32.50	9.00
4	240.00	42.7 QP	46.00	-3.30	1.79 H	63	30.90	11.80
5	280.11	32.8 QP	46.00	-13.20	1.61 H	352	19.30	13.50
6	320.12	44.2 QP	46.00	-1.80	1.45 H	65	29.60	14.60
7	352.11	39.4 QP	46.00	-6.60	1.01 H	223	23.90	15.50
8	360.02	38.0 QP	46.00	-8.00	1.06 H	321	22.20	15.70
9	400.03	43.0 QP	46.00	-3.00	1.86 H	285	25.90	17.10
10	440.00	34.9 QP	46.00	-11.10	1.08 H	5	16.90	18.00
11	480.02	39.5 QP	46.00	-6.50	1.32 H	68	20.60	18.90
12	520.00	36.1 QP	46.00	-9.90	1.77 H	54	16.70	19.40
13	560.21	37.9 QP	46.00	-8.10	1.09 H	265	16.40	21.50
14	600.01	42.5 QP	46.00	-3.50	1.09 H	87	21.60	20.90
15	640.21	40.4 QP	46.00	-5.60	1.69 H	222	18.50	21.90
16	680.00	37.1 QP	46.00	-8.90	1.25 H	47	14.90	22.20
17	720.00	40.2 QP	46.00	-5.80	1.15 H	67	16.90	23.30
18	760.00	39.4 QP	46.00	-6.60	1.57 H	55	15.70	23.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 59 % RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.03	27.0 QP	40.00	-13.00	1.01 V	49	21.80	5.20
2	119.98	30.7 QP	43.50	-12.80	1.29 V	352	19.20	11.50
3	240.01	28.0 QP	46.00	-18.00	1.56 V	57	16.20	11.80
4	320.06	40.2 QP	46.00	-5.80	1.87 V	147	25.60	14.60
5	352.00	42.5 QP	46.00	-3.50	1.68 V	59	27.00	15.50
6	440.21	36.6 QP	46.00	-9.40	1.04 V	48	18.60	18.00
7	480.10	35.8 QP	46.00	-10.20	1.50 V	241	16.90	18.90
8	520.01	35.2 QP	46.00	-10.80	1.65 V	309	15.80	19.40
9	560.03	39.9 QP	46.00	-6.10	1.00 V	4	18.40	21.50
10	600.00	40.2 QP	46.00	-5.80	1.01 V	277	19.30	20.90
11	640.01	41.2 QP	46.00	-4.80	1.25 V	24	19.40	21.90
12	720.02	36.6 QP	46.00	-9.40	1.41 V	73	13.20	23.30
13	759.91	34.6 QP	46.00	-11.40	1.16 V	17	10.90	23.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

4.2.7 TEST RESULTS (A) - DSSS

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.3 PK	74.00	-20.70	1.69 H	35	23.50	29.80
1	2390.00	41.1 AV	54.00	-12.90	1.69 H	35	11.30	29.80
2	*2412.00	99.3 PK			1.08 H	5	69.40	29.90
2	*2412.00	92.1 AV			1.08 H	5	62.20	29.90
3	2483.50	53.3 PK	74.00	-20.70	1.35 H	2	23.20	30.10
3	2483.50	39.6 AV	54.00	-14.40	1.35 H	2	9.50	30.10
4	4824.00	50.3 PK	74.00	-23.70	1.54 H	209	14.00	36.20
5	7236.00	46.5 PK	74.00	-27.50	1.50 H	135	4.90	41.70
6	9648.00	47.9 PK	74.00	-26.10	1.20 H	222	3.00	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.4 PK	74.00	-14.60	1.33 V	201	29.60	29.80
1	2390.00	49.5 AV	54.00	-4.50	1.33 V	201	19.60	29.80
2	*2412.00	108.8 PK			1.38 V	199	78.90	29.90
2	*2412.00	101.8 AV			1.38 V	199	71.90	29.90
3	2483.50	53.7 PK	74.00	-20.30	1.36 V	247	23.50	30.10
3	2483.50	44.4 AV	54.00	-9.60	1.36 V	247	14.20	30.10
4	4824.00	55.7 PK	74.00	-18.30	1.59 V	267	19.50	36.20
4	4824.00	51.3 AV	54.00	-2.70	1.59 V	267	15.00	36.20
5	7236.00	54.0 PK	74.00	-20.00	1.54 V	74	12.30	41.70
5	7236.00	42.3 AV	54.00	-11.70	1.54 V	74	0.60	41.70
6	9648.00	52.5 PK	74.00	-21.50	1.49 V	254	7.60	44.90
6	9648.00	44.4 AV	54.00	-9.60	1.49 V	254	-0.50	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency.



EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.1 PK	74.00	-23.90	1.47 H	54	20.30	29.80
1	2390.00	37.0 AV	54.00	-17.00	1.47 H	54	20.30	29.80
2	*2437.00	99.0 PK			1.33 H	89	69.00	30.00
2	*2437.00	93.2 AV			1.33 H	89	63.20	29.80
3	2483.50	50.8 PK	74.00	-23.20	1.39 H	6	20.60	30.10
3	2483.50	39.7 AV	54.00	-14.30	1.39 H	6	20.60	30.10
4	4874.00	50.7 PK	74.00	-23.30	1.69 H	14	14.20	36.50
4	4874.00	44.6 AV	54.00	-9.40	1.69 H	14	14.20	36.50
5	7311.00	47.1 PK	74.00	-26.90	1.58 H	6	5.40	41.80
5	7311.00	36.1 AV	54.00	-17.90	1.58 H	6	5.40	41.80
6	9748.00	47.9 PK	74.00	-26.10	1.08 H	96	3.20	44.60
6	9748.00	39.4 AV	54.00	-14.60	1.08 H	96	3.20	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.3 PK	74.00	-17.70	1.54 V	24	26.50	29.80
1	2390.00	45.0 AV	54.00	-9.00	1.54 V	24	15.20	29.80
2	*2437.00	109.2 PK			1.54 V	54	79.20	30.00
2	*2437.00	101.8 AV			1.54 V	54	71.80	30.00
3	2483.50	51.7 PK	74.00	-22.30	1.63 V	357	21.50	30.10
3	2483.50	42.4 AV	54.00	-11.60	1.63 V	357	12.20	30.10
4	4874.00	55.0 PK	74.00	-19.00	1.60 V	269	18.50	36.50
4	4874.00	51.3 AV	54.00	-2.70	1.60 V	269	14.90	36.50
5	7311.00	52.5 PK	74.00	-21.50	1.40 V	20	10.70	41.80
5	7311.00	43.4 AV	54.00	-10.60	1.40 V	20	1.70	41.80
6	9748.00	52.4 PK	74.00	-21.60	1.39 V	62	7.70	44.60
6	9748.00	44.8 AV	54.00	-9.20	1.39 V	62	0.20	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.2 PK	74.00	-23.80	1.50 H	202	20.40	29.80
1	2390.00	39.0 AV	54.00	-15.00	1.50 H	202	20.40	29.80
2	*2462.00	99.3 PK			1.68 H	59	69.20	30.10
2	*2462.00	92.4 AV			1.68 H	59	62.40	29.80
3	2483.50	56.5 PK	74.00	-17.50	1.34 H	249	26.40	30.10
3	2483.50	42.4 AV	54.00	-11.60	1.34 H	249	12.30	30.10
4	4924.00	51.0 PK	74.00	-23.00	1.33 H	269	14.30	36.70
4	4924.00	44.9 AV	54.00	-9.10	1.33 H	269	8.20	30.10
5	7386.00	47.5 PK	74.00	-26.50	1.58 H	5	5.70	41.80
5	7386.00	37.30 AV	54.00	-16.70	1.58 H	5	5.70	41.80
6	9848.00	47.8 PK	74.00	-26.20	1.69 H	265	3.40	44.40
6	9848.00	39.5 AV	54.00	-14.50	1.69 H	265	3.40	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.3 PK	74.00	-20.70	1.08 V	64	23.50	29.80
1	2390.00	44.0 AV	54.00	-10.00	1.08 V	64	14.20	29.80
2	*2462.00	109.3 PK			1.31 V	198	79.20	30.10
2	*2462.00	102.4 AV			1.31 V	198	72.40	30.10
3	2483.50	59.8 PK	74.00	-14.20	1.29 V	98	29.70	30.10
3	2483.50	50.1 AV	54.00	-3.90	1.29 V	98	20.00	30.10
4	4924.00	57.2 PK	74.00	-16.80	1.65 V	325	20.50	36.70
4	4924.00	51.9 AV	54.00	-2.10	1.65 V	325	15.20	36.70
5	7386.00	53.2 PK	74.00	-20.80	1.44 V	20	11.40	41.80
5	7386.00	42.6 AV	54.00	-11.40	1.44 V	20	0.70	41.80
6	9848.00	52.5 PK	74.00	-21.50	1.35 V	2	8.10	44.40
6	9848.00	43.9 AV	54.00	-10.10	1.35 V	2	-0.50	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.8 TEST RESULTS (A) -OFDM

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.4 PK	74.00	-16.60	1.63 H	321	27.60	29.80
1	2390.00	44.1 AV	54.00	-9.90	1.63 H	321	14.30	29.80
2	*2412.00	94.0 PK			1.11 H	352	64.20	29.90
2	*2412.00	84.1 AV			1.11 H	352	54.20	29.90
3	2483.50	49.8 PK	74.00	-24.20	1.67 H	58	19.70	30.10
3	2483.50	40.3 AV	54.00	-13.70	1.67 H	58	19.70	30.10
4	4824.00	49.9 PK	74.00	-24.10	1.19 H	111	13.70	36.20
4	4824.00	46.1 AV	54.00	-7.90	1.19 H	111	13.70	36.20
5	7236.00	48.6 PK	74.00	-25.40	1.38 H	333	6.90	41.70
5	7236.00	39.6 AV	54.00	-14.40	1.38 H	333	6.90	41.70
6	9648.00	54.7 PK	74.00	-19.30	1.29 H	164	9.80	44.90
6	9648.00	41.7 AV	54.00	-12.30	1.29 H	164	-3.20	30.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.00	-10.70	1.35 V	273	33.50	29.80
1	2390.00	49.8 AV	54.00	-4.20	1.35 V	273	20.00	29.80
2	*2412.00	101.9 PK			1.79 V	58	72.00	29.90
2	*2412.00	93.5 AV			1.79 V	58	63.60	29.90
3	2483.50	54.7 PK	74.00	-19.30	1.25 V	247	24.60	30.10
3	2483.50	45.4 AV	54.00	-8.60	1.25 V	247	15.20	30.10
4	4824.00	52.3 PK	74.00	-21.70	1.59 V	325	16.00	36.20
4	4824.00	50.1 AV	54.00	-3.90	1.59 V	325	13.80	36.20
5	7236.00	55.9 PK	74.00	-18.10	1.85 V	325	14.20	41.70
5	7236.00	46.0 AV	54.00	-8.00	1.85 V	325	4.30	41.70
6	9648.00	53.2 PK	74.00	-20.80	1.76 V	85	8.30	44.90
6	9648.00	46.9 AV	54.00	-7.10	1.76 V	85	2.00	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.5 PK	74.00	-23.50	1.58 H	47	20.70	29.80
1	2390.00	39.9 AV	54.00	-14.10	1.58 H	47	20.70	29.80
2	*2437.00	97.1 PK			1.56 H	6	67.10	30.00
2	*2437.00	85.6 AV			1.56 H	6	55.60	29.80
3	2483.50	49.4 PK	74.00	-24.60	1.53 H	352	19.30	30.10
3	2483.50	39.9 AV	54.00	-14.10	1.53 H	352	19.30	30.10
4	4874.00	51.7 PK	74.00	-22.30	1.25 H	64	15.20	36.50
4	4874.00	46.4 AV	54.00	-7.60	1.25 H	64	9.90	30.00
5	7311.00	49.9 PK	74.00	-24.10	1.47 H	58	8.10	41.80
5	7311.00	38.9 AV	54.00	-15.10	1.47 H	58	8.10	41.80
6	9748.00	55.3 PK	74.00	-18.70	1.24 H	128	10.70	44.60
6	9748.00	42.5 AV	54.00	-11.50	1.24 H	128	-2.10	30.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.4 PK	74.00	-17.60	1.68 V	57	26.60	29.80
1	2390.00	42.0 AV	54.00	-12.00	1.68 V	57	12.20	29.80
2	*2437.00	103.1 PK			1.96 V	32	73.10	30.00
2	*2437.00	93.9 AV			1.96 V	32	63.90	30.00
3	2483.50	55.9 PK	74.00	-18.10	1.86 V	254	25.80	30.10
3	2483.50	44.4 AV	54.00	-9.60	1.86 V	254	14.30	30.10
4	4874.00	53.9 PK	74.00	-20.10	1.88 V	57	17.40	36.50
4	4874.00	50.4 AV	54.00	-3.60	1.88 V	57	13.90	36.50
5	7311.00	57.5 PK	74.00	-16.50	1.17 V	87	15.70	41.80
5	7311.00	46.6 AV	54.00	-7.40	1.17 V	87	4.80	41.80
6	9748.00	54.5 PK	74.00	-19.50	1.71 V	347	9.90	44.60
6	9748.00	47.4 AV	54.00	-6.60	1.71 V	347	2.80	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.3 PK	74.00	-24.70	1.65 H	32	19.50	29.80
1	2390.00	38.3 AV	54.00	-15.70	1.65 H	32	19.50	29.80
2	*2462.00	95.5 PK			1.19 H	356	65.40	30.10
2	*2462.00	84.9 AV			1.19 H	356	54.80	29.80
3	2483.50	57.3 PK	74.00	-16.70	1.41 H	107	27.10	30.10
3	2483.50	43.4 AV	54.00	-10.60	1.41 H	107	13.20	30.10
4	4924.00	51.9 PK	74.00	-22.10	1.69 H	64	15.20	36.70
4	4924.00	47.6 AV	54.00	-6.40	1.69 H	64	10.90	30.10
5	7386.00	50.2 PK	74.00	-23.80	1.46 H	268	8.40	41.80
5	7386.00	40.2 AV	54.00	-13.80	1.46 H	268	8.40	41.80
6	9848.00	54.6 PK	74.00	-19.40	1.24 H	216	10.20	44.40
6	9848.00	42.0 AV	54.00	-12.00	1.24 H	216	-2.40	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.4 PK	74.00	-21.60	1.56 V	358	22.60	29.80
1	2390.00	42.3 AV	54.00	-11.70	1.56 V	358	12.50	29.80
2	*2462.00	103.9 PK			1.80 V	247	73.80	30.10
2	*2462.00	95.0 AV			1.80 V	247	64.90	30.10
3	2483.50	64.3 PK	74.00	-9.70	1.87 V	65	34.20	30.10
3	2483.50	52.0 AV	54.00	-2.00	1.87 V	65	21.90	30.10
4	4924.00	54.1 PK	74.00	-19.90	1.68 V	359	17.40	36.70
4	4924.00	51.6 AV	54.00	-2.40	1.68 V	359	14.90	36.70
5	7386.00	58.5 PK	74.00	-15.50	1.79 V	68	16.70	41.80
5	7386.00	47.6 AV	54.00	-13.80	1.79 V	68	5.80	41.80
6	9848.00	54.3 PK	74.00	-19.70	1.75 V	2	9.90	44.40
6	9848.00	47.8 AV	54.00	-6.20	1.75 V	2	3.40	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.2.9 TEST RESULTS (B)-Antenna 3

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 59 % RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.00	25.6 QP	40.00	-14.40	1.43 H	9	7.50	18.20
2	80.00	27.5 QP	40.00	-12.50	1.43 H	356	19.90	7.60
3	159.99	31.4 QP	43.50	-12.10	1.43 H	342	21.10	10.30
4	200.01	37.3 QP	43.50	-6.20	1.61 H	0	28.30	9.00
5	240.01	41.5 QP	46.00	-4.50	1.12 H	339	29.60	11.80
6	287.99	31.3 QP	46.00	-14.70	1.00 H	10	17.40	13.90
7	319.99	44.9 QP	46.00	-1.10	1.07 H	229	30.30	14.60
8	351.99	38.7 QP	46.00	-7.30	1.08 H	241	23.20	15.50
9	360.00	35.7 QP	46.00	-10.30	1.00 H	180	20.00	15.70
10	399.99	32.9 QP	46.00	-13.10	1.02 H	316	15.80	17.10
11	439.99	33.4 QP	46.00	-12.60	1.00 H	242	15.40	18.00
12	479.99	32.4 QP	46.00	-13.60	1.00 H	170	13.50	18.90
13	520.00	34.5 QP	46.00	-11.50	1.00 H	226	15.10	19.40
14	560.01	33.1 QP	46.00	-12.90	1.00 H	133	11.60	21.50
15	599.98	36.0 QP	46.00	-10.00	1.44 H	118	15.10	20.90
16	640.00	38.1 QP	46.00	-7.90	1.32 H	46	16.30	21.90
17	679.98	37.4 QP	46.00	-8.60	1.44 H	61	15.10	22.20
18	720.00	41.0 QP	46.00	-5.00	1.29 H	149	17.70	23.30
19	800.00	37.3 QP	46.00	-8.70	1.00 H	276	13.60	23.70
20	840.00	38.1 QP	46.00	-7.90	1.61 H	62	13.30	24.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 59 % RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.99	28.5 QP	40.00	-11.50	1.44 V	0	10.30	18.20
2	80.00	31.4 QP	40.00	-8.60	1.61 V	240	23.80	7.60
3	160.00	26.4 QP	43.50	-17.10	1.32 V	193	16.10	10.30
4	200.01	26.9 QP	43.50	-16.60	1.00 V	58	17.90	9.00
5	239.99	29.3 QP	46.00	-16.70	1.01 V	242	17.50	11.80
6	279.96	29.3 QP	46.00	-16.70	1.01 V	154	15.80	13.50
7	288.01	26.5 QP	46.00	-19.50	1.56 V	198	12.60	13.90
8	320.00	34.6 QP	46.00	-11.40	1.00 V	223	20.00	14.60
9	359.99	30.2 QP	46.00	-15.80	1.00 V	310	14.50	15.70
10	399.99	30.3 QP	46.00	-15.70	1.00 V	302	13.20	17.10
11	440.00	31.3 QP	46.00	-14.70	1.03 V	282	13.40	18.00
12	479.97	29.0 QP	46.00	-17.00	1.00 V	15	10.10	18.90
13	520.00	34.9 QP	46.00	-11.10	1.03 V	278	15.50	19.40
14	560.00	34.1 QP	46.00	-11.90	1.00 V	102	12.60	21.50
15	599.98	36.4 QP	46.00	-9.60	1.00 V	98	15.50	20.90
16	639.97	34.3 QP	46.00	-11.70	1.00 V	84	12.50	21.90
17	679.97	35.8 QP	46.00	-10.20	1.00 V	97	13.60	22.20
18	719.99	37.7 QP	46.00	-8.30	1.00 V	136	14.30	23.30
19	799.99	36.1 QP	46.00	-9.90	1.44 V	59	12.40	23.70
20	840.00	37.4 QP	46.00	-8.60	1.00 V	91	12.60	24.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



4.2.10 TEST RESULTS (B) - DSSS

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.1 PK	74.00	-12.90	1.59 H	352	30.20	30.90
1	2390.00	52.1 AV	54.00	-1.90	1.59 H	352	21.20	30.90
2	*2412.00	108.3 PK			1.21 H	54	77.30	31.00
2	*2412.00	101.4 AV			1.21 H	54	70.40	31.00
3	4824.00	47.5 PK			1.45 H	214	11.20	36.30
4	7236.00	49.8 PK	74.00	-24.20	1.52 H	32	8.10	41.70
5	9648.00	52.5 PK	74.00	-21.50	1.07 H	87	8.30	44.20
5	9648.00	43.7 AV	54.00	-10.30	1.07 H	87	-0.40	44.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.00	-18.10	1.77 V	42	25.00	30.90
1	2390.00	46.1 AV	54.00	-7.90	1.77 V	42	15.20	30.90
2	*2412.00	103.8 PK			1.21 V	263	72.80	31.00
2	*2412.00	96.9 AV			1.21 V	263	65.90	31.00
3	4824.00	42.1 PK	74.00	-31.90	1.08 V	25	5.90	36.30
4	7236.00	44.2 PK	74.00	-29.80	1.52 V	49	2.50	41.70
5	9648.00	48.1 PK	74.00	-25.90	1.43 V	214	3.90	44.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency.



EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.9 PK	74.00	-16.10	1.68 H	9	27.00	30.90
1	2390.00	46.7 AV	54.00	-7.30	1.68 H	9	15.80	30.90
2	*2437.00	109.4 PK			1.23 H	60	78.20	31.20
2	*2437.00	102.2 AV			1.23 H	60	71.00	31.20
3	2483.50	60.0 PK	74.00	-14.00	1.78 H	54	28.50	31.40
3	2483.50	48.0 AV	54.00	-6.00	1.78 H	54	16.60	31.40
4	4874.00	47.1 PK	74.00	-26.90	1.52 H	256	10.70	36.50
5	7311.00	49.3 PK	74.00	-24.70	1.86 H	254	7.50	41.80
6	9748.00	51.6 PK	74.00	-22.40	1.29 H	65	7.60	43.90
6	9748.00	43.3 AV	54.00	-10.70	1.29 H	65	-0.70	43.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.1 PK	74.00	-19.90	1.07 V	41	23.20	30.90
1	2390.00	41.9 AV	54.00	-12.10	1.07 V	41	11.00	30.90
2	*2437.00	103.1 PK			1.28 V	260	71.90	31.20
2	*2437.00	95.4 AV			1.28 V	260	64.20	31.20
3	2483.50	52.8 PK	74.00	-21.20	1.65 V	222	21.40	31.40
3	2483.50	41.7 AV	54.00	-12.30	1.65 V	222	10.30	31.40
4	4874.00	43.1 PK	74.00	-30.90	1.57 V	87	6.60	36.50
5	7311.00	44.8 PK	74.00	-29.20	1.08 V	96	3.00	41.80
6	9748.00	46.7 PK	74.00	-27.30	1.65 V	87	2.80	43.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.6 PK			1.40 H	21	78.20	31.30
1	*2462.00	102.6 AV			1.40 H	21	71.20	31.30
2	2483.50	61.4 PK	74.00	-12.60	1.86 H	2	30.00	31.40
2	2483.50	52.6 AV	54.00	-1.40	1.86 H	2	21.20	31.40
3	4924.00	47.6 PK	74.00	-26.40	1.05 H	78	11.00	36.60
4	7386.00	49.5 PK	74.00	-24.50	1.08 H	73	7.60	41.90
5	9848.00	51.1 PK	74.00	-22.90	1.00 H	331	7.30	43.70
5	9848.00	43.1 AV	54.00	-10.90	1.00 H	331	-0.60	43.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.5 PK			1.45 V	21	73.20	31.30
1	*2462.00	96.3 AV			1.45 V	21	65.00	31.30
2	2483.50	58.3 PK	74.00	-15.70	1.11 V	7	26.80	31.40
2	2483.50	47.2 AV	54.00	-6.80	1.11 V	7	15.80	31.40
3	4924.00	42.2 PK	74.00	-31.80	1.78 V	87	5.60	36.60
4	7386.00	44.4 PK	74.00	-29.60	1.73 V	207	2.50	41.90
5	9848.00	46.4 PK	74.00	-27.60	1.54 V	147	2.70	43.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

4.2.11 TEST RESULTS (B) -OFDM

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.5 PK	74.00	-14.50	1.54 H	74	28.60	30.90
1	2390.00	48.4 AV	54.00	-5.60	1.54 H	74	17.50	30.90
2	*2412.00	104.3 PK			1.45 H	101	73.20	31.00
2	*2412.00	96.2 AV			1.45 H	101	65.20	31.00
3	4824.00	47.6 PK	74.00	-26.40	1.47 H	140	11.30	36.30
4	7236.00	49.4 PK	74.00	-24.60	1.57 H	84	7.60	41.70
5	9648.00	51.4 PK	74.00	-22.60	1.40 H	159	7.30	44.20
5	9648.00	43.2 AV	54.00	-10.80	1.40 H	159	-0.90	44.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.4 PK	74.00	-22.60	1.49 V	321	20.60	30.90
1	2390.00	42.1 AV	54.00	-11.90	1.49 V	321	11.30	30.90
2	*2412.00	99.3 PK			1.59 V	125	68.30	31.00
2	*2412.00	90.2 AV			1.59 V	125	59.20	31.00
3	4824.00	41.2 PK	74.00	-32.80	1.15 V	245	4.90	36.30
4	7236.00	43.2 PK	74.00	-30.80	1.05 V	23	1.50	41.70
5	9648.00	47.2 PK	74.00	-26.80	1.76 V	214	3.00	44.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.00	-16.30	1.11 H	78	26.80	30.90
1	2390.00	46.1 AV	54.00	-7.90	1.11 H	78	15.30	30.90
2	*2437.00	105.1 PK			1.57 H	120	73.90	31.20
2	*2437.00	96.4 AV			1.57 H	120	65.20	31.20
3	2483.50	58.8 PK	74.00	-15.20	1.06 H	32	27.40	31.40
3	2483.50	48.2 AV	54.00	-5.80	1.06 H	32	16.80	31.40
4	4874.00	47.4 PK	74.00	-26.60	1.58 H	78	11.00	36.50
5	7311.00	48.3 PK	74.00	-25.70	1.11 H	98	6.50	41.80
6	9748.00	50.7 PK	74.00	-23.30	1.20 H	201	6.80	43.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.2 PK	74.00	-21.80	1.52 V	90	21.30	30.90
1	2390.00	41.1 AV	54.00	-12.90	1.52 V	90	10.30	30.90
2	*2437.00	99.2 PK			1.47 V	54	68.00	31.20
2	*2437.00	90.3 AV			1.47 V	54	59.10	31.20
3	2483.50	53.5 PK	74.00	-20.50	1.09 V	69	22.00	31.40
3	2483.50	43.0 AV	54.00	-11.00	1.09 V	69	11.60	31.40
4	4874.00	40.6 PK	74.00	-33.40	1.40 V	12	4.10	36.50
5	7311.00	43.2 PK	74.00	-30.80	1.04 V	73	1.40	41.80
6	9748.00	46.6 PK	74.00	-27.40	1.68 V	78	2.70	43.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	54G Wireless LAN module	MODEL	WM601-I
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29 deg. C, 52%RH, 968 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.3 PK			1.54 H	100	73.00	31.30
1	*2462.00	97.3 AV			1.54 H	100	66.00	31.30
2	2483.50	60.1 PK	74.00	-13.90	1.04 H	78	28.60	31.40
2	2483.50	49.1 AV	54.00	-4.90	1.04 H	78	17.70	31.40
3	4924.00	48.6 PK	74.00	-25.40	1.45 H	74	12.00	36.60
4	7386.00	48.5 PK	74.00	-25.50	1.03 H	210	6.60	41.90
5	9848.00	50.3 PK	74.00	-23.70	1.50 H	21	6.60	43.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.5 PK			1.52 V	357	68.20	31.30
1	*2462.00	91.3 AV			1.52 V	357	60.00	31.30
2	2483.50	55.6 PK	74.00	-18.40	1.45 V	22	24.10	31.40
2	2483.50	44.6 AV	54.00	-9.40	1.45 V	22	13.20	31.40
3	4924.00	43.2 PK	74.00	-30.80	1.32 V	7	6.60	36.60
4	7386.00	45.0 PK	74.00	-29.00	1.07 V	81	3.10	41.90
5	9848.00	44.3 PK	74.00	-29.70	1.01 V	231	0.60	43.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

4.3 MAXIMUM PEAK OUTPUT POWER

4.3.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Jul. 24, 2003
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.3.4 TEST SETUP



4.3.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.3.6 TEST RESULTS(A)-Antenna 1, DSSS

EUT	54G Wireless LAN module	MODEL	WM601-I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21 deg. C, 58 %RH, 968 hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.46	30	PASS
6	2437	16.61	30	PASS
11	2462	16.49	30	PASS

4.3.7 TEST RESULTS(A)-Antenna 1, OFDM

EUT	54G Wireless LAN module	MODEL	WM601-I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21 deg. C, 58 %RH, 968 hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.32	30	PASS
6	2437	14.46	30	PASS
11	2462	14.50	30	PASS

4.3.8 TEST RESULTS(B)-Antenna 3, DSSS

EUT	54G Wireless LAN module	MODEL	WM601-I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21 deg. C, 58 %RH, 968 hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.20	30	PASS
6	2437	16.55	30	PASS
11	2462	16.19	30	PASS

4.3.9 TEST RESULTS(B)-Antenna 3, OFDM

EUT	54G Wireless LAN module	MODEL	WM601-I
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21 deg. C, 58 %RH, 968 hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.27	30	PASS
6	2437	14.34	30	PASS
11	2462	14.19	30	PASS

4.4 BAND EDGES MEASUREMENT

4.4.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.4.4 EUT OPERATING CONDITION

Same as Item 4.3.5





4.4.5 TEST RESULTS - DSSS

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 51.50dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 101.8dBuV/m, so the maximum field strength in restrict band is $101.8 - 51.5 = 50.3$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 50.83dB delta between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 102.4dBuV/m, so the maximum field strength in restrict band is $102.4 - 50.83 = 51.57$ dBuV/m which is under 54 dBuV/m limit.

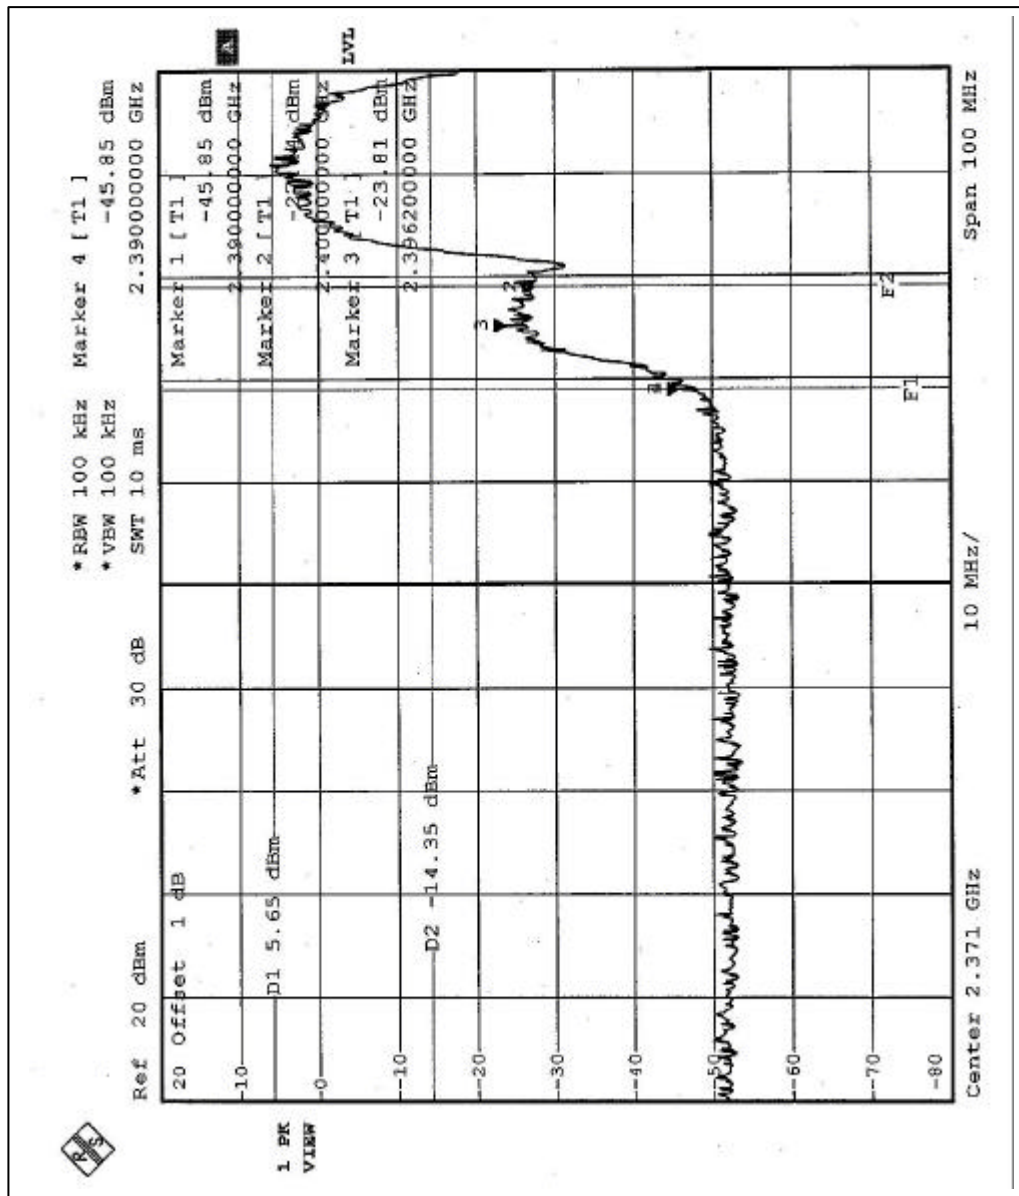

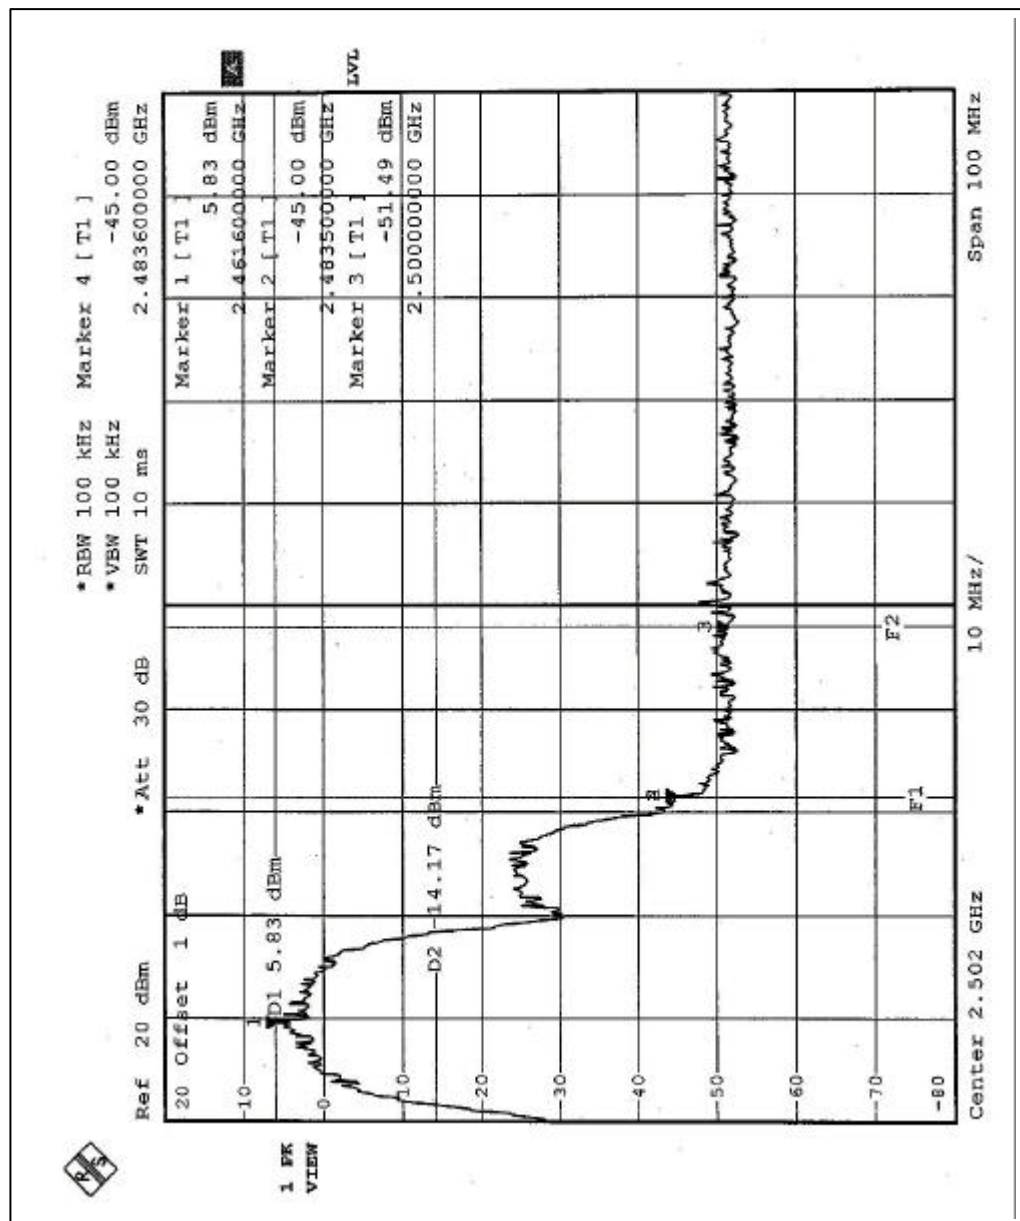





4.4.6 TEST RESULTS-OFDM

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 49.02dB delta between carrier maximum power and local maximum emission in restrict band (2.390GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 93.9dBuV/m, so the maximum field strength in restrict band is $93.9 - 49.02 = 44.08$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 47.96dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 93.5dBuV/m, so the maximum field strength in restrict band is $93.5 - 47.96 = 45.54$ dBuV/m which is under 54 dBuV/m limit.

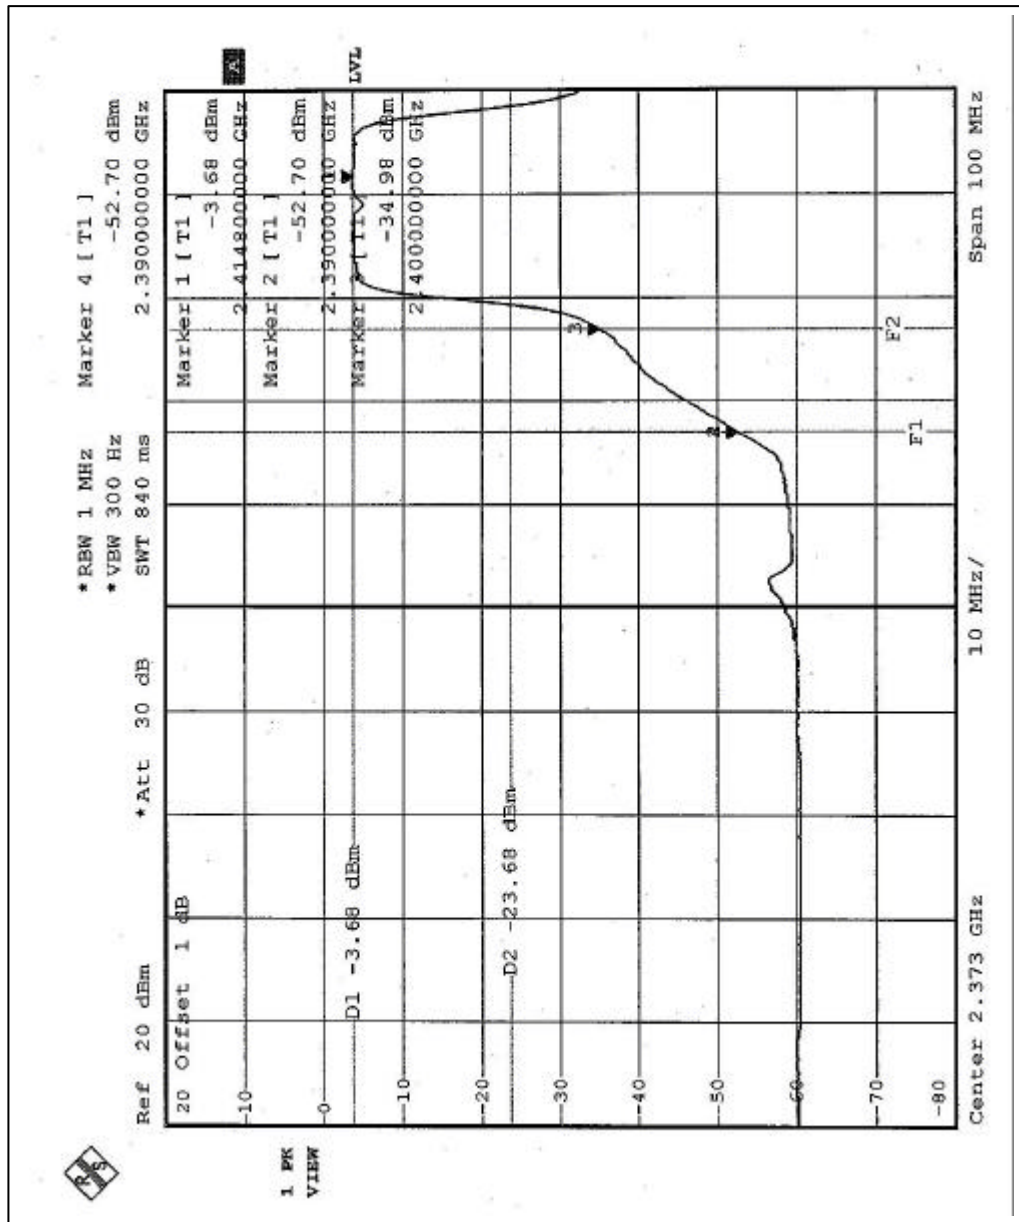

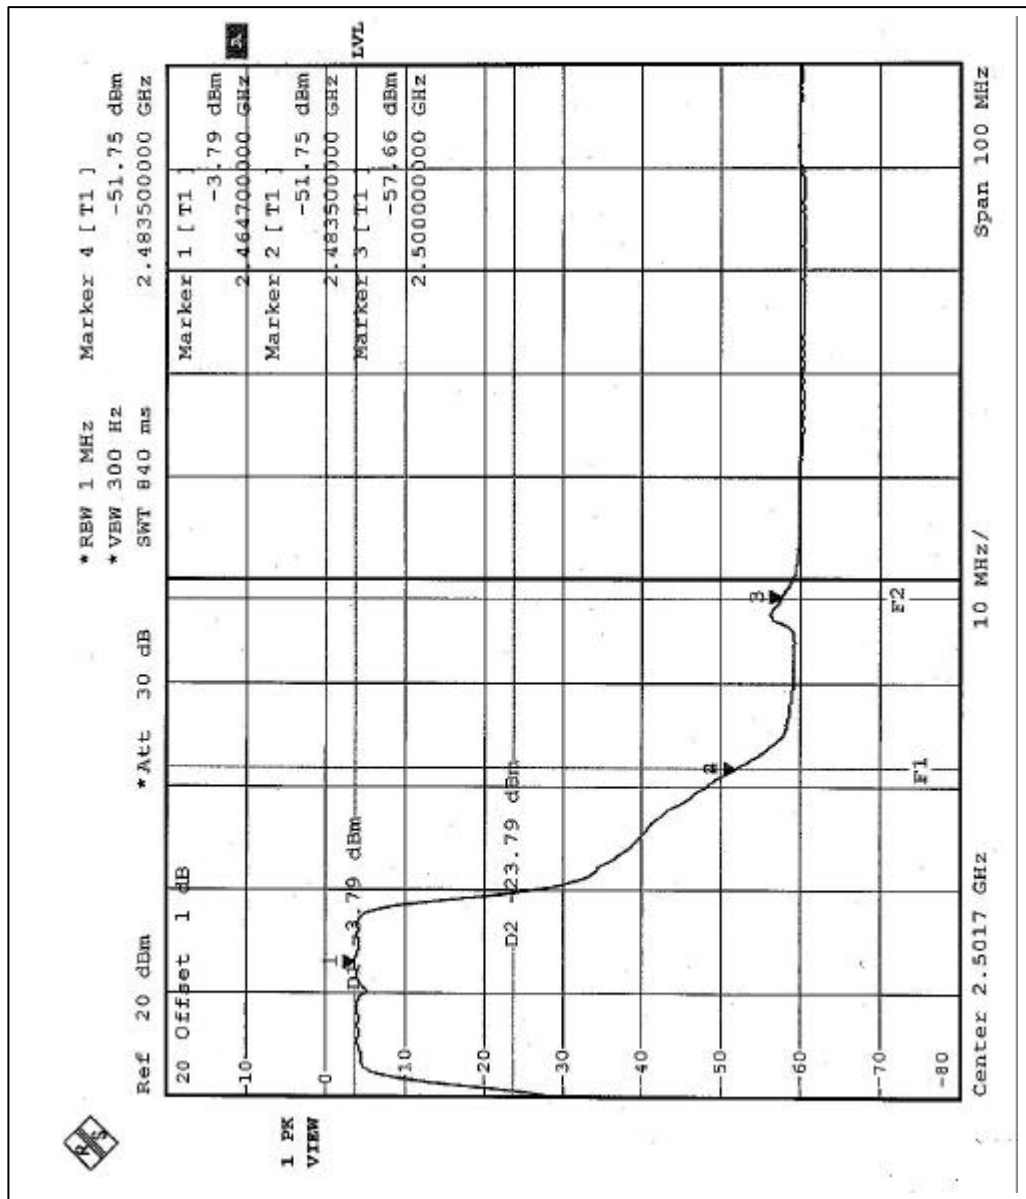



4.5 ANTENNA REQUIREMENT

4.5.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.5.2 ANTENNA CONNECTED CONSTRUCTION

The antenna types used in this product are dipole antenna and PCB antenna. Antenna 1,2 with UFL connector (Internal) Reversed SMA connector (External) and antenna 3 with UFL connector. And the maximum Gain of this antenna is only 4dBi.

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST







6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.