


Appendix B

Peak Output Power



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
25 dBm	0.10 dBm	VBW	1 MHz		
	2.40182966 GHz	SWT	5 ms	Unit	dBm

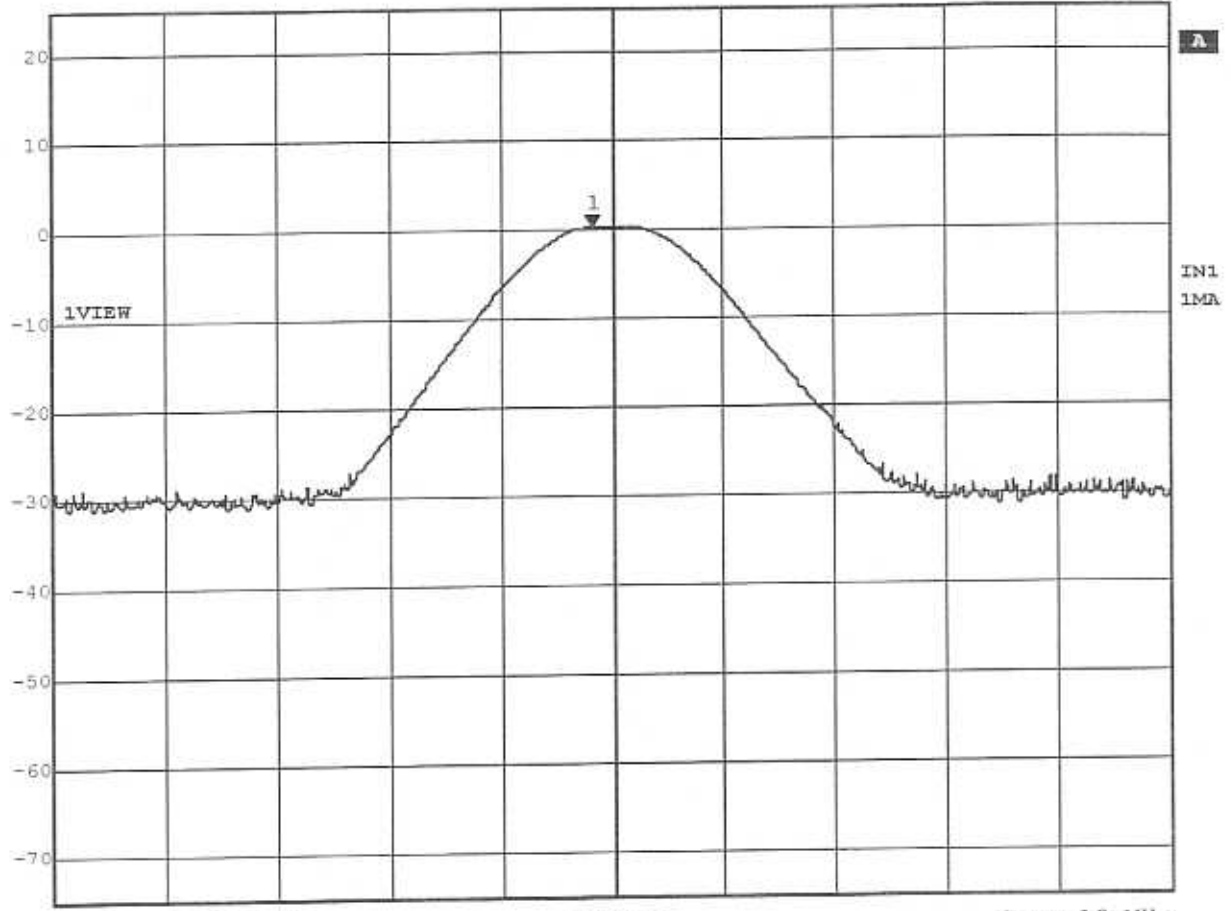


Center 2.402 GHz 1 MHz/ Span 10 MHz

Title: Peak Output Power Ch.: 0
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 20:25:39



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
25 dBm	0.70 dBm	VBW	1 MHz		
	2.44117034 GHz	SWT	5 ms	Unit	dBm

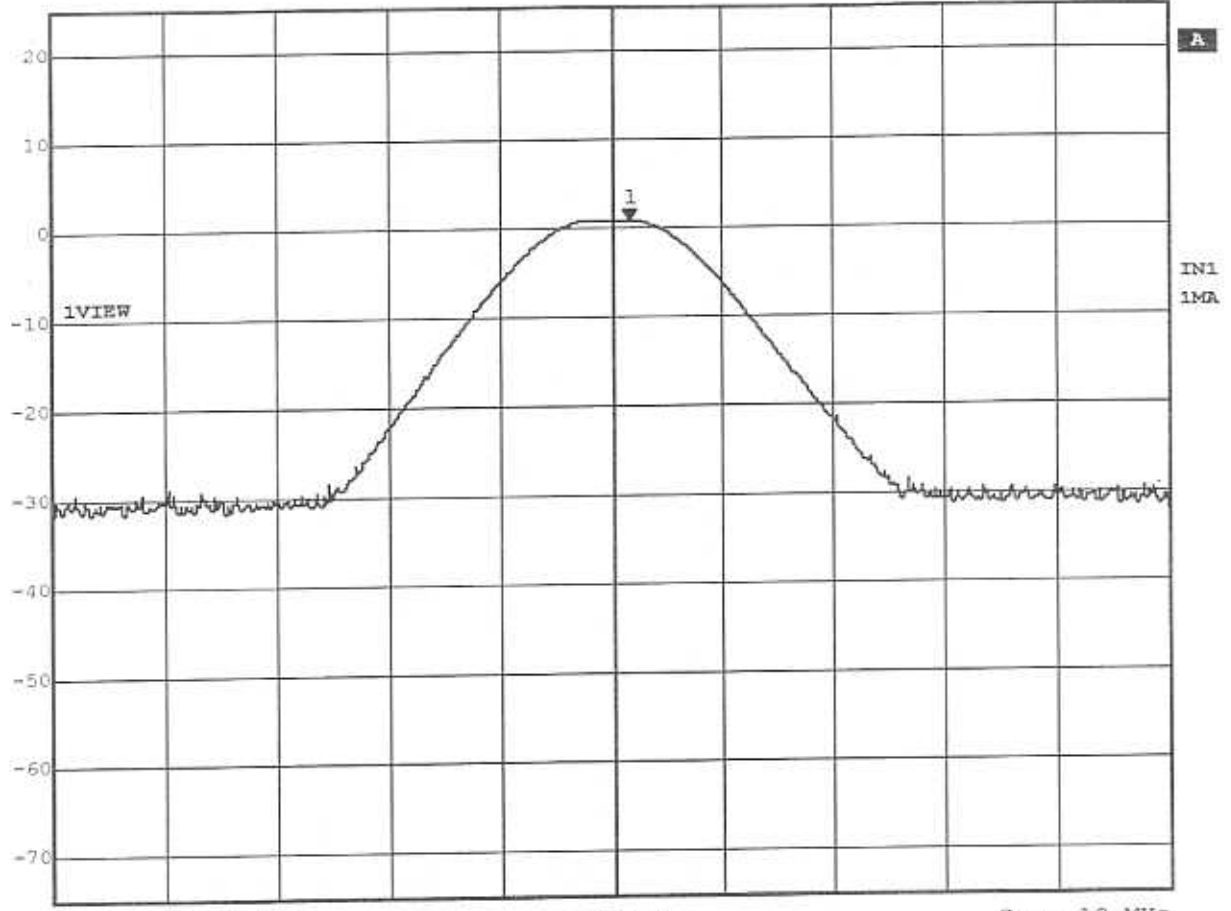


Center 2.441 GHz 1 MHz/ Span 10 MHz

Title: Peak Output Power Ch.: 39
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 20:27:18



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att.	50 dB
25 dBm	1.09 dBm	VBW	1 MHz		
	2.48017034 GHz	SWT	5 ms	Unit	dBm

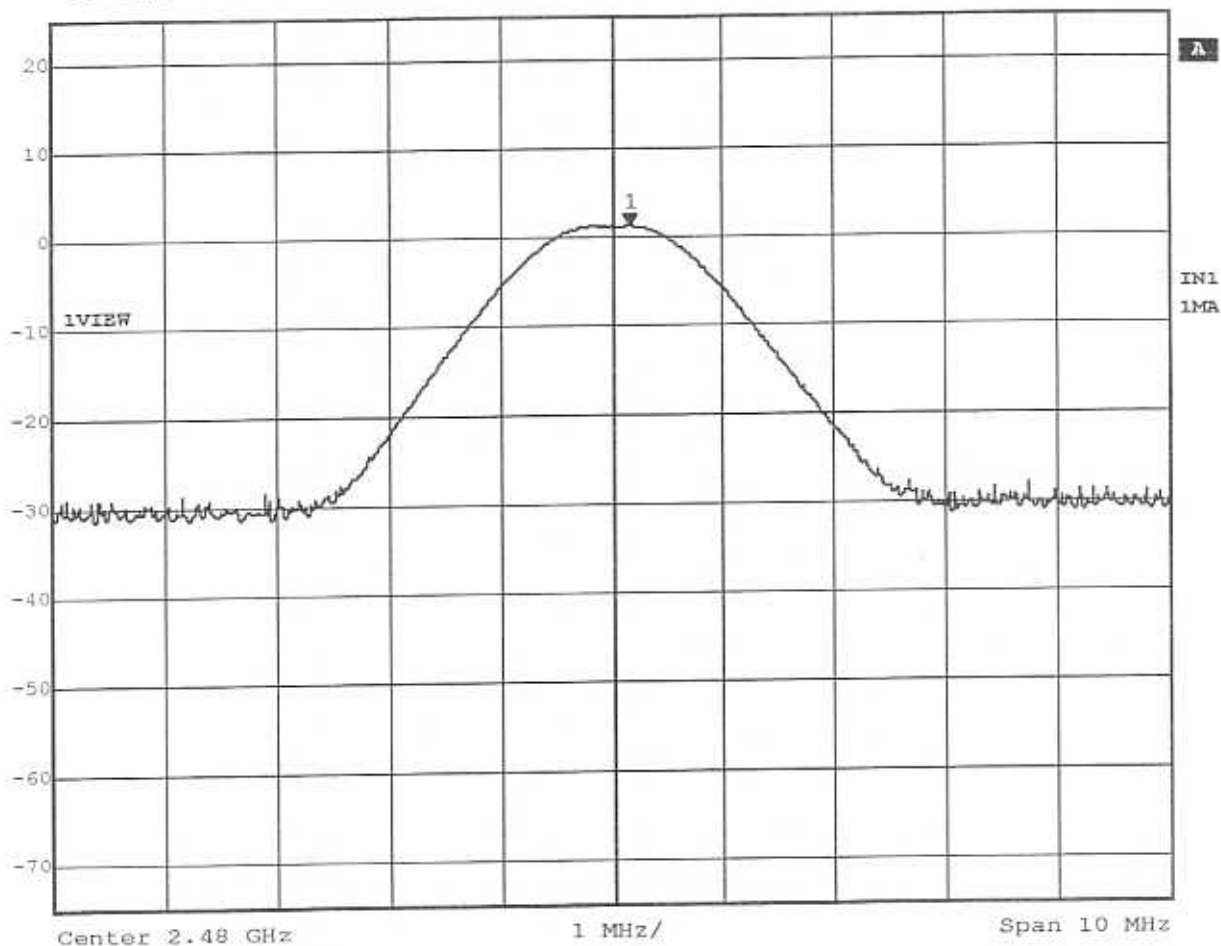


Title: Peak Output Power Ch.: 78
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 20:28:45

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -1.26dBm, RBW: 5MHz


Tx 2402 MHz

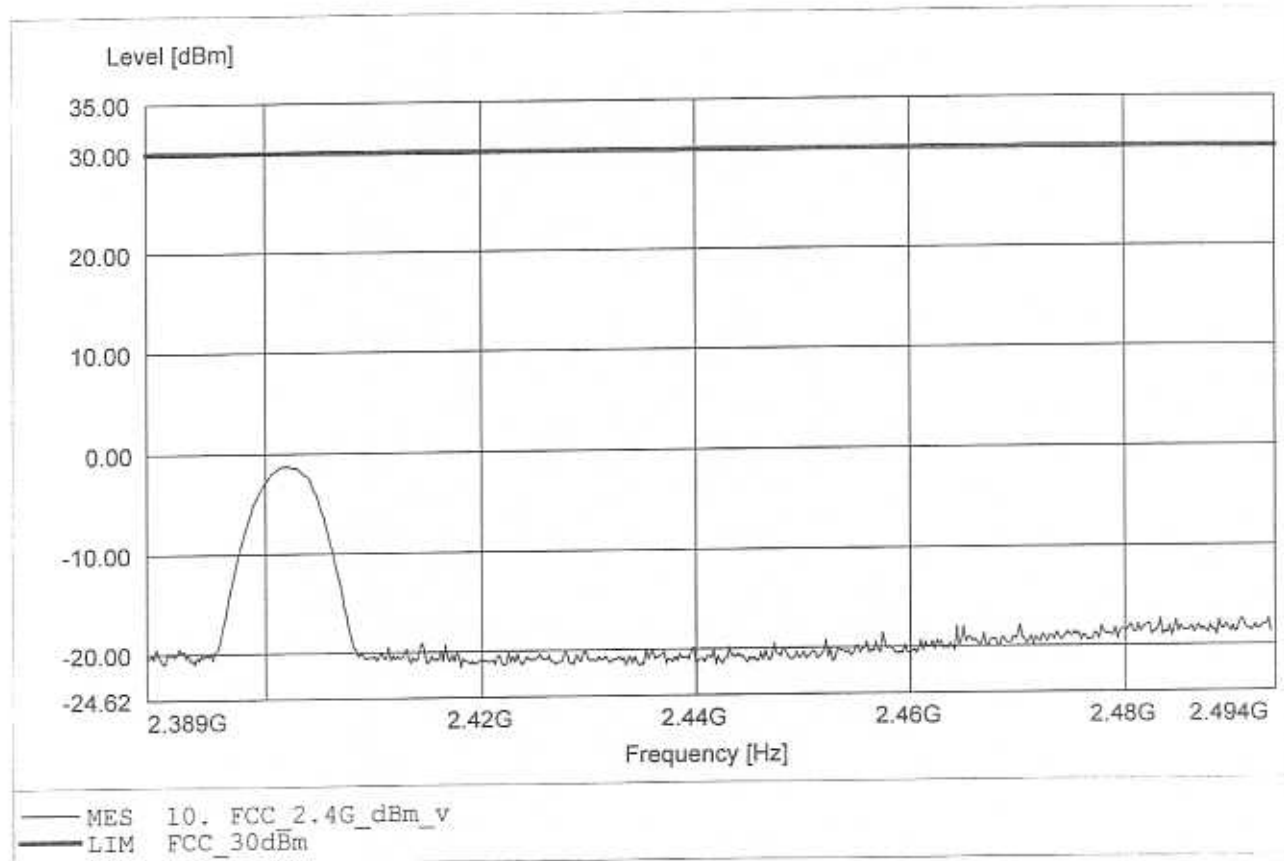

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 0.97dBm, RBW: 5MHz


Tx 2402 MHz

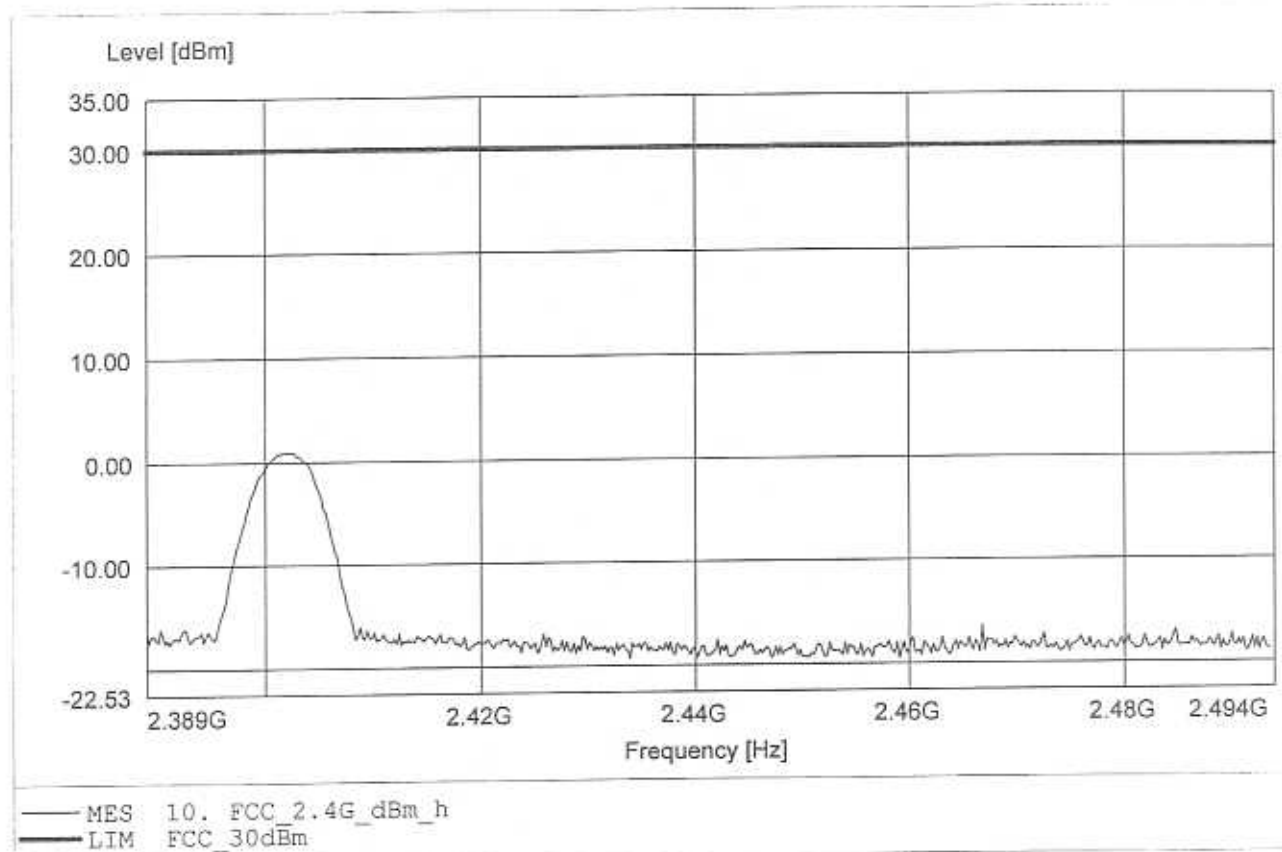

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -1.55dBm, RBW: 5MHz


Tx 2441 MHz

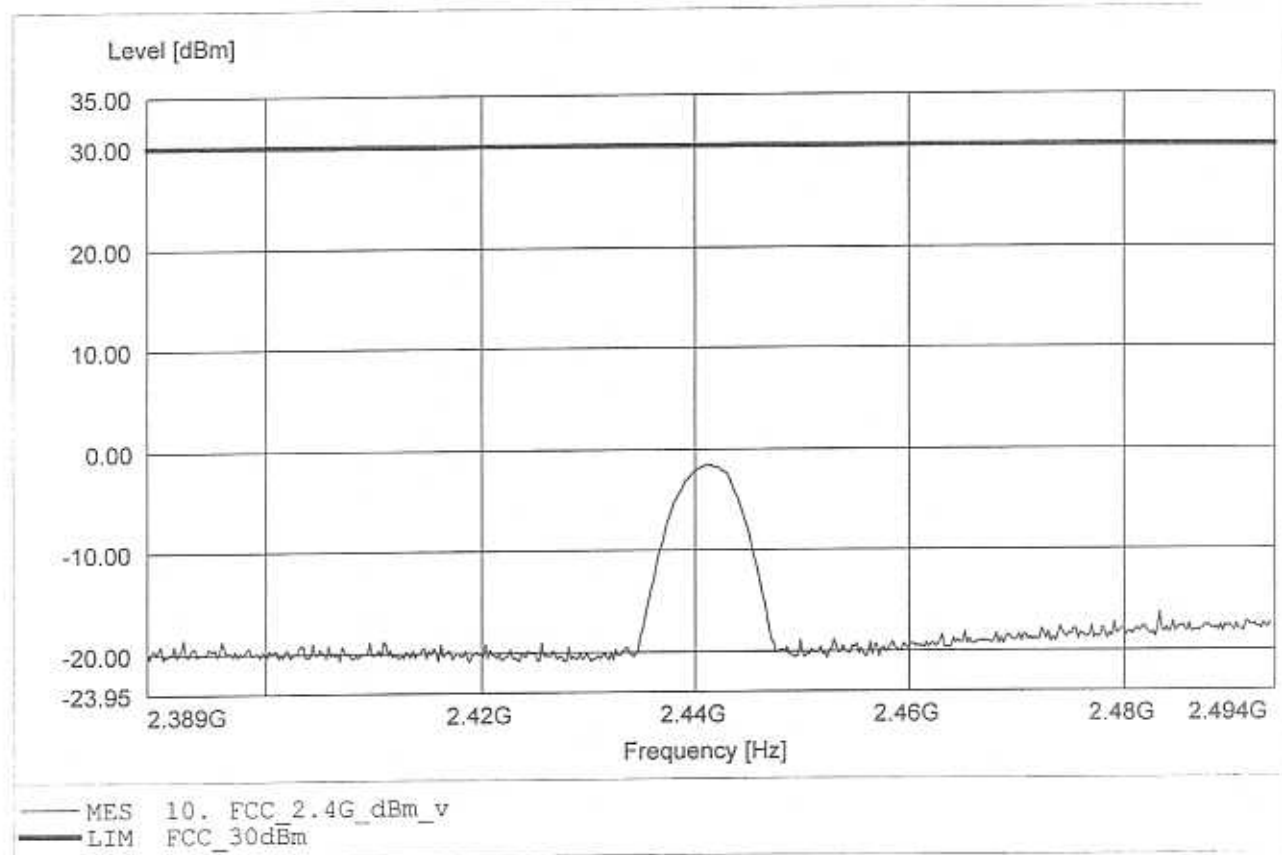

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 1.87dBm, RBW: 5MHz


Tx 2441 MHz

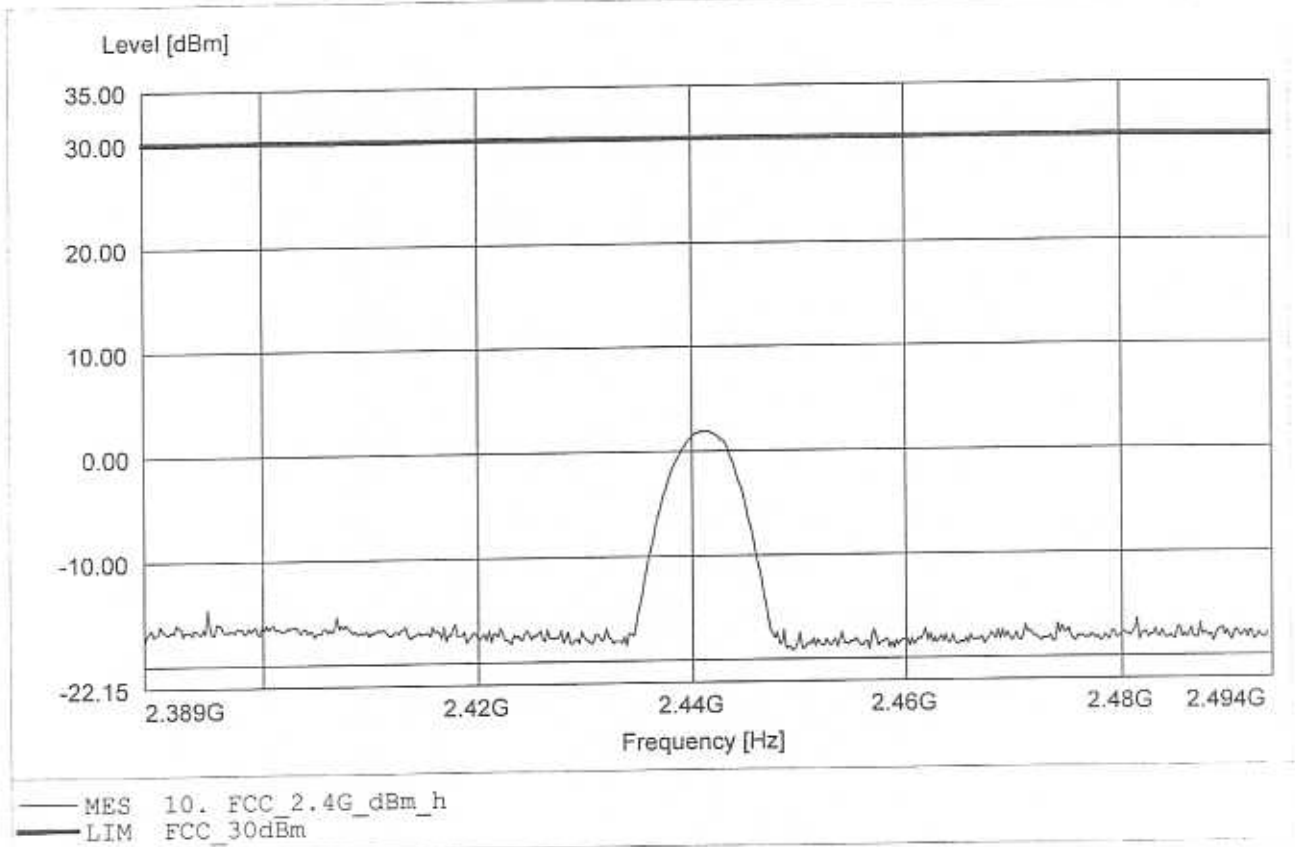

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 1.28dBm, RBW: 5MHz


Tx 2480 MHz

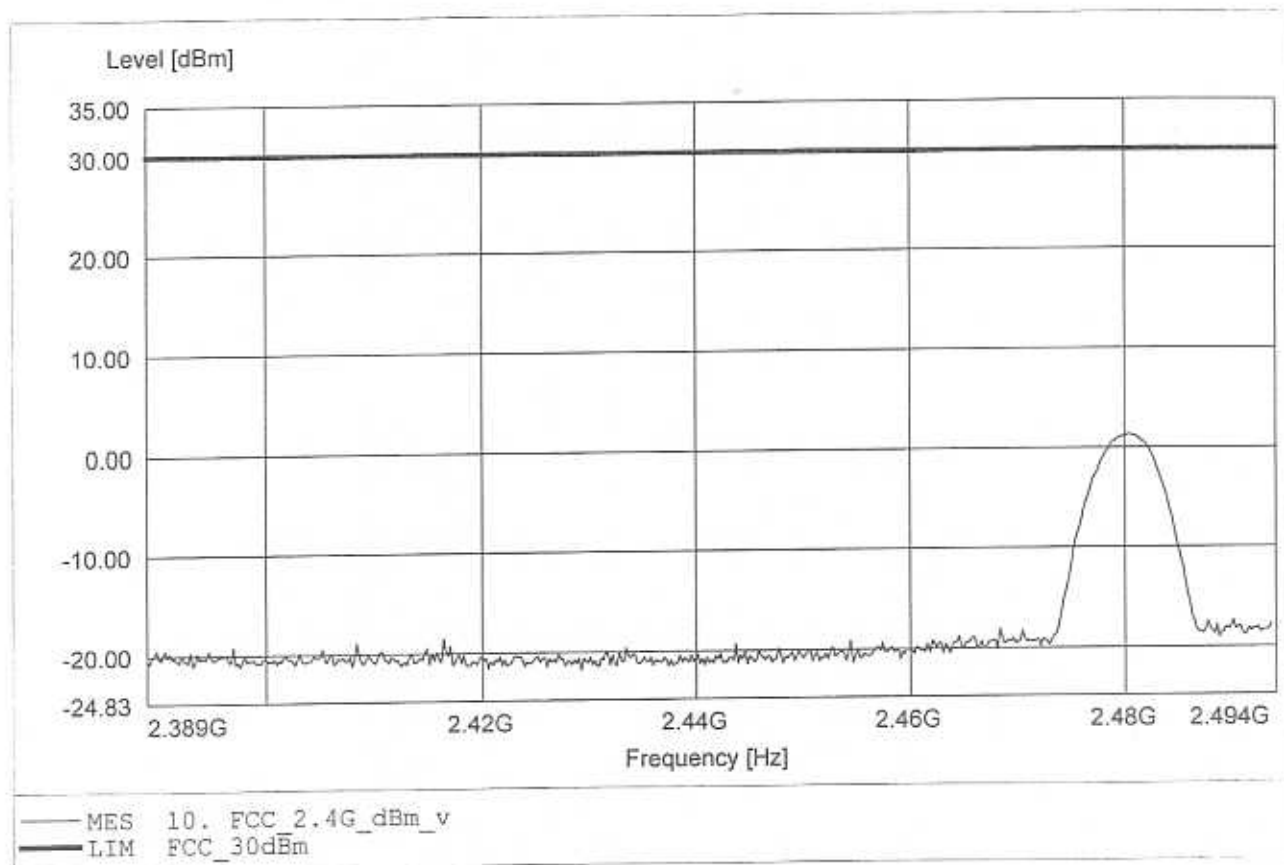

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 0.24dBm, RBW: 5MHz

Tx 2480 MHz

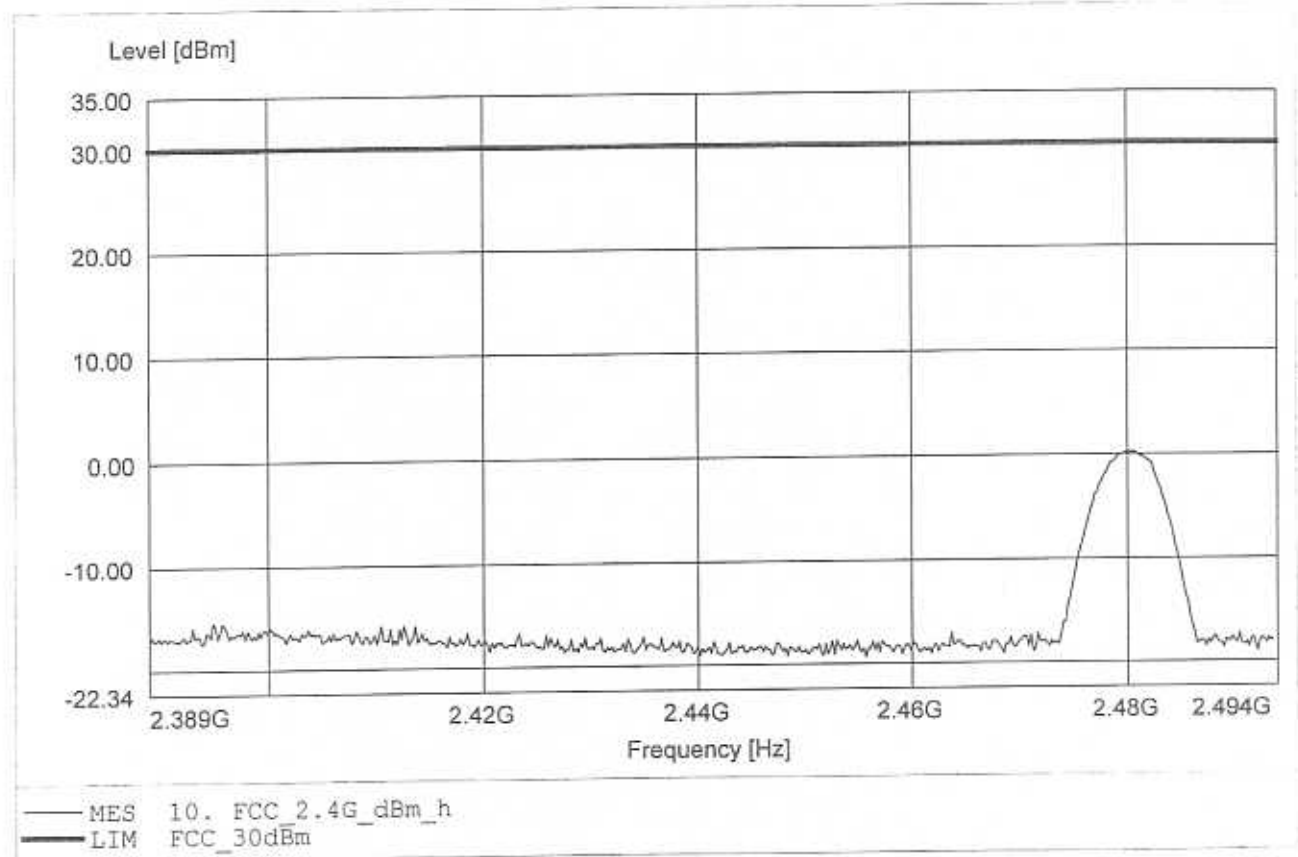


Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom: 23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA2190D
Comment 2: Freq: 2.441GHz, Emax: 96.95dBμV/m, RBW: 1MHz


Tx2402 MHz

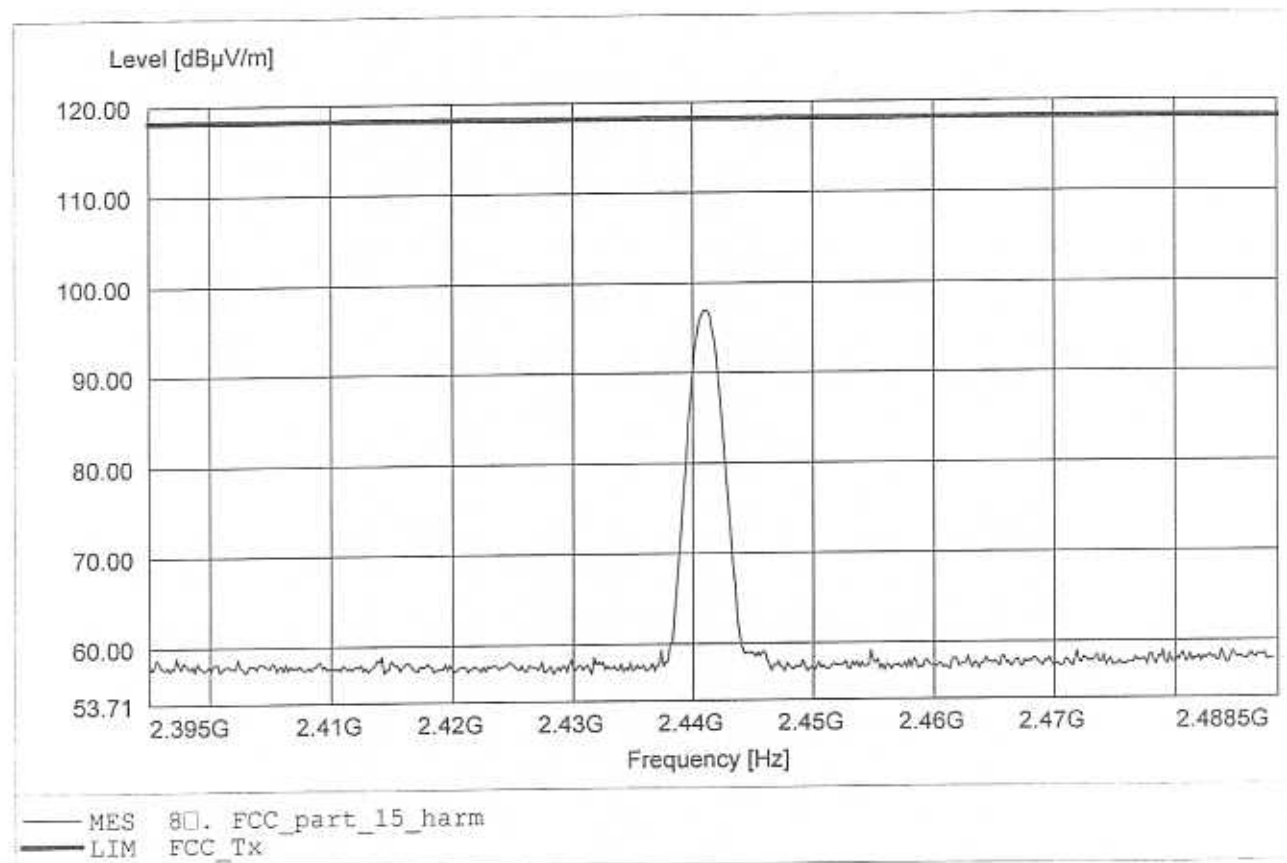

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.142MHz, Emax: 31.67dBµV/m, RBW: 100kHz


Tx2402 MHz

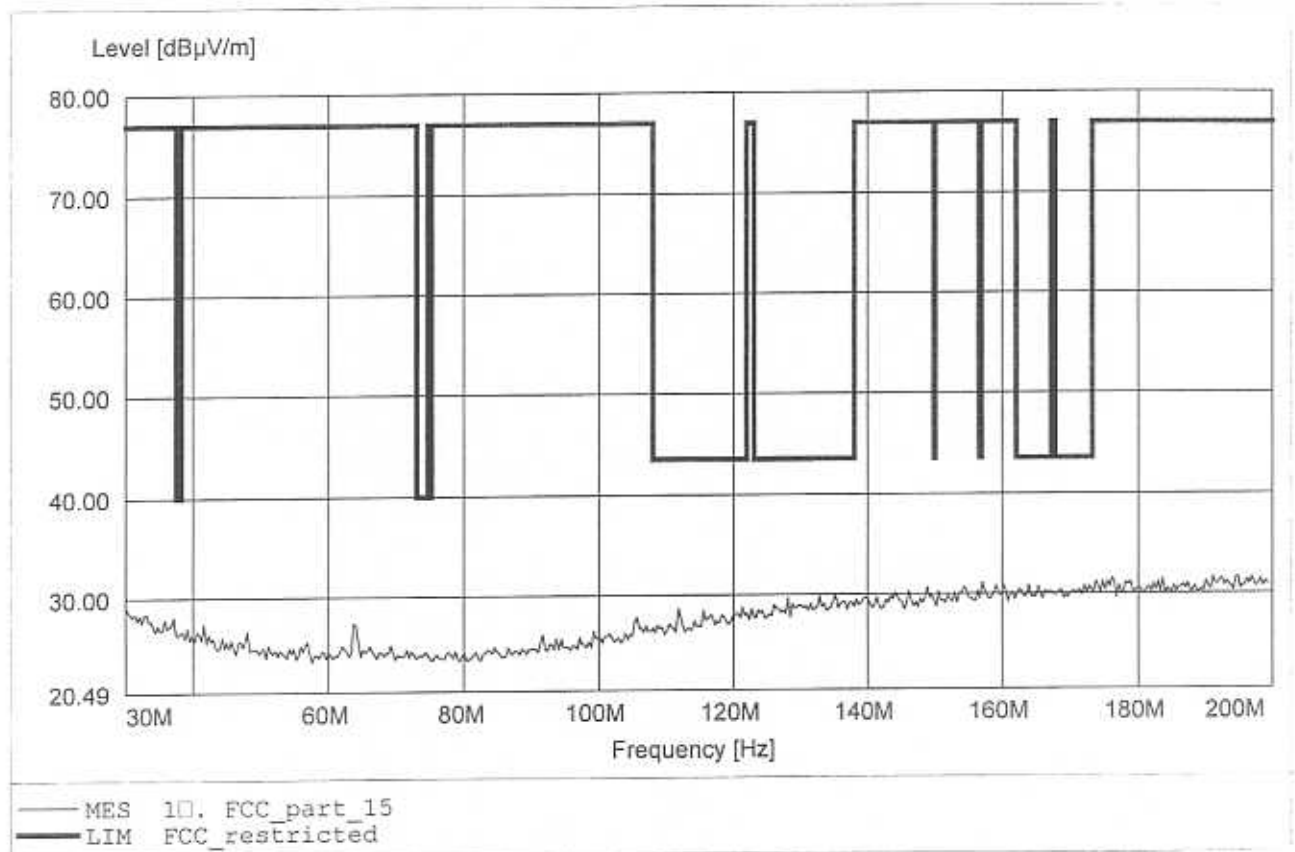

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 32.25dBµV/m, RBW: 100kHz


Tx2402 MHz

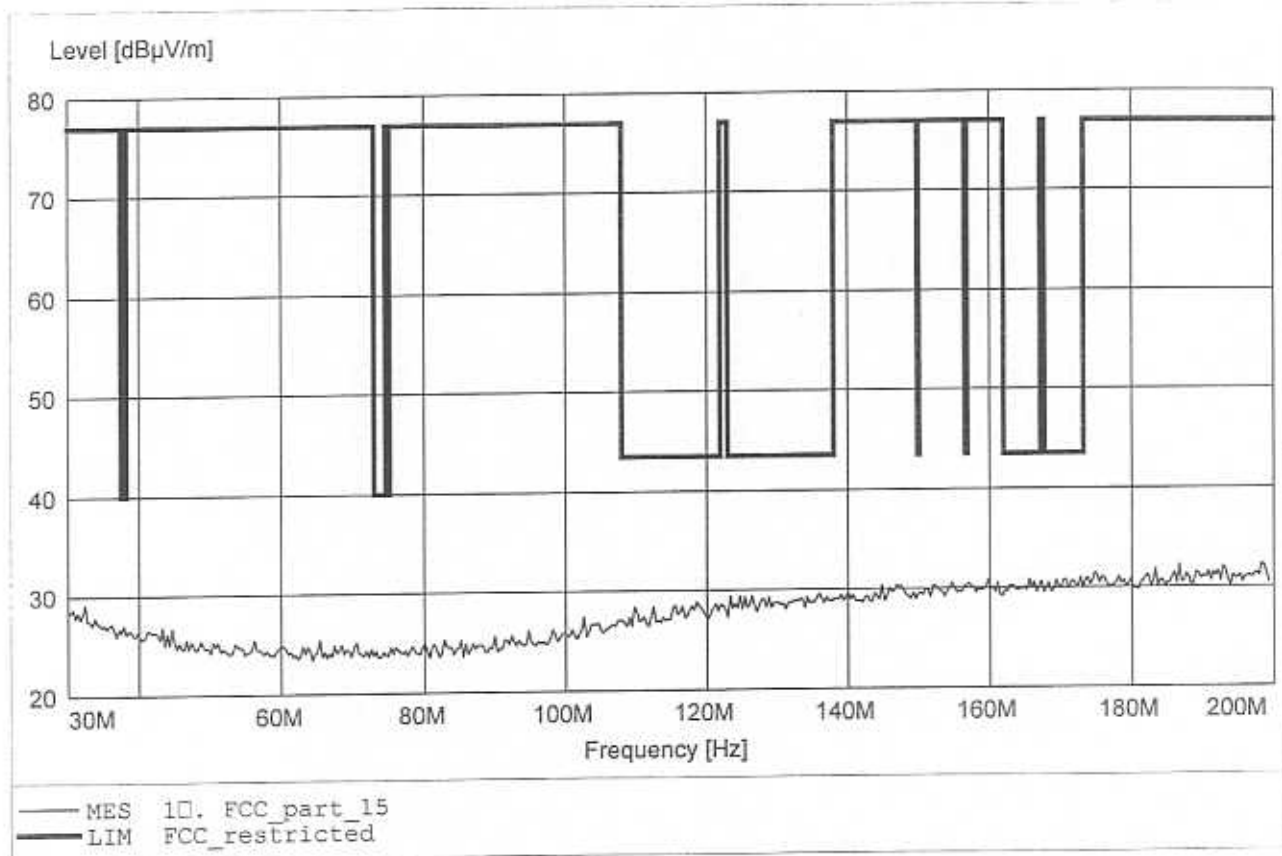

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 559.118MHz, Emax: 23.89dBµV/m, RBW: 100kHz


Tx2402 MHz

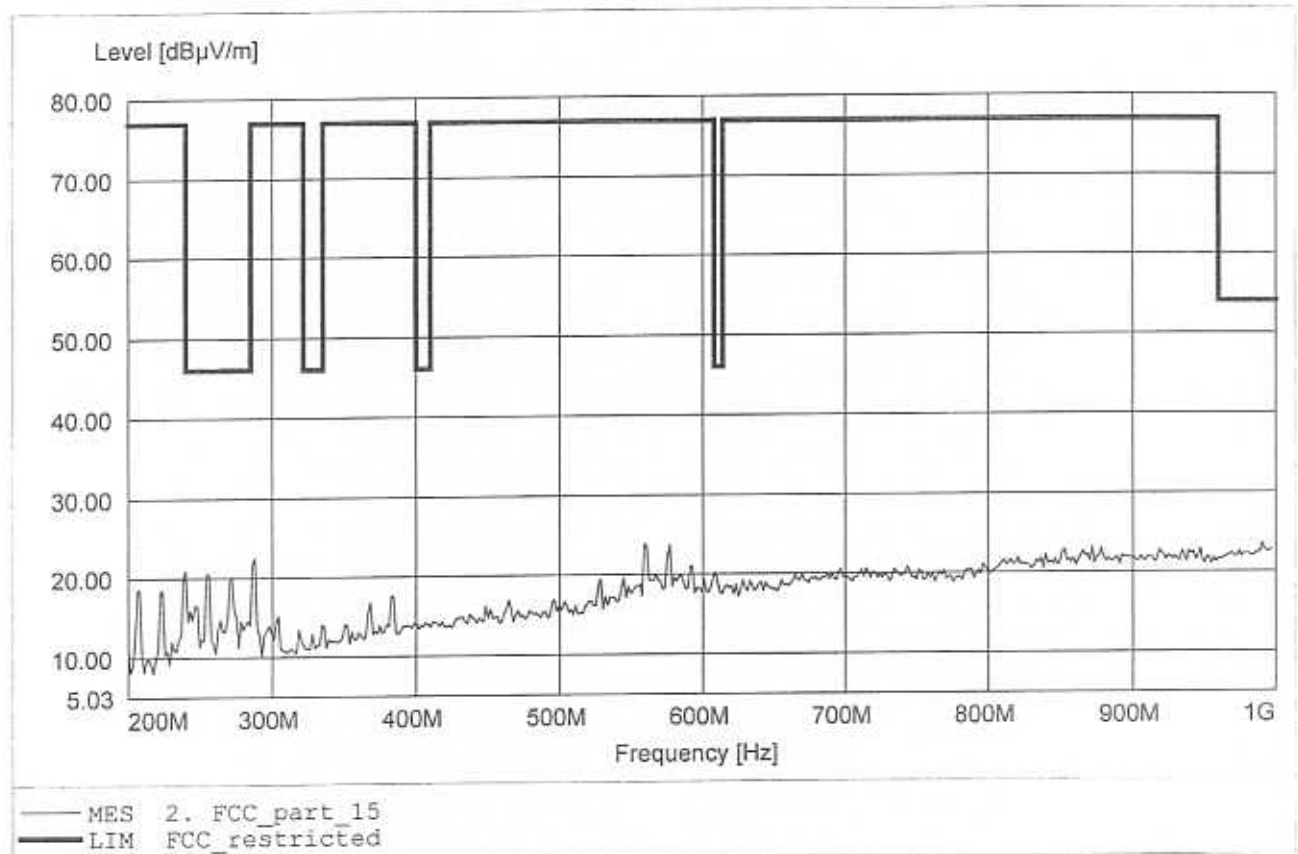

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 288.176MHz, Emax: 27.56dBμV/m, RBW: 100kHz


Tx2402 MHz

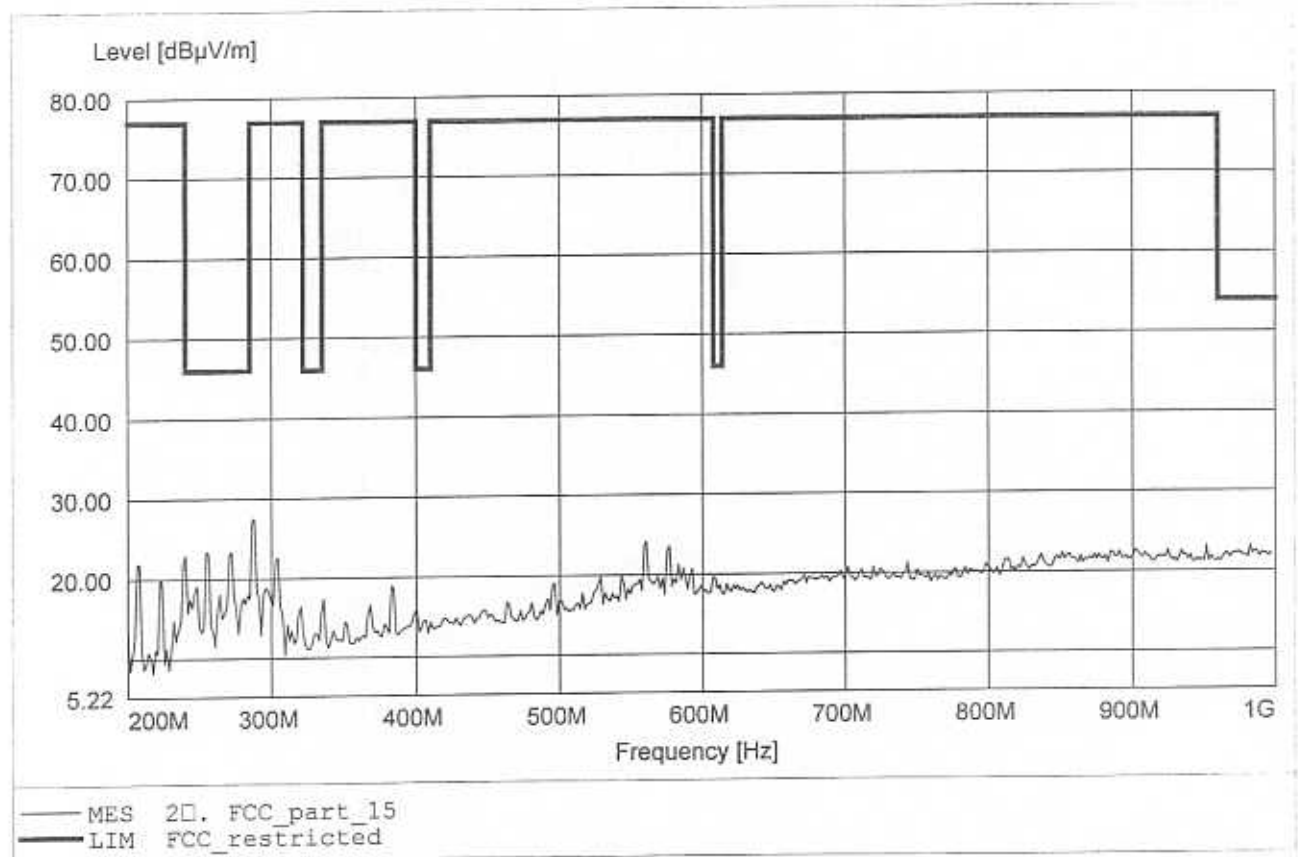

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 68.74dBμV/m, RBW: 1MHz


Tx2402 MHz

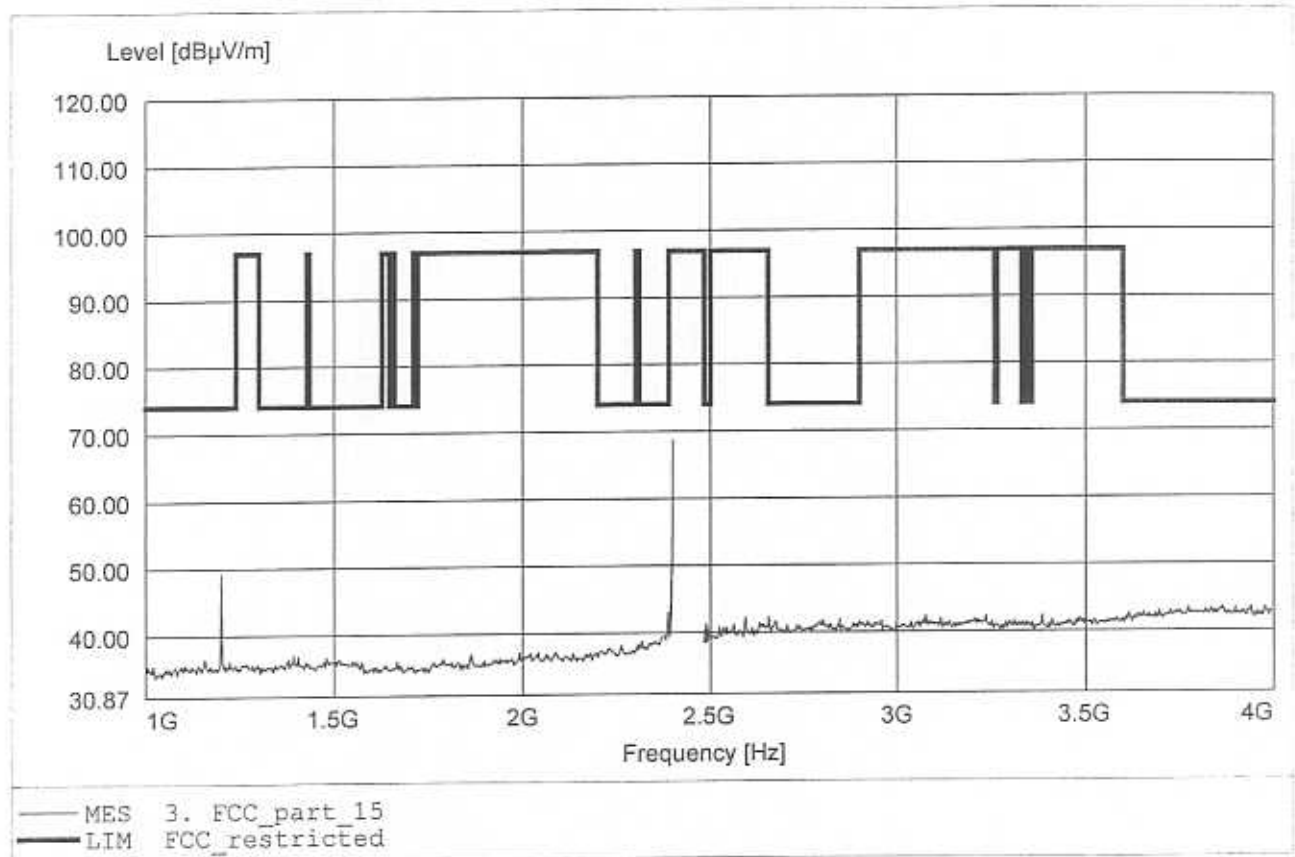

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 64.18dBuV/m, RBW: 1MHz


Tx2402 MHz

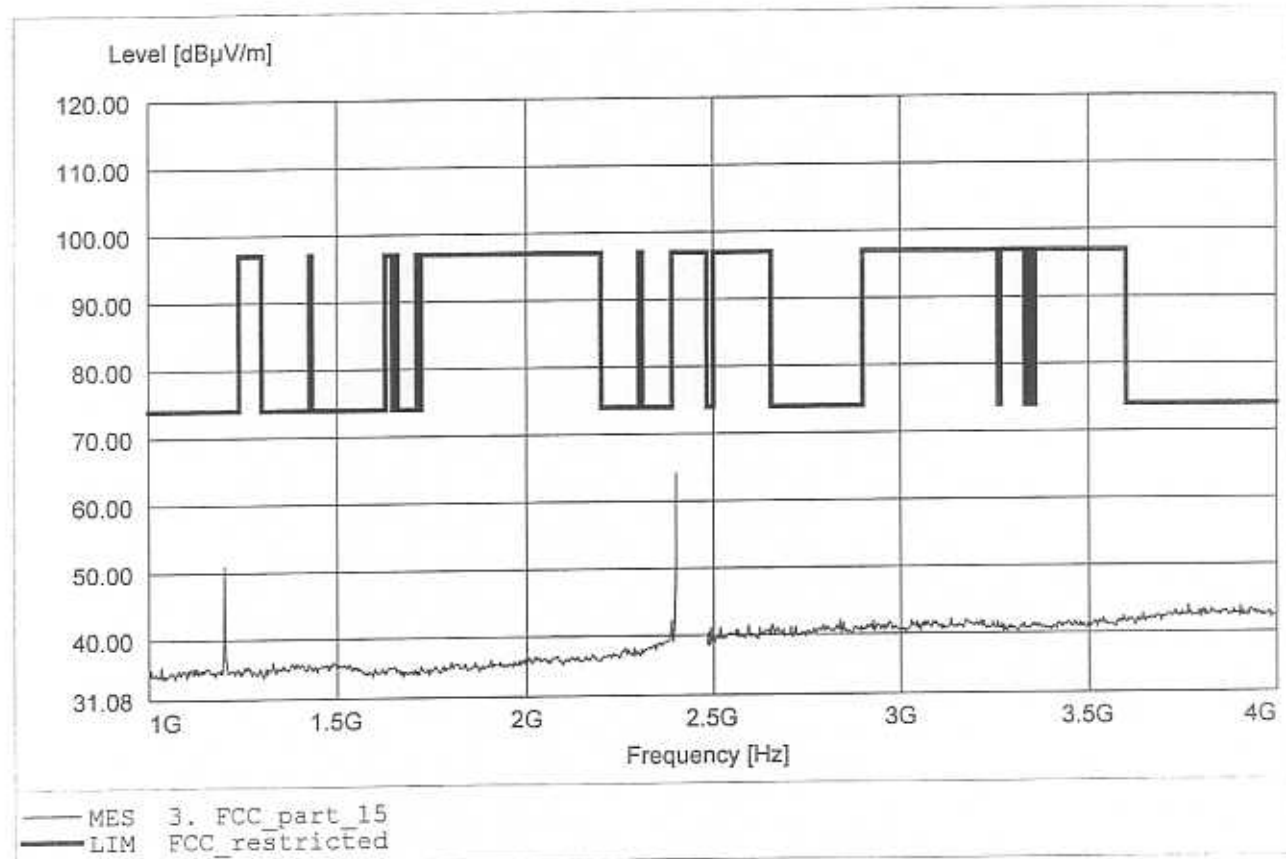

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.431GHz, Emax: 40.29dBuV/m, RBW: 1MHz


Tx 2402 MHz

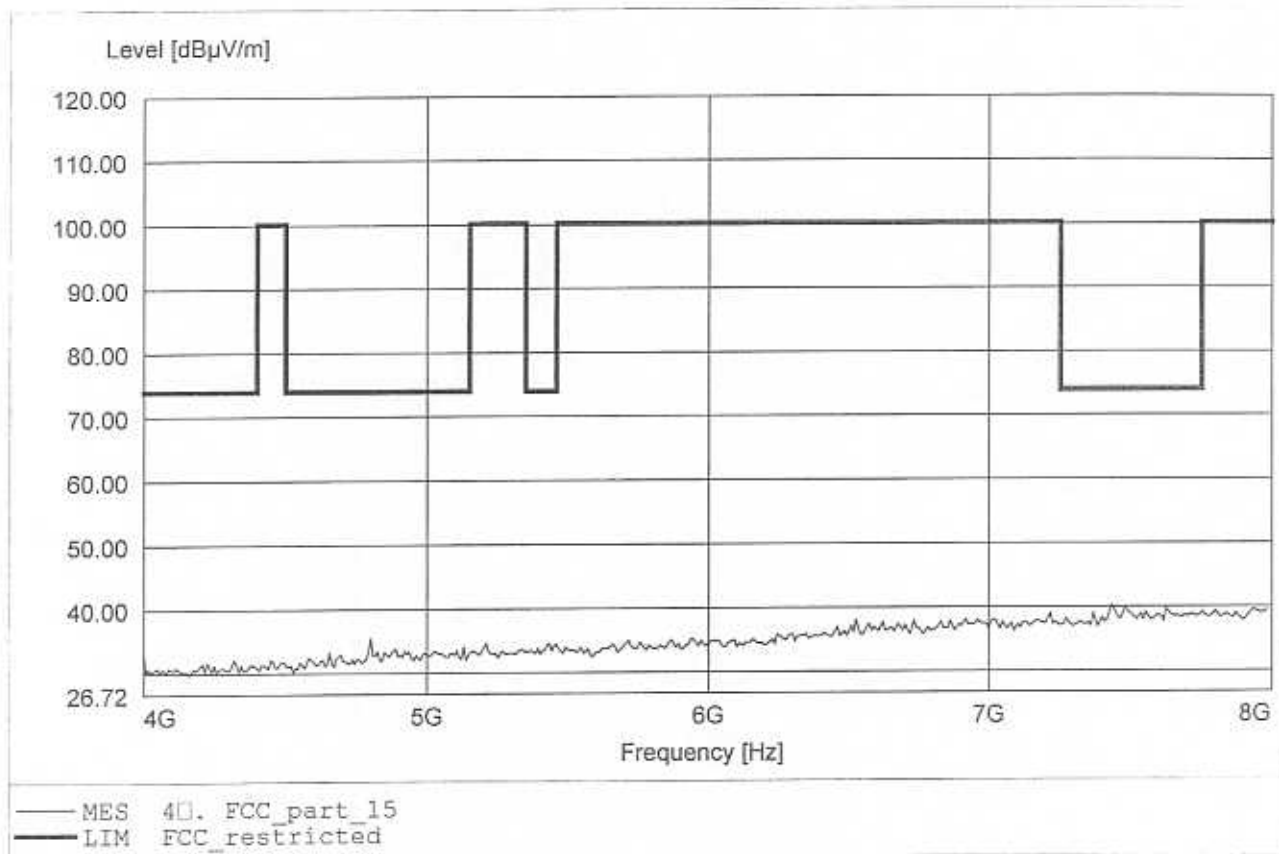

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.511GHz, Emax: 41.11dBµV/m, RBW: 1MHz


Tx 2402 MHz

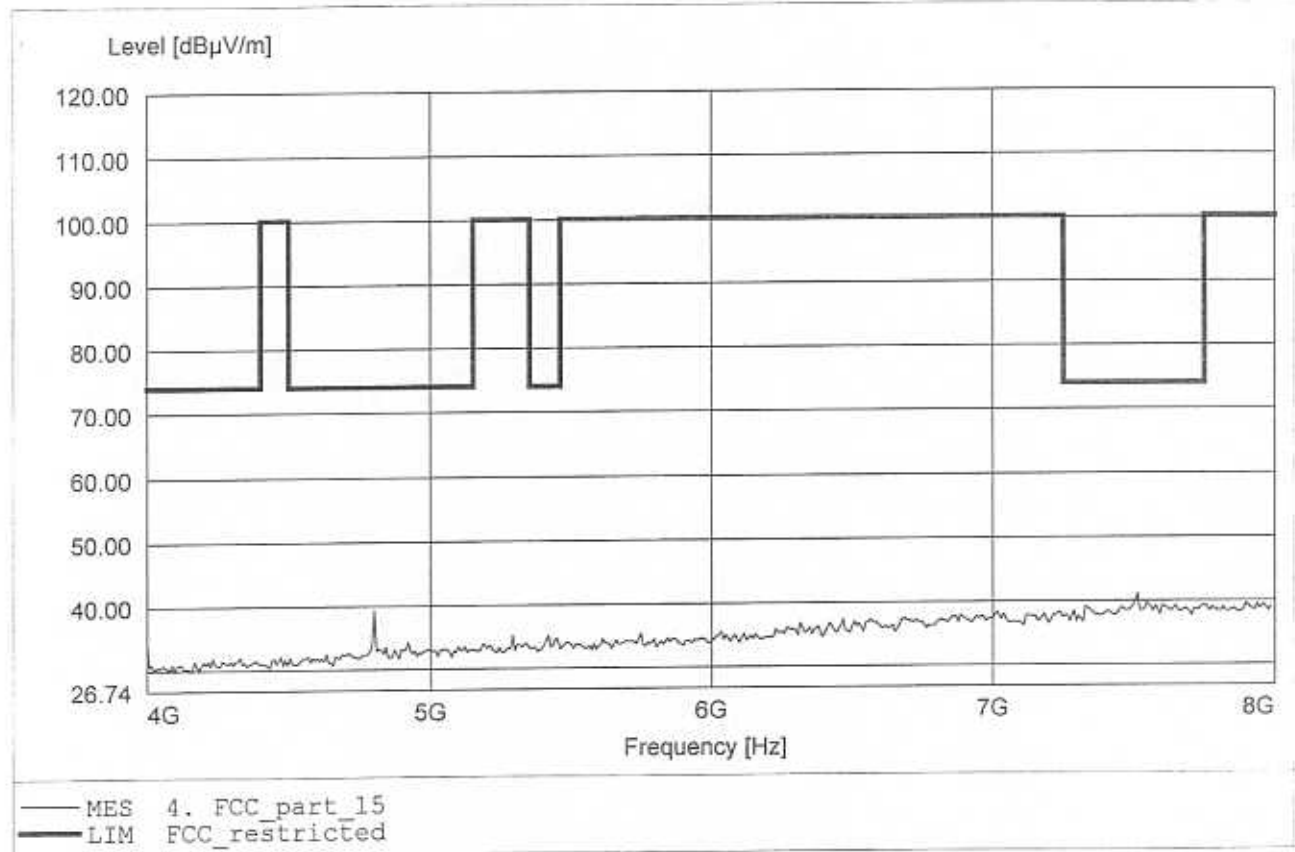

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.222GHz, Emax: 44.00dBuV/m, RBW: 1MHz


Tx 2402 MHz

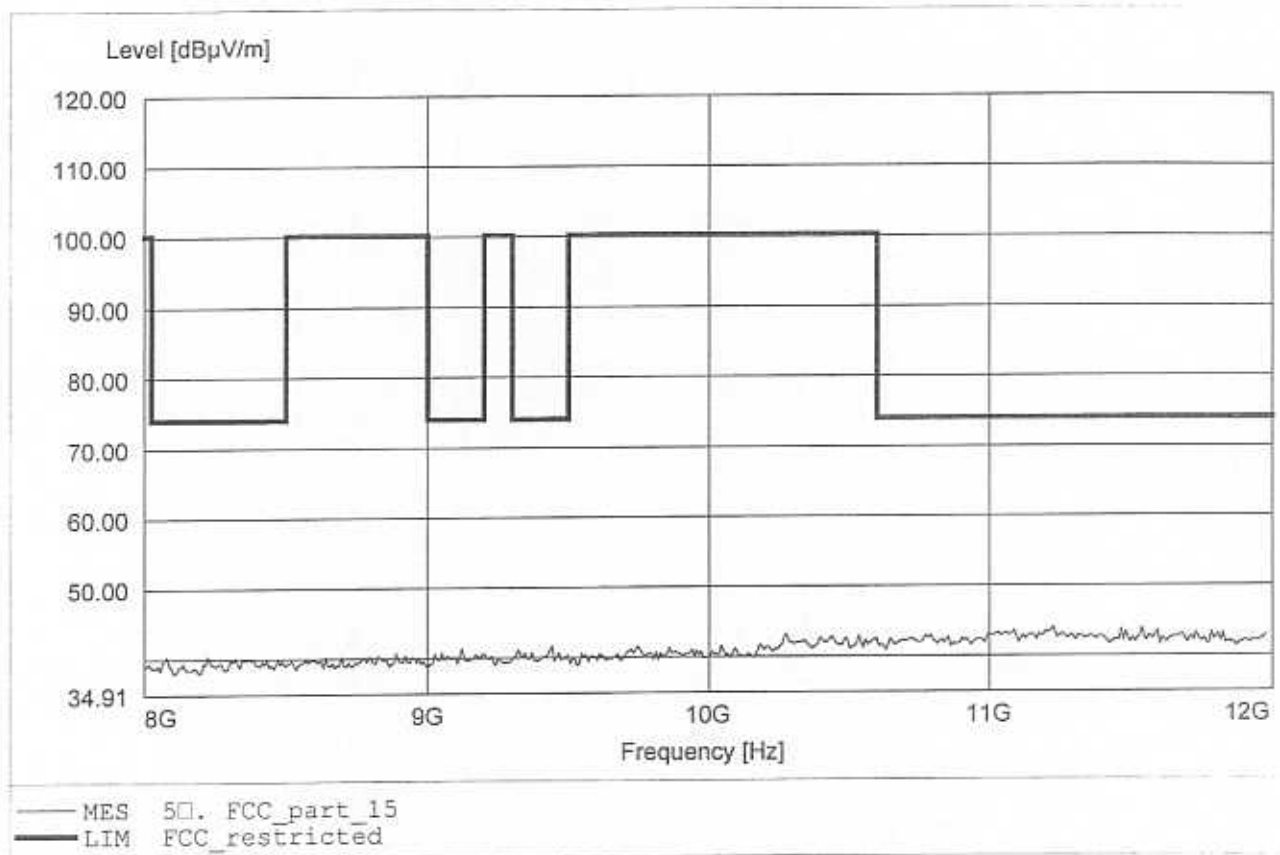

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.238GHz, Emax: 43.91dBμV/m, RBW: 1MHz


Tx 2402 MHz

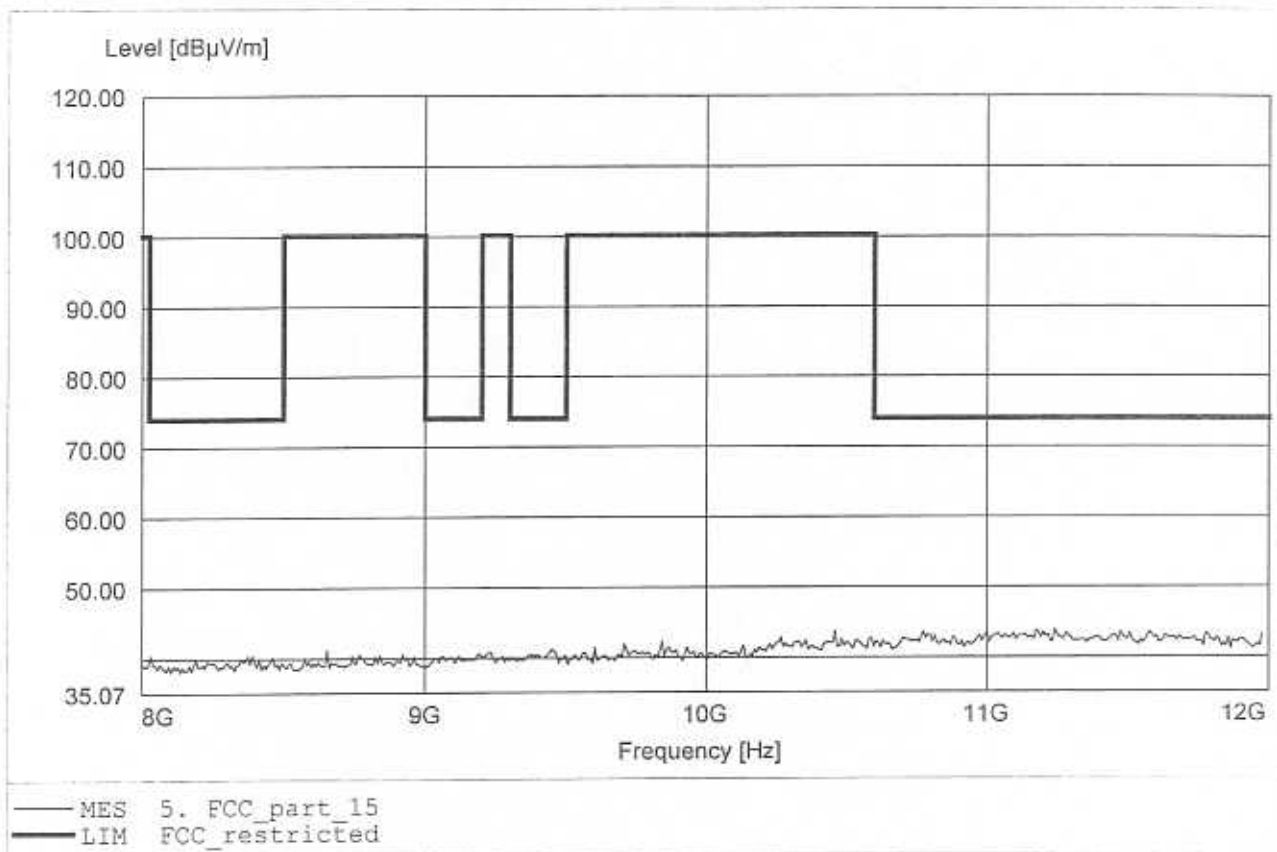

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.415GHz, Emax: 46.66dBµV/m, RBW: 1MHz


Tx 2402 MHz

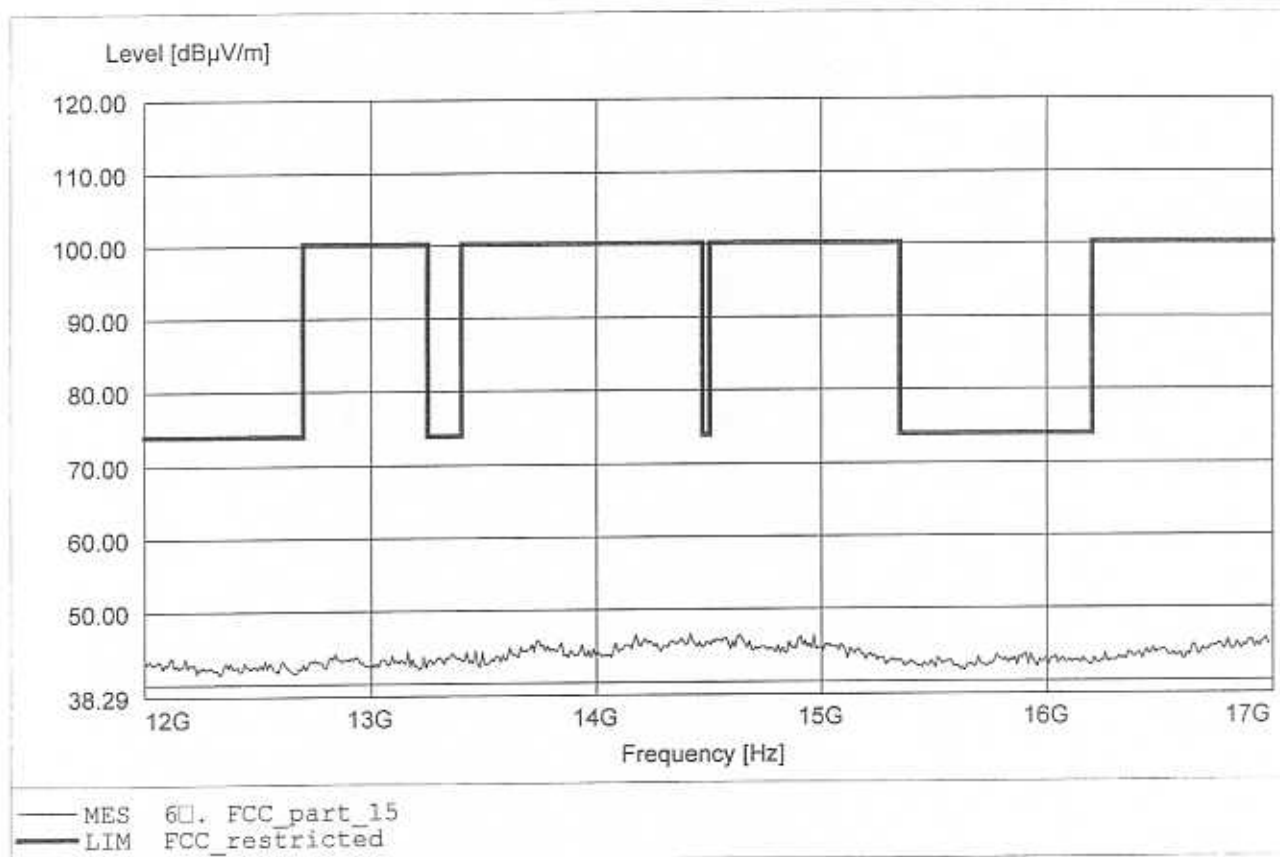

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.966GHz, Emax: 46.96dBµV/m, RBW: 1MHz


Tx 2402 MHz

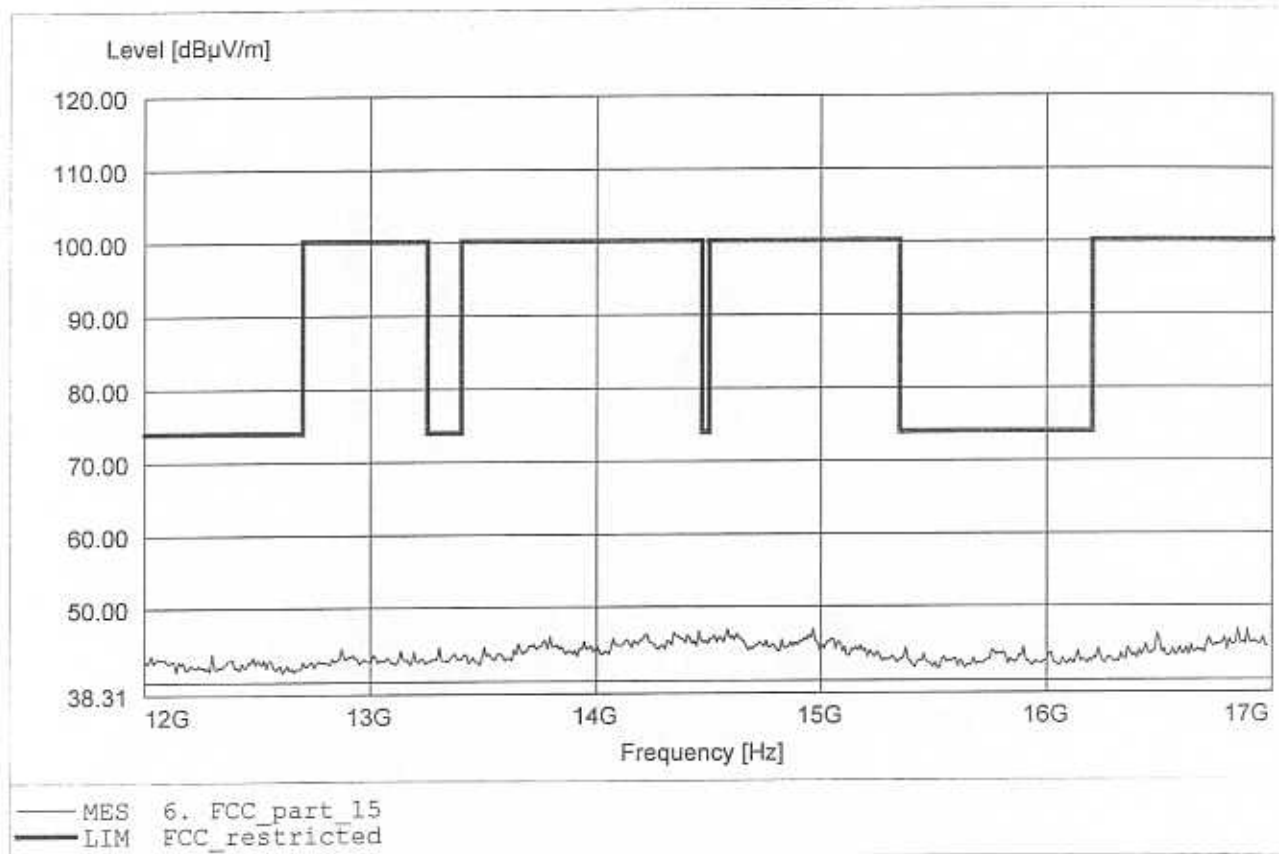

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 47.29dBμV/m, RBW: 1MHz


Tx 2402 MHz

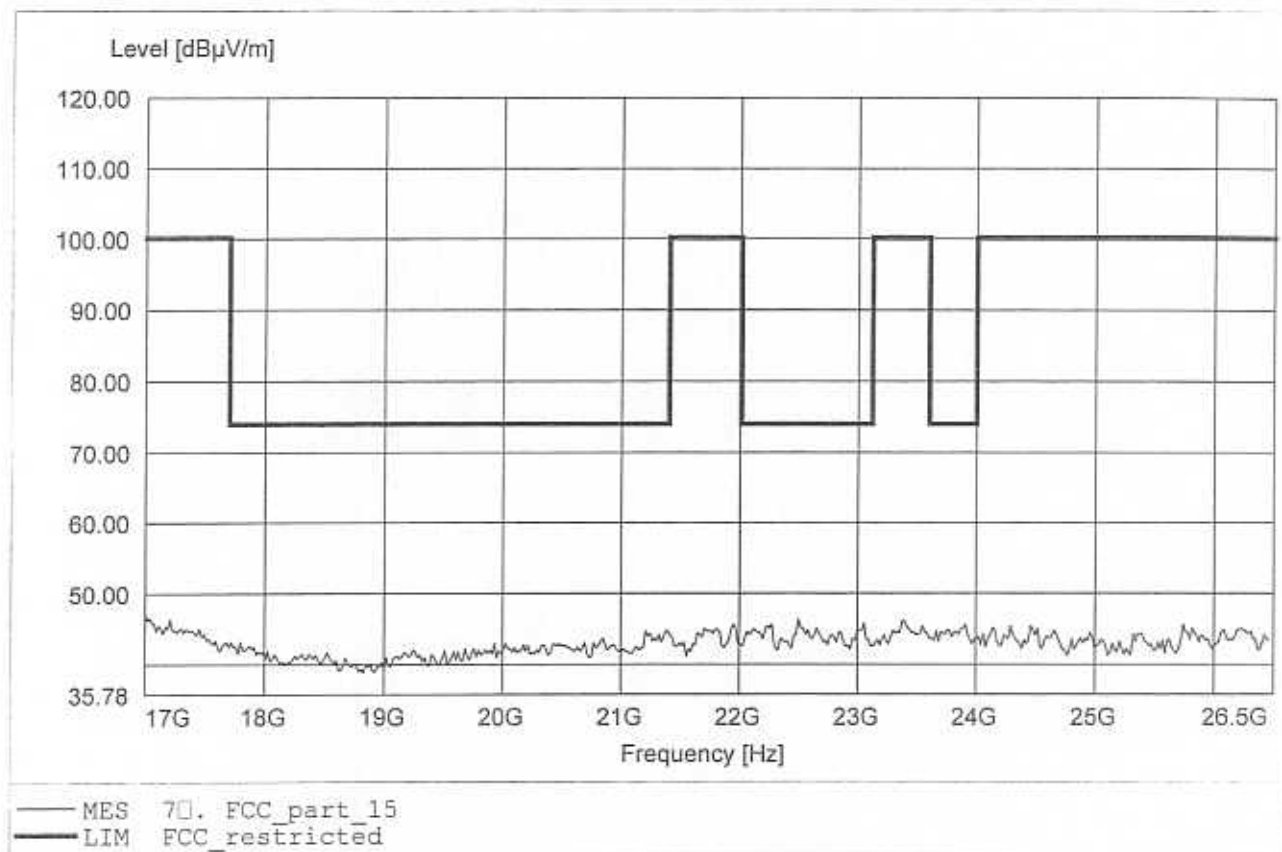

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 46.93dBμV/m, RBW: 1MHz


Tx 2402 MHz

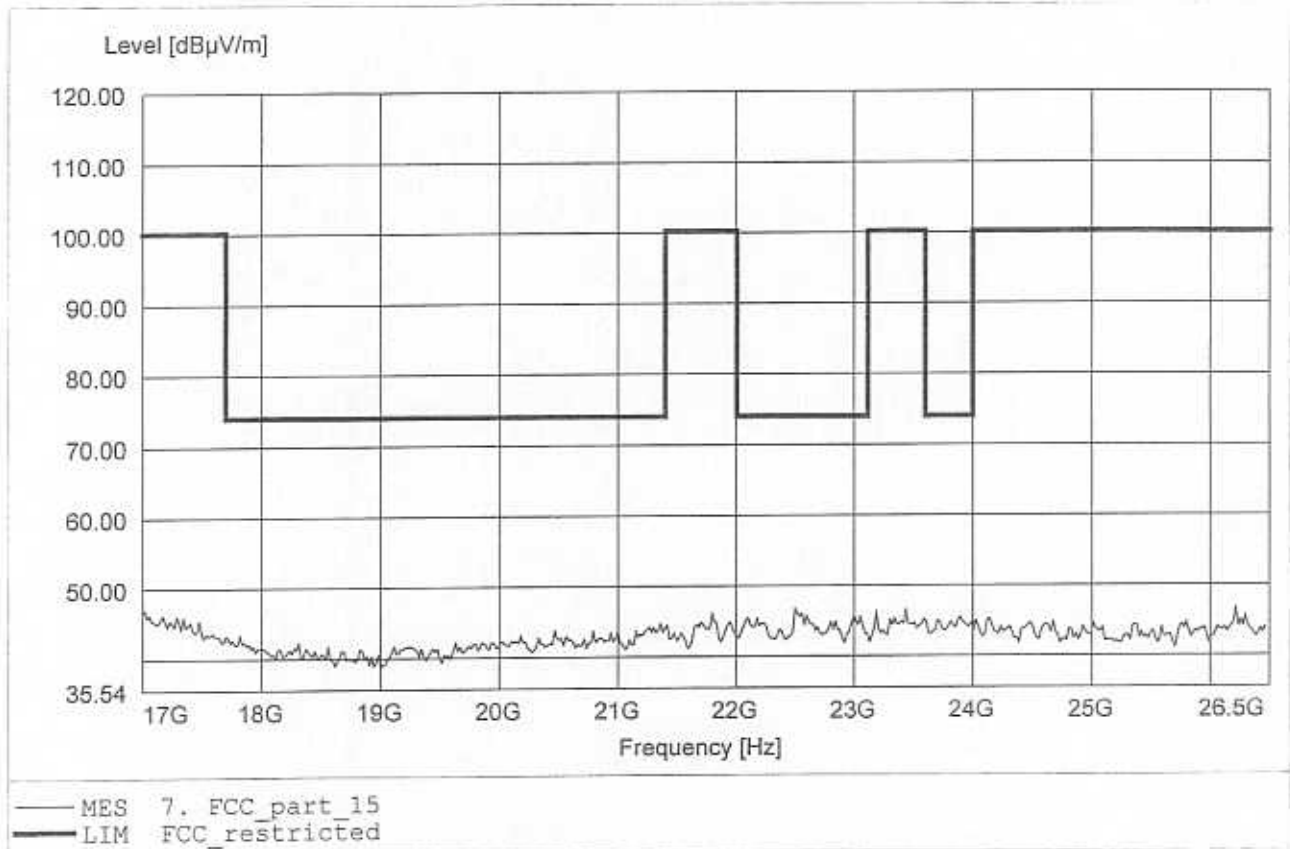

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C


EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.934MHz, Emax: 32.06dBuV/m, RBW: 100kHz

Tx2441 MHz

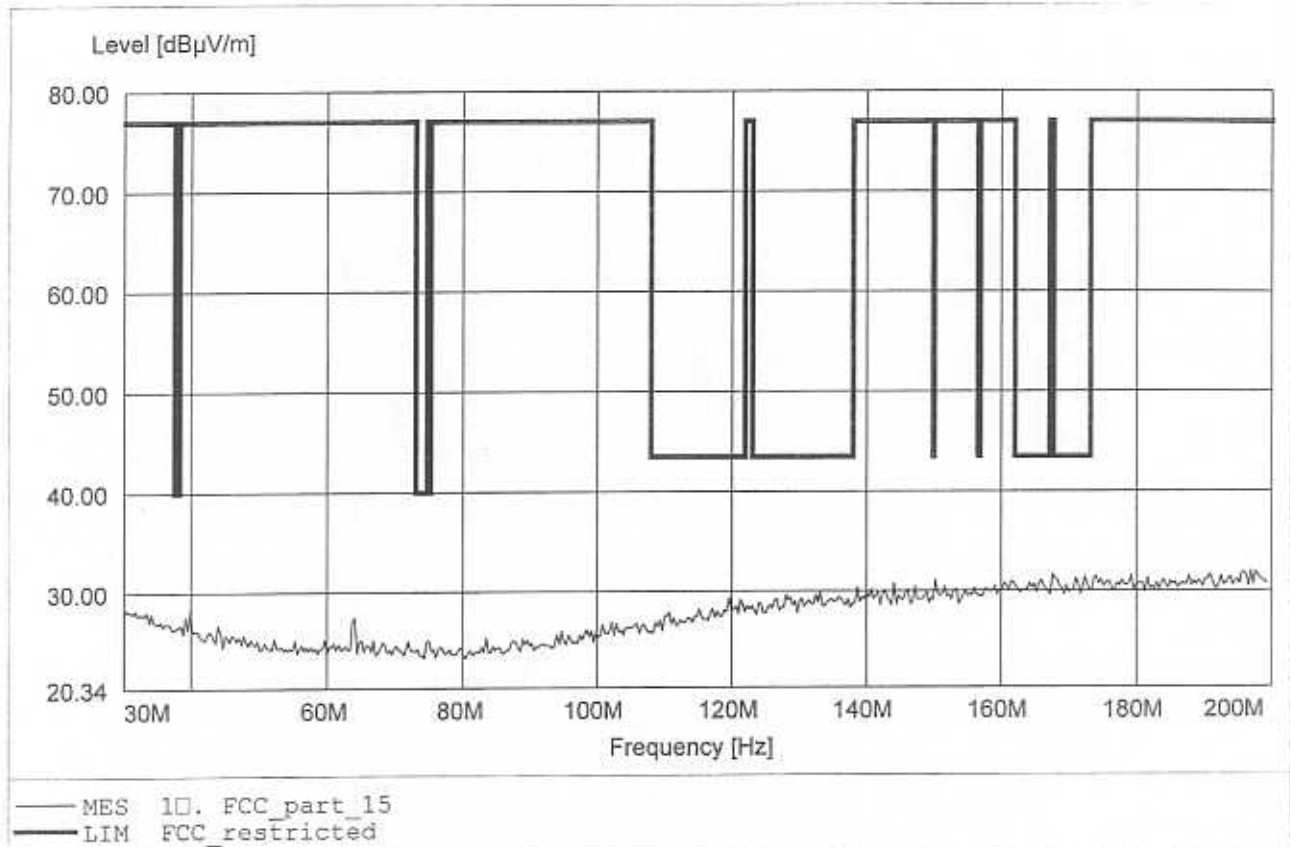

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C


EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300 Tx2441 MHz
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.912MHz, Emax: 32.10dBµV/m, RBW: 100kHz

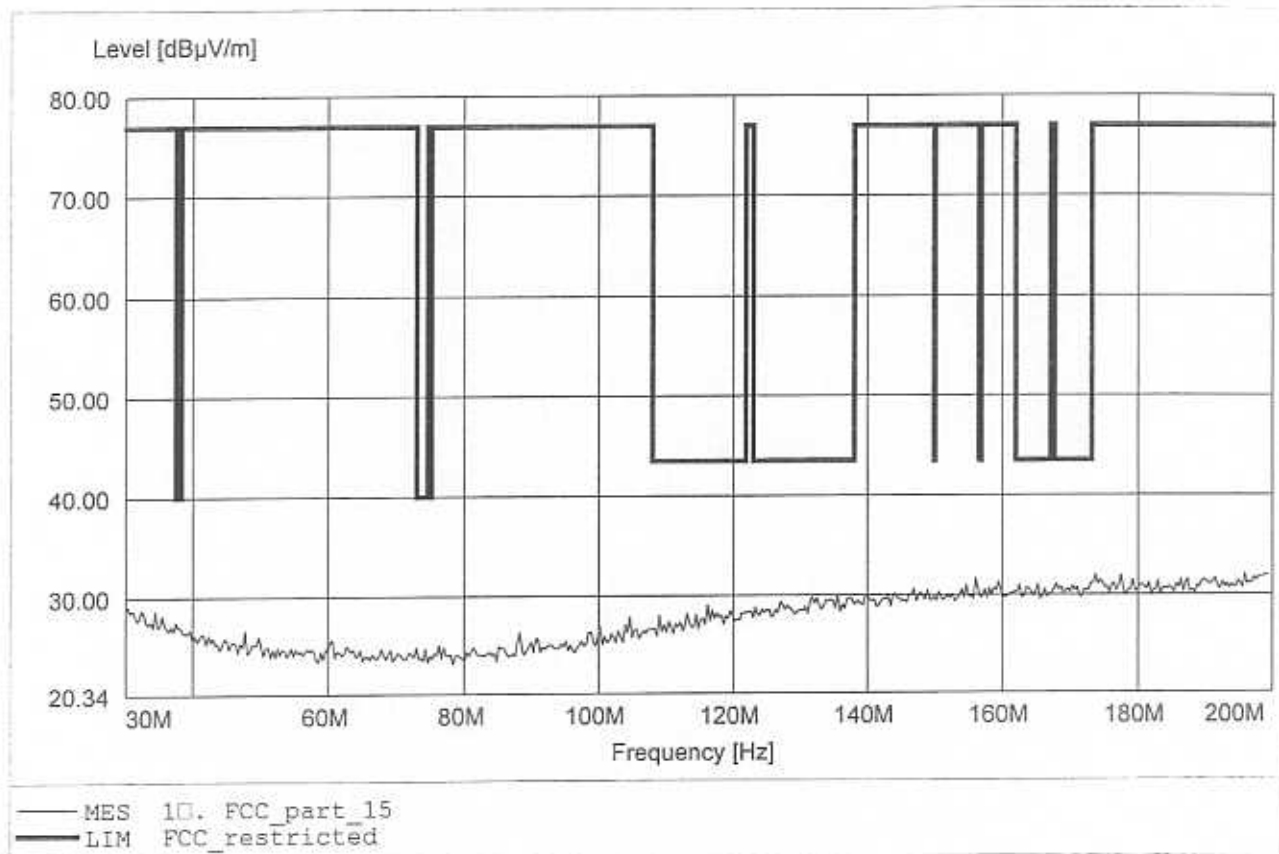

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 288.176MHz, Emax: 25.36dBuV/m, RBW: 100kHz


Tx2441 MHz

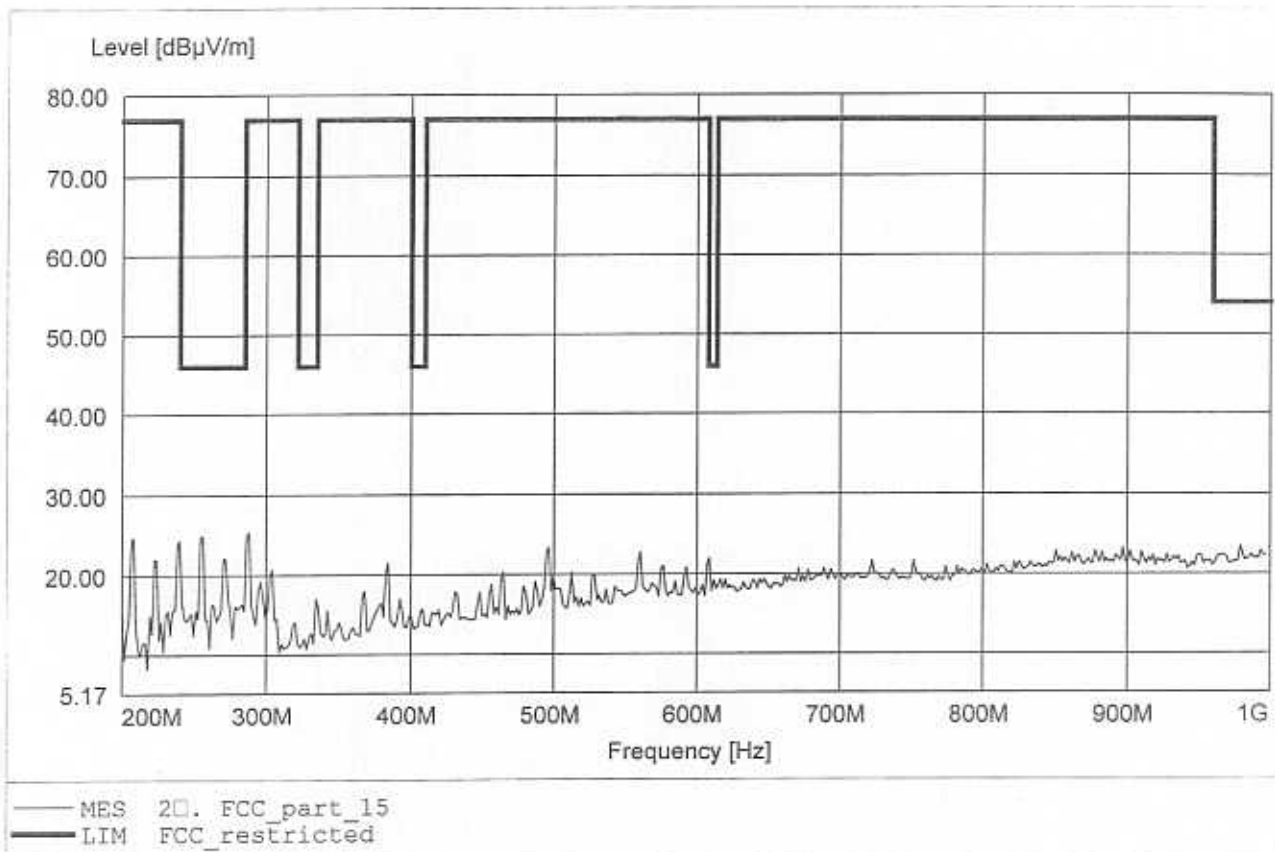

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 286.573MHz, Emax: 25.34dBuV/m, RBW: 100kHz


Tx2441 MHz

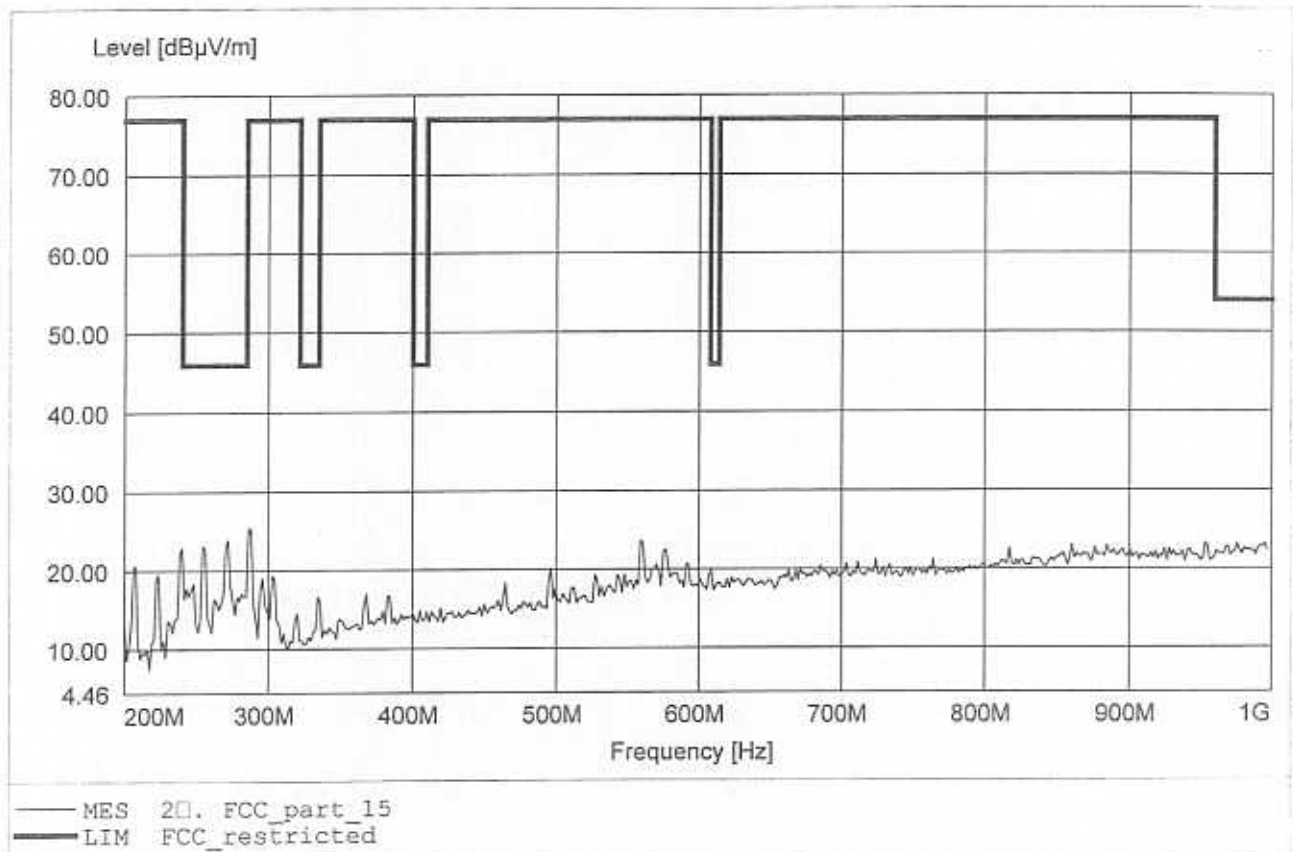

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 1.220GHz, Emax: 49.59dBµV/m, RBW: 1MHz


Tx2441 MHz

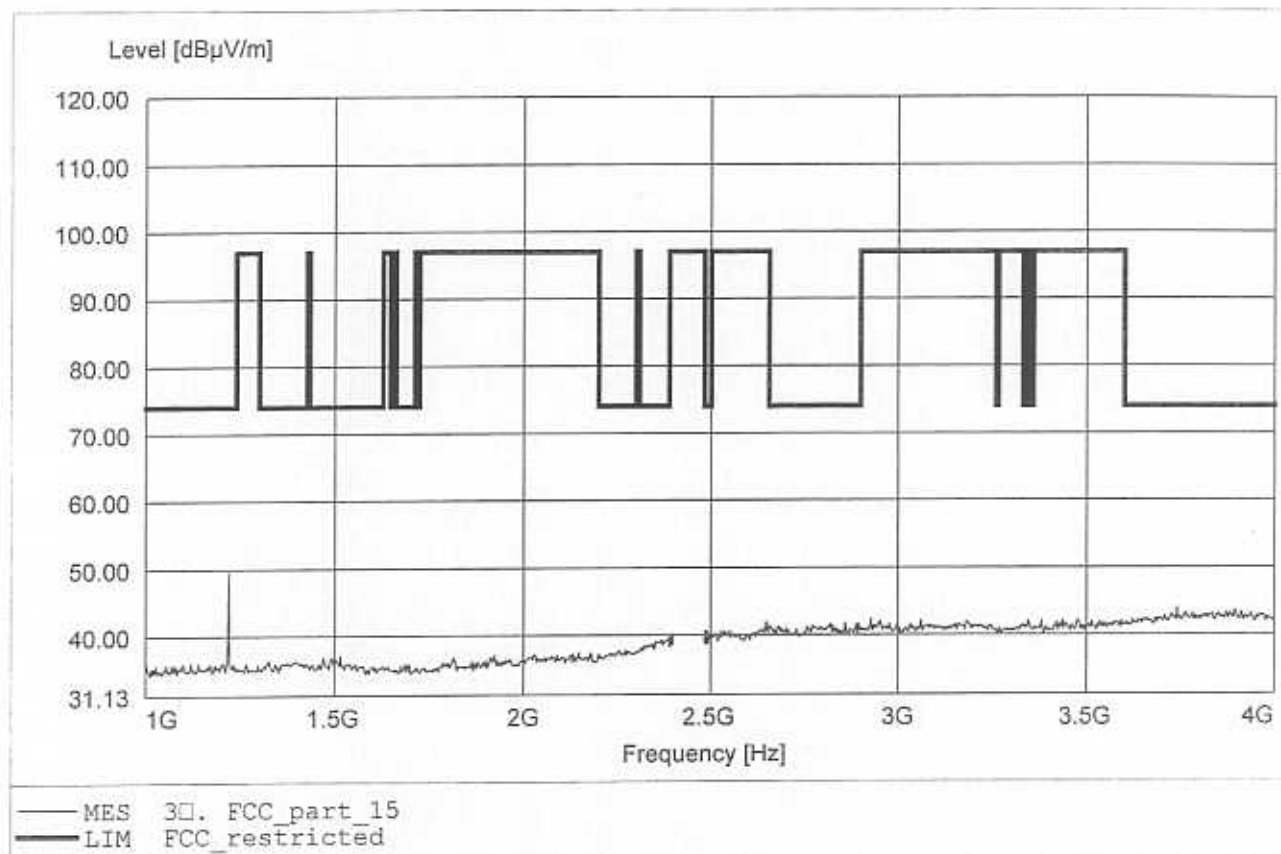

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
 Model: JABRA Model: BT100 Series 9300
 Approval Holder: GN Netcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC
 Test Site / Operator: ETS / Mr. Treffke
 Test Specification: according to S15.247, Limit 20 dB up peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
 Comment 2: Freq: 1.220GHz, Emax: 49.61dBuV/m, RBW: 1MHz


Tx2441 MHz

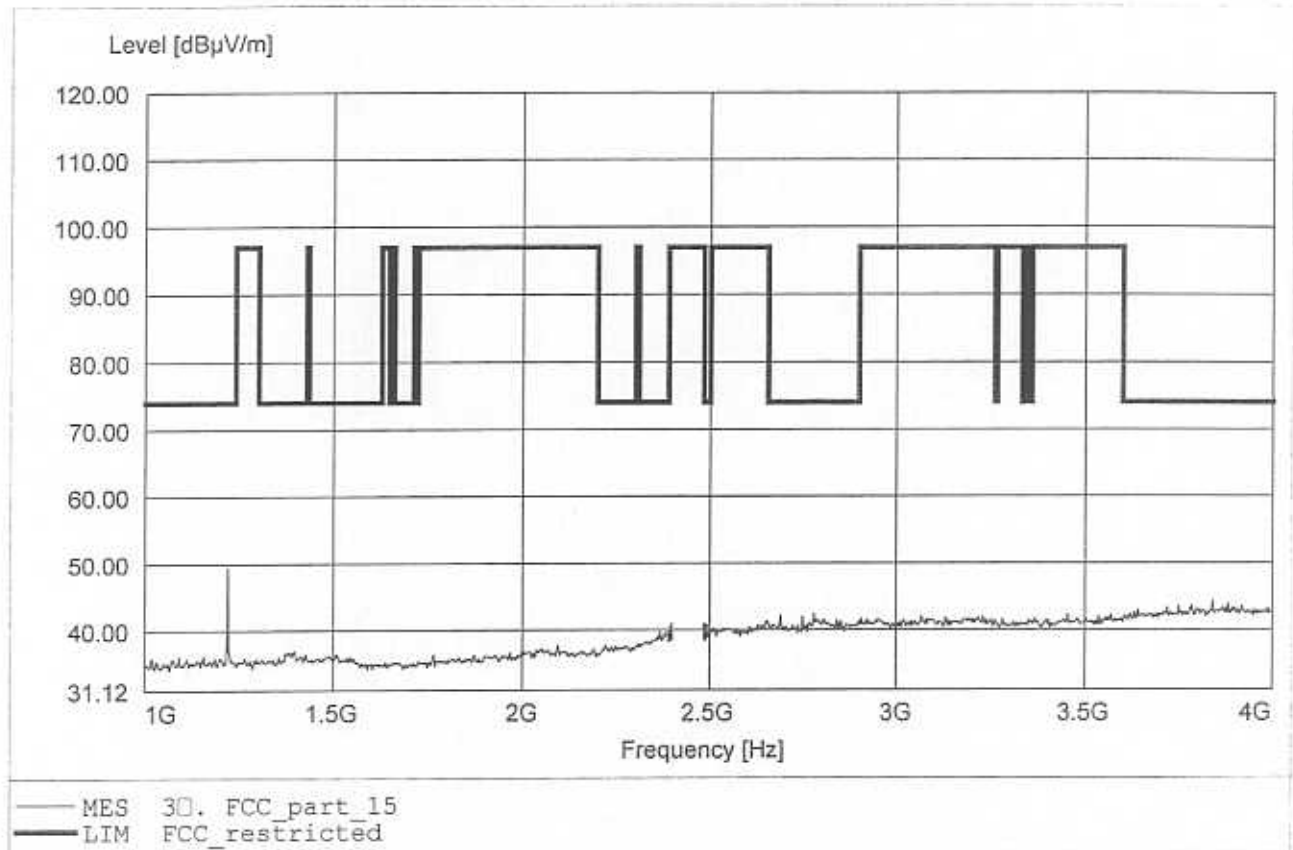

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.735GHz, Emax: 41.20dBµV/m, RBW: 1MHz


Tx 2441 MHz

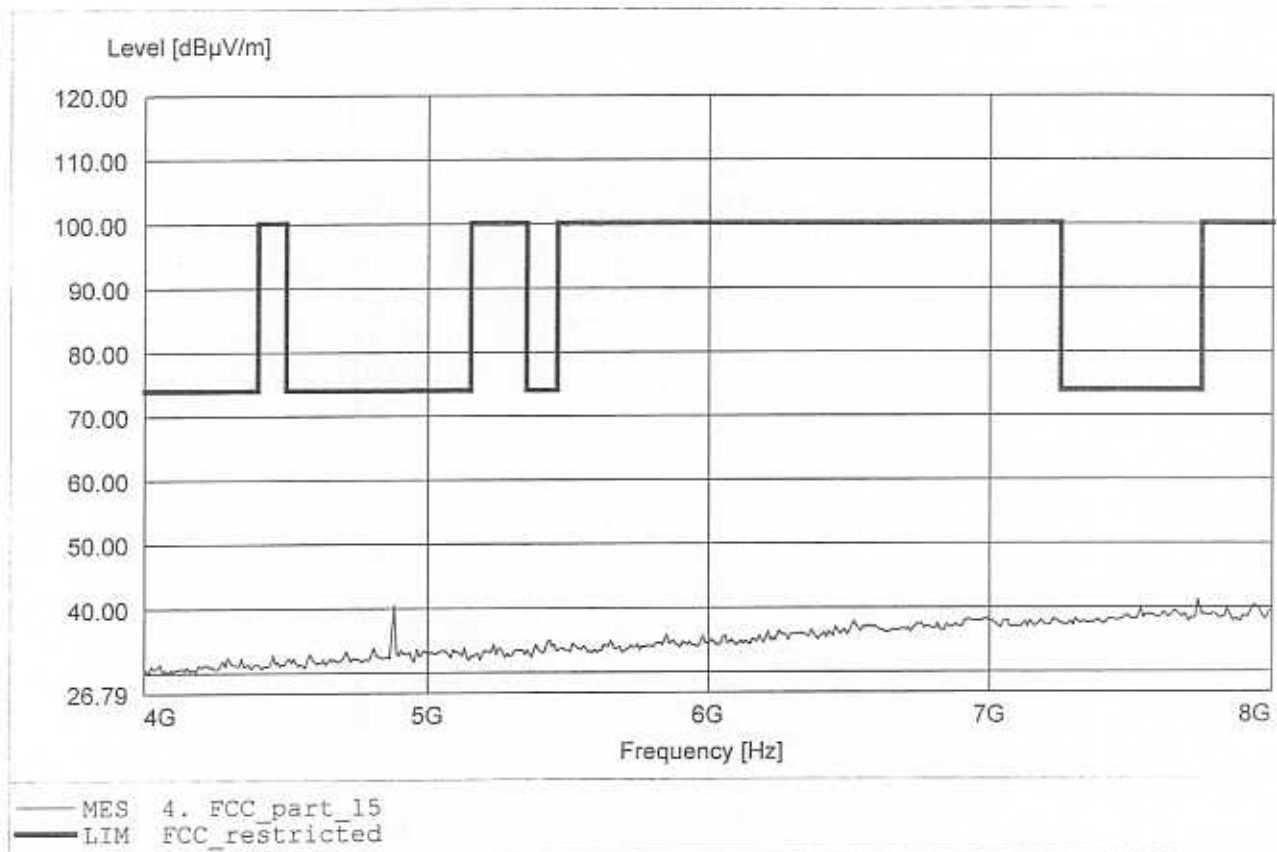

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 41.54dBμV/m, RBW: 1MHz


Tx 2441 MHz

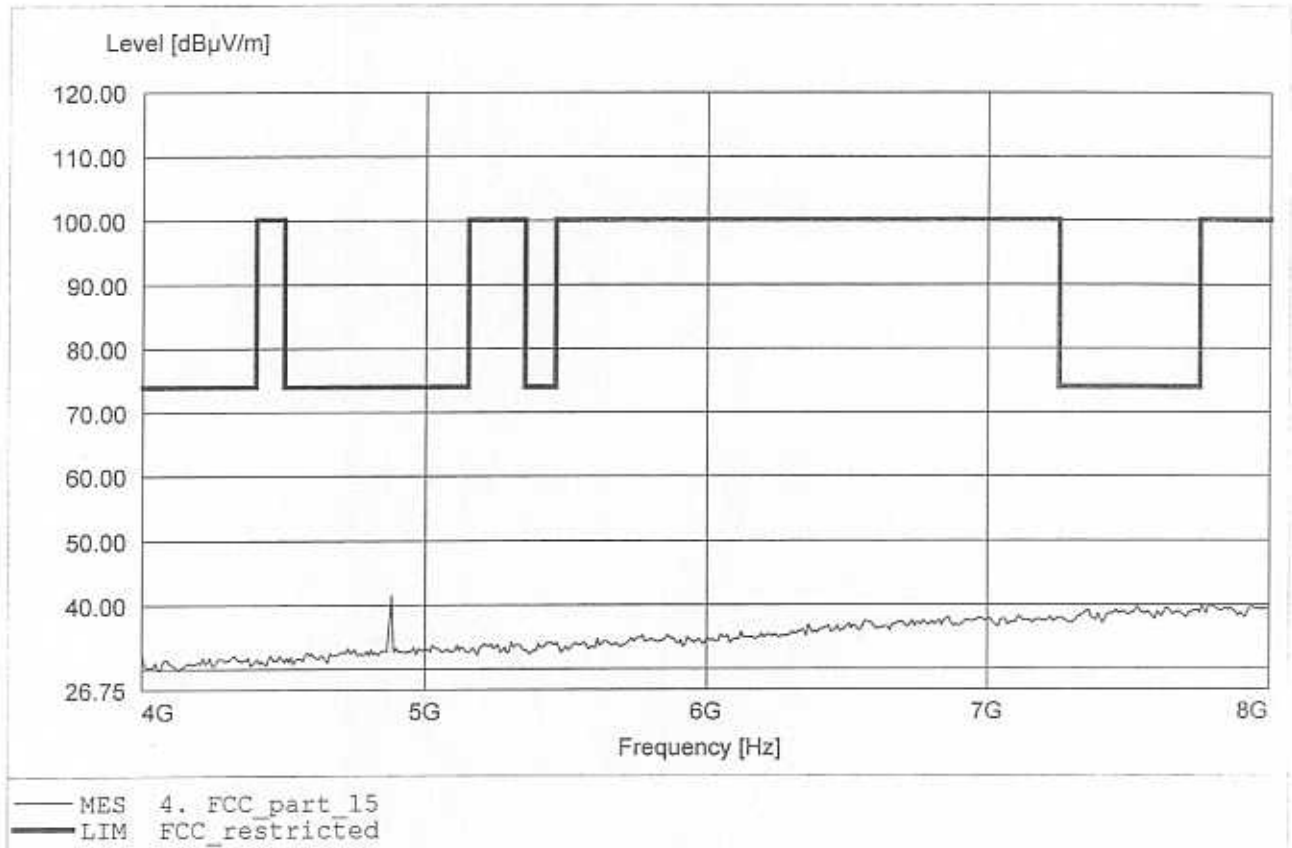

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.134GHz, Emax: 44.11dBµV/m, RBW: 1MHz


Tx 2441 MHz

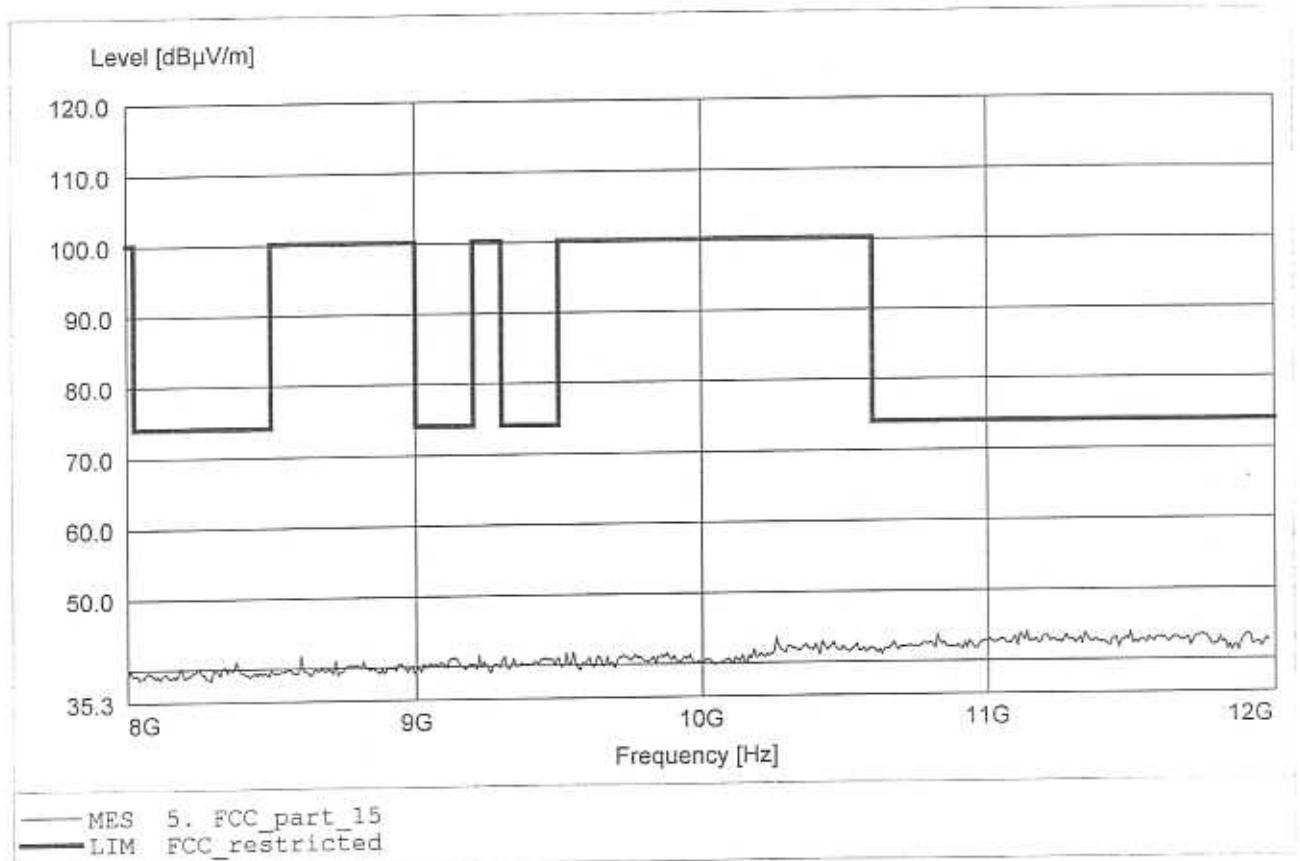

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.206GHz, Emax: 44.03dBuV/m, RBW: 1MHz


Tx 2441 MHz

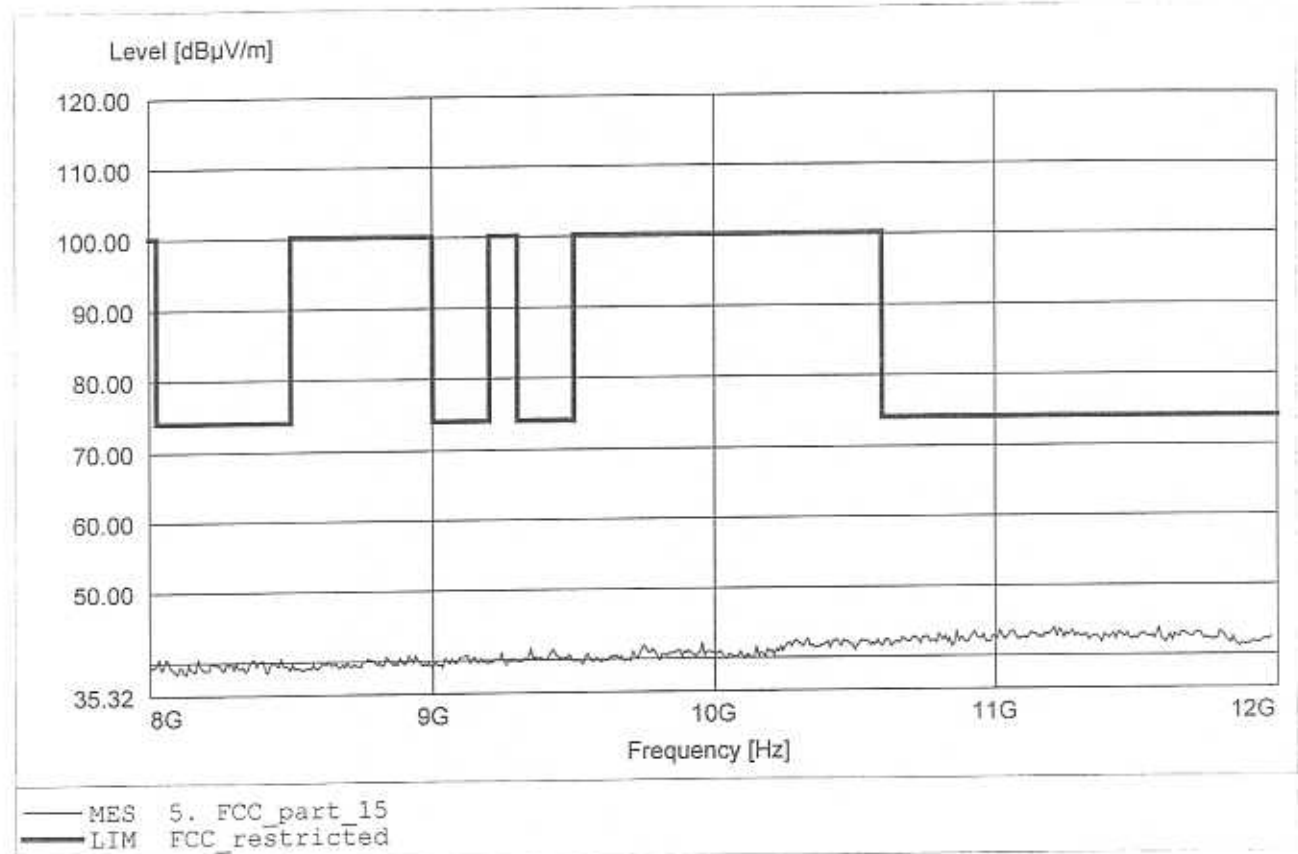

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to S15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 47.30dBµV/m, RBW: 1MHz


Tx 2441 MHz

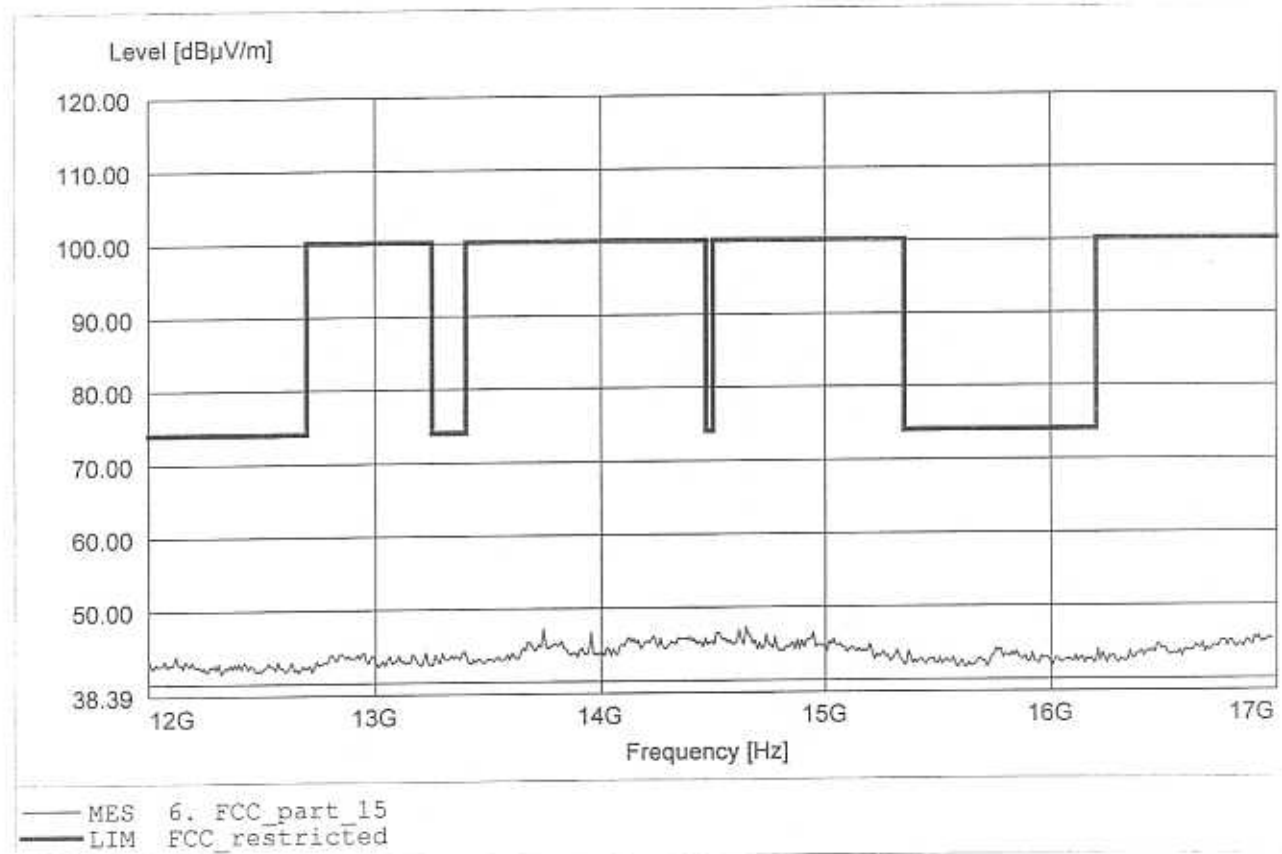

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 47.62dBuV/m, RBW: 1MHz


Tx 2441 MHz

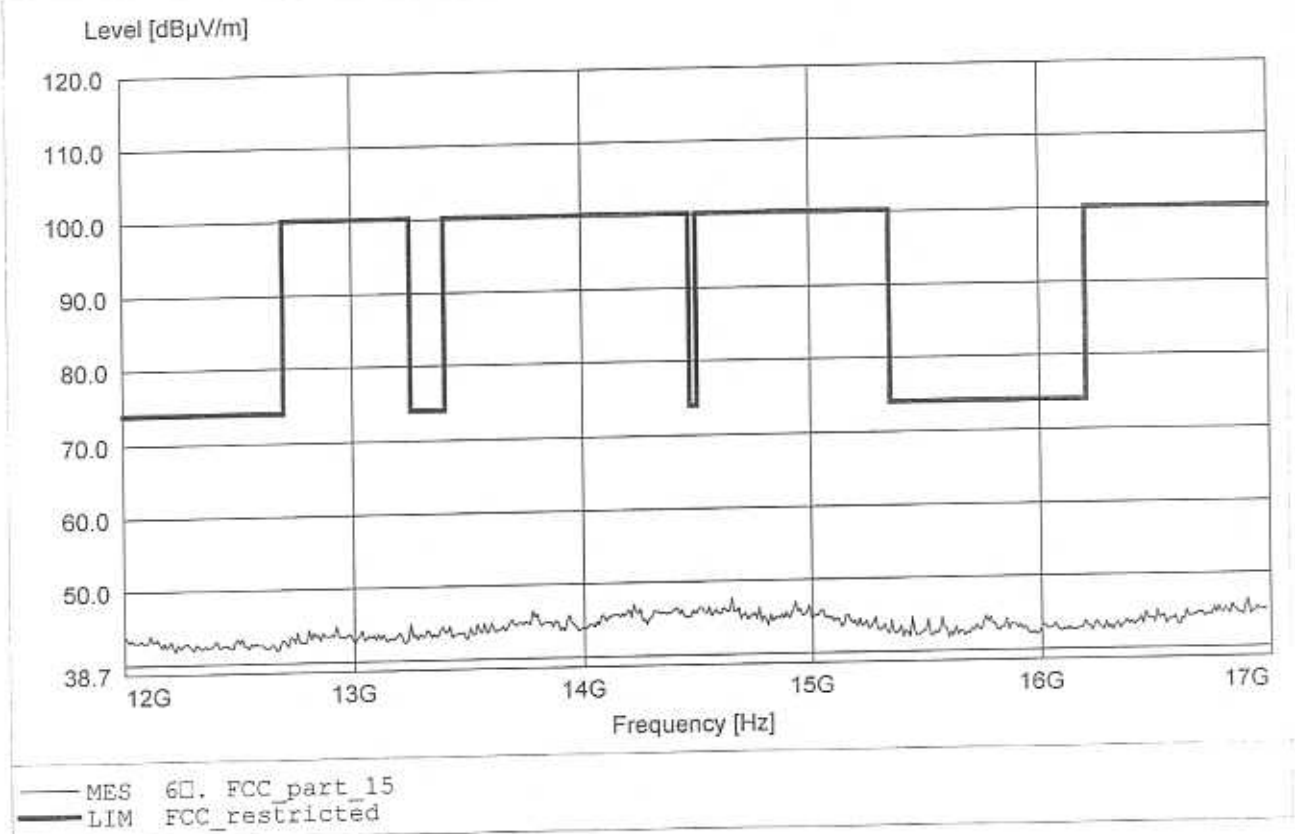

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 47.13dBµV/m, RBW: 1MHz


Tx 2441 MHz

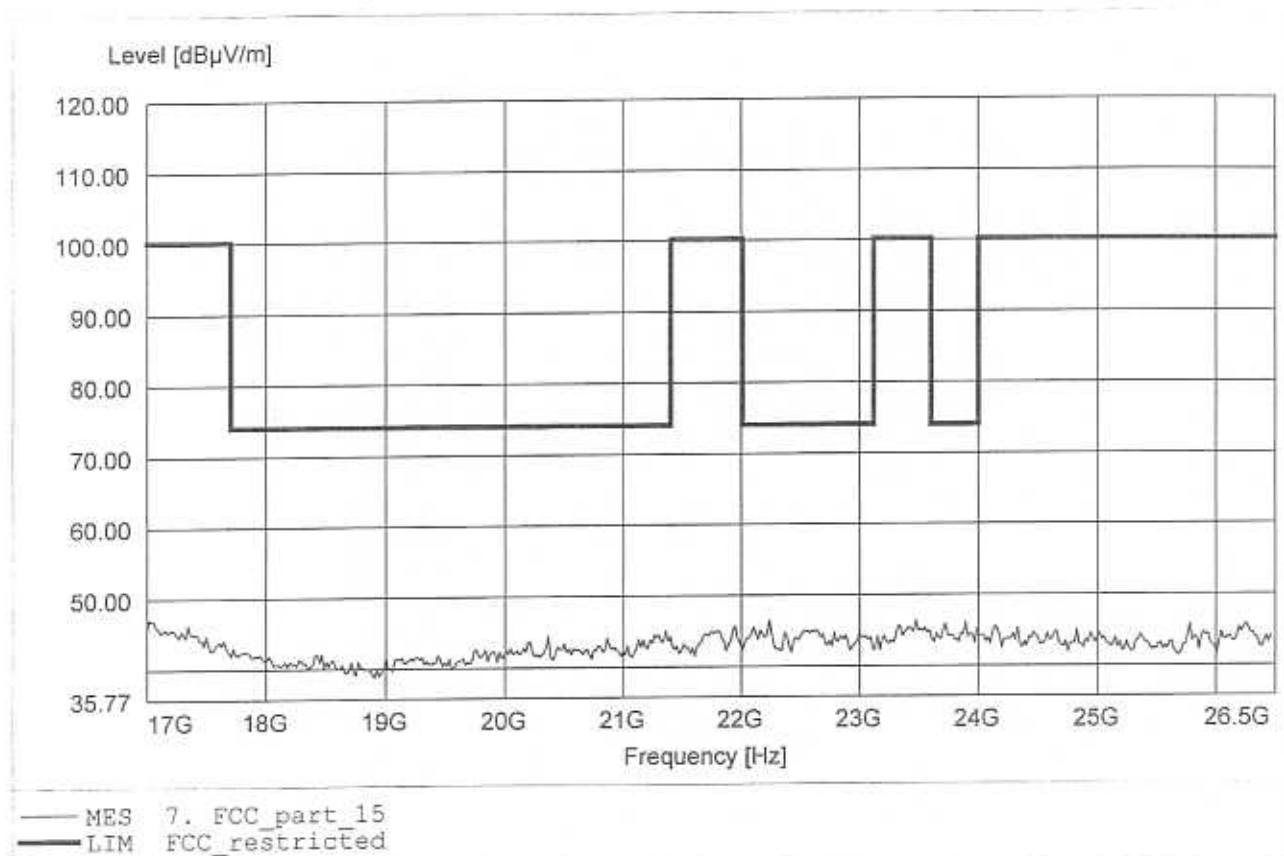

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 47.83dBµV/m, RBW: 1MHz


Tx 2441 MHz

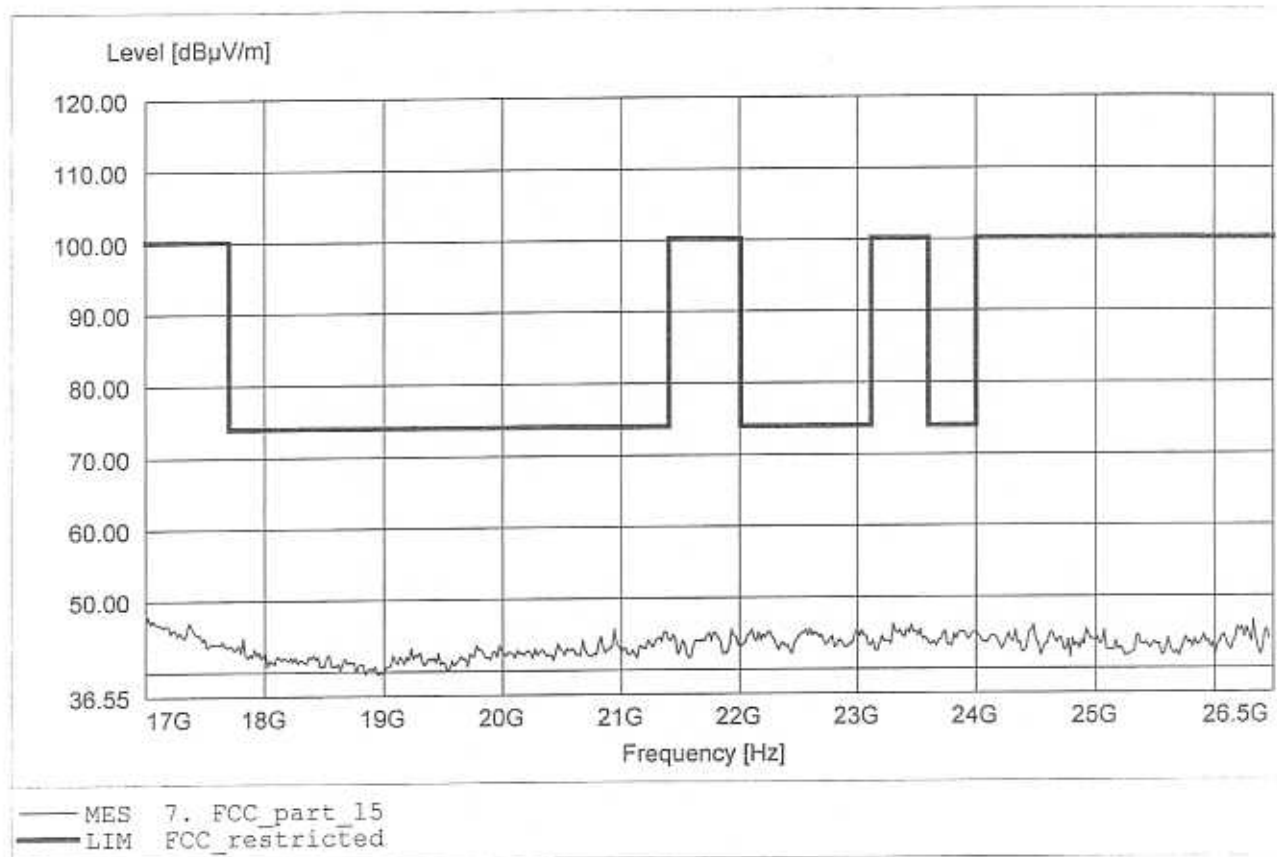

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 184.329MHz, Emax: 32.44dBµV/m, RBW: 100kHz


Tx2480 MHz

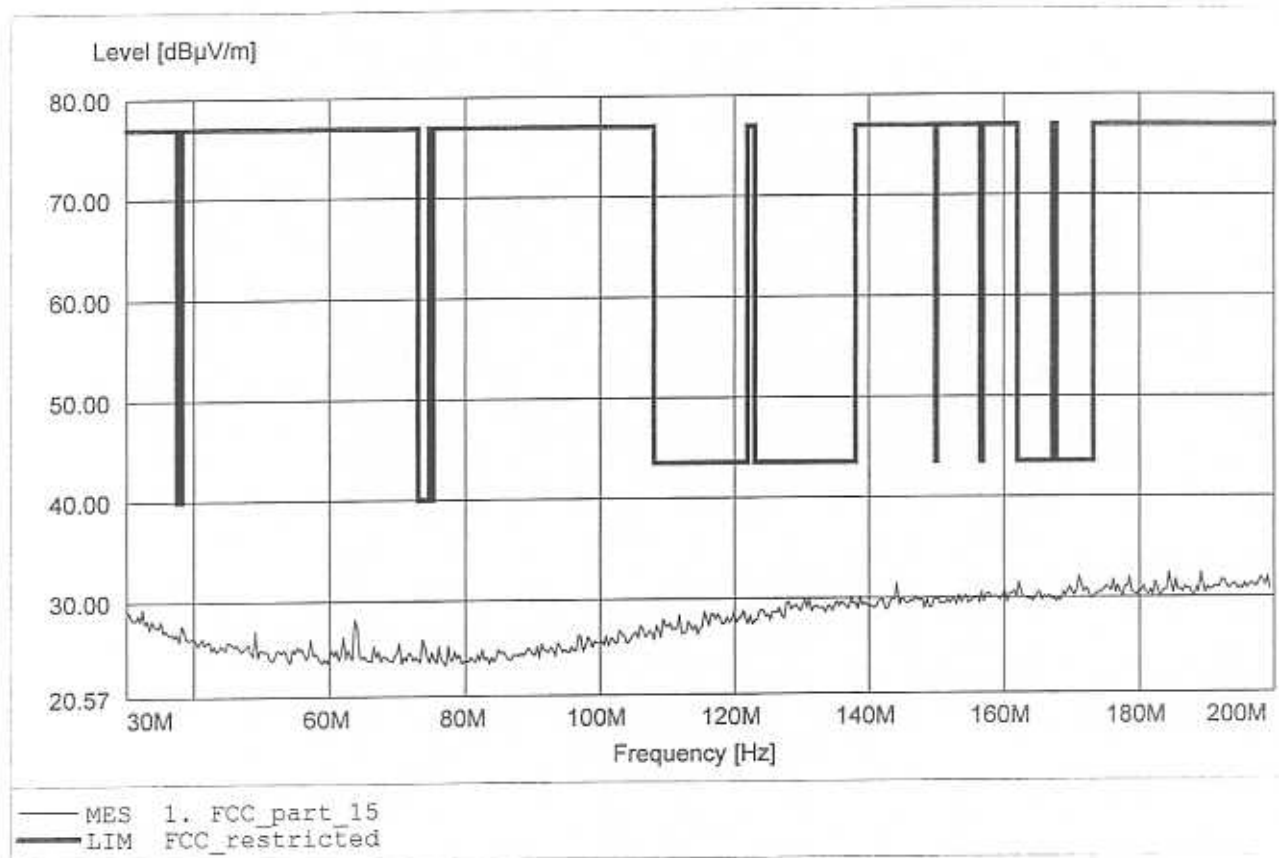

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Tx2480 MHz


EUT : Bluetooth Wireless Headset
 Model: JABRA Model: BT100 Series 9300
 Approval Holder: GN Netcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC
 Test Site / Operator: ETS / Mr. Treffke
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: HK 116
 Comment 2: Freq: 173.086MHz, Emax: 32.14dBµV/m, RBW: 100kHz

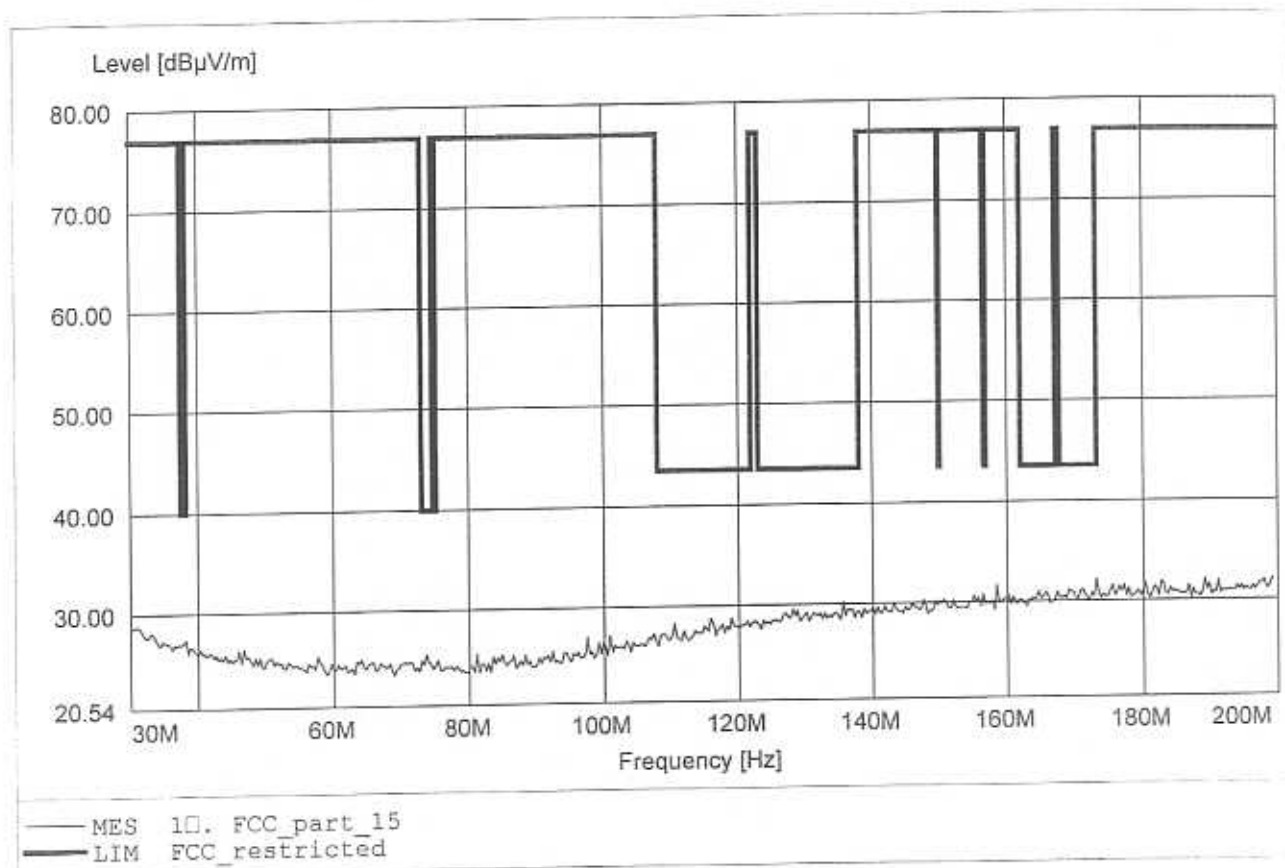

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 286.573MHz, Emax: 25.94dBµV/m, RBW: 100kHz


Tx2480 MHz

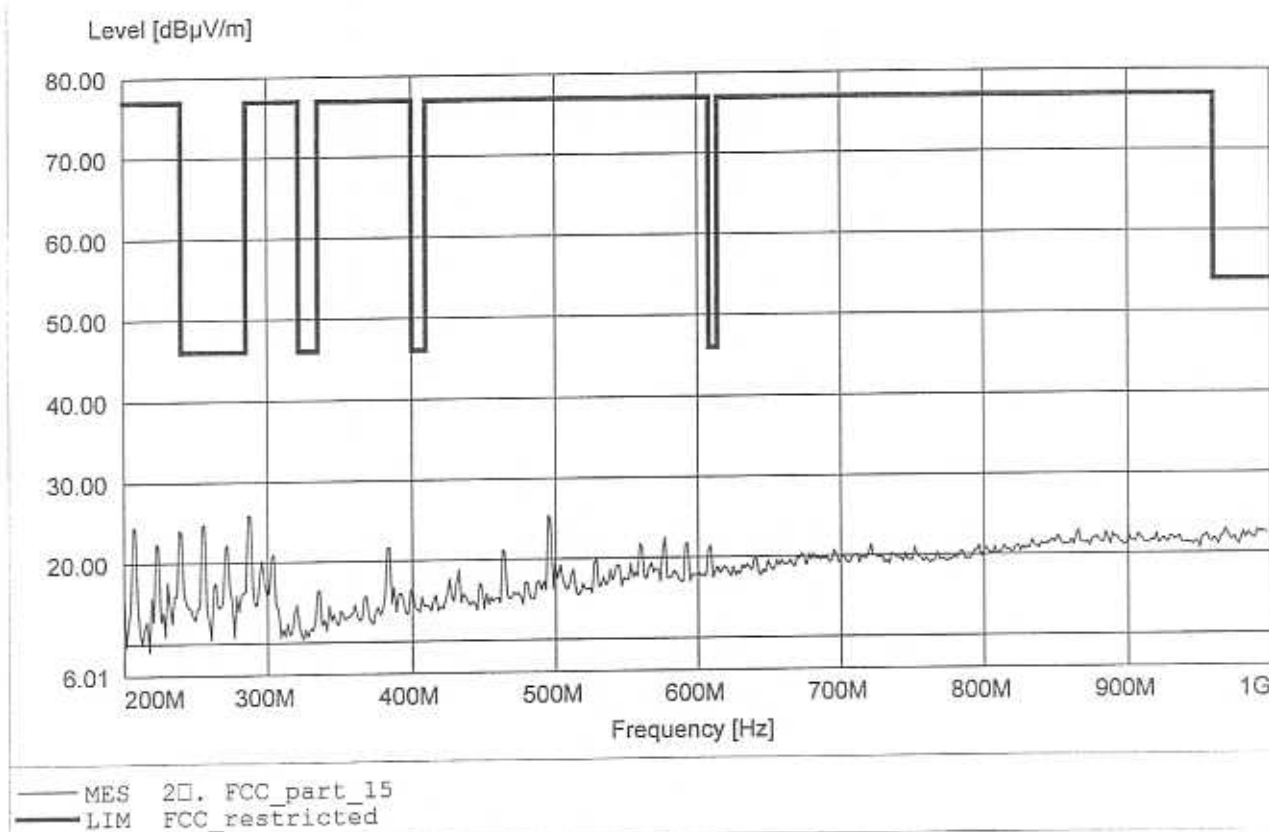

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 288.176MHz, Emax: 26.93dBµV/m, RBW: 100kHz


Tx2480 MHz

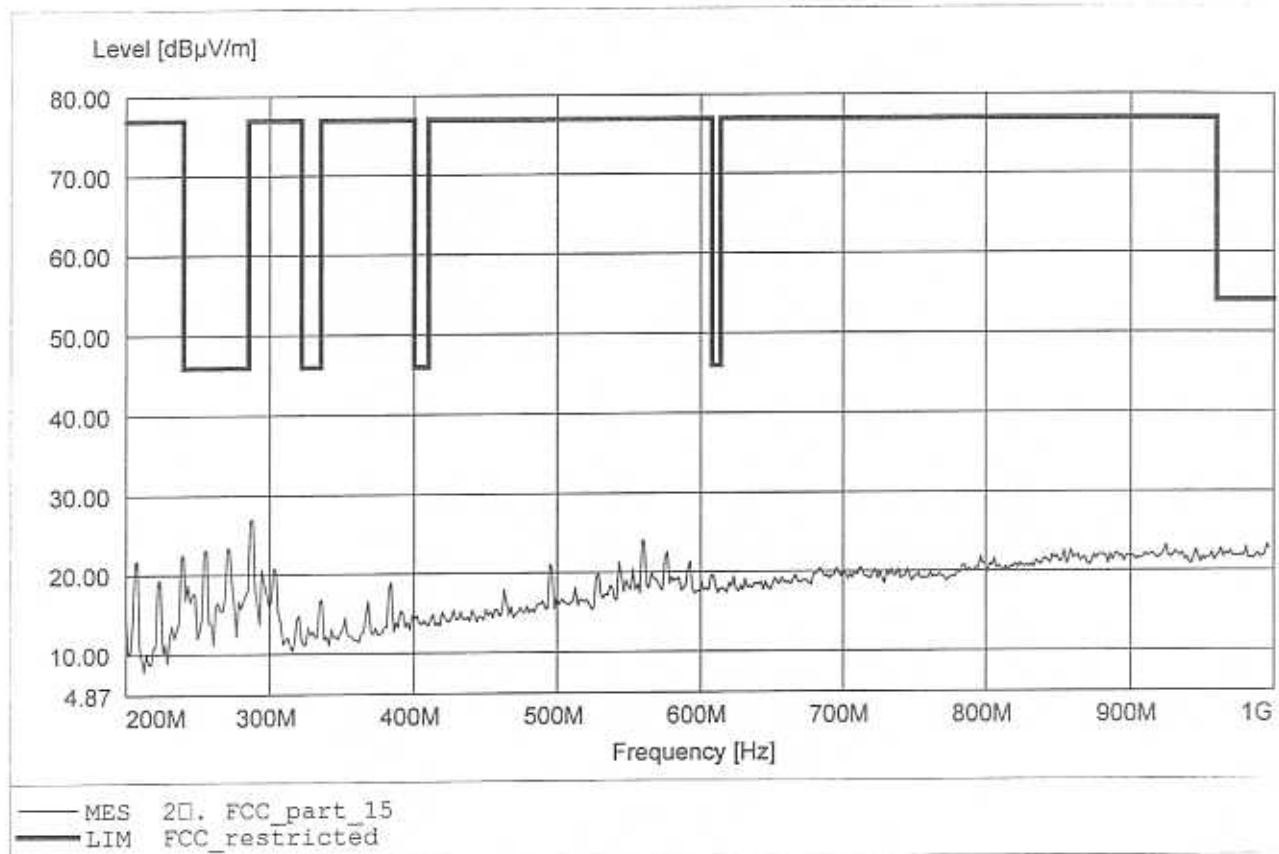

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
 Model: JABRA Model: BT100 Series 9300
 Approval Holder: GN Netcom
 Operating Condition: Tnom:23°C / Unom: 3.7 V DC
 Test Site / Operator: ETS / Mr. Treffke
 Test Specification: according to §15.247, Limit 20 dB up peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
 Comment 2: Freq: 2.484GHz, Emax: 51.14dBμV/m, RBW: 1MHz


Tx2480 MHz

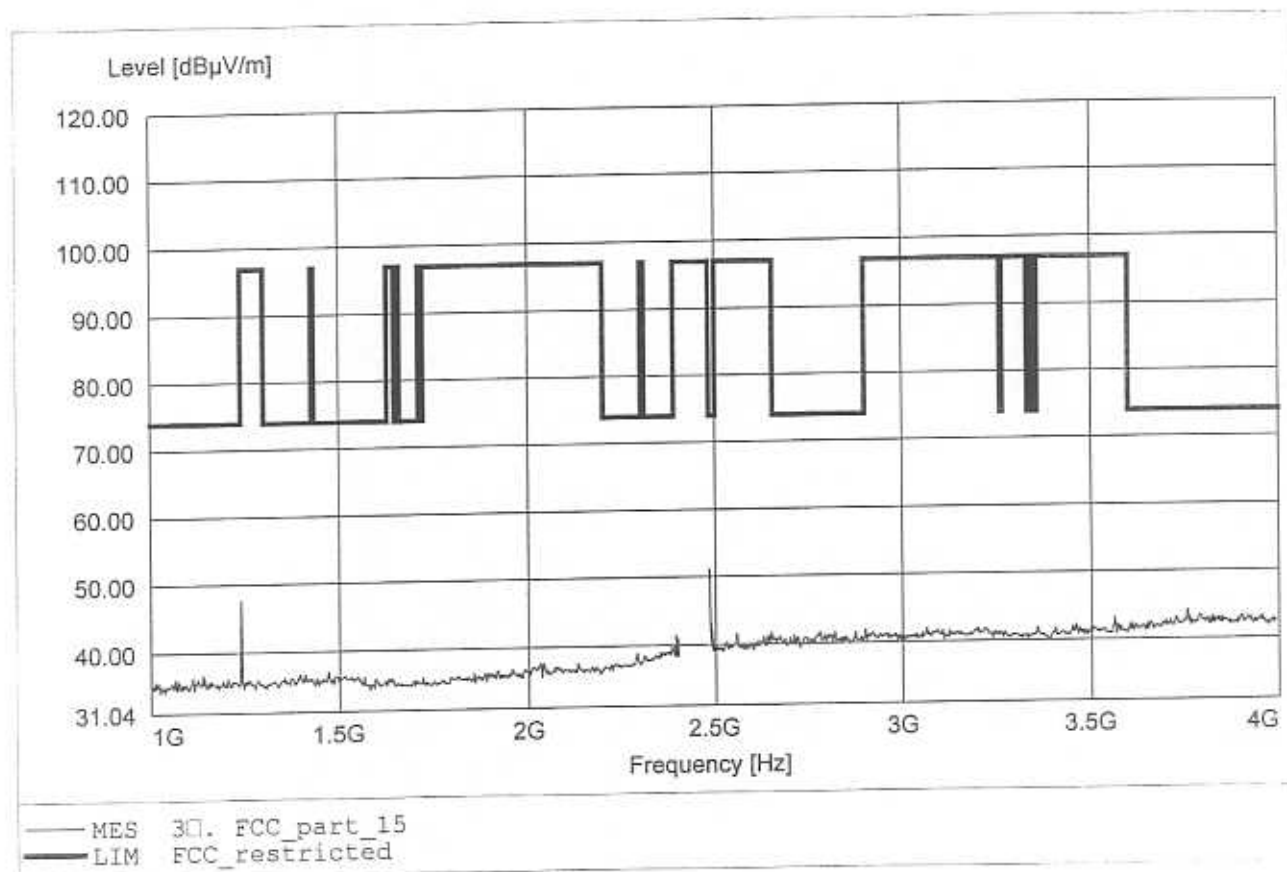

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Series 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 54.64dBμV/m, RBW: 1MHz


Tx2480 MHz

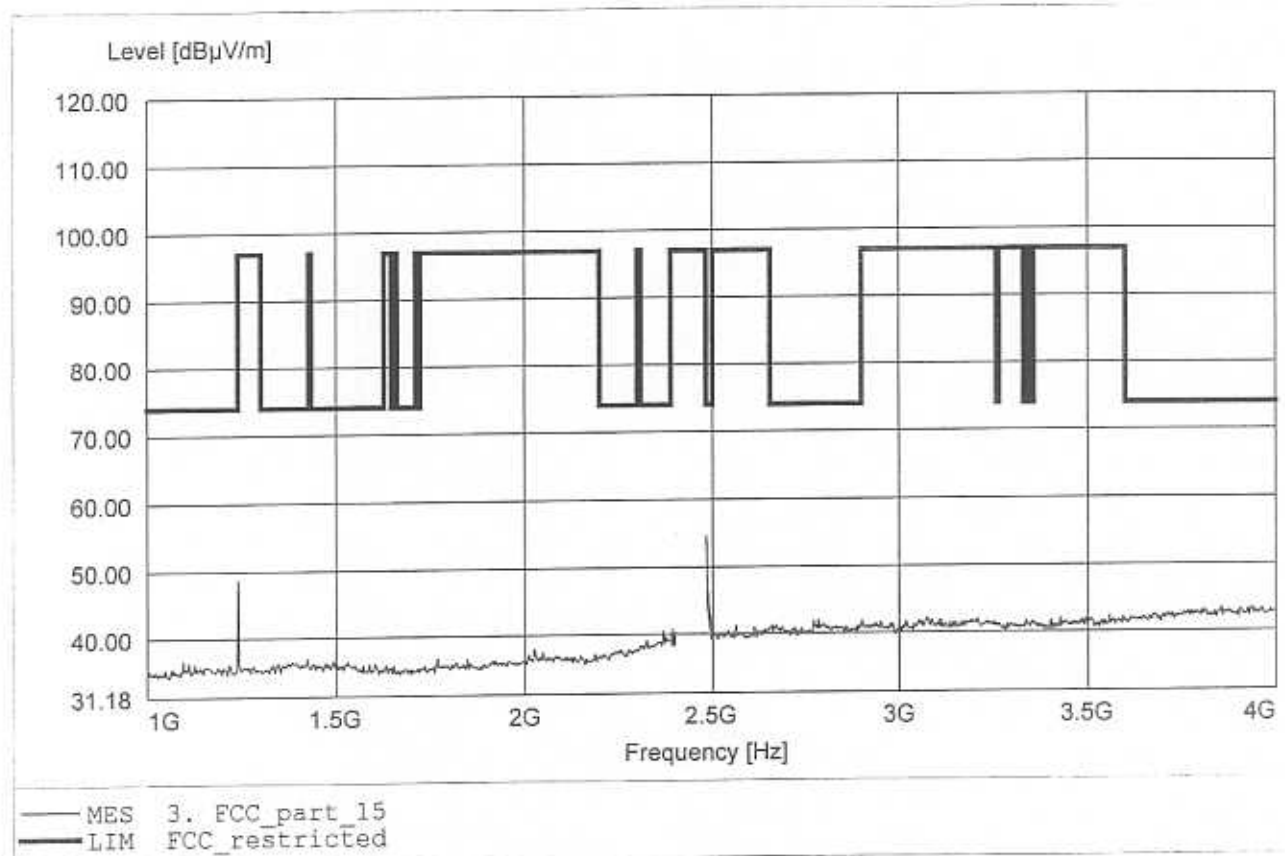

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.928GHz, Emax: 40.31dBμV/m, RBW: 1MHz


Tx 2480 MHz

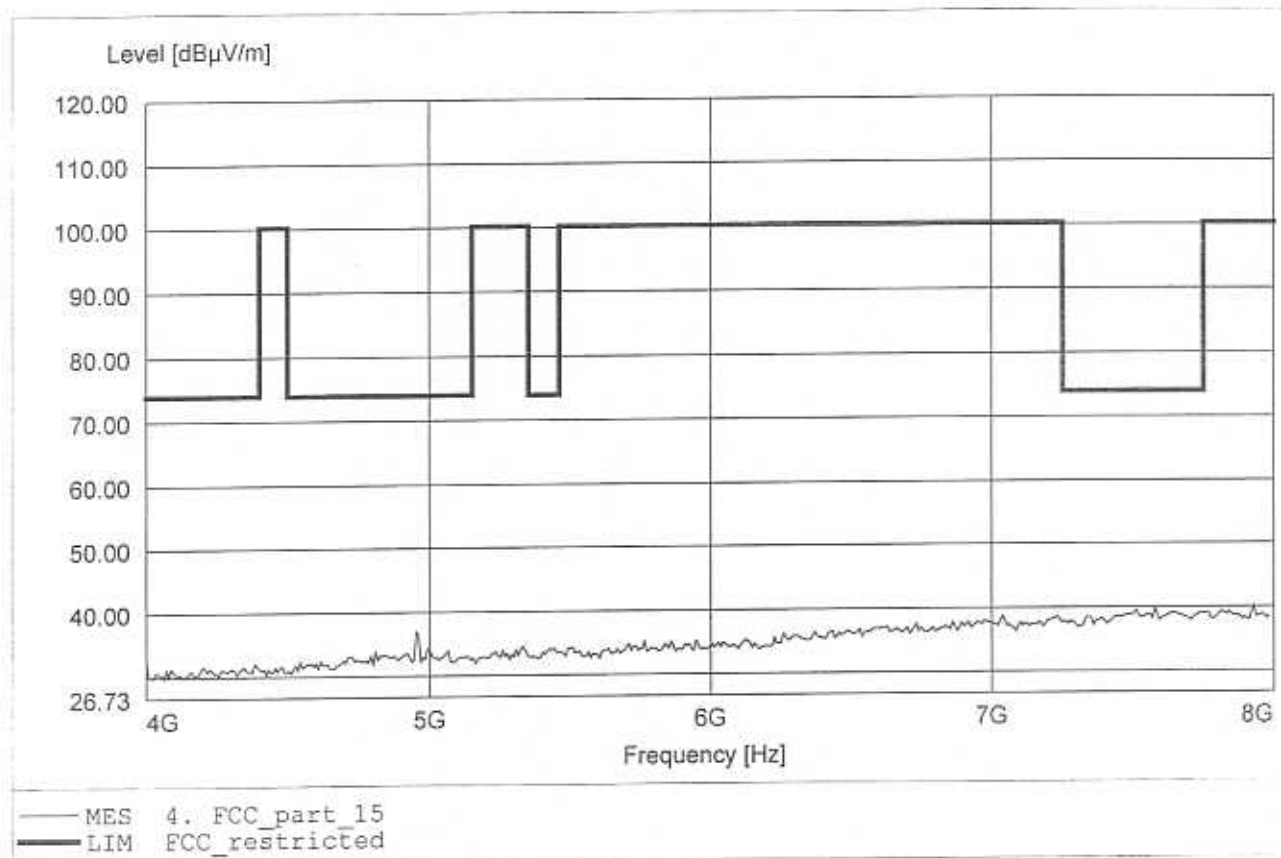

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 44.17dBµV/m, RBW: 1MHz


Tx 2480 MHz

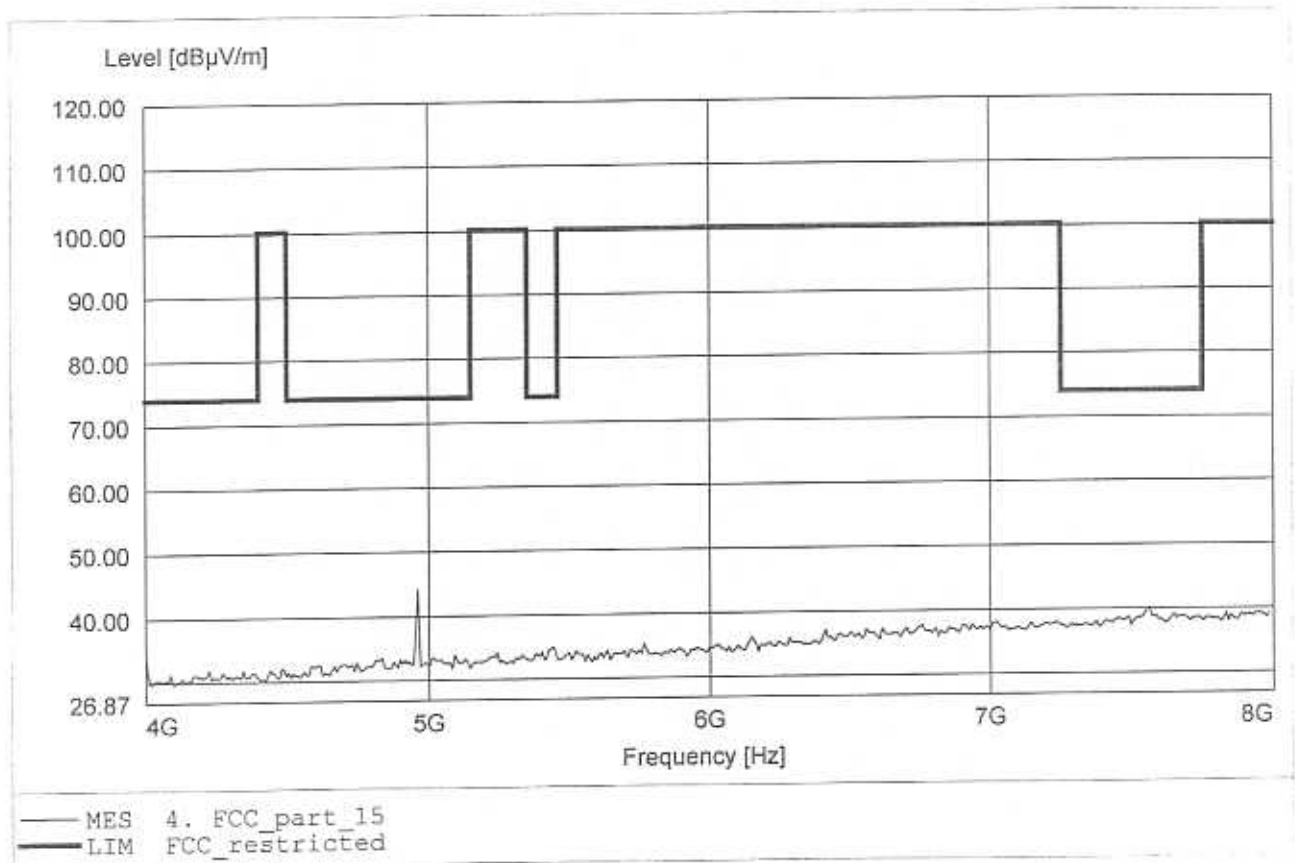

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 10.782GHz, Emax: 43.77dBµV/m, RBW: 1MHz


Tx 2480 MHz

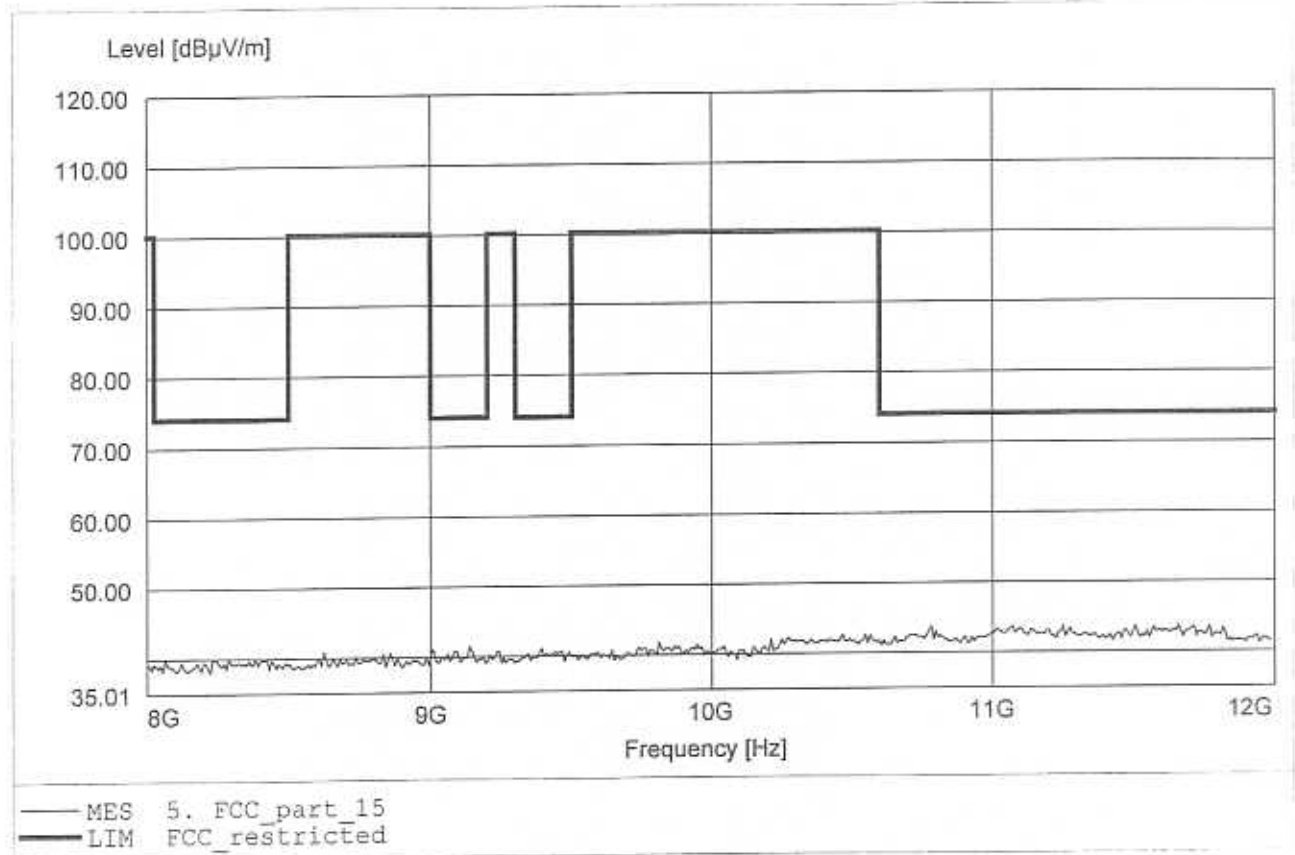

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.230GHz, Emax: 44.73dBuV/m, RBW: 1MHz


Tx 2480 MHz

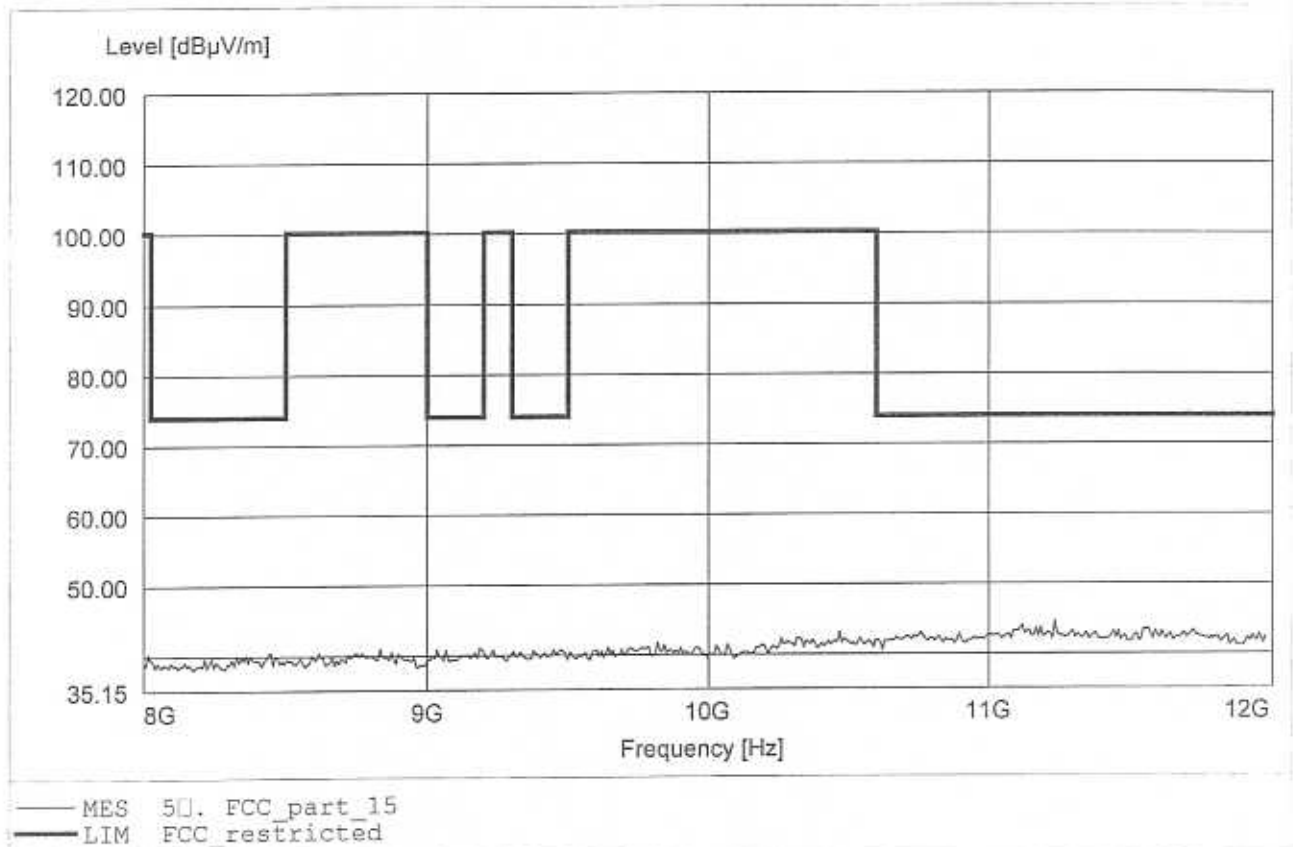

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.575GHz, Emax: 46.62dBμV/m, RBW: 1MHz


Tx 2480 MHz

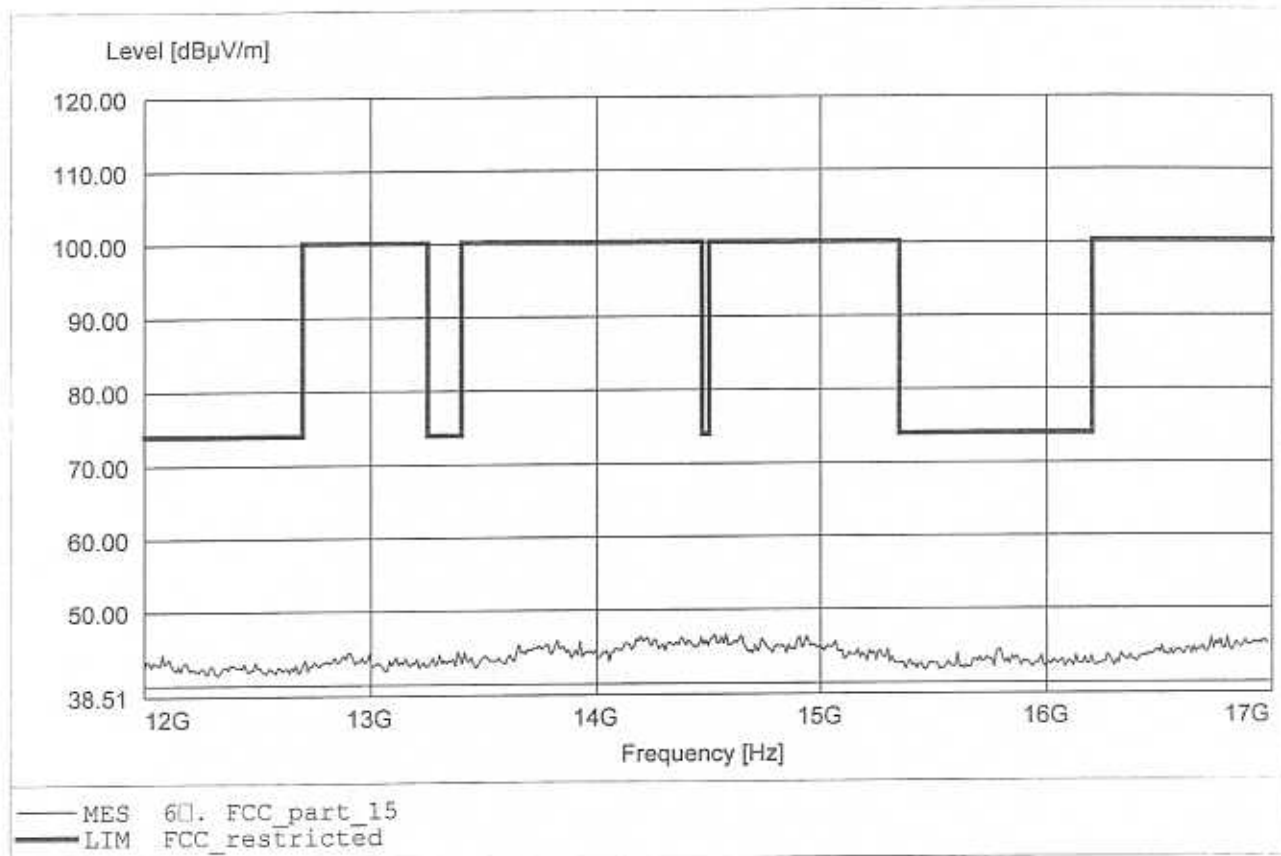

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.675GHz, Emax: 47.01dBµV/m, RBW: 1MHz


Tx 2480 MHz

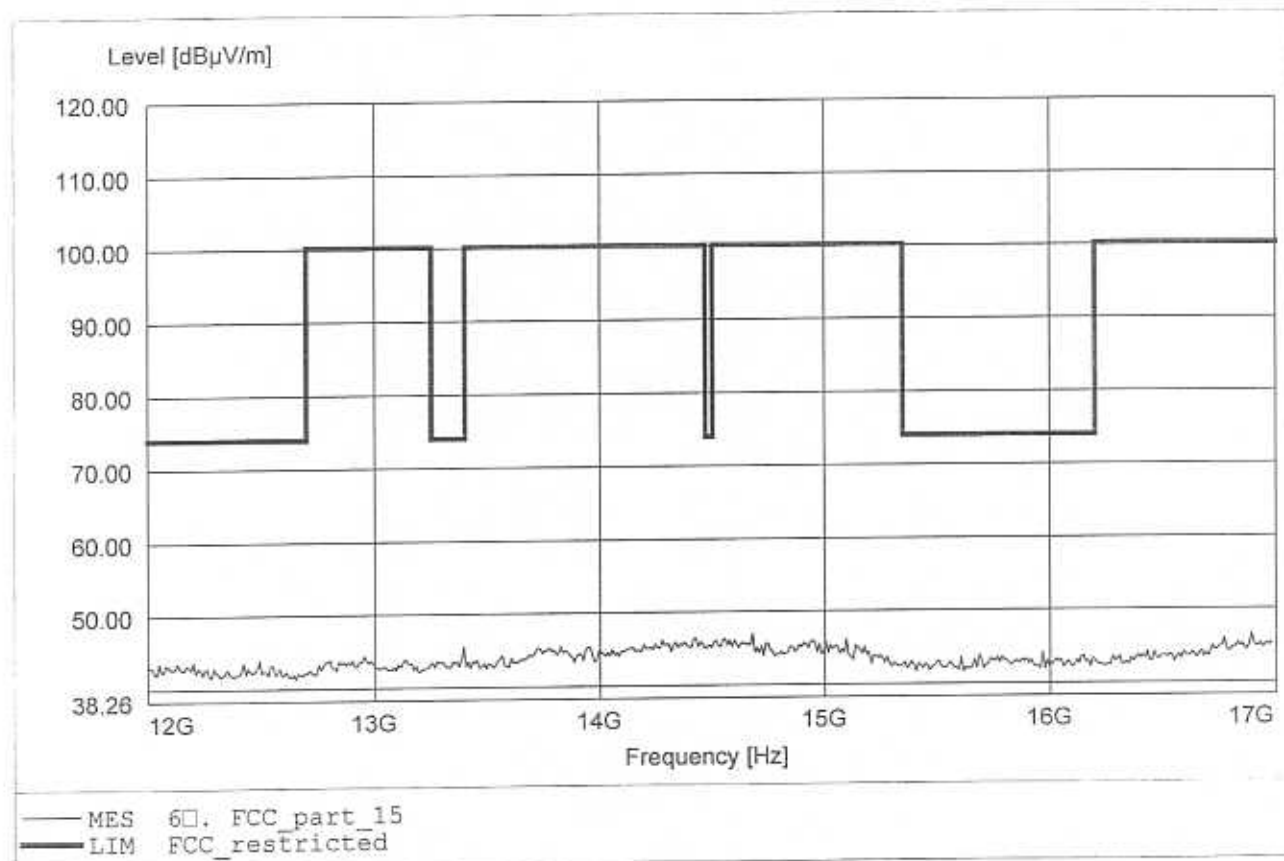

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 47.64dBμV/m, RBW: 1MHz


Tx 2480 MHz

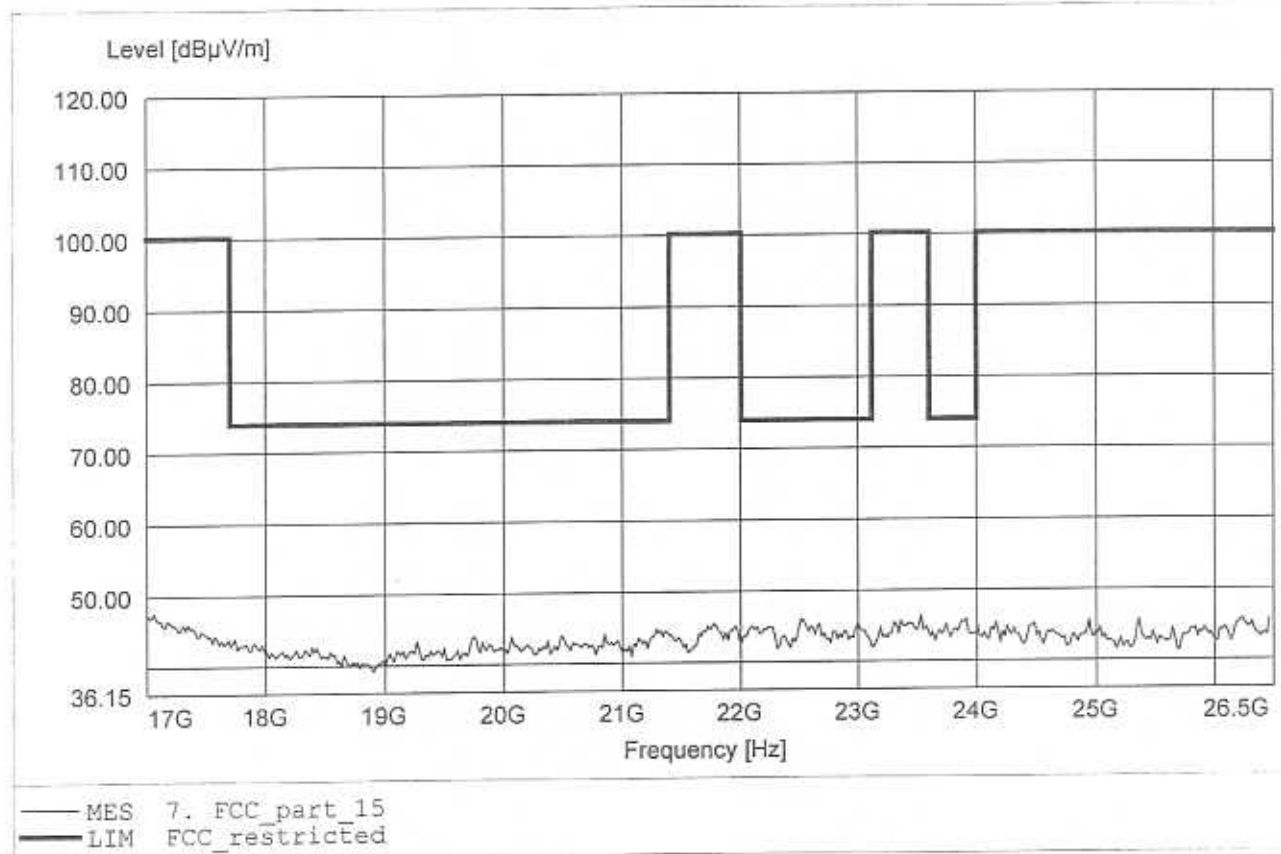

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth Wireless Headset
Model: JABRA Model: BT100 Serie 9300
Approval Holder: GN Netcom
Operating Condition: Tnom:23°C / Unom: 3.7 V DC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: according to §15.247, Limit 20 dB up peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 48.68dBμV/m, RBW: 1MHz

Tx 2480 MHz

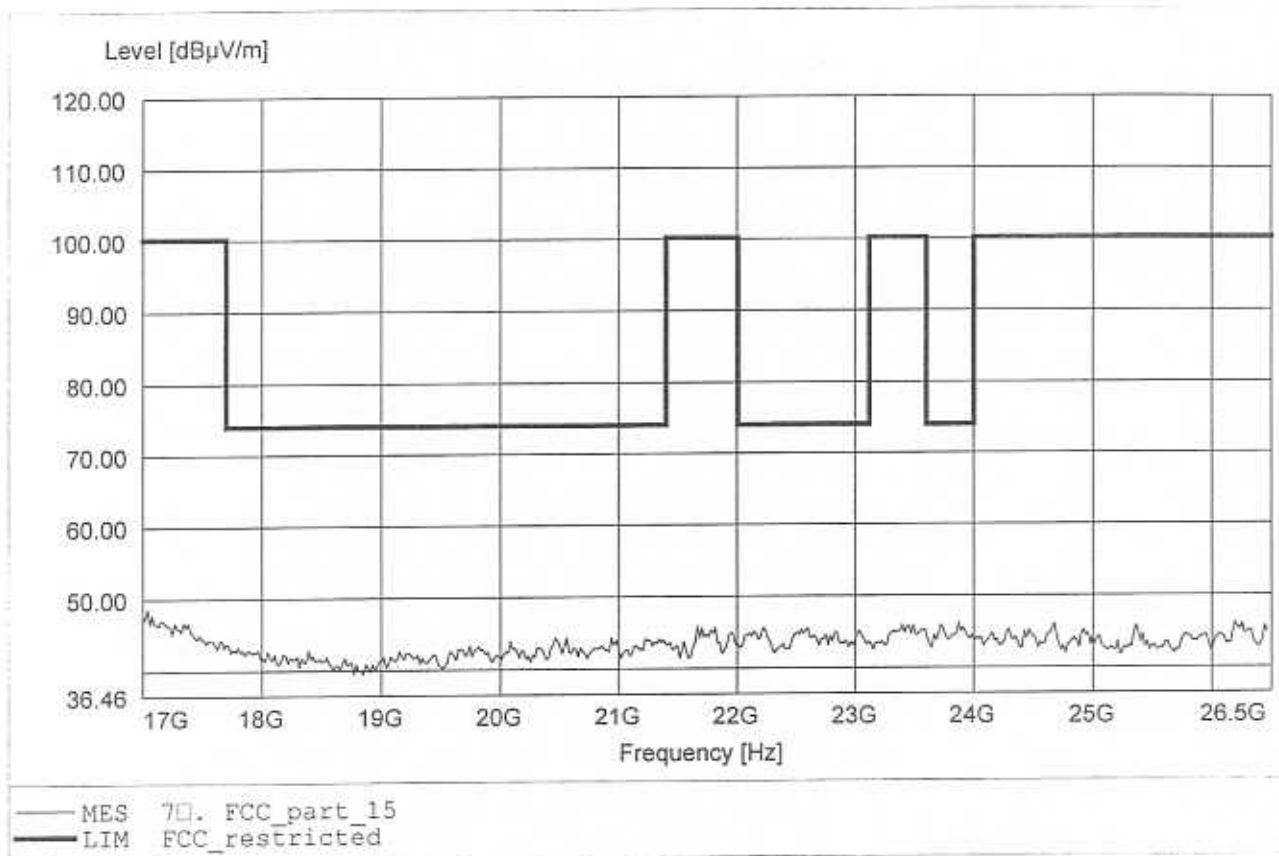


Appendix D

Spurious Emissions radiated – Charging mode


*Spurious emission under normal conditions
according to FCC part 15*

EUT: BLUETOOTH
 Manufacturer: GN NETCOM
 Operating Condition: Unom: 120VAC, Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Pflug
 Test Specification: Ant: HL 223, vertical/horizontal
 Comment: model: MOTOROLA/JABRA mode: charging

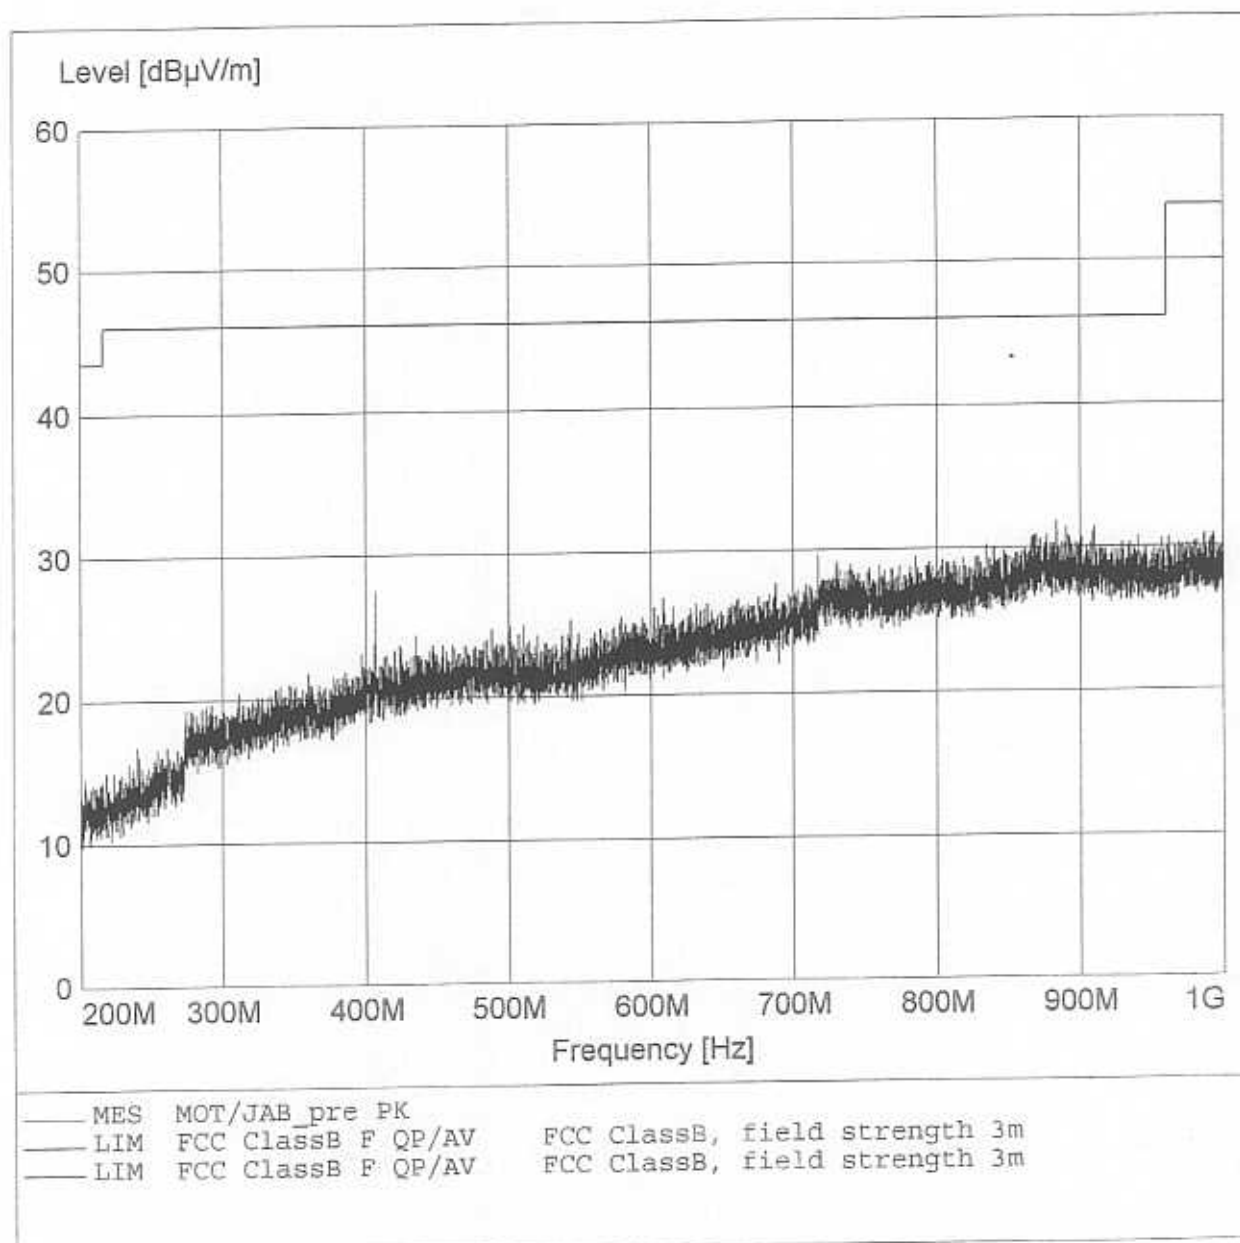

*Spurious emission under normal conditions
according to FCC part 15*

EUT: BLUETOOTH
 Manufacturer: GN NETCOM
 Operating Condition: Unom: 120VAC, Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Pflug
 Test Specification: Ant: HK 116, vertical/horizontal
 Comment: model: MOTOROLA/JABRA mode: charging

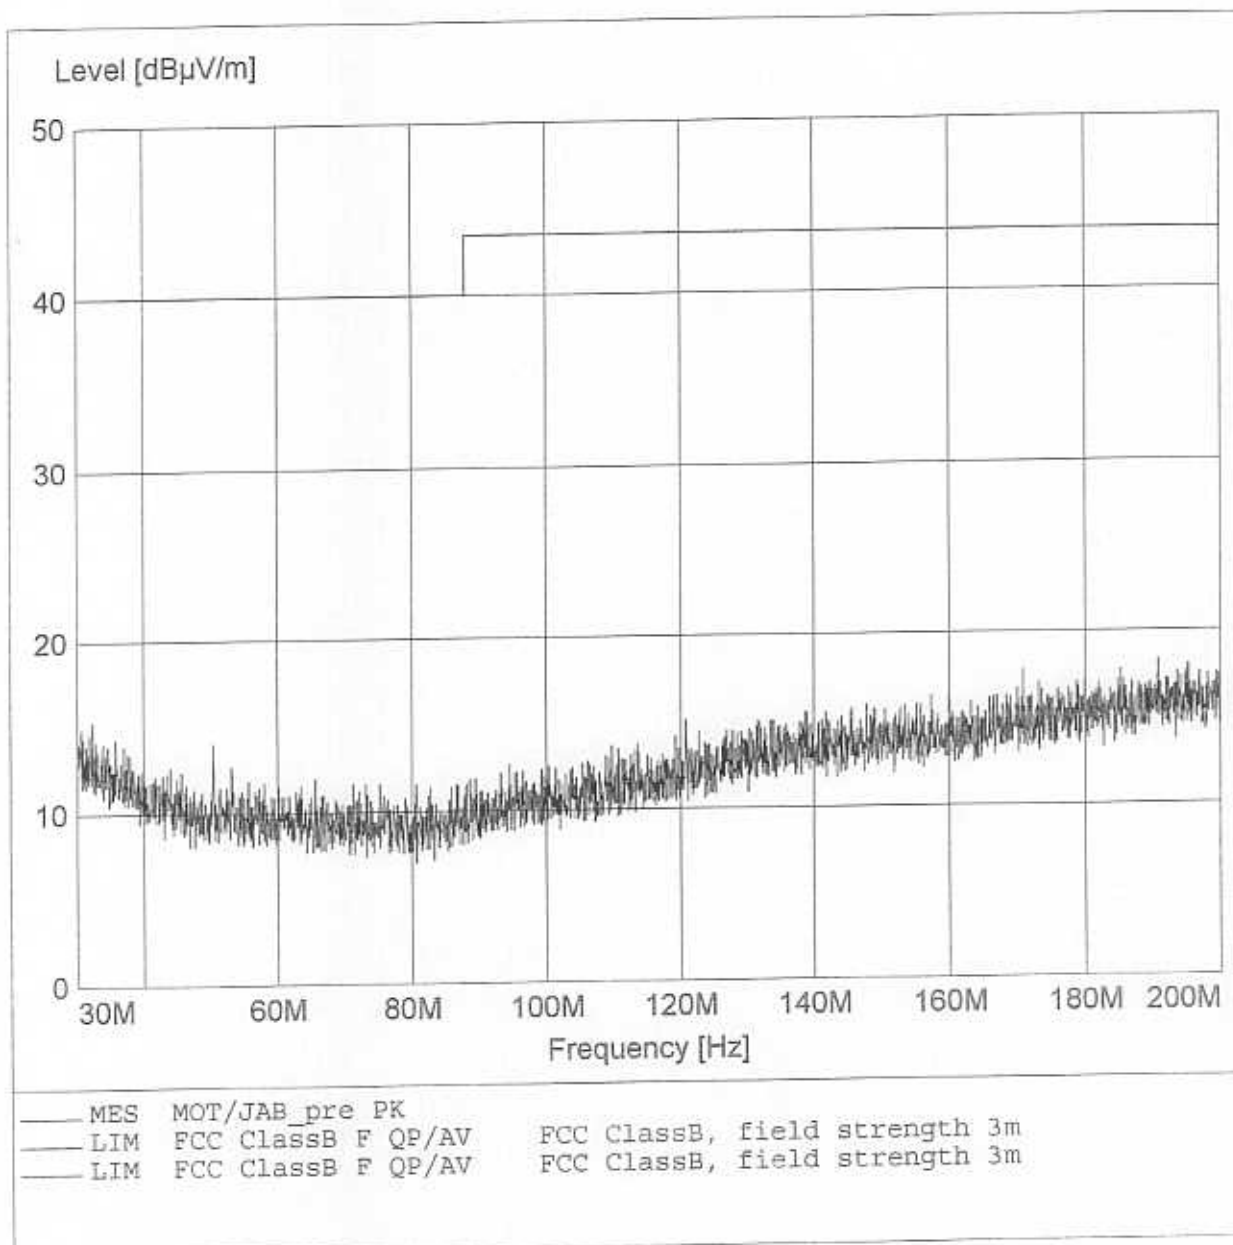

Appendix E


Spurious Emissions conducted - Transmitter operating

Appendix F

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.27 dB VBW 100 kHz
15 dBm 1.01402806 MHz SWT 5 ms Unit dBm

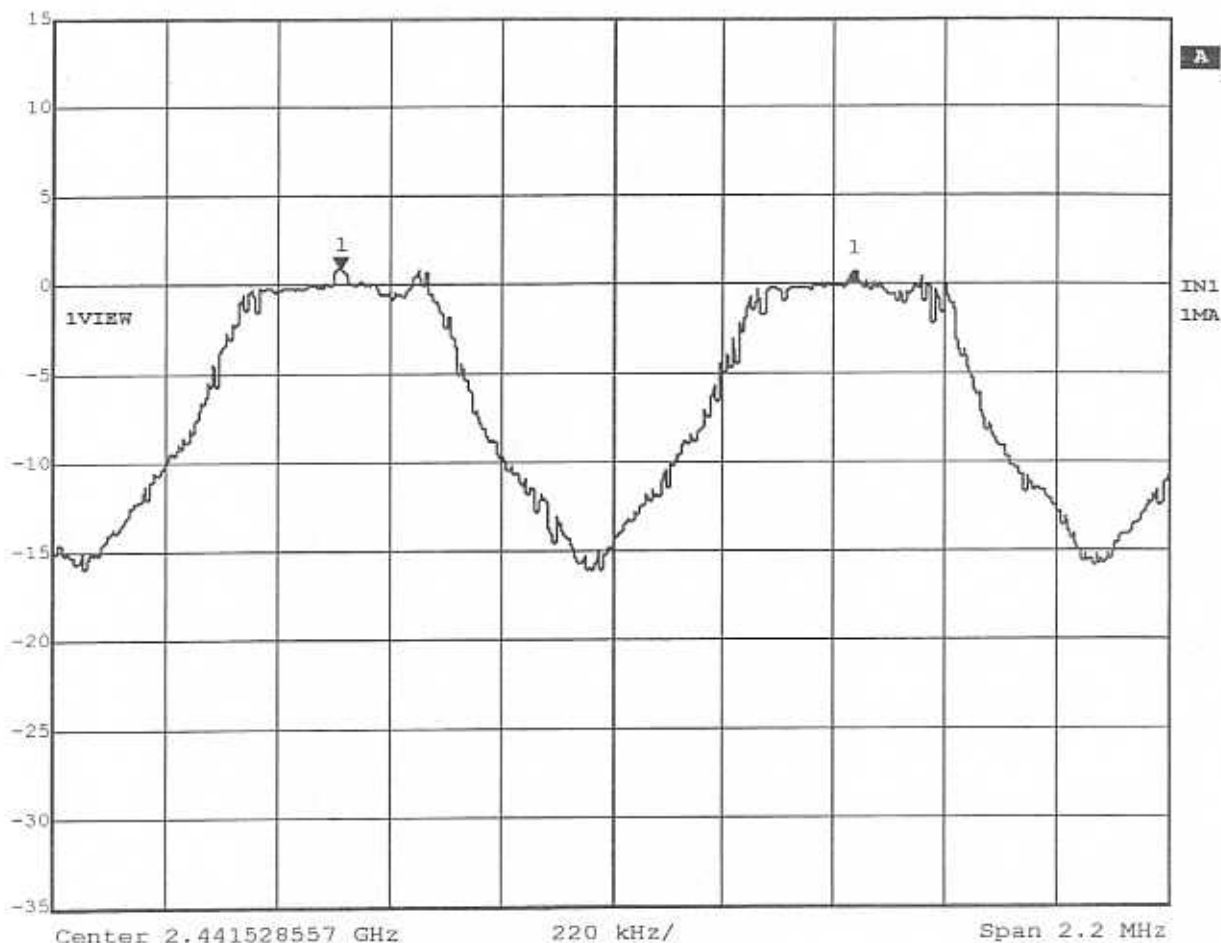


Title: Carrier Frequency Separation
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 8.JUL.2002 06:40:07

Appendix G

Number of Hopping Frequencies



Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 0.01 dBm VBW 50 kHz
25 dBm 2.41504910 GHz SWT 25 ms Unit dBm

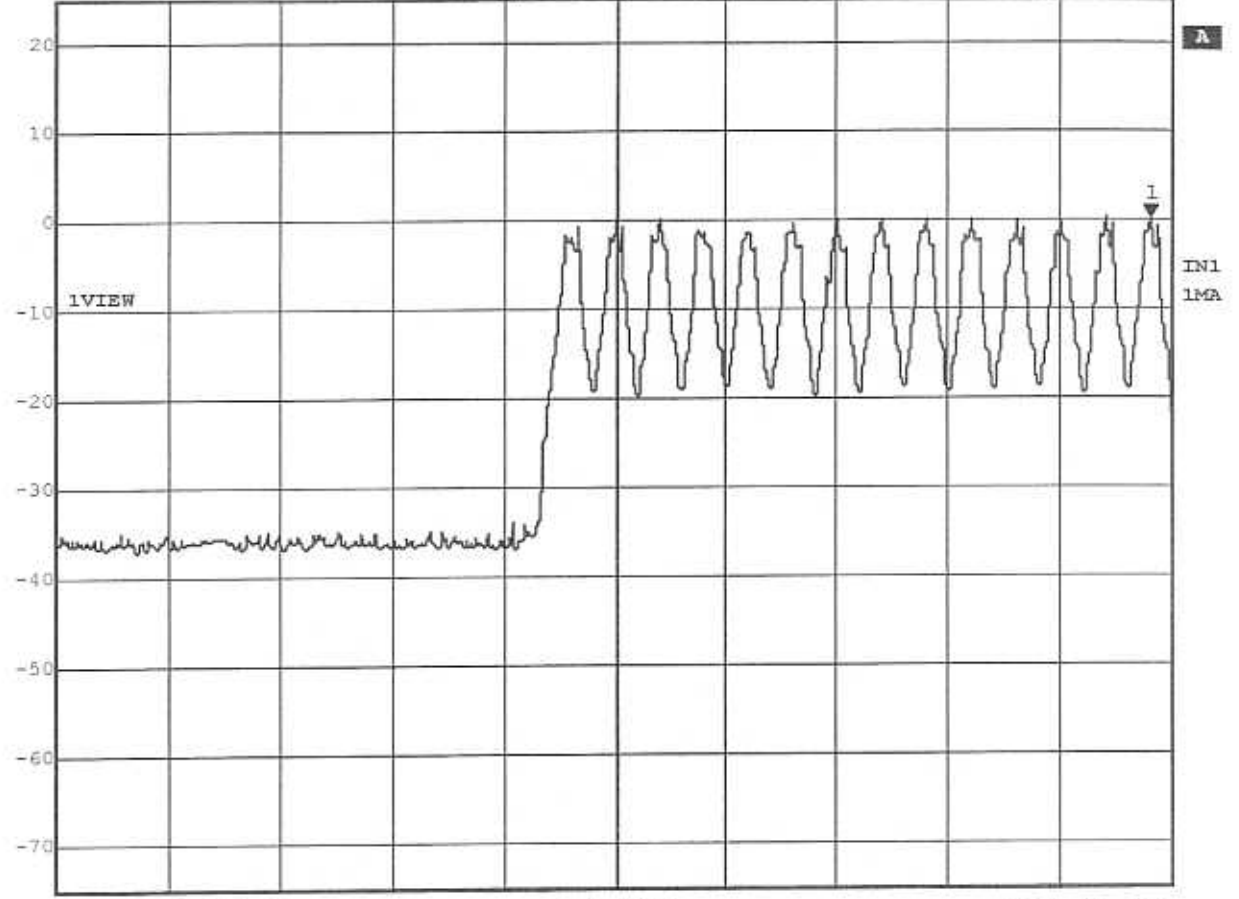


Center 2.403 GHz 2.5 MHz/ Span 25 MHz

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 8.JUL.2002 06:14:26



Ref Lvl 25 dBm Marker 1 [T1] -0.33 dBm RBW 50 kHz RF Att 50 dB
2.44004910 GHz VBW 50 kHz Unit dBm
SWT 25 ms

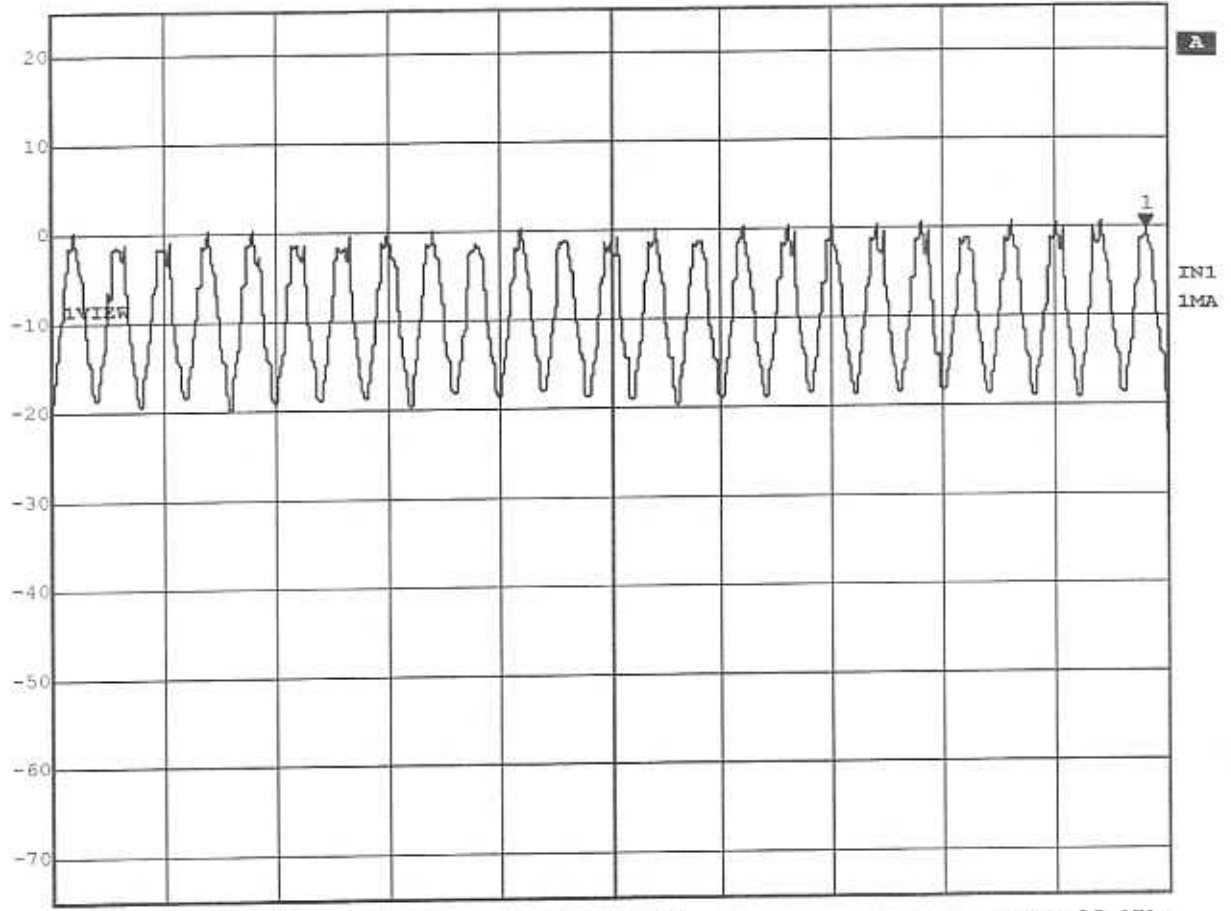


Center 2.428 GHz 2.5 MHz/ Span 25 MHz

Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 8.JUL.2002 06:20:24




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 0.67 dBm VBW 50 kHz
25 dBm 2.46504910 GHz SWT 25 ms Unit dBm

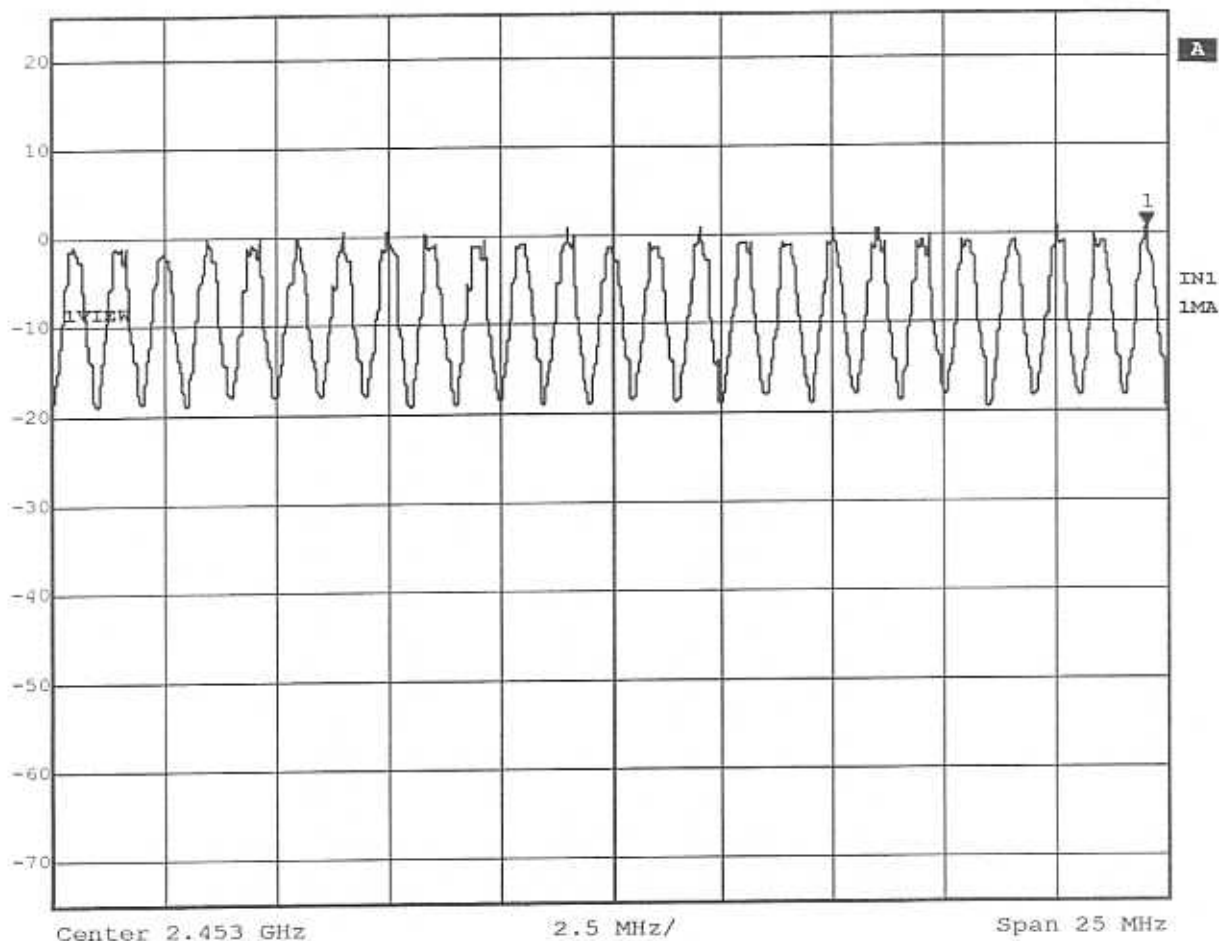

Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 8.JUL.2002 06:25:22



Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -1.16 dBm VBW 50 kHz
25 dBm 2.46605110 GHz SWT 25 ms Unit dBm

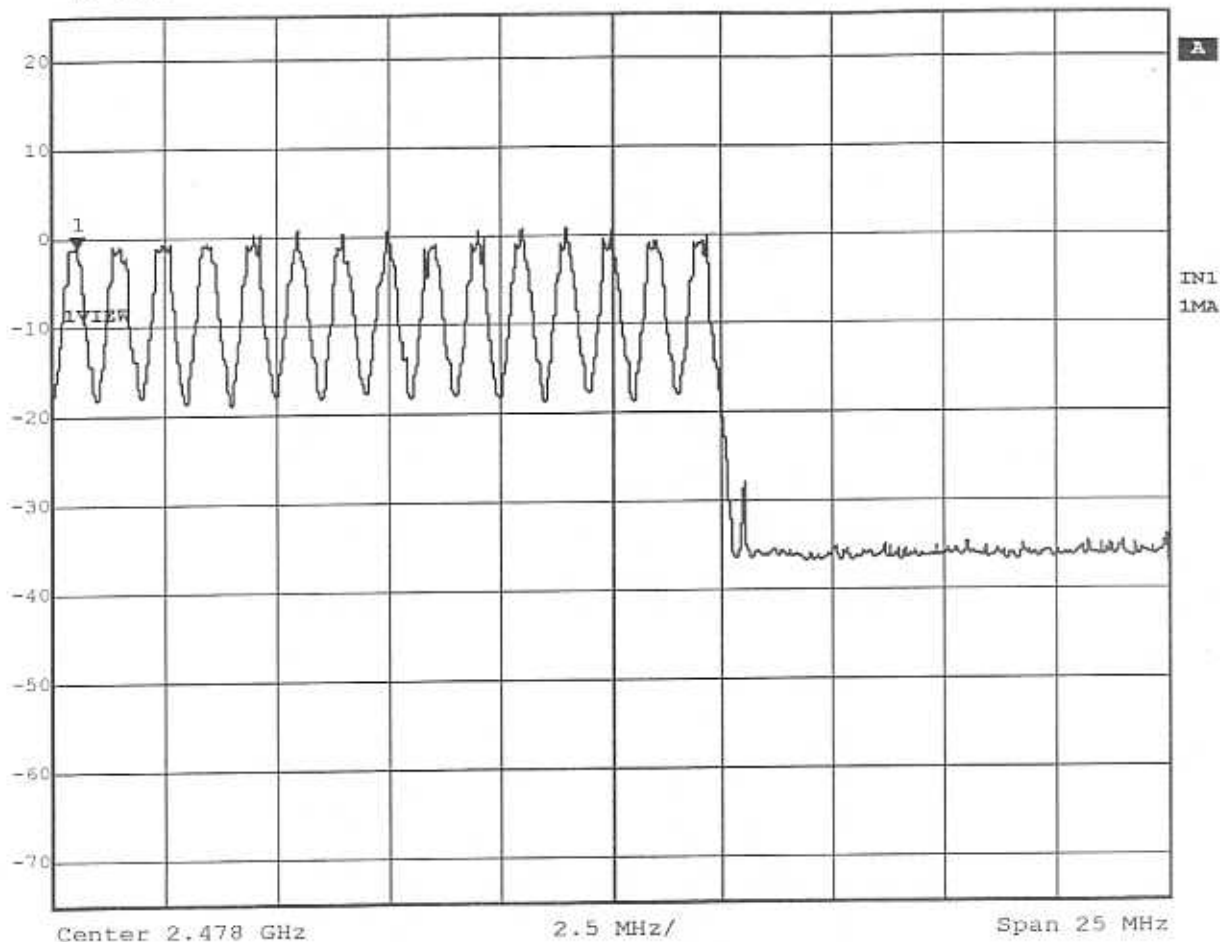


Center 2.478 GHz 2.5 MHz/ Span 25 MHz
Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 8.JUL.2002 06:30:56

Appendix H

Time of Occupancy (Dwell Time)



Delta 2 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 0.32 dB VBW 1 MHz
30 dBm 6.268537 ms SWT 11.5 ms Unit dBm

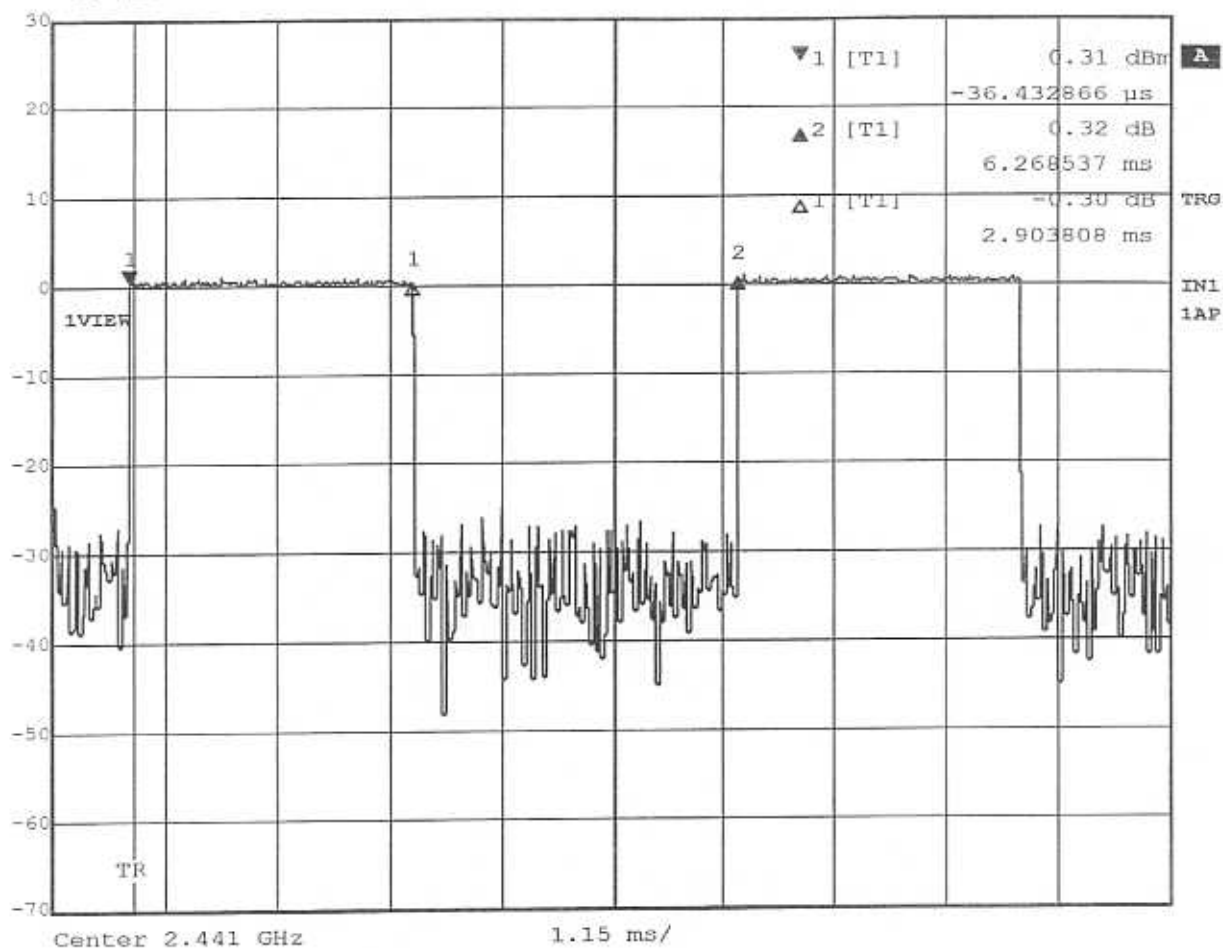


Title: Dwell Time
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 21:05:25

Appendix I

20dB Bandwidth




Ref Lvl	Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
25 dBm	-0.17 dB	VBW	10 kHz		
	877.35470942 kHz	SWT	56 ms	Unit	dBm

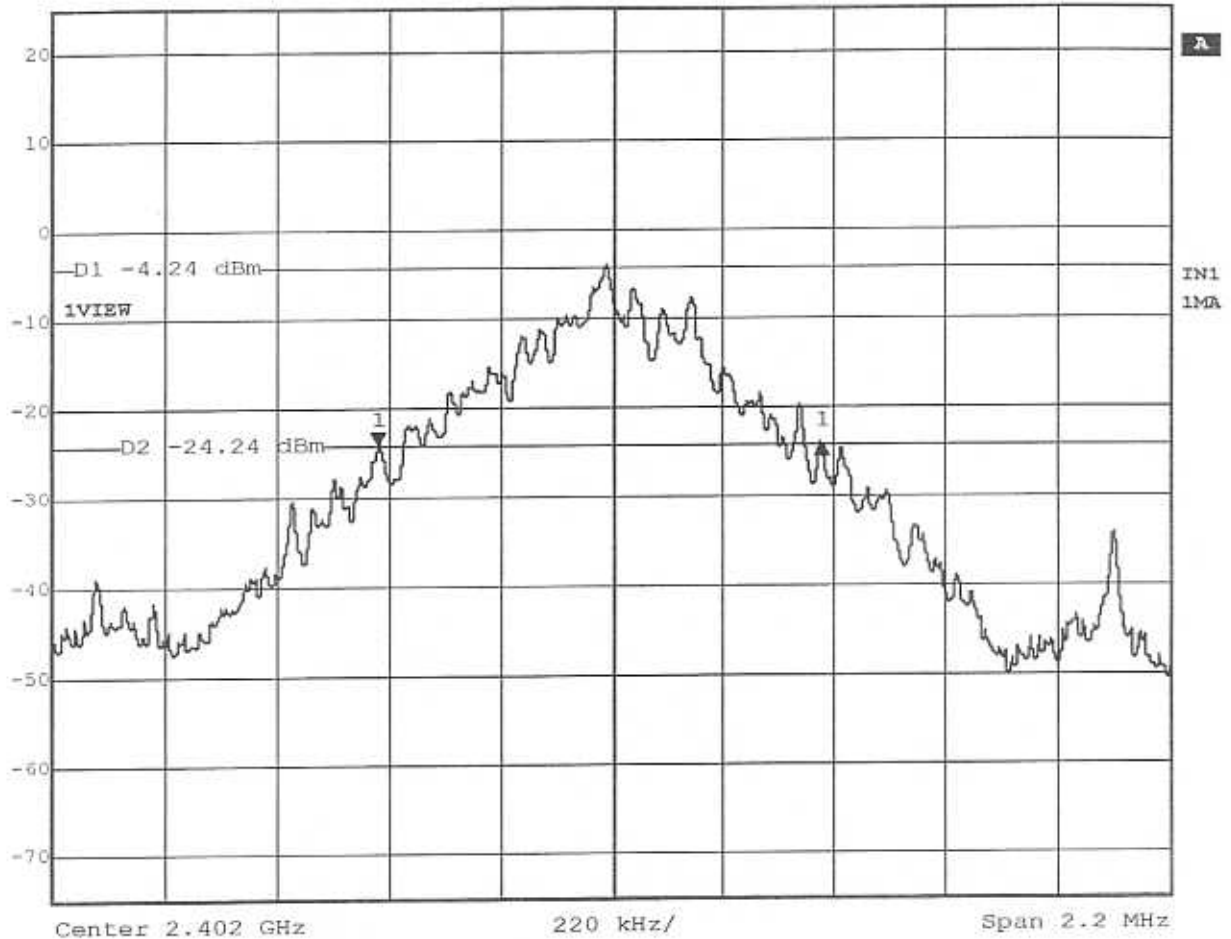

Title: -20 dB Bandwidth Ch.: 0
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 20:44:42




Ref Lvl	Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
25 dBm	-0.43 dB	VBW	10 kHz		
	877.35470942 kHz	SWT	56 ms	Unit	dBm

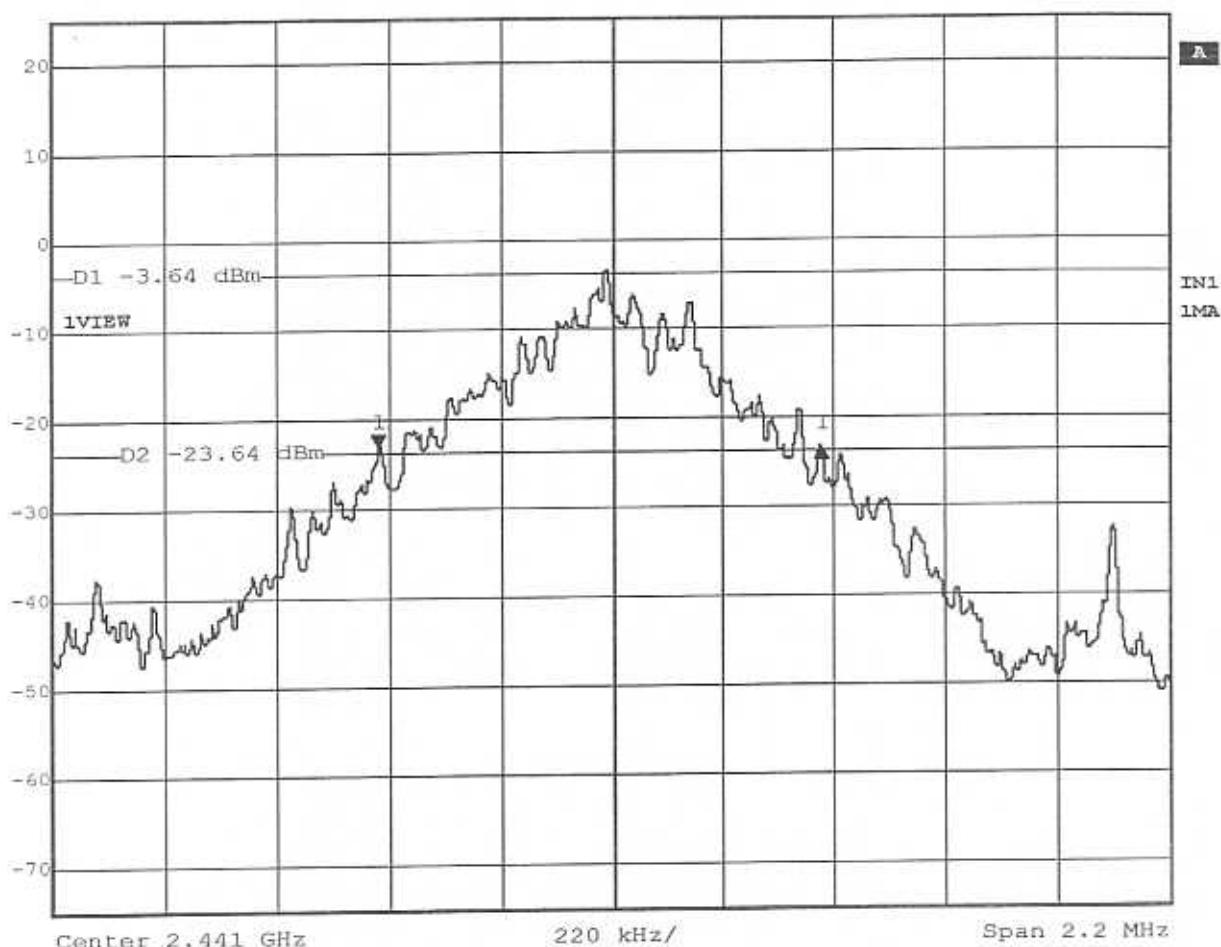

Title: -20 dB Bandwidth Ch.: 39
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 20:47:09



Ref Lvl	Delta 1 [T1]	RBW	10 kHz	RF Att	50 dB
25 dBm	-0.05 dB	VBW	10 kHz		
	877.35470942 kHz	SWT	56 ms	Unit	dBm

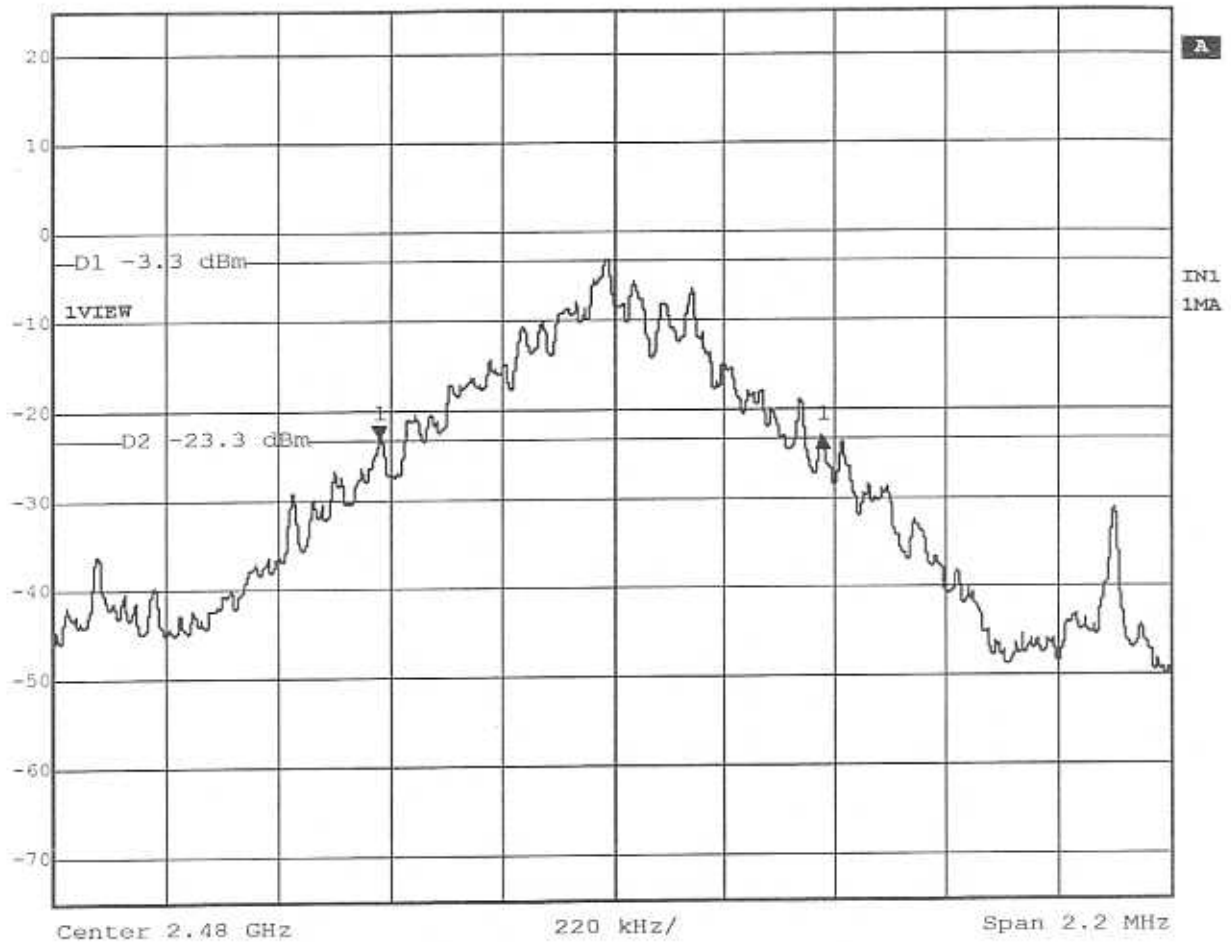


Title: -20 dB Bandwidth Ch.: 78
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 20:49:38

Appendix J

Band-edge Compliance of RF Emissions




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -20.07 dBm VBW 50 kHz
25 dBm 2.40151904 GHz SWT 5 ms Unit dBm

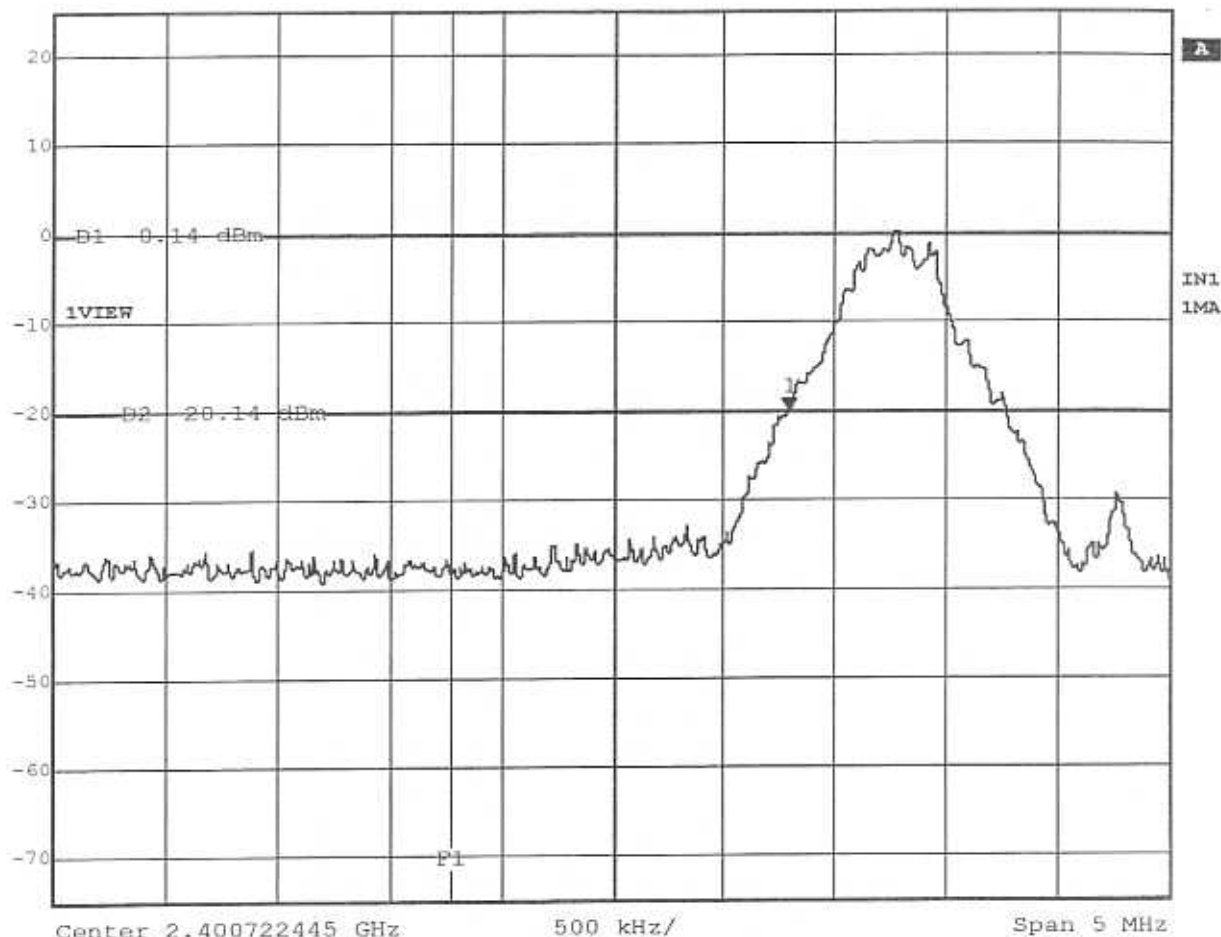

Title: Band-edge Compliance of RF Conducted Emissions Ch.: 0
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 20:41:58



Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -19.55 dBm VBW 50 kHz
25 dBm 2.48048675 GHz SWT 5 ms Unit dBm

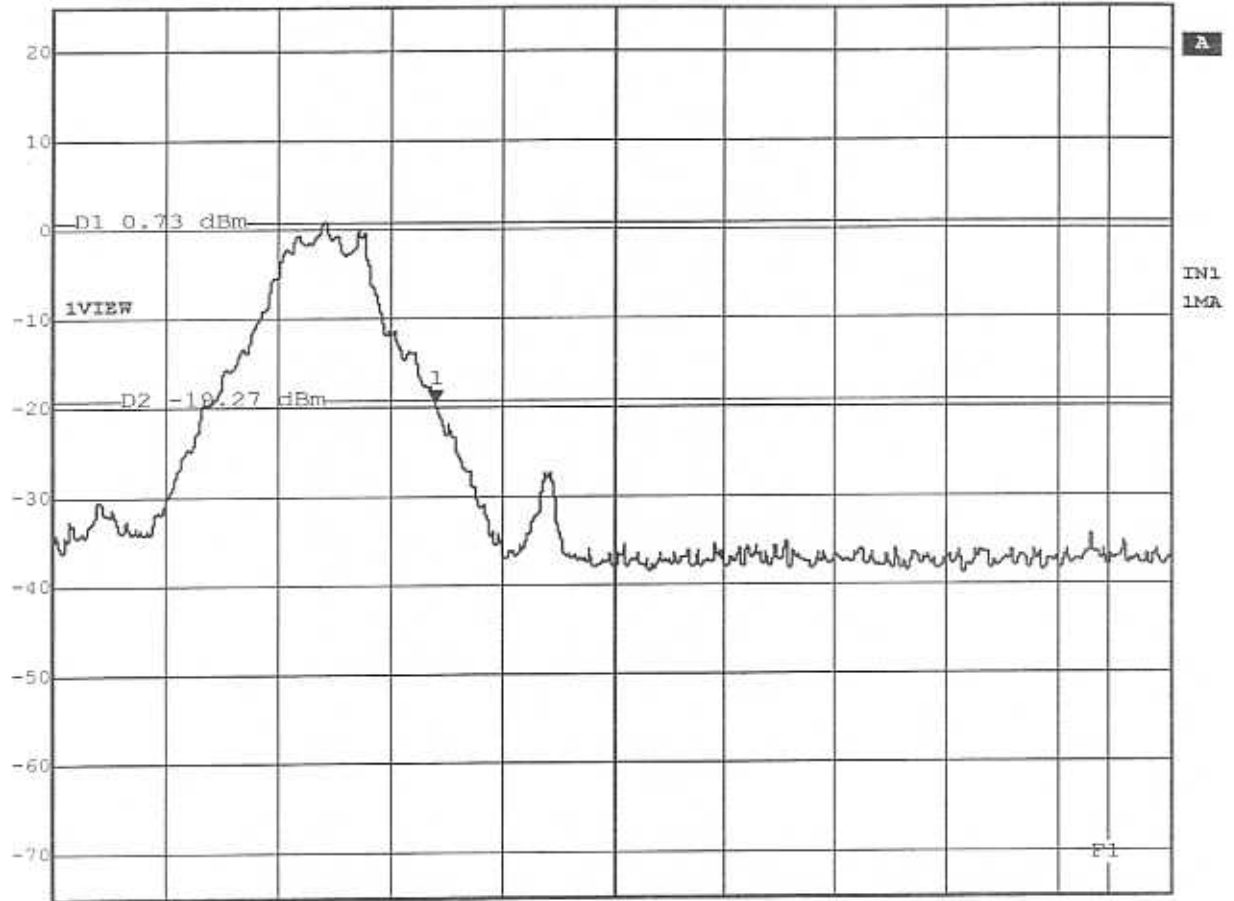

Center 2.481283342 GHz 500 kHz/ Span 5 MHz


Title: Band-edge Compliance of RF Conducted Emissions Ch.: 78
Comment A: GN Netcom Bluetooth Wireless Headset Jabra
Date: 5.JUL.2002 20:40:17

Appendix K

Conducted Measurement at (AC) Power Line


EMI voltage test in the ac-mains according to FCC part 15

EUT: BLUETOOTH
Manufacturer: GN NETCOM
Operating Condition: Unom: 120VAC, Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5
Comment: model: MOTOROLA/JABRA mode: charging

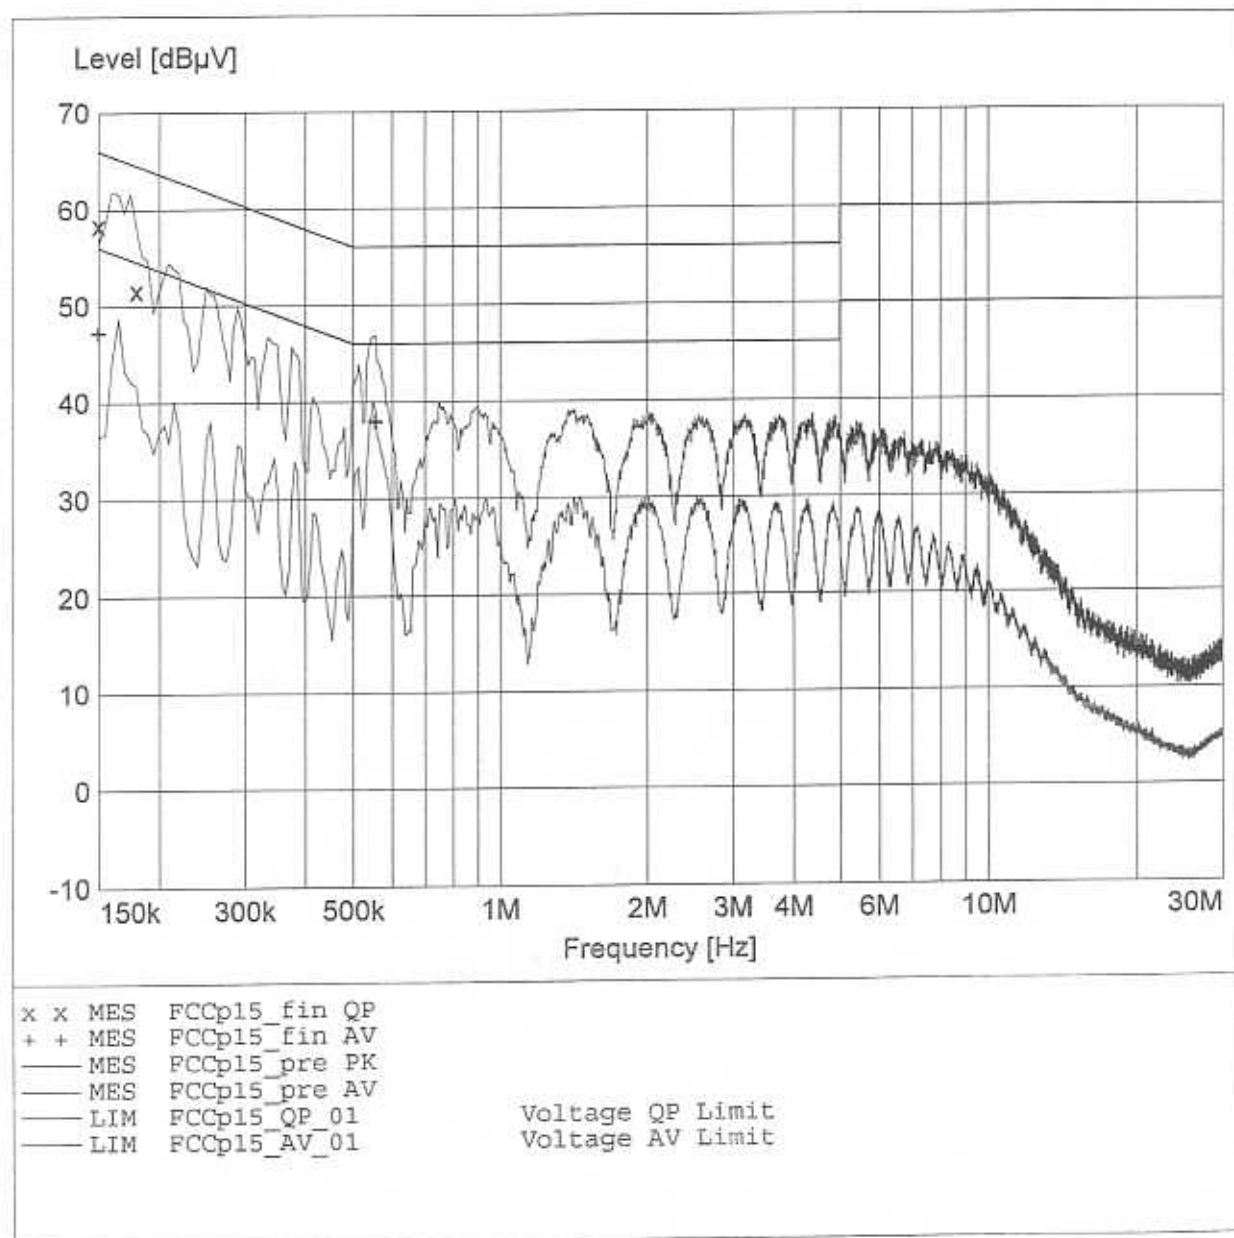


Appendix L


Peak Power Spectral Density (Master Inquiry Mode)

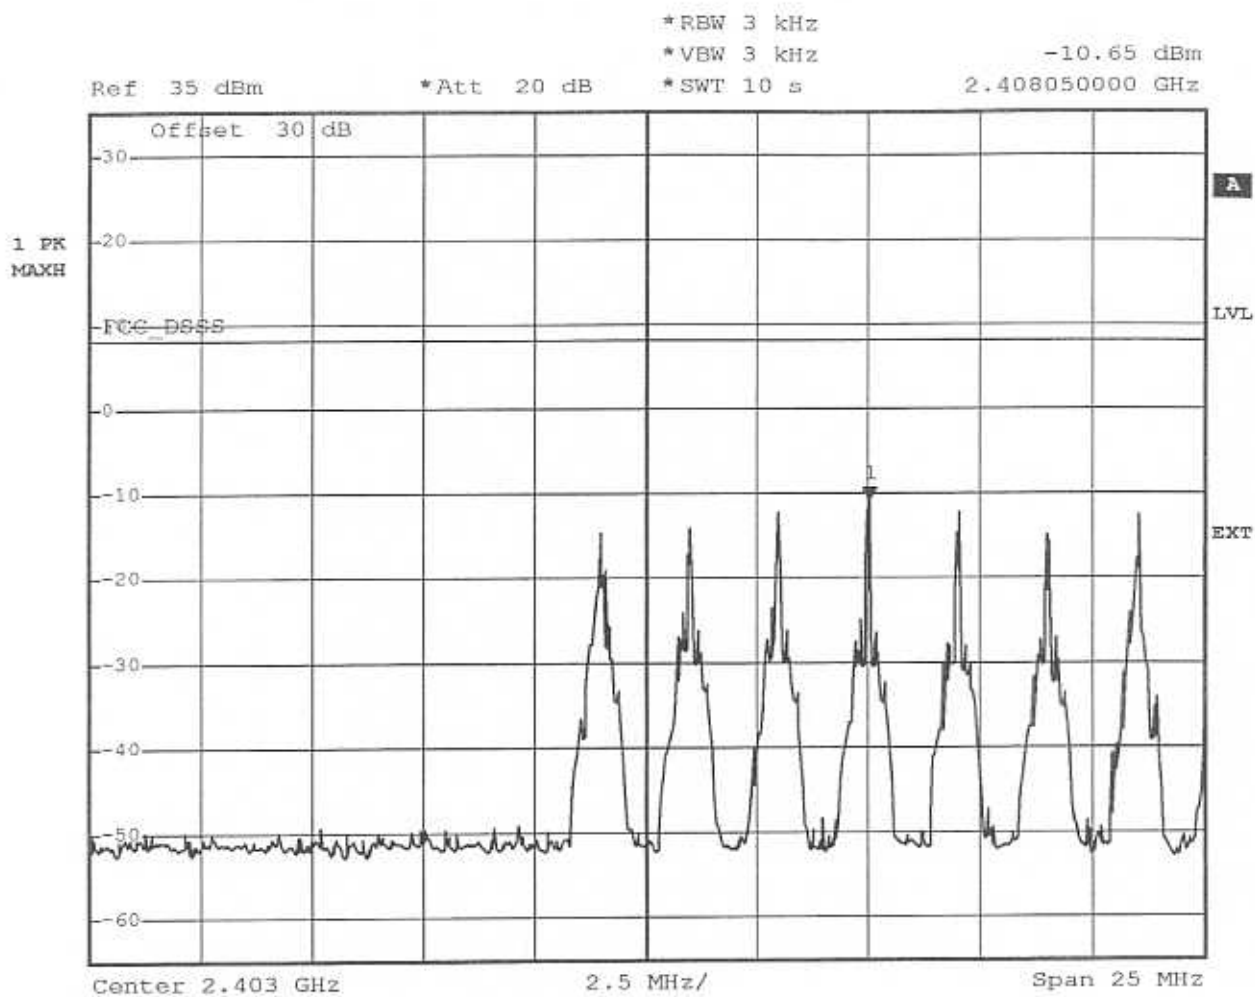


Comment A: Peak Power Spectral Density *Master Inquiry Mode* GN Netcom
Jabra BT100
Date: 12.JUL.2002 14:51:19

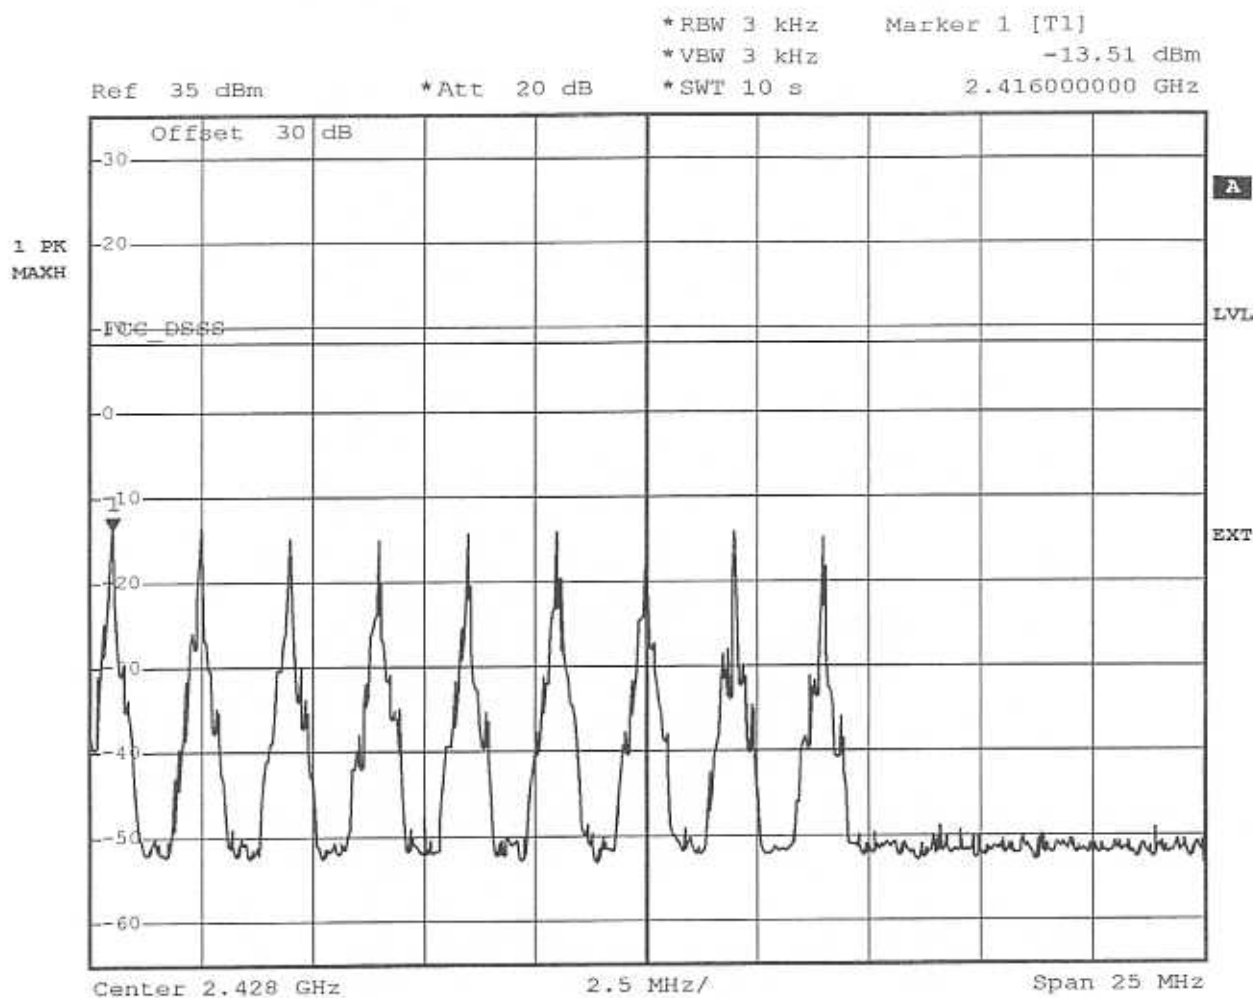

Comment A: Peak Power Spectral Density *Master Inquiry Mode* GN Netcom
Jabra BT100
Date: 12.JUL.2002 14:49:21

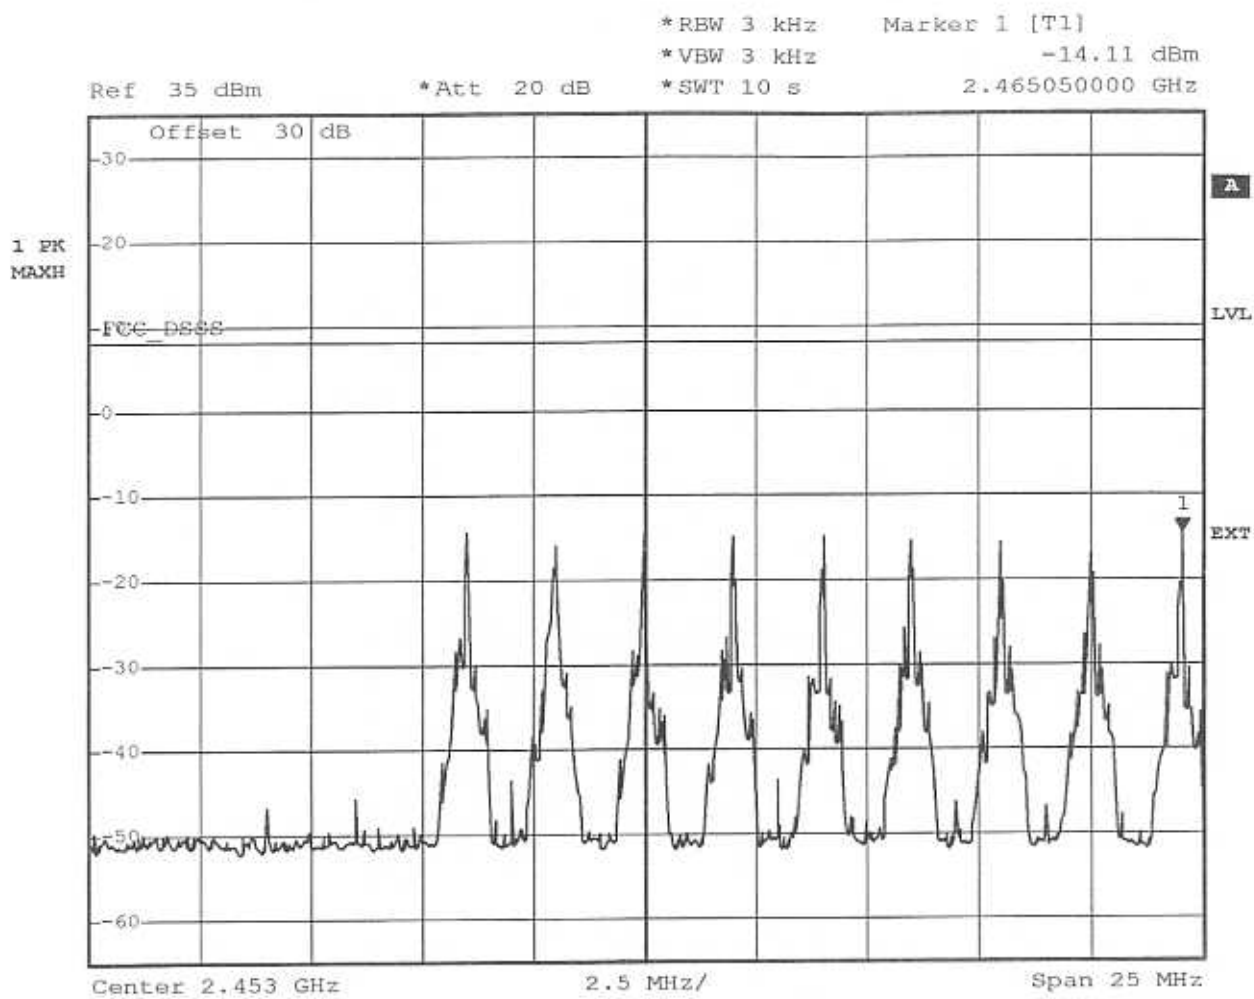

Comment A: Peak Power Spectral Density *Master Inquiry Mode* GN Netcom
 Jabra BT100
 Date: 12.JUL.2002 14:47:33

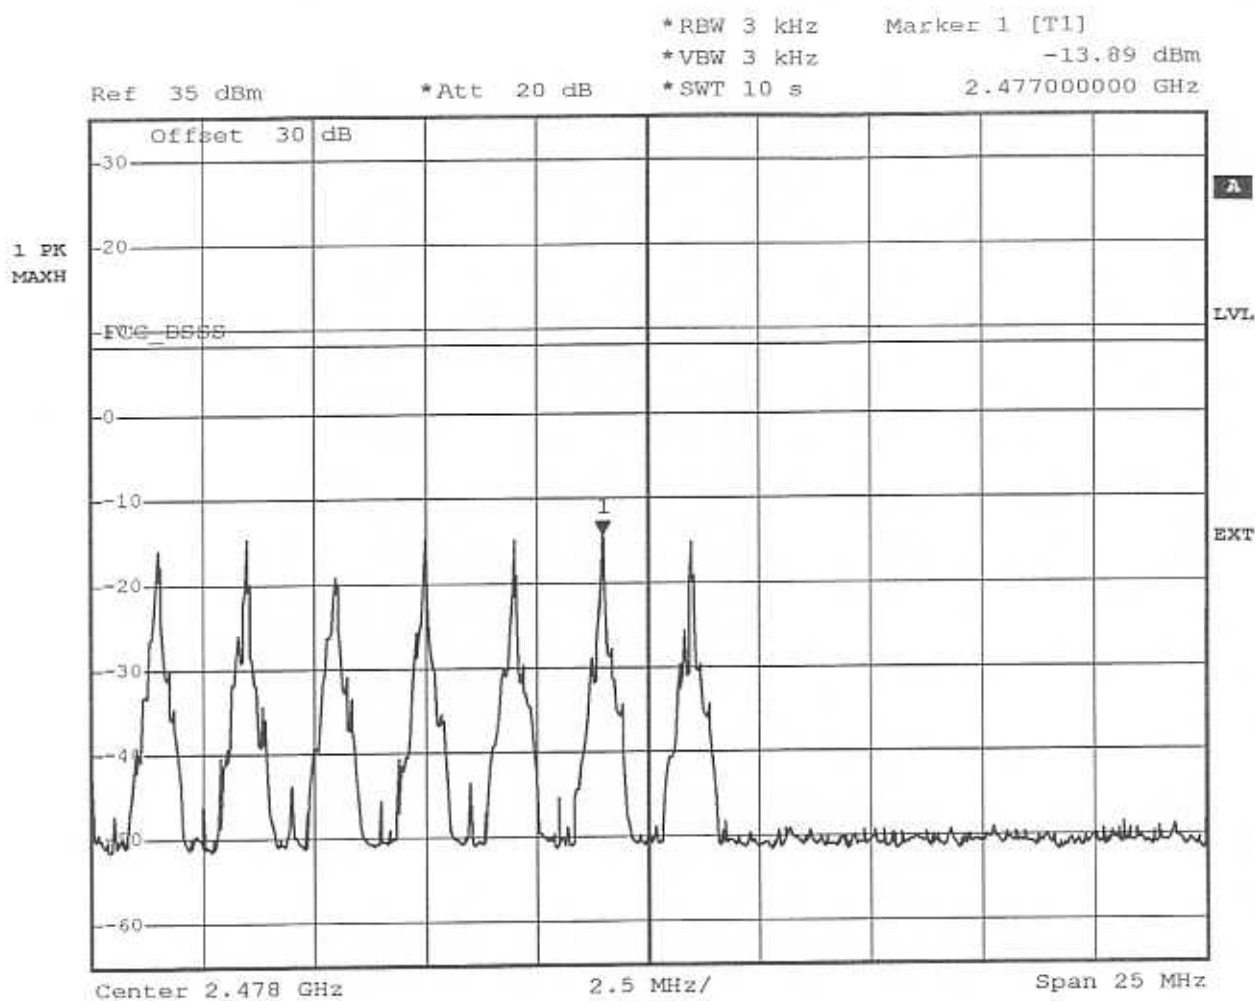

Comment A: Peak Power Spectral Density *Master Inquiry Mode* GN Netcom
Jabra BT100
Date: 12.JUL.2002 14:42:50