

Test Report

Applicant : GLAZERO INTERNATIONAL INC
Address : 8 The Green, Suite A in the City of Dover. Zip code 19901.
Product Name : Solar Wall Light Cam Pro
Brand Mark : aosu, DEKCO, Saato
Model : L7P3DA11
Series model : L7P, DL7P, L7P2DA11, L7P2DH11, L7P2DL11, L7P3DL11, L7P3DL12, L7P3EA11, L7P3FA11, L7P3GA11, L7P3HA11
Report Number : BLA-EMC-202502-A1902
FCC ID : 2BACU-L7P
Date of Receipt : Feb.12, 2025
Date of Test : Feb.14, 2025 to Mar.13, 2025
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Compiled by:

charlie

Review by:

Sueels

Approved by:

J. Zheng

Issued Date:

Mar.13, 2025



BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

Address: Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	5
1.1 General information	5
1.2 General description of EUT	5
2 Test summary	6
3 Test Configuration	7
3.1 Test mode	7
3.2 Operation Frequency each of channel	8
3.3 Configuration diagram of EUT	9
3.4 Auxiliary equipment	9
3.5 Test environment	10
4 Laboratory information	10
4.1 Laboratory and accreditations	10
4.2 Measurement uncertainty	11
5 Test equipment	12
6 Test result	14
6.1 Antenna requirement	14
6.2 Conducted emissions at AC power line (150 kHz-30 MHz)	15
6.3 Conducted Peak output Power	19
6.4 Minimum 6dB bandwidth	20
6.5 Power spectrum density	21
6.6 Conducted Band Edges Measurement	22
6.7 Conducted spurious emissions	24
6.8 Radiated spurious emissions	26
6.9 Radiated emissions which fall in the restricted bands	37
7 Appendix A	52
7.1 Maximum Peak Conducted Output Power	52
7.2 -6dB Bandwidth	57
7.3 Occupied Channel Bandwidth	62
7.4 Maximum Power Spectral Density Level	67
7.5 Band Edge	72

7.6 Conducted RF Spurious Emission	79
Appendix B: photographs of test setup	89
Appendix C: photographs of EUT	91

BlueAsia

Revise Record

Version No.	Date	Description
01	Mar.13,2025	Original

BlueAsia

1 General information

1.1 General information

Applicant	GLAZERO INTERNATIONAL INC
Address	8 The Green,Suite A in the City of Dover.Zip code 19901.
Manufacturer	GLAZERO INTERNATIONAL INC
Address	8 The Green,Suite A in the City of Dover.Zip code 19901.
Factory	Shenzhen Anran Security Technology Co., Ltd
Address	290 jihua Road, Jihua street, Longgang District, Shenzhen

1.2 General description of EUT

Product name	Solar Wall Light Cam Pro
Model no.	L7P3DA11
Series model	L7P,DL7P,L7P2DA11,L7P2DH11,L7P2DL11,L7P3DL11,L7P3DL12,L7P3EA11,L7P3FA11,L7P3GA11,L7P3HA11
Desc of series model	Their electrical circuit design layout, components used and internal wiring are identical,Only the model name are different.
Operation Frequency	802.11b/g/n(HT20): 2412MHz to 2462MHz
Modulation Type	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Nominal Bandwidth	20MHz
Channel Spacing	5MHz
Number of Channels	802.11b/g/n(HT20): 11
Antenna Type	FPC antenna
Antenna Gain	3.54dBi(Provided by customer)
Power supply or adapter information	DC5V
Hardware Version	V1.1
Software Version	1.9.33
Engineer sample no	BLA-EMC-202502-A19

Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2 Test summary

No.	Test item	FCC standard	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2013 Clause 6.2	Pass
3	Conducted Peak Output Power	§15.247 (b)(3)	ANSI C63.10-2013, Clause 11.9.1.3	Pass
4	Minimum 6dB Bandwidth	§15.247 (a)(2)	ANSI C63.10-2013, Clause 11.8.1	Pass
5	Power Spectrum Density	§15.247 (e)	ANSI C63.10-2013, Clause 11.10.2	Pass
6	Conducted Band Edges Measurement	§15.247(d)	ANSI C63.10-2013, Clause 11.13.3.2	Pass
7	Conducted Spurious Emissions	§15.247(d)	ANSI C63.10-2013, Clause 11.11	Pass
8	Radiated Spurious Emissions	§15.247 (d) §15.209	ANSI C63.10-2013 Clause 6.4&6.5&6.6	Pass
9	Radiated Emissions which fall in the restricted bands	§15.247 (d) §15.205	ANSI C63.10-2013 Clause 6.10.5	Pass

N/A: Not Applicable


3.2 Operation Frequency each of channel

Operation Frequency each of channel(802.11b/g/n HT20)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz
2	2417MHz	6	2437MHz	10	2457MHz
3	2422MHz	7	2442MHz	11	2462MHz
4	2427MHz	8	2447MHz	--	--


(802.11b/g/n HT20)	
Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

3.3 Configuration diagram of EUT

AC conducted emission:




Radiated emission:



Note: see test photographs attached in APPENDIX A for the actual connections between Product and support equipment.

RF Test:



Support equipment

Name	Device type	Brand	Mode	Series No	Remark
(1)	AC Adapter	UGREEN	CD112	N/A	N/A
(2)	PC	lenovo	E460C	N/A	N/A
(3)	Fixed frequency board	N/A	N/A	N/A	N/A

Note: See test photographs attached in APPENDIX A for the actual connections between Product and support equipment.

3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)
AC adapter	N/A	N/A	N/A	From lab

Note:“--” mean no any auxiliary device during testing.

3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 5V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{dB}$
Power Spectral Density, conducted	$\pm 3.0\text{dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2024/08/08	2025/08/07
BLA-EMC-012	Broadband antenna	VULB9168	Schwarzbeck	00836 P:00227	2022/10/12	2025/10/11
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA201804 3003	2024/08/08	2025/08/07
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2024/06/28	2025/06/27
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2024/06/28	2025/06/27
BLA-EMC-066	Amplifier	LNPA_30M01 G-30	SKET	SK202106 0801	2024/06/28	2025/06/27
BLA-EMC-086	Amplifier	LNPA_18G40 G-50dB	SKET	SK202207 1301	2024/06/28	2025/06/27
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

Conducted emissions at AC power line (150 kHz-30 MHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-001	Shield room	8*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-011	LISN	ENV216	R&S	101372	2024/08/08	2025/08/07
BLA-EMC-033	Impedance transformer	DC-2GHz	DFXP	N/A	2024/06/28	2025/06/27
BLA-EMC-041	LISN	AT166-2	ATTEN	AKK1806000003	2024/08/08	2025/08/07
BLA-EMC-045	Impedance stable network	ISNT8-cat 6	TESEQ	53580	2024/08/08	2025/08/07
BLA-EMC-095	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01045	2024/06/28	2025/06/27
BLA-EMC-096	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01075	2024/06/28	2025/06/27
BLA-XC-05	Coaxial Cable	N/A	BlueAsia	V05	N/A	N/A

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2024/06/28	2025/06/27
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2024/08/08	2025/08/07
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889SN042	2024/08/08	2025/08/07
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2024/08/08	2025/08/07
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2024/06/28	2025/06/27
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2024/08/08	2025/08/07
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS141094	2024/06/28	2025/06/27

Test Software Record

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is internal FPC antenna. The best case gain of the antenna is 3.54dBi from 2402~2480MHz

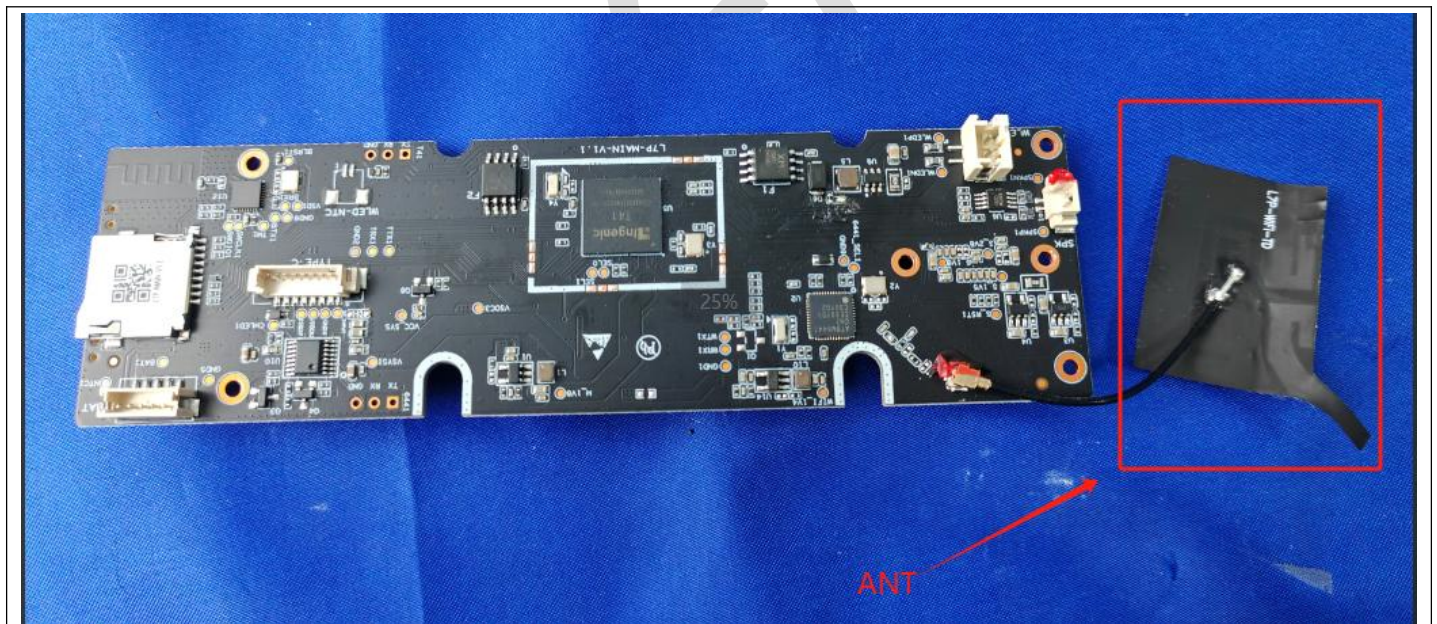

6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2.2 Test setup

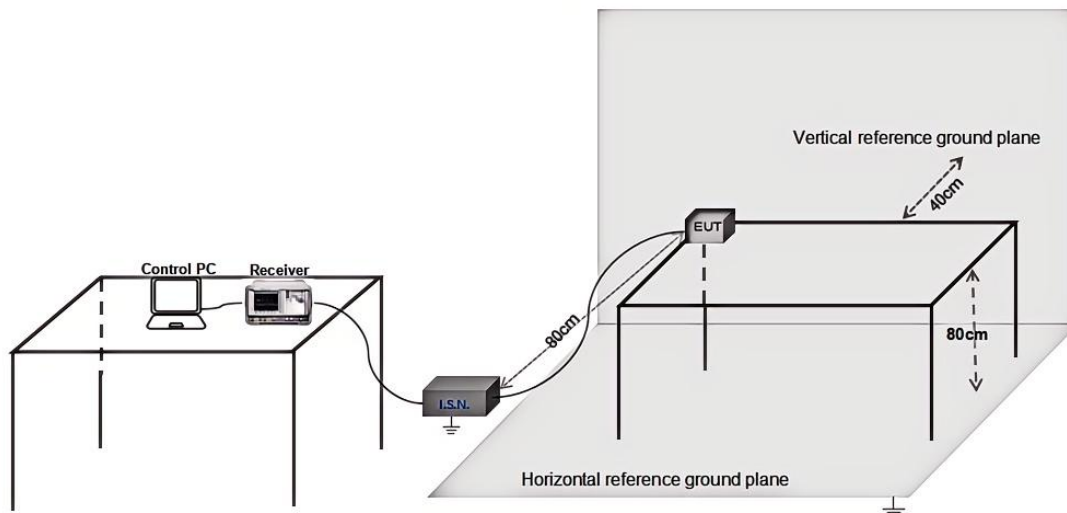

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.

6.2.3 Procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor

6.2.4 Test data

Model no:SP100

[Test Mode: TM1]; [Line: Line] ;[Power:AC120V/60Hz]

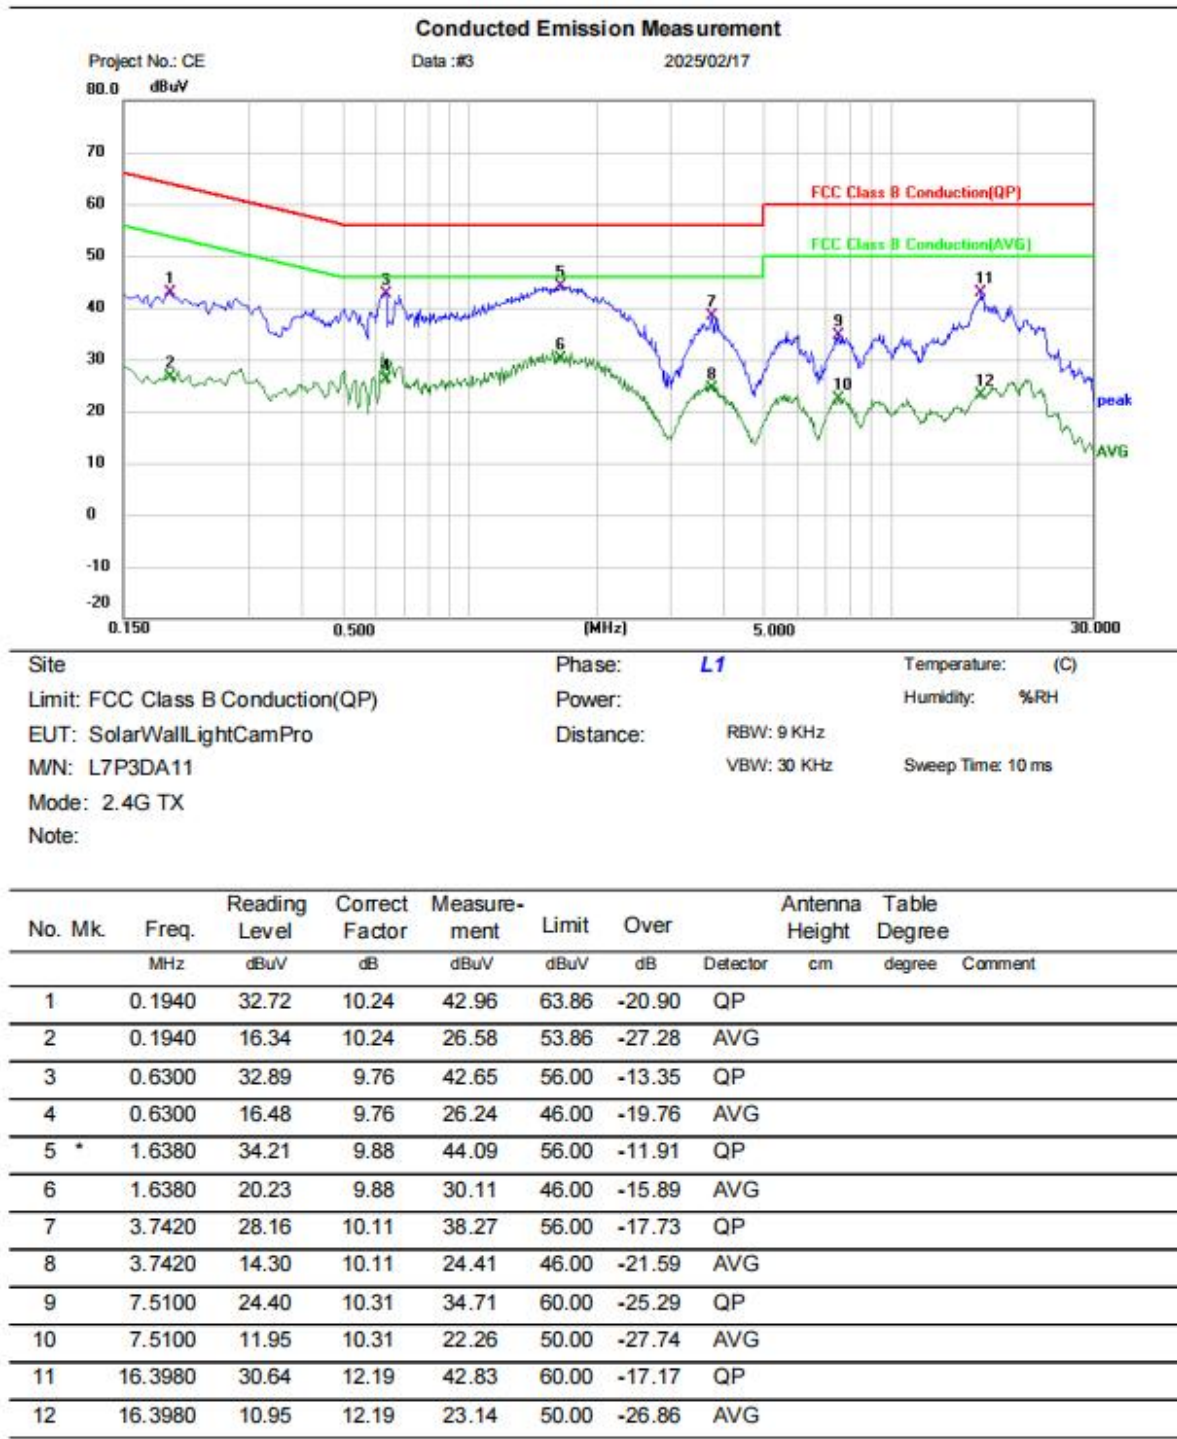

Test Result: Pass


BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.2

[Test Mode: TM1]; [Line: Neutral] ;[Power:AC120V/60Hz]

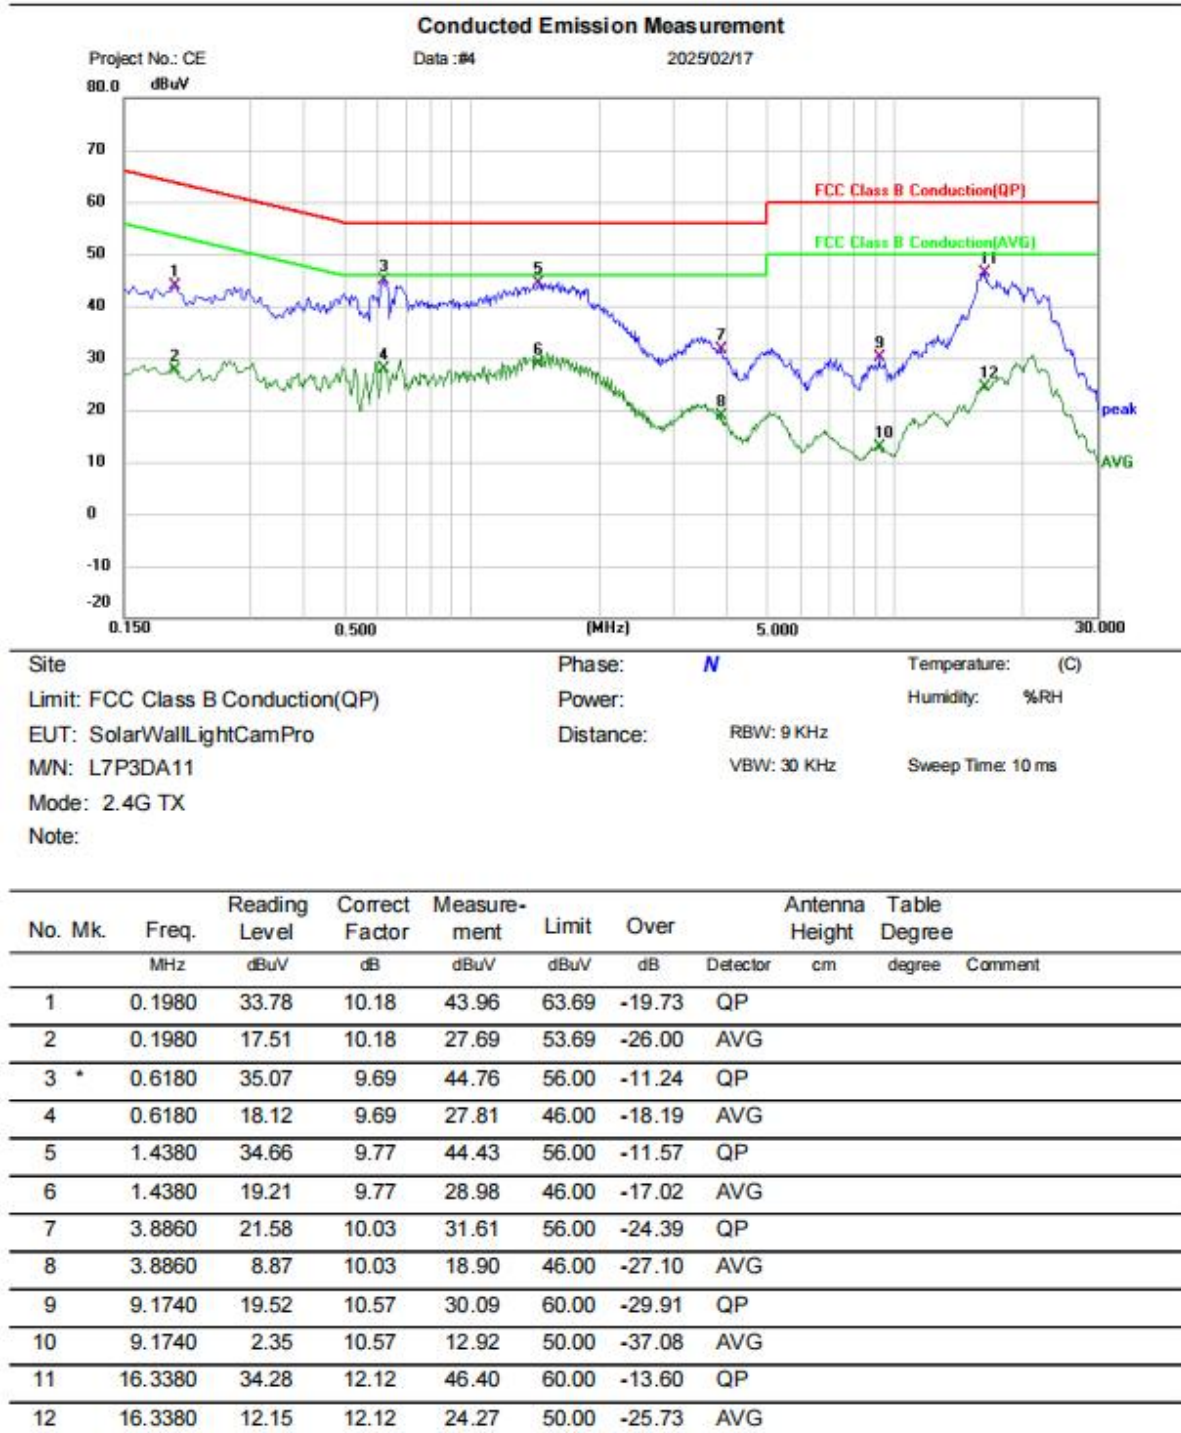
Test Result: Pass


6.3 Conducted Peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.3.2 Test setup

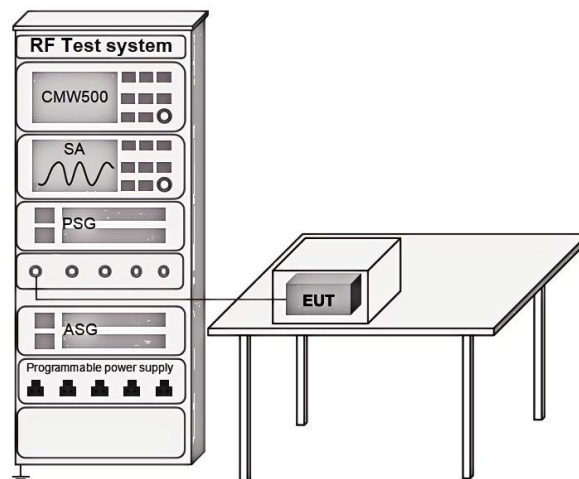

6.3.3 Test data

Note: PK power sensor is used to read PK Conducted power power directly

Pass: Please refer to appendix A for details

BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.2


6.4 Minimum 6dB bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Limit

≥500 kHz

6.4.2 Test setup

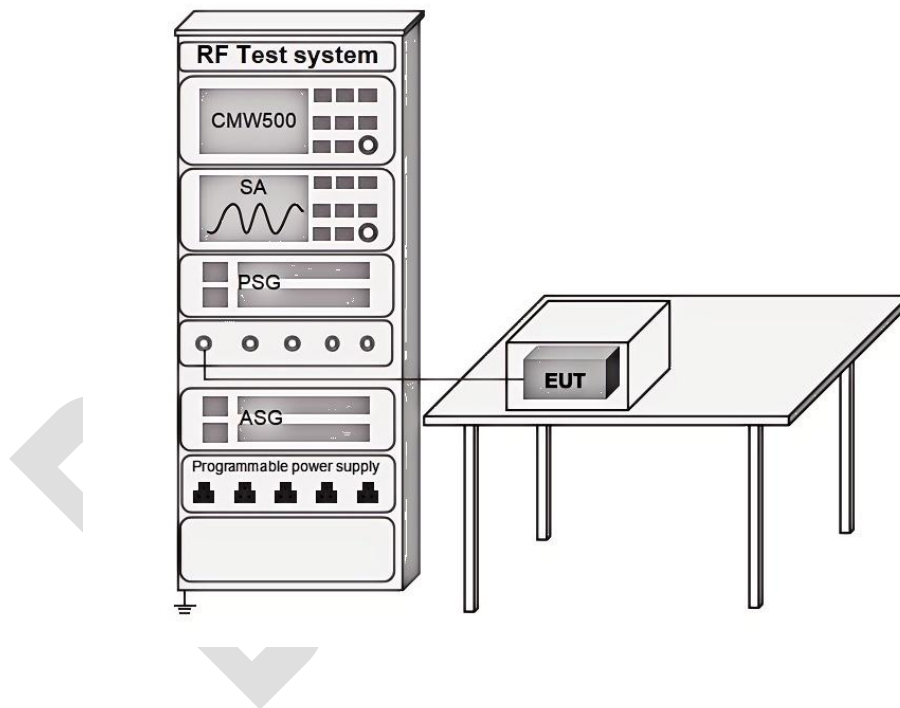

6.4.3 Test data

Pass: Please refer to appendix A for details


6.5 Power spectrum density

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.5.1 Limit

≤8dBm in any 3 kHz band during any time interval of continuous transmission

6.5.2 Test setup

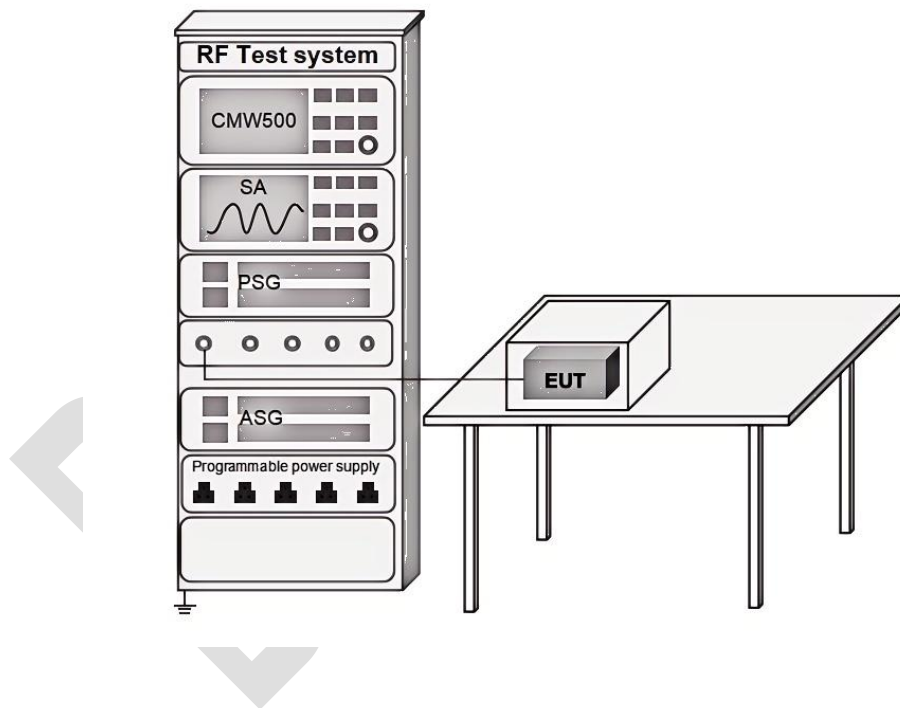

6.5.3 Test data

Pass: Please refer to appendix A for details

6.6 Conducted Band Edges Measurement

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.6.2 Test setup

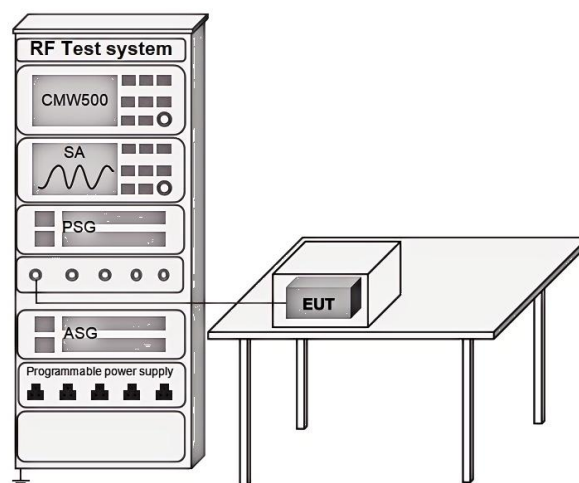

6.6.3 Test data

Pass: Please refer to appendix A for details

BlueAsia

6.7 Conducted spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.7.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.7.2 Test setup

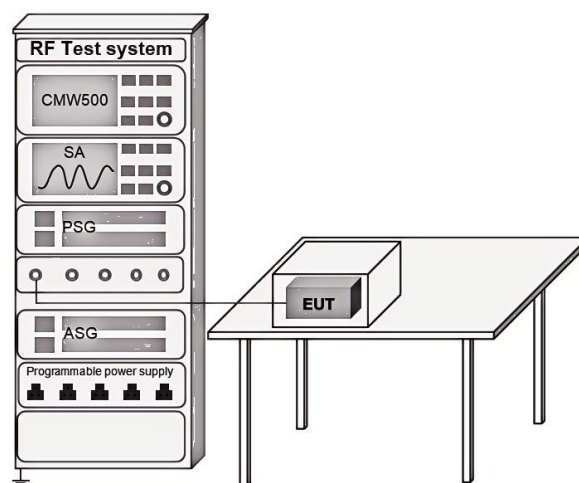

6.7.3 Test data

Pass: Please refer to appendix A for details

BlueAsia

6.8 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.8.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.8.2 Test setup


Below 1GHz:

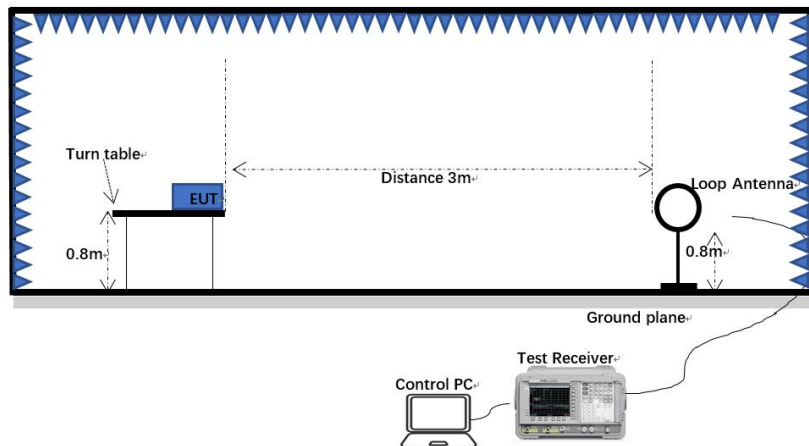

30MHz-1GHz:

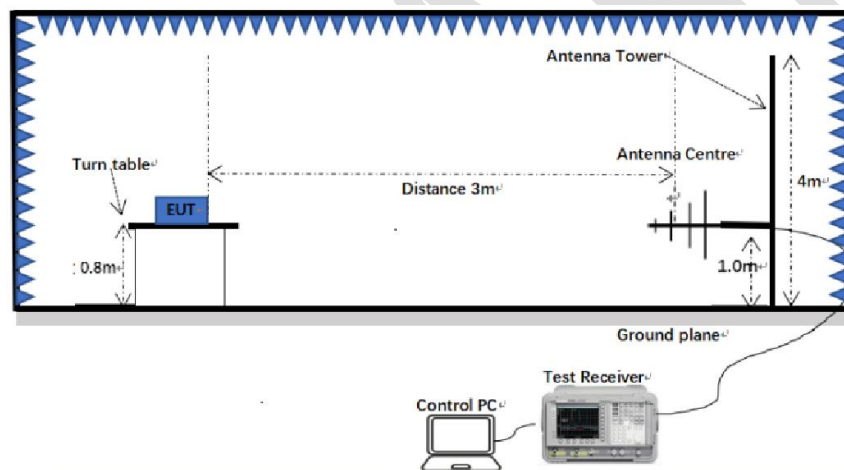

Above 1GHz:

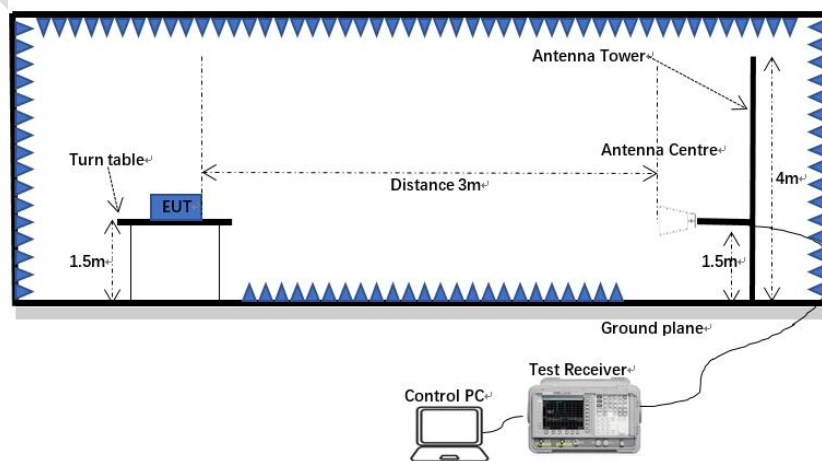

6.8.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

6.8.4 Test data


Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]

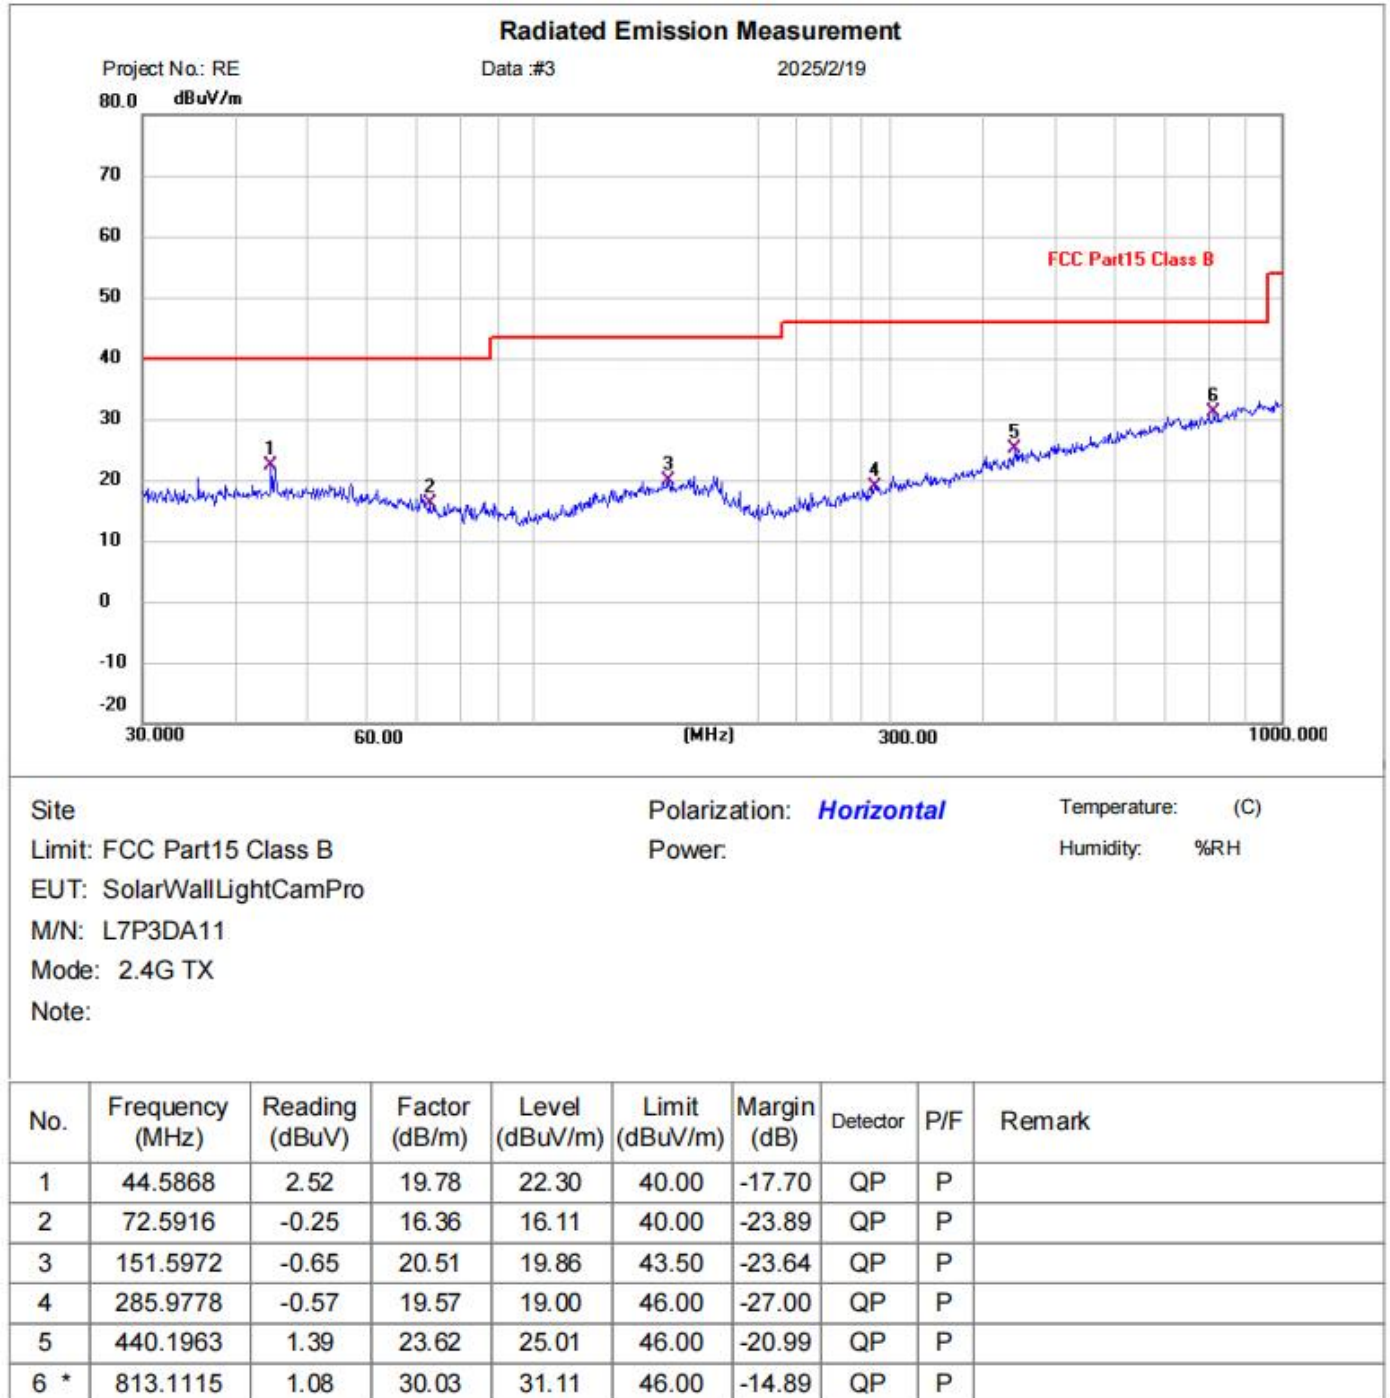


Test Result: Pass

[Test mode: TX]; [Polarity: Vertical]

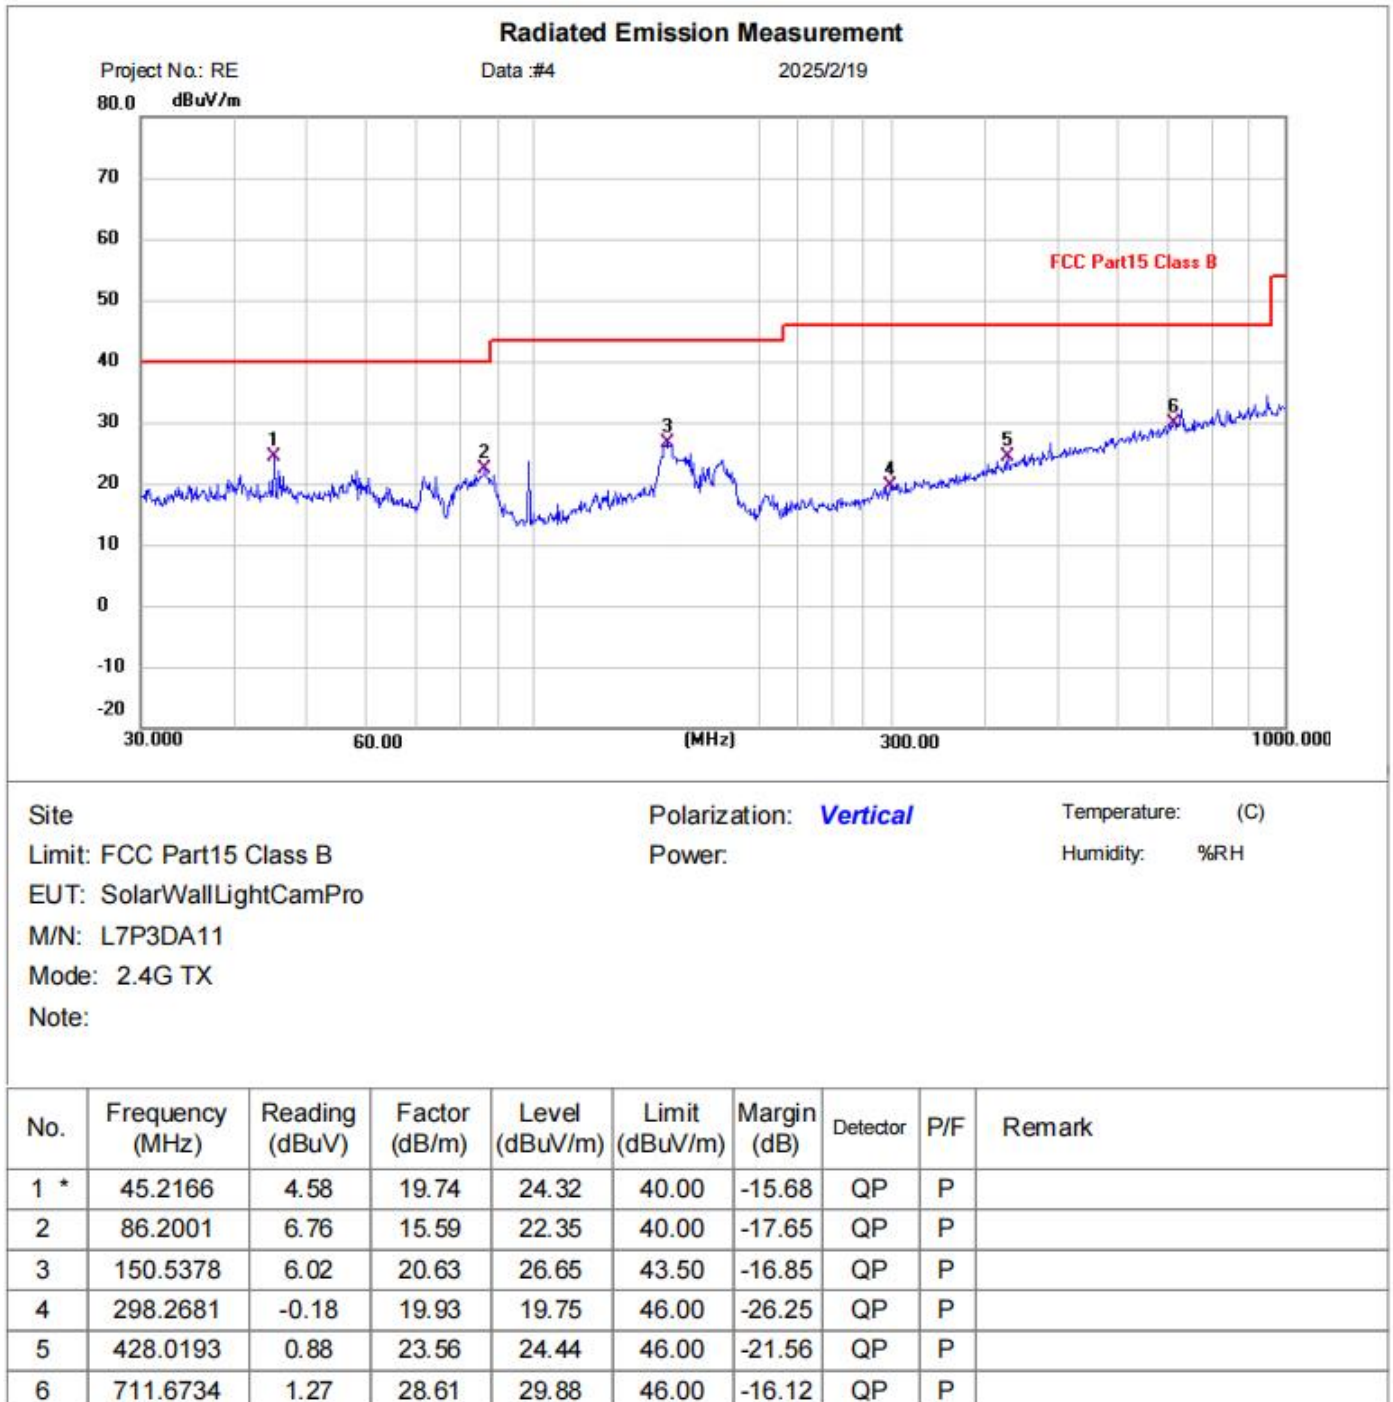
Test Result: Pass

Above 1GHz:

[Test mode: TX low channel]; [Polarity: Horizontal]

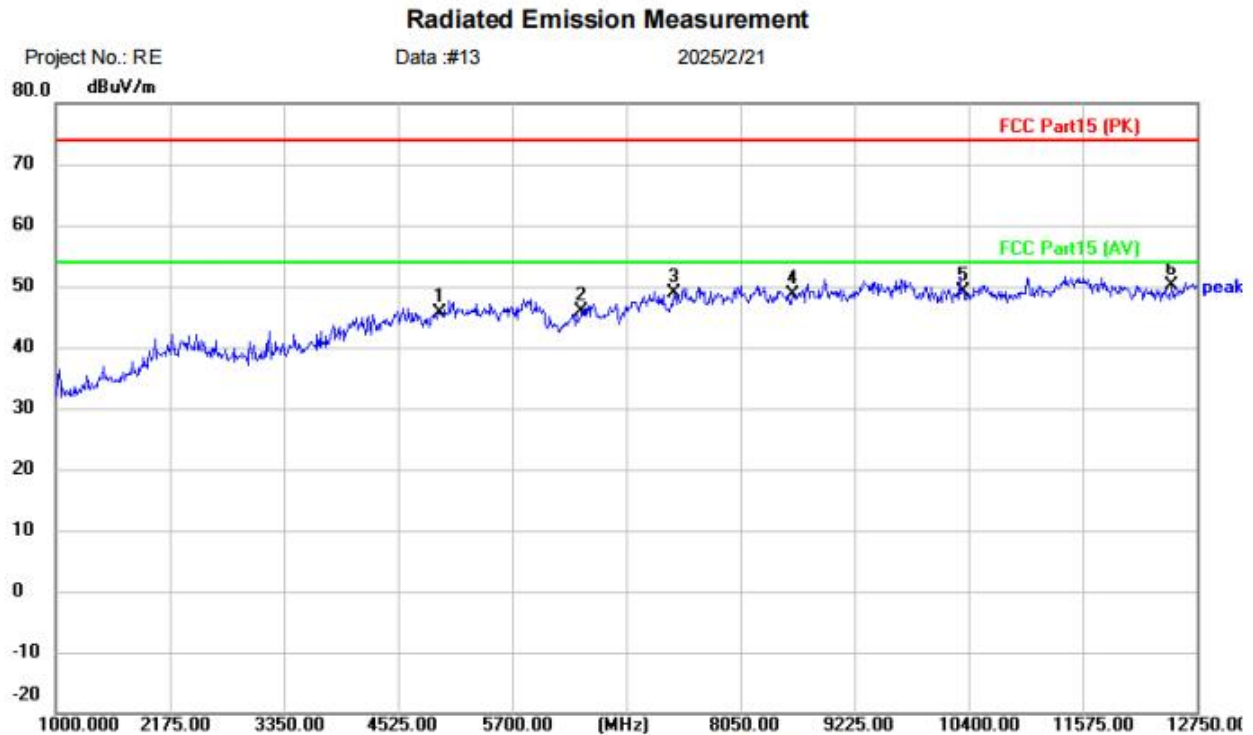

Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11


Mode: 2.4G 11B TX 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4948.000	38.48	7.27	45.75	74.00	-28.25	peak	
2		6416.750	37.83	8.13	45.96	74.00	-28.04	peak	
3		7368.500	38.28	10.50	48.78	74.00	-25.22	peak	
4		8590.500	37.09	11.42	48.51	74.00	-25.49	peak	
5		10341.25	35.56	13.54	49.10	74.00	-24.90	peak	
6	*	12491.50	37.31	12.91	50.22	74.00	-23.78	peak	

Test Result: Pass

[Test mode: TX low channel]; [Polarity: Vertical]

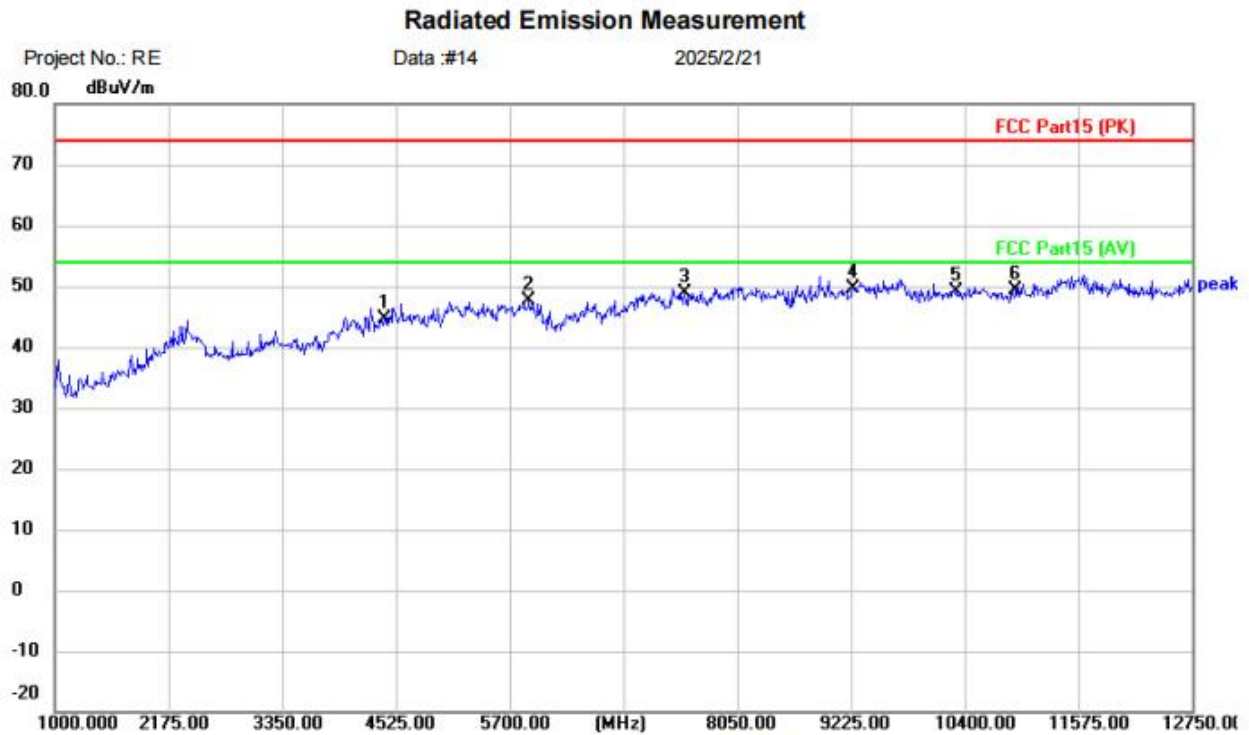

Site: Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11


Mode: 2.4G 11B TX 2412

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4407.500	39.56	5.16	44.72	74.00	-29.28	peak	
2		5899.750	38.63	9.10	47.73	74.00	-26.27	peak	
3		7509.500	38.14	10.65	48.79	74.00	-25.21	peak	
4	*	9248.500	36.61	12.99	49.60	74.00	-24.40	peak	
5		10306.00	35.50	13.56	49.06	74.00	-24.94	peak	
6		10928.75	36.17	13.14	49.31	74.00	-24.69	peak	

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Horizontal]

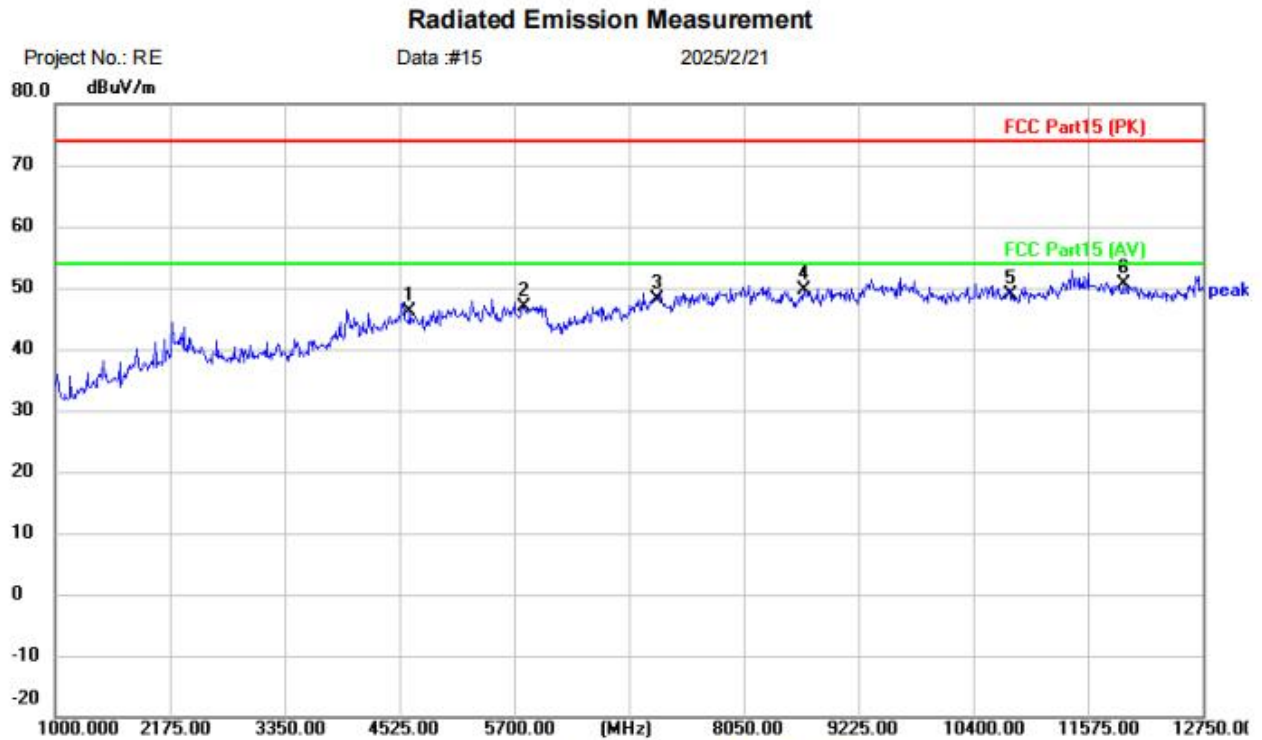

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11


Mode: 2.4G 11B TX 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4630.750	40.03	6.11	46.14	74.00	-27.86	peak	
2		5794.000	38.09	8.91	47.00	74.00	-27.00	peak	
3		7157.000	37.51	10.63	48.14	74.00	-25.86	peak	
4		8661.000	37.76	11.79	49.55	74.00	-24.45	peak	
5		10776.00	35.93	12.94	48.87	74.00	-25.13	peak	
6	*	11939.25	36.75	13.85	50.60	74.00	-23.40	peak	

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Vertical]

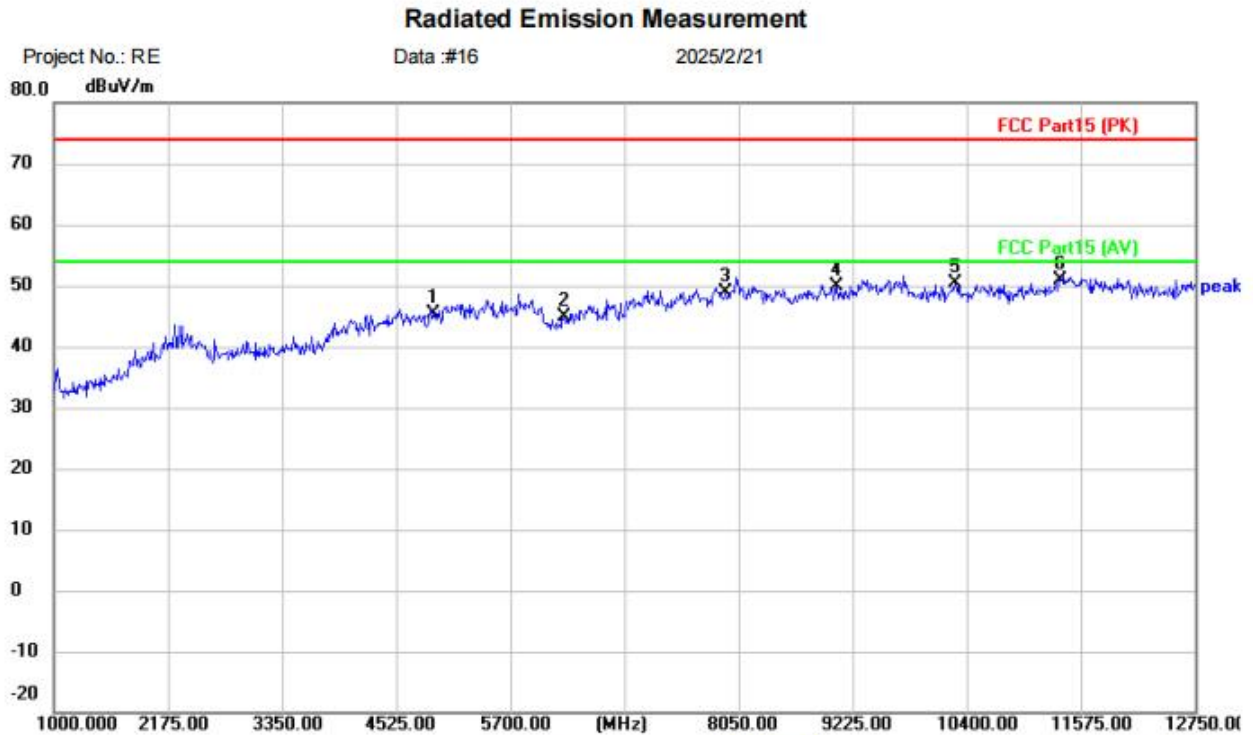

Site: Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11


Mode: 2.4G 11B TX 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4901.000	38.81	6.53	45.34	74.00	-28.66	peak	
2		6252.250	37.73	7.05	44.78	74.00	-29.22	peak	
3		7920.750	37.60	11.29	48.89	74.00	-25.11	peak	
4		9060.500	38.08	11.87	49.95	74.00	-24.05	peak	
5		10282.50	36.77	13.50	50.27	74.00	-23.73	peak	
6	*	11363.50	37.00	13.87	50.87	74.00	-23.13	peak	

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

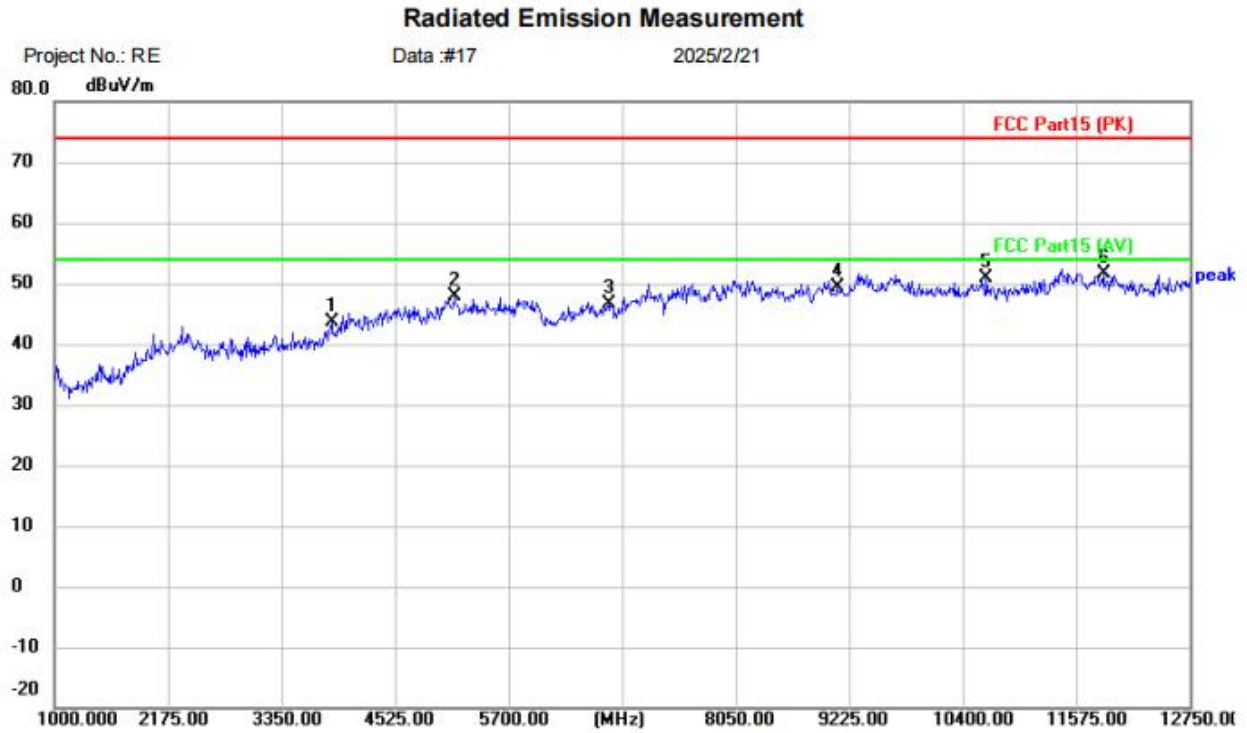

Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11


Mode: 2.4G 11B TX 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3867.000	41.81	1.90	43.71	74.00	-30.29	peak	
2		5136.000	39.64	8.15	47.79	74.00	-26.21	peak	
3		6734.000	37.75	8.97	46.72	74.00	-27.28	peak	
4		9107.500	37.20	12.26	49.46	74.00	-24.54	peak	
5		10646.75	37.63	13.24	50.87	74.00	-23.13	peak	
6	*	11857.00	38.13	13.53	51.66	74.00	-22.34	peak	

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical]

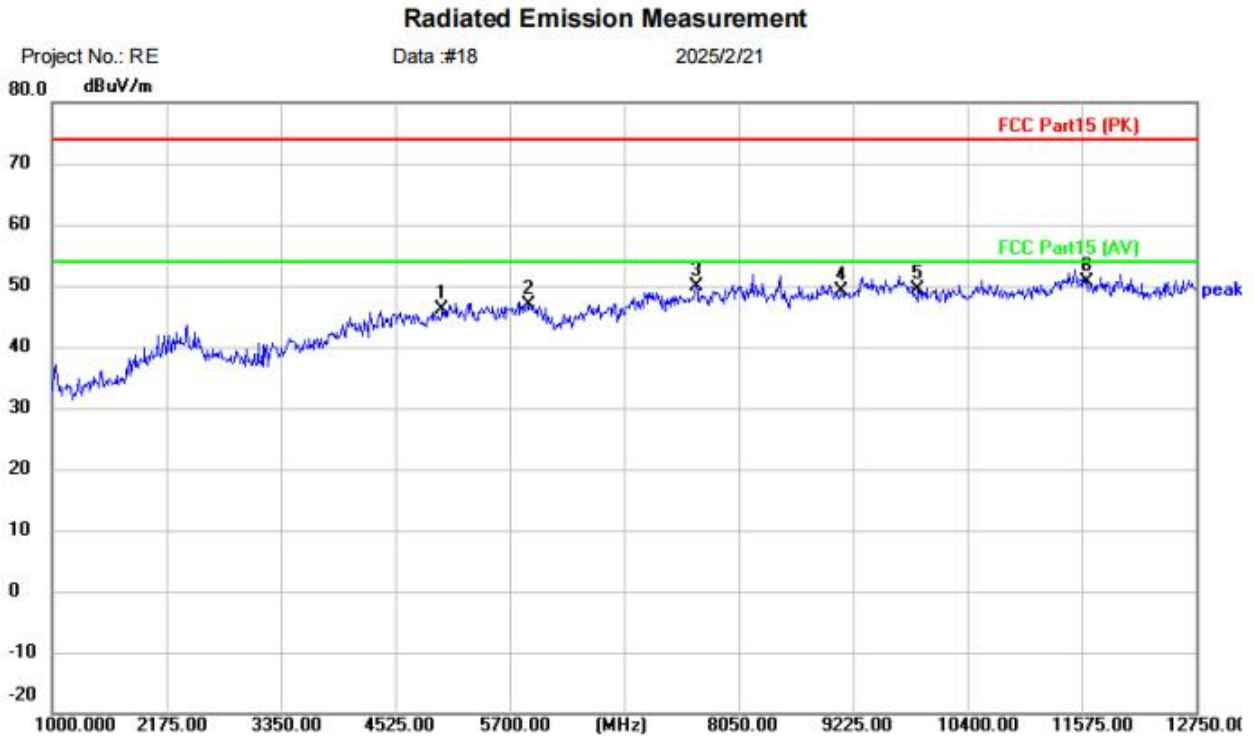

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11

Mode: 2.4G 11B TX 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5006.750	38.09	7.95	46.04	74.00	-27.96	peak	
2		5899.750	37.85	9.10	46.95	74.00	-27.05	peak	
3		7615.250	39.20	10.59	49.79	74.00	-24.21	peak	
4		9107.500	36.92	12.26	49.18	74.00	-24.82	peak	
5		9894.750	36.27	13.15	49.42	74.00	-24.58	peak	
6	*	11622.00	36.20	14.48	50.68	74.00	-23.32	peak	

Test Result: Pass

Note: The disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. During the test, pre-scan the 802.11b/g/n20 mode, and found the 802.11b mode which it is worse case.

BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.2

6.9 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.9.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.9.2 Test setup


Below 1GHz:

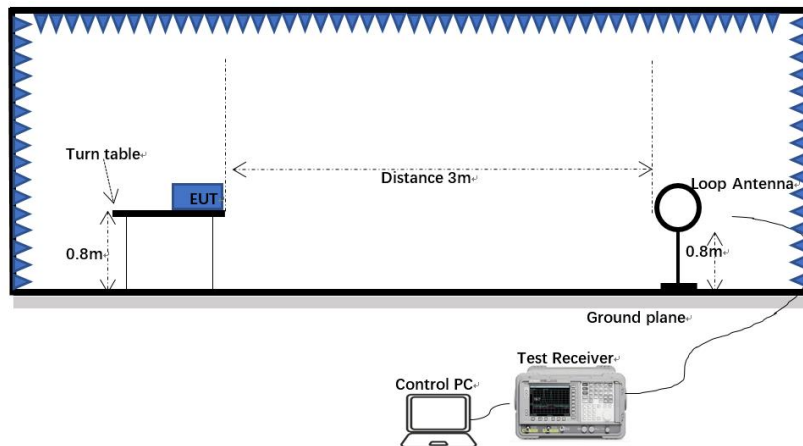

30MHz-1GHz:

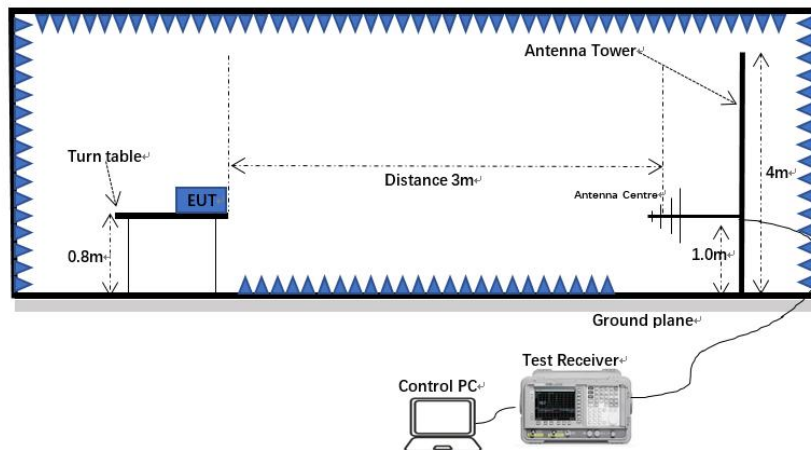

Above 1GHz:

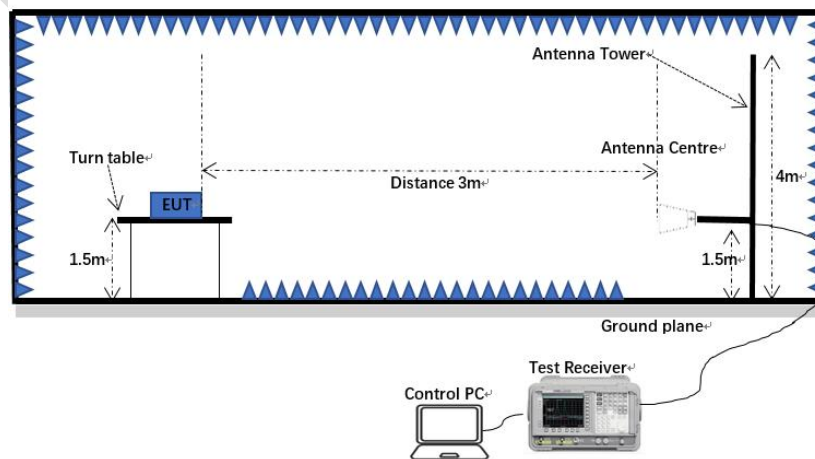

6.9.3 Procedure


- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


6.9.4 Test data

[Test mode: TX B low channel]; [Polarity: Horizontal]

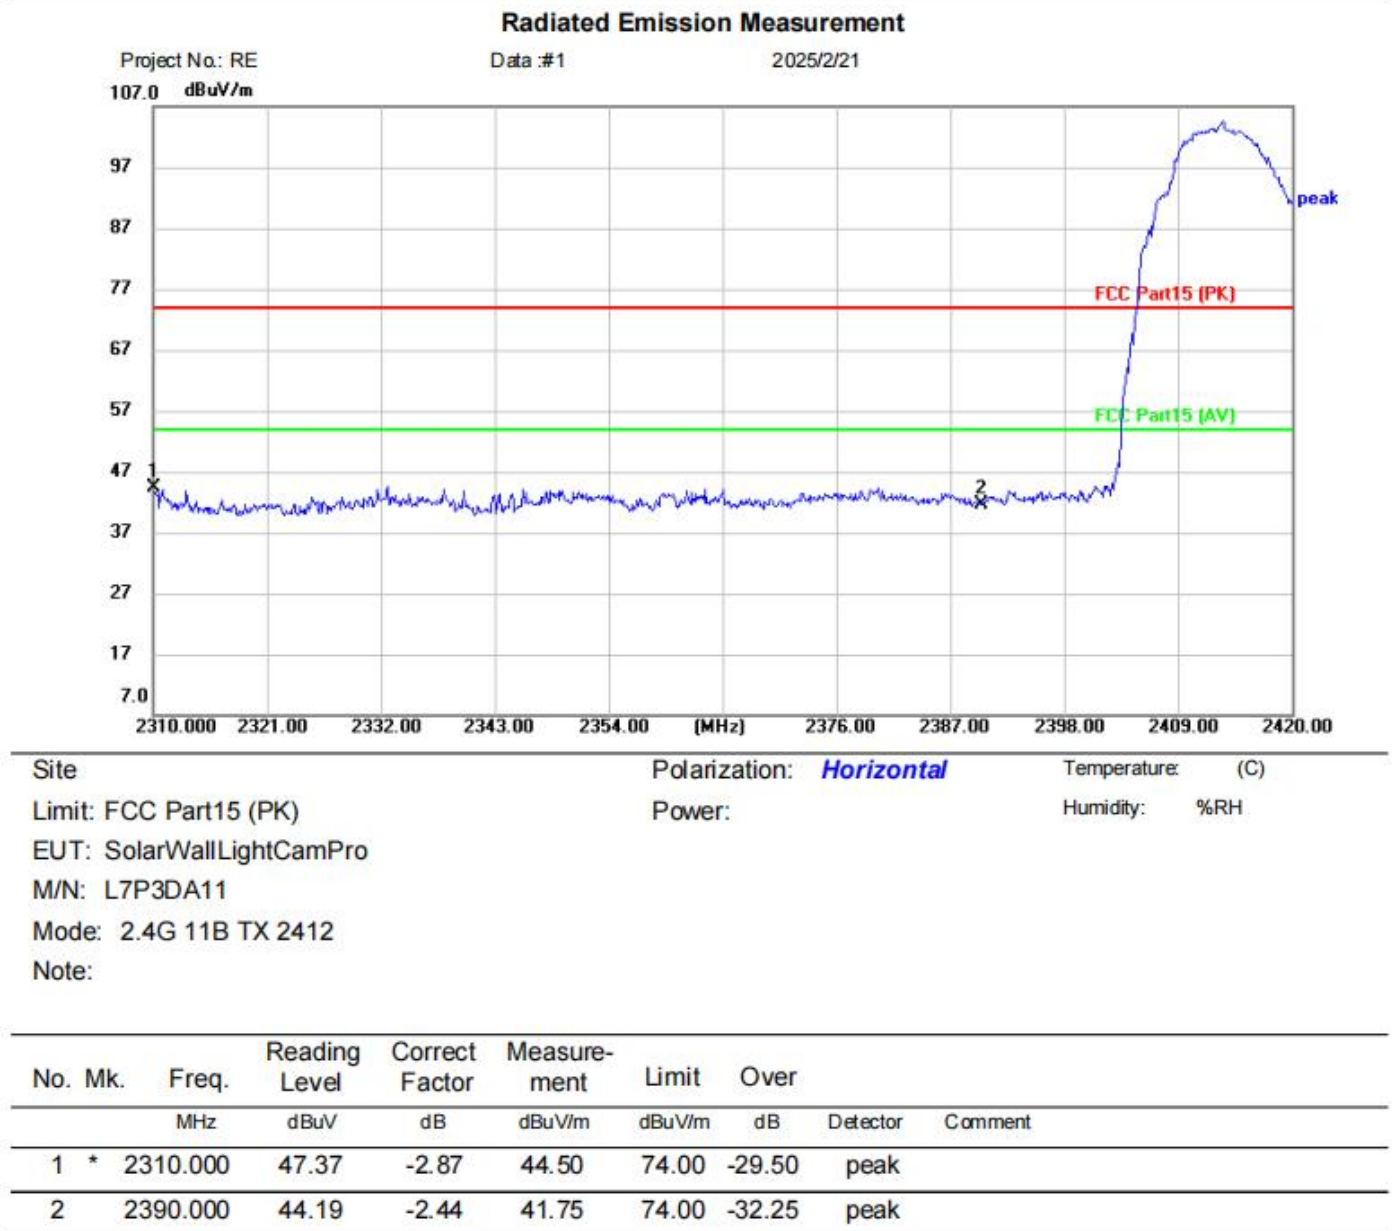

Test Result: Pass

[Test mode:TX B low channel]; [Polarity: Vertical]

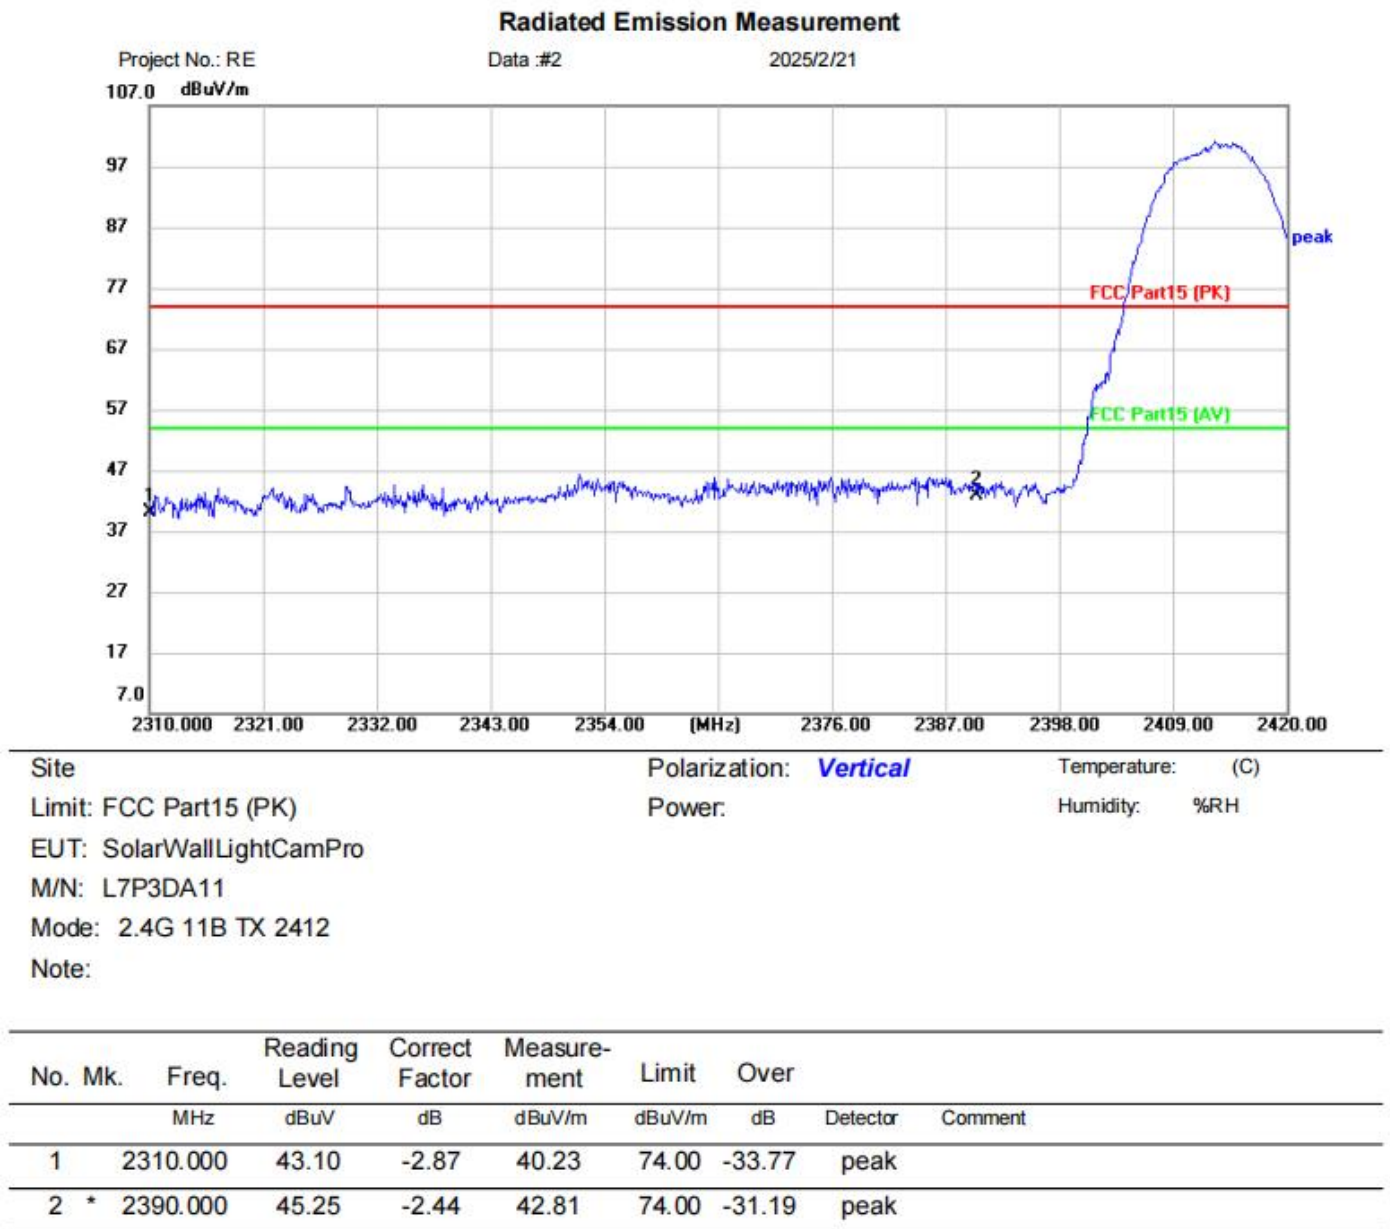

Test Result: Pass


[Test mode: TX B High channel]; [Polarity: Horizontal]

Radiated Emission Measurement

Project No.: RE
107.0 dBuV/m

Data :#3

2025/2/21

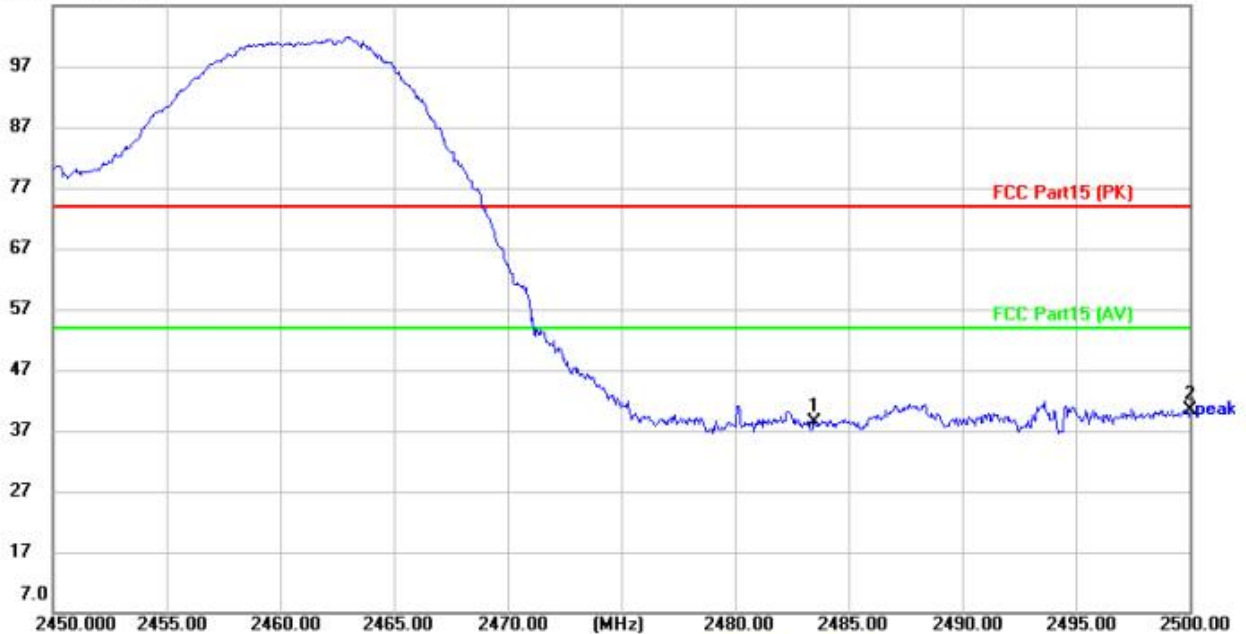

Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11

Mode: 2.4G 11B TX 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	41.25	-2.91	38.34	74.00	-35.66	peak	
2	*	2500.000	43.50	-3.00	40.50	74.00	-33.50	peak	

Test Result: Pass

[Test mode:TX B High channel]; [Polarity: Vertical]

Radiated Emission Measurement




Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: SolarWallLightCamPro
 M/N: L7P3DA11
 Mode: 2.4G 11B TX 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	41.36	-2.91	38.45	74.00	-35.55	peak	
2	*	2500.000	42.24	-3.00	39.24	74.00	-34.76	peak	

Test Result: Pass

[Test mode: TX G low channel]; [Polarity: Horizontal]

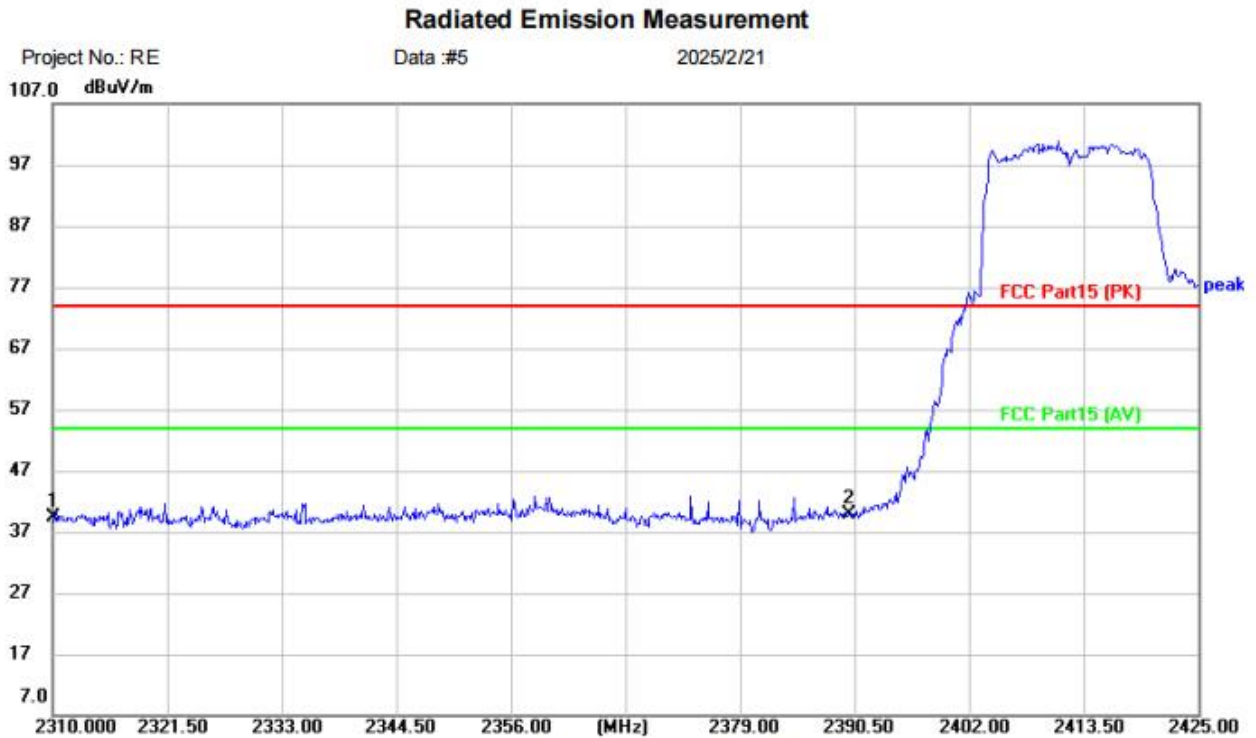

Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11


Mode: 2.4G 11G TX 2412

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.20	-2.87	39.33	74.00	-34.67	peak	
2	*	2390.000	42.40	-2.44	39.96	74.00	-34.04	peak	

Test Result: Pass

[Test mode:TX G low channel]; [Polarity: Vertical]

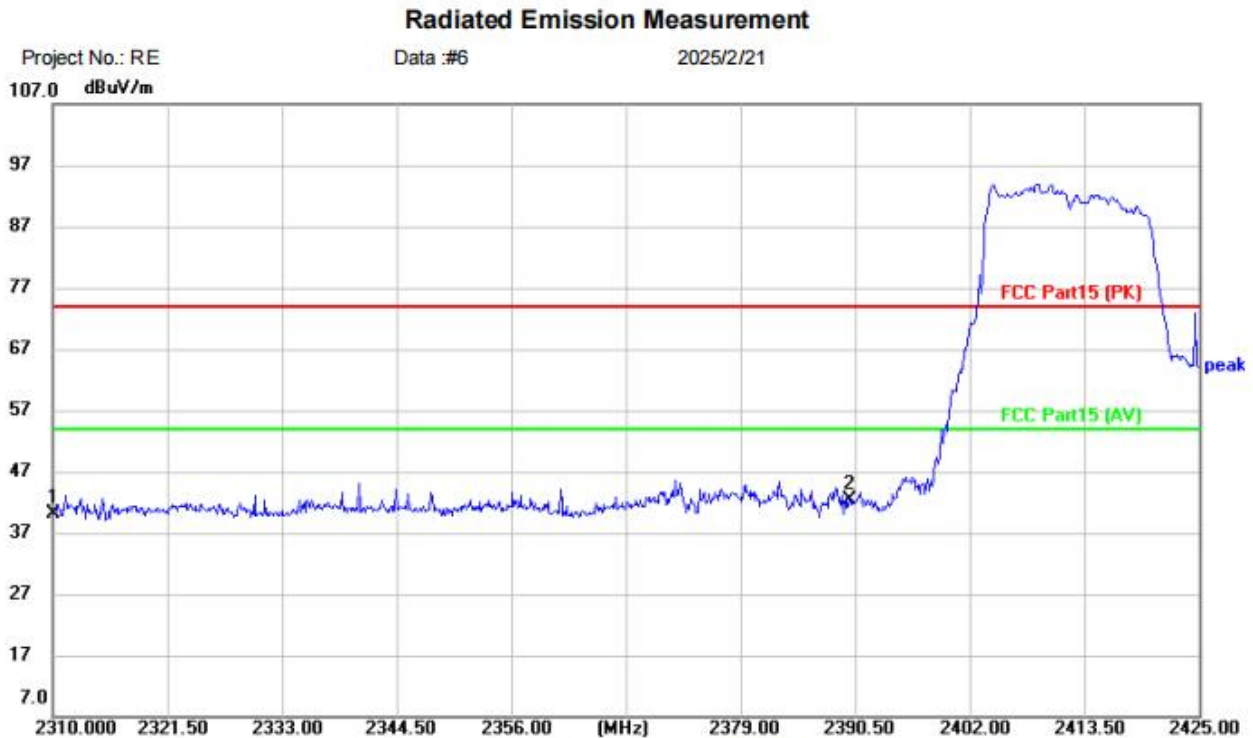

Site: Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11

Mode: 2.4G 11G TX 2412


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.90	-2.87	40.03	74.00	-33.97	peak	
2	*	2390.000	44.84	-2.44	42.40	74.00	-31.60	peak	

Test Result: Pass

[Test mode: TX G High channel]; [Polarity: Horizontal]

Radiated Emission Measurement

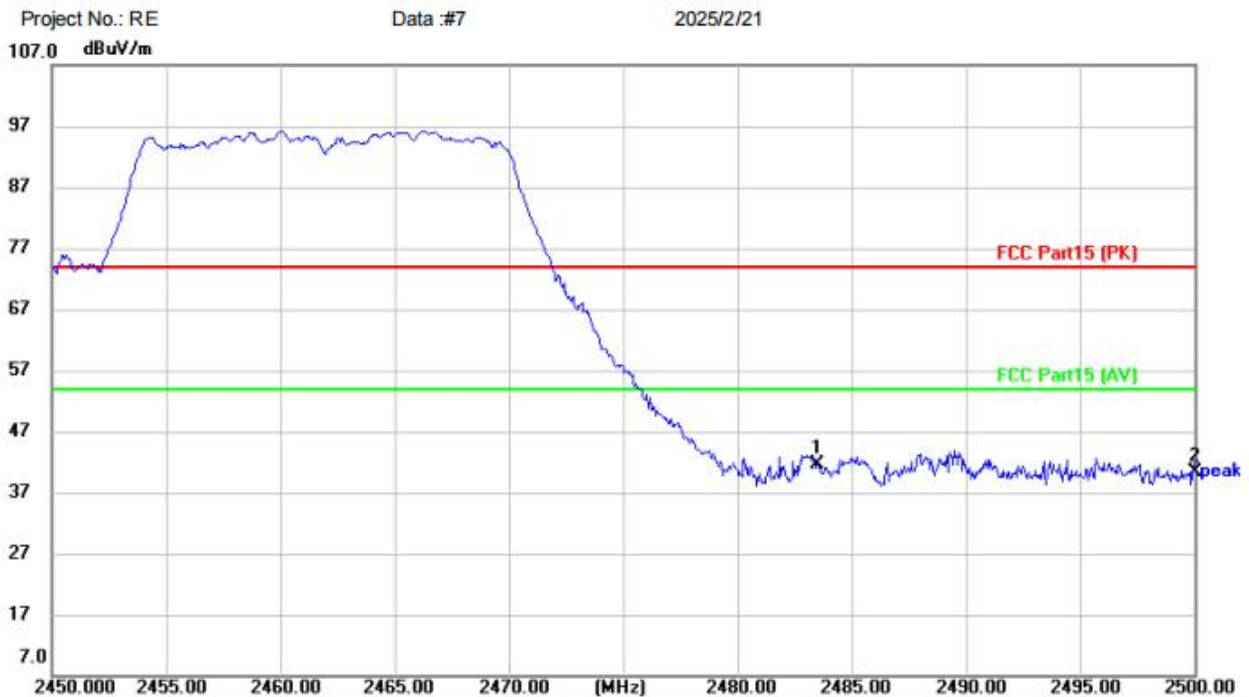

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: SolarWallLightCamPro
M/N: L7P3DA11
Mode: 2.4G 11G TX 2462
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	44.44	-2.91	41.53	74.00	-32.47	peak	
2		2500.000	43.27	-3.00	40.27	74.00	-33.73	peak	

Test Result: Pass


[Test mode:TX G High channel]; [Polarity: Vertical]

Radiated Emission Measurement

Project No.: RE
107.0 dBuV/m

Data :#8

2025/2/21

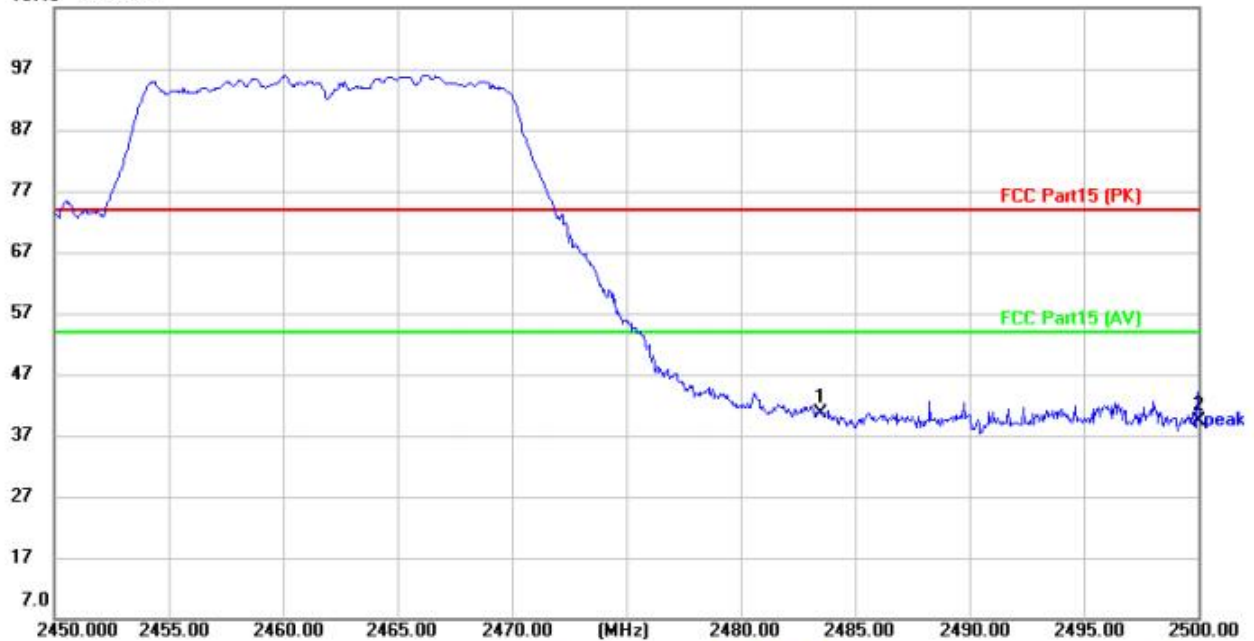

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11

Mode: 2.4G 11G TX 2462


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	43.65	-2.91	40.74	74.00	-33.26	peak	
2		2500.000	42.41	-3.00	39.41	74.00	-34.59	peak	

Test Result: Pass

[Test mode: TX N20 low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

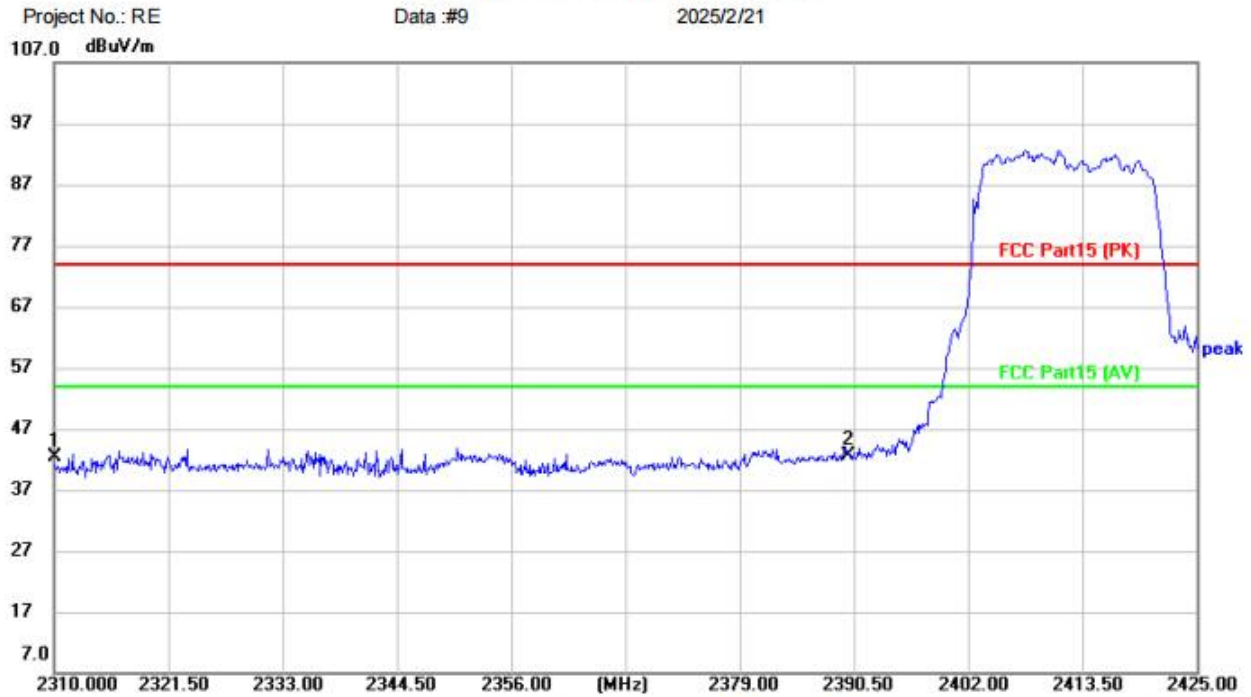


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: SolarWallLightCamPro
M/N: L7P3DA11
Mode: 2.4G 11N20 TX 2412
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	45.17	-2.87	42.30	74.00	-31.70	peak	
2	*	2390.000	45.18	-2.44	42.74	74.00	-31.26	peak	

Test Result: Pass

[Test mode:TX N20 low channel]; [Polarity: Vertical]

Radiated Emission Measurement

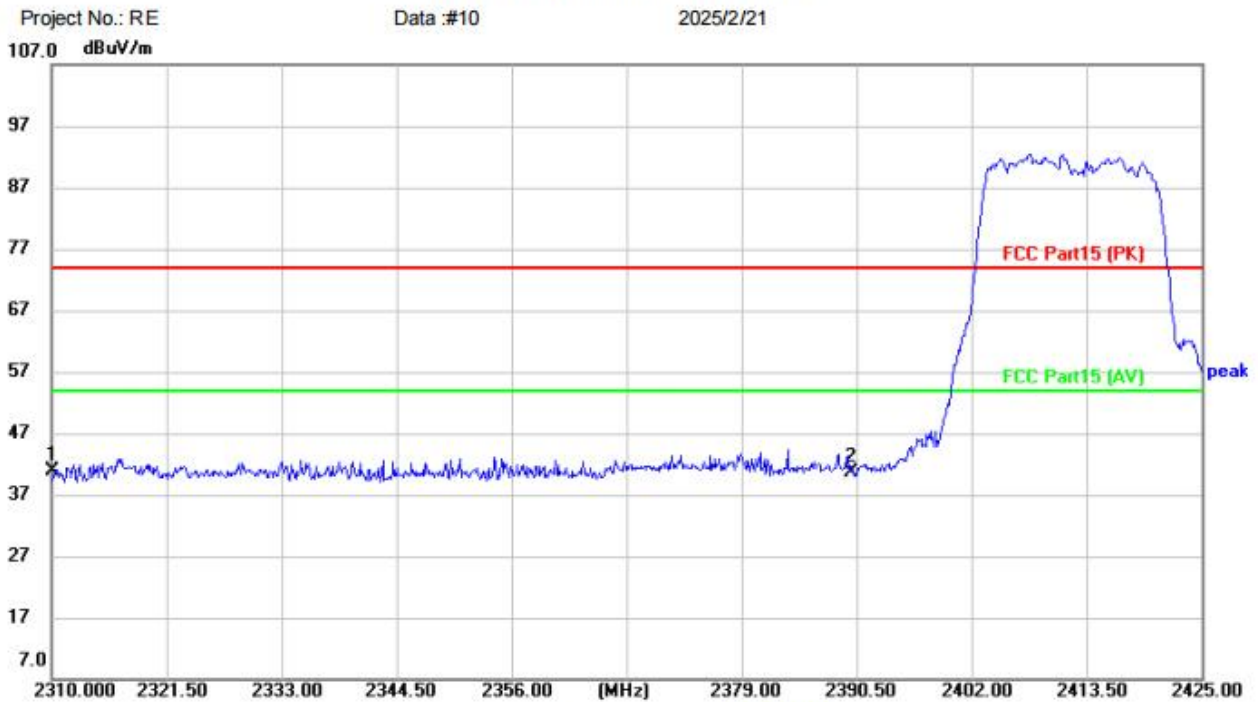

Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: SolarWallLightCamPro
 M/N: L7P3DA11
 Mode: 2.4G 11N20 TX 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2310.000	43.69	-2.87	40.82	74.00	-33.18	peak	
2		2390.000	43.07	-2.44	40.63	74.00	-33.37	peak	

Test Result: Pass

[Test mode: TX N20 High channel]; [Polarity: Horizontal]


Radiated Emission Measurement

Project No.: RE

Data :#11

2025/2/21

107.0 dBuV/m

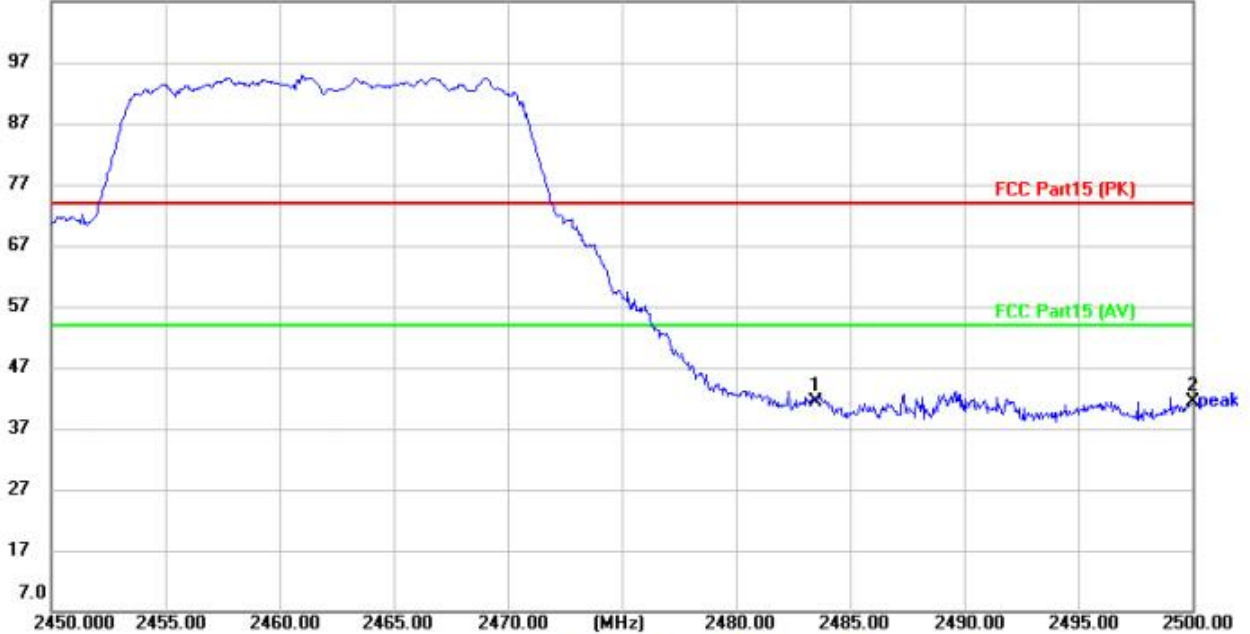

Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11


Mode: 2.4G 11N20 TX 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	44.36	-2.91	41.45	74.00	-32.55	peak	
2		2500.000	44.45	-3.00	41.45	74.00	-32.55	peak	

Test Result: Pass

[Test mode:TX N20 High channel]; [Polarity: Vertical]

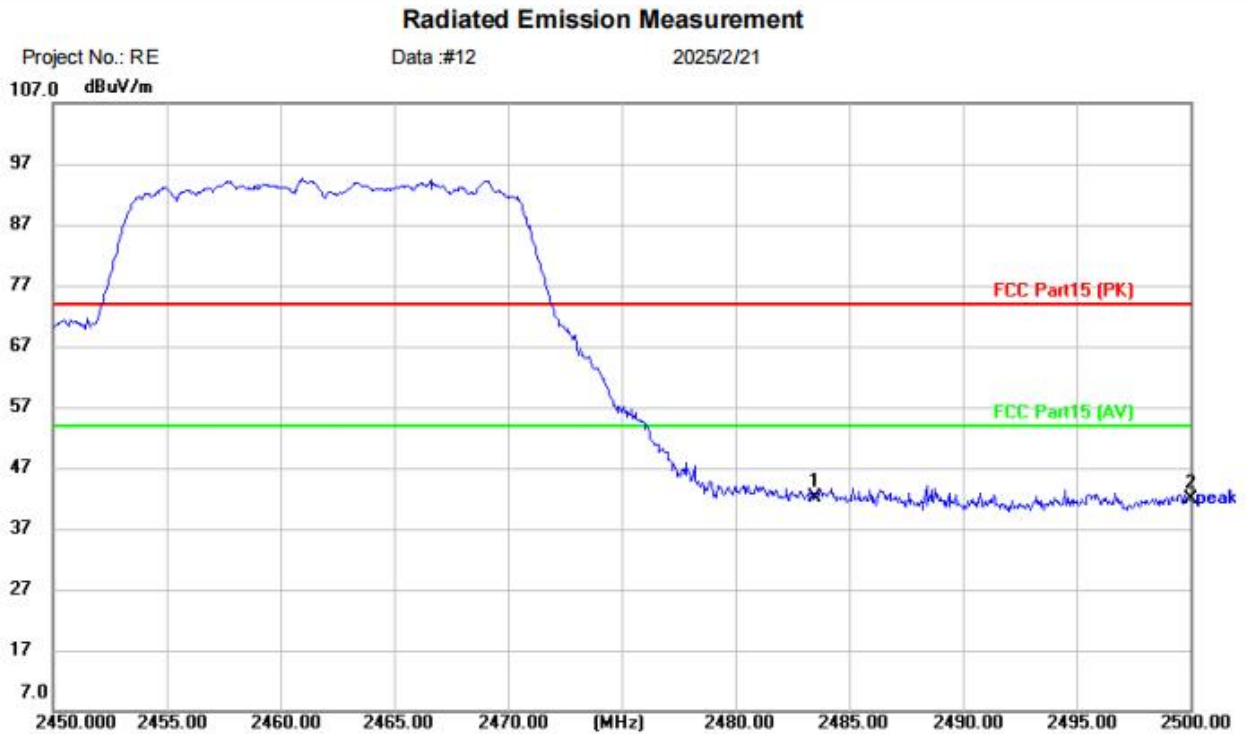

Site: Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: SolarWallLightCamPro

M/N: L7P3DA11

Mode: 2.4G 11N20 TX 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	44.92	-2.91	42.01	74.00	-31.99	peak	
2		2500.000	44.94	-3.00	41.94	74.00	-32.06	peak	


Test Result: Pass

7 Appendix A


7.1 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	11.396	30	Pass
NVNT	b	2437	Ant1	12.26	30	Pass
NVNT	b	2462	Ant1	12.55	30	Pass
NVNT	g	2412	Ant1	10.744	30	Pass
NVNT	g	2437	Ant1	11.327	30	Pass
NVNT	g	2462	Ant1	11.475	30	Pass
NVNT	n20	2412	Ant1	10.604	30	Pass
NVNT	n20	2437	Ant1	11.021	30	Pass
NVNT	n20	2462	Ant1	11.597	30	Pass


Power NVNT b 2412MHz Ant1

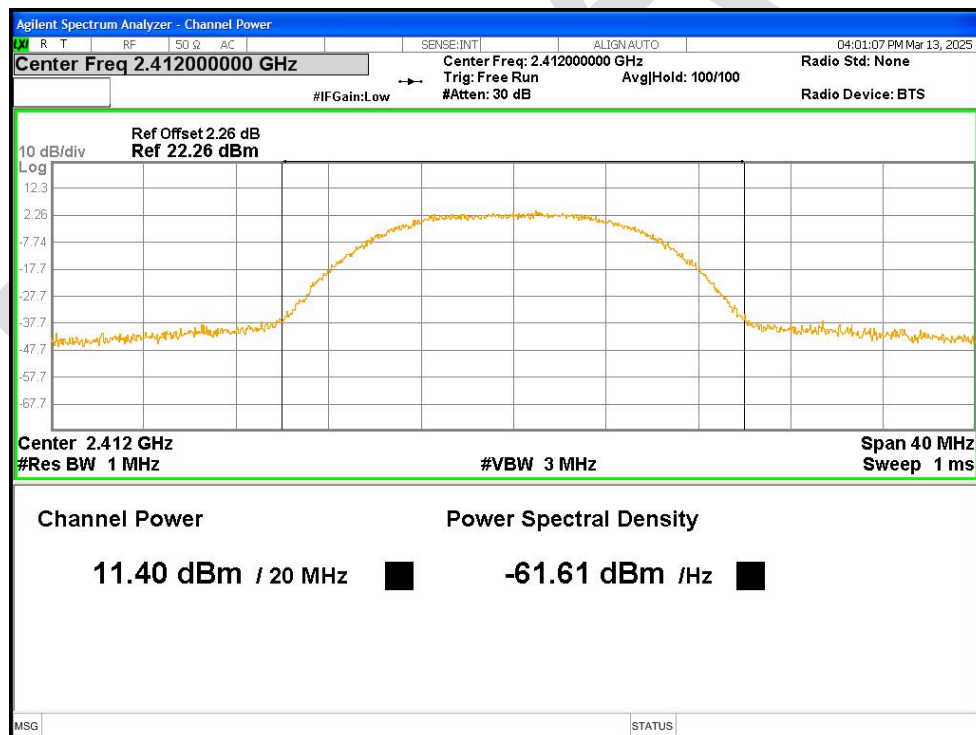


Power NVNT b 2437MHz Ant1

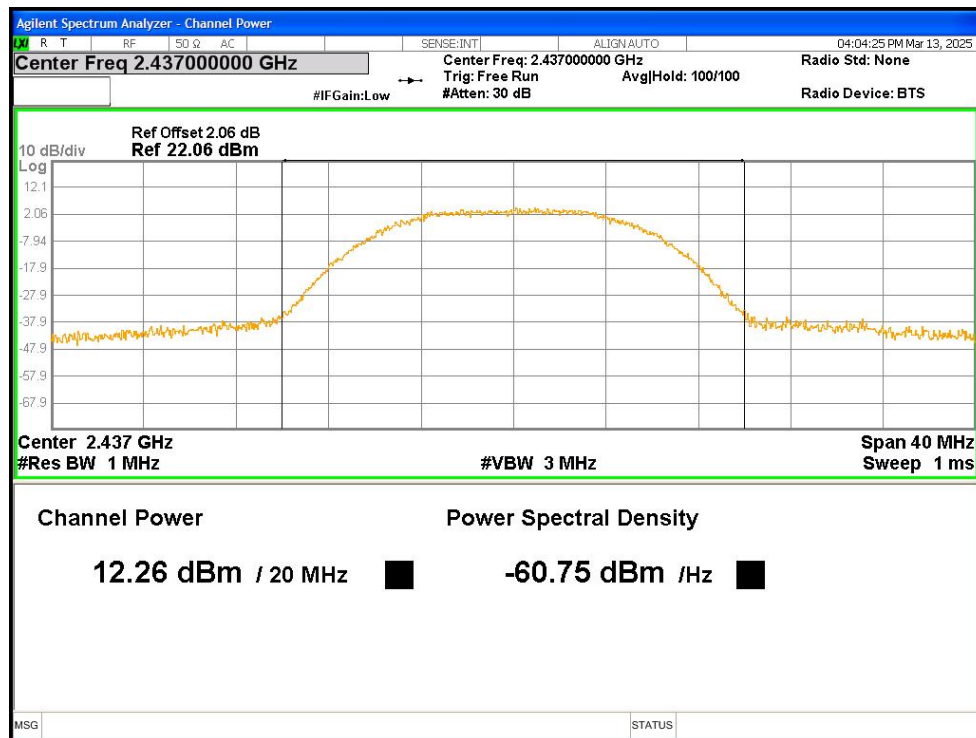


Power NVNT b 2462MHz Ant1

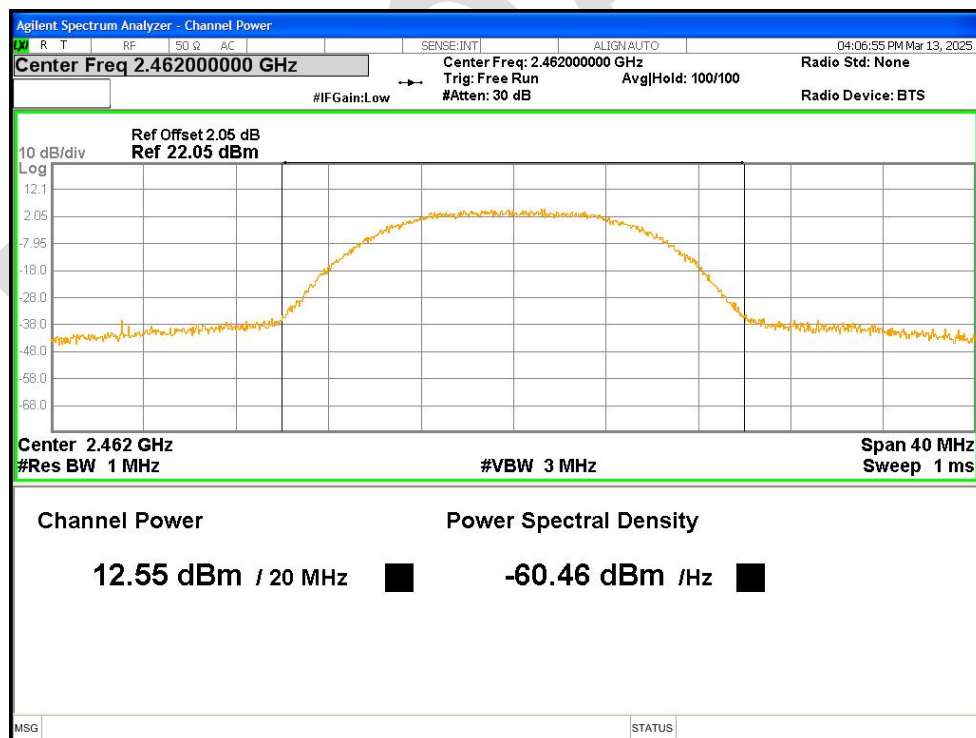


Power NVNT g 2412MHz Ant1

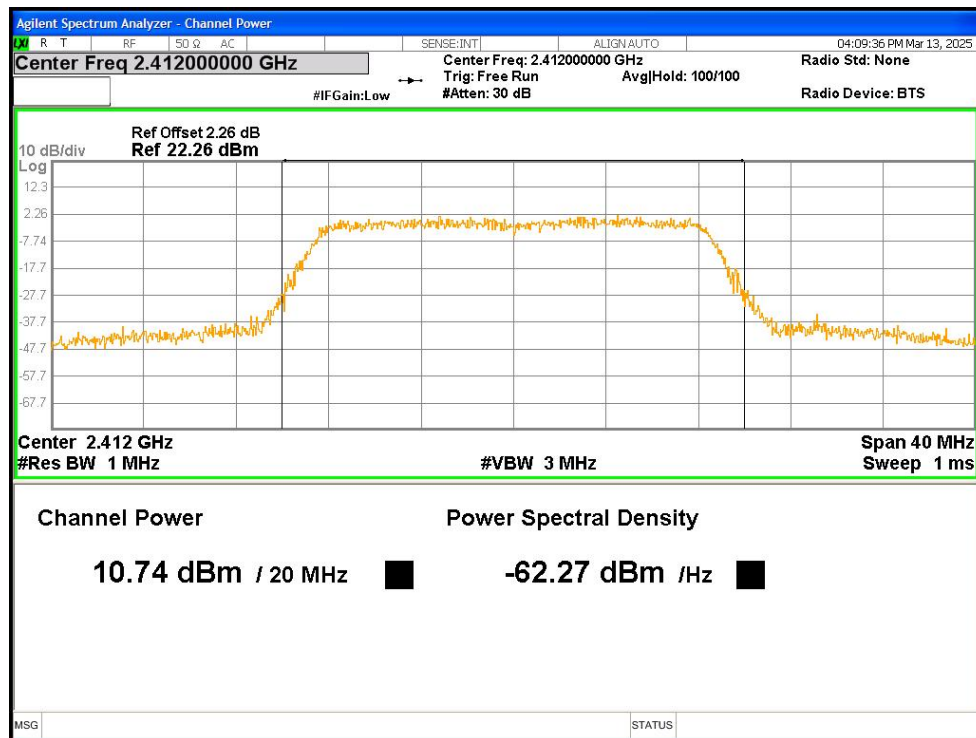


Power NVNT g 2437MHz Ant1

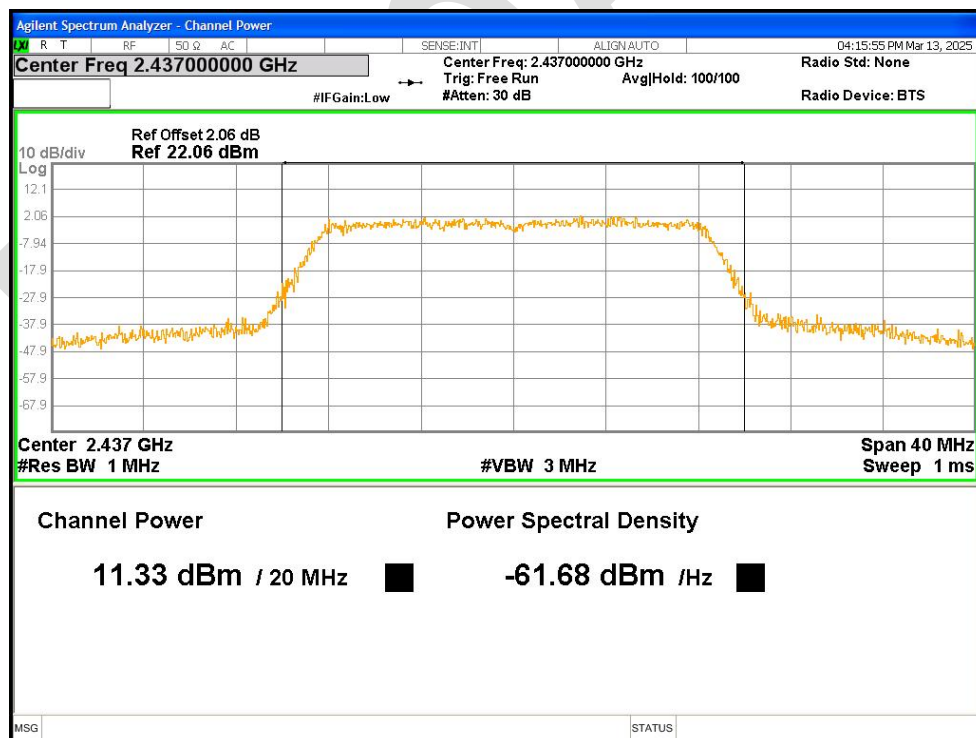


Power NVNT g 2462MHz Ant1

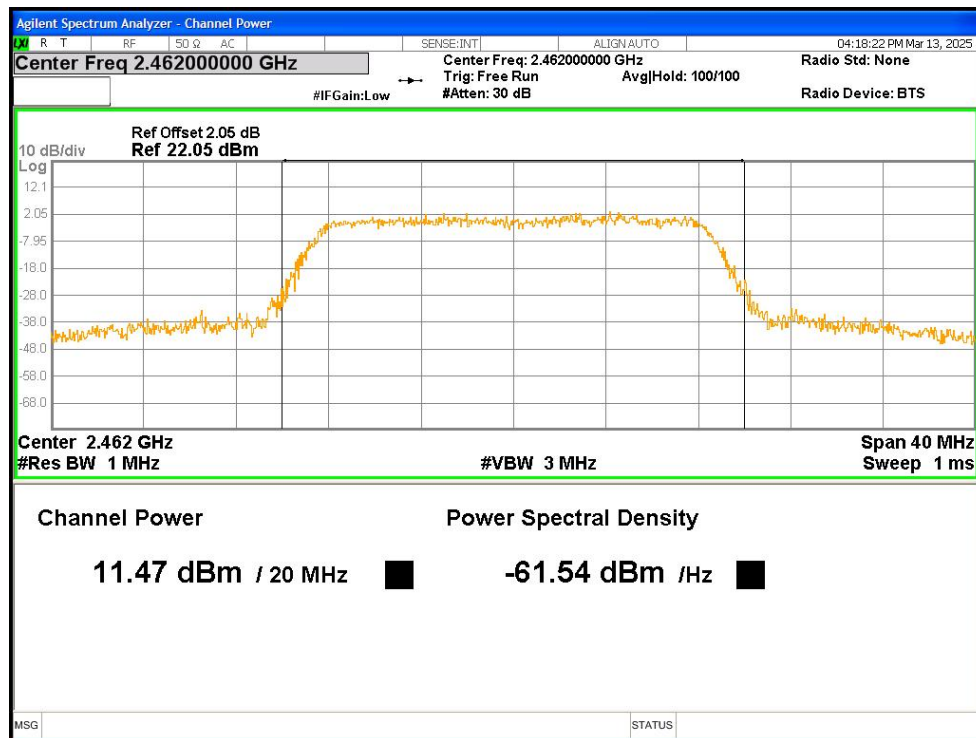


Power NVNT n20 2412MHz Ant1

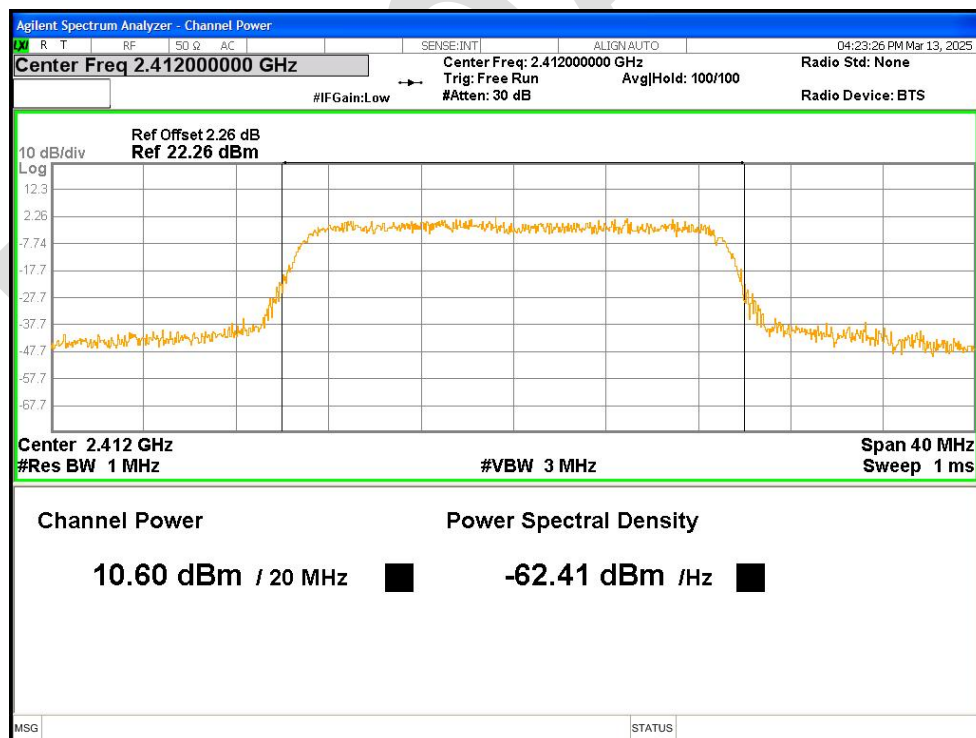

Power NVNT n20 2437MHz Ant1

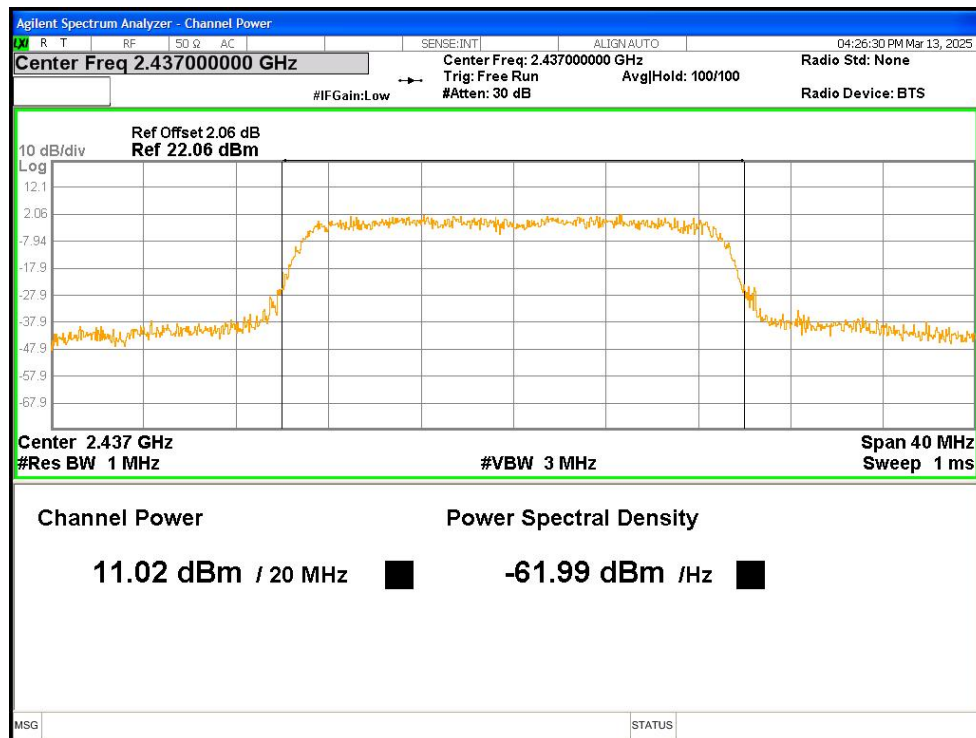


Power NVNT n20 2462MHz Ant1

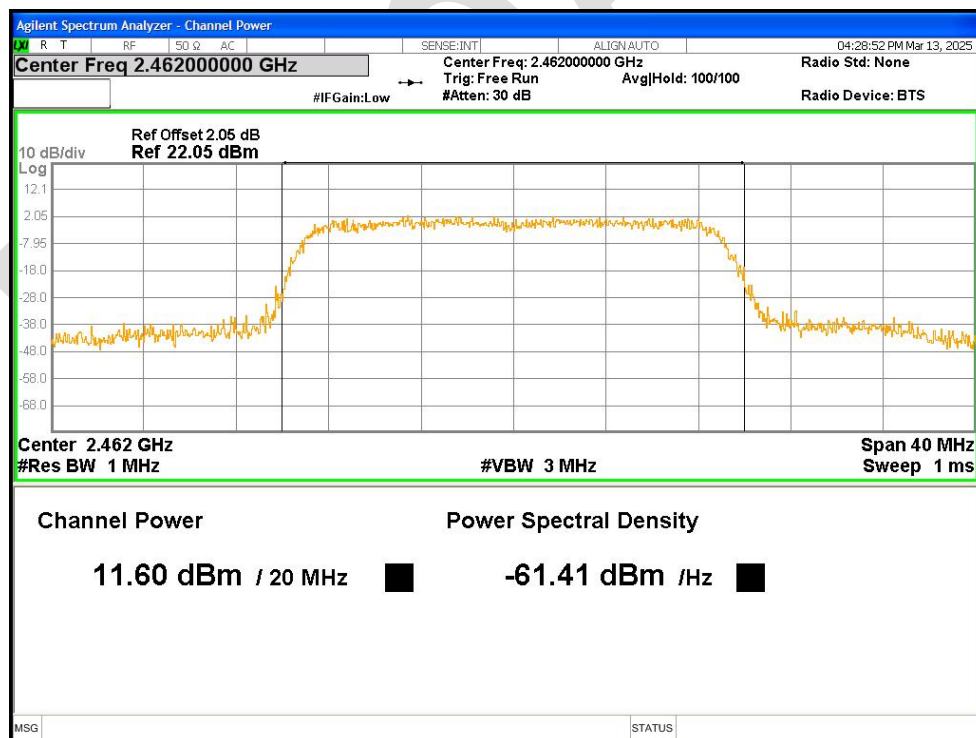


7.2 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.009	0.5	Pass
NVNT	b	2437	Ant1	9.571	0.5	Pass
NVNT	b	2462	Ant1	10.196	0.5	Pass
NVNT	g	2412	Ant1	16.358	0.5	Pass
NVNT	g	2437	Ant1	16.353	0.5	Pass
NVNT	g	2462	Ant1	16.275	0.5	Pass
NVNT	n20	2412	Ant1	17.057	0.5	Pass
NVNT	n20	2437	Ant1	16.752	0.5	Pass
NVNT	n20	2462	Ant1	16.883	0.5	Pass


-6dB Bandwidth NVNT b 2412MHz Ant1

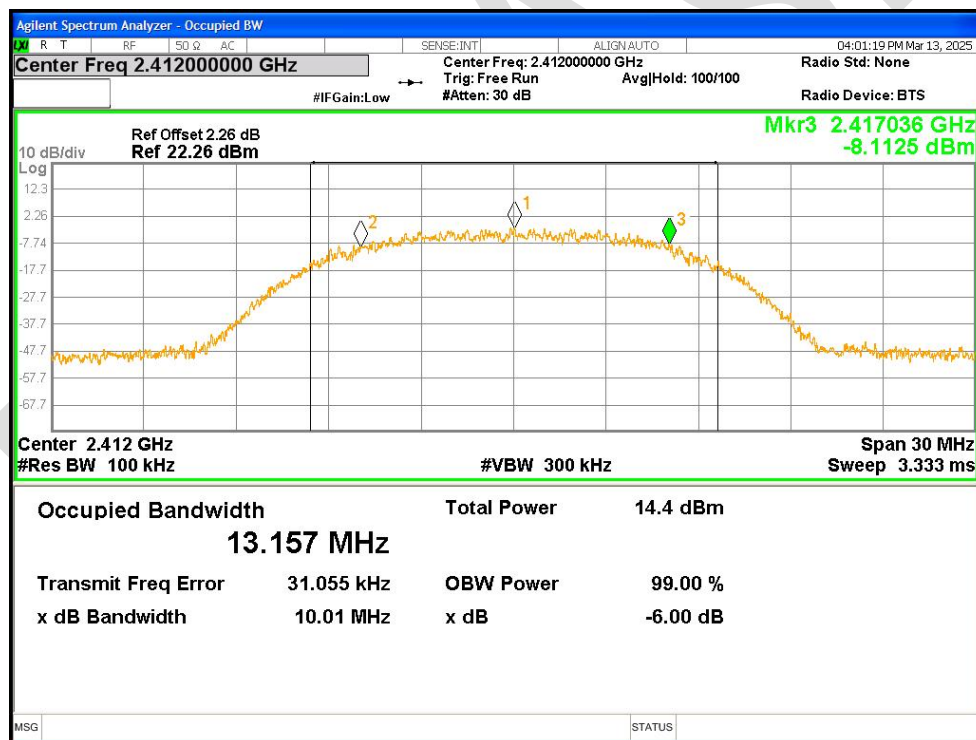


-6dB Bandwidth NVNT b 2437MHz Ant1

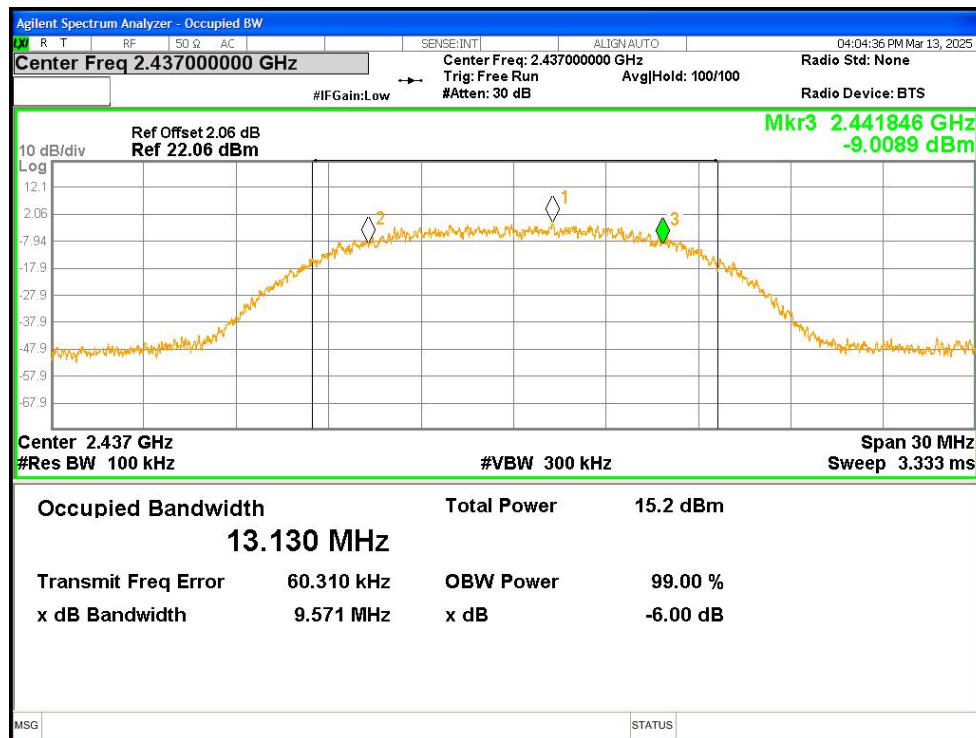


-6dB Bandwidth NVNT b 2462MHz Ant1

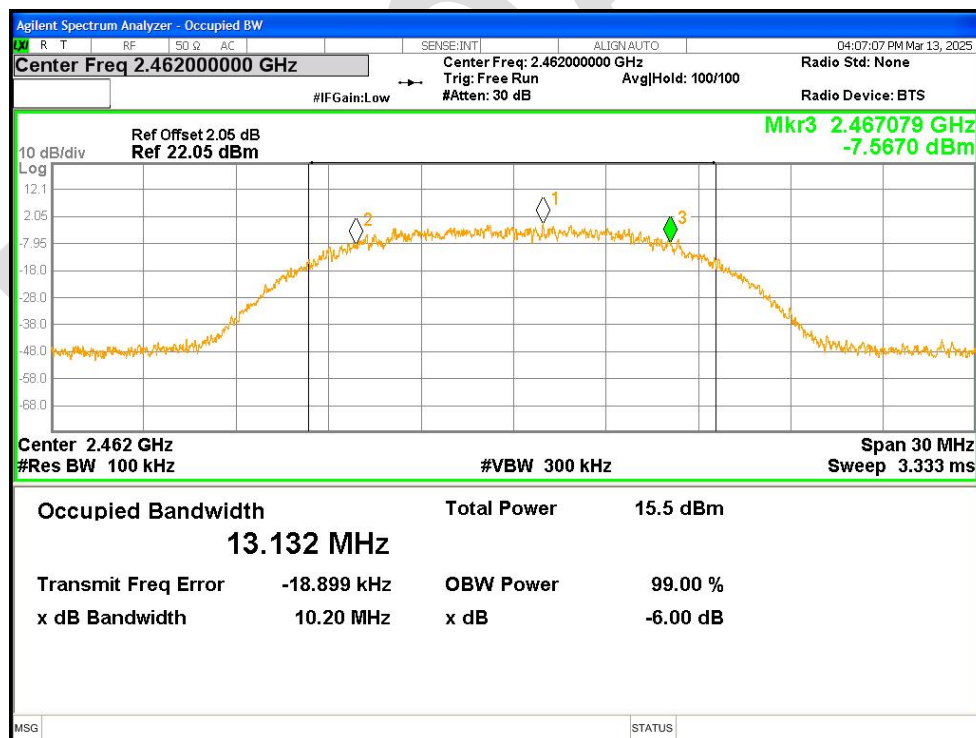


-6dB Bandwidth NVNT g 2412MHz Ant1

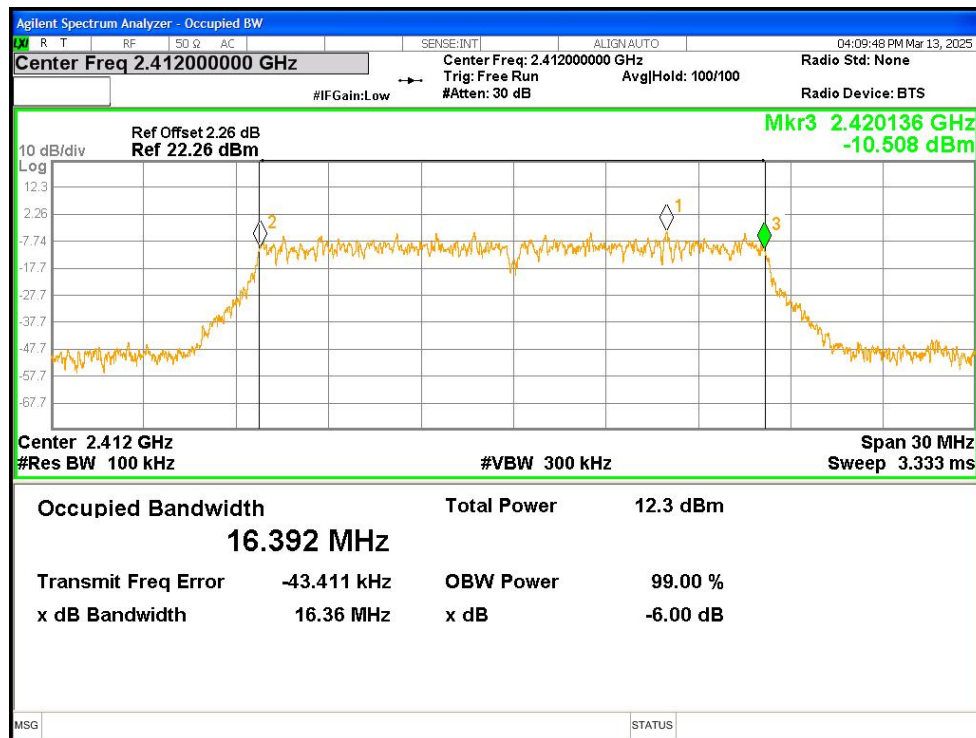


-6dB Bandwidth NVNT g 2437MHz Ant1

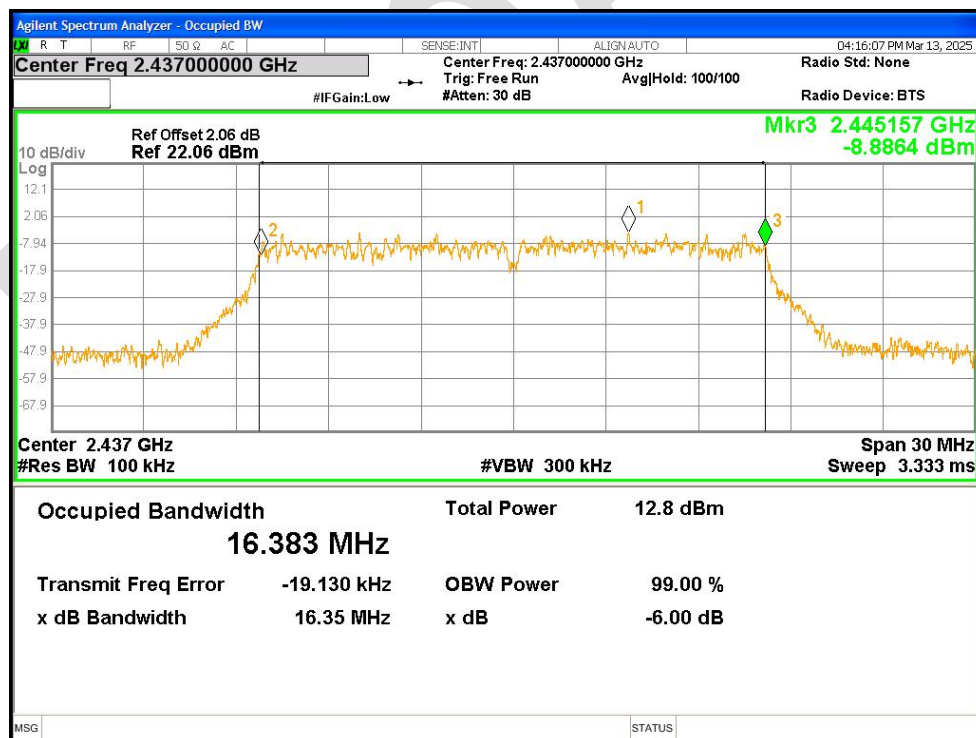


-6dB Bandwidth NVNT g 2462MHz Ant1

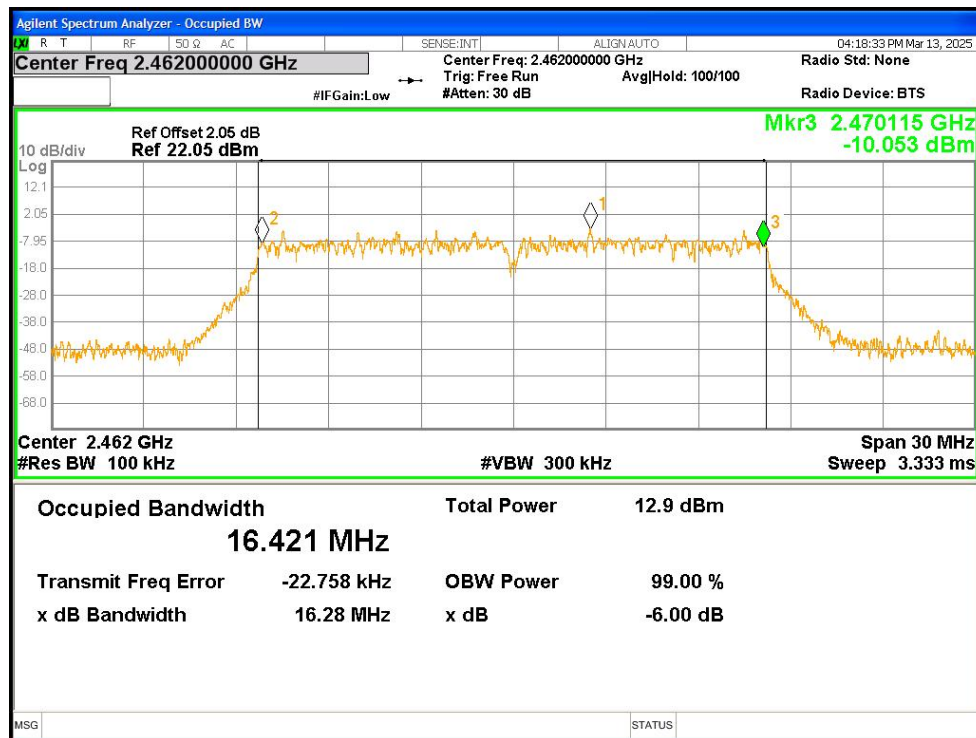


-6dB Bandwidth NVNT n20 2412MHz Ant1

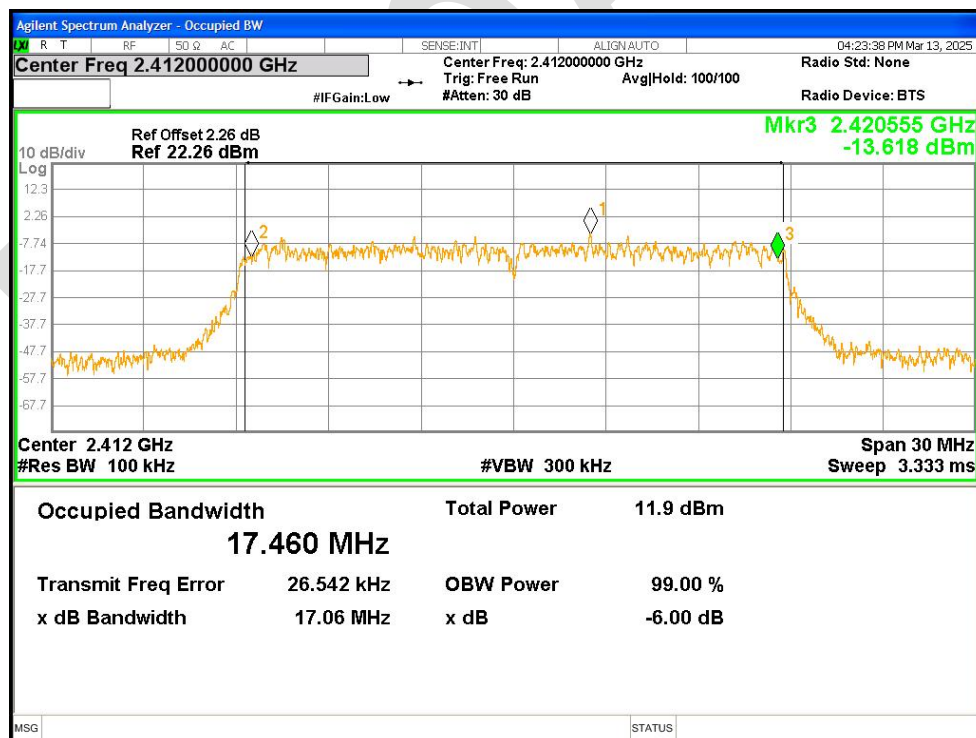

-6dB Bandwidth NVNT n20 2437MHz Ant1

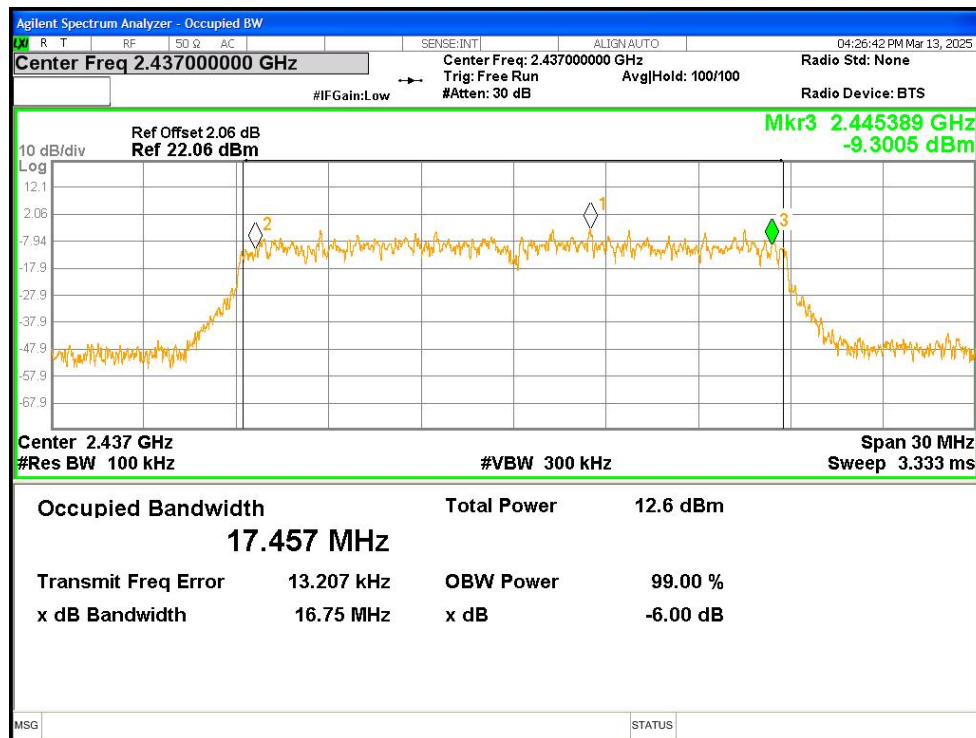


-6dB Bandwidth NVNT n20 2462MHz Ant1

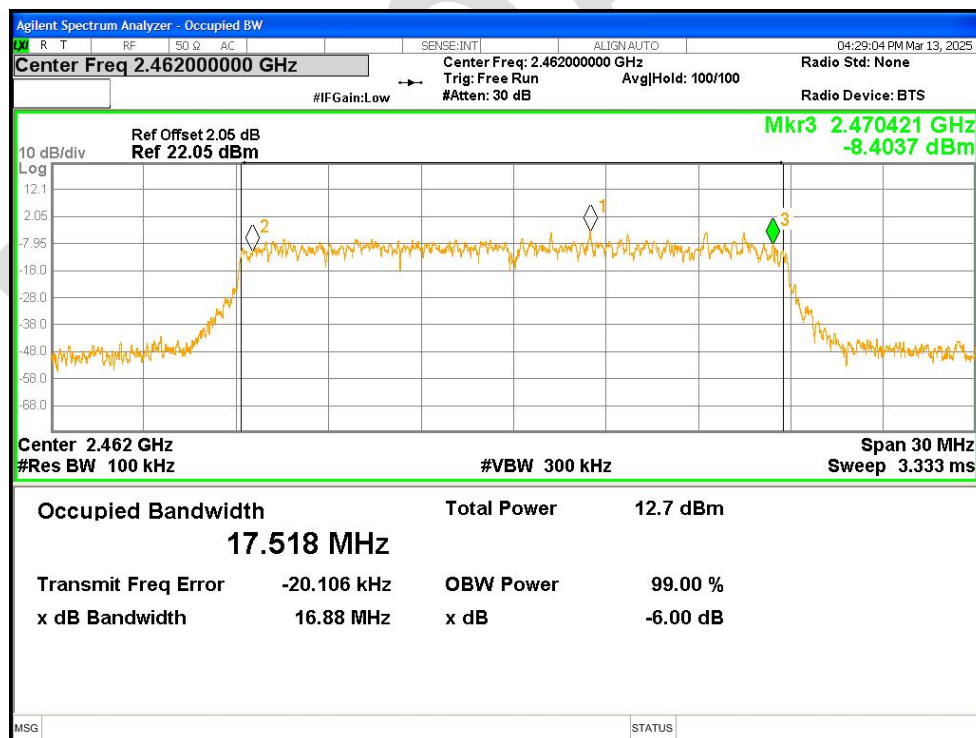


7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.164
NVNT	b	2437	Ant1	13.169
NVNT	b	2462	Ant1	13.165
NVNT	g	2412	Ant1	16.480
NVNT	g	2437	Ant1	16.406
NVNT	g	2462	Ant1	16.420
NVNT	n20	2412	Ant1	17.539
NVNT	n20	2437	Ant1	17.520
NVNT	n20	2462	Ant1	17.554


OBW NVNT b 2412MHz Ant1

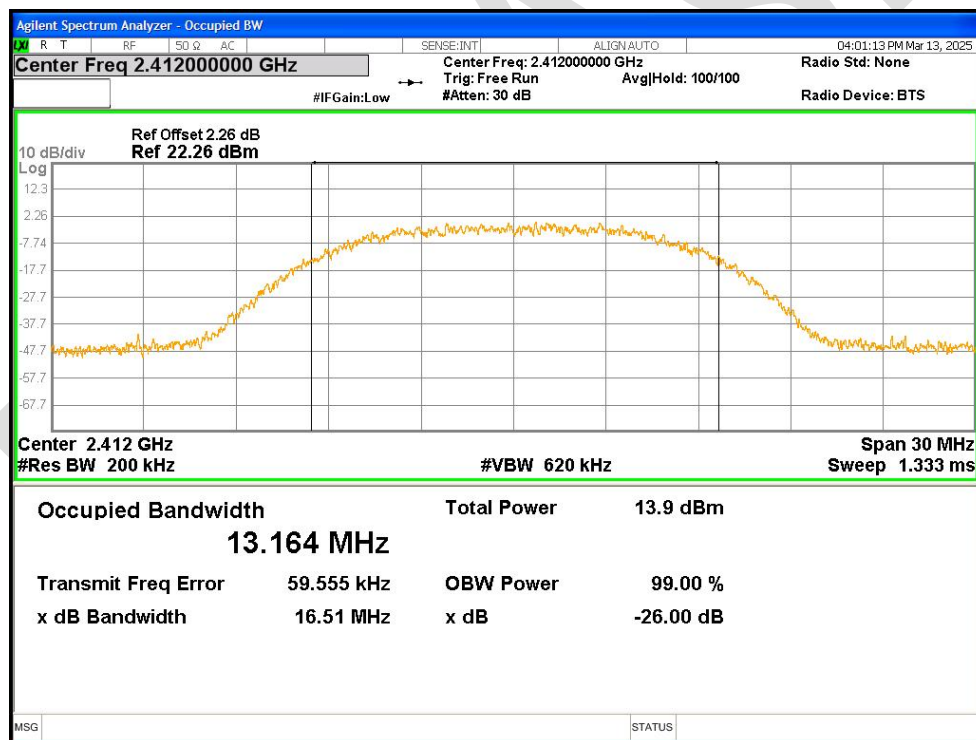


OBW NVNT b 2437MHz Ant1

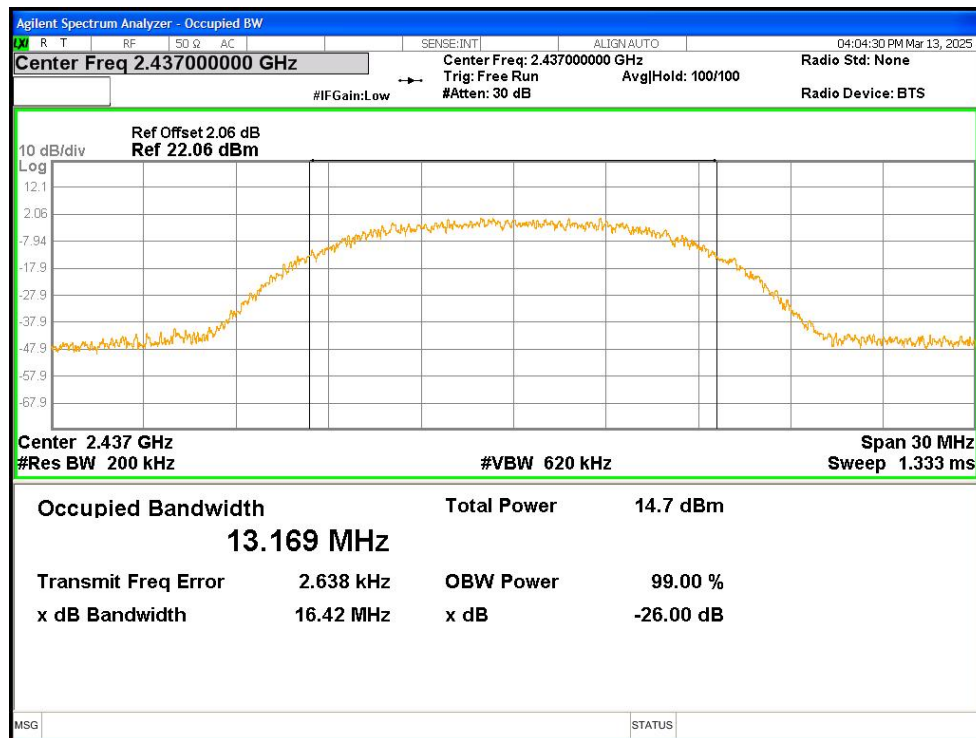


OBW NVNT b 2462MHz Ant1

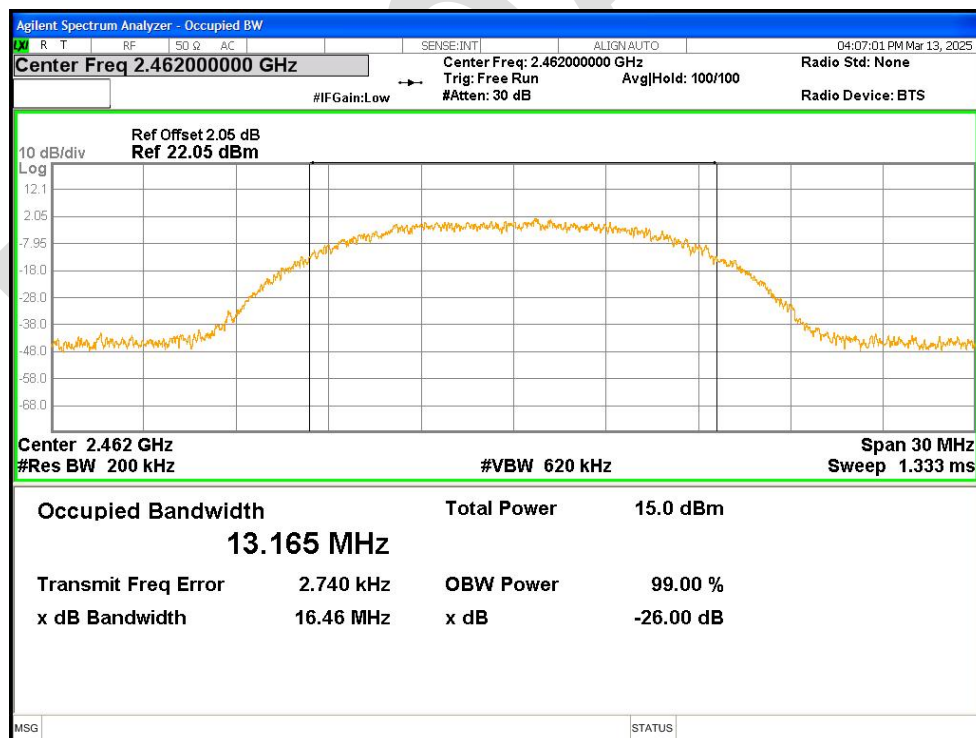


OBW NVNT g 2412MHz Ant1

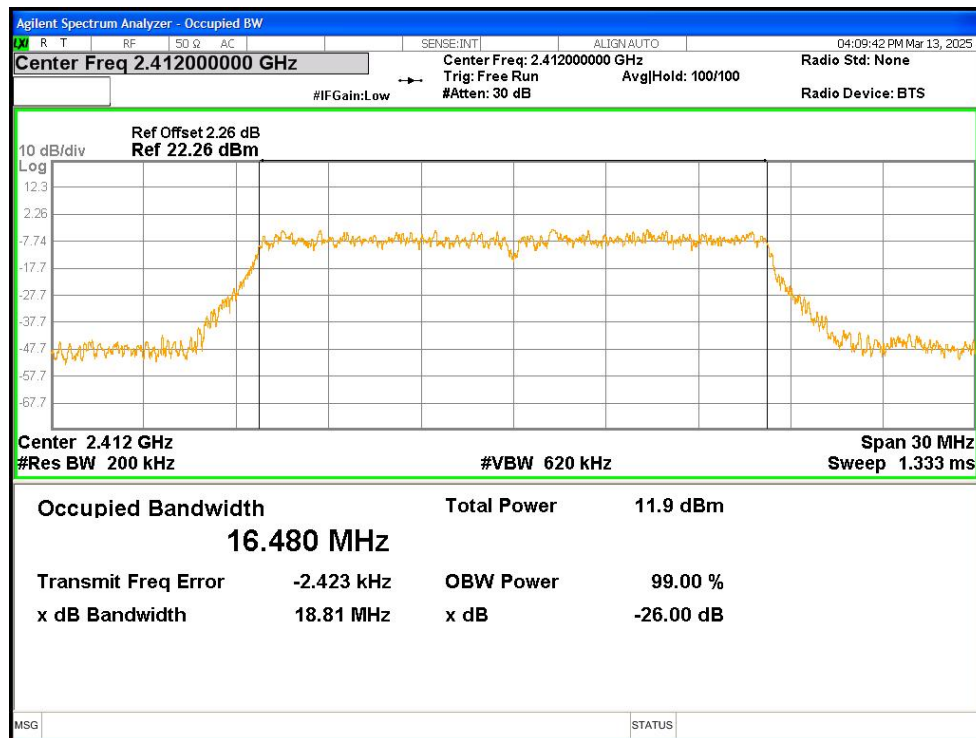


OBW NVNT g 2437MHz Ant1

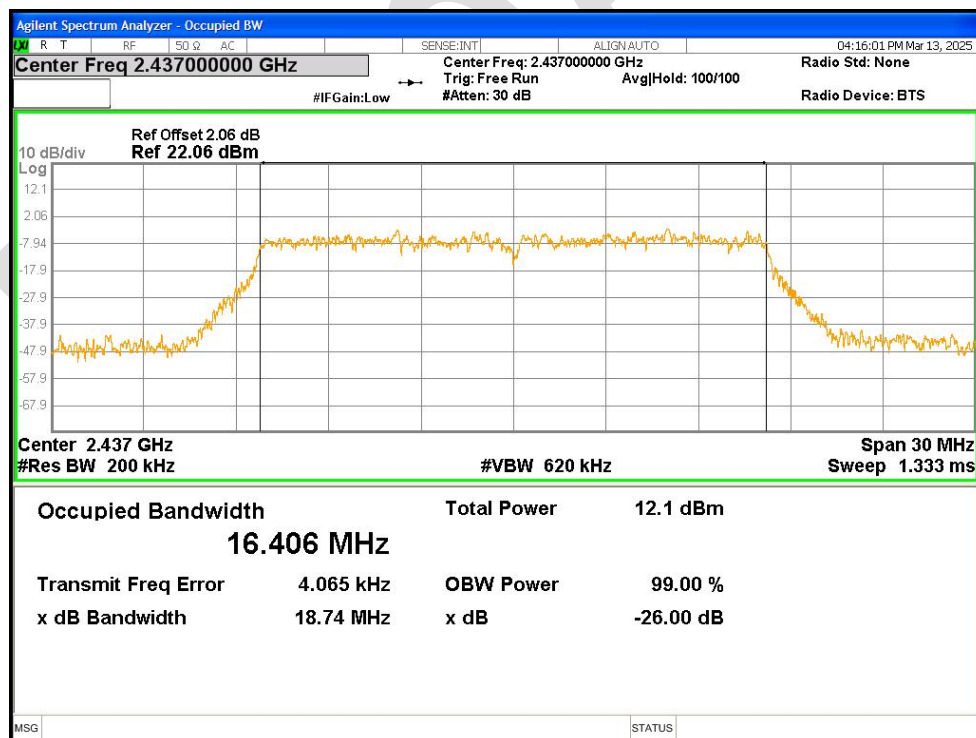


OBW NVNT g 2462MHz Ant1

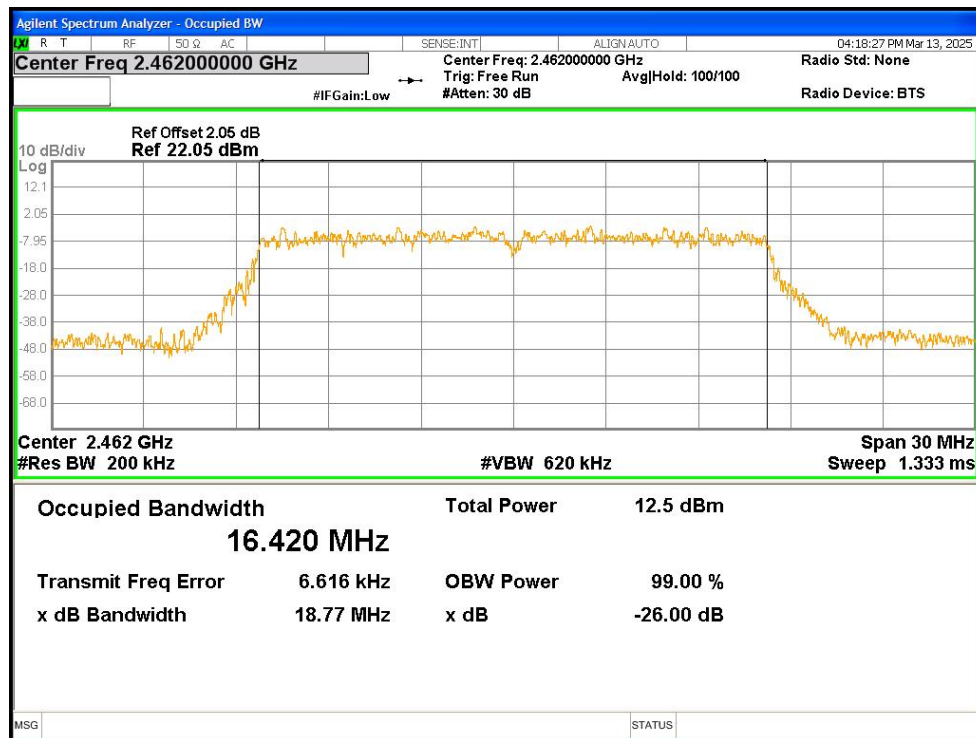


OBW NVNT n20 2412MHz Ant1

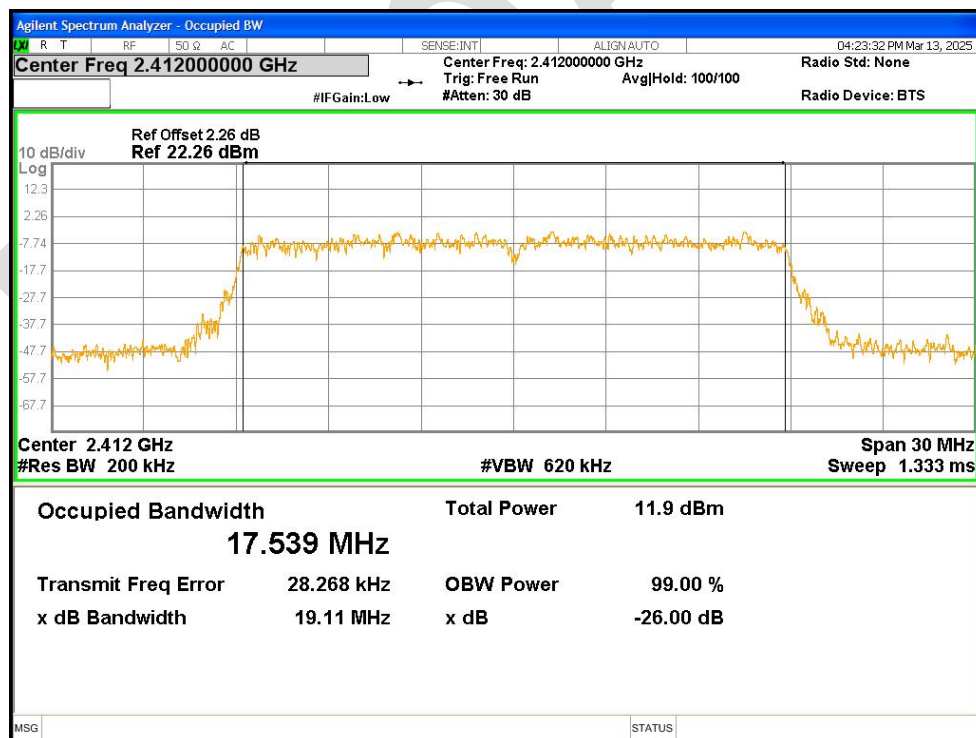

OBW NVNT n20 2437MHz Ant1

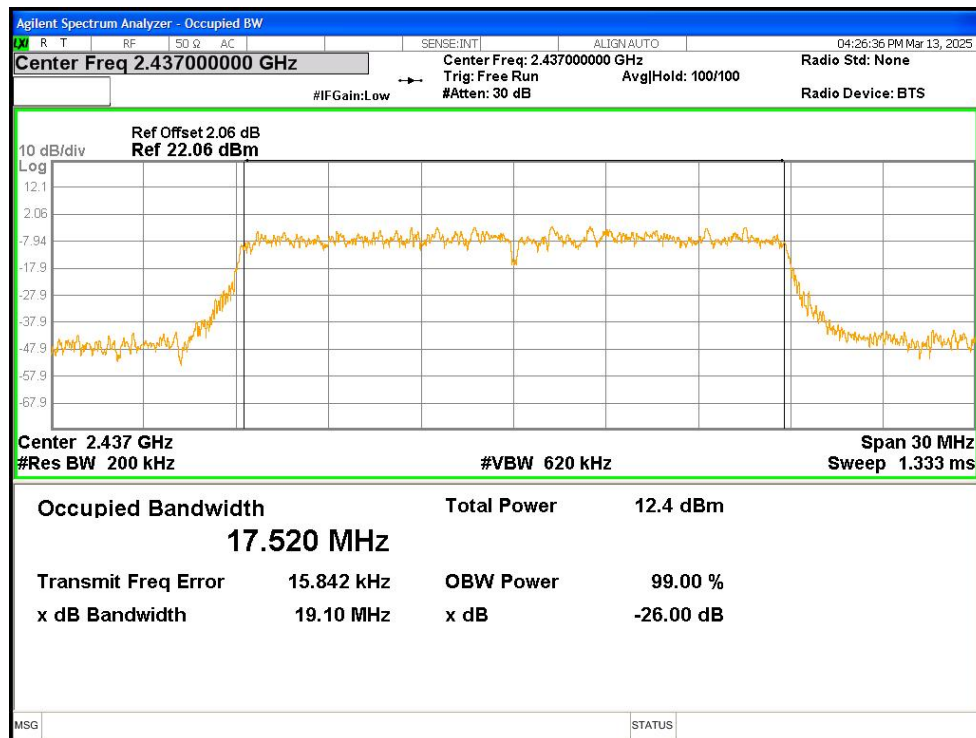


OBW NVNT n20 2462MHz Ant1

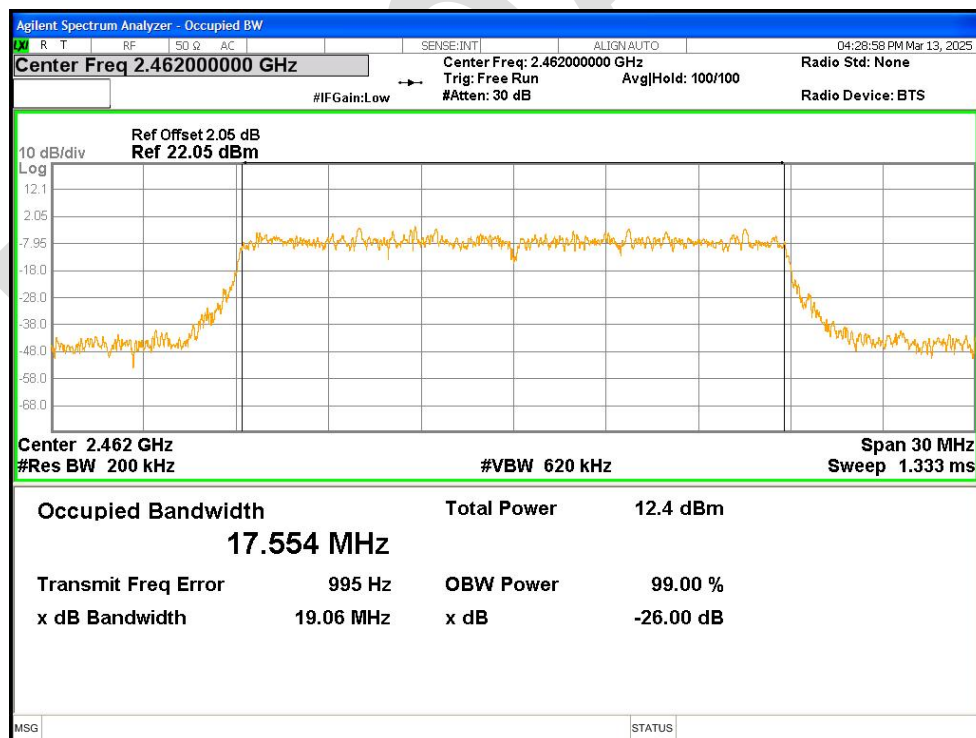

7.4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	-3.974	8	Pass
NVNT	b	2437	Ant1	-9.413	8	Pass
NVNT	b	2462	Ant1	-13.754	8	Pass
NVNT	g	2412	Ant1	-19.102	8	Pass
NVNT	g	2437	Ant1	-18.401	8	Pass
NVNT	g	2462	Ant1	-19.277	8	Pass
NVNT	n20	2412	Ant1	-20.406	8	Pass
NVNT	n20	2437	Ant1	-19.834	8	Pass
NVNT	n20	2462	Ant1	-19.501	8	Pass

PSD NVNT b 2412MHz Ant1

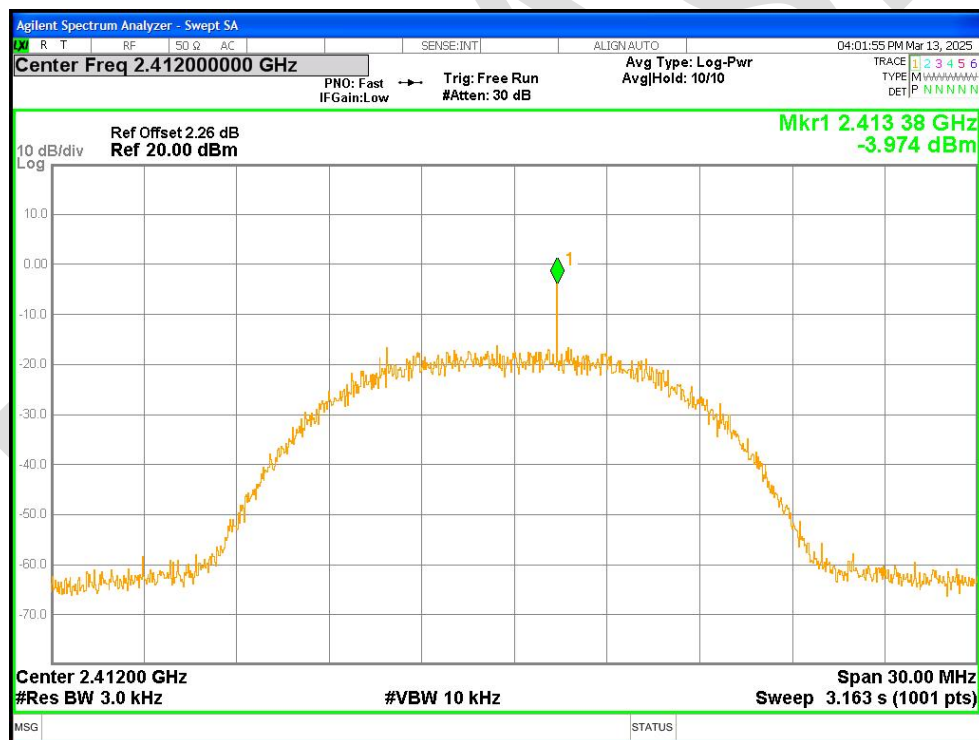

PSD NVNT b 2437MHz Ant1