

TEST REPORT

Reference No..... : WTX22X02110215W-1
FCC ID : 2A4QIX11PRO
Applicant : Foshanshi chuborui jiajuyouxianzerengongsi
Address..... : Lianfashangyedalu505shi, LecongdaaoxiB113hao, Foshanshi Shundequ
Lecongzen, Guangdong Sheng, China
Product Name : CHUBORY X11 PRO Drone
Test Model. : X11 PRO
Standards : FCC Part 15.247
Date of Receipt sample : February 11, 2022
Date of Test..... : February 11, 2022 to February 22, 2022
Date of Issue : February 22, 2022
Test Result..... : Pass

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.


Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tested by:



Tom Wang/ Project Engineer

Reviewed By:



Jason Su / RF Manager

Approved & Authorized By:



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENT	11
3.1 STANDARD APPLICABLE	11
3.2 EVALUATION INFORMATION	11
4. POWER SPECTRAL DENSITY	12
4.1 STANDARD APPLICABLE	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE	12
4.4 SUMMARY OF TEST RESULTS/PLOTS	12
5. DTS BANDWIDTH	13
5.1 STANDARD APPLICABLE	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
6. RF OUTPUT POWER	14
6.1 STANDARD APPLICABLE	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE	14
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
8. OUT OF BAND EMISSIONS	25
8.1 STANDARD APPLICABLE	25
8.2 TEST PROCEDURE	25
8.3 SUMMARY OF TEST RESULTS/PLOTS	26
9. CONDUCTED EMISSIONS	39
9.1 TEST PROCEDURE	39
9.2 BASIC TEST SETUP BLOCK DIAGRAM	39
9.3 TEST RECEIVER SETUP	39
9.4 SUMMARY OF TEST RESULTS/PLOTS	39
APPENDIX SUMMARY	40
APPENDIX A	41
APPENDIX B	46
APPENDIX C	51
APPENDIX D	56
APPENDIX PHOTOGRAPHS	68

Report version

Version No.	Date of issue	Description
Rev.00	February 22, 2022	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Foshanshi chuborui jiajuyouxianzerengongsi
Address of applicant: Lianfashangyed lou505shi, Lecong dadaoxi B113hao,
Foshanshi Shundequ Lecong zhen, Guangdong Sheng, China

Manufacturer: Foshanshi chuborui jiajuyouxianzerengongsi
Address of manufacturer: Lianfashangyed lou505shi, Lecong dadaoxi B113hao,
Foshanshi Shundequ Lecong zhen, Guangdong Sheng, China

General Description of EUT	
Product Name:	CHUBORY X11 PRO Drone
Trade Name:	CHUBORY
Model No.:	X11 PRO
Adding Model(s):	/
Rated Voltage:	Battery DC 11.1V/2850mAh
Power Adapter Model:	/
Serial number:	20213698547DD25
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	16.41dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	0.68dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the FCC rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2021-03-19	2023-03-18
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	N/A
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has an integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

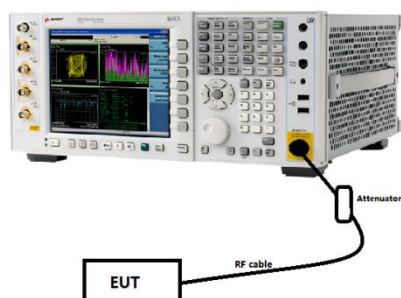

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

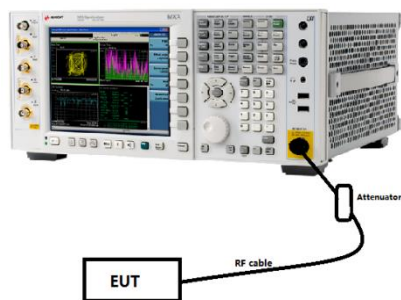

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

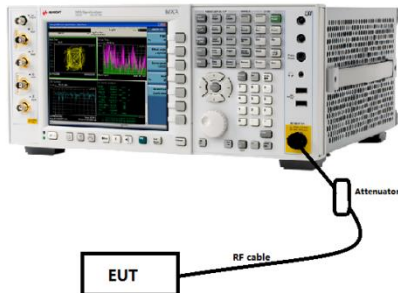

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.

- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

7.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

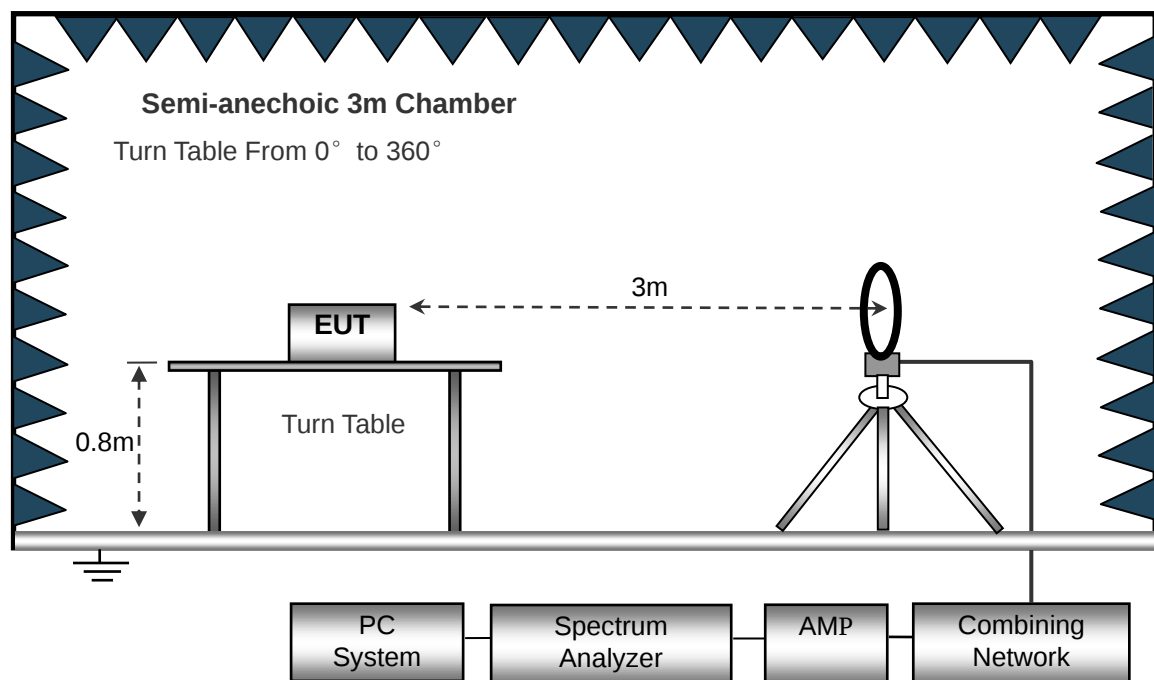

The test setup for emission measurement from 30MHz to 1GHz.

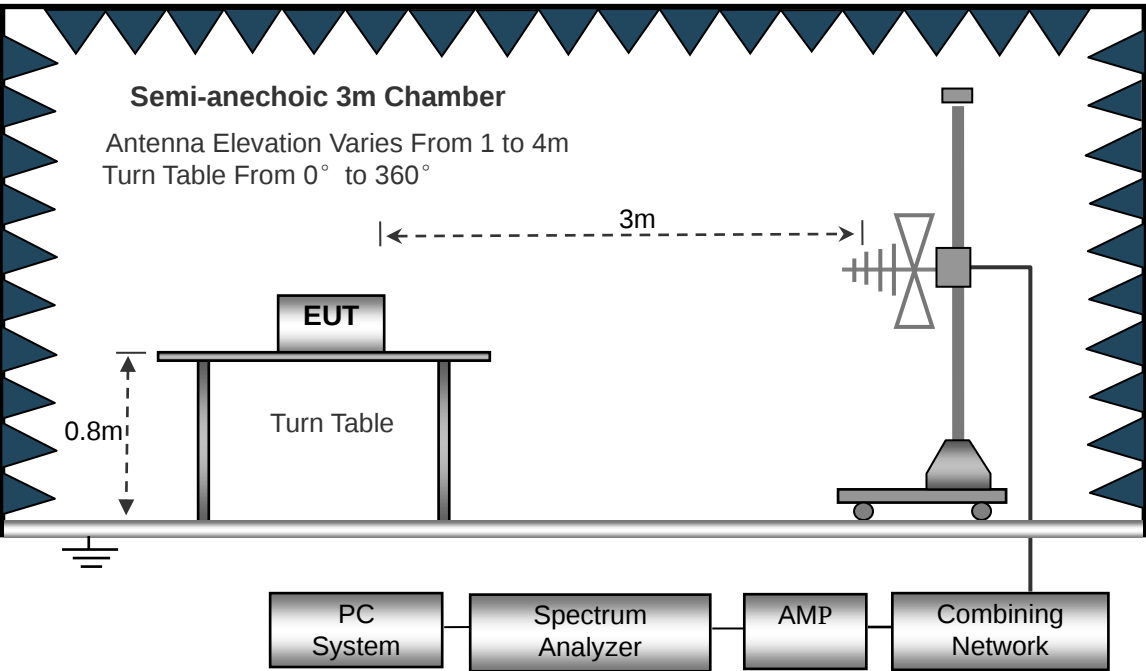

The test setup for emission measurement above 1GHz.

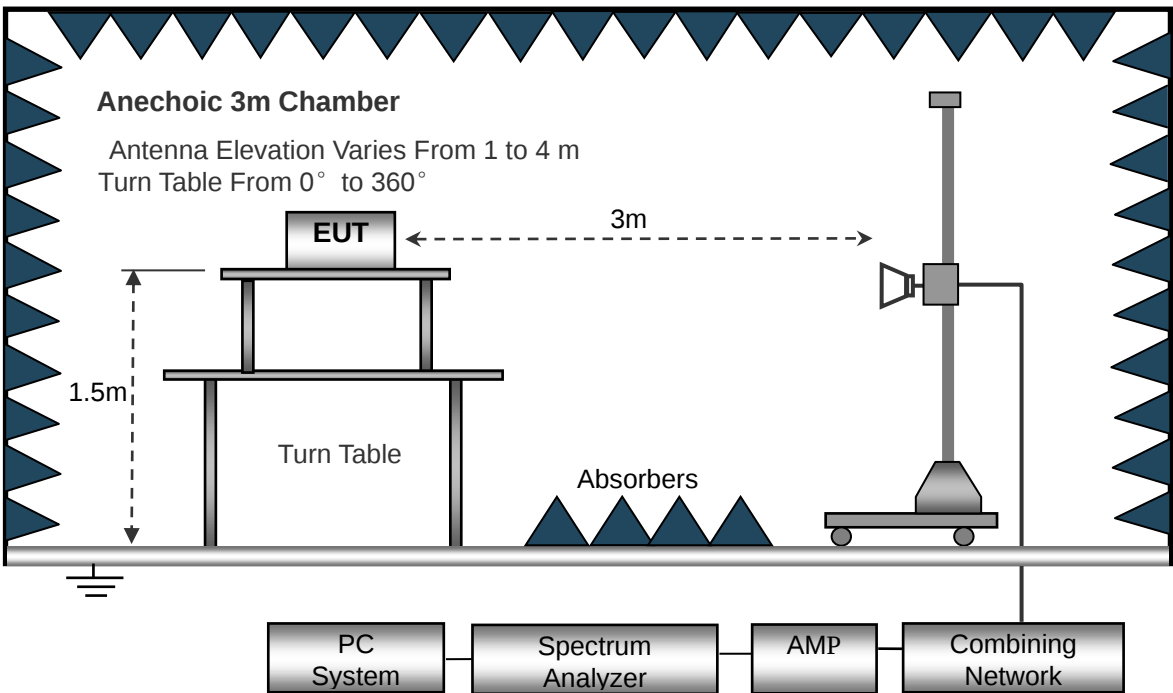

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\begin{aligned}\text{Result} &= \text{Indicated Reading} + \text{Correct} \\ \text{Correct} &= \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Result} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported. All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.


➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

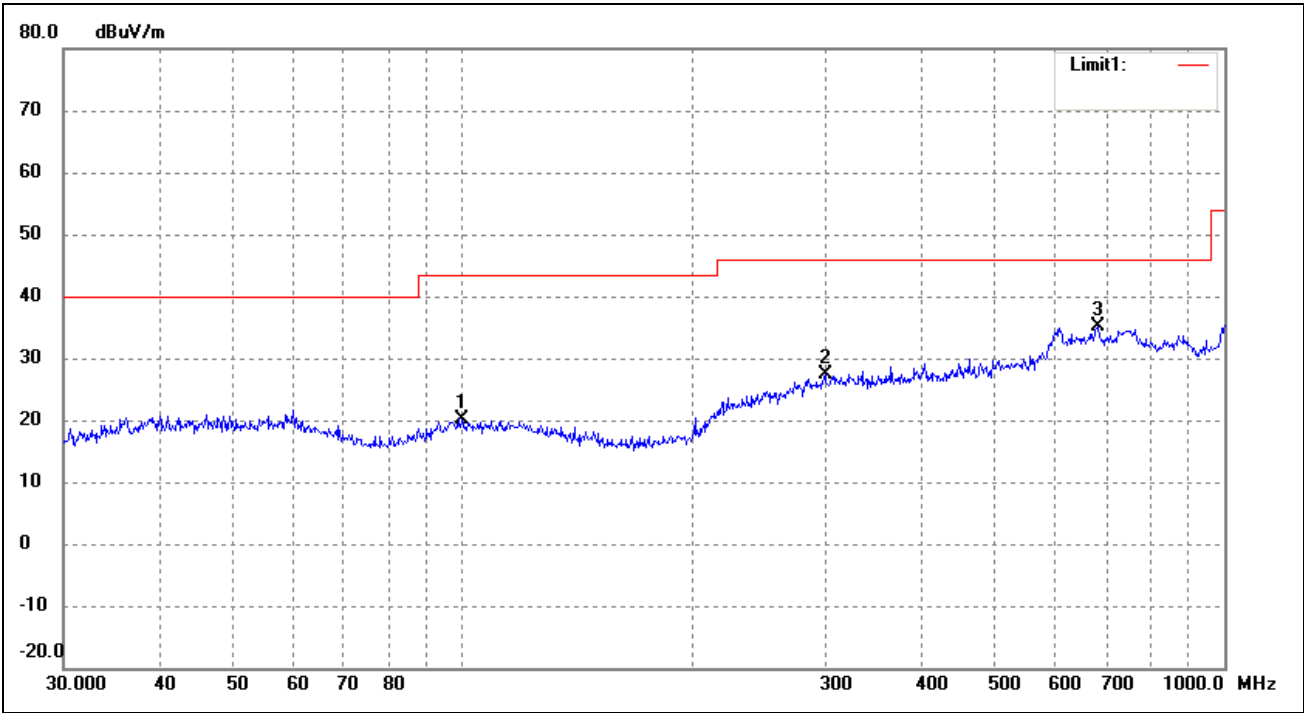


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	99.8777	15.14	5.11	20.25	43.50	-23.25	-	-	peak
2	299.3158	15.19	12.15	27.34	46.00	-18.66	-	-	peak
3	682.3485	15.96	19.08	35.04	46.00	-10.96	-	-	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

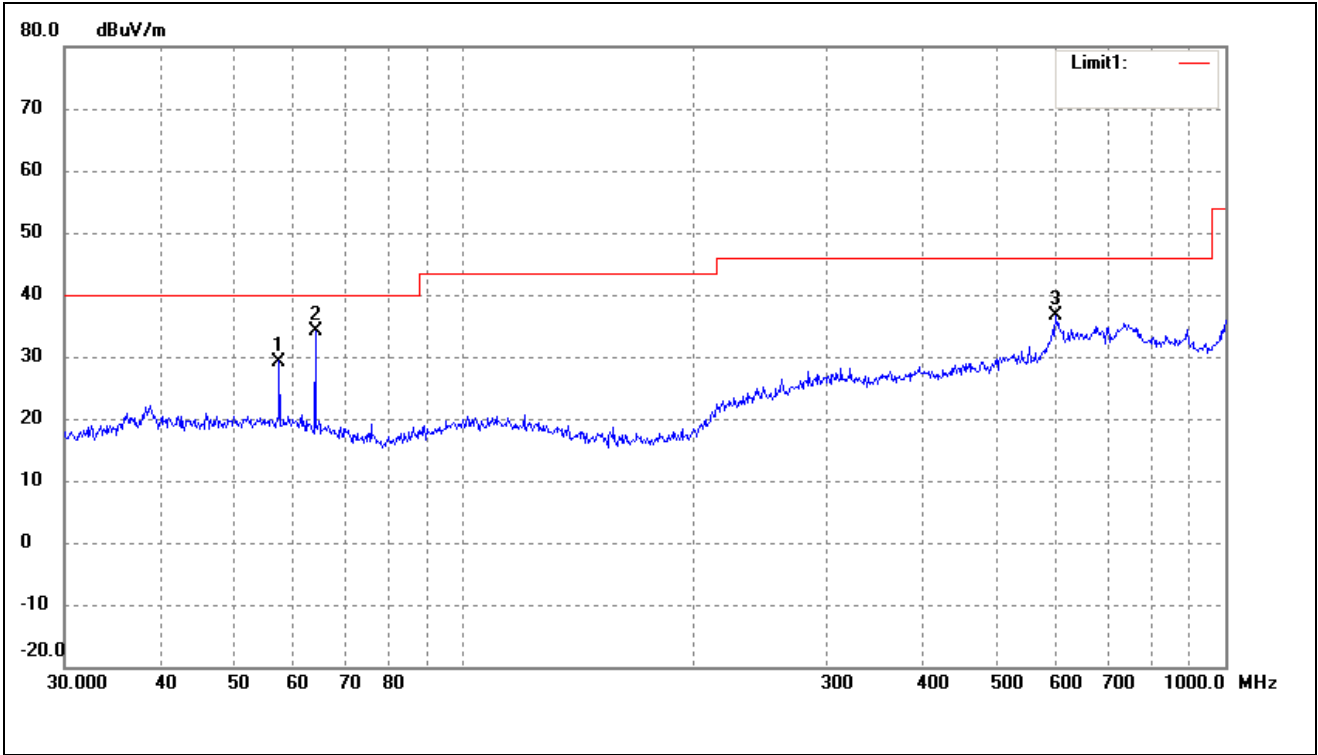


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	57.3923	23.91	5.34	29.25	40.00	-10.75	-	-	peak
2	63.9828	29.75	4.50	34.25	40.00	-5.75	-	-	peak
3	599.3213	17.38	19.19	36.57	46.00	-9.43	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

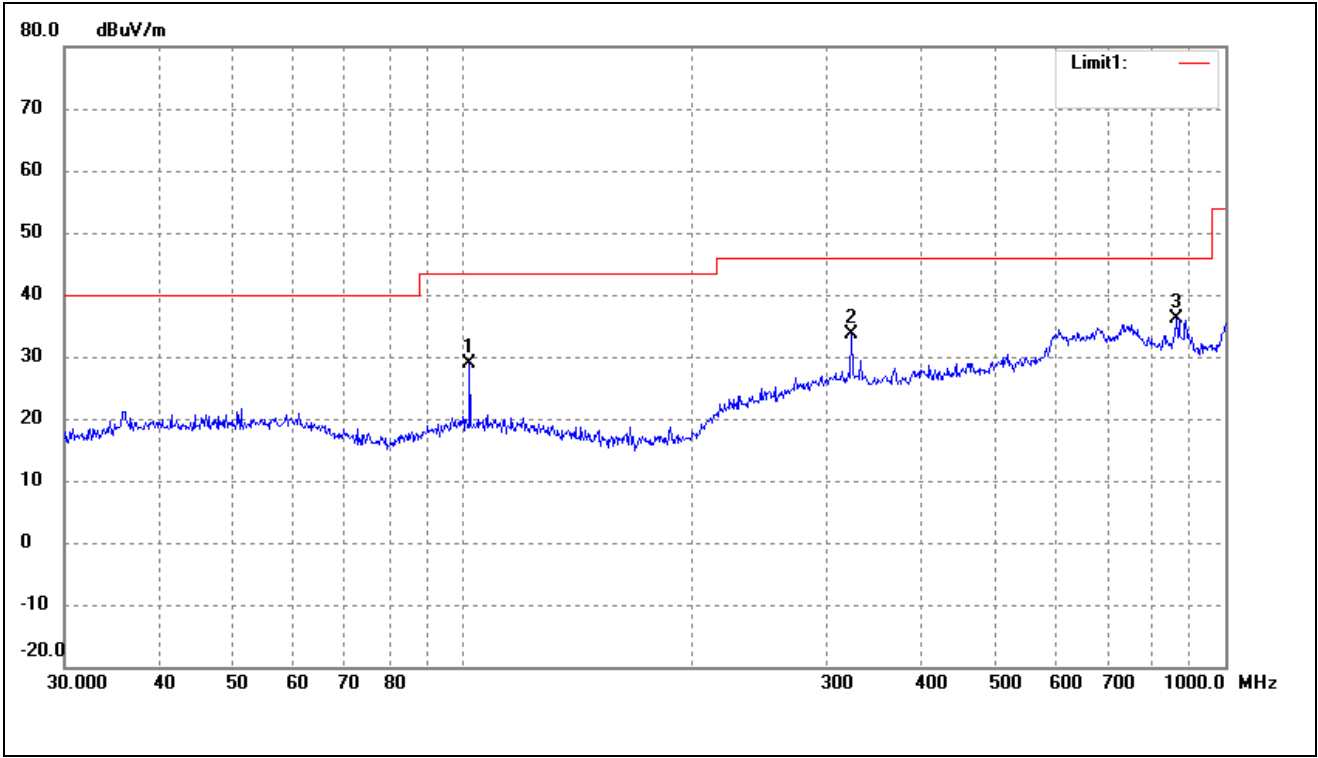


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	102.0014	23.77	5.11	28.88	43.50	-14.62	-	-	peak
2	323.3204	21.32	12.19	33.51	46.00	-12.49	-	-	peak
3	863.0562	18.82	17.38	36.20	46.00	-9.80	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

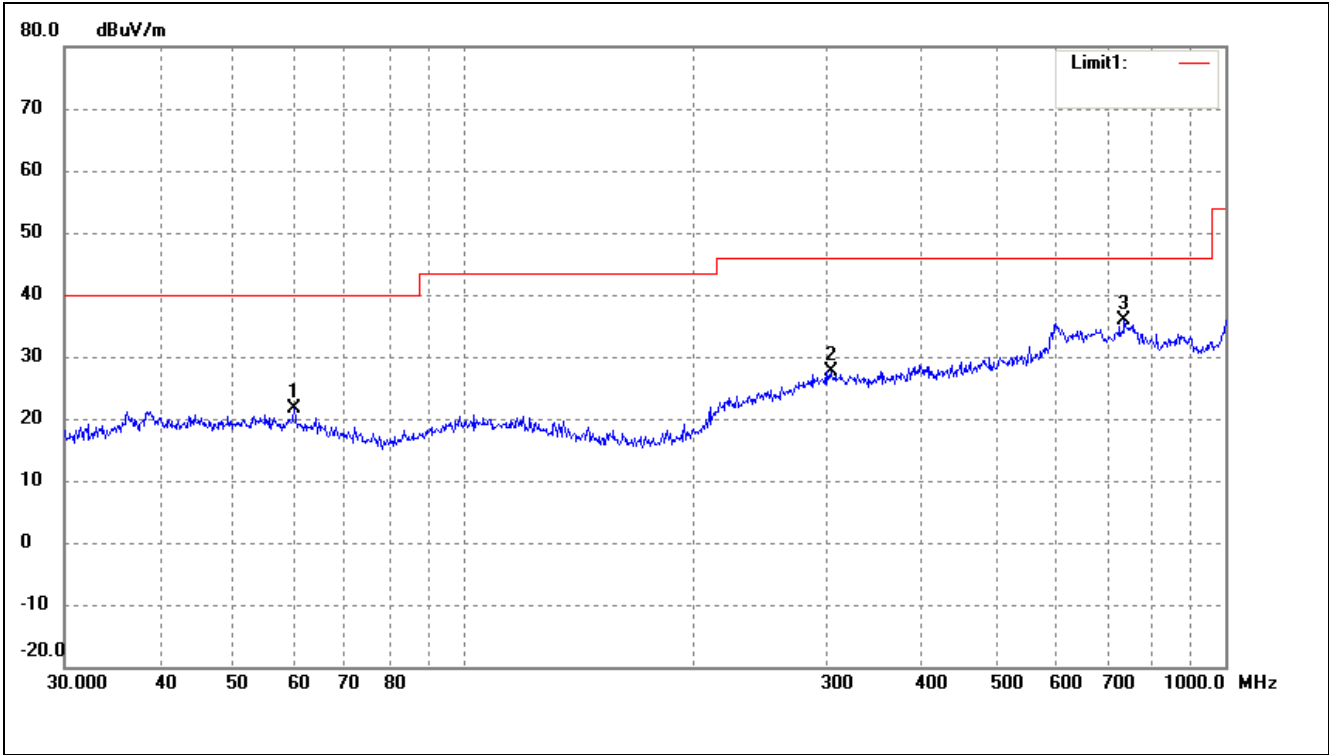


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	60.0691	16.32	5.36	21.68	40.00	-18.32	-	-	peak
2	303.5437	15.45	12.19	27.64	46.00	-18.36	-	-	peak
3	737.0714	16.47	19.37	35.84	46.00	-10.16	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

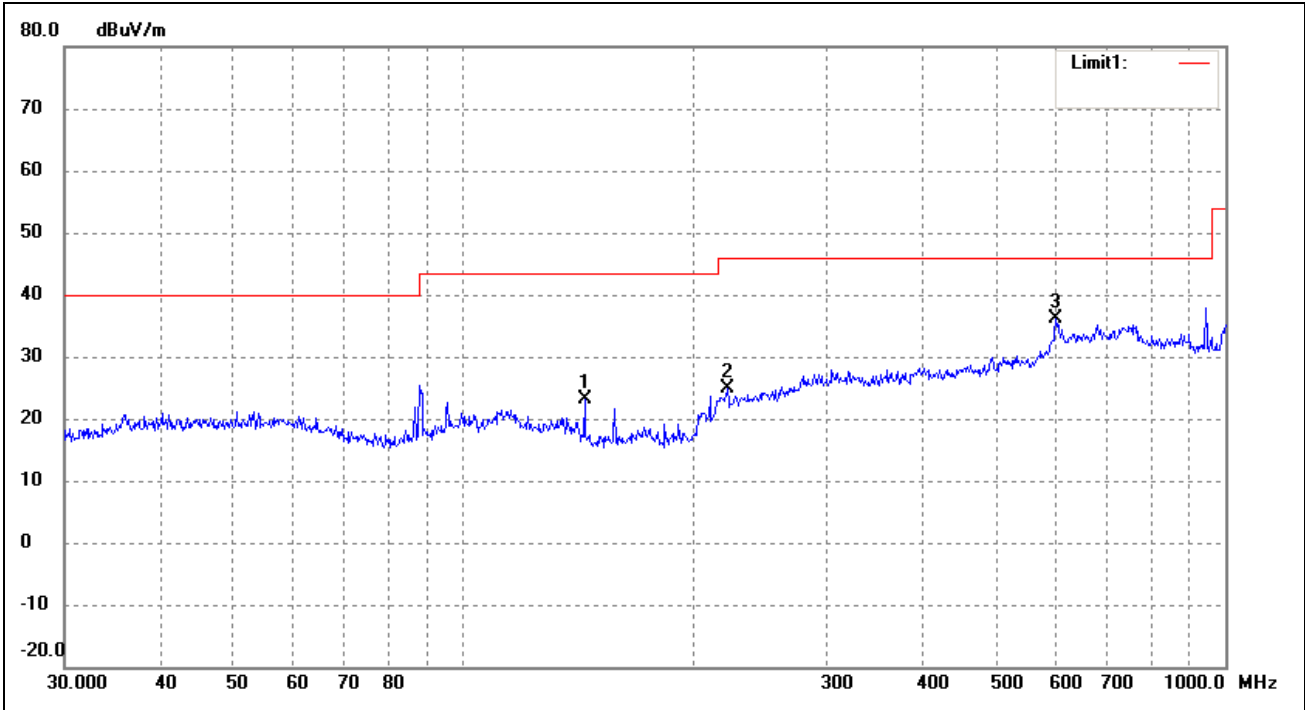

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	144.3348	19.88	3.23	23.11	43.50	-20.39	-	-	peak
2	222.1698	16.68	8.24	24.92	46.00	-21.08	-	-	peak
3	599.3213	16.89	19.19	36.08	46.00	-9.92	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

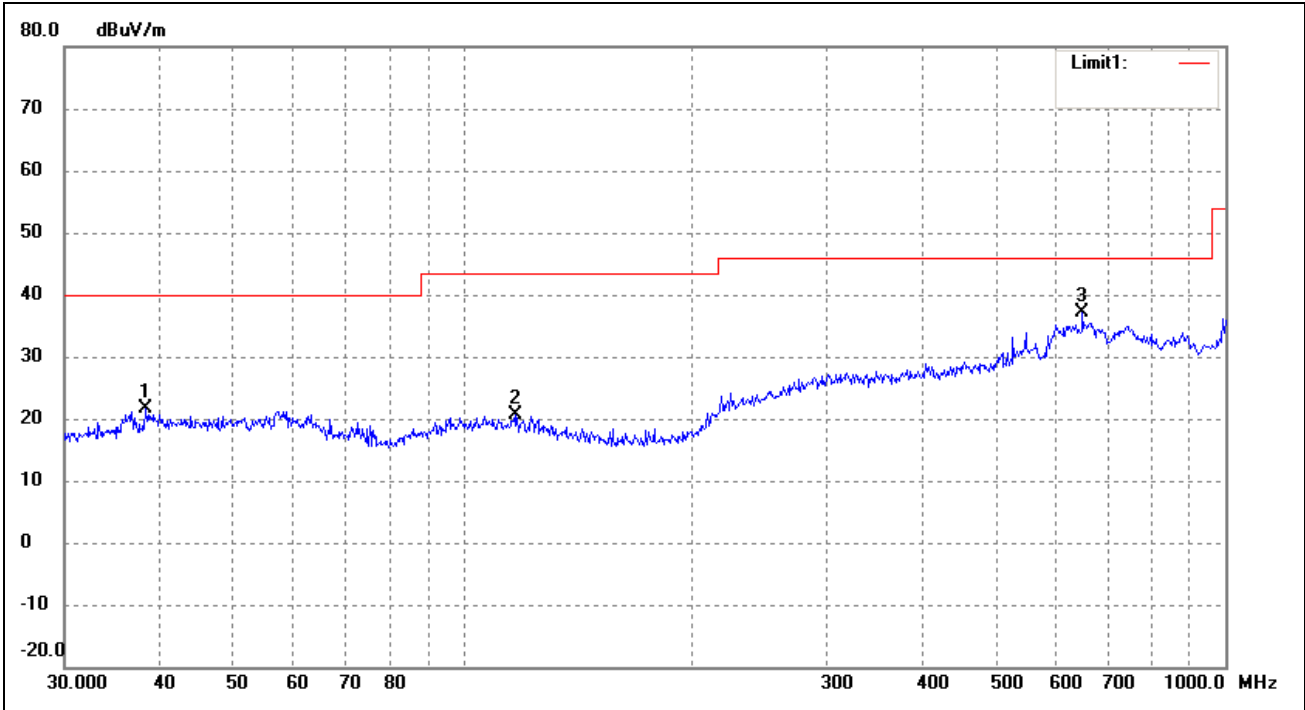

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	38.3462	16.66	4.97	21.63	40.00	-18.37	-	-	peak
2	116.9495	15.57	5.03	20.60	43.50	-22.90	-	-	peak
3	649.6597	18.64	18.39	37.03	46.00	-8.97	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	54.09	-3.87	50.22	74.00	-23.78	H	PK
4824.000	38.84	-3.87	34.97	54.00	-19.03	H	AV
7236.000	46.30	1.14	47.44	74.00	-26.56	H	PK
7236.000	34.98	1.19	36.17	54.00	-17.83	H	AV
4824.000	57.31	-3.86	53.45	74.00	-20.55	V	PK
4824.000	40.50	-3.86	36.64	54.00	-17.36	V	AV
7236.000	49.11	1.10	50.21	74.00	-23.79	V	PK
7236.000	37.44	1.10	38.54	54.00	-15.46	V	AV
Middle Channel-2437MHz							
4874.000	54.74	-3.74	51.00	74.00	-23.00	H	PK
4874.000	39.99	-3.74	36.25	54.00	-17.75	H	AV
7311.000	47.77	1.47	49.24	74.00	-24.76	H	PK
7311.000	33.10	1.47	34.57	54.00	-19.43	H	AV
4874.000	53.97	-3.74	50.23	74.00	-23.77	V	PK
4874.000	40.89	-3.74	37.15	54.00	-16.85	V	AV
7311.000	47.98	1.47	49.45	74.00	-24.55	V	PK
7311.000	34.08	1.47	35.55	54.00	-18.45	V	AV
High Channel-2462MHz							
4924.000	55.82	-3.59	52.23	74.00	-21.77	H	PK
4924.000	41.76	-3.59	38.17	54.00	-15.83	H	AV
7386.000	46.38	1.79	48.17	74.00	-25.83	H	PK
7386.000	34.83	1.79	36.62	54.00	-17.38	H	AV
4924.000	54.94	-3.59	51.35	74.00	-22.65	V	PK
4924.000	42.04	-3.59	38.45	54.00	-15.55	V	AV
7386.000	47.99	1.79	49.78	74.00	-24.22	V	PK
7386.000	35.18	1.79	36.97	54.00	-17.03	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- Conducted test

Please refer to Appendix D

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots

Note: All test modes (different data rate and different modulation) are performed, but only the worst case (Vertical) is recorded in this report.


➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

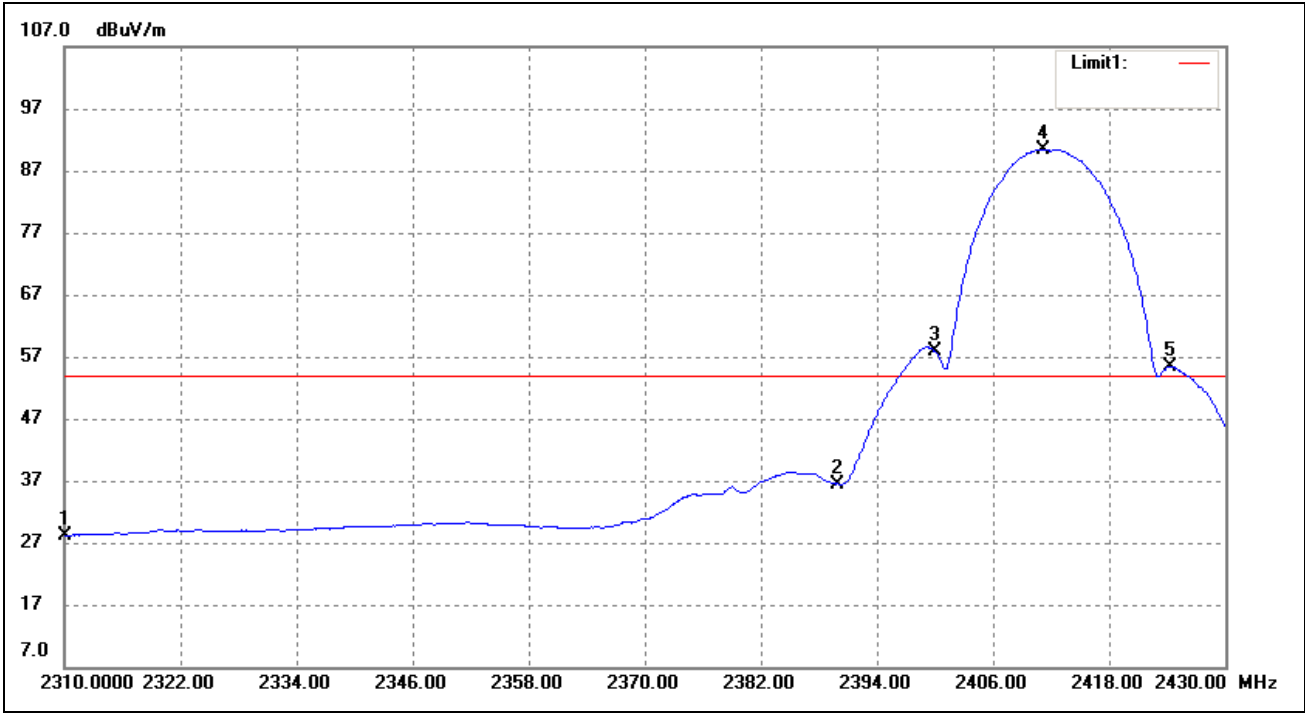


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	31.53	-3.35	28.18	54.00	-25.82	Average Detector
	2310.000	45.17	-3.35	41.82	74.00	-32.18	Peak Detector
2	2390.000	40.78	-4.29	36.49	54.00	-17.51	Average Detector
	2390.000	56.38	-4.29	52.09	74.00	-21.91	Peak Detector
3	2400.000	62.25	-4.40	57.85	/		Average Detector
4	2411.160	94.88	-4.44	90.44			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

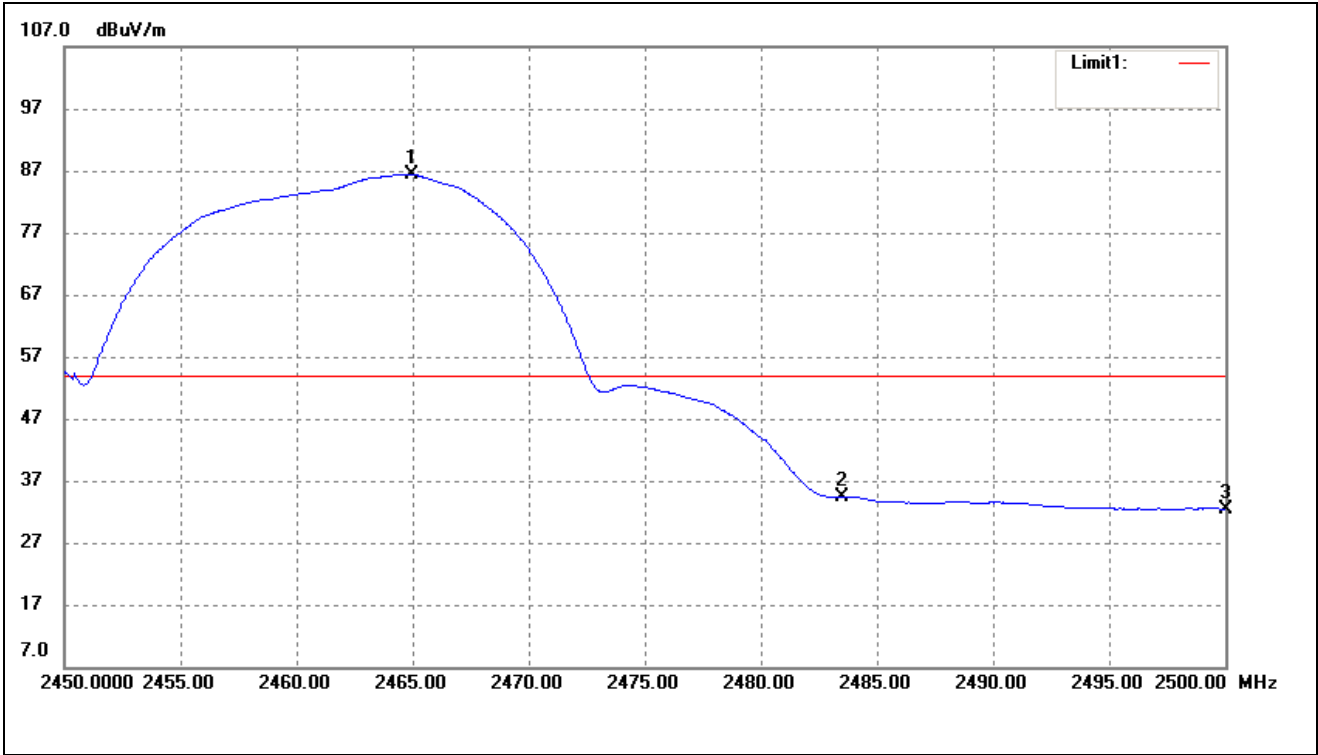


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.950	89.68	-3.29	86.39	/	/	Average Detector
	2463.650	97.45	-3.29	94.16	/	/	Peak Detector
2	2483.500	89.68	-3.29	34.43	54.00	-19.57	Average Detector
	2483.500	97.45	-3.29	46.87	74.00	-27.13	Peak Detector
3	2500.000	35.64	-3.20	32.44	54.00	-21.56	Average Detector
	2500.000	47.53	-3.20	44.33	74.00	-29.67	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

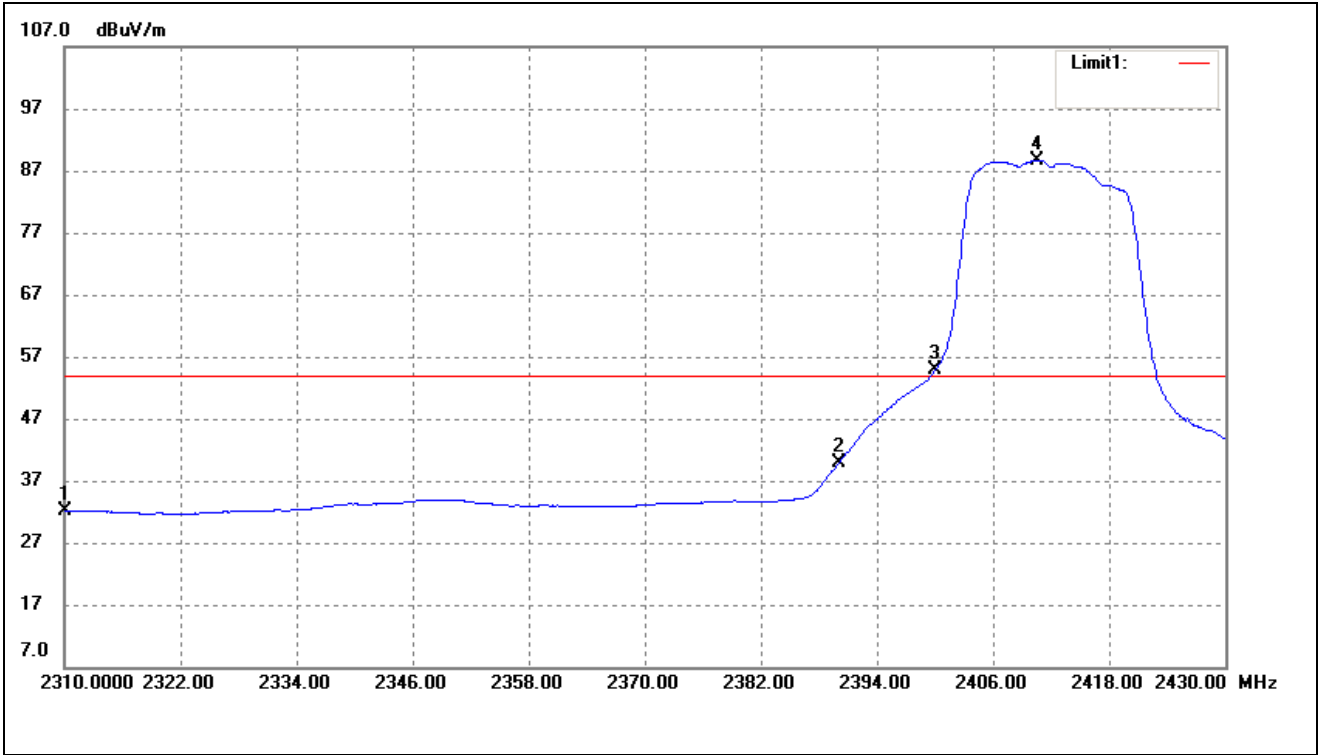


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.79	-3.69	32.10	54.00	-21.90	Average Detector
	2310.000	47.17	-3.69	43.48	74.00	-30.52	Peak Detector
2	2390.000	43.37	-3.49	39.88	54.00	-14.12	Average Detector
	2390.000	62.75	-3.49	59.26	74.00	-14.74	Peak Detector
3	2400.000	58.29	-3.46	54.83	/		Average Detector
4	2410.560	92.04	-3.43	88.61			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

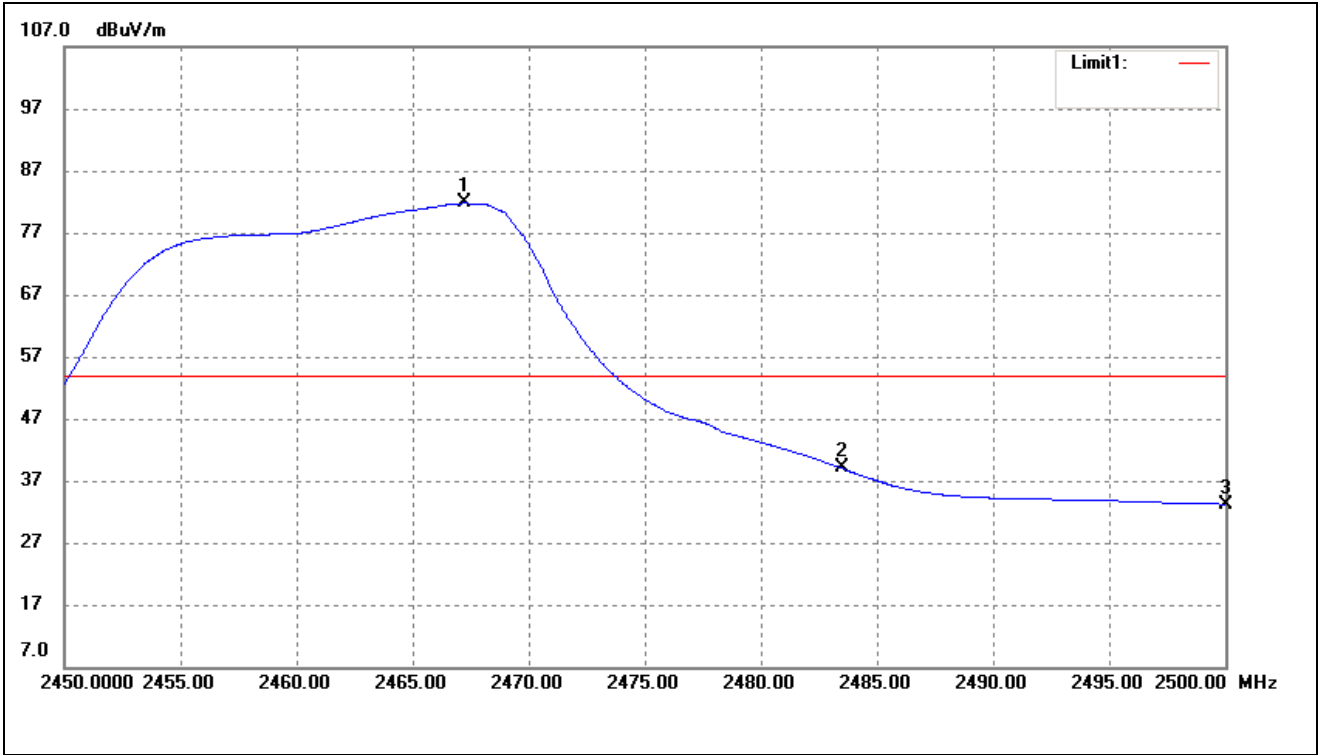


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2467.250	85.08	-3.28	81.80	/	/	Average Detector
	2469.100	97.30	-3.28	94.02	/	/	Peak Detector
1	2483.500	36.43	-3.20	39.03	54.00	-14.97	Average Detector
	2483.500	49.68	-3.20	53.65	74.00	-20.35	Peak Detector
3	2500.000	36.43	-3.20	33.23	54.00	-20.77	Average Detector
	2500.000	49.68	-3.20	46.48	74.00	-27.52	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

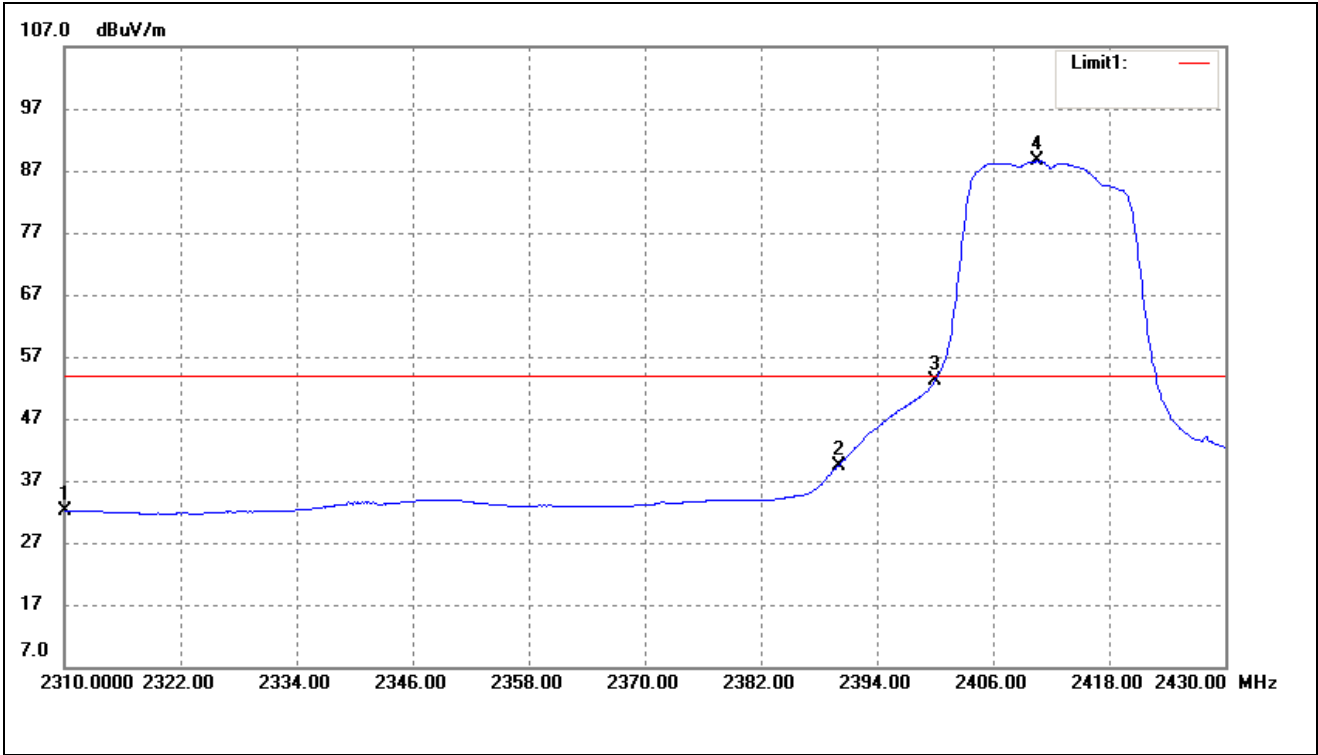


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.73	-3.69	32.04	54.00	-21.96	Average Detector
	2310.000	47.10	-3.69	43.41	74.00	-30.59	Peak Detector
2	2390.000	42.98	-3.49	39.49	54.00	-14.51	Average Detector
	2390.000	62.93	-3.49	59.44	74.00	-14.56	Peak Detector
3	2400.000	56.69	-3.46	53.23	/		Average Detector
4	2410.560	91.94	-3.43	88.51			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

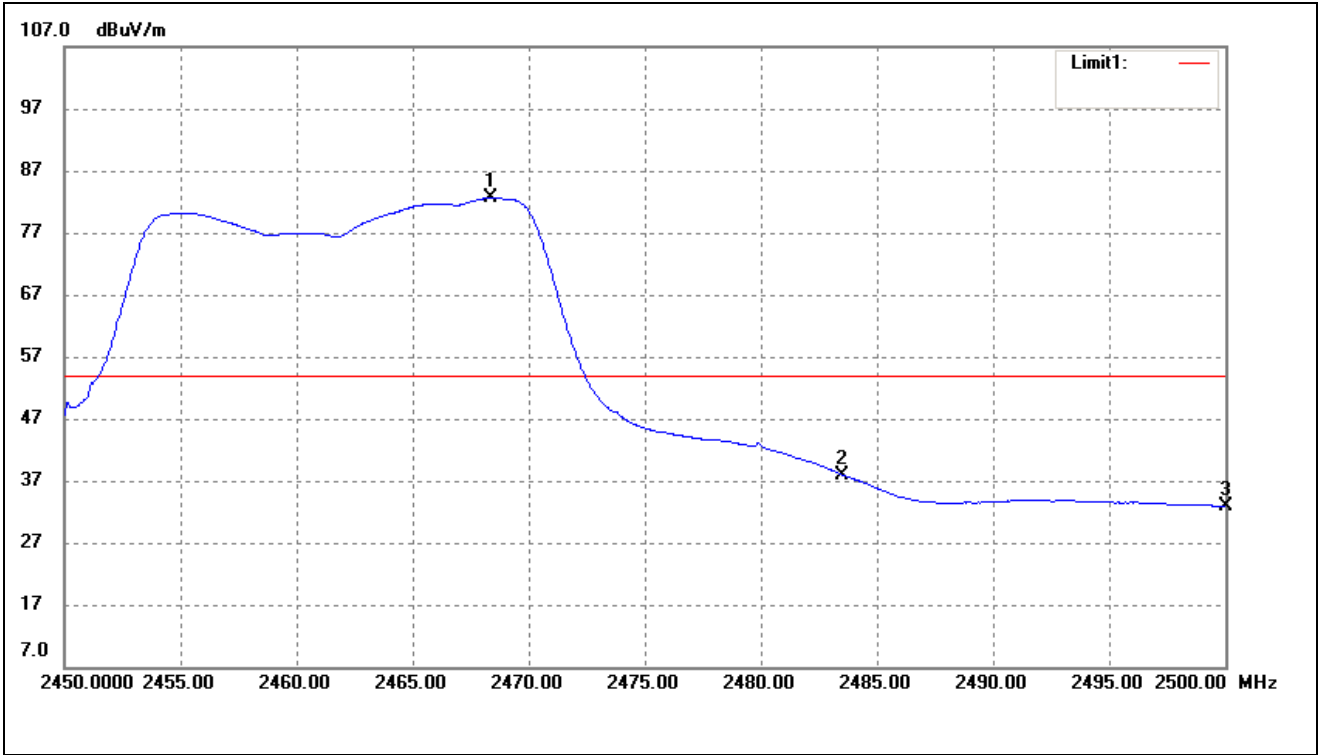


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2468.350	85.88	-3.28	82.60	/	/	Average Detector
	2469.150	97.31	-3.28	94.03	/	/	Peak Detector
2	2483.500	85.88	-3.28	37.98	54.00	-16.02	Average Detector
	2483.500	97.31	-3.28	54.25	74.00	-19.75	Peak Detector
3	2500.000	36.13	-3.20	32.93	54.00	-21.07	Average Detector
	2500.000	51.05	-3.20	47.85	74.00	-26.15	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

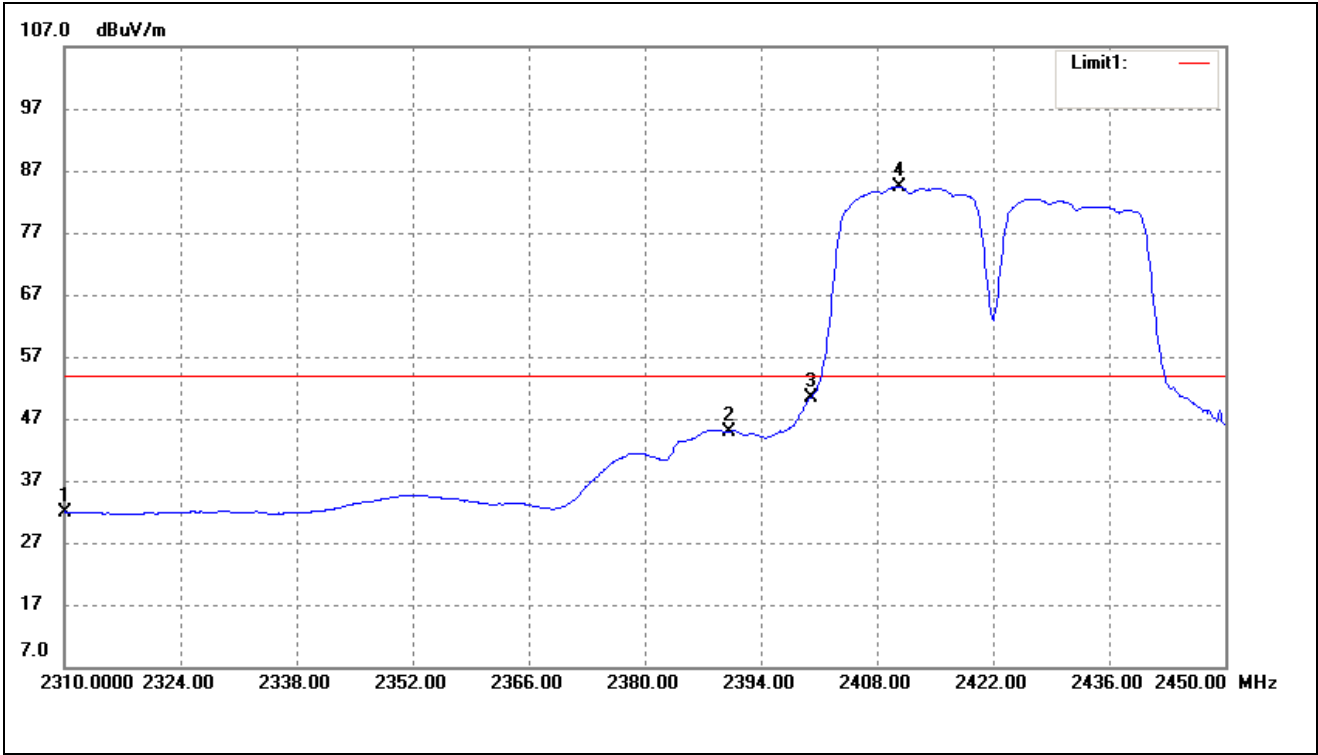


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.68	-3.69	31.99	54.00	-22.01	Average Detector
	2310.000	49.43	-3.69	45.74	74.00	-28.26	Peak Detector
2	2390.000	48.40	-3.49	44.91	54.00	-9.09	Average Detector
	2390.000	69.39	-3.49	65.90	74.00	-8.10	Peak Detector
3	2400.000	53.90	-3.46	50.44	/		Average Detector
4	2410.660	87.81	-3.43	84.38			Average Detector


802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

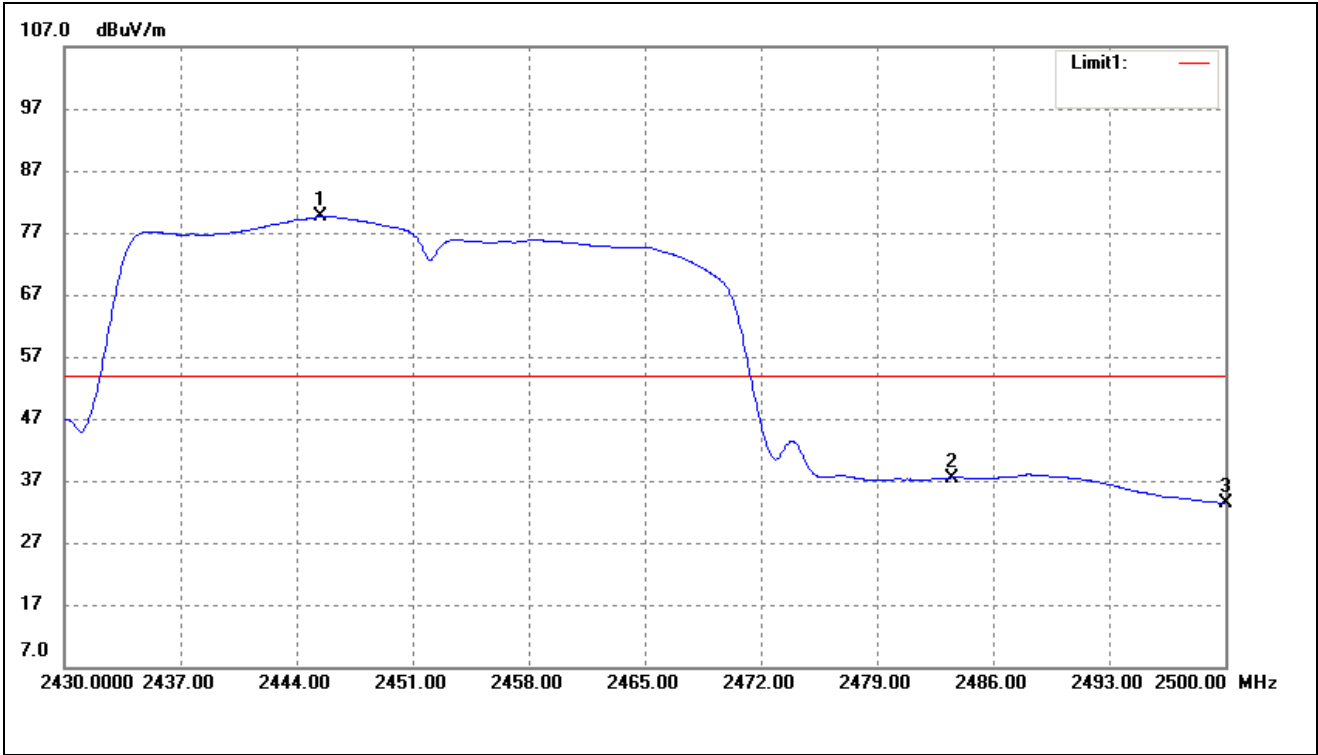



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2445.470	82.93	-3.35	79.58	/	/	Average Detector
	2444.560	94.22	-3.35	90.87	/	/	Peak Detector
2	2483.500	36.61	-3.20	37.50	54.00	-16.50	Average Detector
	2483.500	49.33	-3.20	53.03	74.00	-20.97	Peak Detector
3	2500.000	36.61	-3.20	33.41	54.00	-20.59	Average Detector
	2500.000	49.33	-3.20	46.13	74.00	-27.87	Peak Detector

➤ Conducted test

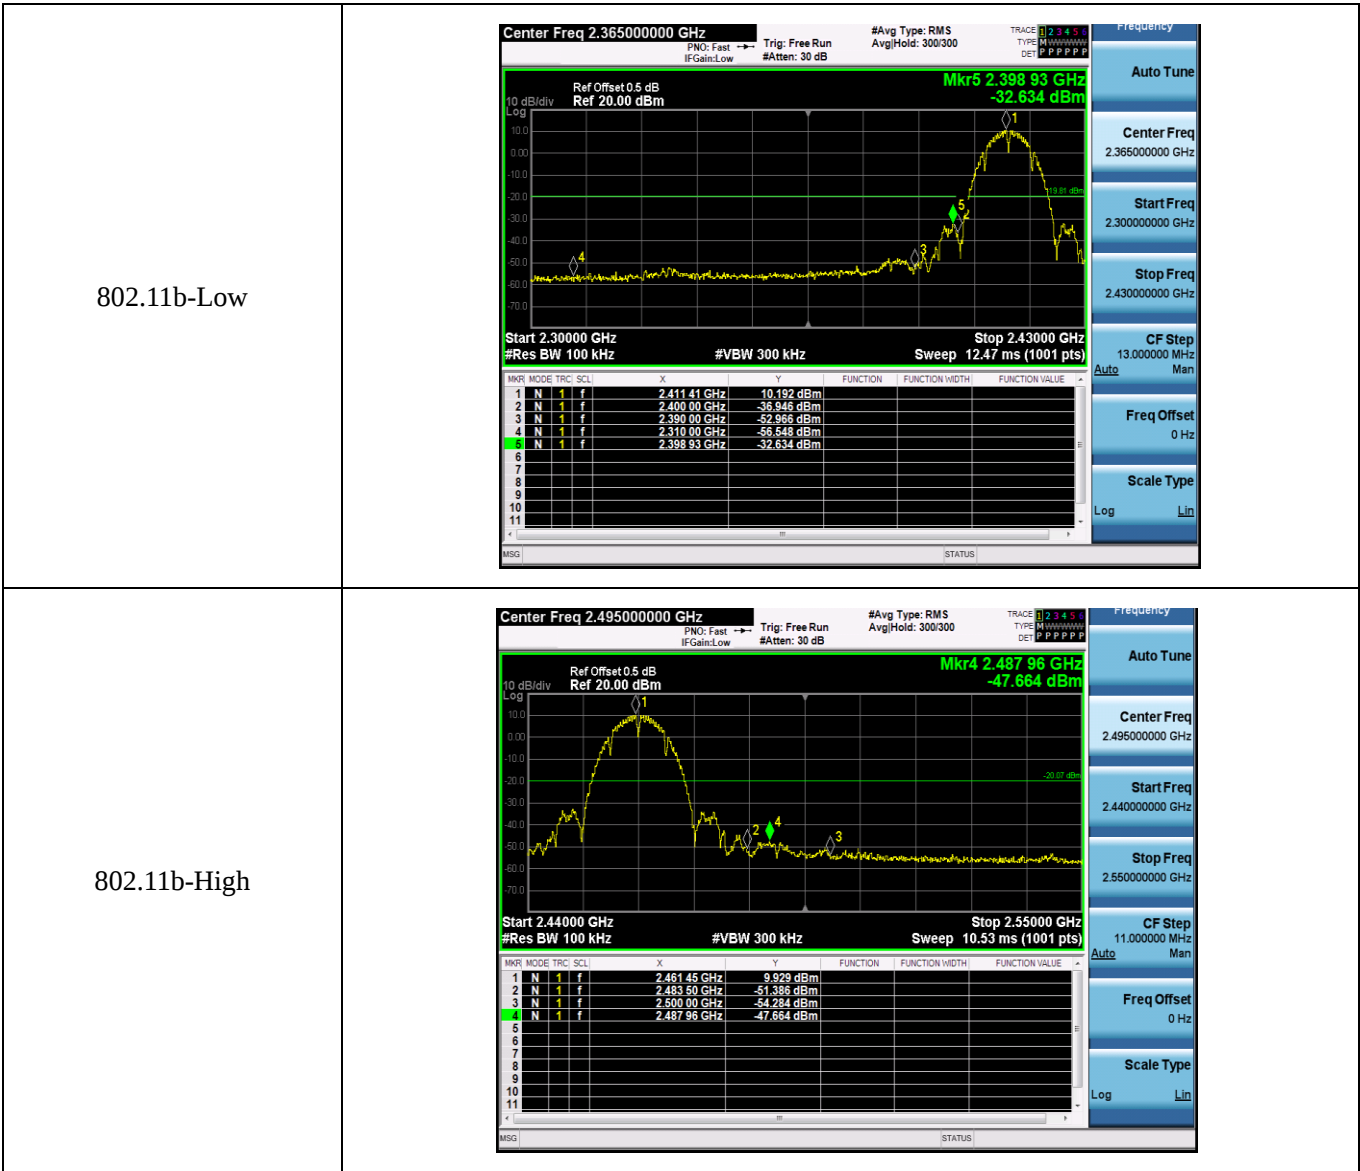

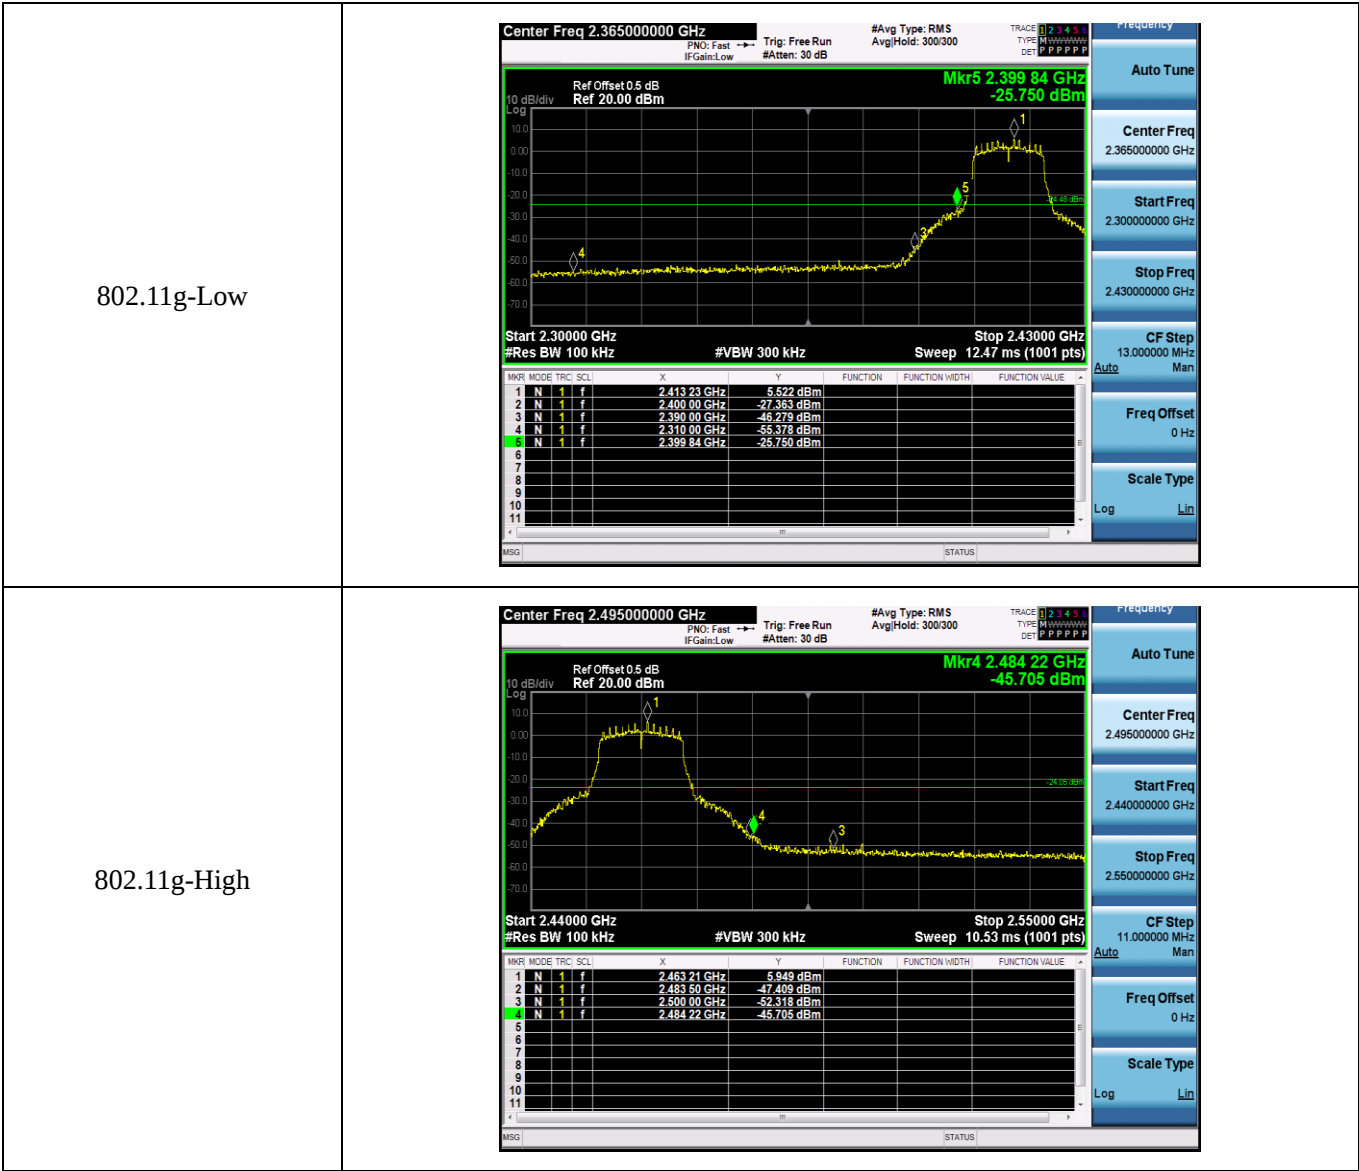

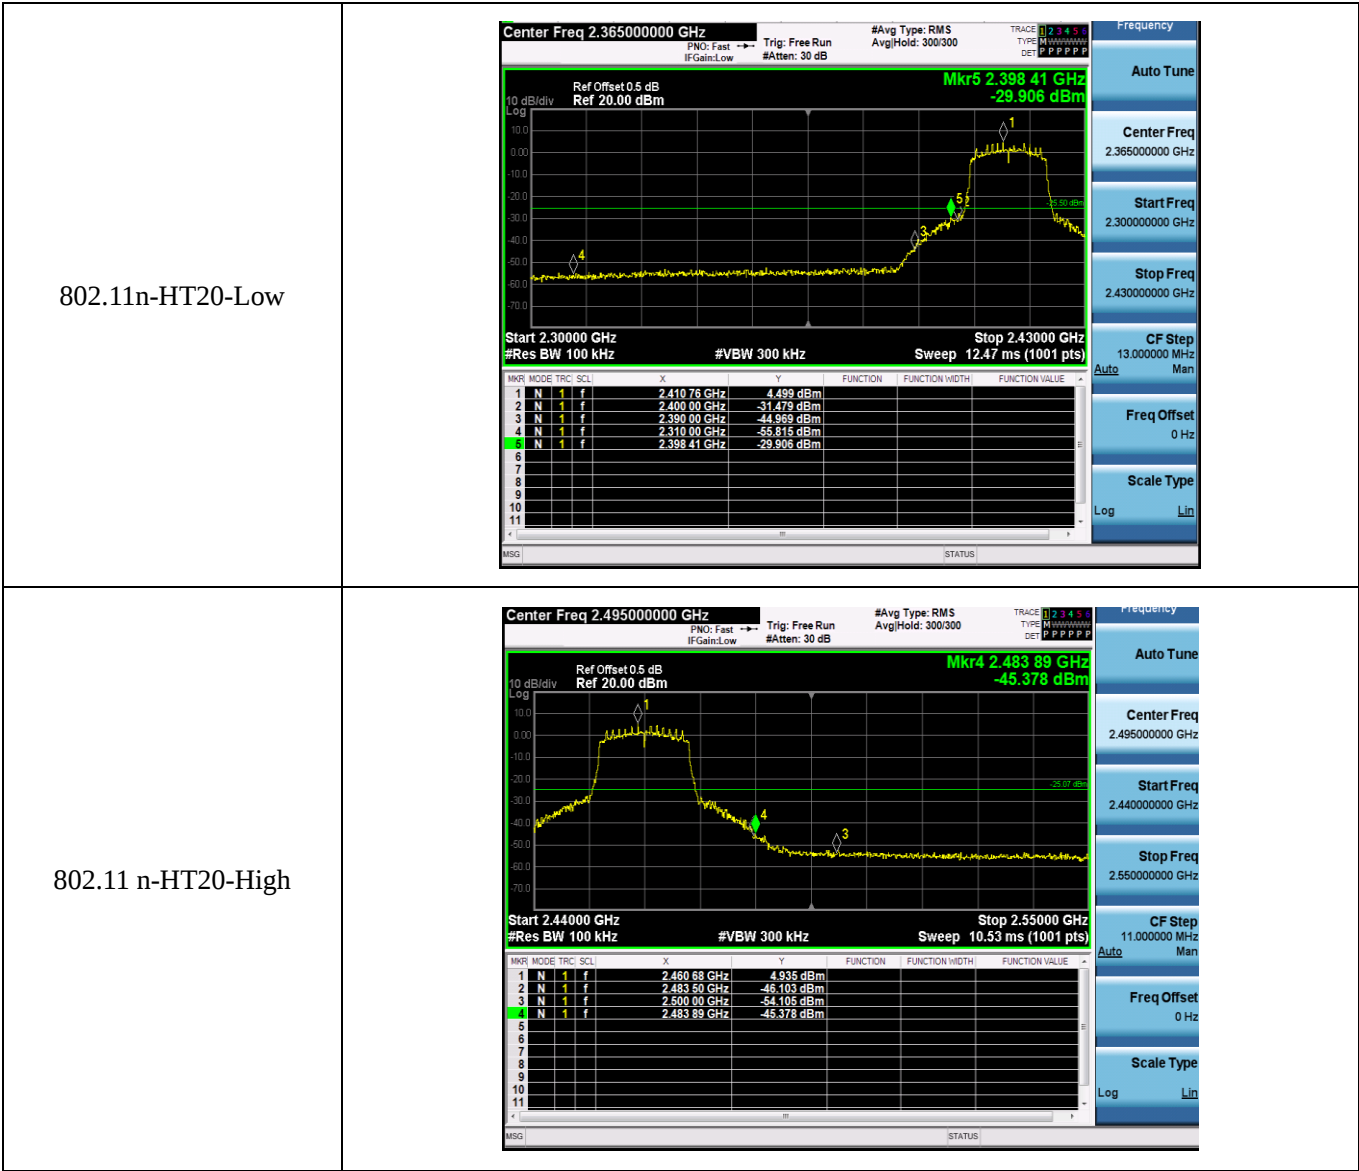

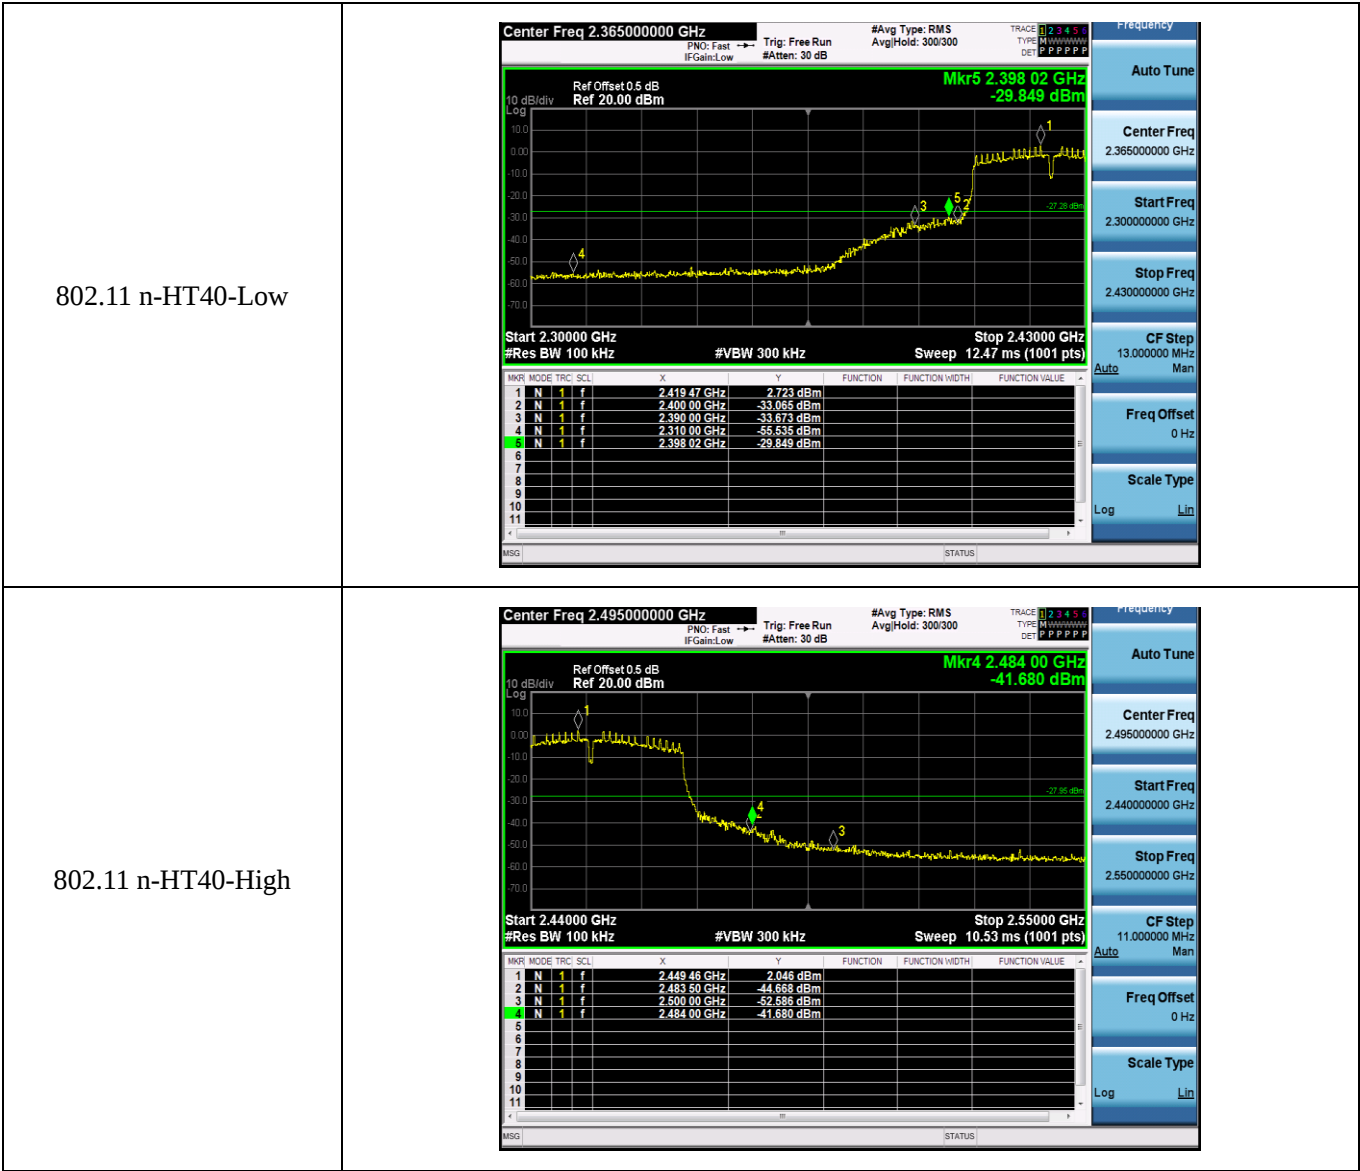

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

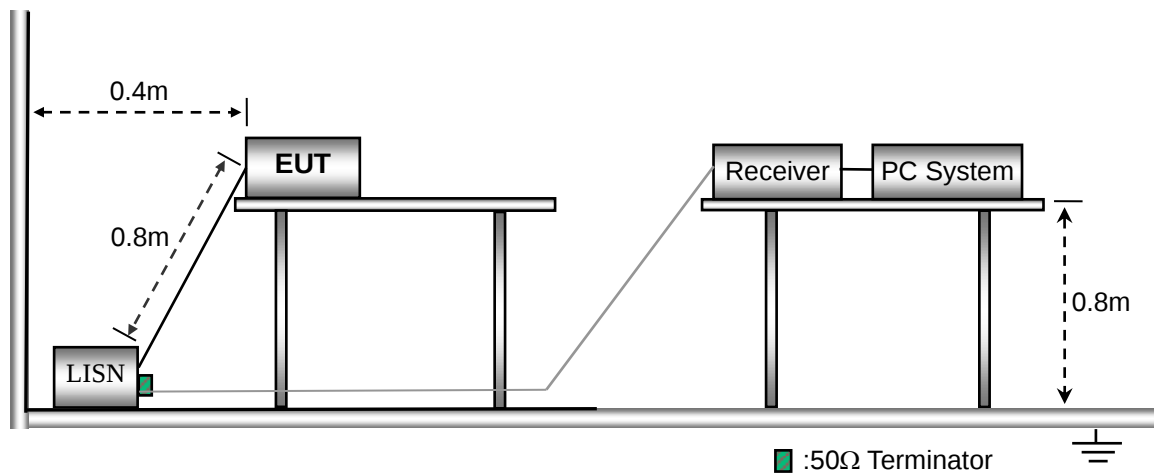

9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

9.4 Summary of Test Results/Plots

Note: The EUT is DC supply, so this item is not applicable.

APPENDIX SUMMARY




Project No.	WTX22X02110215W-1	Test Engineer	Tom Wang
Start date	2022/02/11	Finish date	2022/02/22
Temperature	24.1℃	Humidity	52%
RF specifications	WIFI-2.4G		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant




APPENDIX A




Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-18.81	8
	2437	-20.18	8
	2462	-21.97	8
802.11g_54Mbps	2412	-20.57	8
	2437	-21.53	8
	2462	-23.47	8
802.11n-HT20_MCS7	2412	-20.38	8
	2437	-21.79	8
	2462	-23.76	8
802.11n-HT40_MCS7	2422	-23.50	8
	2437	-24.07	8
	2452	-24.90	8

Note:

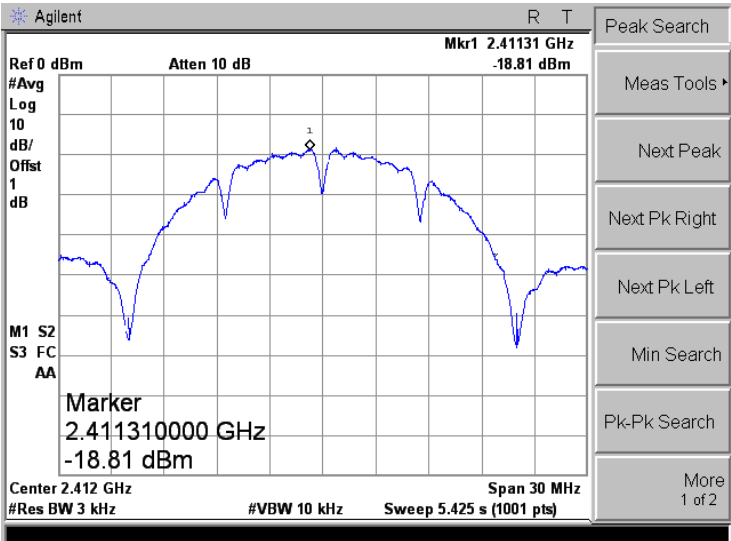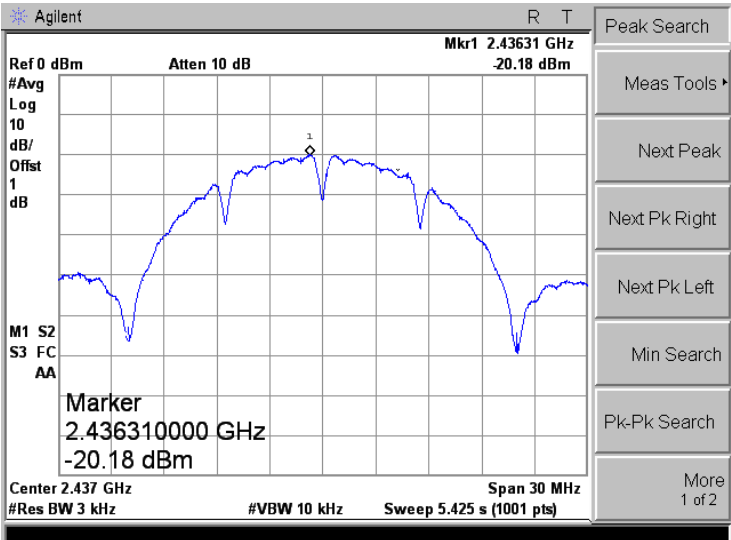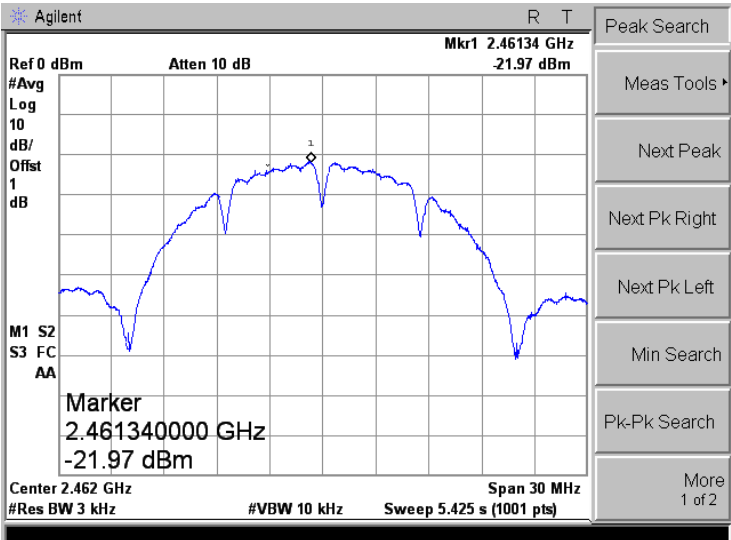802.11b-Low	
802.11b-Middle	
802.11b-High	

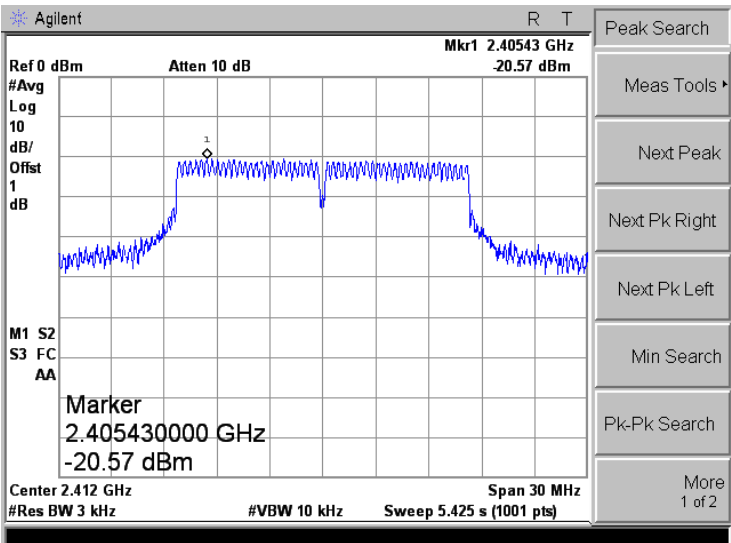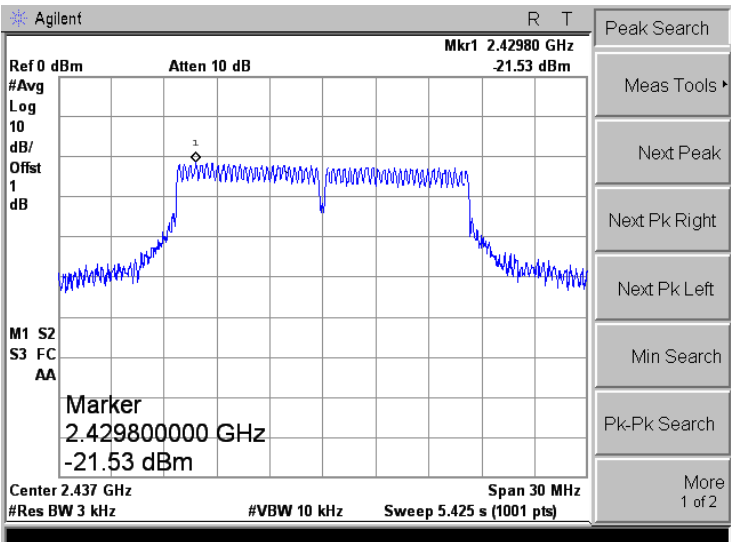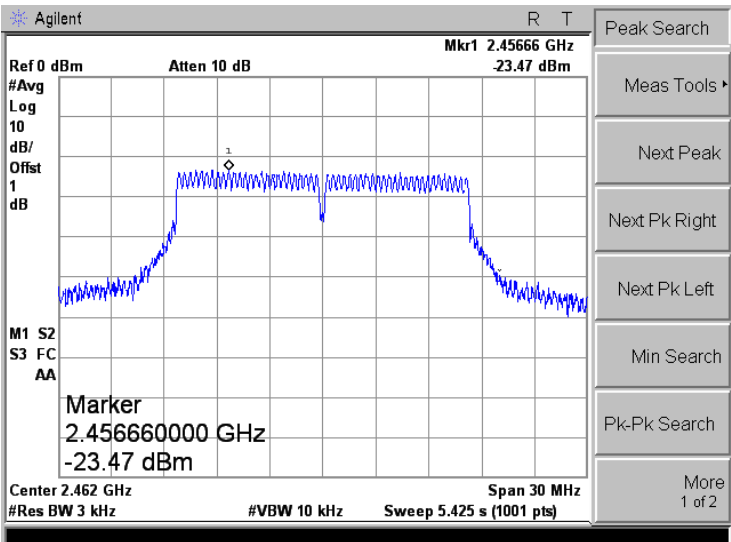802.11g-Low	
802.11g-Middle	
802.11g-High	

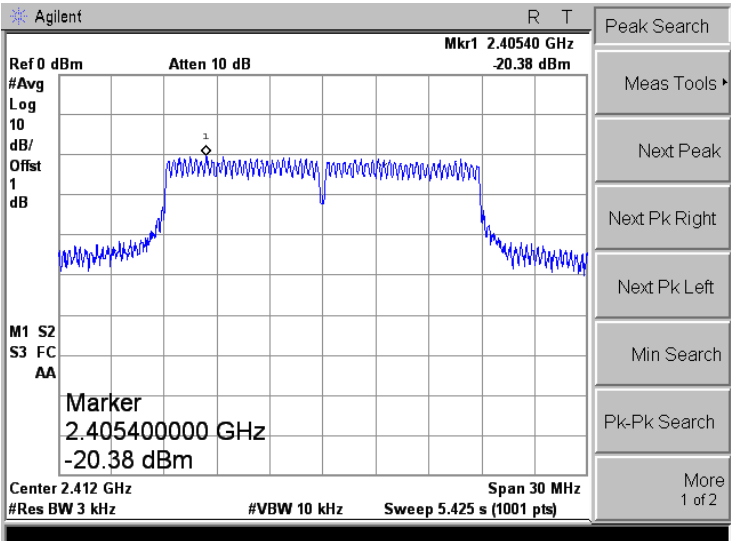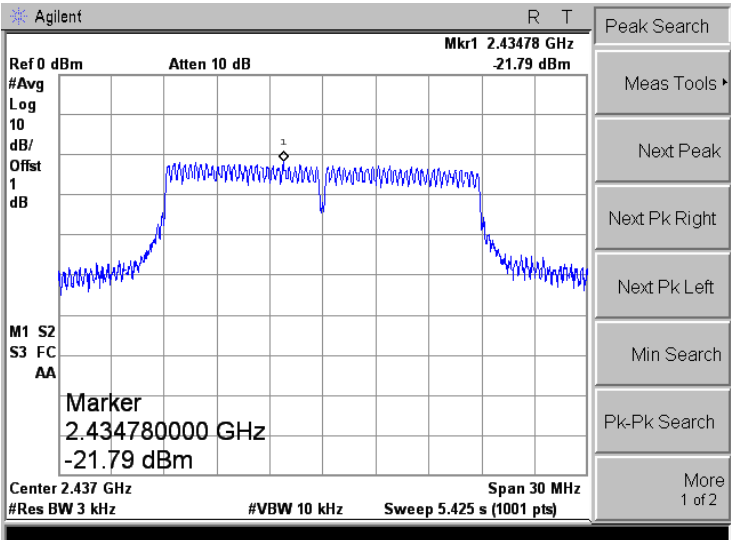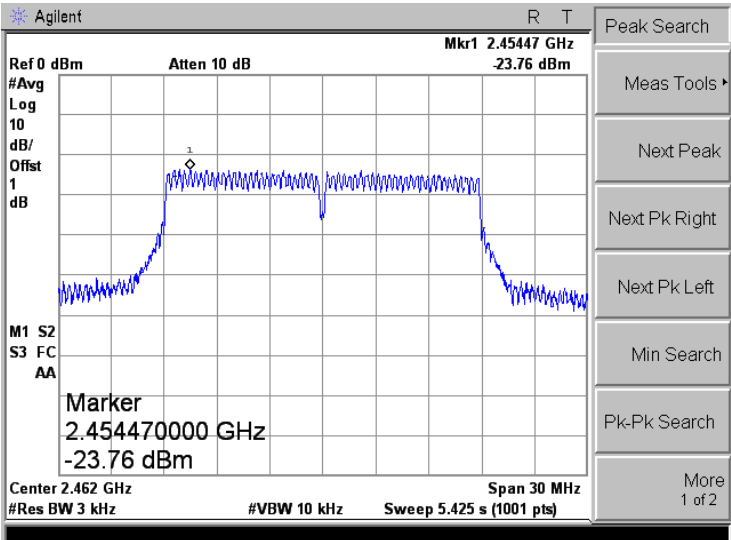802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

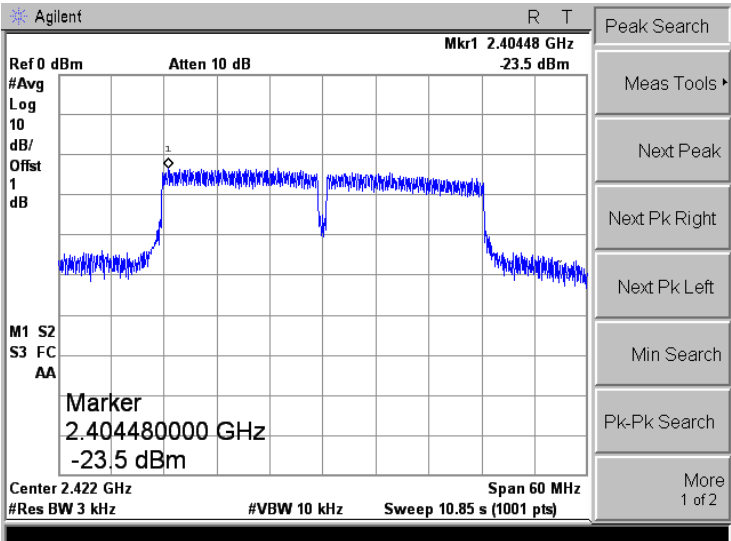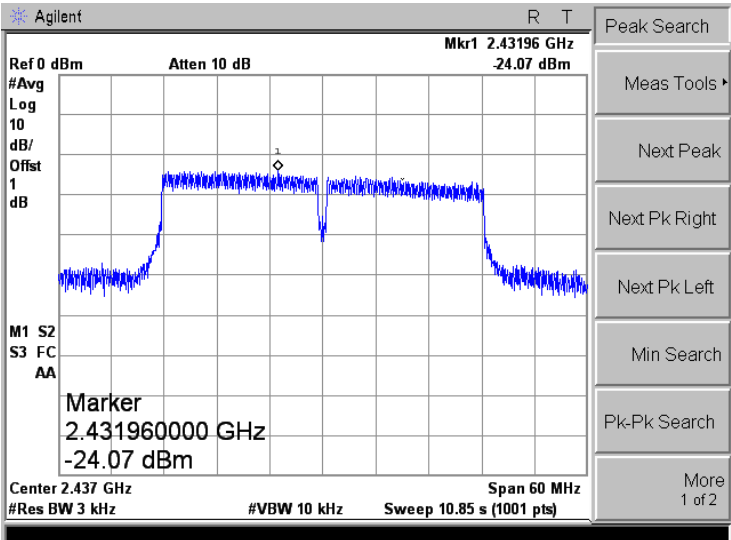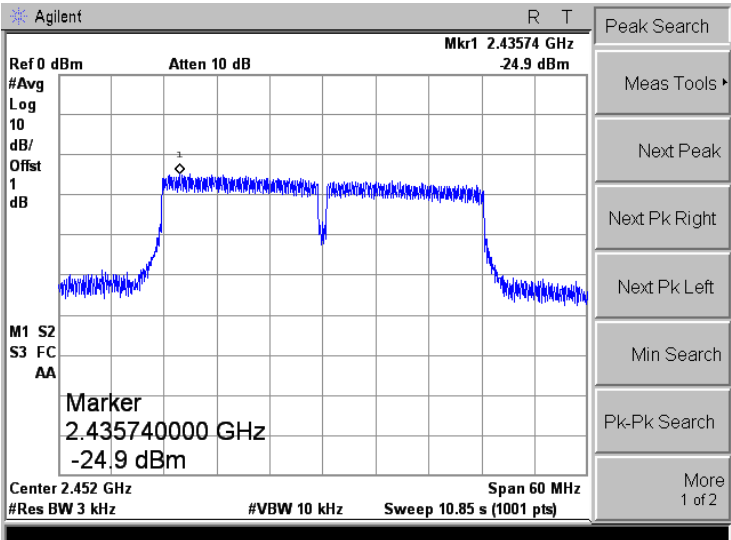802.11n-HT40-Low	
802.11n-HT40-Middle	
802.11n-HT40-High	

APPENDIX B

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	10.056	≥500
	2437	10.063	≥500
	2462	10.036	≥500
802.11g_54Mbps	2412	16.348	≥500
	2437	16.342	≥500
	2462	16.363	≥500
802.11n-HT20_MCS7	2412	17.592	≥500
	2437	17.588	≥500
	2462	17.589	≥500
802.11n-HT40_MCS7	2422	36.101	≥500
	2437	36.319	≥500
	2452	36.326	≥500

The figure consists of three vertically stacked screenshots of an Agilent spectrum analyzer interface, each showing a different 802.11b channel. The interface includes a top bar with 'Agilent' and 'R T' indicators, a central plot area with a blue trace, and a bottom status bar with various measurements. The right side of each screenshot features a 'Trace/View' panel with buttons for 'Trace', 'Clear Write', 'Max Hold', 'Min Hold', 'View', 'Blank', and 'More'.

802.11b-Low: The center frequency is 2.412 GHz. The occupied bandwidth is 15.0867 MHz. The transmit frequency error is -16.131 kHz. The x dB bandwidth is 10.056 MHz.

802.11b-Middle: The center frequency is 2.437 GHz. The occupied bandwidth is 15.0884 MHz. The transmit frequency error is -63.660 kHz. The x dB bandwidth is 10.063 MHz.

802.11b-High: The center frequency is 2.462 GHz. The occupied bandwidth is 15.0603 MHz. The transmit frequency error is -32.187 kHz. The x dB bandwidth is 10.036 MHz.

The figure consists of three vertically stacked screenshots of the Agilent spectrum analyzer software interface, each showing a different 802.11g channel. Each screenshot includes a spectral plot, a measurement data table, and a parameter table.

802.11g-Low (Top Screenshot):




- Center Freq:** 2.412 GHz
- Occupied Bandwidth:** 16.5274 MHz
- Transmit Freq Error:** -32.481 kHz
- x dB Bandwidth:** 16.348 MHz
- Occ BW % Pwr:** 99.00 %
- x dB:** -6.00 dB

802.11g-Middle (Middle Screenshot):

- Center Freq:** 2.437 GHz
- Occupied Bandwidth:** 16.5292 MHz
- Transmit Freq Error:** -47.380 kHz
- x dB Bandwidth:** 16.342 MHz
- Occ BW % Pwr:** 99.00 %
- x dB:** -6.00 dB

802.11g-High (Bottom Screenshot):

- Center Freq:** 2.462 GHz
- Occupied Bandwidth:** 16.5257 MHz
- Transmit Freq Error:** -39.702 kHz
- x dB Bandwidth:** 16.363 MHz
- Occ BW % Pwr:** 99.00 %
- x dB:** -6.00 dB

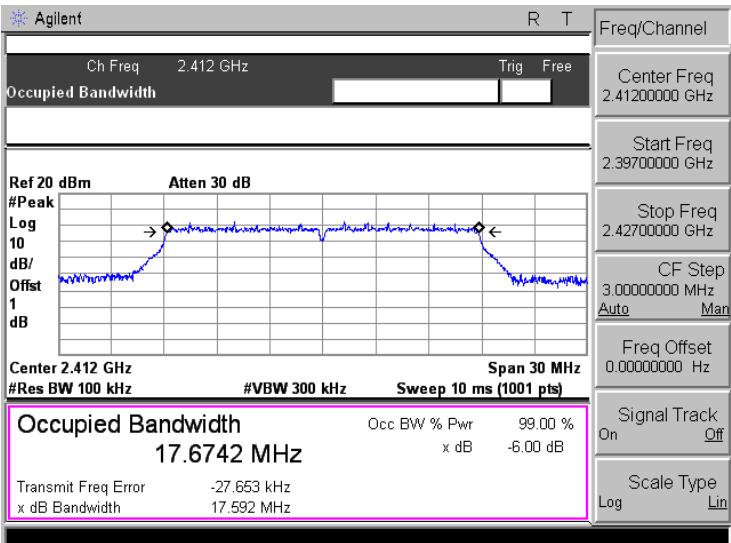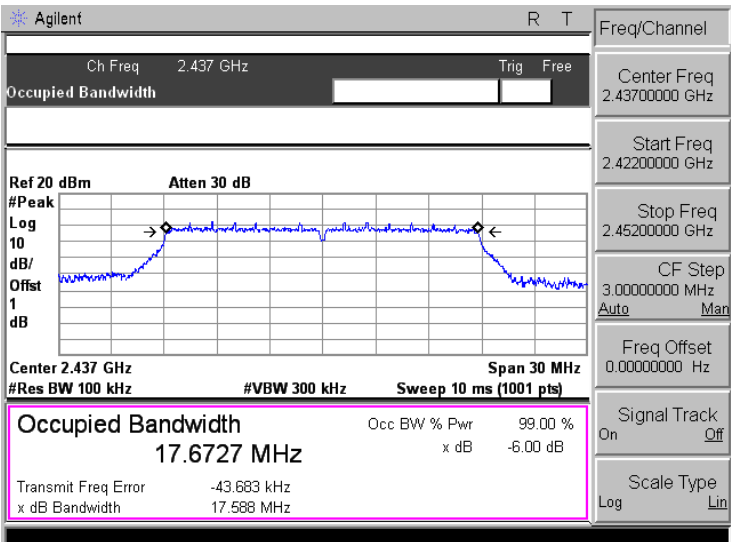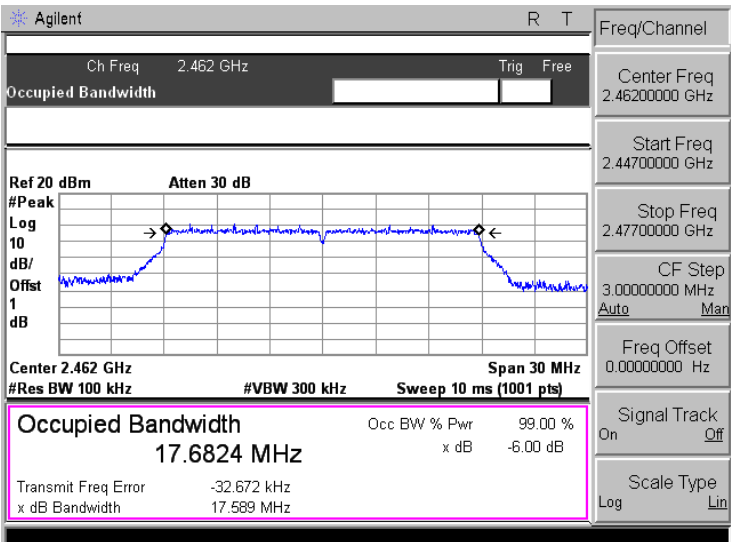802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

The figure consists of three vertically stacked screenshots of an Agilent spectrum analyzer interface, each showing the Occupied Bandwidth (OBW) for a different 802.11n-HT40 channel. The interface includes a main display area with a frequency plot, a top status bar, and a right-hand control panel.

802.11n-HT40-Low: The center frequency is 2.422 GHz. The plot shows a peak at this frequency. The OBW is 36.1550 MHz. The transmit frequency error is -40.770 kHz.

802.11n-HT40-Middle: The center frequency is 2.437 GHz. The plot shows a peak at this frequency. The OBW is 36.1762 MHz. The transmit frequency error is -53.437 kHz.

802.11n-HT40-High: The center frequency is 2.452 GHz. The plot shows a peak at this frequency. The OBW is 35.7932 MHz. The transmit frequency error is -33.845 kHz.

Channel	Center Freq (GHz)	Occupied Bandwidth (MHz)	Transmit Freq Error (kHz)
802.11n-HT40-Low	2.422	36.1550	-40.770
802.11n-HT40-Middle	2.437	36.1762	-53.437
802.11n-HT40-High	2.452	35.7932	-33.845

APPENDIX C

Output power			
Test Mode	Frequency MHz	Reading dBm	Limit dBm
802.11b _ 11Mbps	2412	16.14	30.00
	2437	16.41	30.00
	2462	16.26	30.00
802.11g_54Mbps	2412	15.24	30.00
	2437	15.63	30.00
	2462	14.58	30.00
802.11n HT20_MCS7	2412	14.08	30.00
	2437	14.23	30.00
	2462	13.29	30.00
802.11n HT40_MCS7	2422	13.55	30.00
	2437	13.56	30.00
	2452	13.09	30.00

802.11B-Low	Agilent Ch Freq 2.412 GHz Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 16.14 dBm / 20.0000 MHz Power Spectral Density -56.87 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11B-Middle	Agilent Ch Freq 2.437 GHz Channel Power Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 16.41 dBm / 20.0000 MHz Power Spectral Density -56.60 dBm/Hz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Scale Type Log Lin
802.11B-High	Agilent Ch Freq 2.462 GHz Channel Power Center 2.462000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 16.26 dBm / 20.0000 MHz Power Spectral Density -56.76 dBm/Hz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Scale Type Log Lin


802.11G-Low	Agilent R T Ch Freq 2.412 GHz Trig Free Channel Power Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 15.24 dBm / 20.0000 MHz -57.77 dBm/Hz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11G-Middle	Agilent R T Ch Freq 2.437 GHz Trig Free Channel Power Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 15.63 dBm / 20.0000 MHz -57.38 dBm/Hz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11G-High	Agilent R T Ch Freq 2.462 GHz Trig Free Channel Power Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 14.58 dBm / 20.0000 MHz -58.54 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11N-HT20-Low	Agilent Ch Freq 2.412 GHz Channel Power Ref 20 dBm Atten 30 dB #Avg 10 Log dB/Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 30 MHz Sweep 8 ms (401 pts) Channel Power 14.08 dBm / 20.0000 MHz Power Spectral Density -58.93 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11N-HT20-Middle	Agilent Ch Freq 2.437 GHz Channel Power Ref 20 dBm Atten 30 dB #Avg 10 Log dB/Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Span 30 MHz Sweep 8 ms (401 pts) Channel Power 14.23 dBm / 20.0000 MHz Power Spectral Density -58.78 dBm/Hz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11N-HT20-High	Agilent Ch Freq 2.452 GHz Channel Power Center 2.462000000 GHz Ref 20 dBm Atten 30 dB #Avg 10 Log dB/Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Span 30 MHz Sweep 8 ms (401 pts) Channel Power 13.29 dBm / 20.0000 MHz Power Spectral Density -59.72 dBm/Hz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin



802.11N-HT40-Low	Agilent R T Ch Freq 2.422 GHz Trig Free Channel Power Center 2.422000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.422 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 13.55 dBm / 40.0000 MHz -62.11 dBm/Hz Freq/Channel Center Freq 2.42200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.45200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11N-HT40-Middle	Agilent R T Ch Freq 2.437 GHz Trig Free Channel Power Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 13.56 dBm / 40.0000 MHz -62.46 dBm/Hz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.40700000 GHz Stop Freq 2.46700000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11N-HT40-High	Agilent R T Ch Freq 2.452 GHz Trig Free Channel Power Center 2.452000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.452 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 13.09 dBm / 40.0000 MHz -62.93 dBm/Hz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2

APPENDIX D



Conducted Spurious Emission

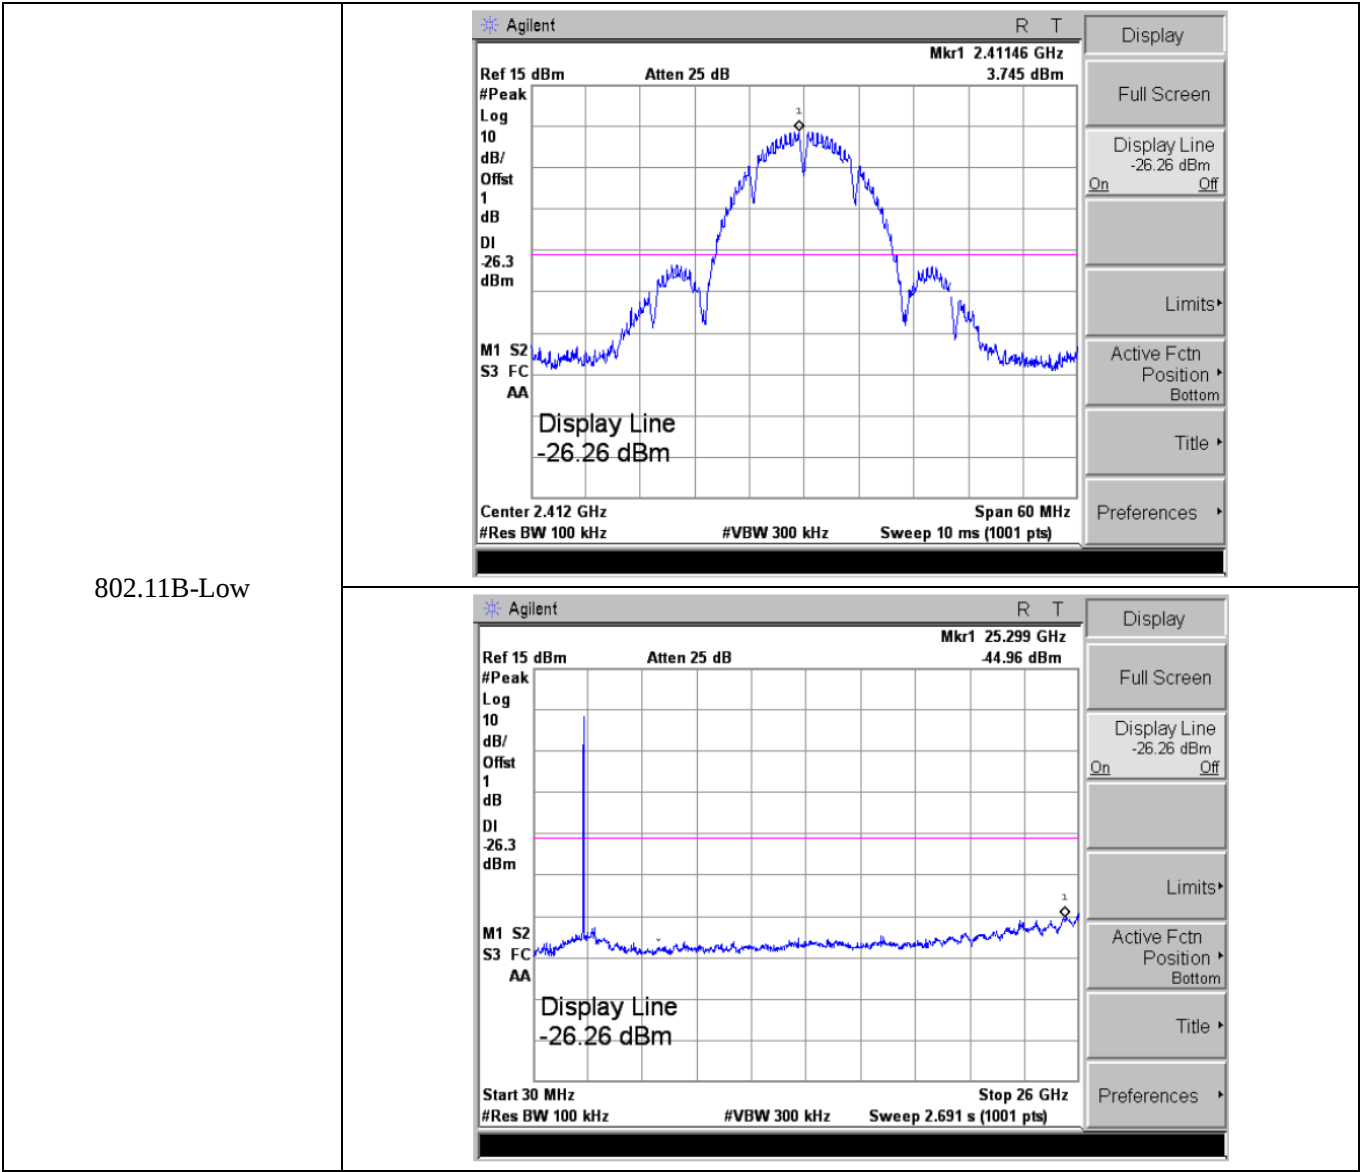



802.11B-Middle

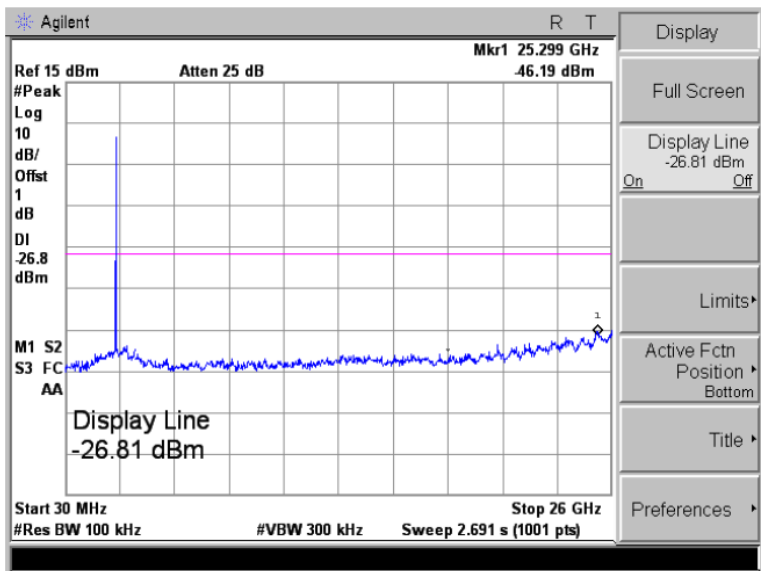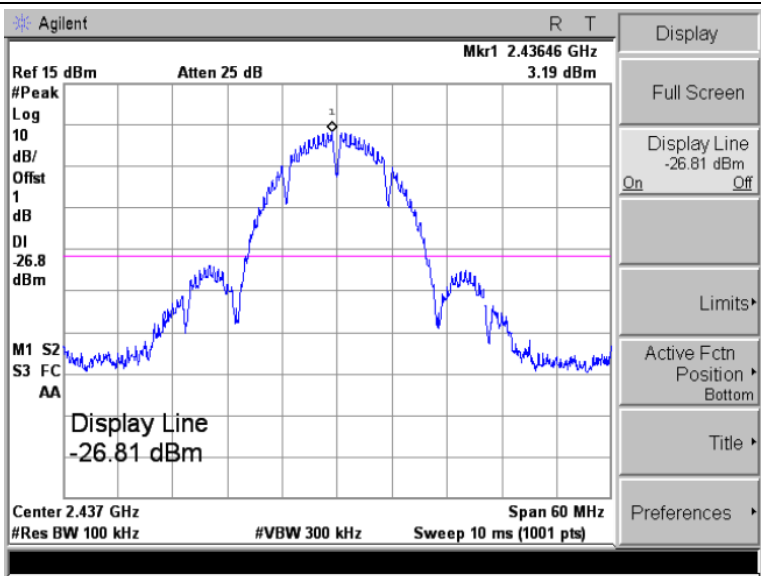



802.11B-High

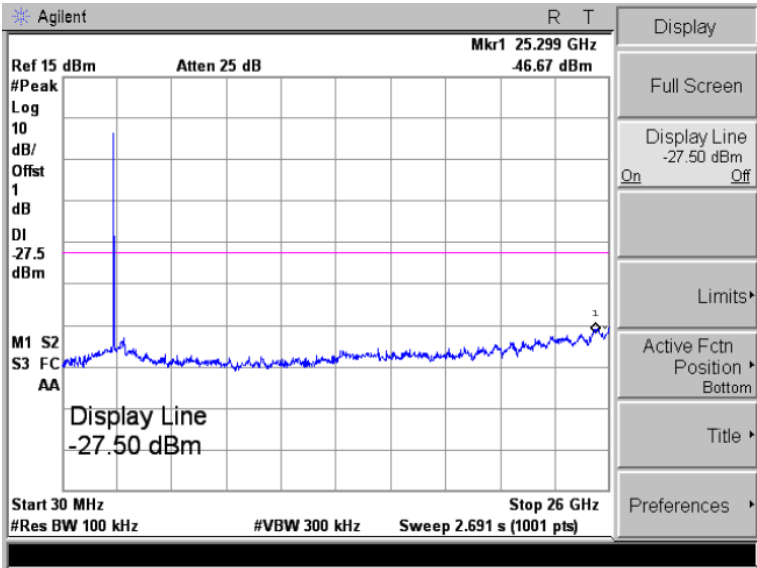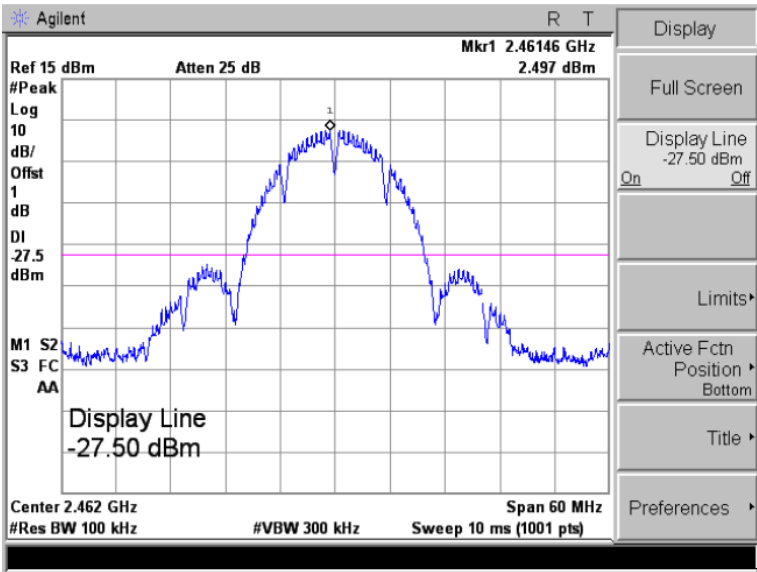



802.11G-Low

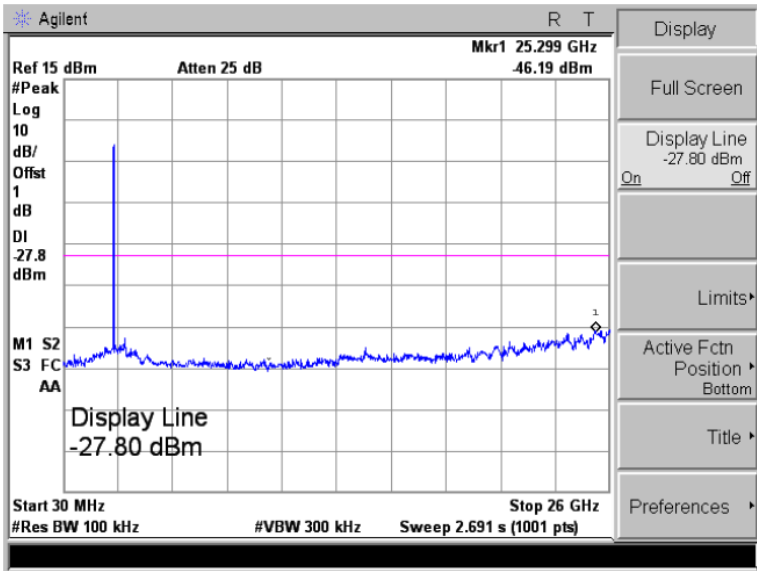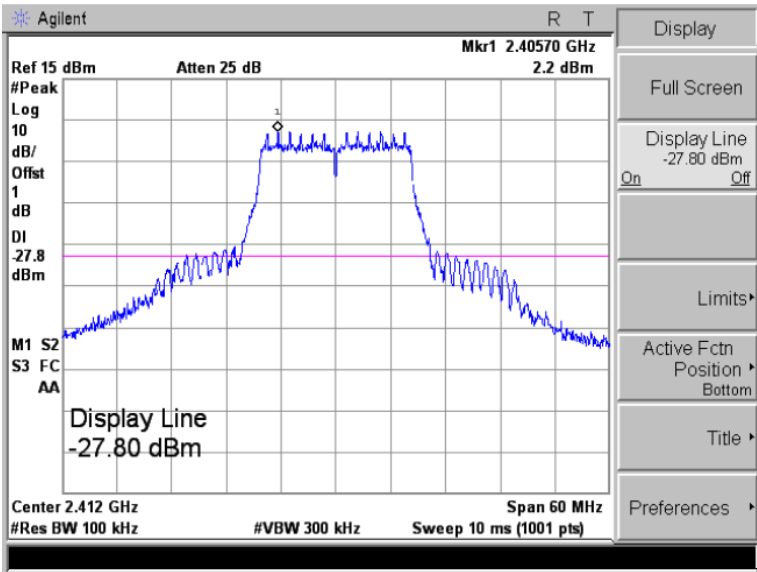



802.11G-Middle

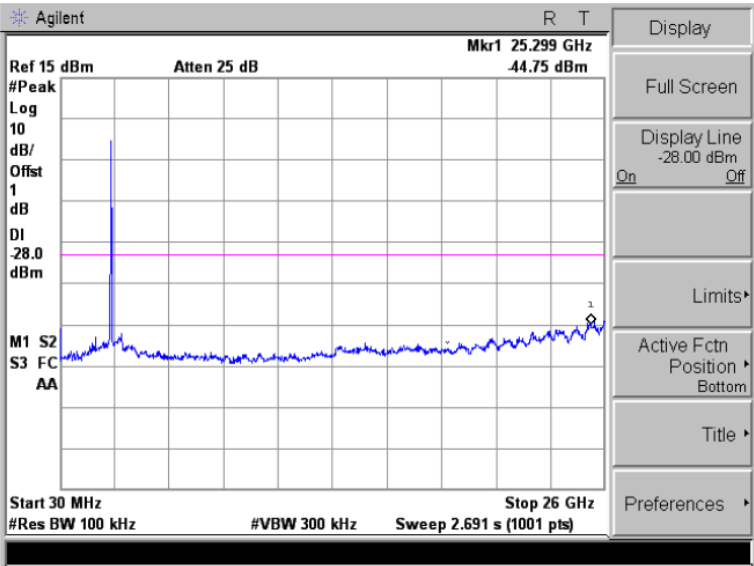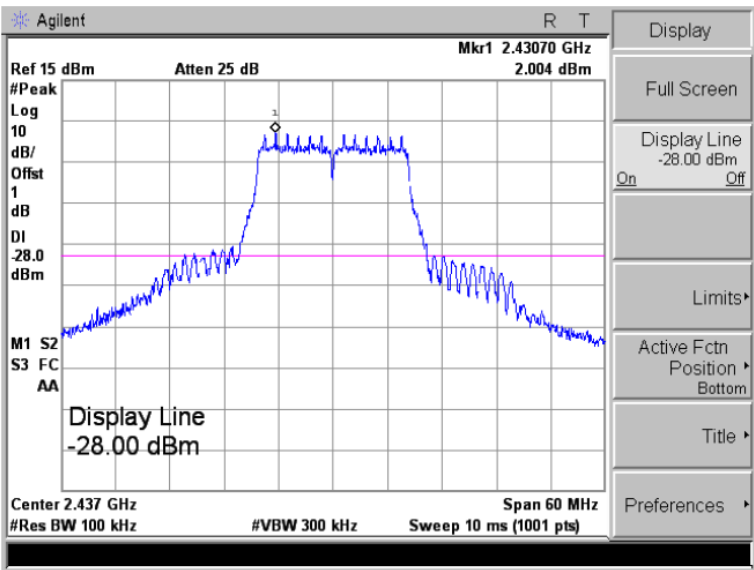



802.11G-High

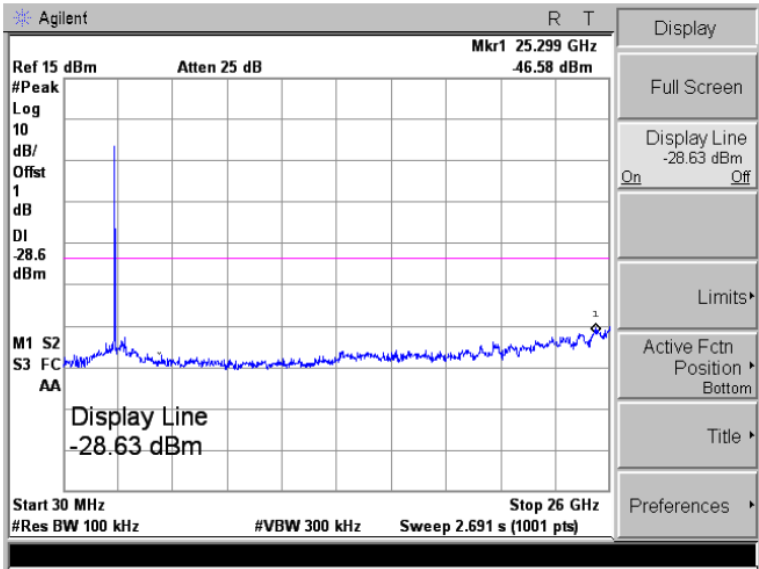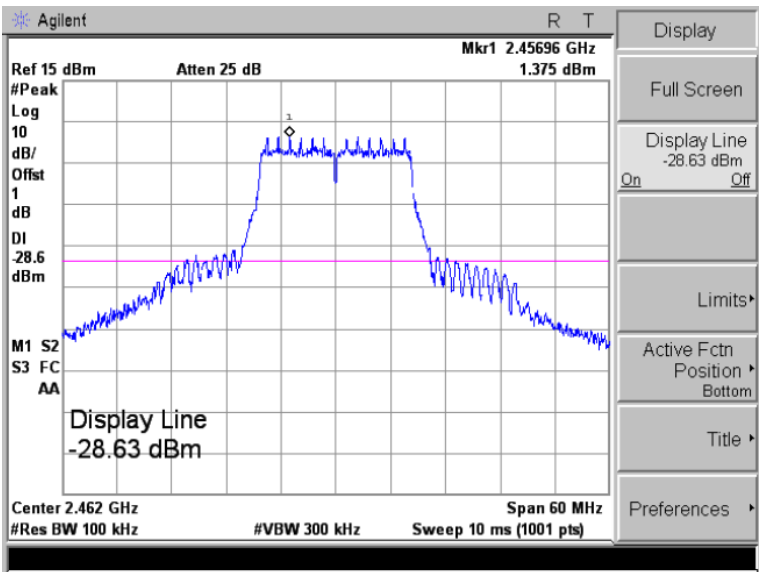



802.11N-HT20-Low

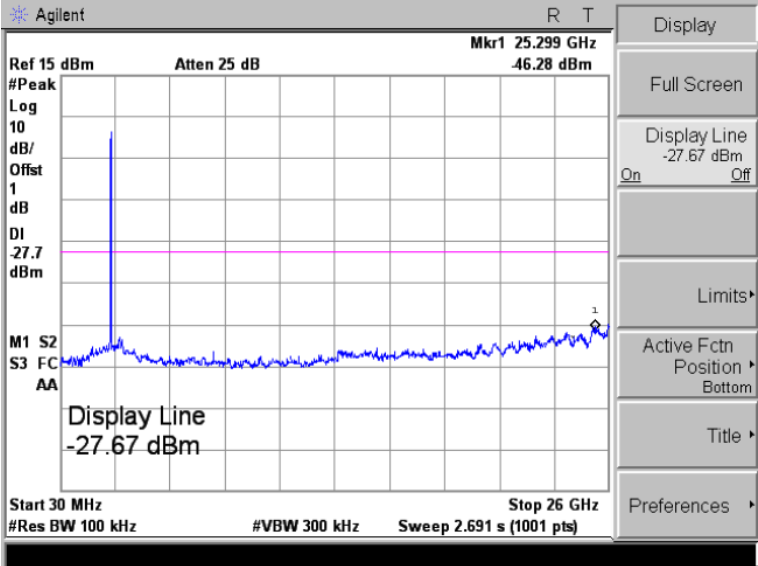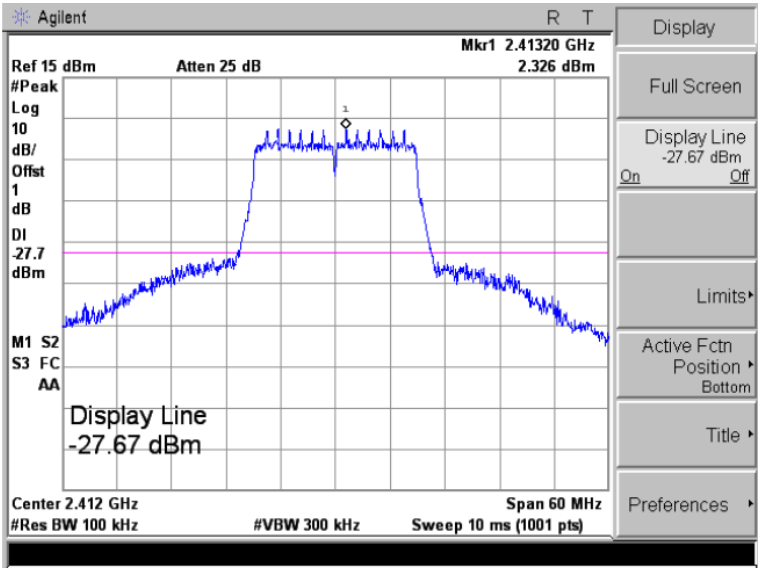



802.11N-HT20-Middle

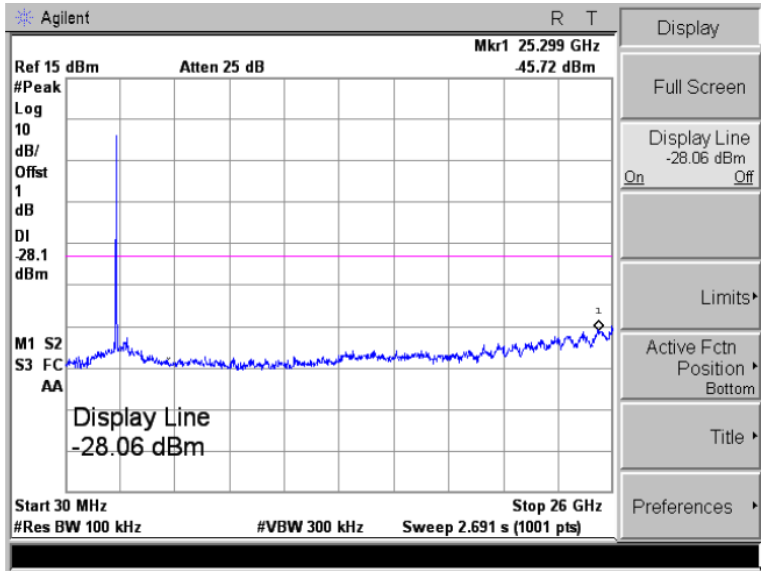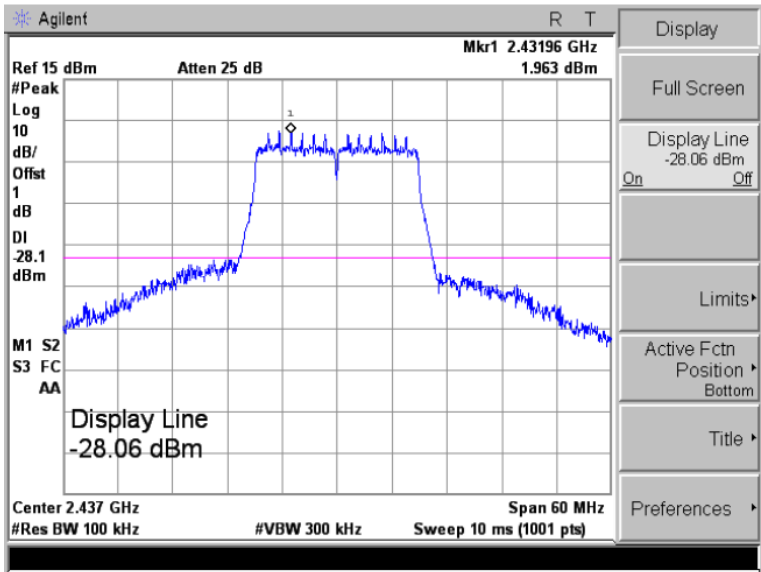



802.11N-HT20-High

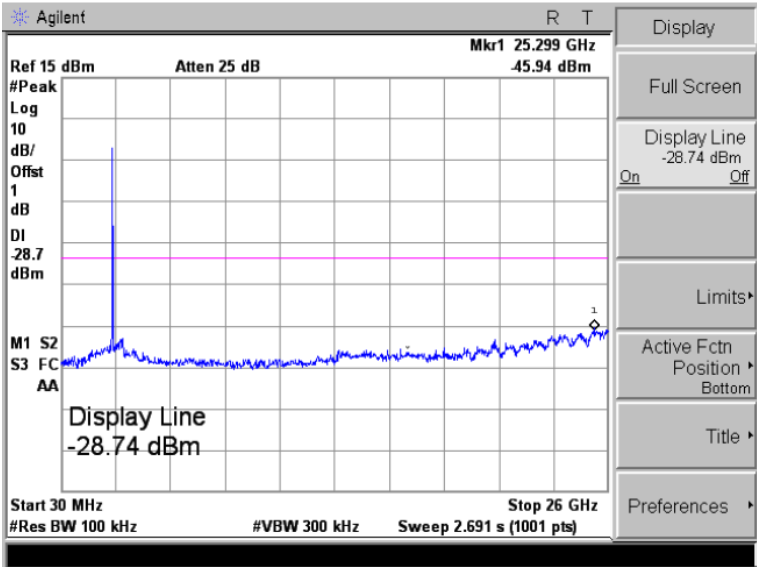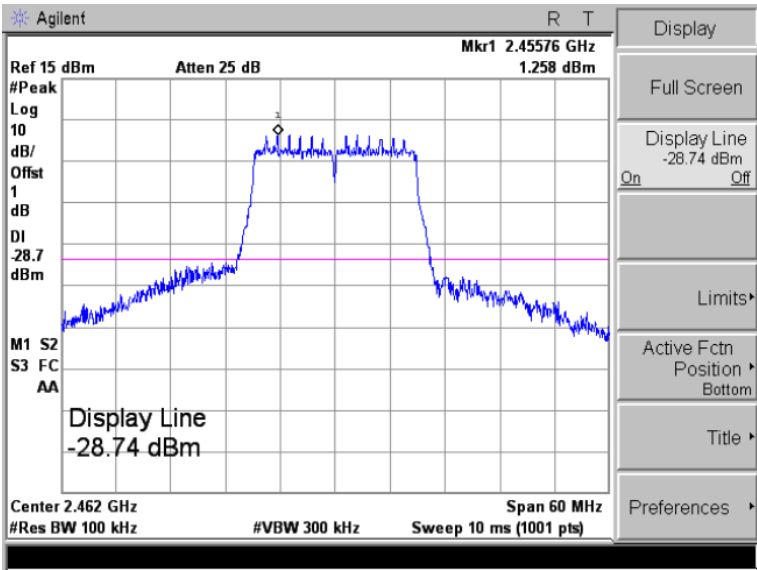



802.11N-HT40-Low

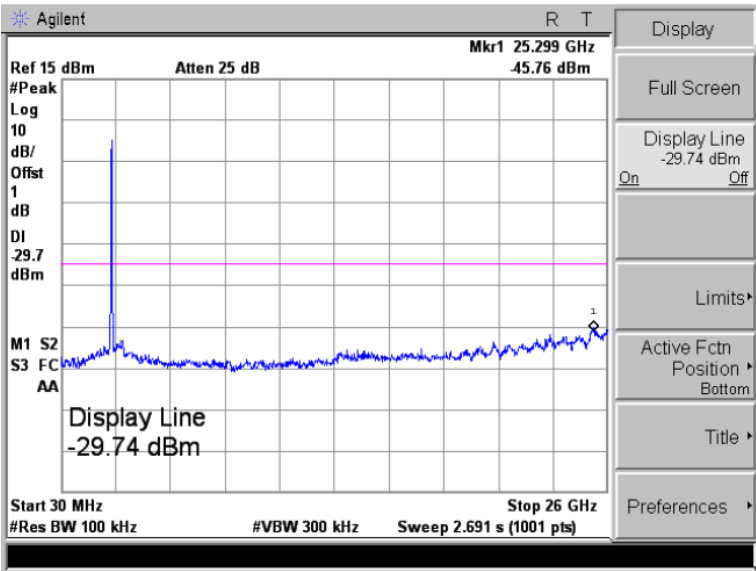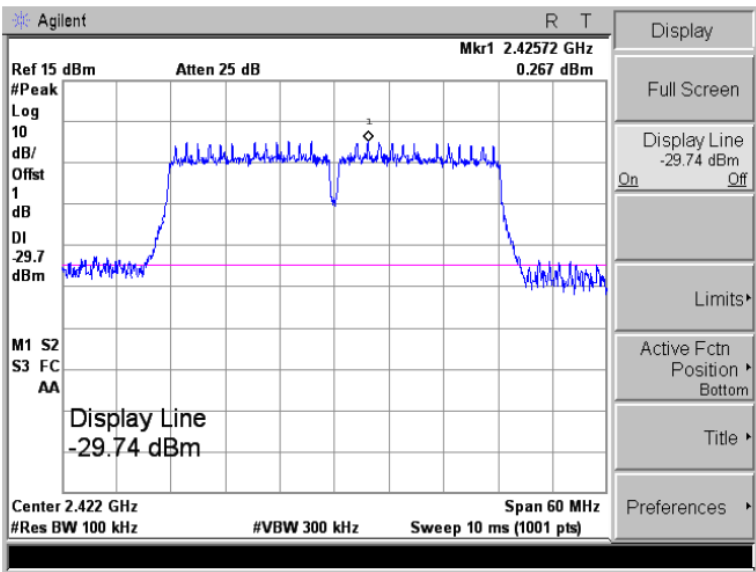

802.11N-HT40-Middle

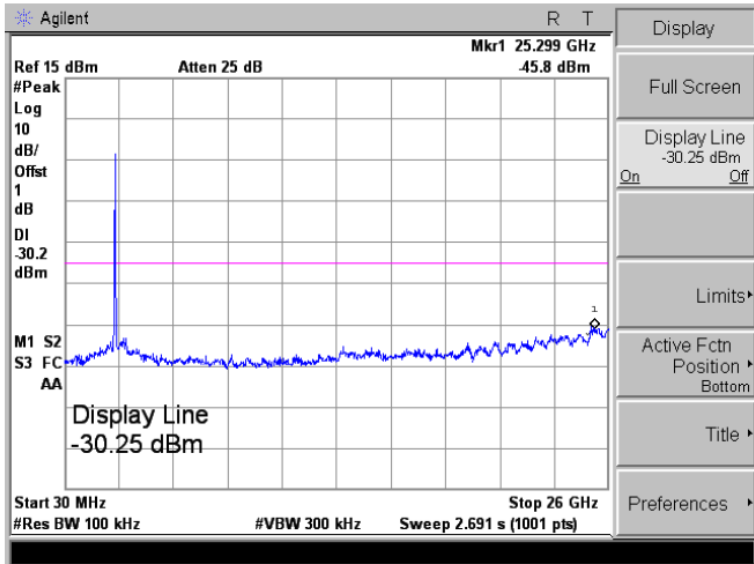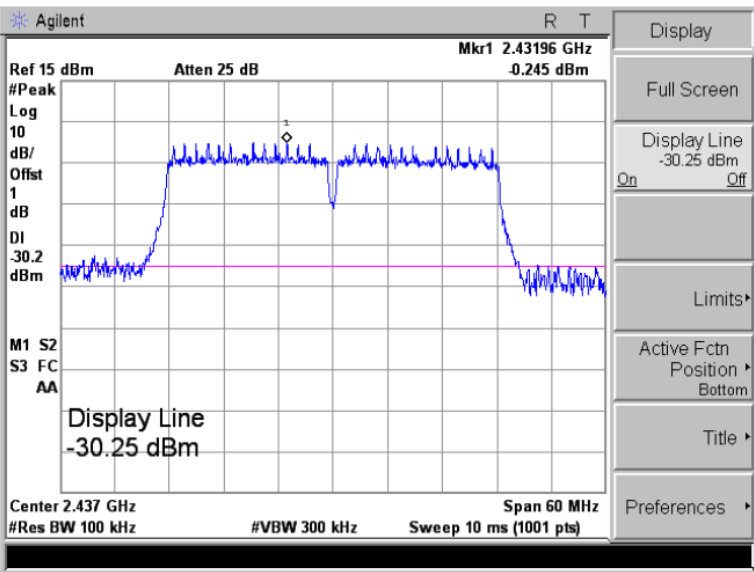

802.11N-HT40-High

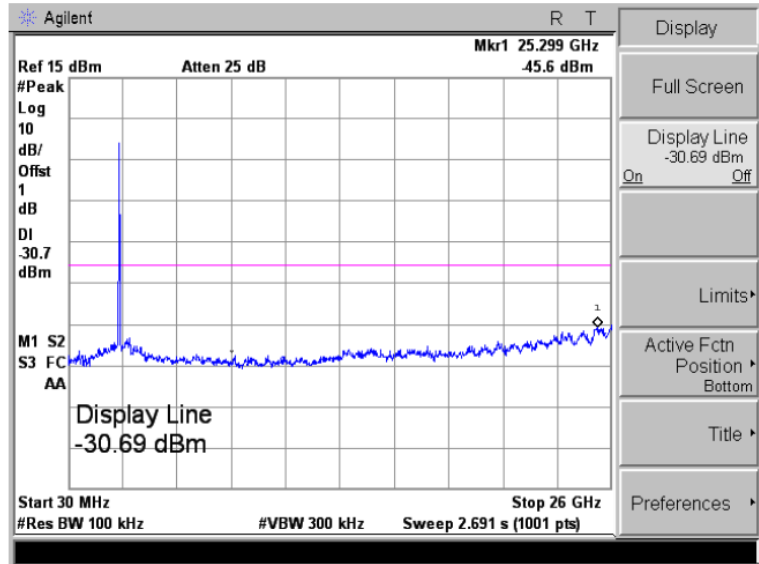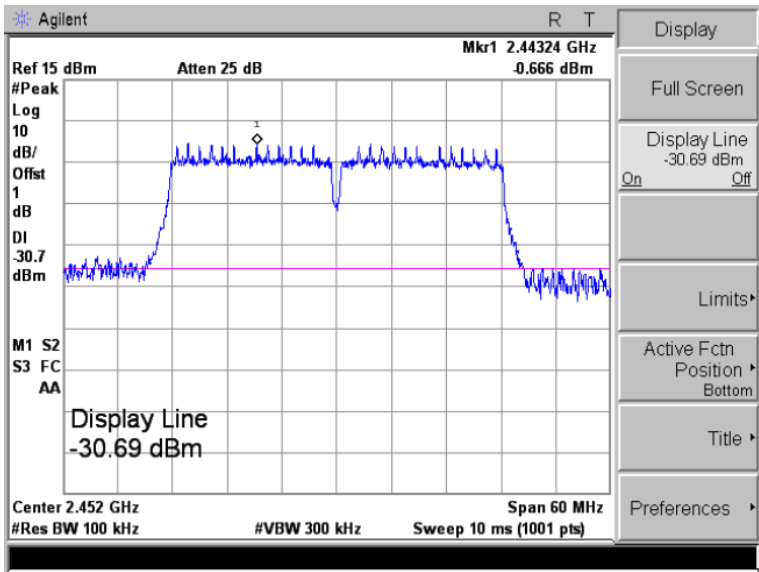

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******