



# FCC RF Test Report

APPLICANT : VINFAST TRADING AND PRODUCTION JOINT  
STOCK COMPANY  
EQUIPMENT : MULTIMEDIA HEAD UNIT  
BRAND NAME : VINFAST  
MODEL NAME : VF-EC22U  
FCC ID : 2A6HEVF-EC22U  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter  
TEST DATE(S) : Jun. 28, 2022 ~ Jul. 28, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT .....	6
1.6 Testing Location .....	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	9
2.6 Measurement Results Explanation Example.....	10
<b>3 TEST RESULT .....</b>	<b>11</b>
3.1 Number of Channel Measurement .....	11
3.2 Hopping Channel Separation Measurement .....	13
3.3 Dwell Time Measurement.....	19
3.4 20dB Bandwidth Measurement .....	21
3.5 Output Power Measurement.....	27
3.6 Conducted Band Edges Measurement.....	28
3.7 Conducted Spurious Emission Measurement .....	35
3.8 Radiated Band Edges and Spurious Emission Measurement .....	45
3.9 Antenna Requirements.....	49
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>50</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>51</b>
<b>APPENDIX A. CONDUCTED TEST RESULTS</b>	
<b>APPENDIX B. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX C. DUTY CYCLE PLOTS</b>	
<b>APPENDIX D. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR233104A	Rev. 01	Initial issue of report	Aug. 23, 2022

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.16 dB at 898.150 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Applicable	-
3.9	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

**Remark:** Not Applicable means after assessing, test items are not necessary to carry out.

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

### VINFAST TRADING AND PRODUCTION JOINT STOCK COMPANY

Dinh Vu - Cat Hai Economic Zone, Cat Hai Island, Cat Hai Town, Cat Hai District, Hai Phong City, Vietnam

## 1.2 Manufacturer

### VINFAST TRADING AND PRODUCTION JOINT STOCK COMPANY

Dinh Vu - Cat Hai Economic Zone, Cat Hai Island, Cat Hai Town, Cat Hai District, Hai Phong City, Vietnam

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MULTIMEDIA HEAD UNIT
Brand Name	VINFAST
Model Name	VF-EC22U
FCC ID	2A6HEVF-EC22U
IMEI Code	Conducted: 864694040039112 Radiation: 864694040048055
HW Version	C2.2
SW Version	SOW30005092
EUT Stage	Identical Prototype

### Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a vehicle device, only supports 12Vdc and does not use AC charger.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 0.70 dBm (0.0012 W) Bluetooth EDR (2Mbps) : 2.64 dBm (0.0018 W) Bluetooth EDR (3Mbps) : 2.84 dBm (0.0019 W)
Antenna Type / Gain	Fixed Internal Antenna with gain 2.402 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK



## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH03-KS TH01-KS	CN1257	314309

## 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-KS	AUDIX	E3	6.2009-8-24a

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			



## 2.3 Connection Diagram of Test System

< Radiated Emission >

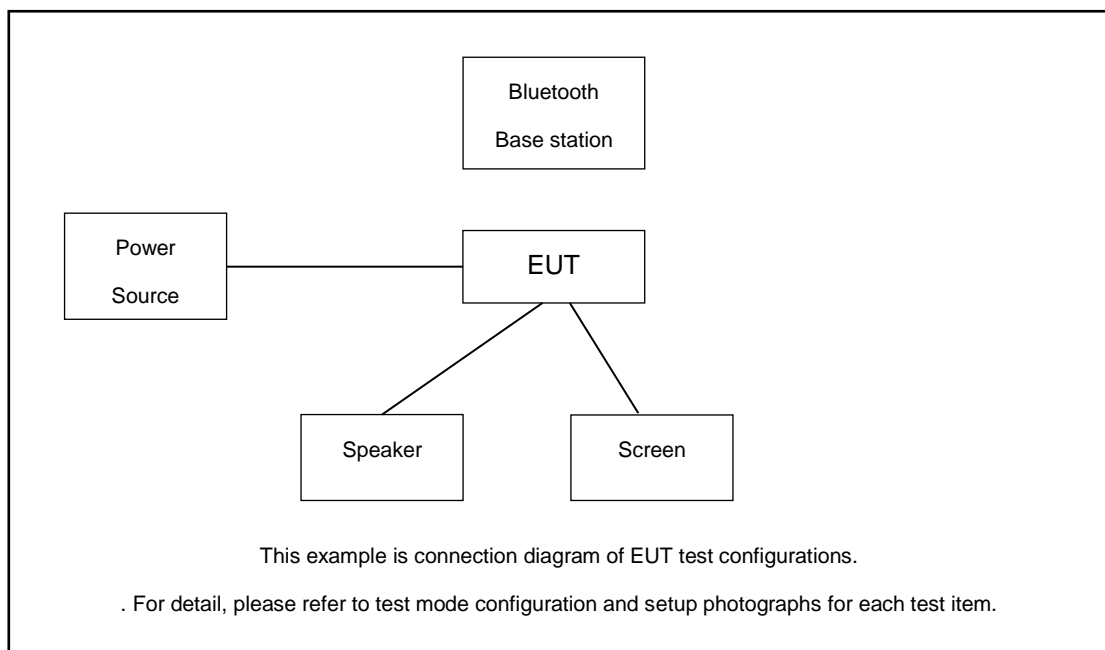

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base station	R&S	CBT	N/A	N/A	Unshielded,1.8m
2.	DC Power	GWINSTEK	PLR36-10	N/A	N/A	Unshielded,1.8m
3.	WWAN Antenna	N/A	N/A	N/A	N/A	N/A
4.	WLAN Antenna	N/A	N/A	N/A	N/A	N/A
5.	GNSS Antenna	N/A	N/A	N/A	N/A	N/A
6.	Speaker	N/A	N/A	N/A	N/A	N/A
7.	Screen	N/A	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 6.0 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} . \\ &= 6.0 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

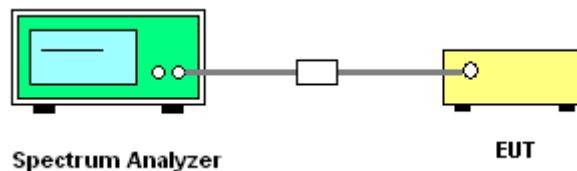


##### 3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.




Number of Hopping Channel Plot on Channel 00 - 78

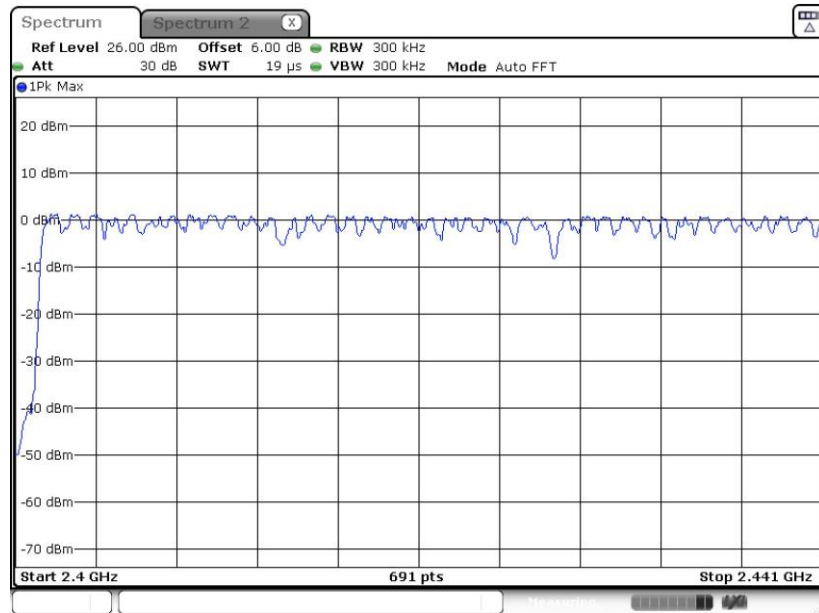

Date: 30 JUN 2022 16:46:54

Number of Hopping Channel Plot on Channel 00 - 78

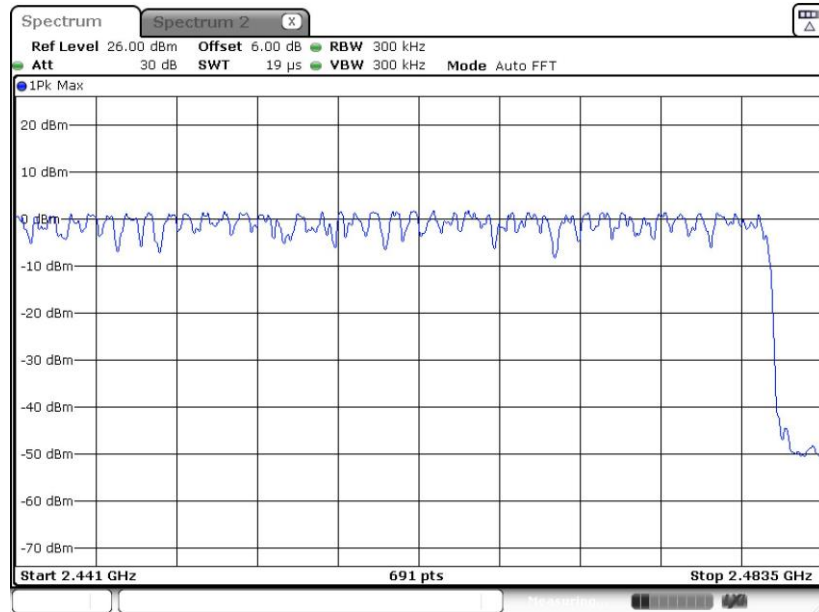

Date: 30 JUN 2022 16:47:06

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

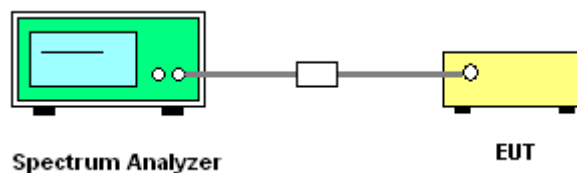

### 3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.




<1Mbps>

Channel Separation Plot on Channel 00 - 01



Date: 30 JUN 2022 16:04:15

Channel Separation Plot on Channel 39 - 40

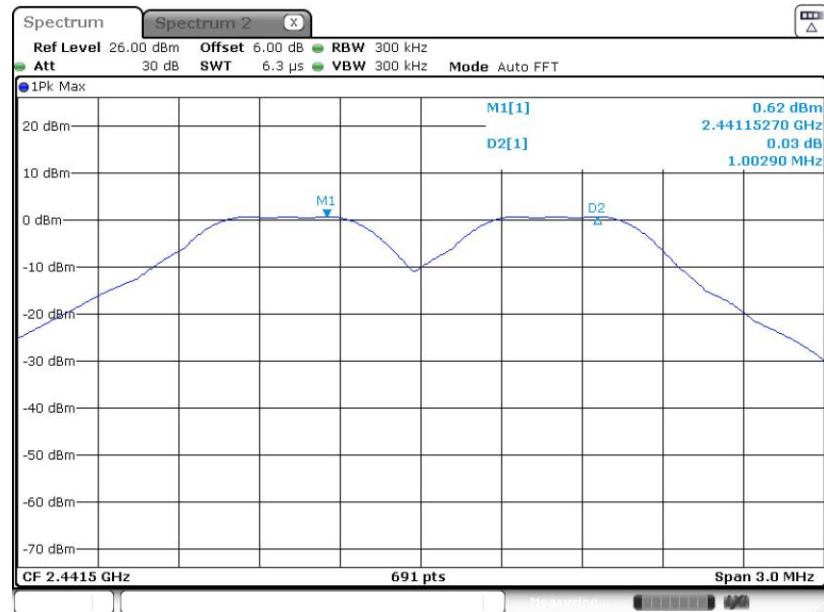

Date: 30 JUN 2022 16:08:34




### Channel Separation Plot on Channel 77 - 78



Date: 30 JUN 2022 16:15:20

### <2Mbps>


### Channel Separation Plot on Channel 00 - 01

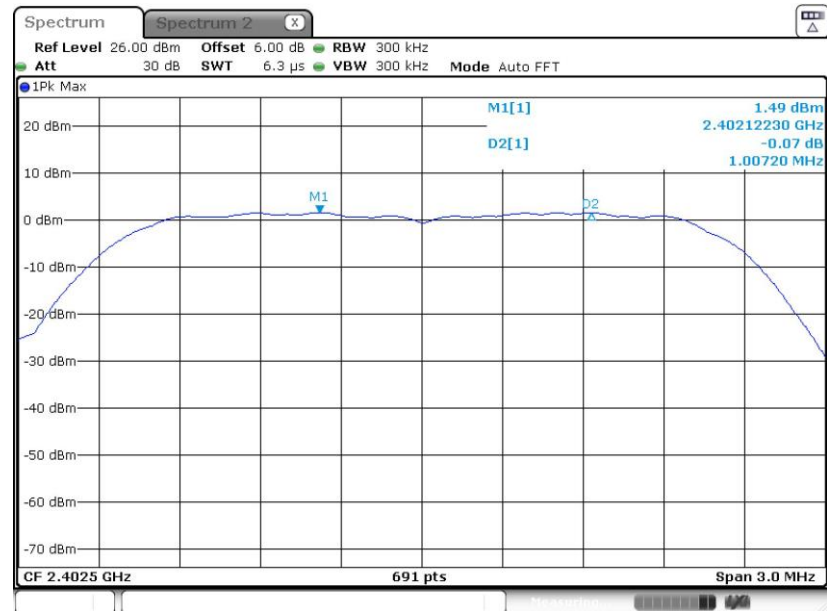

Date: 30 JUN 2022 16:25:45



### Channel Separation Plot on Channel 39 - 40

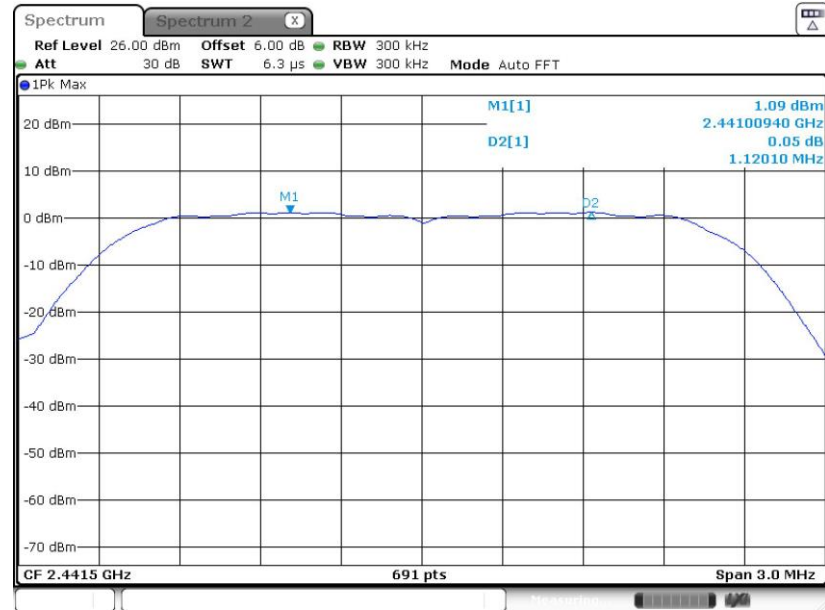

Date: 30 JUN 2022 16:37:09

### Channel Separation Plot on Channel 77 - 78




Date: 30 JUN 2022 16:42:51






<3Mbps>

Channel Separation Plot on Channel 00 - 01

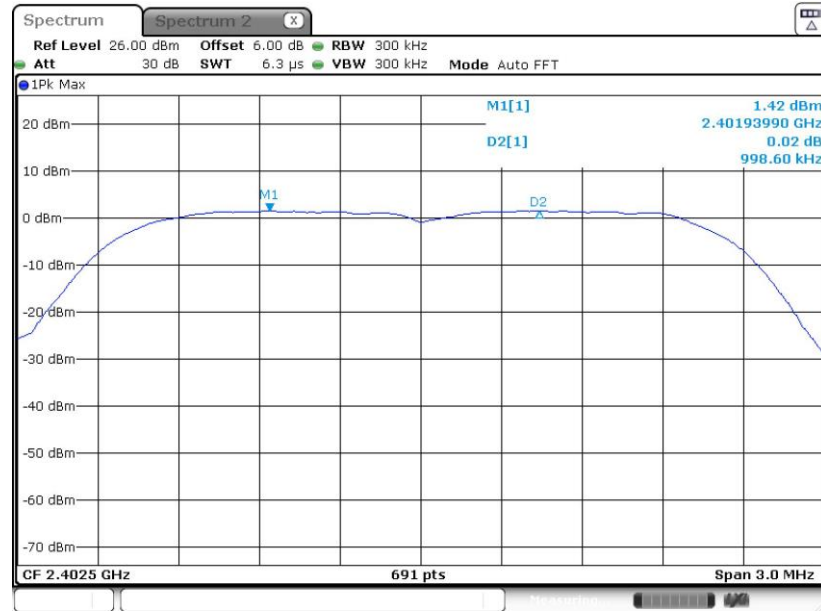


Channel Separation Plot on Channel 39 - 40

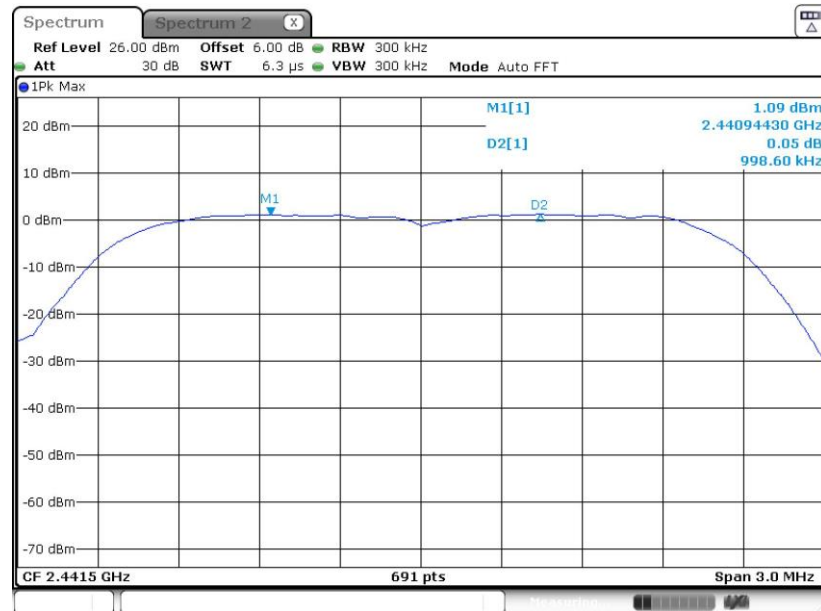



Channel Separation Plot on Channel 77 - 78

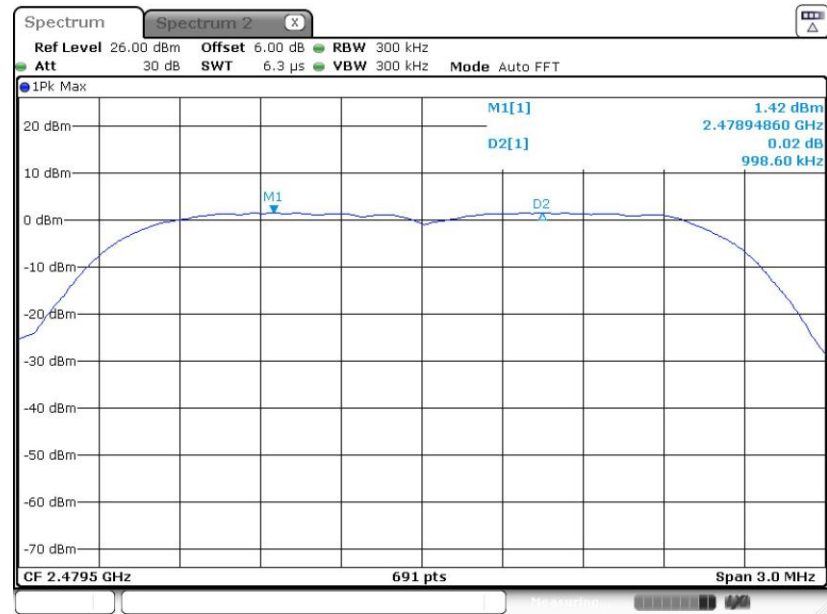

Date: 30 JUN 2022 17:03:35

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.


#### 3.3.4 Test Setup

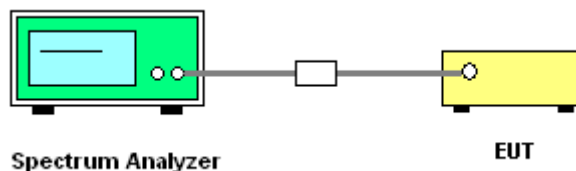

### 3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

**Package Transfer Time Plot**

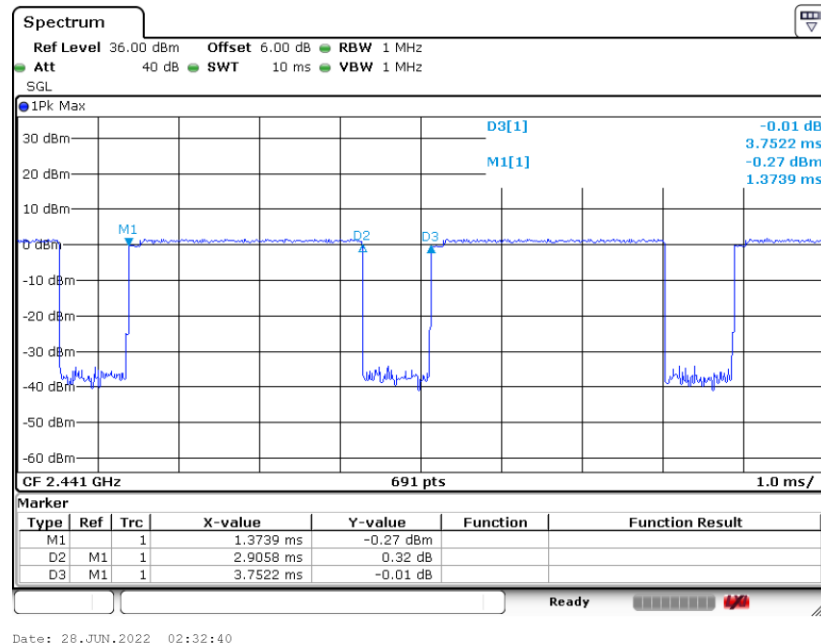

**Remark:**

- In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

### 3.4 20dB Bandwidth Measurement

#### 3.4.1 Limit of 20dB Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
The VBW is set to 3 times the RBW;  
Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Measure and record the results in the test report.

#### 3.4.4 Test Setup

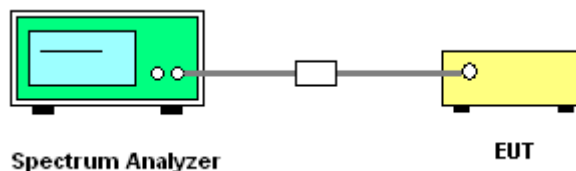

#### 3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.




<1Mbps>

20 dB Bandwidth Plot on Channel 00



Date: 30 JUN 2022 16:01:09


20 dB Bandwidth Plot on Channel 39

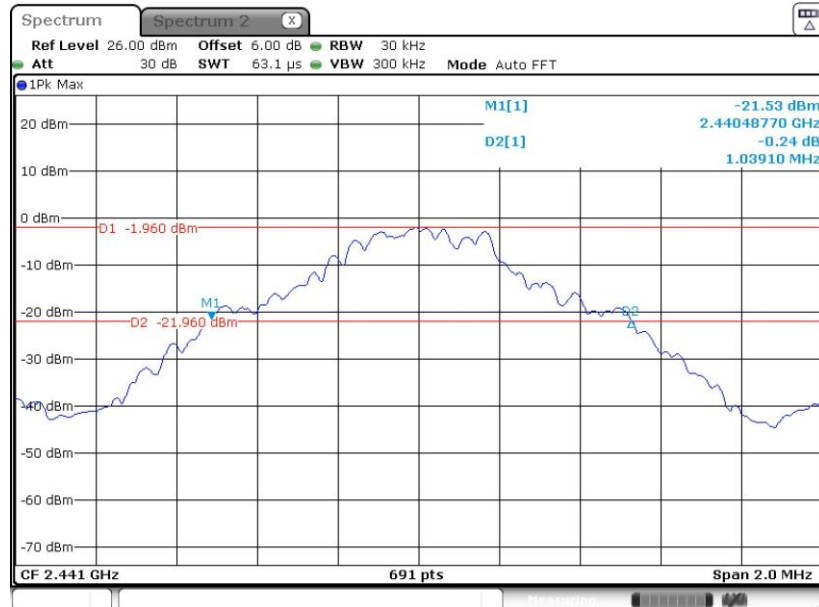

Date: 30 JUN 2022 16:21:53




### 20 dB Bandwidth Plot on Channel 78

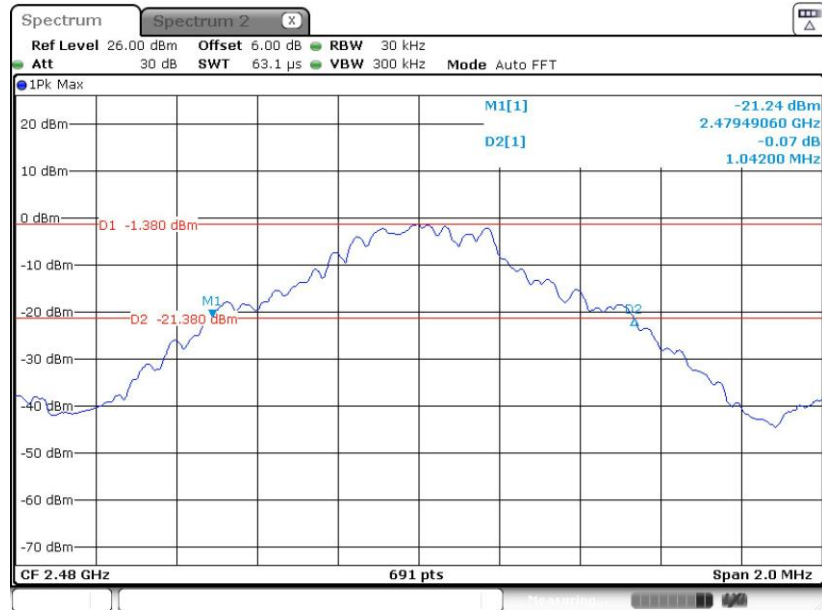

Date: 30 JUN 2022 16:10:26

### <2Mbps>

### 20 dB Bandwidth Plot on Channel 00

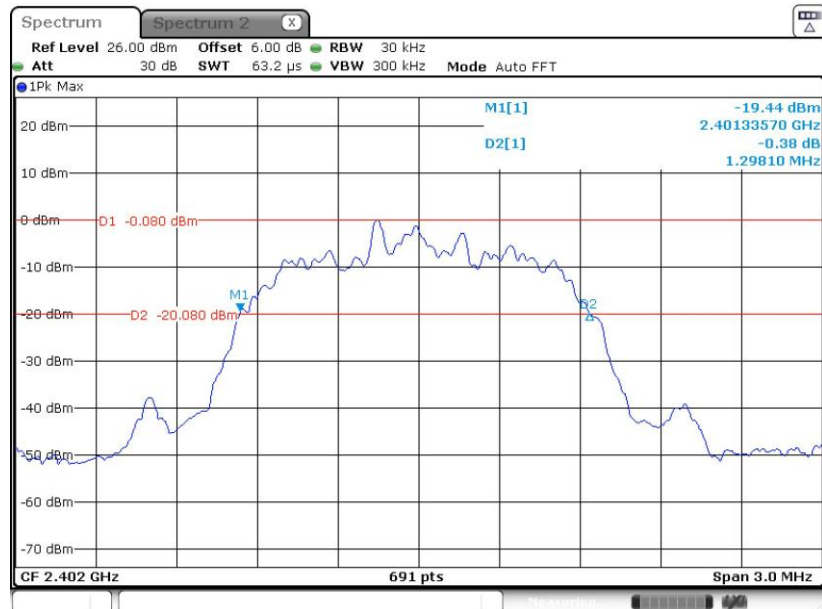

Date: 30 JUN 2022 16:20:10




### 20 dB Bandwidth Plot on Channel 39



Date: 30 JUN 2022 16:28:14

### 20 dB Bandwidth Plot on Channel 78

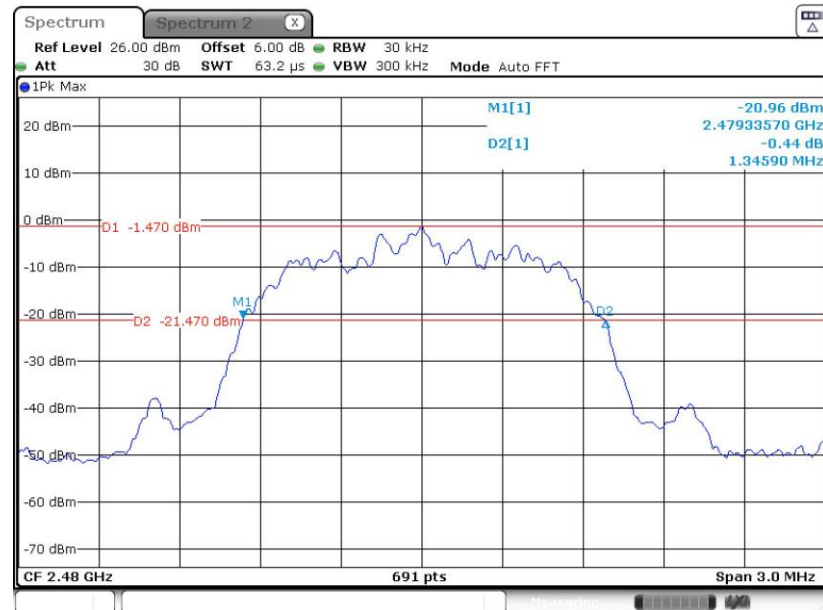

Date: 30 JUN 2022 16:38:41






<3Mbps>

20 dB Bandwidth Plot on Channel 00



Date: 30 JUN 2022 16:49:09


20 dB Bandwidth Plot on Channel 39

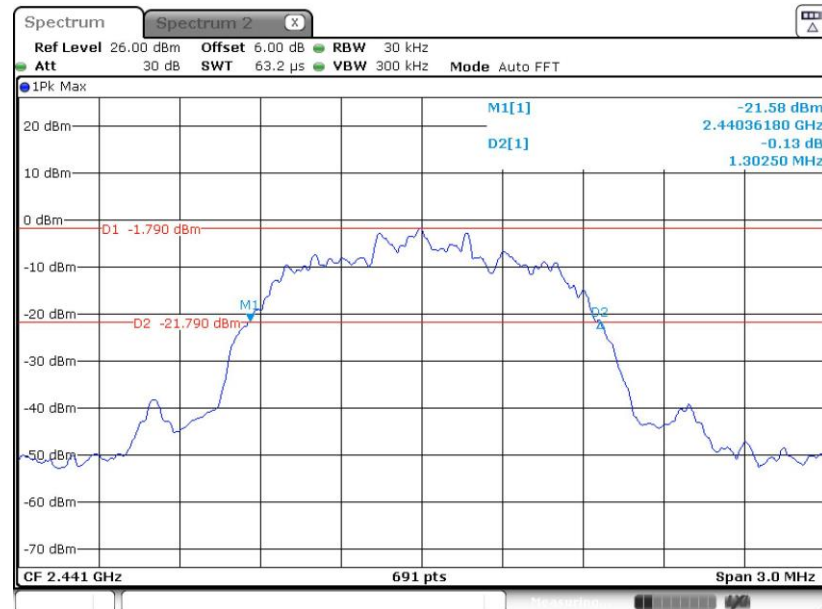

Date: 30 JUN 2022 16:53:25



### 20 dB Bandwidth Plot on Channel 78

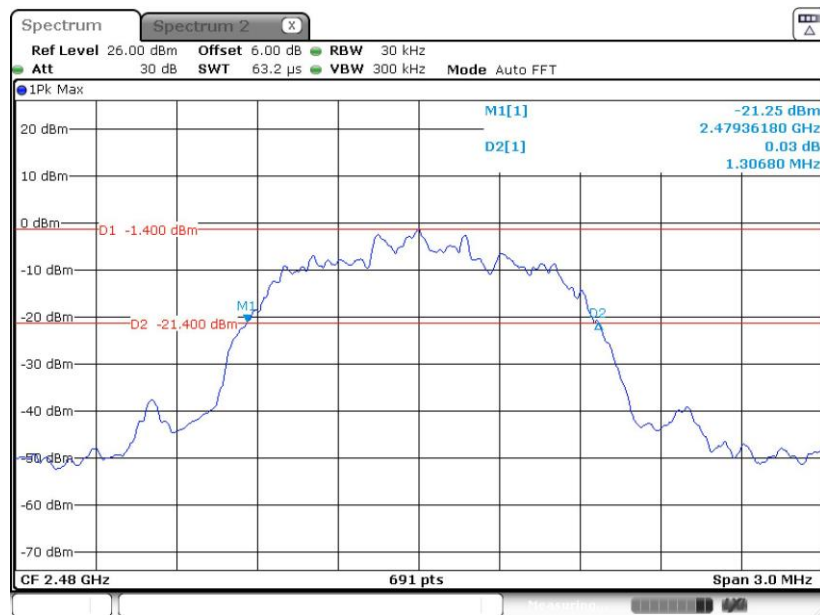

Date: 30 JUN 2022 16:58:59

## 3.5 Output Power Measurement

### 3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

- (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

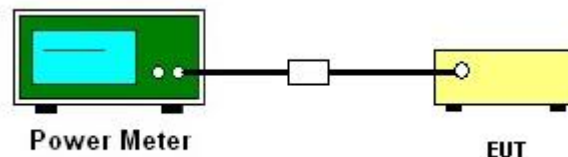

### 3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

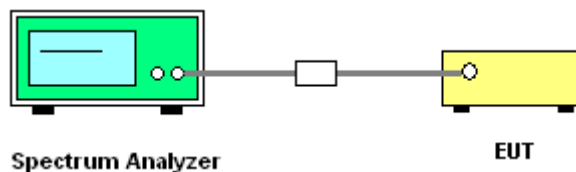





### 3.6.5 Test Result of Conducted Band Edges

<1Mbps>

#### Low Band Edge Plot on Channel 00

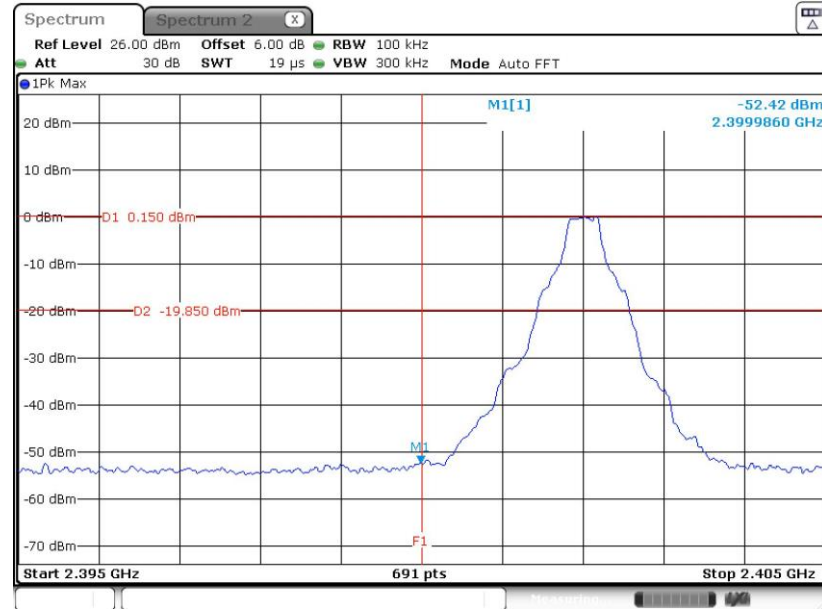


#### High Band Edge Plot on Channel 78

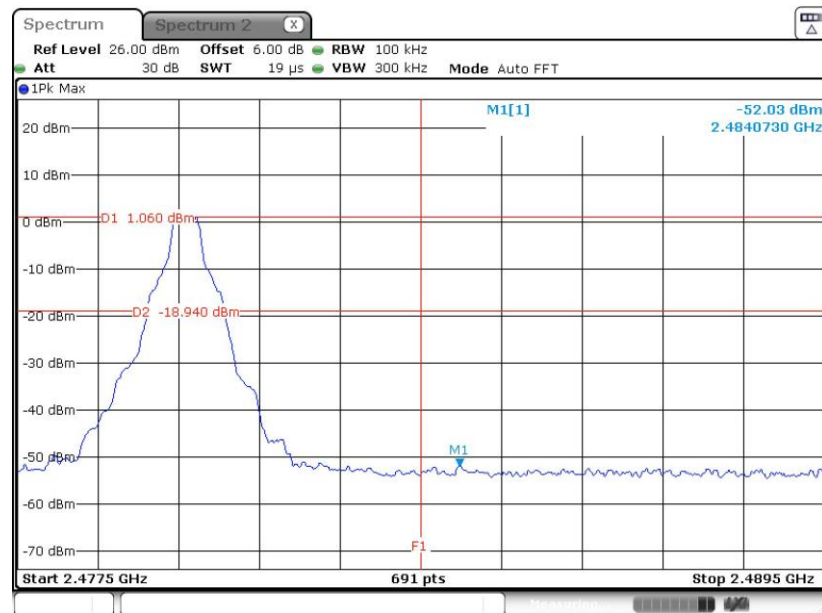




<2Mbps>

### Low Band Edge Plot on Channel 00

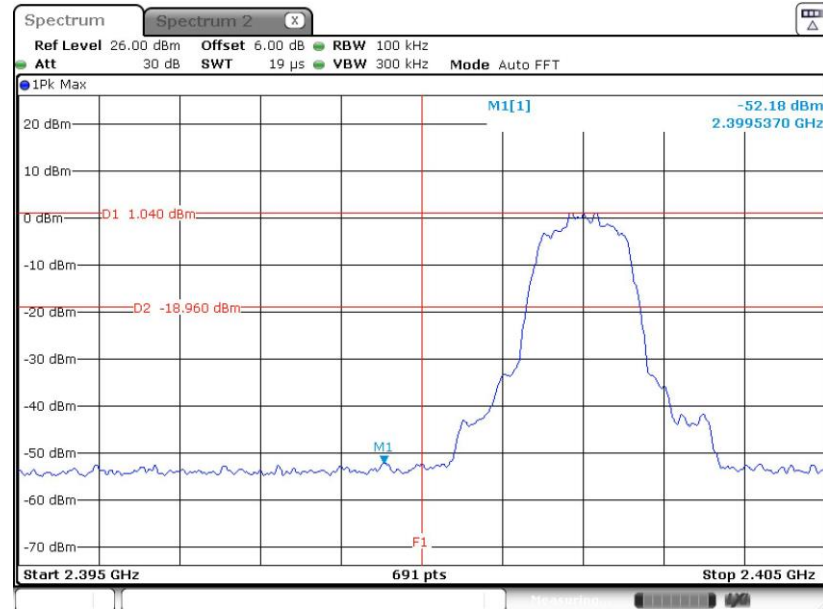

Date: 30 JUN 2022 16:23:04


### High Band Edge Plot on Channel 78

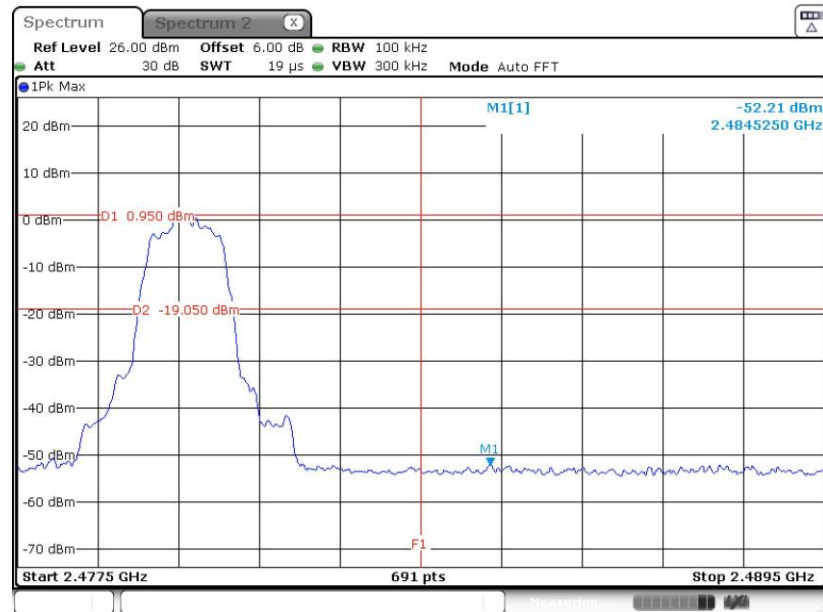

Date: 30 JUN 2022 16:39:18


<3Mbps>

Low Band Edge Plot on Channel 00

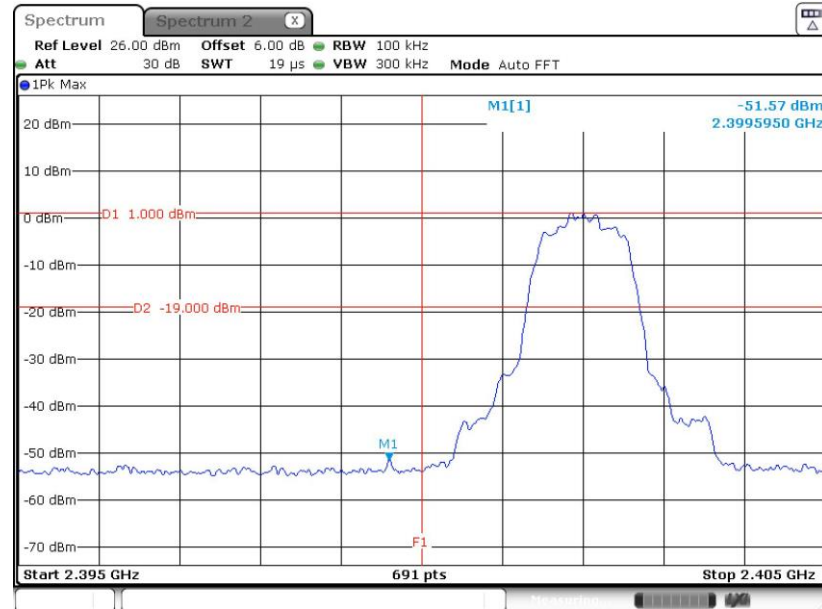

Date: 30 JUN 2022 16:49:32

High Band Edge Plot on Channel 78

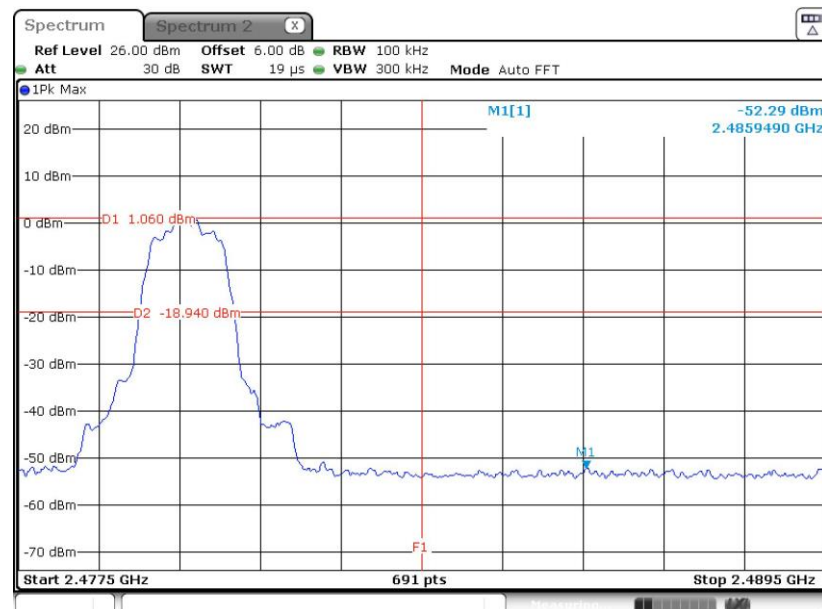


Date: 30 JUN 2022 16:59:41

### 3.6.6 Test Result of Conducted Hopping Mode Band Edges


<1Mbps>

#### Hopping Mode Low Band Edge Plot

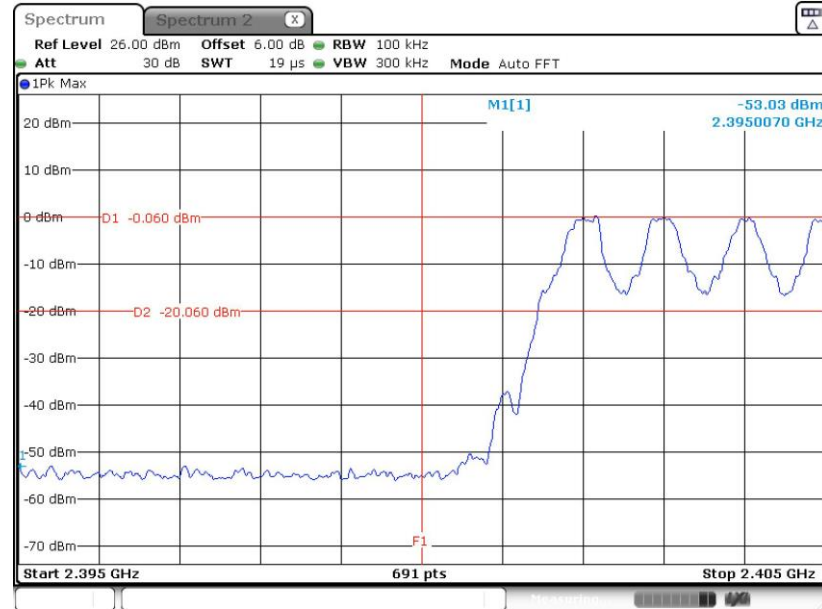

Date: 30 JUN 2022 16:16:42

#### Hopping Mode High Band Edge Plot

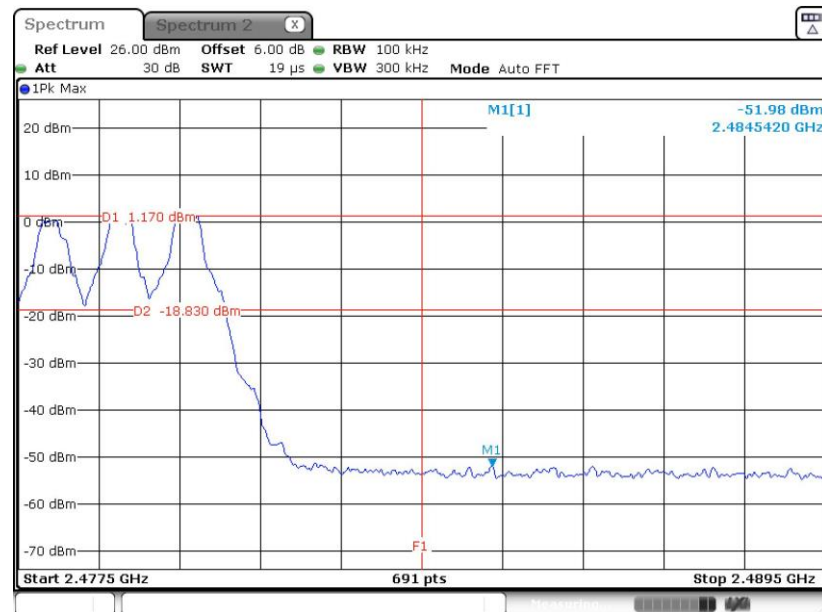


Date: 30 JUN 2022 16:16:25




<2Mbps>

### Hopping Mode Low Band Edge Plot

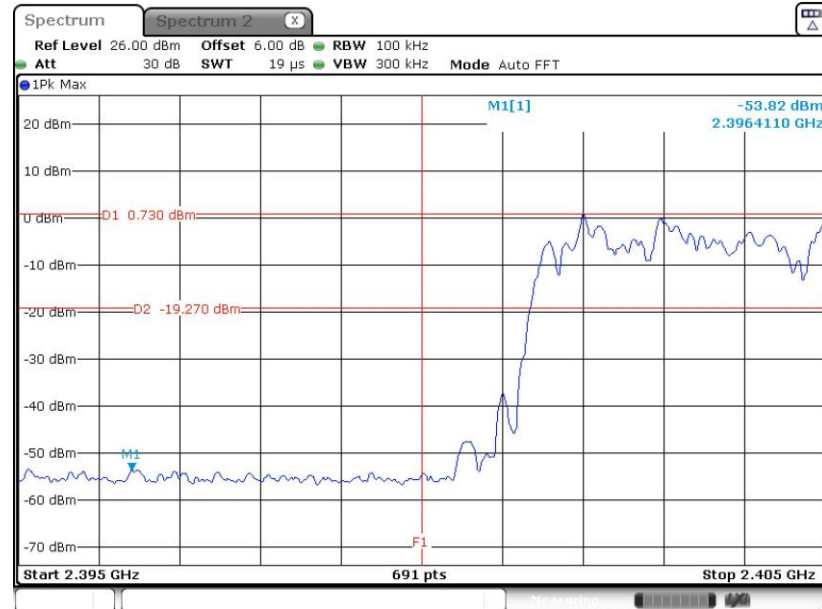

Date: 30 JUN 2022 16:44:30


### Hopping Mode High Band Edge Plot

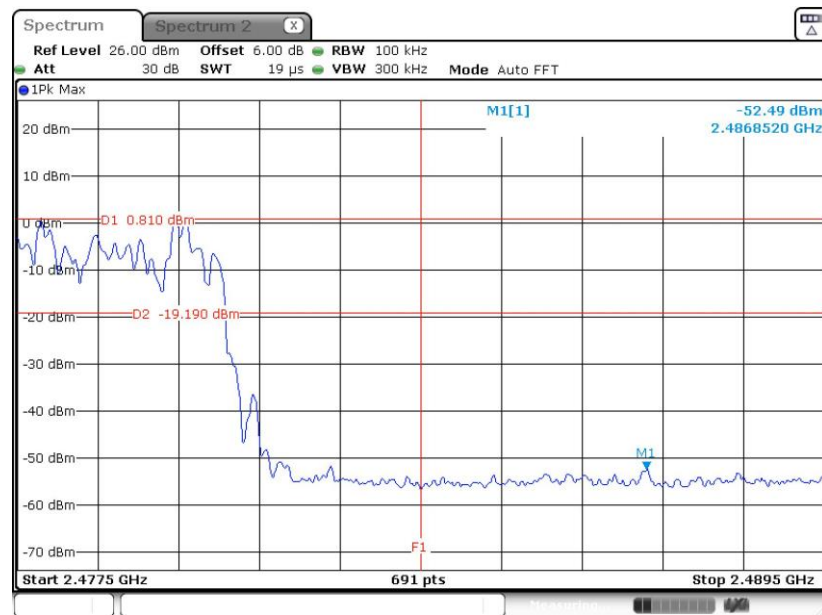

Date: 30 JUN 2022 16:44:42


<3Mbps>

### Hopping Mode Low Band Edge Plot

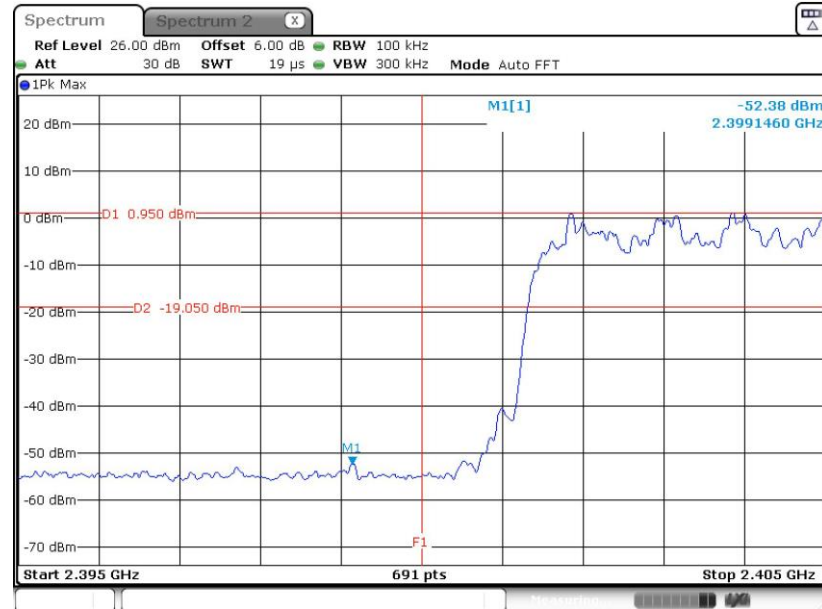

Date: 30 JUN 2022 16:47:58

### Hopping Mode High Band Edge Plot

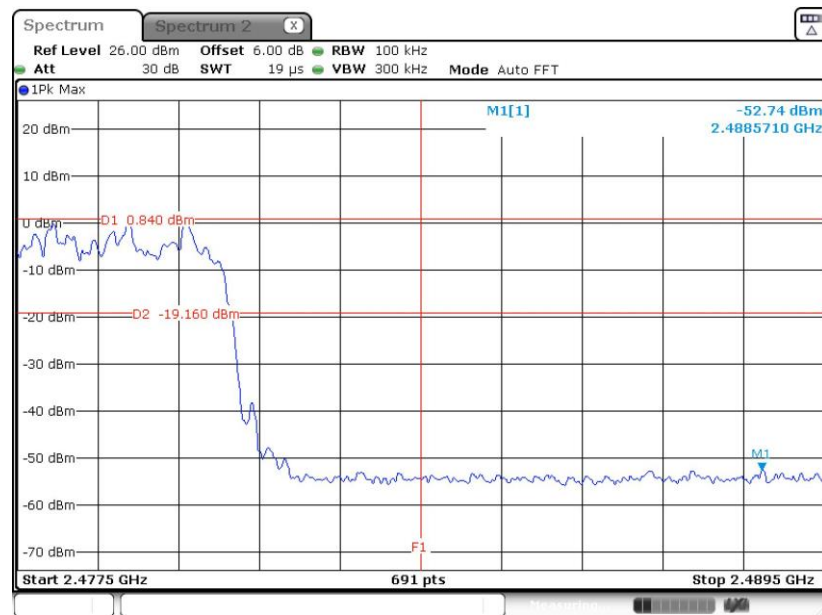

Date: 30 JUN 2022 16:47:36

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.7.4 Test Setup

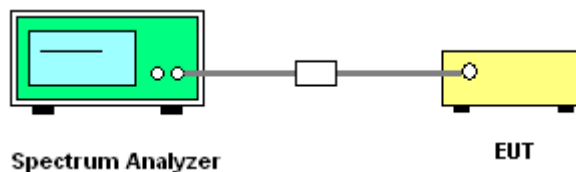


### 3.7.5 Test Result of Conducted Spurious Emission

<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

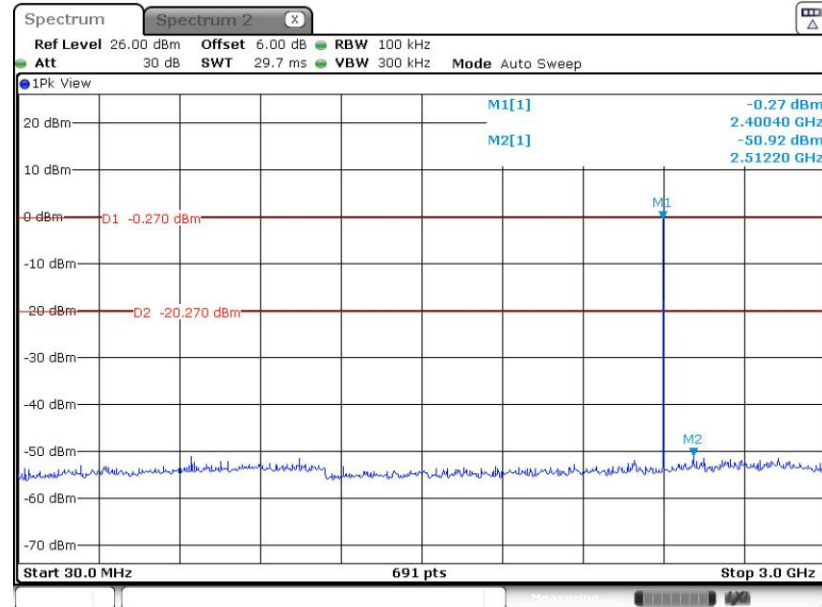


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

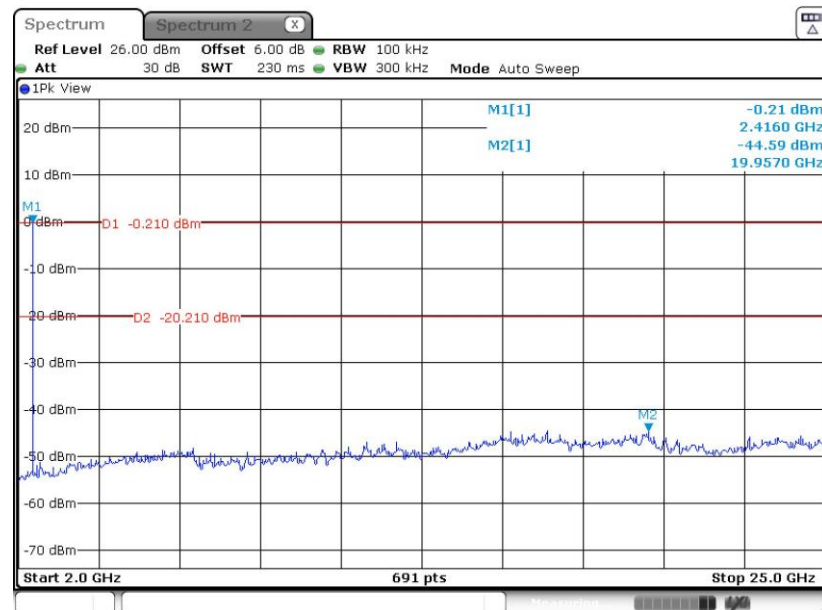




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

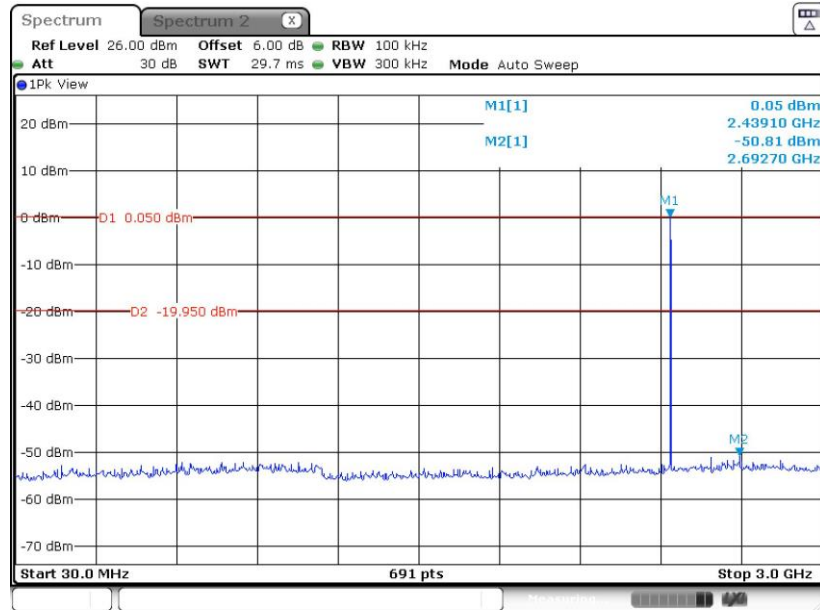


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

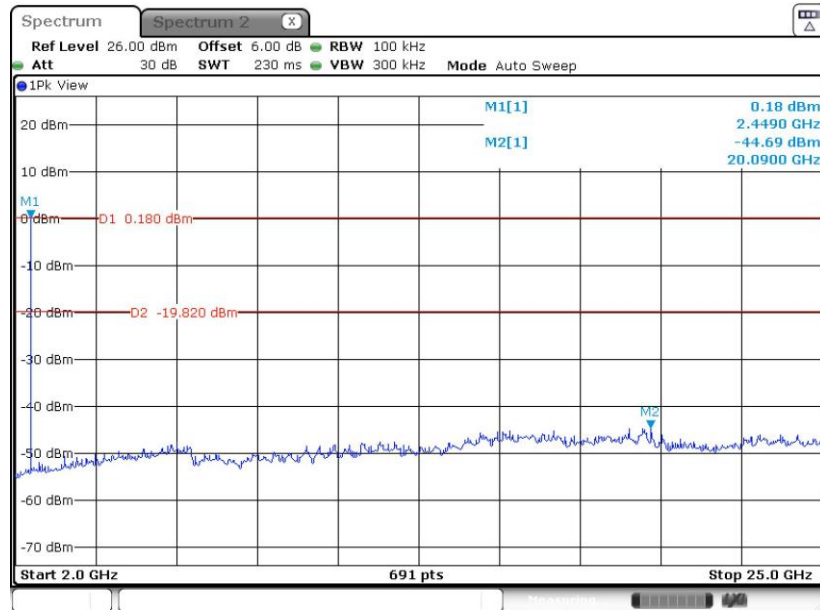




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

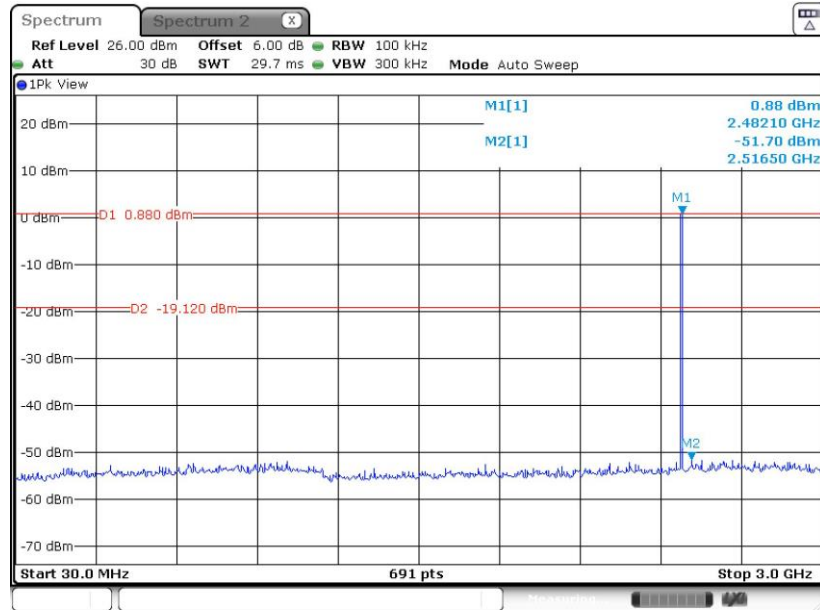

Date: 30 JUN 2022 16:12:29


CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

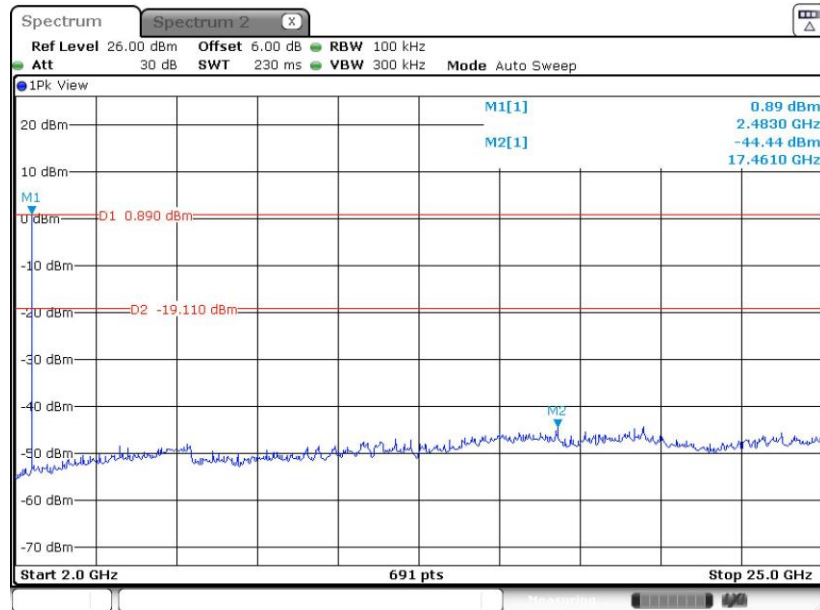

Date: 30 JUN 2022 16:12:56


<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

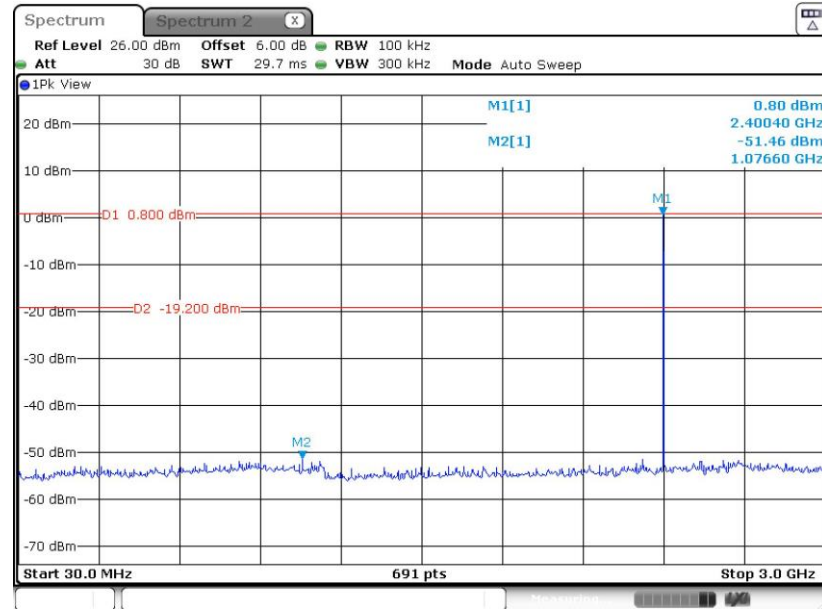


Date: 30 JUN 2022 16:24:26

CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

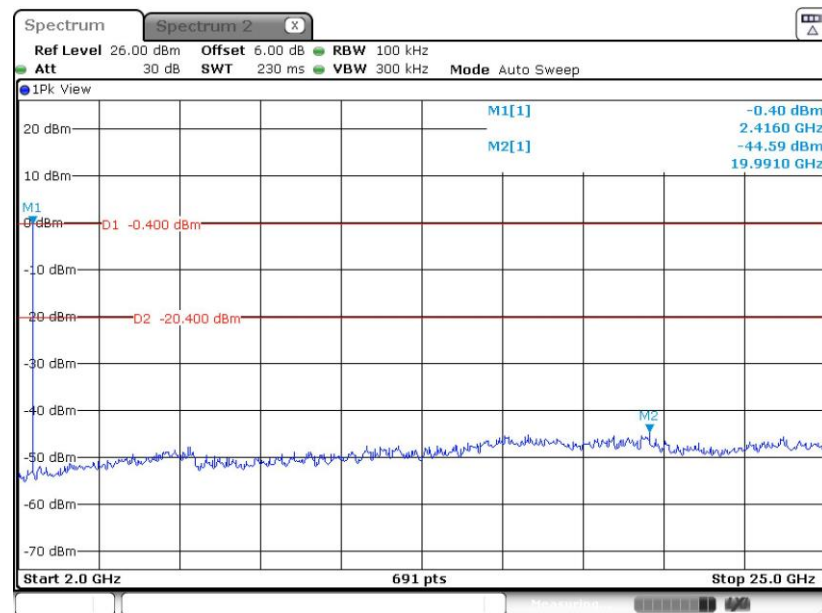


Date: 30 JUN 2022 16:24:53

### CSE Plot on Ch 39 between 30MHz ~ 3 GHz

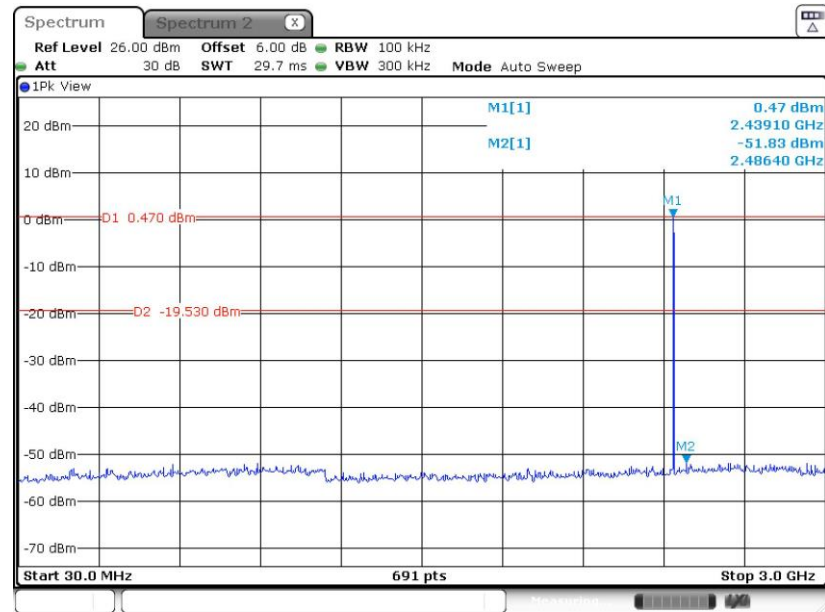

Date: 30.JUN.2022 16:29:36

### CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

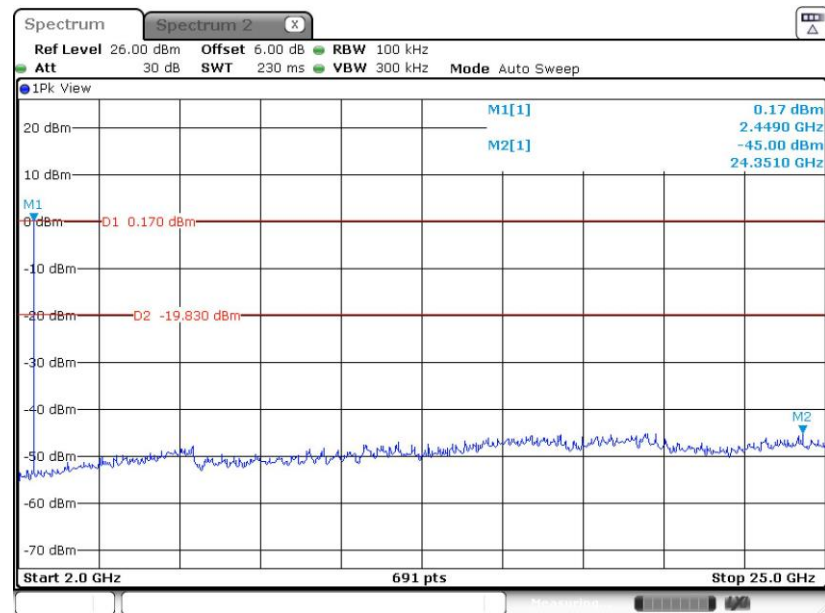


Date: 30.JUN.2022 16:30:07






CSE Plot on Ch 78 between 30MHz ~ 3 GHz

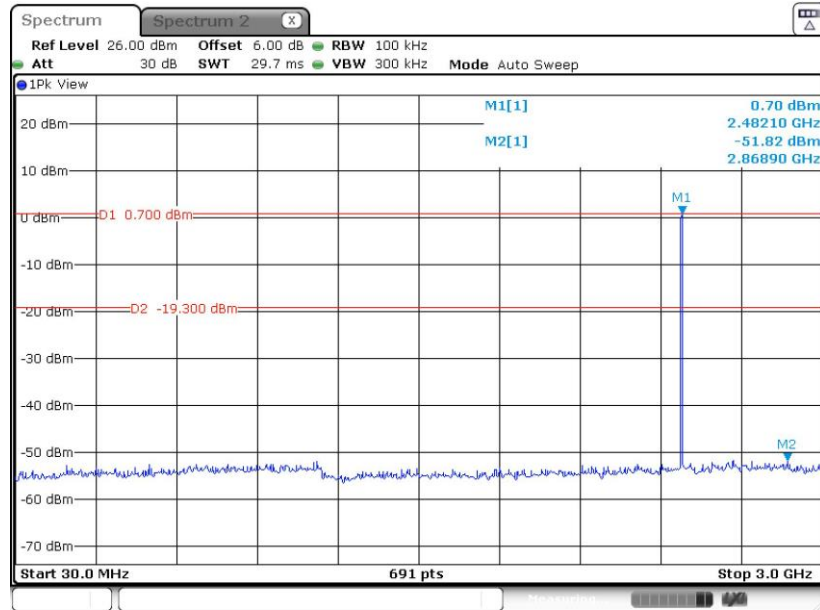

Date: 30 JUN 2022 16:40:33


CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

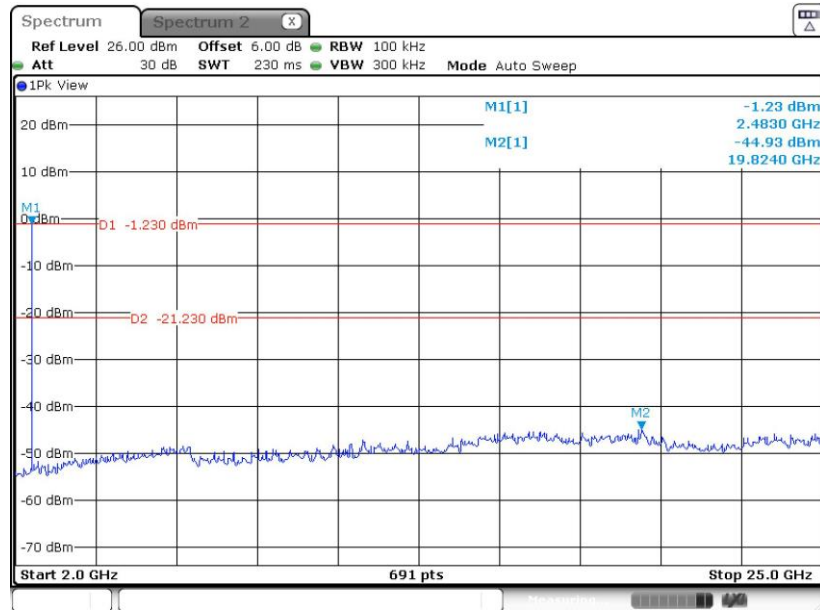

Date: 30 JUN 2022 16:41:00


<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

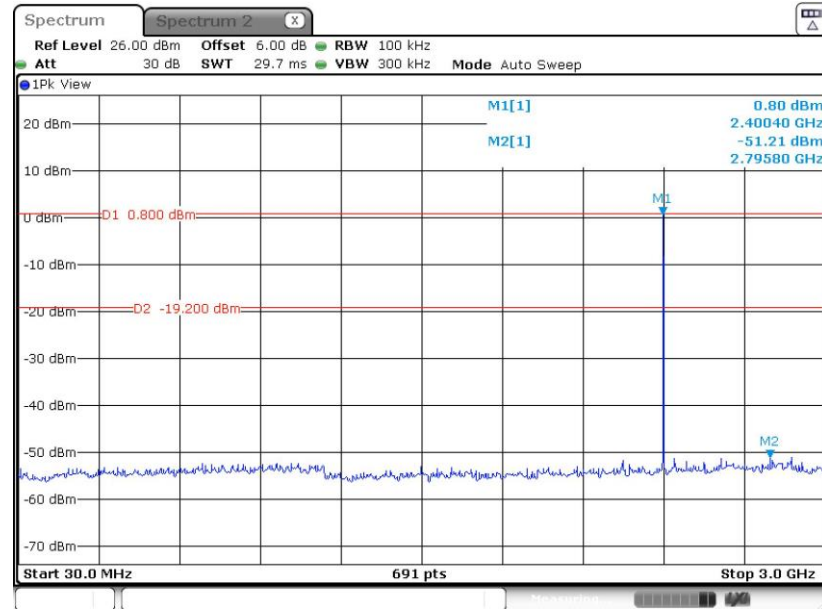

Date: 30 JUN 2022 16:50:56


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

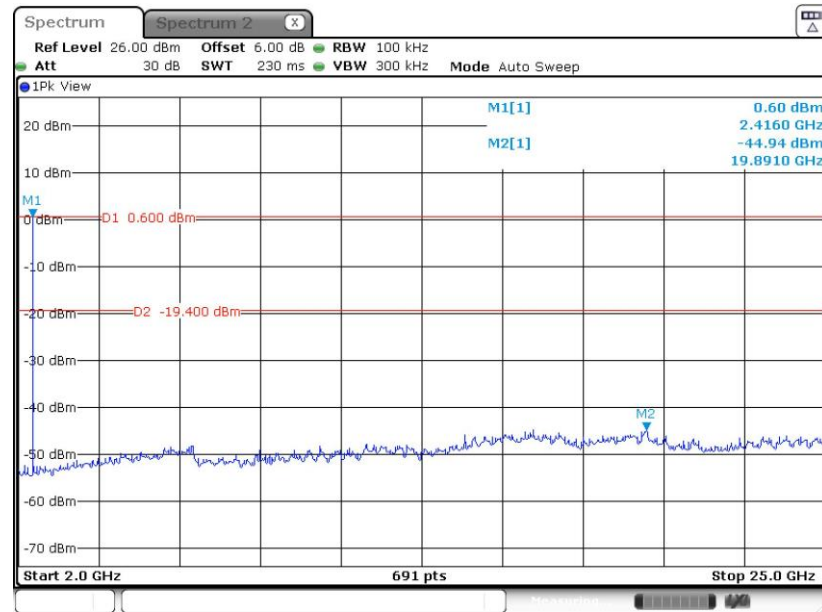

Date: 30 JUN 2022 16:51:25




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

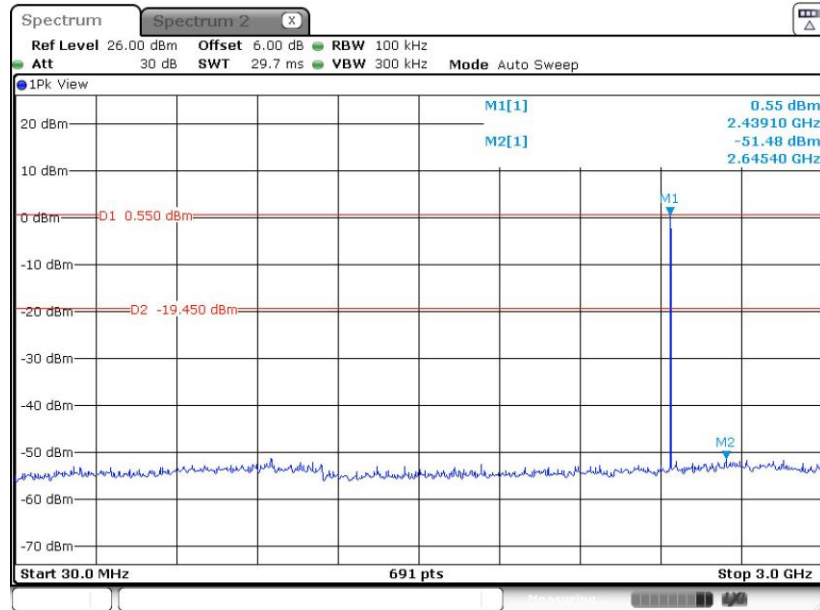

Date: 30 JUN 2022 16:55:01


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

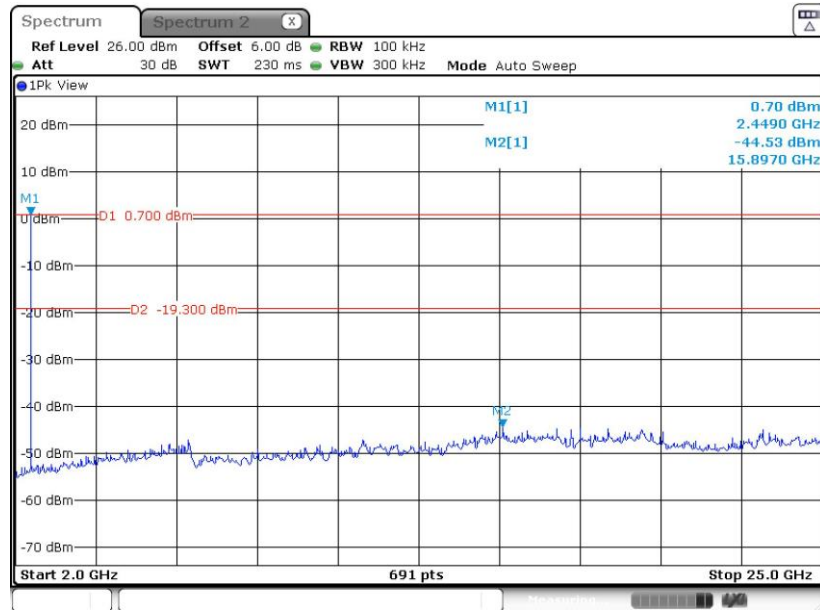


Date: 30 JUN 2022 16:55:28



CSE Plot on Ch 78 between 30MHz ~ 3 GHz

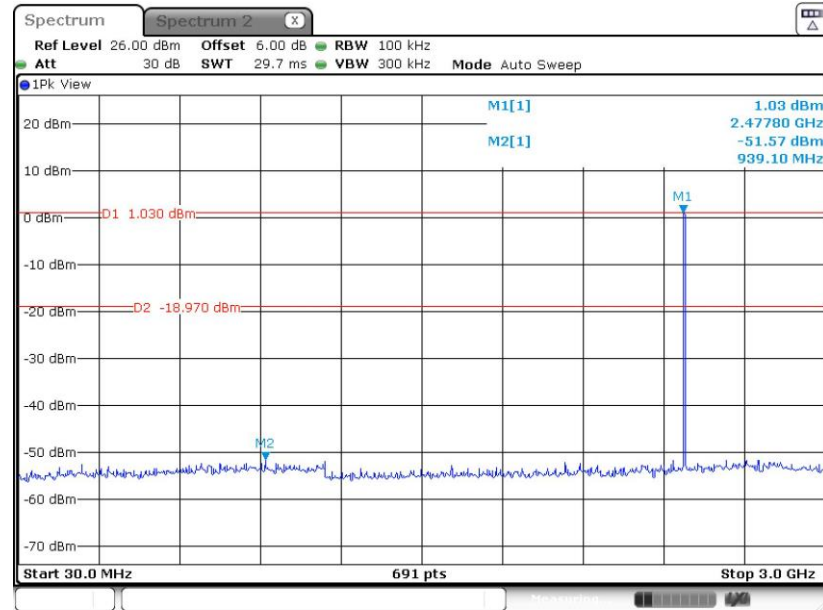

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

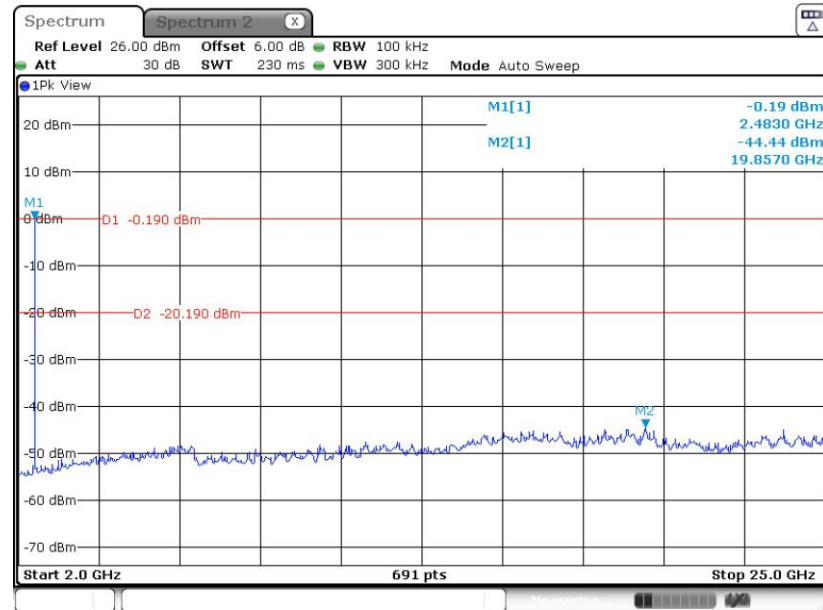

### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$
  
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

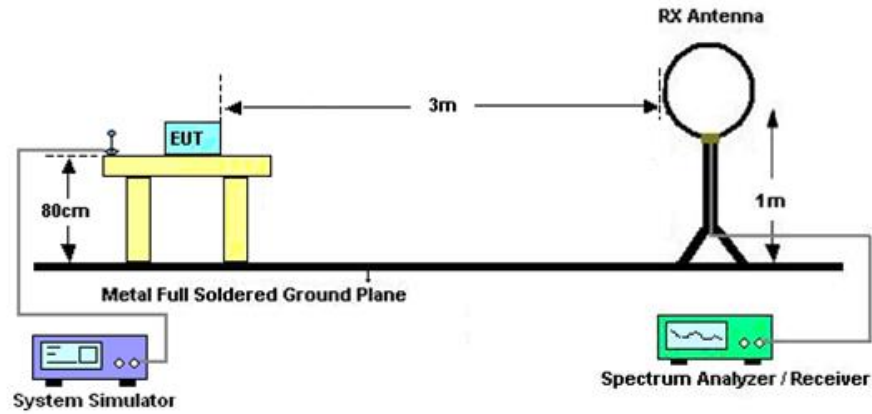

For radiated emissions from 30MHz to 1GHz

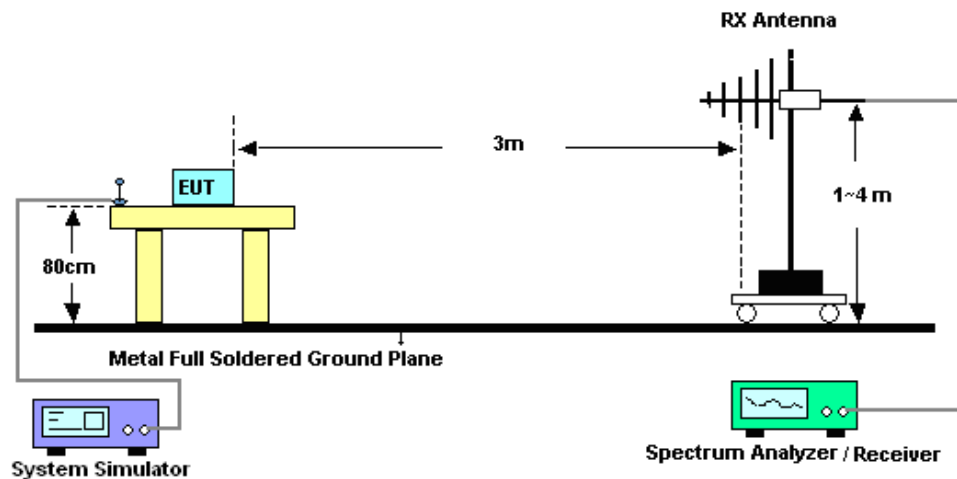

For radiated emissions above 1GHz

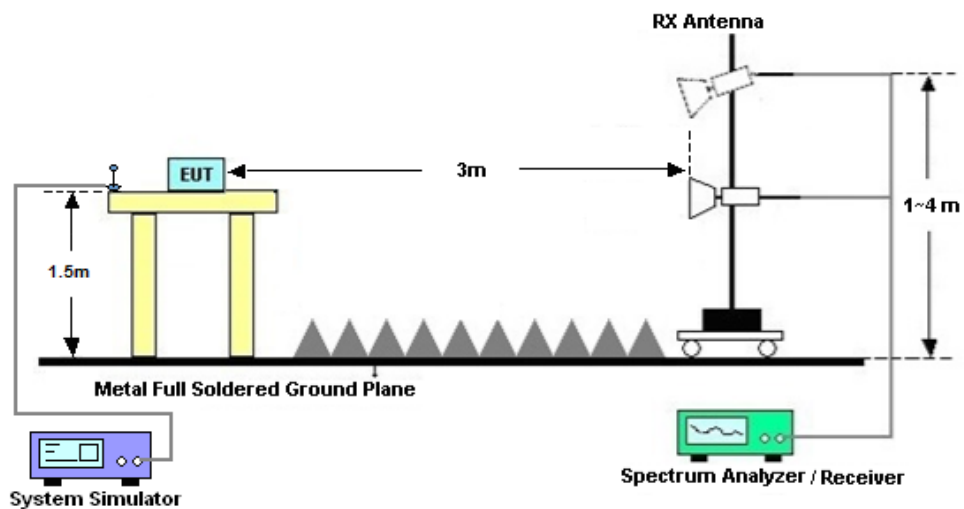



### **3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.8.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix B.

### **3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix B.

### **3.8.8 Duty cycle correction factor for average measurement**

Please refer to Appendix C.





## **3.9 Antenna Requirements**

### **3.9.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.9.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.9.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jun. 28, 2022~ Jun. 30, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jun. 28, 2022~ Jun. 30, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jun. 28, 2022~ Jun. 30, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 23	3Hz~8.5GHz;Ma x 30dBm	Oct. 14, 2021	Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY553705 28	10Hz~44GHz	Oct. 14, 2021	Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 23, 2021	Jul. 28, 2022	Oct. 22, 2022	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 22, 2021	Jul. 28, 2022	Dec. 21, 2022	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Dec. 24, 2021	Jul. 28, 2022	Dec. 23, 2022	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Dec. 23, 2021	Jul. 28, 2022	Dec. 22, 2022	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102220	30MHz ~1000MHz	Oct. 14, 2021	Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 05, 2022	Jul. 28, 2022	Jan. 04, 2023	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-001 01800-30-10 P	2082394	1Ghz-18Ghz	Jan. 05, 2022	Jul. 28, 2022	Jan. 04, 2023	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY532703 19	1GHz~26.5GHz	Oct. 14, 2021	Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F10409000 4	N/A	NCR	Jul. 28, 2022	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 28, 2022	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 28, 2022	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB
Occupied Channel Bandwidth	±0.03 %
Conducted Power Spectral Density	±0.54 dB

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1
---	-----

----- THE END -----



## **Appendix A. Conducted Test Results**

**Bluetooth**

Test Engineer:	Albert shi	Temperature:	20~26	°C
Test Date:	2022/6/28~2022/6/30	Relative Humidity:	40~51	%

**TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (kHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	1.042	0.946	1002.900	0.6947	Pass
DH	1Mbps	1	39	2441	1.039	0.949	1002.900	0.6927	Pass
DH	1Mbps	1	78	2480	1.042	0.946	1002.900	0.6947	Pass
2DH	2Mbps	1	0	2402	1.298	1.192	1007.200	0.8654	Pass
2DH	2Mbps	1	39	2441	1.342	1.201	1120.100	0.8943	Pass
2DH	2Mbps	1	78	2480	1.346	1.201	1002.900	0.8973	Pass
3DH	3Mbps	1	0	2402	1.307	1.181	998.600	0.8712	Pass
3DH	3Mbps	1	39	2441	1.303	1.181	998.600	0.8683	Pass
3DH	3Mbps	1	78	2480	1.307	1.181	998.600	0.8712	Pass

**TEST RESULTS DATA****Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.9058	0.31	0.4	Pass
AFH	20	53.33	2.9058	0.15	0.4	Pass

**TEST RESULTS DATA****Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	0.02	20.97	Pass
	39	1	0.24	20.97	Pass
	78	1	0.70	20.97	Pass

2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	2.45	20.97	Pass
	39	1	2.54	20.97	Pass
	78	1	2.64	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	2.78	20.97	Pass
	39	1	2.84	20.97	Pass
	78	1	2.67	20.97	Pass

**TEST RESULTS DATA****Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass



## Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	22 ~ 23℃
		Temperature :	41 ~ 42%

## Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	Bluetooth BR_GFSK	00	2402	3Mbps	-	-
Mode 2	2400-2483.5	SISO	Bluetooth BR_GFSK	39	2441	3Mbps	-	-
Mode 3	2400-2483.5	SISO	Bluetooth BR_GFSK	78	2480	3Mbps	-	-



## Summary of each worse mode



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2379.42	56.50	74.00	-17.50	V	PEAK	Pass	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	42.38	74.00	-31.62	V	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2499.94	56.17	74.00	-17.83	V	PEAK	Pass	Band Edge





Mode	1																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																			
ANT	SISO																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2371.10</td><td>55.84</td><td>74.00</td><td>-18.16</td><td>43.65</td><td>31.93</td><td>7.13</td><td>32.87</td><td>6.00</td><td>183</td><td>0 PEAK</td></tr><tr><td>2</td><td>2371.10</td><td>31.05</td><td>54.00</td><td>-22.95</td><td>18.86</td><td>31.93</td><td>7.13</td><td>32.87</td><td>6.00</td><td>183</td><td>0 Average</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2371.10	55.84	74.00	-18.16	43.65	31.93	7.13	32.87	6.00	183	0 PEAK	2	2371.10	31.05	54.00	-22.95	18.86	31.93	7.13	32.87	6.00	183	0 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																									
1	2371.10	55.84	74.00	-18.16	43.65	31.93	7.13	32.87	6.00	183	0 PEAK																																																									
2	2371.10	31.05	54.00	-22.95	18.86	31.93	7.13	32.87	6.00	183	0 Average																																																									
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>87.28</td><td>-----</td><td>-----</td><td>74.95</td><td>31.99</td><td>7.18</td><td>32.84</td><td>6.00</td><td>183</td><td>0 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>62.49</td><td>-----</td><td>-----</td><td>50.16</td><td>31.99</td><td>7.18</td><td>32.84</td><td>6.00</td><td>183</td><td>0 Average</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	87.28	-----	-----	74.95	31.99	7.18	32.84	6.00	183	0 PEAK	2	2402.00	62.49	-----	-----	50.16	31.99	7.18	32.84	6.00	183	0 Average	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																									
1	2402.00	87.28	-----	-----	74.95	31.99	7.18	32.84	6.00	183	0 PEAK																																																									
2	2402.00	62.49	-----	-----	50.16	31.99	7.18	32.84	6.00	183	0 Average																																																									



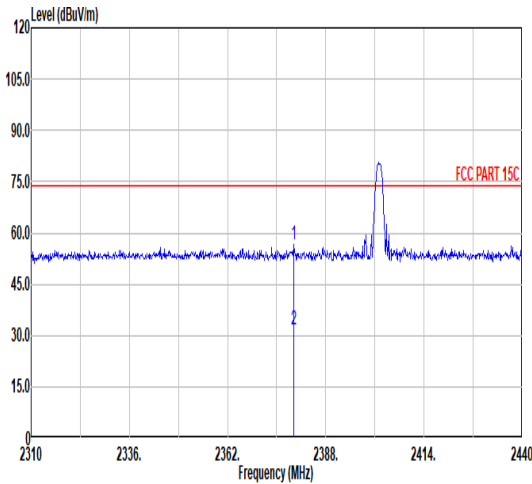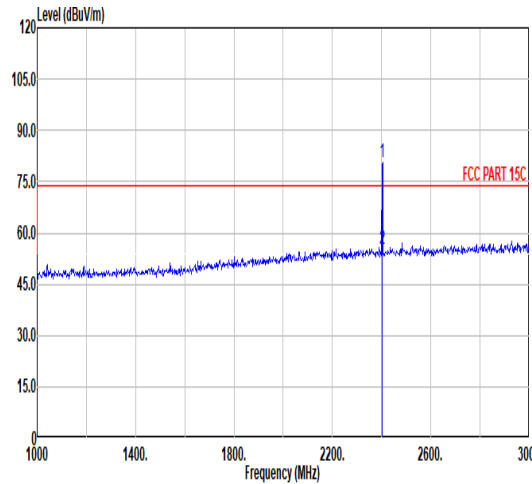

Mode	1																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																													
ANT	SISO																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2379.42</td><td>56.50</td><td>74.00</td><td>-17.50</td><td>44.26</td><td>31.95</td><td>7.15</td><td>32.86</td><td>6.00</td><td>195</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>2379.42</td><td>31.71</td><td>54.00</td><td>-22.29</td><td>19.47</td><td>31.95</td><td>7.15</td><td>32.86</td><td>6.00</td><td>195</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.42	56.50	74.00	-17.50	44.26	31.95	7.15	32.86	6.00	195	360	PEAK	2	2379.42	31.71	54.00	-22.29	19.47	31.95	7.15	32.86	6.00	195	360	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>80.42</td><td>-----</td><td>-----</td><td>68.09</td><td>31.99</td><td>7.18</td><td>32.84</td><td>6.00</td><td>195</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>55.63</td><td>-----</td><td>-----</td><td>43.12</td><td>31.99</td><td>7.18</td><td>32.84</td><td>6.00</td><td>195</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	80.42	-----	-----	68.09	31.99	7.18	32.84	6.00	195	360	PEAK	2	2402.00	55.63	-----	-----	43.12	31.99	7.18	32.84	6.00	195	360	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2379.42	56.50	74.00	-17.50	44.26	31.95	7.15	32.86	6.00	195	360	PEAK																																																																																																																		
2	2379.42	31.71	54.00	-22.29	19.47	31.95	7.15	32.86	6.00	195	360	Average																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2402.00	80.42	-----	-----	68.09	31.99	7.18	32.84	6.00	195	360	PEAK																																																																																																																		
2	2402.00	55.63	-----	-----	43.12	31.99	7.18	32.84	6.00	195	360	Average																																																																																																																		

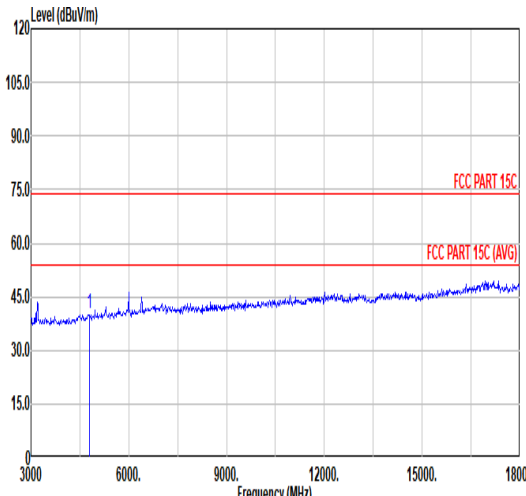
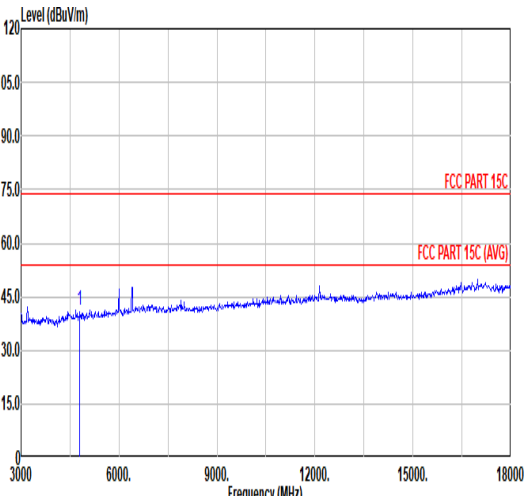


Mode	1																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak  Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.14</td><td>74.00</td><td>-33.86</td><td>61.06</td><td>34.07</td><td>10.27</td><td>65.26</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.14	74.00	-33.86	61.06	34.07	10.27	65.26	0.00	300	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>41.19</td><td>74.00</td><td>-32.81</td><td>62.11</td><td>34.07</td><td>10.27</td><td>65.26</td><td>0.00</td><td>300</td><td>176</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.19	74.00	-32.81	62.11	34.07	10.27	65.26	0.00	300	176	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4804.00	40.14	74.00	-33.86	61.06	34.07	10.27	65.26	0.00	300	360	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4804.00	41.19	74.00	-32.81	62.11	34.07	10.27	65.26	0.00	300	176	PEAK																																																																																								





Mode	2																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak  Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>39.89</td><td>74.00</td><td>-34.11</td><td>60.68</td><td>34.13</td><td>10.35</td><td>65.27</td><td>0.00</td><td>300</td><td>122</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>42.16</td><td>74.00</td><td>-31.84</td><td>59.35</td><td>35.41</td><td>12.79</td><td>65.39</td><td>0.00</td><td>300</td><td>3</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	39.89	74.00	-34.11	60.68	34.13	10.35	65.27	0.00	300	122	PEAK	2	7323.00	42.16	74.00	-31.84	59.35	35.41	12.79	65.39	0.00	300	3	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>40.44</td><td>74.00</td><td>-33.56</td><td>61.23</td><td>34.13</td><td>10.35</td><td>65.27</td><td>0.00</td><td>100</td><td>136</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>42.38</td><td>74.00</td><td>-31.62</td><td>59.57</td><td>35.41</td><td>12.79</td><td>65.39</td><td>0.00</td><td>300</td><td>127</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	40.44	74.00	-33.56	61.23	34.13	10.35	65.27	0.00	100	136	PEAK	2	7323.00	42.38	74.00	-31.62	59.57	35.41	12.79	65.39	0.00	300	127	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4882.00	39.89	74.00	-34.11	60.68	34.13	10.35	65.27	0.00	300	122	PEAK																																																																																																												
2	7323.00	42.16	74.00	-31.84	59.35	35.41	12.79	65.39	0.00	300	3	PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4882.00	40.44	74.00	-33.56	61.23	34.13	10.35	65.27	0.00	100	136	PEAK																																																																																																												
2	7323.00	42.38	74.00	-31.62	59.57	35.41	12.79	65.39	0.00	300	127	PEAK																																																																																																												

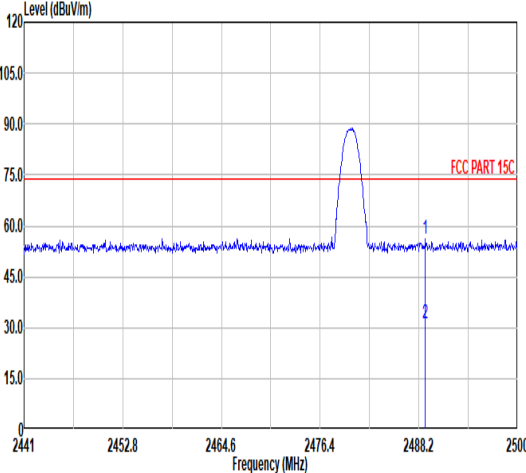
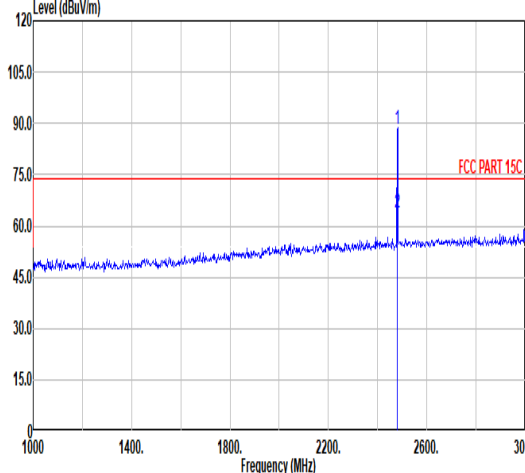


Mode	3																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	SISO																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.97</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>43.39</td><td>32.17</td><td>7.34</td><td>32.81</td><td>6.00</td><td>100</td><td>162</td><td>PEAK</td></tr><tr><td>2</td><td>2488.97</td><td>31.30</td><td>54.00</td><td>-22.70</td><td>18.60</td><td>32.17</td><td>7.34</td><td>32.81</td><td>6.00</td><td>100</td><td>162</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.97	56.09	74.00	-17.91	43.39	32.17	7.34	32.81	6.00	100	162	PEAK	2	2488.97	31.30	54.00	-22.70	18.60	32.17	7.34	32.81	6.00	100	162	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>88.36</td><td>-----</td><td>-----</td><td>75.71</td><td>32.15</td><td>7.32</td><td>32.82</td><td>6.00</td><td>100</td><td>162</td><td>Peak</td></tr><tr><td>2</td><td>2480.00</td><td>63.57</td><td>-----</td><td>-----</td><td>51.16</td><td>32.15</td><td>7.32</td><td>32.82</td><td>6.00</td><td>100</td><td>162</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	88.36	-----	-----	75.71	32.15	7.32	32.82	6.00	100	162	Peak	2	2480.00	63.57	-----	-----	51.16	32.15	7.32	32.82	6.00	100	162	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2488.97	56.09	74.00	-17.91	43.39	32.17	7.34	32.81	6.00	100	162	PEAK																																																																																																																		
2	2488.97	31.30	54.00	-22.70	18.60	32.17	7.34	32.81	6.00	100	162	Average																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	88.36	-----	-----	75.71	32.15	7.32	32.82	6.00	100	162	Peak																																																																																																																		
2	2480.00	63.57	-----	-----	51.16	32.15	7.32	32.82	6.00	100	162	Average																																																																																																																		

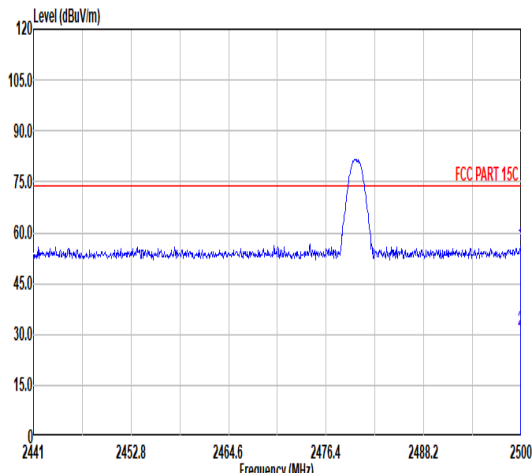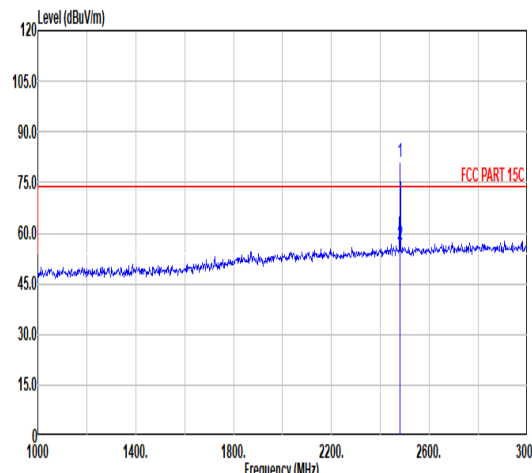

Mode	3																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	SISO																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.94</td><td>56.17</td><td>74.00</td><td>-17.83</td><td>43.43</td><td>32.19</td><td>7.36</td><td>32.81</td><td>6.00</td><td>281</td><td>128</td><td>PEAK</td></tr><tr><td>2</td><td>2499.94</td><td>31.38</td><td>54.00</td><td>-22.62</td><td>18.64</td><td>32.19</td><td>7.36</td><td>32.81</td><td>6.00</td><td>281</td><td>128</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.94	56.17	74.00	-17.83	43.43	32.19	7.36	32.81	6.00	281	128	PEAK	2	2499.94	31.38	54.00	-22.62	18.64	32.19	7.36	32.81	6.00	281	128	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>81.28</td><td>-----</td><td>-----</td><td>68.63</td><td>32.15</td><td>7.32</td><td>32.82</td><td>6.00</td><td>281</td><td>128</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>56.49</td><td>-----</td><td>-----</td><td>43.84</td><td>32.15</td><td>7.32</td><td>32.82</td><td>6.00</td><td>281</td><td>128</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	81.28	-----	-----	68.63	32.15	7.32	32.82	6.00	281	128	PEAK	2	2480.00	56.49	-----	-----	43.84	32.15	7.32	32.82	6.00	281	128	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2499.94	56.17	74.00	-17.83	43.43	32.19	7.36	32.81	6.00	281	128	PEAK																																																																																																																		
2	2499.94	31.38	54.00	-22.62	18.64	32.19	7.36	32.81	6.00	281	128	Average																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	81.28	-----	-----	68.63	32.15	7.32	32.82	6.00	281	128	PEAK																																																																																																																		
2	2480.00	56.49	-----	-----	43.84	32.15	7.32	32.82	6.00	281	128	Average																																																																																																																		

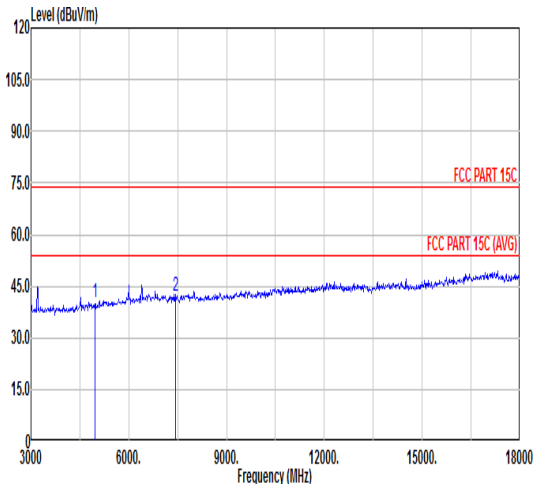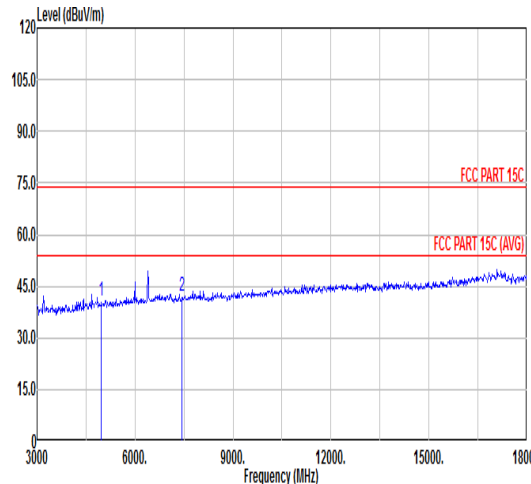

Mode	3																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																									
ANT	SISO																																																																																																									
Pol.	Horizontal								Vertical																																																																																																	
Peak  Avg																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>40.48</td><td>74.00</td><td>-33.52</td><td>61.11</td><td>34.20</td><td>10.44</td><td>65.27</td></tr><tr><td>2</td><td>7440.00</td><td>42.25</td><td>74.00</td><td>-31.75</td><td>59.60</td><td>35.42</td><td>12.93</td><td>65.70</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	40.48	74.00	-33.52	61.11	34.20	10.44	65.27	2	7440.00	42.25	74.00	-31.75	59.60	35.42	12.93	65.70	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>40.73</td><td>74.00</td><td>-33.27</td><td>61.36</td><td>34.20</td><td>10.44</td><td>65.27</td></tr><tr><td>2</td><td>7440.00</td><td>42.17</td><td>74.00</td><td>-31.83</td><td>59.52</td><td>35.42</td><td>12.93</td><td>65.70</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	40.73	74.00	-33.27	61.36	34.20	10.44	65.27	2	7440.00	42.17	74.00	-31.83	59.52	35.42	12.93	65.70
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																		
1	4960.00	40.48	74.00	-33.52	61.11	34.20	10.44	65.27																																																																																																		
2	7440.00	42.25	74.00	-31.75	59.60	35.42	12.93	65.70																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																		
1	4960.00	40.73	74.00	-33.27	61.36	34.20	10.44	65.27																																																																																																		
2	7440.00	42.17	74.00	-31.83	59.52	35.42	12.93	65.70																																																																																																		



		1																																																																																																																																																																																																										
Mode	Emission below 1GHz																																																																																																																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																																																																											
ANT	SISO																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																					
Peak QP	<div><div><div>Data: 7</div><div><table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>250.19</td><td>26.27</td><td>-19.73</td><td>46.00</td><td>38.17</td><td>18.40</td><td>2.10</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>2</td><td>375.32</td><td>27.01</td><td>-18.99</td><td>46.00</td><td>35.73</td><td>20.80</td><td>2.88</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>3</td><td>480.08</td><td>35.60</td><td>-10.40</td><td>46.00</td><td>41.46</td><td>23.40</td><td>3.14</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>4</td><td>624.61</td><td>38.47</td><td>-7.53</td><td>46.00</td><td>41.09</td><td>26.10</td><td>3.68</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>5</td><td>889.42</td><td>38.12</td><td>-7.88</td><td>46.00</td><td>36.44</td><td>28.82</td><td>4.44</td><td>31.58</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>6</td><td>898.15</td><td>39.84</td><td>-6.16</td><td>46.00</td><td>37.98</td><td>28.90</td><td>4.48</td><td>31.52</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr></tbody></table></div><div><div>Data: 8</div><div><table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>250.19</td><td>24.05</td><td>-21.95</td><td>46.00</td><td>35.95</td><td>18.40</td><td>2.10</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>2</td><td>480.08</td><td>33.74</td><td>-12.26</td><td>46.00</td><td>39.60</td><td>23.40</td><td>3.14</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>3</td><td>624.61</td><td>38.43</td><td>-7.57</td><td>46.00</td><td>41.05</td><td>26.10</td><td>3.68</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>4</td><td>676.99</td><td>35.03</td><td>-10.97</td><td>46.00</td><td>37.46</td><td>26.12</td><td>3.85</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>5</td><td>874.87</td><td>37.05</td><td>-8.95</td><td>46.00</td><td>35.18</td><td>29.20</td><td>4.37</td><td>31.70</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>6</td><td>959.26</td><td>34.11</td><td>-11.89</td><td>46.00</td><td>29.39</td><td>31.10</td><td>4.60</td><td>30.98</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr></tbody></table></div></div></div></div>													Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	250.19	26.27	-19.73	46.00	38.17	18.40	2.10	32.40	---	---	Peak HORIZONTAL	2	375.32	27.01	-18.99	46.00	35.73	20.80	2.88	32.40	---	---	Peak HORIZONTAL	3	480.08	35.60	-10.40	46.00	41.46	23.40	3.14	32.40	---	---	Peak HORIZONTAL	4	624.61	38.47	-7.53	46.00	41.09	26.10	3.68	32.40	---	---	Peak HORIZONTAL	5	889.42	38.12	-7.88	46.00	36.44	28.82	4.44	31.58	---	---	Peak HORIZONTAL	6	898.15	39.84	-6.16	46.00	37.98	28.90	4.48	31.52	---	---	Peak HORIZONTAL		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	250.19	24.05	-21.95	46.00	35.95	18.40	2.10	32.40	---	---	Peak VERTICAL	2	480.08	33.74	-12.26	46.00	39.60	23.40	3.14	32.40	---	---	Peak VERTICAL	3	624.61	38.43	-7.57	46.00	41.05	26.10	3.68	32.40	---	---	Peak VERTICAL	4	676.99	35.03	-10.97	46.00	37.46	26.12	3.85	32.40	---	---	Peak VERTICAL	5	874.87	37.05	-8.95	46.00	35.18	29.20	4.37	31.70	---	---	Peak VERTICAL	6	959.26	34.11	-11.89	46.00	29.39	31.10	4.60	30.98	---	---	Peak VERTICAL
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																		
1	250.19	26.27	-19.73	46.00	38.17	18.40	2.10	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
2	375.32	27.01	-18.99	46.00	35.73	20.80	2.88	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
3	480.08	35.60	-10.40	46.00	41.46	23.40	3.14	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
4	624.61	38.47	-7.53	46.00	41.09	26.10	3.68	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
5	889.42	38.12	-7.88	46.00	36.44	28.82	4.44	31.58	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
6	898.15	39.84	-6.16	46.00	37.98	28.90	4.48	31.52	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																		
1	250.19	24.05	-21.95	46.00	35.95	18.40	2.10	32.40	---	---	Peak VERTICAL																																																																																																																																																																																																	
2	480.08	33.74	-12.26	46.00	39.60	23.40	3.14	32.40	---	---	Peak VERTICAL																																																																																																																																																																																																	
3	624.61	38.43	-7.57	46.00	41.05	26.10	3.68	32.40	---	---	Peak VERTICAL																																																																																																																																																																																																	
4	676.99	35.03	-10.97	46.00	37.46	26.12	3.85	32.40	---	---	Peak VERTICAL																																																																																																																																																																																																	
5	874.87	37.05	-8.95	46.00	35.18	29.20	4.37	31.70	---	---	Peak VERTICAL																																																																																																																																																																																																	
6	959.26	34.11	-11.89	46.00	29.39	31.10	4.60	30.98	---	---	Peak VERTICAL																																																																																																																																																																																																	



Mode	1	
	Emission after 18GHz	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak		

Note: For above 18GHz, there are no signals, thus only test worse case is shown in the report.




## Appendix C. Duty Cycle Plots

### 3DH5 on time (One Pulse) Plot on Channel 00



### 3DH5 on time (Count Pulses) Plot on Channel 00

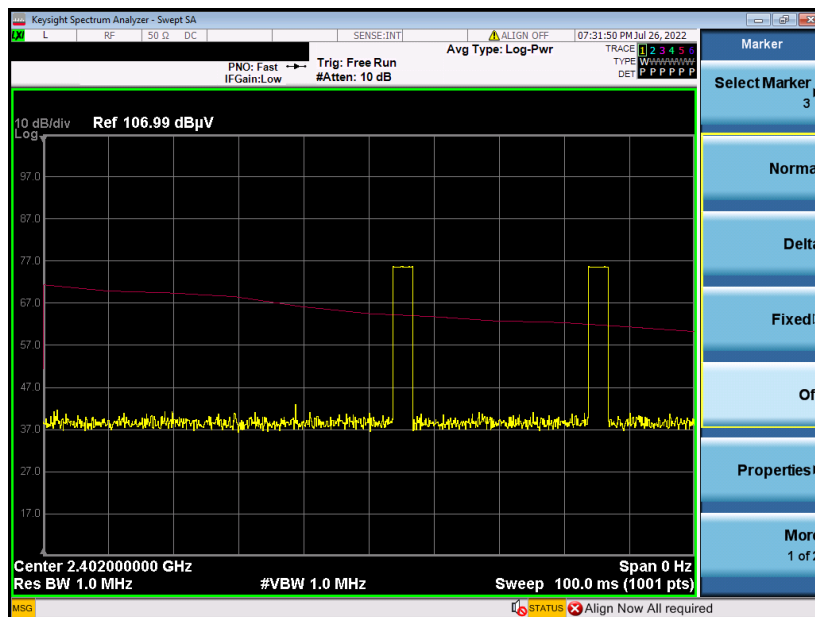

#### Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.