
1. Project specification

NC	Content	Page Number
1	Project specification	1
2	Electrical performance test report	2
3	Product graph	2
4	Network analyzer graph	3
5	Efficiency and Gain test results	4
6	Radiation pattern	5




2. Electrical performance test report

Frequency	2.402GHz-2.48GHz
Impedance	50 Ω hm
VSWR	2.0 MAX
Return Loss	-40dB Max
Radiation	Omni-directional
Gain(peak)	3.3 dBi
Polarization	Linear. Vertical
Type of antenna	PCB Antenna

3. Product graph





4. Network analyzer graph

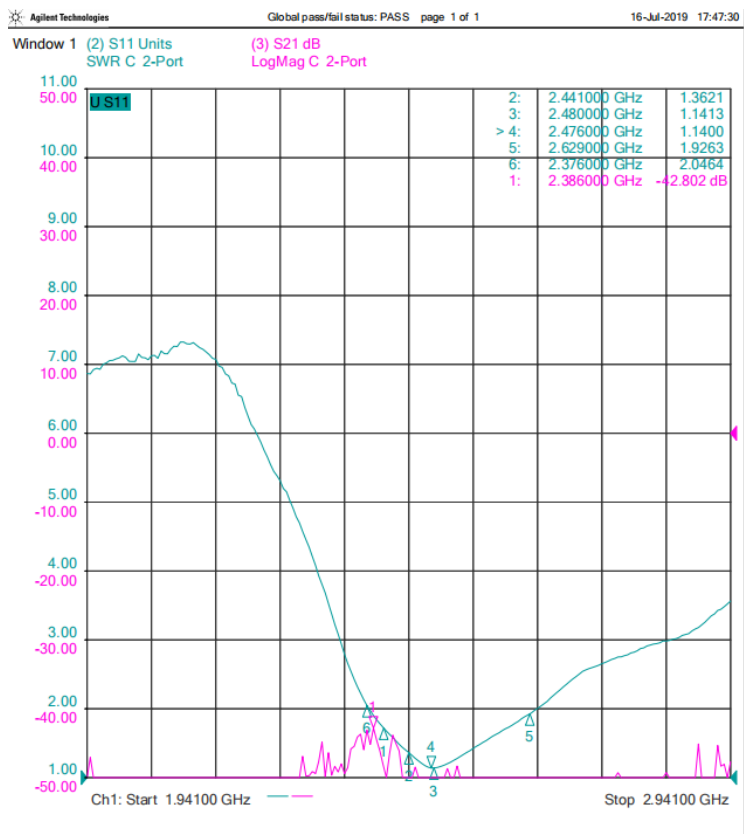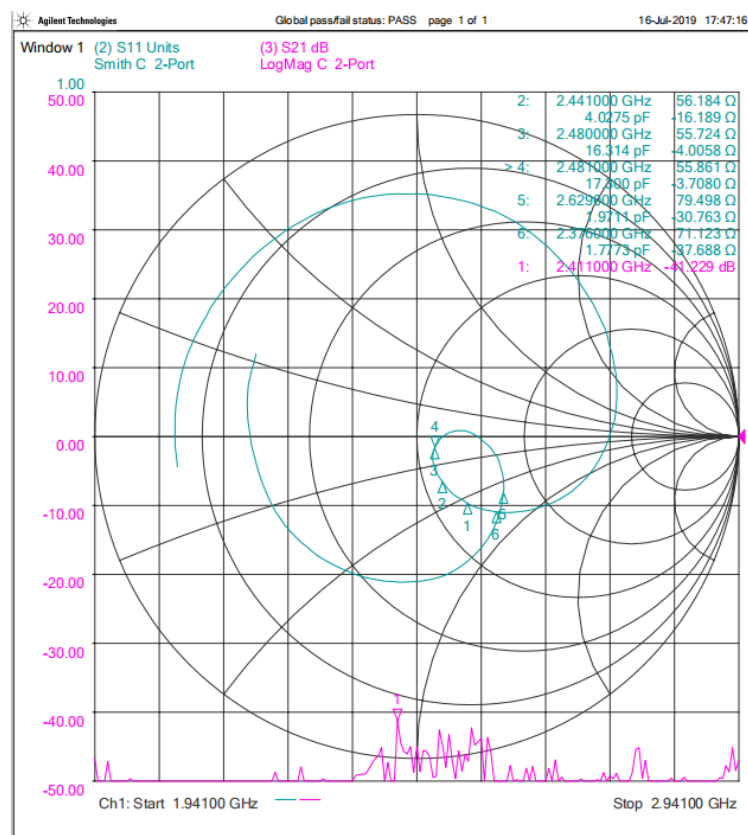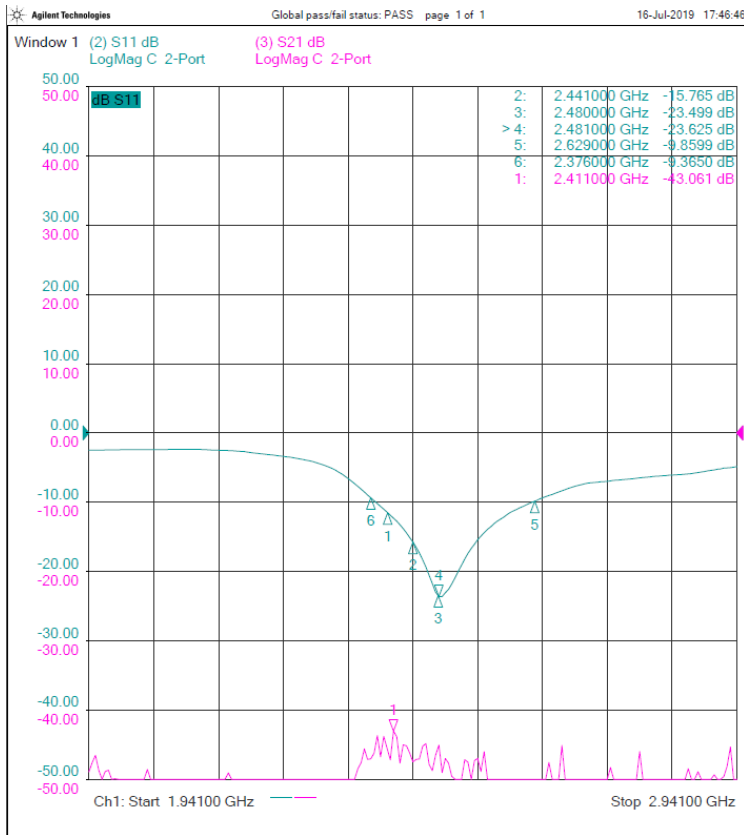


5. Efficiency and Gain test results

Frequency: 2.402-2.480GHz			
Frequency Point (MHz)	Efficiency (%)	Efficiency (dB)	Gain (dBi)
2400	60.56%	-2.2	3.1
2410	61.20%	-2.1	3.1
2420	65.76%	-1.8	3.3
2430	65.29%	-1.9	3.2
2440	61.95%	-2.1	2.8
2450	63.69%	-2.0	2.8
2460	63.38%	-2.0	2.6
2470	69.39%	-1.6	2.9
2480	73.52%	-1.3	3.1
Mean value	64.97%	-1.88	2.98

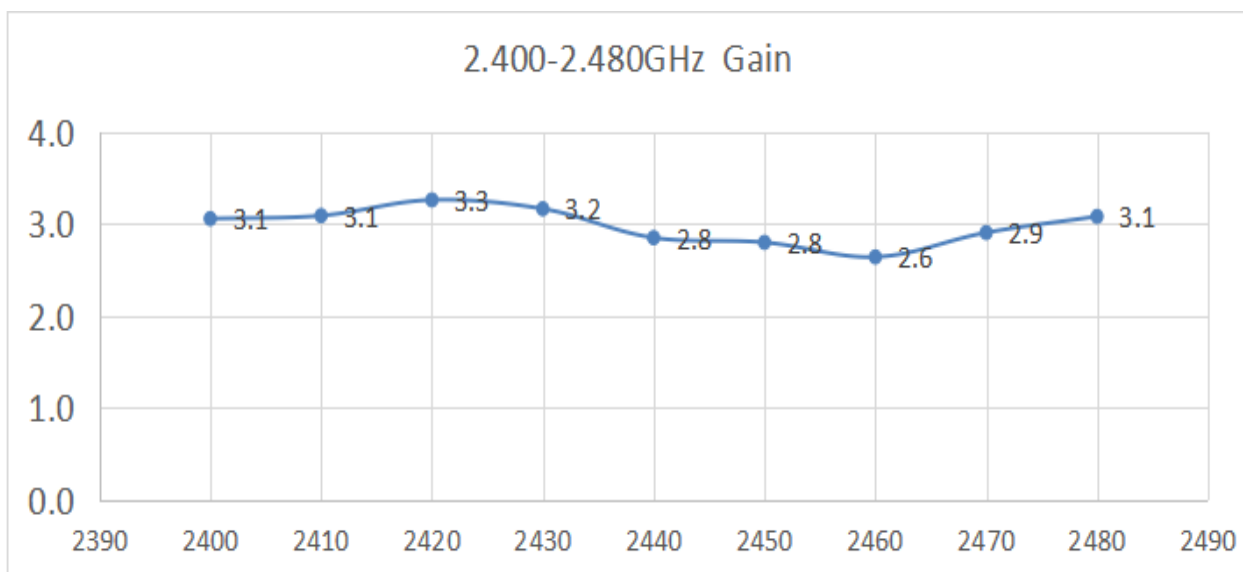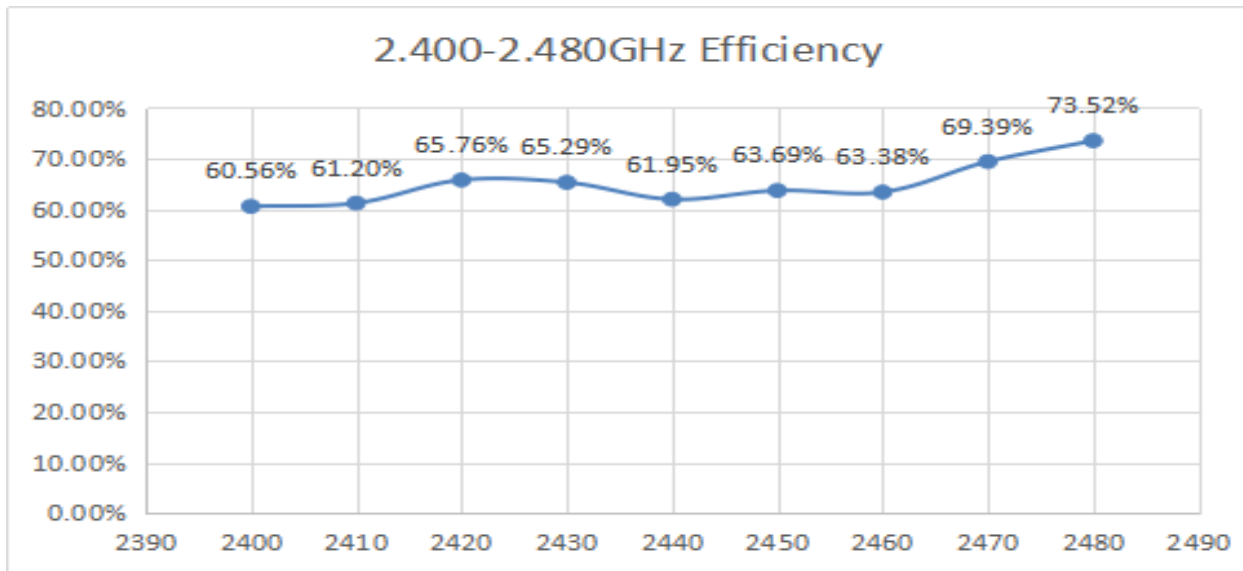


6. Radiation pattern


3D Diagram:

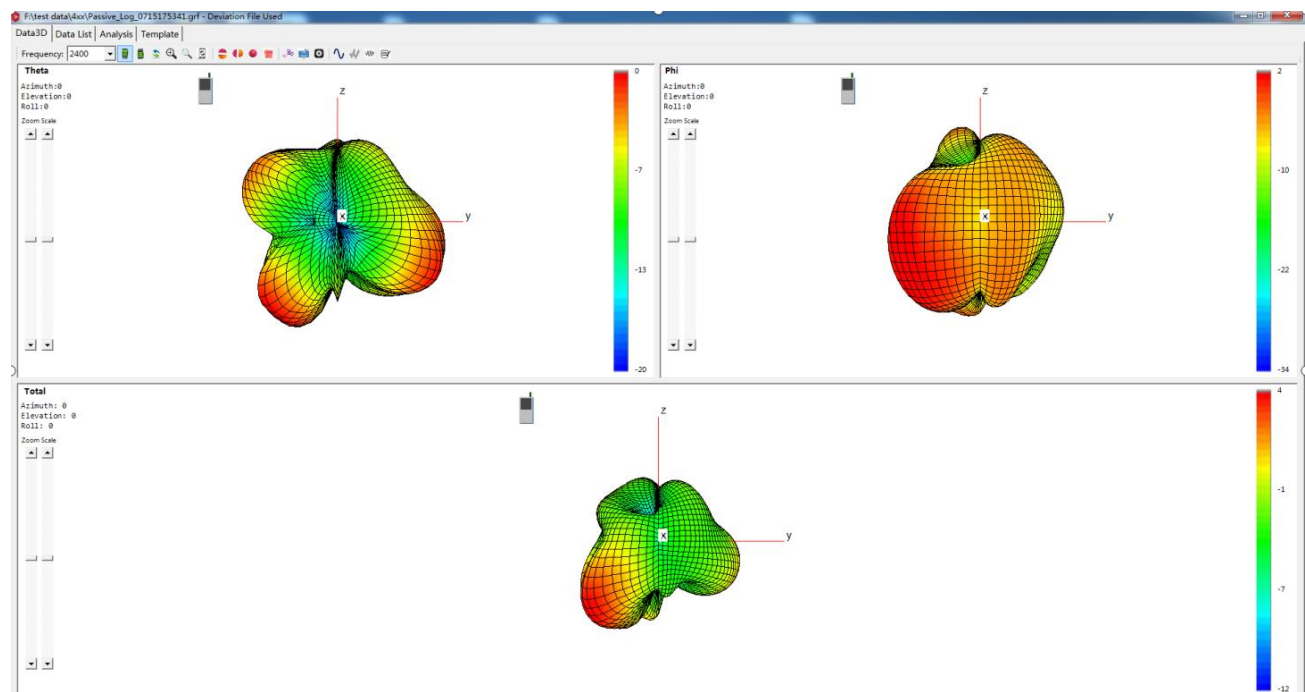

2. 400GHZ Diagram:

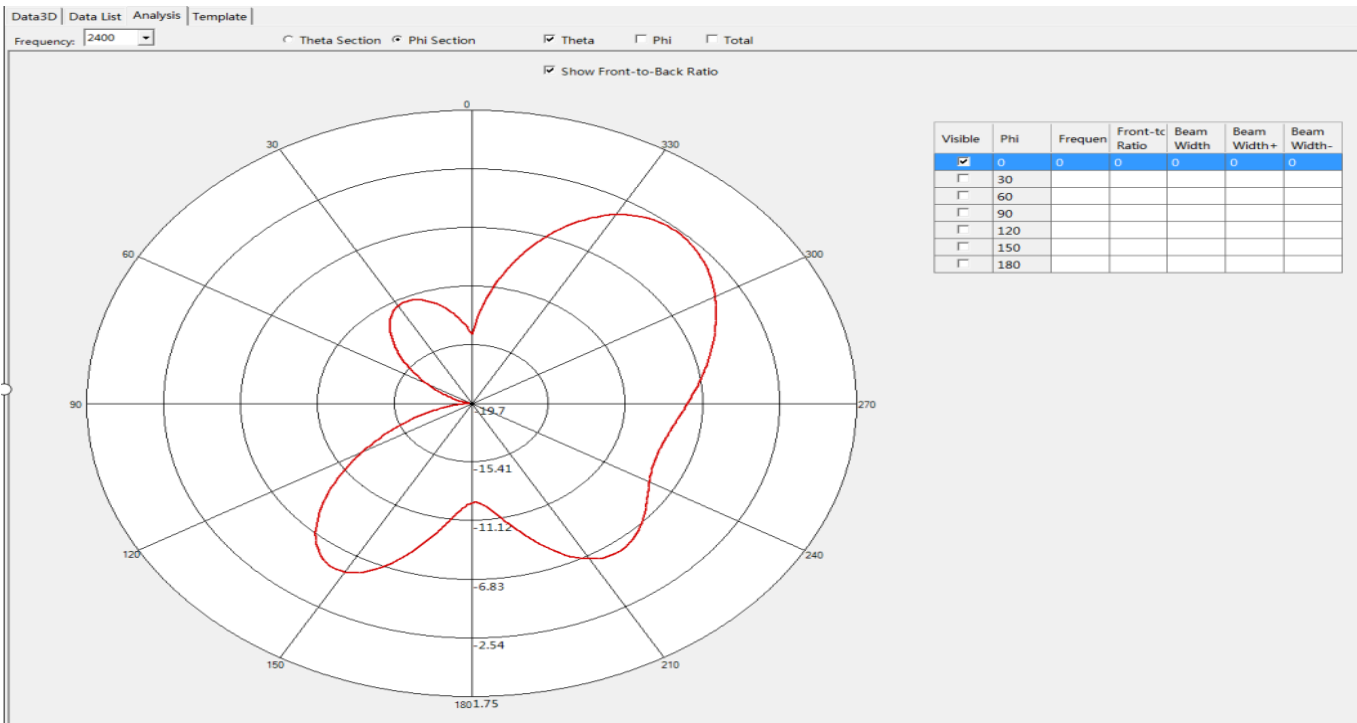


(Theta 0)

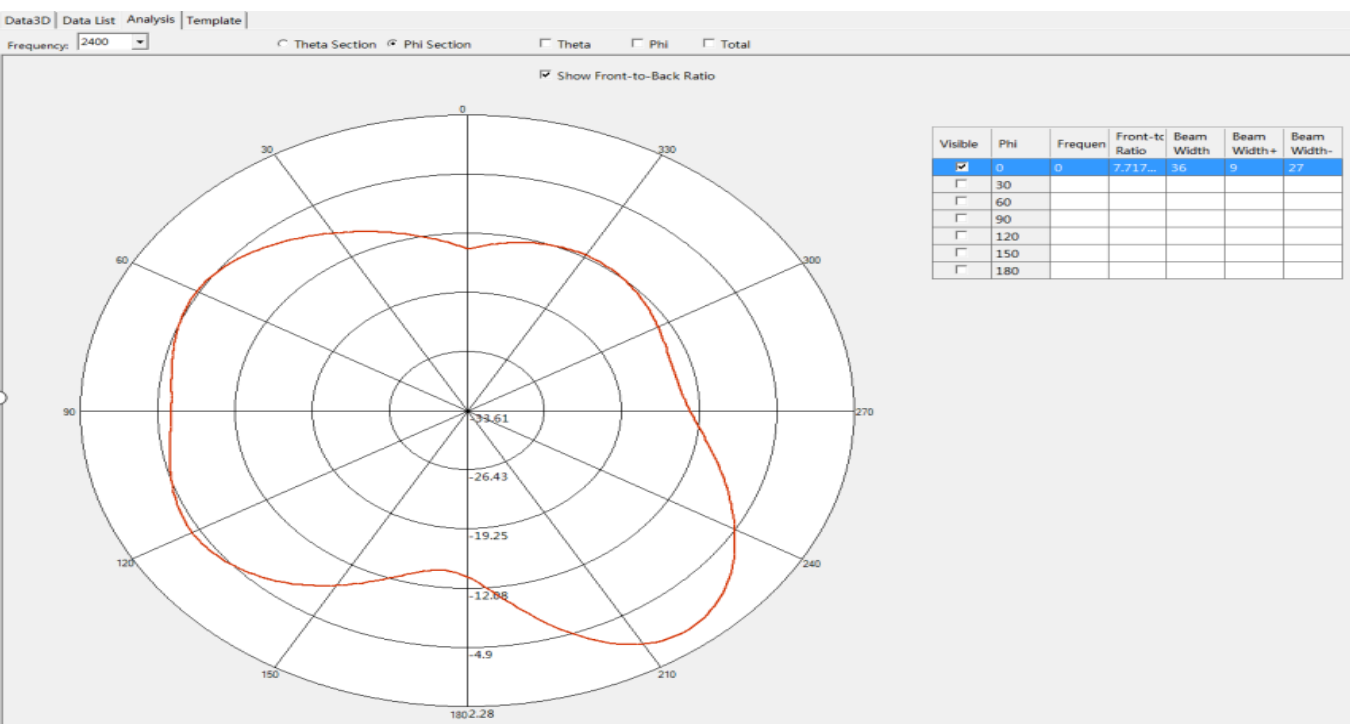


(Phi
0)


(Phi 90)

2. 440GHz Diagram:

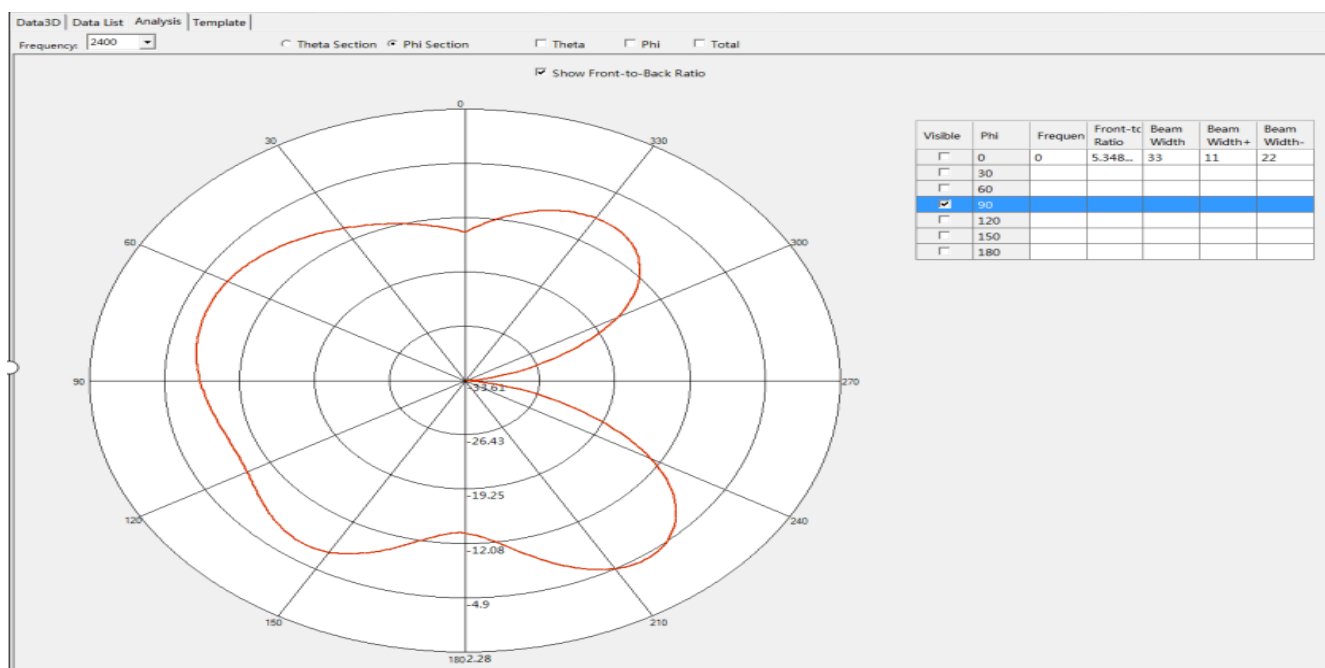


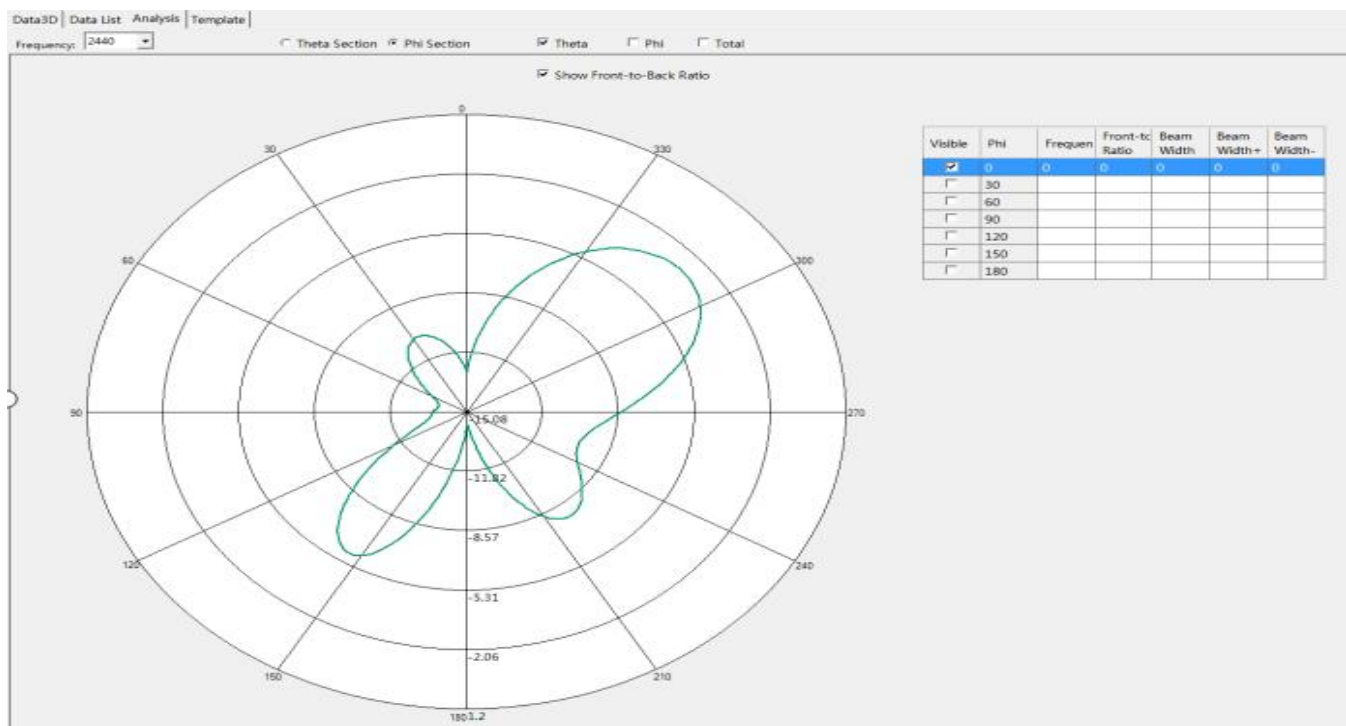


(Theta 0)

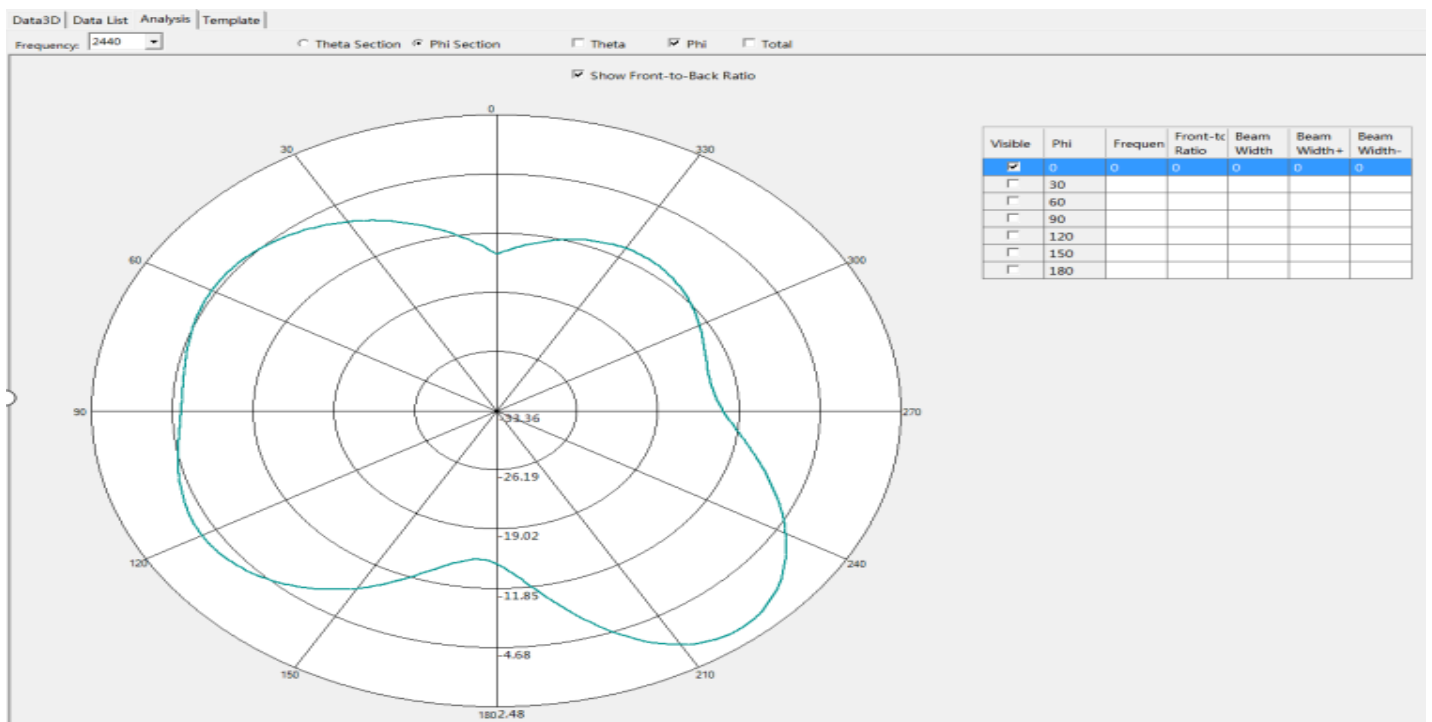

(Phi 0)

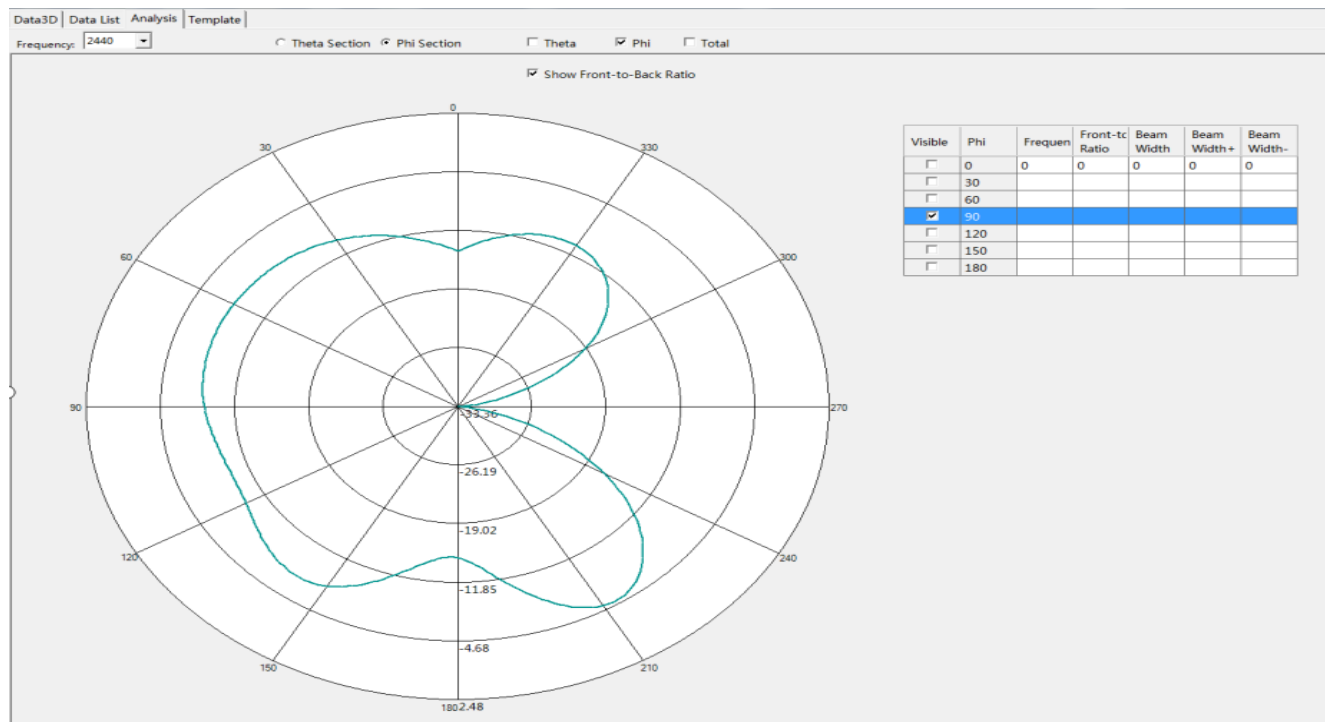


(P
hi
90)
2.4
80G
Hz
Dia
gra
m

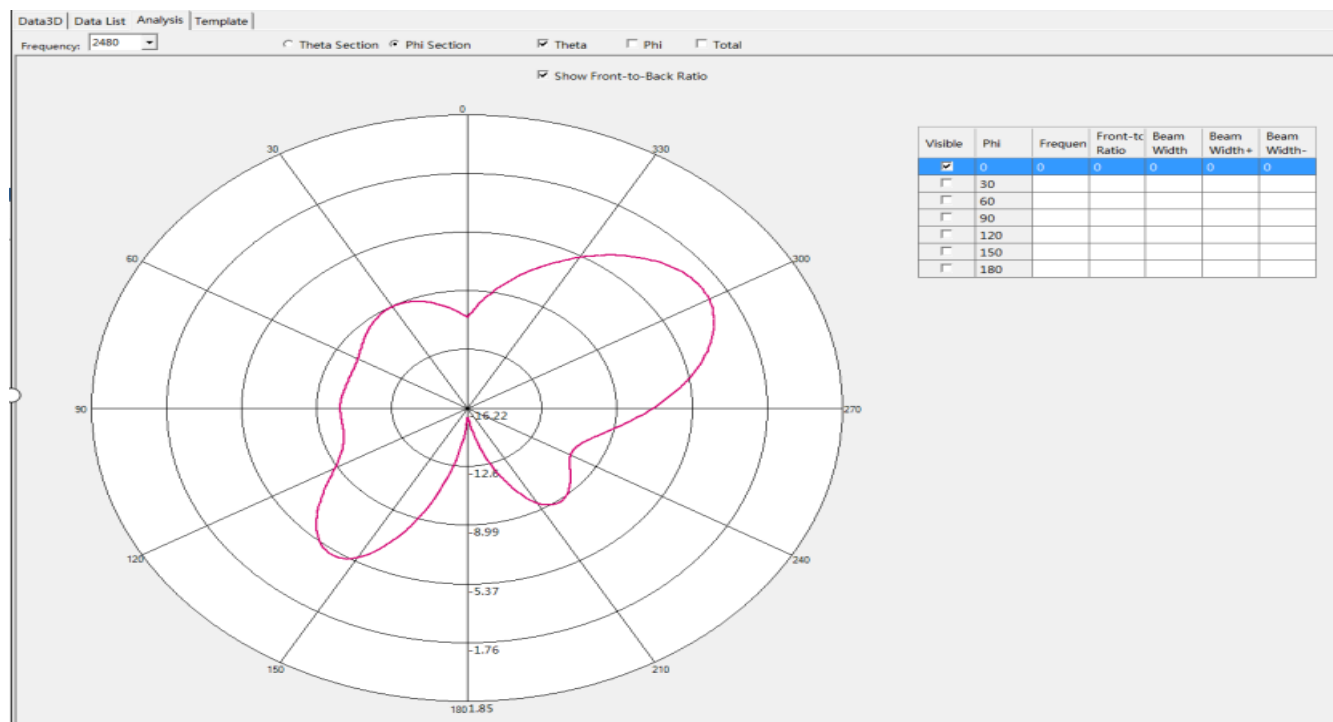

(Theta 0)

(Phi 0)

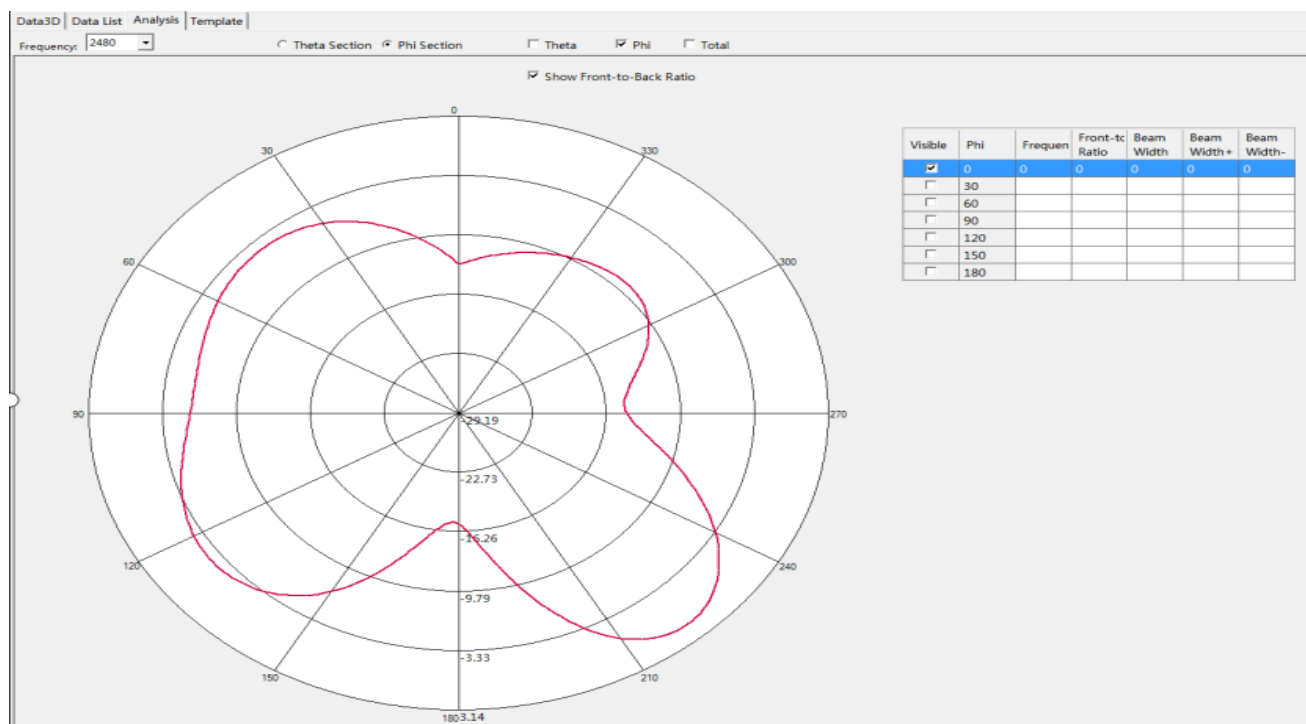

(Phi 90)

