

## FCC Test Report

**Report No.:** RFBDTL-WTW-P21060470-2 R1

**FCC ID:** VUI-CFWM

**Test Model:** 84911790C

**Received Date:** Feb. 15, 2022

**Test Date:** Mar. 10 ~ Mar. 27, 2022

**Issued Date:** Nov. 22, 2022

**Applicant:** PEGATRON CORPORATION

**Address:** 5F, NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI CITY 112, TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration /** 788550 / TW0003  
**Designation Number:**



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>Release Control Record</b>                               | <b>4</b>  |
| <b>1 Certificate of Conformity</b>                          | <b>5</b>  |
| <b>2 Summary of Test Results</b>                            | <b>6</b>  |
| 2.1 Measurement Uncertainty                                 | 6         |
| 2.2 Modification Record                                     | 6         |
| <b>3 General Information</b>                                | <b>7</b>  |
| 3.1 General Description of EUT                              | 7         |
| 3.2 Description of Test Modes                               | 8         |
| 3.2.1 Test Mode Applicability and Tested Channel Detail     | 9         |
| 3.3 Duty Cycle of Test Signal                               | 10        |
| 3.4 Description of Support Units                            | 11        |
| 3.4.1 Configuration of System under Test                    | 11        |
| 3.5 General Description of Applied Standards and References | 12        |
| <b>4 Test Types and Results</b>                             | <b>13</b> |
| 4.1 Radiated Emission and Bandedge Measurement              | 13        |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement  | 13        |
| 4.1.2 Test Instruments                                      | 14        |
| 4.1.3 Test Procedures                                       | 15        |
| 4.1.4 Deviation from Test Standard                          | 15        |
| 4.1.5 Test Setup                                            | 16        |
| 4.1.6 EUT Operating Conditions                              | 17        |
| 4.1.7 Test Results                                          | 18        |
| 4.2 Number of Hopping Frequency Used                        | 26        |
| 4.2.1 Limits of Hopping Frequency Used Measurement          | 26        |
| 4.2.2 Test Setup                                            | 26        |
| 4.2.3 Test Instruments                                      | 26        |
| 4.2.4 Test Procedure                                        | 26        |
| 4.2.5 Deviation from Test Standard                          | 26        |
| 4.2.6 Test Results                                          | 27        |
| 4.3 Dwell Time on Each Channel                              | 28        |
| 4.3.1 Limits of Dwell Time on Each Channel Measurement      | 28        |
| 4.3.2 Test Setup                                            | 28        |
| 4.3.3 Test Instruments                                      | 28        |
| 4.3.4 Test Procedures                                       | 28        |
| 4.3.5 Deviation from Test Standard                          | 28        |
| 4.3.6 Test Results                                          | 29        |
| 4.4 Channel Bandwidth                                       | 31        |
| 4.4.1 Limits of Channel Bandwidth Measurement               | 31        |
| 4.4.2 Test Setup                                            | 31        |
| 4.4.3 Test Instruments                                      | 31        |
| 4.4.4 Test Procedure                                        | 31        |
| 4.4.5 Deviation from Test Standard                          | 31        |
| 4.4.6 EUT Operating Condition                               | 31        |
| 4.4.7 Test Results                                          | 32        |
| 4.5 Hopping Channel Separation                              | 33        |
| 4.5.1 Limits of Hopping Channel Separation Measurement      | 33        |
| 4.5.2 Test Setup                                            | 33        |
| 4.5.3 Test Instruments                                      | 33        |
| 4.5.4 Test Procedure                                        | 33        |
| 4.5.5 Deviation from Test Standard                          | 33        |
| 4.5.6 Test Results                                          | 34        |
| 4.6 Maximum Output Power                                    | 35        |
| 4.6.1 Limits of Maximum Output Power Measurement            | 35        |

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| 4.6.2 Test Setup .....                                           | 35        |
| 4.6.3 Test Instruments .....                                     | 35        |
| 4.6.4 Test Procedure .....                                       | 35        |
| 4.6.5 Deviation from Test Standard .....                         | 35        |
| 4.6.6 EUT Operating Condition .....                              | 35        |
| 4.6.7 Test Results .....                                         | 36        |
| 4.7 Conducted Out of Band Emission Measurement .....             | 37        |
| 4.7.1 Limits Of Conducted Out Of Band Emission Measurement ..... | 37        |
| 4.7.2 Test Instruments .....                                     | 37        |
| 4.7.3 Test Procedure .....                                       | 37        |
| 4.7.4 Deviation from Test Standard .....                         | 37        |
| 4.7.5 EUT Operating Condition .....                              | 37        |
| 4.7.6 Test Results .....                                         | 37        |
| <b>Annex A- Band Edge Measurement .....</b>                      | <b>40</b> |
| <b>5 Pictures of Test Arrangements .....</b>                     | <b>41</b> |
| <b>Appendix – Information of the Testing Laboratories .....</b>  | <b>42</b> |

### Release Control Record

| Issue No.                 | Description          | Date Issued   |
|---------------------------|----------------------|---------------|
| RFBDTL-WTW-P21060470-2    | Original release.    | May 18, 2022  |
| RFBDTL-WTW-P21060470-2 R1 | Revised antenna gain | Nov. 22, 2022 |

## 1 Certificate of Conformity

**Product:** Customer Facing Wi-Fi Module (CFWM)

**Brand:** 

**Test Model:** 84911790C


**Sample Status:** DV

**Applicant:** PEGATRON CORPORATION

**Test Date:** Mar. 10 ~ Mar. 27, 2022

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Nov. 22, 2022  
Polly Chien / Specialist

**Approved by :**  , **Date:** Nov. 22, 2022  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.247) |                                                                                                               |        |                                                                               |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------|-------------------------------------------------------------------------------|
| FCC Clause                                     | Test Item                                                                                                     | Result | Remarks                                                                       |
| 15.207                                         | AC Power Conducted Emission                                                                                   | NA     | EUT is powered from DC                                                        |
| 15.247(a)(1)(iii)                              | Number of Hopping Frequency Used                                                                              | Pass   | Meet the requirement of limit.                                                |
| 15.247(a)(1)(iii)                              | Dwell Time on Each Channel                                                                                    | Pass   | Meet the requirement of limit.                                                |
| 15.247(a)(1)                                   | 1. Hopping Channel Separation<br>2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | Pass   | Meet the requirement of limit.                                                |
| 15.247(b)                                      | Maximum Peak Output Power                                                                                     | Pass   | Meet the requirement of limit.                                                |
| 15.205 / 15.209 / 15.247(d)                    | Radiated Emissions and Band Edge Measurement                                                                  | Pass   | Meet the requirement of limit. Minimum passing margin is -2.2dB at 187.14MHz. |
| 15.247(d)                                      | Antenna Port Emission                                                                                         | Pass   | Meet the requirement of limit.                                                |
| 15.203                                         | Antenna Requirement                                                                                           | Pass   | Antenna connector is I-pex not a standard connector.                          |

Note:

1. If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                    | Frequency        | Expanded Uncertainty (k=2) (±) |
|--------------------------------|------------------|--------------------------------|
| Radiated Emissions up to 1 GHz | 9kHz ~ 30MHz     | 3.04 dB                        |
|                                | 30MHz ~ 200MHz   | 3.63 dB                        |
|                                | 200MHz ~ 1000MHz | 3.64 dB                        |
| Radiated Emissions above 1 GHz | 1GHz ~ 18GHz     | 2.29 dB                        |
|                                | 18GHz ~ 40GHz    | 2.29 dB                        |

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

|                       |                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------|
| Product               | Customer Facing Wi-Fi Module (CFWM)                                               |
| Brand                 |  |
| Test Model            | 84911790C                                                                         |
| Sample Status         | DV                                                                                |
| Power Supply Rating   | 12Vdc                                                                             |
| Modulation Type       | GFSK, $\pi/4$ -DQPSK, 8DPSK                                                       |
| Modulation Technology | FHSS                                                                              |
| Transfer Rate         | 1/2/3Mbps                                                                         |
| Operating Frequency   | 2402~2480MHz                                                                      |
| Number of Channel     | 79                                                                                |
| Output Power          | 5.383mW                                                                           |
| Antenna Type          | PCB antenna with 4.07 dBi gain                                                    |
| Antenna Connector     | I-pex                                                                             |
| Accessory Device      | NA                                                                                |
| Cable Supplied        | NA                                                                                |

Note:

1. Detail antenna specification please refer to antenna photos/or drawings, including antenna dimensions.
2. The EUT contains certified LTE module (Brand: Quectel, Model: AG521R-NA (FCC ID: VUI-DAV001)).

### 3.2 Description of Test Modes

79 channels are provided to this EUT:

| Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0       | 2402        | 20      | 2422        | 40      | 2442        | 60      | 2462        |
| 1       | 2403        | 21      | 2423        | 41      | 2443        | 61      | 2463        |
| 2       | 2404        | 22      | 2424        | 42      | 2444        | 62      | 2464        |
| 3       | 2405        | 23      | 2425        | 43      | 2445        | 63      | 2465        |
| 4       | 2406        | 24      | 2426        | 44      | 2446        | 64      | 2466        |
| 5       | 2407        | 25      | 2427        | 45      | 2447        | 65      | 2467        |
| 6       | 2408        | 26      | 2428        | 46      | 2448        | 66      | 2468        |
| 7       | 2409        | 27      | 2429        | 47      | 2449        | 67      | 2469        |
| 8       | 2410        | 28      | 2430        | 48      | 2450        | 68      | 2470        |
| 9       | 2411        | 29      | 2431        | 49      | 2451        | 69      | 2471        |
| 10      | 2412        | 30      | 2432        | 50      | 2452        | 70      | 2472        |
| 11      | 2413        | 31      | 2433        | 51      | 2453        | 71      | 2473        |
| 12      | 2414        | 32      | 2434        | 52      | 2454        | 72      | 2474        |
| 13      | 2415        | 33      | 2435        | 53      | 2455        | 73      | 2475        |
| 14      | 2416        | 34      | 2436        | 54      | 2456        | 74      | 2476        |
| 15      | 2417        | 35      | 2437        | 55      | 2457        | 75      | 2477        |
| 16      | 2418        | 36      | 2438        | 56      | 2458        | 76      | 2478        |
| 17      | 2419        | 37      | 2439        | 57      | 2459        | 77      | 2479        |
| 18      | 2420        | 38      | 2440        | 58      | 2460        | 78      | 2480        |
| 19      | 2421        | 39      | 2441        | 59      | 2461        |         |             |

### 3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT Configure Mode | Applicable to |       |        |      | Description |
|--------------------|---------------|-------|--------|------|-------------|
|                    | RE $\geq$ 1G  | RE<1G | PLC    | APCM |             |
| -                  | √             | √     | Note 2 | √    | -           |

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note:

1. The EUT was positioned on the X-plane (antenna) during testing.
2. No need to concern of PLC due to the EUT is powered from DC.
3. For radiated emission (below 1GHz) test items chosen the worst maximum fundamental emission level channel.

#### Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Pakcet Type |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| -                  | 0 to 78           | 0, 39, 78      | FHSS                  | GFSK            | DH5         |
| -                  | 0 to 78           | 0, 39, 78      | FHSS                  | 8DPSK           | 3DH5        |

#### Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Pakcet Type |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| -                  | 0 to 78           | 39             | FHSS                  | GFSK            | DH5         |

#### Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


| EUT Configure Mode | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Pakcet Type |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| -                  | 0 to 78           | 0, 39, 78      | FHSS                  | GFSK            | DH5         |
| -                  | 0 to 78           | 0, 39, 78      | FHSS                  | 8DPSK           | 3DH5        |

#### Test Condition:

| Applicable to | Environmental Conditions | Input Power (System) | Tested by |
|---------------|--------------------------|----------------------|-----------|
| RE $\geq$ 1G  | 23 deg. C, 66% RH        | 12Vdc                | Luis Lee  |
| RE<1G         | 23 deg. C, 66% RH        | 12Vdc                | Titan Hsu |
| APCM          | 25 deg. C, 60% RH        | 12Vdc                | Chris Lin |

### 3.3 Duty Cycle of Test Signal

Duty cycle =  $2.91 \times 1/100 = 0.0291$ , Duty cycle correction factor =  $20 \times \log(0.0291) = -30.7$

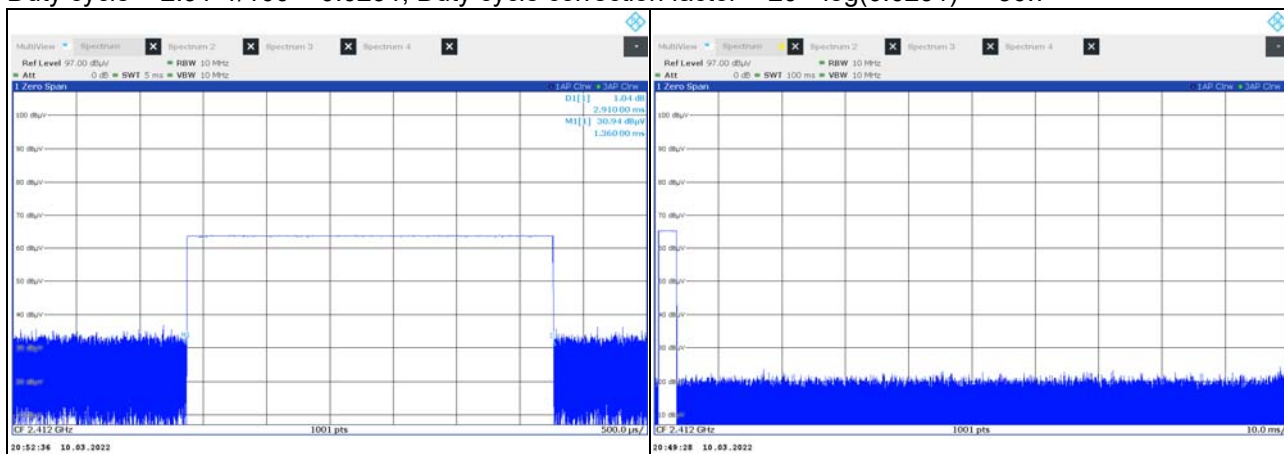

### 3.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| ID | Product     | Brand       | Model No.     | Serial No. | FCC ID | Remarks            |
|----|-------------|-------------|---------------|------------|--------|--------------------|
| A. | Battery     | YUASA       | 75D23R-CMF II | NA         | NA     | -                  |
| B. | Antenna     | TE          | 84623918      | NA         | NA     | Provided by client |
| C. | Antenna     | Continental | 85004261      | NA         | NA     | Provided by client |
| D. | Metal Plate | NA          | NA            | NA         | NA     | Provided by client |

Note: All power cords of the above support units are non-shielded (1.8m).

| ID | Cable Descriptions            | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks                                                                          |
|----|-------------------------------|------|------------|--------------------|--------------|----------------------------------------------------------------------------------|
| 1. | Power cable                   | 1    | 2          | N                  | 0            | Provided by client<br>2M (With Power Supply 0.85M Cable, 0.3M Cable, 1.8M Cable) |
| 2. | Combo B cable                 | 1    | 5.2        | N                  | 0            | Provided by client                                                               |
| 3. | Combo A cable                 | 1    | 5.2        | N                  | 0            | Provided by client                                                               |
| 4. | Rosenberger Harness CFWM WiFi | 1    | 0.15       | N                  | 0            | Provided by client                                                               |
| 5. | Rosenberger Harness CFWM LTE  | 1    | 2.35       | N                  | 0            | Provided by client                                                               |
| 6. | Power cable                   | 1    | 2          | N                  | 0            | -                                                                                |

#### 3.4.1 Configuration of System under Test

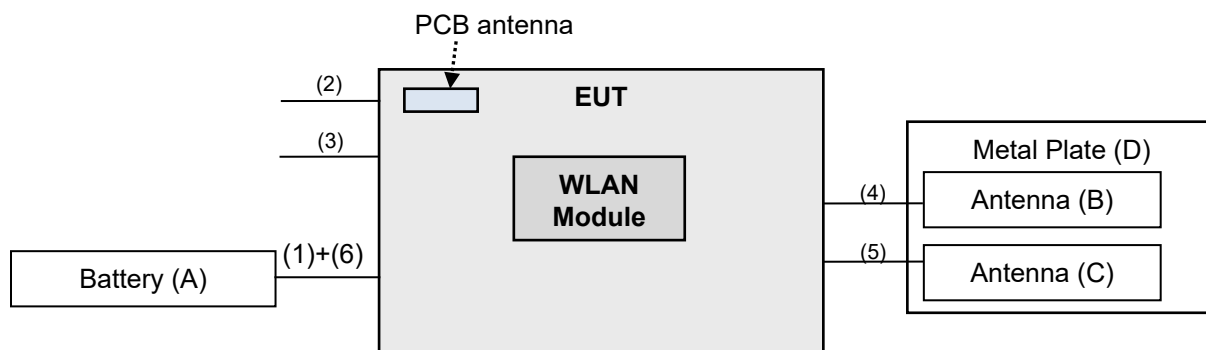

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

| Description & Manufacturer                | Model No.                | Serial No.            | Cal. Date     | Cal. Due      |
|-------------------------------------------|--------------------------|-----------------------|---------------|---------------|
| Test Receiver<br>ROHDE & SCHWARZ          | ESCI                     | 100424                | Dec. 30, 2021 | Dec. 29, 2022 |
| Spectrum Analyzer<br>ROHDE & SCHWARZ      | FSP40                    | 100040                | Sep. 15, 2021 | Sep. 14, 2022 |
| BILOG Antenna<br>SCHWARZBECK              | VULB9168                 | 9168-155              | Nov. 01, 2021 | Oct. 31, 2022 |
| HORN Antenna<br>SCHWARZBECK               | BBHA 9120D               | 9120D-1170            | Nov. 14, 2021 | Nov. 13, 2022 |
| HORN Antenna<br>SCHWARZBECK               | BBHA 9170                | BBHA9170241           | Oct. 26, 2021 | Oct. 35, 2022 |
| Loop Antenna<br>TESEQ                     | HLA 6121                 | 45745                 | Jul. 21, 2021 | Jul. 20, 2022 |
| Preamplifier<br>Agilent<br>(Below 1GHz)   | 8447D                    | 2944A10631            | Jun. 05, 2021 | Jun. 04, 2022 |
| Preamplifier<br>KEYSIGHT<br>(Above 1GHz)  | 83017A                   | MY53270295            | Jun. 05, 2021 | Jun. 04, 2022 |
| RF Coaxial Cable<br>WOKEN<br>With 5dB PAD | 8D-FB                    | Cable-CH4-01          | Jul. 24, 2021 | Jul. 23, 2022 |
| RF Coaxial Cable<br>EMCI                  | EMC102-KM-KM-3000        | 150929                | Jul. 24, 2021 | Jul. 23, 2022 |
| RF Coaxial Cable<br>EMCI                  | EMC102-KM-KM-600         | 150928                | Jul. 24, 2021 | Jul. 23, 2022 |
| RF signal cable<br>HUBER+SUHNER           | SUCOFLEX 104             | MY 13380+295012/04    | Jun. 05, 2021 | Jun. 04, 2022 |
| RF signal cable<br>HUBER+SUHNER           | SUCOFLEX 104             | Cable-CH4-03 (250724) | Jun. 05, 2021 | Jun. 04, 2022 |
| Software<br>BV ADT                        | ADT_Radiated_V7.6.15.9.5 | NA                    | NA            | NA            |
| Antenna Tower<br>inn-co GmbH              | MA 4000                  | 010303                | NA            | NA            |
| Turn Table Controller<br>BV ADT           | SC100                    | SC93021702            | NA            | NA            |
| Boresight Antenna Fixture                 | FBA-01                   | FBA-SIP01             | NA            | NA            |
| Peak Power Analyzer<br>KEYSIGHT           | 8990B                    | MY51000485            | Jan. 18, 2022 | Jan. 17, 2023 |
| Wideband Power Sensor<br>KEYSIGHT         | N1923A                   | MY58020002            | Jan. 17, 2022 | Jan. 16, 2023 |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 4.

### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. The duty cycle correction factor refer to Chapter 3.3 of this report.
3. All modes of operation were investigated and the worst-case emissions are reported.

### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

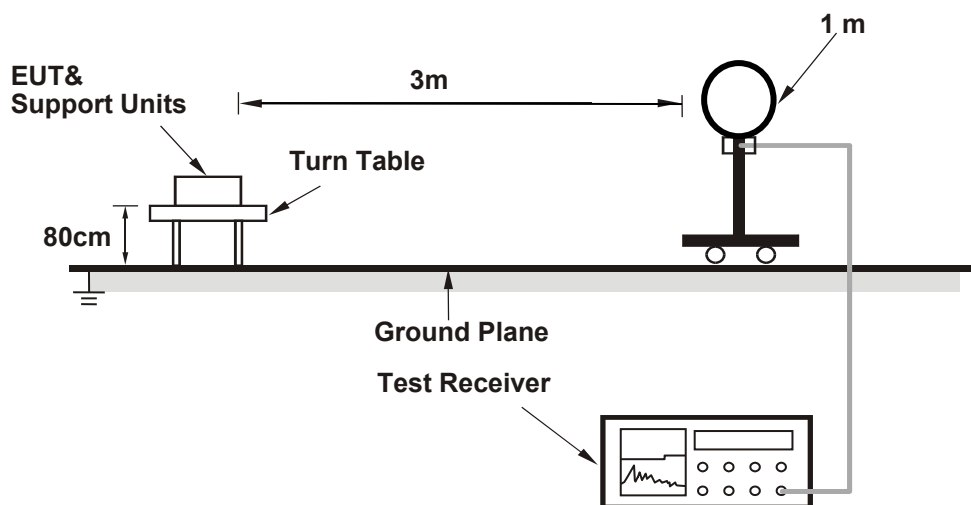

##### For Radiated emission 30MHz to 1GHz

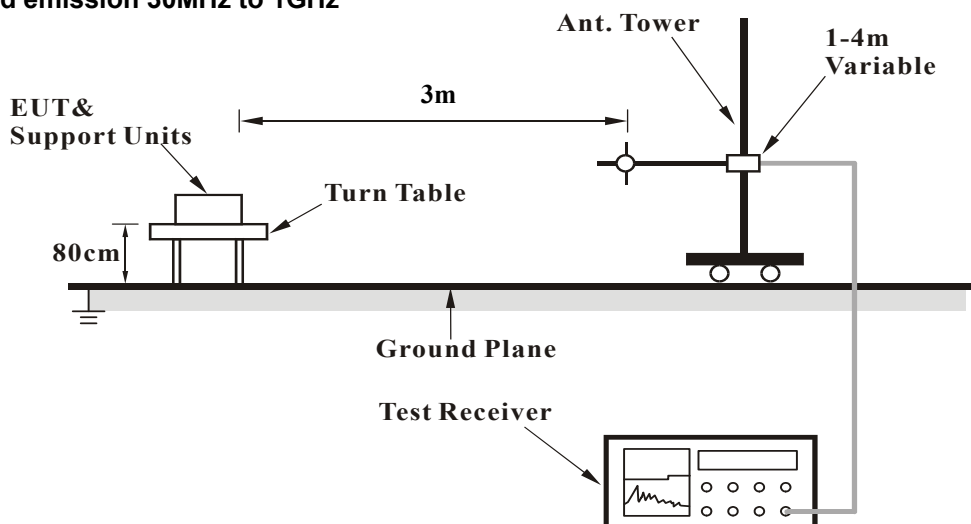

### For Radiated emission above 1GHz

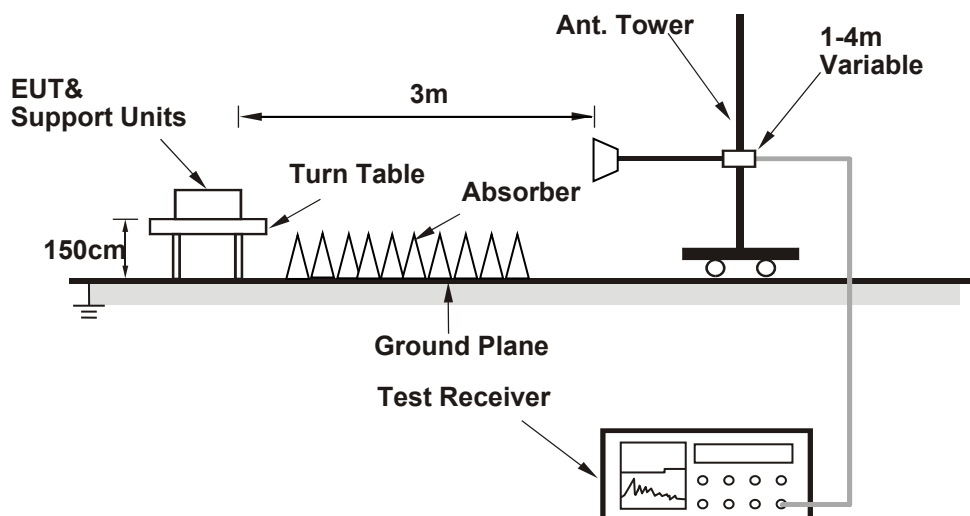

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. The EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

Above 1GHz data:

GFSK

|                 |              |                      |              |
|-----------------|--------------|----------------------|--------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2390.00         | 58.6 PK                 | 74.0           | -15.4       | 1.06 H             | 143                  | 24.5             | 34.1                     |
| 2                                                    | 2390.00         | 45.4 AV                 | 54.0           | -8.6        | 1.06 H             | 143                  | 11.3             | 34.1                     |
| 3                                                    | *2402.00        | 102.6 PK                |                |             | 1.06 H             | 143                  | 68.5             | 34.1                     |
| 4                                                    | *2402.00        | 71.9 AV                 |                |             | 1.06 H             | 143                  | 37.8             | 34.1                     |
| 5                                                    | 4804.00         | 52.2 PK                 | 74.0           | -21.8       | 2.35 H             | 196                  | 38.6             | 13.6                     |
| 6                                                    | 4804.00         | 21.5 AV                 | 54.0           | -32.5       | 2.35 H             | 196                  | 7.9              | 13.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2390.00         | 58.9 PK                 | 74.0           | -15.1       | 1.99 V             | 255                  | 24.8             | 34.1                     |
| 2                                                    | 2390.00         | 45.7 AV                 | 54.0           | -8.3        | 1.99 V             | 255                  | 11.6             | 34.1                     |
| 3                                                    | *2402.00        | 104.0 PK                |                |             | 1.99 V             | 255                  | 69.9             | 34.1                     |
| 4                                                    | *2402.00        | 73.3 AV                 |                |             | 1.99 V             | 255                  | 39.2             | 34.1                     |
| 5                                                    | 4804.00         | 53.3 PK                 | 74.0           | -20.7       | 1.57 V             | 236                  | 39.7             | 13.6                     |
| 6                                                    | 4804.00         | 22.6 AV                 | 54.0           | -31.4       | 1.57 V             | 236                  | 9.0              | 13.6                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \times 1/100) = -30.7\text{dB}$  please refer to the plotted duty (see section 3.3)

|                 |               |                      |              |
|-----------------|---------------|----------------------|--------------|
| CHANNEL         | TX Channel 39 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2441.00        | 103.9 PK                |                |             | 1.12 H             | 148                  | 69.6             | 34.3                     |
| 2                                                    | *2441.00        | 73.2 AV                 |                |             | 1.12 H             | 148                  | 38.9             | 34.3                     |
| 3                                                    | 4882.00         | 52.3 PK                 | 74.0           | -21.7       | 2.36 H             | 189                  | 38.7             | 13.6                     |
| 4                                                    | 4882.00         | 21.6 AV                 | 54.0           | -32.4       | 2.36 H             | 189                  | 8.0              | 13.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2441.00        | 105.3 PK                |                |             | 1.90 V             | 255                  | 71.0             | 34.3                     |
| 2                                                    | *2441.00        | 74.6 AV                 |                |             | 1.90 V             | 255                  | 40.3             | 34.3                     |
| 3                                                    | 4882.00         | 53.5 PK                 | 74.0           | -20.5       | 1.64 V             | 233                  | 39.9             | 13.6                     |
| 4                                                    | 4882.00         | 22.8 AV                 | 54.0           | -31.2       | 1.64 V             | 233                  | 9.2              | 13.6                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \times 1/100) = -30.7\text{dB}$  please refer to the plotted duty (see section 3.3)

|                 |               |                      |              |
|-----------------|---------------|----------------------|--------------|
| CHANNEL         | TX Channel 78 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2480.00        | 100.5 PK                |                |             | 1.15 H             | 156                  | 66.2             | 34.3                     |
| 2                                                    | *2480.00        | 69.8 AV                 |                |             | 1.15 H             | 156                  | 35.5             | 34.3                     |
| 3                                                    | 2483.50         | 52.4 PK                 | 74.0           | -21.6       | 1.15 H             | 156                  | 49.0             | 3.4                      |
| 4                                                    | 2483.50         | 21.7 AV                 | 54.0           | -32.3       | 1.15 H             | 156                  | 18.3             | 3.4                      |
| 5                                                    | 4960.00         | 52.9 PK                 | 74.0           | -21.1       | 2.38 H             | 197                  | 39.4             | 13.5                     |
| 6                                                    | 4960.00         | 22.2 AV                 | 54.0           | -31.8       | 2.38 H             | 197                  | 8.7              | 13.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2480.00        | 102.1 PK                |                |             | 1.98 V             | 257                  | 67.8             | 34.3                     |
| 2                                                    | *2480.00        | 71.4 AV                 |                |             | 1.98 V             | 257                  | 37.1             | 34.3                     |
| 3                                                    | 2483.50         | 52.7 PK                 | 74.0           | -21.3       | 1.98 V             | 257                  | 49.3             | 3.4                      |
| 4                                                    | 2483.50         | 22.0 AV                 | 54.0           | -32.0       | 1.98 V             | 257                  | 18.6             | 3.4                      |
| 5                                                    | 4960.00         | 53.0 PK                 | 74.0           | -21.0       | 1.49 V             | 234                  | 39.5             | 13.5                     |
| 6                                                    | 4960.00         | 22.3 AV                 | 54.0           | -31.7       | 1.49 V             | 234                  | 8.8              | 13.5                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
where the duty factor is calculated from following formula:  
 $20\log(\text{Duty cycle}) = 20 \log (2.91\text{ms} \times 1/100) = -30.7\text{dB}$  please refer to the plotted duty  
(see section 3.3)

# 8DPSK

|                 |              |                      |              |
|-----------------|--------------|----------------------|--------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2390.00         | 58.4 PK                 | 74.0           | -15.6       | 1.09 H             | 138                  | 24.3             | 34.1                     |
| 2                                                    | 2390.00         | 45.5 AV                 | 54.0           | -8.5        | 1.09 H             | 138                  | 11.4             | 34.1                     |
| 3                                                    | *2402.00        | 97.6 PK                 |                |             | 1.09 H             | 138                  | 63.5             | 34.1                     |
| 4                                                    | *2402.00        | 66.9 AV                 |                |             | 1.09 H             | 138                  | 32.8             | 34.1                     |
| 5                                                    | 4804.00         | 52.5 PK                 | 74.0           | -21.5       | 2.30 H             | 195                  | 38.9             | 13.6                     |
| 6                                                    | 4804.00         | 21.8 AV                 | 54.0           | -32.2       | 2.30 H             | 195                  | 8.2              | 13.6                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2390.00         | 59.1 PK                 | 74.0           | -14.9       | 1.97 V             | 256                  | 25.0             | 34.1                     |
| 2                                                  | 2390.00         | 45.7 AV                 | 54.0           | -8.3        | 1.97 V             | 256                  | 11.6             | 34.1                     |
| 3                                                  | *2402.00        | 98.8 PK                 |                |             | 1.97 V             | 256                  | 64.7             | 34.1                     |
| 4                                                  | *2402.00        | 68.1 AV                 |                |             | 1.97 V             | 256                  | 34.0             | 34.1                     |
| 5                                                  | 4804.00         | 53.4 PK                 | 74.0           | -20.6       | 1.48 V             | 227                  | 39.8             | 13.6                     |
| 6                                                  | 4804.00         | 22.7 AV                 | 54.0           | -31.3       | 1.48 V             | 227                  | 9.1              | 13.6                     |

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \times 1/100) = -30.7\text{dB}$  please refer to the plotted duty  
(see section 3.3)

|                 |               |                      |              |
|-----------------|---------------|----------------------|--------------|
| CHANNEL         | TX Channel 39 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2441.00        | 98.5 PK                 |                |             | 1.04 H             | 134                  | 64.2             | 34.3                     |
| 2                                                    | *2441.00        | 67.8 AV                 |                |             | 1.04 H             | 134                  | 33.5             | 34.3                     |
| 3                                                    | 4882.00         | 52.3 PK                 | 74.0           | -21.7       | 2.14 H             | 188                  | 38.7             | 13.6                     |
| 4                                                    | 4882.00         | 21.6 AV                 | 54.0           | -32.4       | 2.14 H             | 188                  | 8.0              | 13.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2441.00        | 100.1 PK                |                |             | 1.95 V             | 258                  | 65.8             | 34.3                     |
| 2                                                    | *2441.00        | 69.4 AV                 |                |             | 1.95 V             | 258                  | 35.1             | 34.3                     |
| 3                                                    | 4882.00         | 53.5 PK                 | 74.0           | -20.5       | 1.59 V             | 237                  | 39.9             | 13.6                     |
| 4                                                    | 4882.00         | 22.8 AV                 | 54.0           | -31.2       | 1.59 V             | 237                  | 9.2              | 13.6                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \times 1/100) = -30.7\text{dB}$  please refer to the plotted duty (see section 3.3)

|                 |               |                      |              |
|-----------------|---------------|----------------------|--------------|
| CHANNEL         | TX Channel 78 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2480.00        | 96.5 PK                 |                |             | 1.08 H             | 136                  | 62.2             | 34.3                     |
| 2                                                    | *2480.00        | 65.8 AV                 |                |             | 1.08 H             | 136                  | 31.5             | 34.3                     |
| 3                                                    | 2483.50         | 52.9 PK                 | 74.0           | -21.1       | 1.08 H             | 136                  | 49.5             | 3.4                      |
| 4                                                    | 2483.50         | 22.2 AV                 | 54.0           | -31.8       | 1.08 H             | 136                  | 18.8             | 3.4                      |
| 5                                                    | 4960.00         | 52.3 PK                 | 74.0           | -21.7       | 2.29 H             | 187                  | 38.8             | 13.5                     |
| 6                                                    | 4960.00         | 21.6 AV                 | 54.0           | -32.4       | 2.29 H             | 187                  | 8.1              | 13.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2480.00        | 97.7 PK                 |                |             | 1.96 V             | 258                  | 63.4             | 34.3                     |
| 2                                                    | *2480.00        | 67.0 AV                 |                |             | 1.96 V             | 258                  | 32.7             | 34.3                     |
| 3                                                    | 2483.50         | 53.1 PK                 | 74.0           | -20.9       | 1.96 V             | 258                  | 49.7             | 3.4                      |
| 4                                                    | 2483.50         | 22.4 AV                 | 54.0           | -31.6       | 1.96 V             | 258                  | 19.0             | 3.4                      |
| 5                                                    | 4960.00         | 53.3 PK                 | 74.0           | -20.7       | 1.46 V             | 229                  | 39.8             | 13.5                     |
| 6                                                    | 4960.00         | 22.6 AV                 | 54.0           | -31.4       | 1.46 V             | 229                  | 9.1              | 13.5                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
where the duty factor is calculated from following formula:  
 $20\log(\text{Duty cycle}) = 20 \log (2.91\text{ms} \times 1/100) = -30.7\text{dB}$  please refer to the plotted duty  
(see section 3.3)

Below 1GHz worst-case data:


GFSK

|                 |               |                   |                 |
|-----------------|---------------|-------------------|-----------------|
| CHANNEL         | TX Channel 39 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz   |                   |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 31.94       | 30.6 QP                 | 40.0           | -9.4        | 1.01 H             | 103                  | 40.9             | -10.3                    |
| 2                                                   | 64.92       | 31.4 QP                 | 40.0           | -8.6        | 1.50 H             | 19                   | 41.4             | -10.0                    |
| 3                                                   | 191.02      | 35.5 QP                 | 43.5           | -8.0        | 1.01 H             | 111                  | 46.8             | -11.3                    |
| 4                                                   | 270.56      | 30.8 QP                 | 46.0           | -15.2       | 1.01 H             | 206                  | 39.2             | -8.4                     |
| 5                                                   | 499.48      | 36.2 QP                 | 46.0           | -9.8        | 1.50 H             | 74                   | 40.1             | -3.9                     |
| 6                                                   | 637.22      | 40.4 QP                 | 46.0           | -5.6        | 1.01 H             | 118                  | 41.3             | -0.9                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

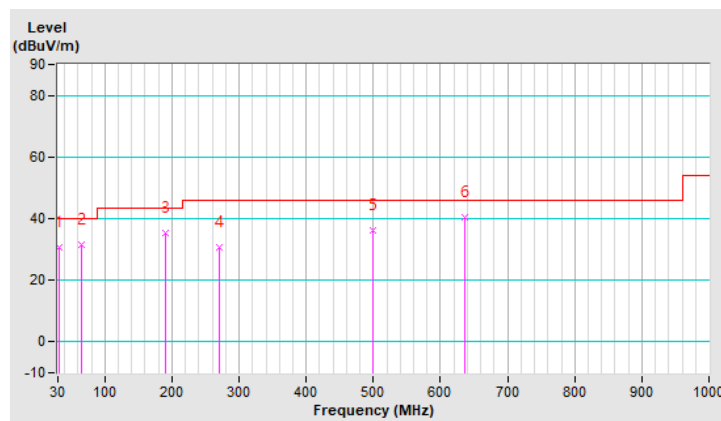


|                 |               |                      |                 |
|-----------------|---------------|----------------------|-----------------|
| CHANNEL         | TX Channel 39 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz   |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |               |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|---------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ. (MHz)   | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 31.94         | 36.6 QP                       | 40.0              | -3.4           | 1.00 V                   | 161                        | 46.9                   | -10.3                          |
| 2                                                 | 68.80         | 36.2 QP                       | 40.0              | -3.8           | 1.50 V                   | 102                        | 46.8                   | -10.6                          |
| 3                                                 | 146.40        | 36.5 QP                       | 43.5              | -7.0           | 1.00 V                   | 91                         | 45.3                   | -8.8                           |
| <b>4</b>                                          | <b>187.14</b> | <b>41.3 QP</b>                | <b>43.5</b>       | <b>-2.2</b>    | <b>1.00 V</b>            | <b>236</b>                 | <b>52.3</b>            | <b>-11.0</b>                   |
| 5                                                 | 266.68        | 33.0 QP                       | 46.0              | -13.0          | 1.50 V                   | 102                        | 41.6                   | -8.6                           |
| 6                                                 | 505.30        | 37.0 QP                       | 46.0              | -9.0           | 1.00 V                   | 102                        | 40.8                   | -3.8                           |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

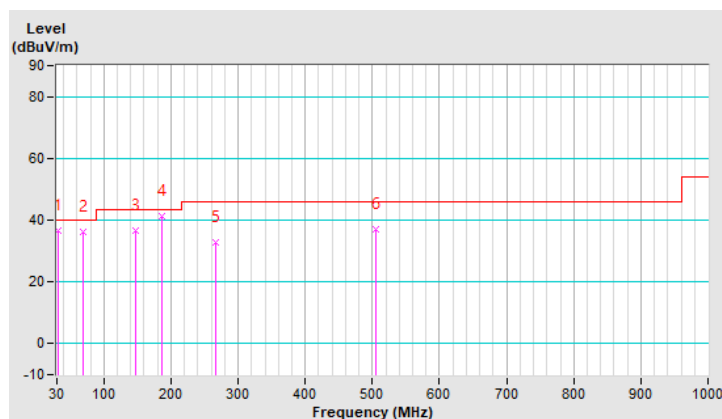

## 4.2 Number of Hopping Frequency Used

### 4.2.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

### 4.2.2 Test Setup



### 4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.2.4 Test Procedure


- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

### 4.2.5 Deviation from Test Standard

No deviation.

## 4.2.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

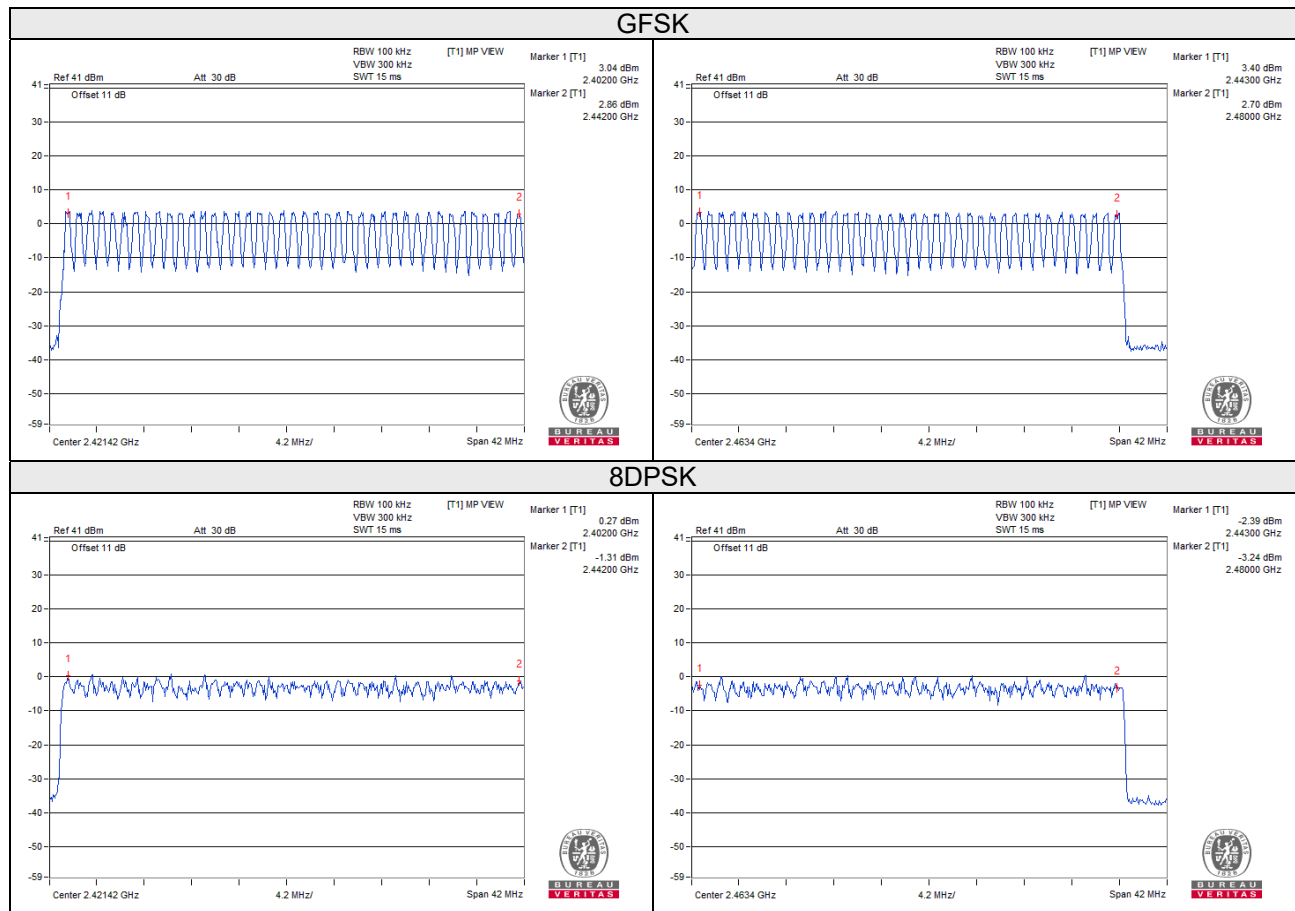

### 4.3 Dwell Time on Each Channel

#### 4.3.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

#### 4.3.5 Deviation from Test Standard

No deviation.

## 4.3.6 Test Results

### GFSK

| Mode | Number of transmission in a 31.6 (79Hopping*0.4) | Length of transmission time (msec) | Result (msec) | Limit (msec) |
|------|--------------------------------------------------|------------------------------------|---------------|--------------|
| DH1  | 50 (times / 5 sec) * 6.32 = 316 times            | 0.440                              | 139.040       | 400          |
| DH3  | 26 (times / 5 sec) * 6.32 = 165 times            | 1.740                              | 287.100       | 400          |
| DH5  | 18 (times / 5 sec) * 6.32 = 114 times            | 2.970                              | 338.580       | 400          |

Note: Test plots of the transmitting time slot are shown as below.



## 8DPSK

| Mode | Number of transmission in a 31.6 (79Hopping*0.4) | Length of transmission time (msec) | Result (msec) | Limit (msec) |
|------|--------------------------------------------------|------------------------------------|---------------|--------------|
| 3DH1 | 50 (times / 5 sec) * 6.32 = 316 times            | 0.413                              | 130.508       | 400          |
| 3DH3 | 25 (times / 5 sec) * 6.32 = 158 times            | 1.690                              | 267.020       | 400          |
| 3DH5 | 17 (times / 5 sec) * 6.32 = 108 times            | 2.916                              | 314.928       | 400          |

Note: Test plots of the transmitting time slot are shown as below.



#### 4.4 Channel Bandwidth

##### 4.4.1 Limits of Channel Bandwidth Measurement

Maximum bandwidth is not specified.

##### 4.4.2 Test Setup



##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

##### 4.4.5 Deviation from Test Standard


No deviation.

##### 4.4.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.4.7 Test Results

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |       |
|---------|-----------------|----------------------|-------|
|         |                 | GFSK                 | 8DPSK |
| 0       | 2402            | 0.96                 | 1.31  |
| 39      | 2441            | 0.97                 | 1.30  |
| 78      | 2480            | 0.96                 | 1.30  |

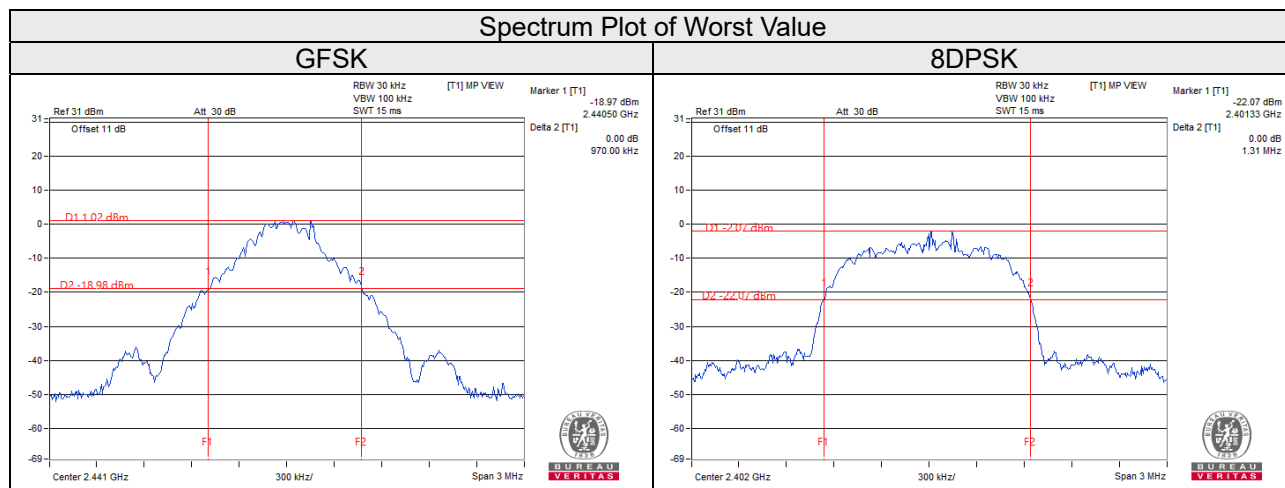

## 4.5 Hopping Channel Separation

### 4.5.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.


### 4.5.5 Deviation from Test Standard

No deviation.

## 4.5.6 Test Results

| Channel | Frequency (MHz) | Adjacent Channel Separation (MHz) |       | 20dB Bandwidth (MHz) |       | Minimum Limit (MHz) |       | Pass / Fail |
|---------|-----------------|-----------------------------------|-------|----------------------|-------|---------------------|-------|-------------|
|         |                 | GFSK                              | 8DPSK | GFSK                 | 8DPSK | GFSK                | 8DPSK |             |
| 0       | 2402            | 1.00                              | 1.00  | 0.96                 | 1.31  | 0.64                | 0.88  | Pass        |
| 39      | 2441            | 1.00                              | 1.00  | 0.97                 | 1.30  | 0.65                | 0.87  | Pass        |
| 78      | 2480            | 1.00                              | 1.00  | 0.96                 | 1.30  | 0.64                | 0.87  | Pass        |

Note: The minimum limit is two-third 20dB bandwidth.

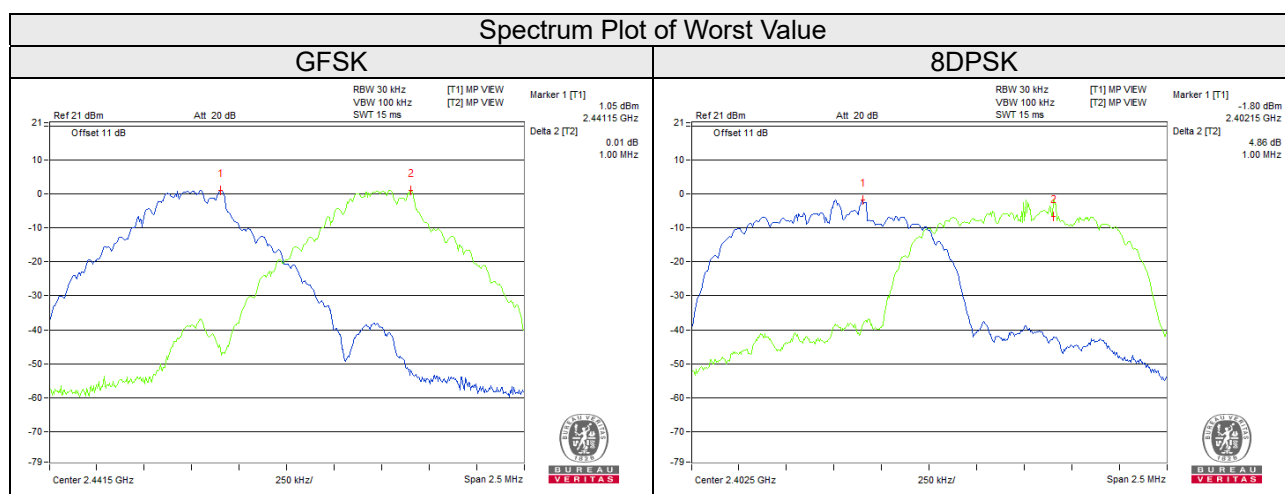


## 4.6 Maximum Output Power

### 4.6.1 Limits of Maximum Output Power Measurement

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 4.6.2 Test Setup

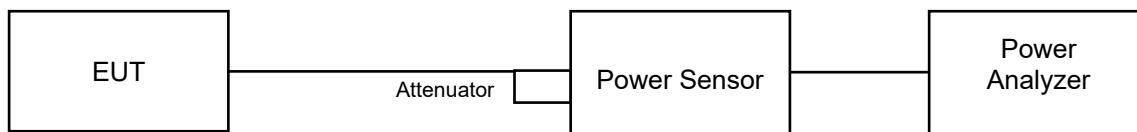

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

For Peak Power

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

For Average Power

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.6.7 Test Results

##### For Peak Power

| Channel | Frequency (MHz) | Peak Power (mW) |       | Peak Power (dBm) |       | Power Limit (mW)           | Pass / Fail |
|---------|-----------------|-----------------|-------|------------------|-------|----------------------------|-------------|
|         |                 | GFSK            | 8DPSK | GFSK             | 8DPSK |                            |             |
| 0       | 2402            | <b>5.383</b>    | 4.808 | 7.31             | 6.82  | 125 / 1000 <sup>Note</sup> | Pass        |
| 39      | 2441            | 5.236           | 4.498 | 7.19             | 6.53  | 125 / 1000 <sup>Note</sup> | Pass        |
| 78      | 2480            | 4.519           | 3.882 | 6.55             | 5.89  | 125 / 1000 <sup>Note</sup> | Pass        |

Note: RF Output Power limit depends on the operating channel numbers, please refer to section 3.2 of the results.

##### For Average Power

| Channel | Frequency (MHz) | Average Power (mW) |       | Average Power (dBm) |       |
|---------|-----------------|--------------------|-------|---------------------|-------|
|         |                 | GFSK               | 8DPSK | GFSK                | 8DPSK |
| 0       | 2402            | 5.272              | 2.679 | 7.22                | 4.28  |
| 39      | 2441            | 5.140              | 2.618 | 7.11                | 4.18  |
| 78      | 2480            | 4.385              | 2.244 | 6.42                | 3.51  |

#### **4.7 Conducted Out of Band Emission Measurement**

##### **4.7.1 Limits Of Conducted Out Of Band Emission Measurement**

Below 20dB of the highest emission level of operating band (in 100kHz RBW).

##### **4.7.2 Test Instruments**

Refer to section 4.1.2 to get information of above instrument.

##### **4.7.3 Test Procedure**

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

##### **4.7.4 Deviation from Test Standard**

No deviation.

##### **4.7.5 EUT Operating Condition**



The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

##### **4.7.6 Test Results**



The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK



### Hopping disabled Low Channel

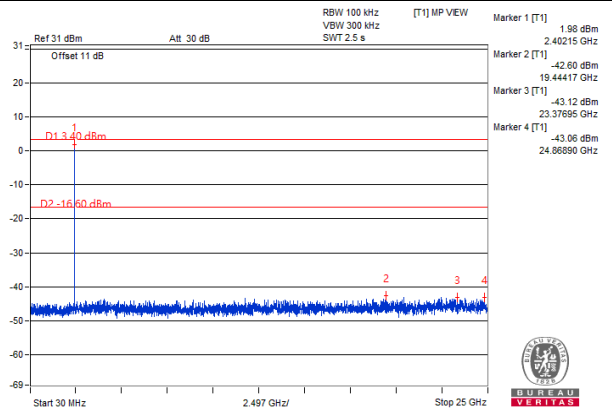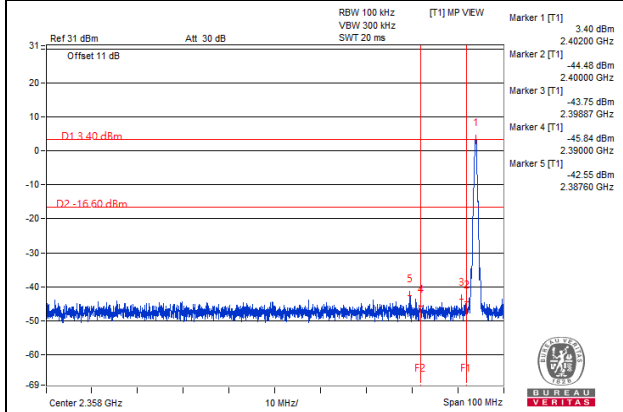



### Hopping disabled High Channel

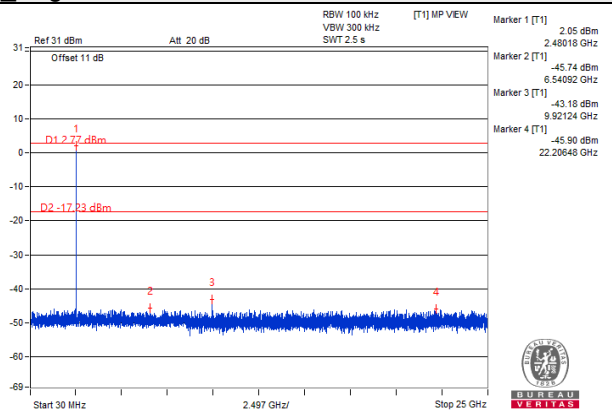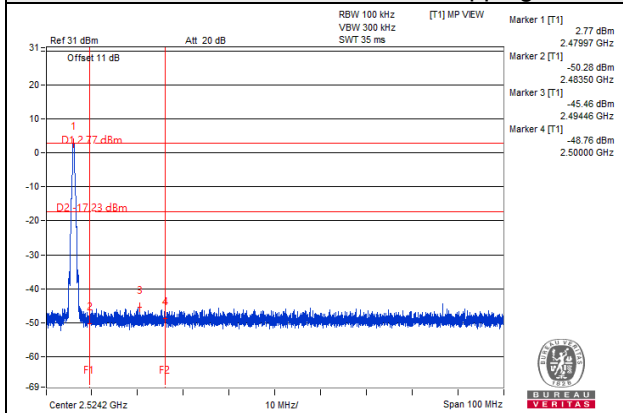

### Hopping enabled Low Channel

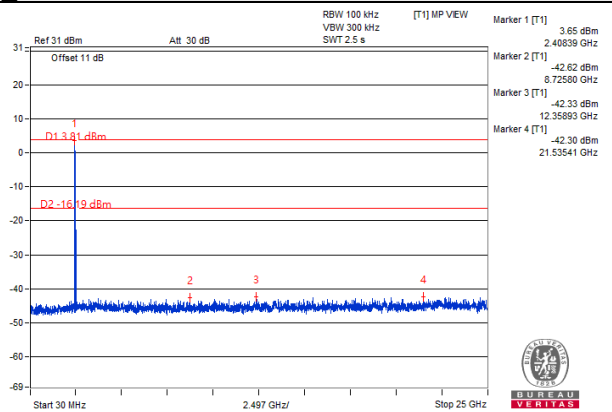
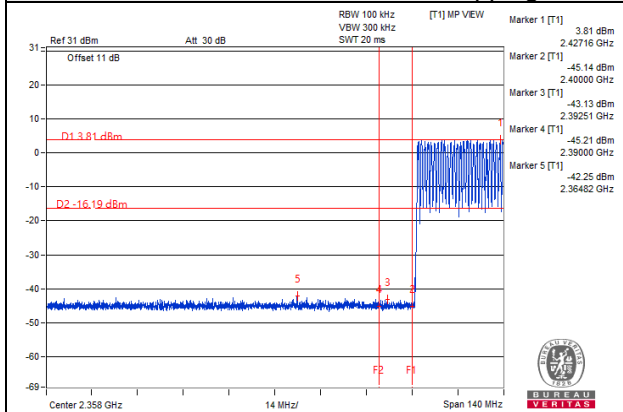


### Hopping enabled High Channel

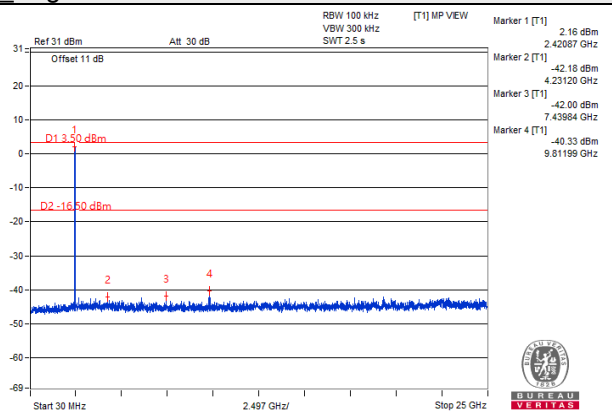
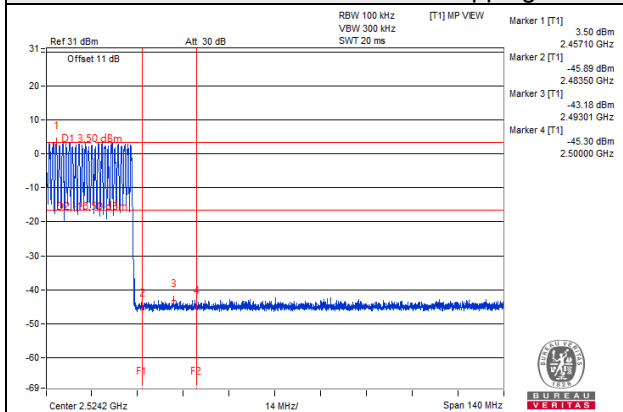


# 8DPSK



## Hopping disabled Low Channel

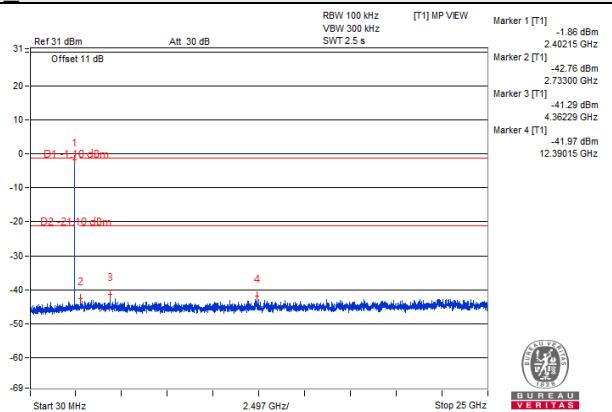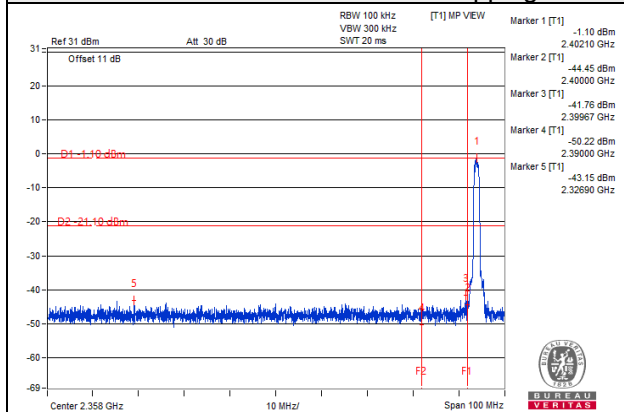



## Hopping disabled High Channel

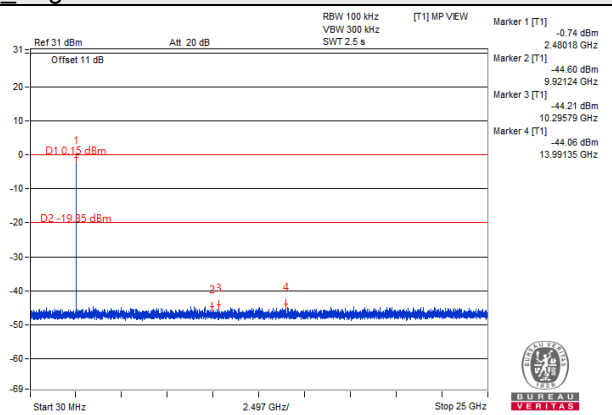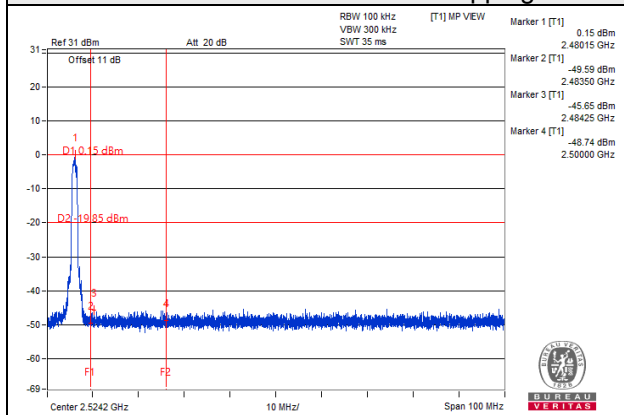


## Hopping enabled Low Channel

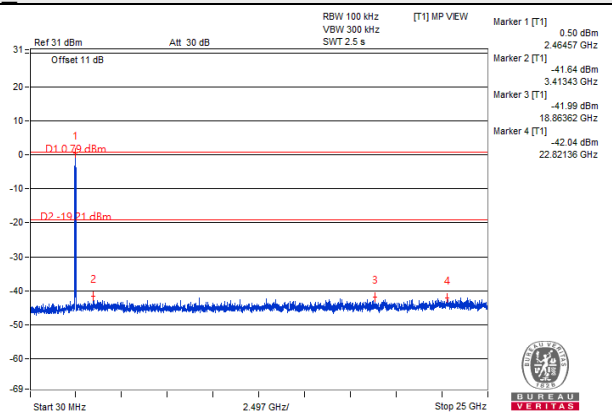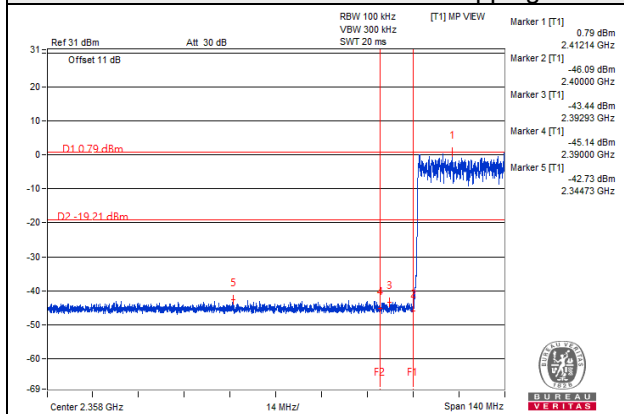

## Hopping enabled High Channel

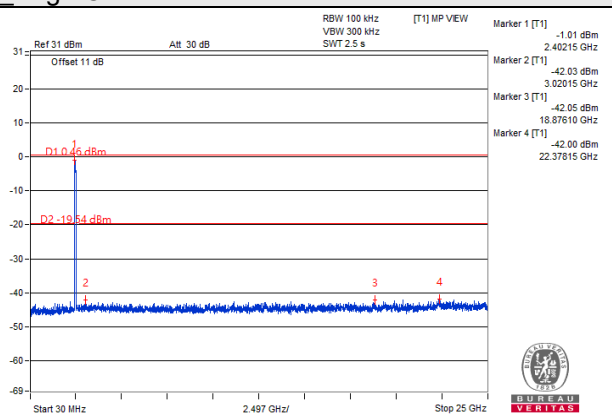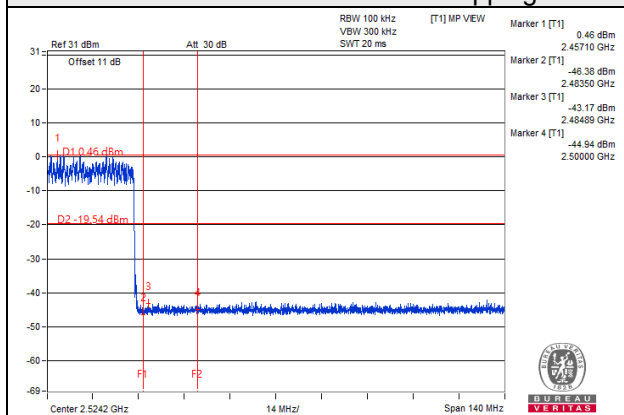

## Annex A- Band Edge Measurement

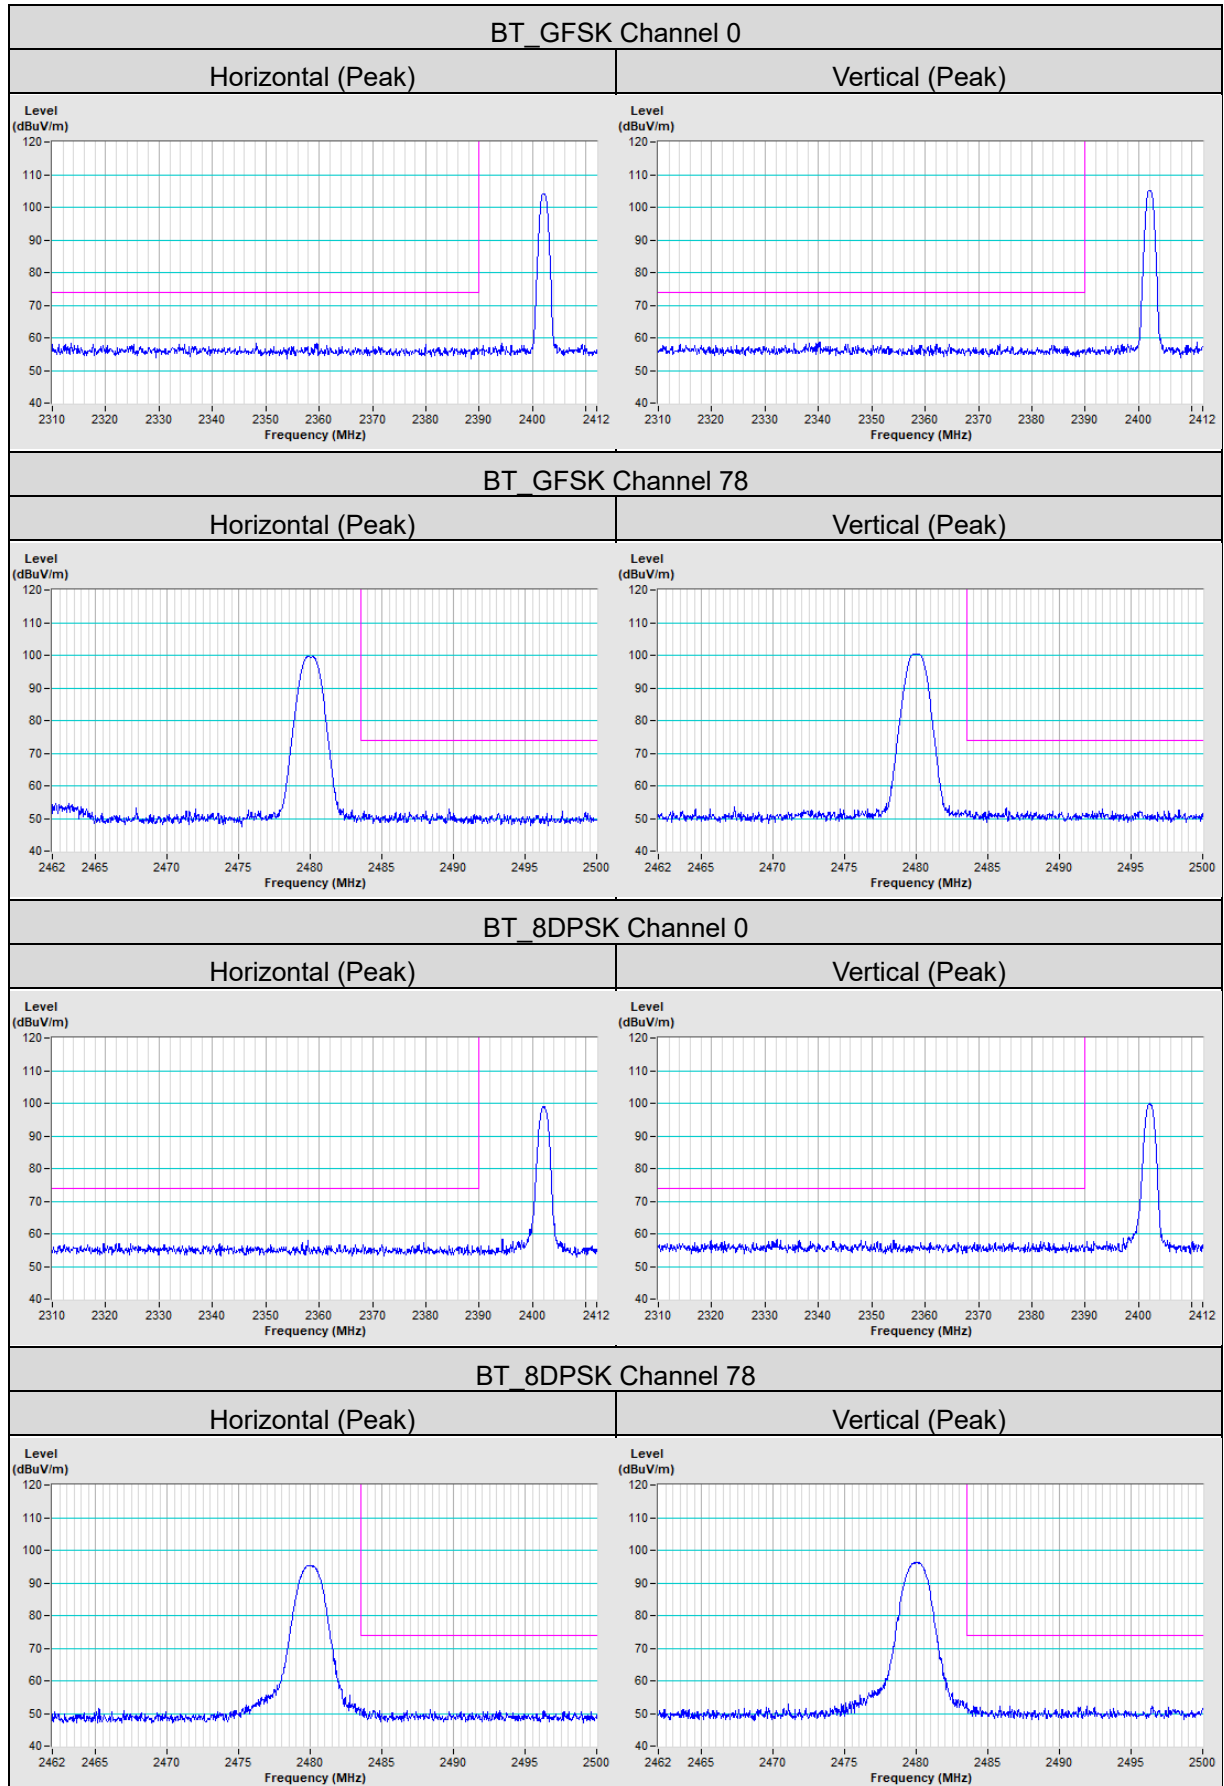

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---