



TEST REPORT

No. I14Z45361-GTE01

for

Gemalto M2M GmbH

BGS5T USB

Model Name: BGS5T

Marketing Name: CINTERION BGS5T Terminal

FCC ID : QIPBGS5

IC ID : 7830A-BGS5

with

Hardware Version: Rev02

Software Version: 01.100

Issued Date: 2014-03-12

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B

TMC Beijing, Telecommunication Metrology Center of the Ministry of Industry and Information Technology

3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai Dian District, Beijing, P. R. China, 100191.

Tel: +86(0)10-62304633-2604, Fax: +86(0)10-62304633, Email: welcome@emcite.com, web: www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. GENERAL DESCRIPTION	5
4. REFERENCE DOCUMENTS	6
4.1. REFERENCE DOCUMENTS FOR TESTING	6
5. LABORATORY ENVIRONMENT	7
6. SUMMARY OF TEST RESULTS	8
7. TEST EQUIPMENTS UTILIZED	9
ANNEX A: MEASUREMENT RESULTS.....	10
A.1 OUTPUT POWER.....	10
A.2 EMISSION LIMIT.....	15
A.3 CONDUCTED EMISSION	21
A.4 FREQUENCY STABILITY	24
A.5 OCCUPIED BANDWIDTH	26
A.6 EMISSION BANDWIDTH.....	42
A.7 BAND EDGE COMPLIANCE	50
A.8 CONDUCTED SPURIOUS EMISSION.....	54
A.9 PEAK-TO-AVERAGE POWER RATIO	75
A.10 RECEIVER RADIATION EMISSION.....	76

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: 3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai
Dian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633


1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: 2014-03-07
Testing End Date: 2014-03-12

1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Gemalto M2M GmbH
Address /Post: Gemalto M2M GmbH St.-Martin-Str.60 81541 München Germany
City: /
Postal Code: /
Country: Germany
Contact Person: Zhang Xiaoshan
Contact Email: xiaoshan.zhang@gemalto.com
Telephone: +86 1059373423
Fax: +86 1064367369

2.2. Manufacturer Information

Company Name: Gemalto M2M GmbH
Address /Post: Gemalto M2M GmbH St.-Martin-Str.60 81541 München Germany
City: /
Postal Code: /
Country: Germany
Telephone: +86 1059373423
Fax: +86 1064367369

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Cinterion BGS5
Model Name	BGS5-T
Marketing Name	Cinterion BGS5
FCC ID	QIPBGS5
IC ID	7830A-BGS5
Frequency	GSM 850MHz; PCS 1900MHz
GPRS operation mode	Class B
GPRS Class	Class 12
Antenna	Integrated
Power supply	Charger (AC Adaptor)
Output power	25.39dBm maximum ERP measured for GSM850
Extreme vol. Limits	3.3VDC to 4.5VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

Note: The EUT is a variant model of BGS5. Only ERP and RSE have been retested, the other result is coming from BGS5.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT02a	358741050004404	Rev02	01.100
UT03a	258741050005187	Rev02	01.100

*EUT ID: is used to identify the test sample in the lab internally.

3.3. General Description

The Equipment Under Test (EUT) is a model of Cinterion BGS5 with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
RSS-Gen	RSS-Gen — General Requirements and Information for the Certification of Radiocommunication Equipment	Issue 3, December 2010
RSS-132	Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz	Issue 3
RSS-133	2 GHz Personal Communications Services	Issue 6
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-13 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-13 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-13 Edition
KDB971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v02r01

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters × 6.1 meters × 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters × 6.7 meters × 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

GSM 850

Items	Test Name	Clause in IC rules RSS-Gen and RSS-132	Section in this report	Verdict
1	Output Power	4.4	A.1	P
2	Emission Limit	4.5	A.2	P
3	CONDUCTED EMISSION		A.3	P
4	Frequency Stability	4.3	A.4	P
5	Occupied Bandwidth	4.1/4.6.1	A.5	P
6	Emission Bandwidth	4.6.1	A.6	P
7	Band Edge Compliance	4.5	A.7	P
8	Conducted Spurious Emission	4.5	A.8	P
9	peak-to-average power ratio	5.4	A.9	P

PCS 1900

Items	Test Name	Clause in IC rules RSS-Gen and RSS-133	Section in this report	Verdict
1	Output Power	6.4	A.1	P
2	Emission Limit	6.5	A.2	P
3	CONDUCTED EMISSION		A.3	P
4	Frequency Stability	6.3	A.4	P
5	Occupied Bandwidth	4.1/4.6.1	A.5	P
6	Emission Bandwidth	4.6.1	A.6	P
7	Band Edge Compliance	6.5	A.7	P
8	Conducted Spurious Emission	6.5	A.8	P
9	peak-to-average power ratio	6.4	A.9	P

Receiver Radiated Emission

Items	Test Name	Clause in IC rules		Section in this report	Verdict
		RSS-132	RSS-133		
1	Receiver Radiated Emissions	4.6	6.6	A.9	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2014-03-28
2	Test Receiver	ESU26	100376	R&S	2014-11-05
3	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
4	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
5	LISN	ESH2-Z5	829991/012	R&S	2014-04-14
6	Universal Radio Communication Tester	CMU200	102228	R&S	2014-06-23
7	Universal Radio Communication Tester	E5515C	MY48361083	Agilent	2014-03-16
8	Spectrum Analyzer	E4440A	MY48250642	Agilent	2015-02-27
9	EMI Antenna	9117	177	Schwarzbeck	2014-06-29
10	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	2014-07-13
11	EMI Antenna	3117	00119021	ETS-Lindgren	2014-04-19
12	Signal Generator	N5183A	MY49060052	Agilent	2014-03-18
13	Climate chamber	SH-241	92003546	ESPEC	2014-05-11
14	Loop Antenna	HFH2-Z2	829324/007	R&S	2014-12-12

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. The power was measured with Rhode & Schwarz Digital Radio Communication tester (CMU-200) These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

A.1.2.2 Test Condition

RBW	VBW	Sweep Time	Span
1MHz	1MHz	300ms	10MHz

GSM850

Limit

	Power step	Nominal Peak output power (dBm)	Power & Multislot class	Operation class
GSM	5	33dBm(2W)	4	/
GPRS	3	33dBm(2W)	12	B

Measurement result

GSM (GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	5	33.66
836.6	5	33.51
848.8	5	33.37

GPRS (GMSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	3	33.69
836.6	3	33.56
848.8	3	33.40

PCS1900

Limit

	Power step	Nominal Peak output power (dBm)	Power & Multislot class	Operation class
GSM	0	30dBm(1W)	1	/
GPRS	3	30dBm(1W)	12	B

Measurement result
GSM (GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	0	29.45
1880.0	0	29.47
1909.8	0	29.42

GPRS (GMSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	3	29.47
1880.0	3	29.51
1909.8	3	29.46

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.1.3.2 Method of Measurement

The measurements procedures in KDB publication 971168 D01 v02r01 are used.

1. ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).
2. The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

GSM 850-ERP 22.913(a)

Limits

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)

Measurement result

GSM

Frequency (MHz)	P _{Meas} - L _C (dBm)	G _T (dBd)	RMS ERP (dBm)	Limit (dBm)
824.20	33.66	0	33.66	38.45
836.60	33.51	0	33.51	38.45
848.80	33.37	0	33.37	38.45

GPRS (GMSK, 1 slot)

Frequency (MHz)	P _{Meas} - L _C (dBm)	G _T (dBd)	RMS ERP (dBm)	Limit (dBm)
824.20	33.69	0	33.69	38.45
836.60	33.56	0	33.56	38.45
848.80	33.40	0	33.40	38.45

Frequency: 824.20MHz

$$\text{Peak ERP} = P_{\text{Meas}} - L_C(33.69\text{dBm}) + G_T(0\text{dBd}) = 33.69\text{dBm}$$

PCS1900-EIRP 24.232(b)

Limits

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)

Measurement result

GSM

Frequency (MHz)	P _{Meas} - L _C (dBm)	G _T (dBi)	RMS EIRP (dBm)	Limit (dBm)
1850.20	29.45	2.15	31.60	33.00
1880.00	29.47	2.15	31.62	33.00
1909.80	29.42	2.15	31.57	33.00

GPRS(GMSK, 1 slot)

Frequency (MHz)	P _{Meas} - L _C (dBm)	G _T (dBi)	RMS EIRP (dBm)	Limit (dBm)
1850.20	29.47	2.15	31.62	33.00
1880.00	29.51	2.15	31.66	33.00
1909.80	29.46	2.15	31.61	33.00

Frequency: 1880.00MHz

$$\text{Peak ERP (dBm)} = P_{\text{Meas}} - L_C(29.51\text{dBm}) + G_T(2.15\text{dBi}) = 31.66\text{dBm}$$

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurement procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

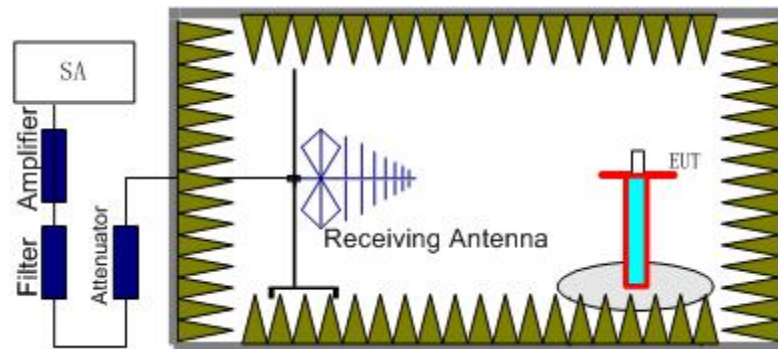

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

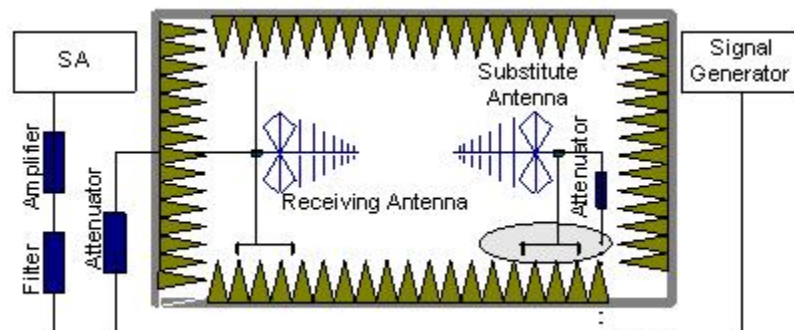

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of PCS1900 (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 and GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
GSM 850MHz	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
GSM 1900MHz	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
850MHz	0.03~1	1 MHz	3 MHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
1900MHz	0.03~1	1 MHz	3 MHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

GSM Mode Channel 128/824.2MHz

Frequency (MHz)	Pmea(dBm)	Cable Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2551.13	-51.73	3.63	-5.53	2.15	-51.98	-13.00	38.98	H
3296.87	-57.35	4.22	-7.41	2.15	-56.31	-13.00	43.31	H
3822.32	-60.99	4.50	-8.29	2.15	-59.35	-13.00	46.35	H
4625.54	-61.64	4.96	-9.03	2.15	-59.72	-13.00	46.72	H
5611.36	-61.91	5.46	-10.04	2.15	-59.48	-13.00	46.48	V
9853.69	-59.13	7.54	-12.46	2.15	-56.36	-13.00	43.36	V

GSM Mode Channel 190/836.6MHz

Frequency (MHz)	Pmea(dBm)	Cable Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1939.83	-55.18	3.18	-4.16	2.15	-56.35	-13.00	43.35	V
4555.00	-60.66	4.95	-8.90	2.15	-58.86	-13.00	45.86	H
4949.33	-60.70	5.10	-9.61	2.15	-58.34	-13.00	45.34	V
5121.37	-59.33	5.24	-9.77	2.15	-56.95	-13.00	43.95	V
6518.89	-61.23	6.03	-10.62	2.15	-58.79	-13.00	45.79	V
7347.80	-60.08	6.49	-11.31	2.15	-57.41	-13.00	44.41	H

GSM Mode Channel 251/848.8MHz

Frequency (MHz)	Pmea(dBm)	Cable Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.96	-57.64	2.95	-5.23	2.15	-57.51	-13.00	44.51	H
4695.33	-60.42	4.94	-9.15	2.15	-58.36	-13.00	45.36	H
5277.57	-61.38	5.34	-9.87	2.15	-59.00	-13.00	46.00	H
6080.08	-59.22	5.81	-10.26	2.15	-56.92	-13.00	43.92	V
6599.84	-59.36	6.10	-10.70	2.15	-56.91	-13.00	43.91	V
7548.85	-60.77	6.70	-11.45	2.15	-58.17	-13.00	45.17	V

GSM Mode Channel 512/1850.2MHz

Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3811.76	-61.67	4.48	-8.27	-57.88	-13.00	44.88	H
5162.25	-58.92	5.21	-9.80	-54.33	-13.00	41.33	V
6976.44	-61.82	6.27	-11.08	-57.01	-13.00	44.01	H
9063.12	-58.87	7.53	-12.60	-53.80	-13.00	40.80	H
10501.25	-56.81	8.07	-12.50	-52.38	-13.00	39.38	H
13648.45	-53.63	9.11	-13.86	-48.88	-13.00	35.88	H

GSM Mode Channel 661/1880.0MHz

Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3919.77	-57.67	4.51	-8.40	-53.78	-13.00	40.78	H
6010.00	-58.62	5.63	-10.21	-54.04	-13.00	41.04	V
6903.13	-60.11	6.10	-11.00	-55.21	-13.00	42.21	H
9567.06	-58.45	7.74	-12.57	-53.62	-13.00	40.62	V
12327.02	-53.93	8.79	-12.63	-50.09	-13.00	37.09	H
13758.60	-53.56	9.14	-13.90	-48.80	-13.00	35.80	H

GSM Mode Channel 810/1909.8MHz

Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3511.13	-59.93	4.33	-7.91	-56.35	-13.00	43.35	V
4713.13	-61.18	4.96	-9.18	-56.96	-13.00	43.96	H
5864.63	-60.02	5.64	-10.15	-55.51	-13.00	42.51	H
7639.22	-57.80	6.72	-11.54	-52.98	-13.00	39.98	H
9730.76	-59.55	7.79	-12.51	-54.83	-13.00	41.83	H
13748.23	-53.21	9.13	-13.90	-48.44	-13.00	35.44	V

A.3 CONDUCTED EMISSION


The measurement procedure in ANSI C63.4-1003 is used. Conducted Emission is measured with travel charger.

A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

A.3.2 Measurement result

GSM850MHz

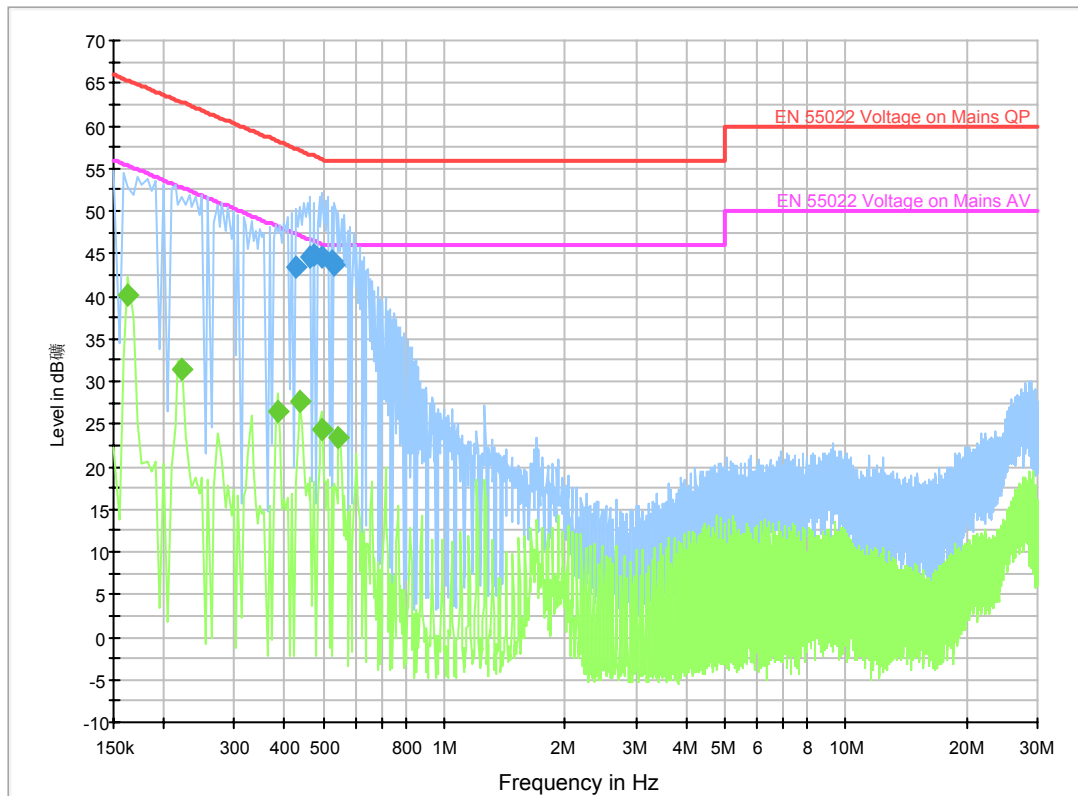


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.429001	43.4	GND	L1	9.9	13.9	57.3
0.465001	44.6	GND	L1	9.9	12.0	56.6
0.474001	44.7	GND	L1	9.9	11.7	56.4
0.496501	44.6	GND	L1	9.9	11.4	56.1
0.523501	44.0	GND	L1	9.9	12.0	56.0
0.532501	43.7	GND	L1	9.9	12.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163501	40.2	GND	N	9.9	15.1	55.3
0.222001	31.5	GND	N	9.9	21.3	52.7
0.384001	26.4	GND	N	9.9	21.8	48.2
0.438001	27.8	GND	L1	9.9	19.3	47.1
0.496501	24.4	GND	L1	9.9	21.6	46.1
0.546001	23.4	GND	L1	9.9	22.6	46.0

PCS1900MHz

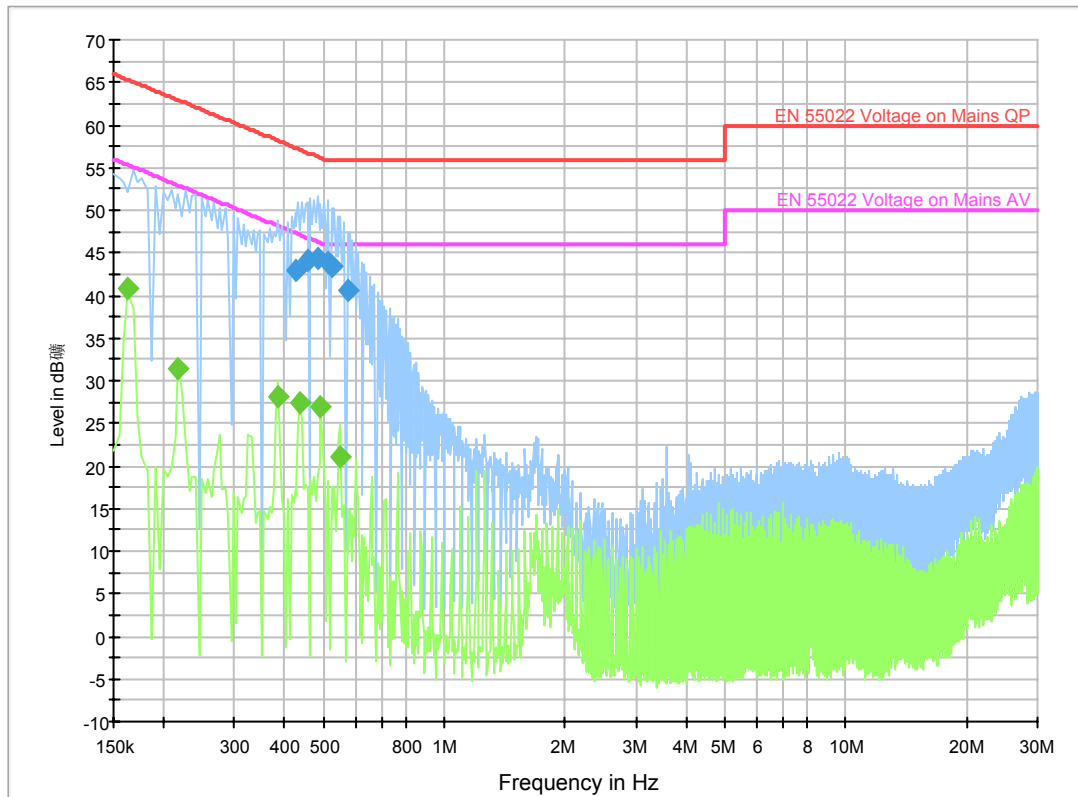

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.424501	42.9	GND	L1	9.9	14.4	57.4
0.456001	44.1	GND	L1	9.9	12.7	56.8
0.483001	44.4	GND	L1	9.9	11.9	56.3
0.514501	43.8	GND	L1	9.9	12.2	56.0
0.523501	43.4	GND	L1	9.9	12.6	56.0
0.573001	40.7	GND	L1	9.9	15.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.163501	40.8	GND	L1	9.9	14.4	55.3
0.217501	31.5	GND	N	9.9	21.4	52.9
0.384001	28.2	GND	L1	9.9	20.0	48.2
0.438001	27.3	GND	N	9.9	19.8	47.1
0.492001	27.0	GND	N	9.9	19.2	46.1
0.550501	21.1	GND	L1	9.9	24.9	46.0

A.4 FREQUENCY STABILITY

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 and channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.4.3 Measurement results

GSM 850

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-41	0.049
3.8	-35	0.042
4.2	-29	0.035

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-58	0.069
-20	-29	0.035
-10	-36	0.043
0	-38	0.045
10	-35	0.042
20	-30	0.036
30	-33	0.039
40	-30	0.035
50	-38	0.046

PCS 1900

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-62	0.033
3.8	-54	0.029
4.2	-52	0.027

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-59	0.031
-20	-63	0.034
-10	-53	0.028
0	-60	0.032
10	-69	0.037
20	-58	0.031
30	-42	0.022
40	-53	0.028
50	-60	0.032

A.5 OCCUPIED BANDWIDTH

A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

GSM 850(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	242.788
836.6	243.590
848.8	244.391

GSM 850

Channel 128-Occupied Bandwidth (99% BW)

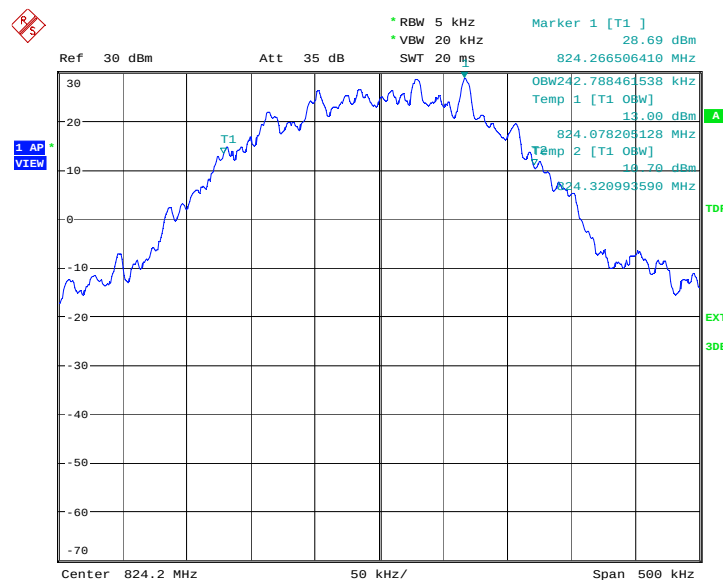

Date: 30.JUL.2013 10:37:46

RBW 5 kHz
 VBW 20 kHz
 SWT 20 ms

Ref 30 dBm
 Att 35 dB

Marker 1 [T1]
 28.79 dBm
 836.668108974 MHz

OBW243.589743590 kHz
 Temp 1 [T1 OBW]
 12.66 dBm
 836.478205128 MHz
 Temp 2 [T1 OBW]
 4.39 dBm
 836.721794872 MHz

1 AP VIEW

TDF
 EXT
 3DB

Center 836.6 MHz
 50 kHz/
 Span 500 kHz

1 AP VIEW

Ref 30 dBm Att 35 dB

RBW 5 kHz VBW 20 kHz SWT 20 ms

Marker 1 [T1] 28.66 dBm 848.867307692 MHz

OBW244.391025641 kHz Temp 1 [T1 OBW] 12.26 dBm

848.678205128 MHz Temp 2 [T1 OBW] 8.88 dBm

848.922596154 MHz

Center 848.8 MHz 50 kHz/ Span 500 kHz

Date: 30.JUL.2013 10:38:51

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	244.391
836.6	243.590
848.8	244.391

Ref 30 dBm Att 35 dB RBW 5 kHz VBW 20 kHz SWT 20 ms

Marker 1 [T1] 28.96 dBm 824.267307692 MHz

OBW244.391024641 kHz

Temp 1 [T1 OBW] 12.31 dBm

824.077483846 MHz


Temp 2 [T1 OBW] 10.14 dBm

824.321794872 MHz

Center 824.2 MHz 50 kHz/ Span 500 kHz


Date: 27.AUG.2013 08:56:42

Channel 190-Occupied Bandwidth (99% BW)

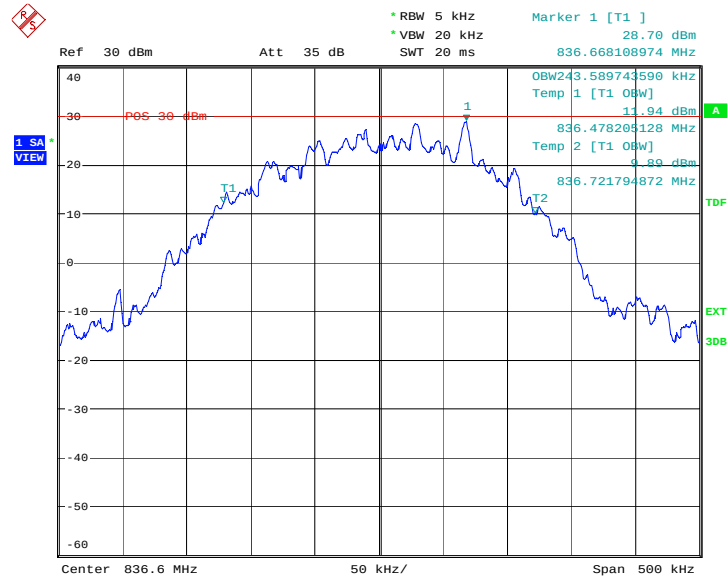

Date: 27.AUG.2013 08:57:15

Channel 251-Occupied Bandwidth (99% BW)

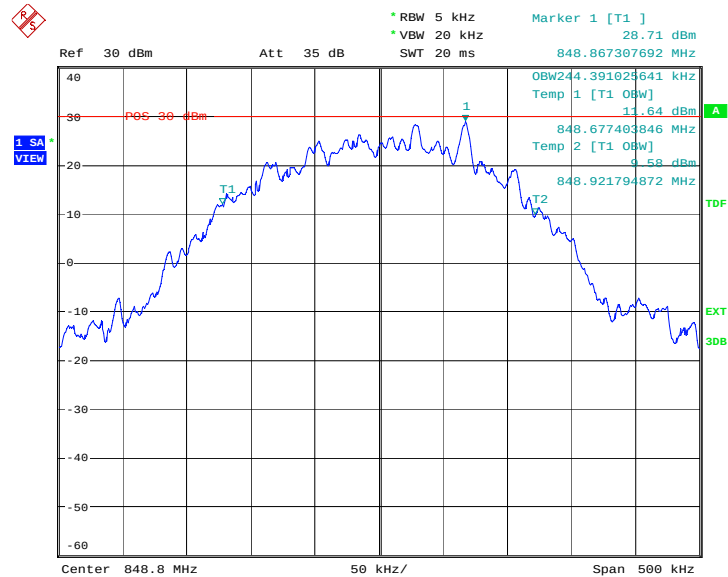


Date: 27.AUG.2013 08:57:47

GPRS 850(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	244.391
836.6	243.590
848.8	248.397


GPRS 850

Channel 128-Occupied Bandwidth (99% BW)

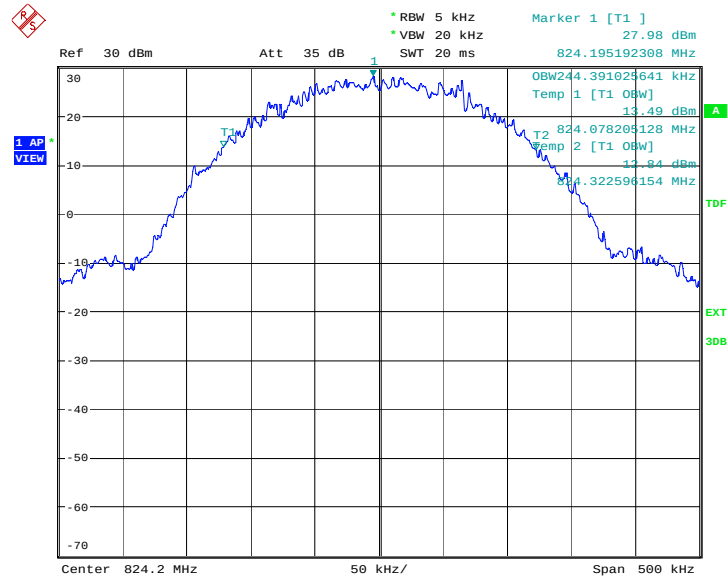


Date: 30.JUL.2013 11:12:28

Channel 190-Occupied Bandwidth (99% BW)

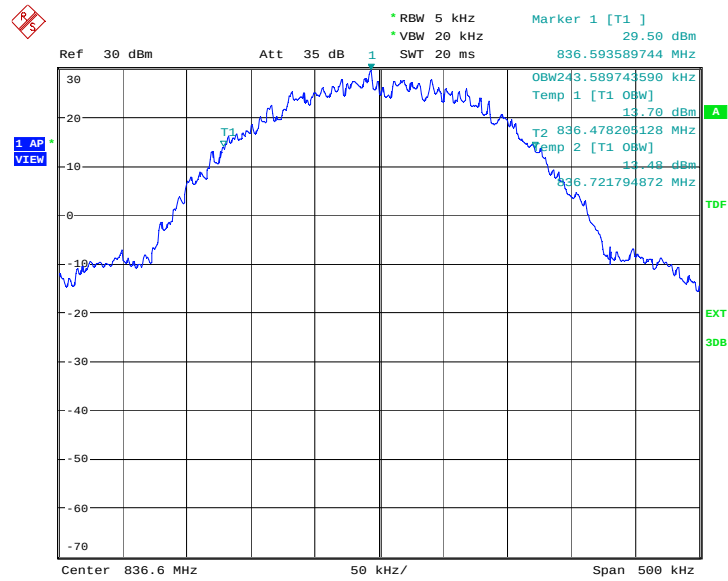

Date: 30.JUL.2013 11:13:00

Channel 251-Occupied Bandwidth (99% BW)

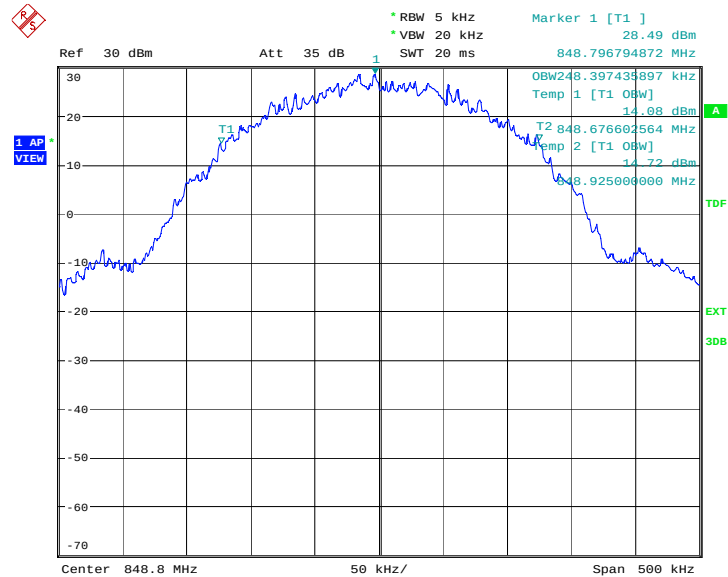


Date: 30.JUL.2013 11:13:32

GPRS 850(99% BW)-IC

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	244.391
836.6	245.994
848.8	244.391

GPRS 850

Channel 128-Occupied Bandwidth (99% BW)

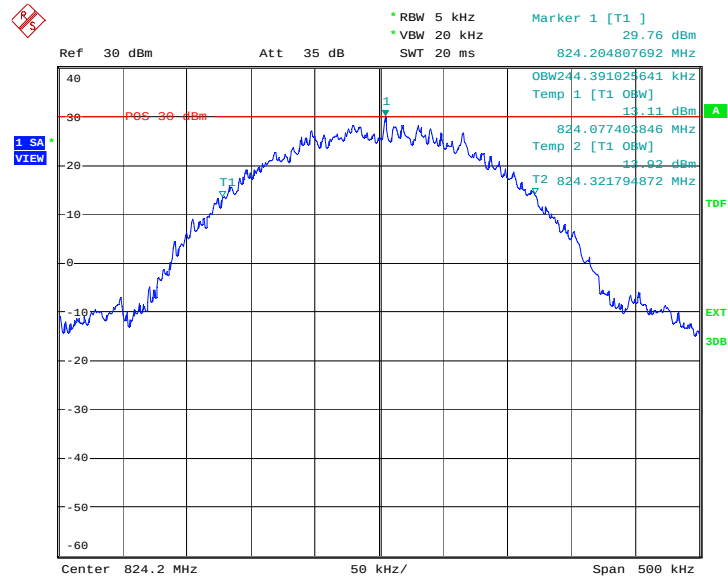

Date: 27.AUG.2013 09:11:13

Ref 30 dBm Att 35 dB

* RBW 5 kHz
* VBW 20 kHz
SWT 20 ms

Marker 1 [T1]
28.72 dBm
836.600000000 MHz

OBW245.993589744 kHz
Temp 1 [T1 OBW]
13.24 dBm

836.476692564 MHz
Temp 2 [T1 OBW]
11.77 dBm

836.722596154 MHz

Center 836.6 MHz 50 kHz/ Span 500 kHz

Ref 30 dBm Att 35 dB

RBW 5 kHz VBW 20 kHz SWT 20 ms

Marker 1 [T1] 28.23 dBm 848.781570513 MHz

Marker 2 [T1] 12.62 dBm 848.922596154 MHz

OBW244.391029641 kHz Temp 1 [T1] 13.01 dBm

848.678209128 MHz Temp 2 [T1] 12.62 dBm

1 SA VICM

Center 848.8 MHz Span 500 kHz

50 kHz/

30dB

EXT

TDF

A


Date: 27.AUG.2013 09:12:17

PCS 1900(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	242.788
1880.0	242.788
1909.8	243.590


PCS 1900

Channel 512-Occupied Bandwidth (99% BW)

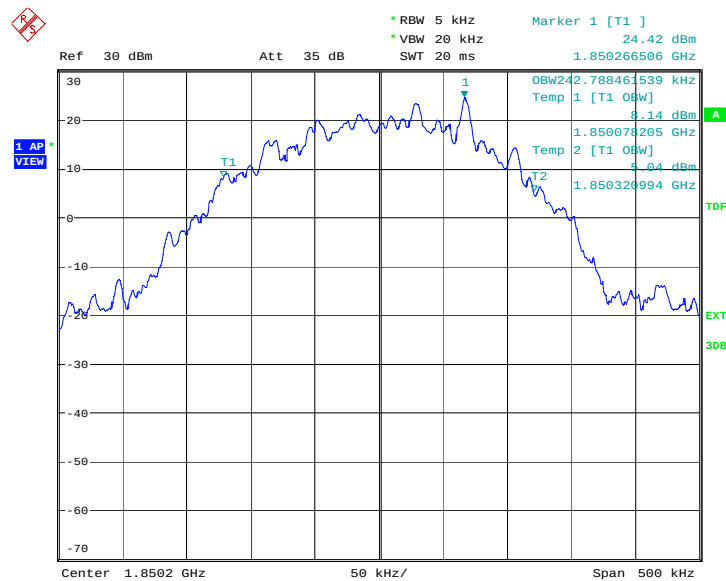


Date: 30.JUL.2013 10:52:05

Channel 661-Occupied Bandwidth (99% BW)

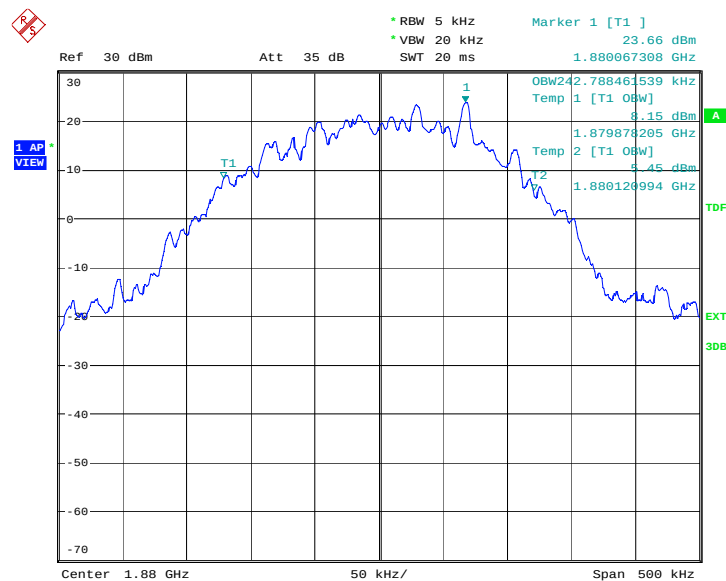

Date: 30.JUL.2013 10:52:37

Channel 810-Occupied Bandwidth (99% BW)

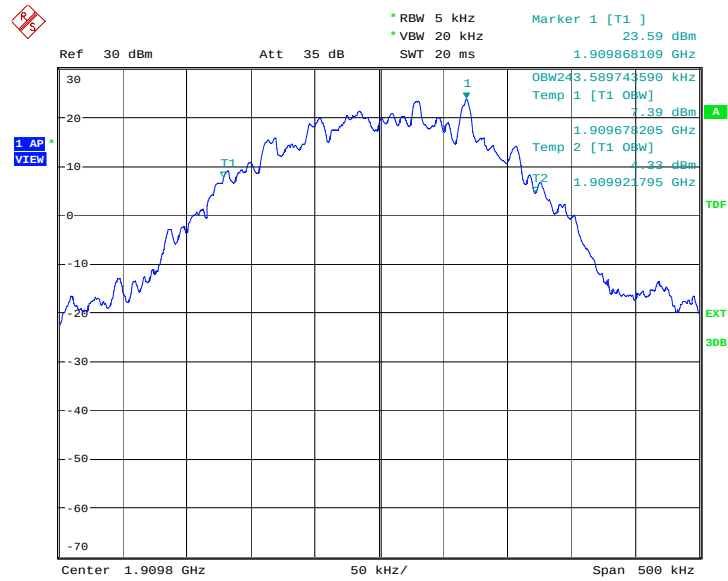


Date: 30.JUL.2013 10:53:10

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	243.590
1880.0	242.788
1909.8	243.590

RBW 5 kHz
 VBW 20 kHz
 Span 500 kHz
 Center 1.8502 GHz
 50 kHz/
 Ref 30 dBm
 Att 35 dB
 SWT 20 ms
 Marker 1 [T1]
 23.30 dBm
 1.850267308 GHz
 1.85077404 GHz
 1.850320994 GHz
 T1
 T2
 1
 2
 1 SA
 VIEW
 A
 TDF
 EXT
 3DB


Date: 27.AUG.2013 09:03:45

Channel 661-Occupied Bandwidth (99% BW)

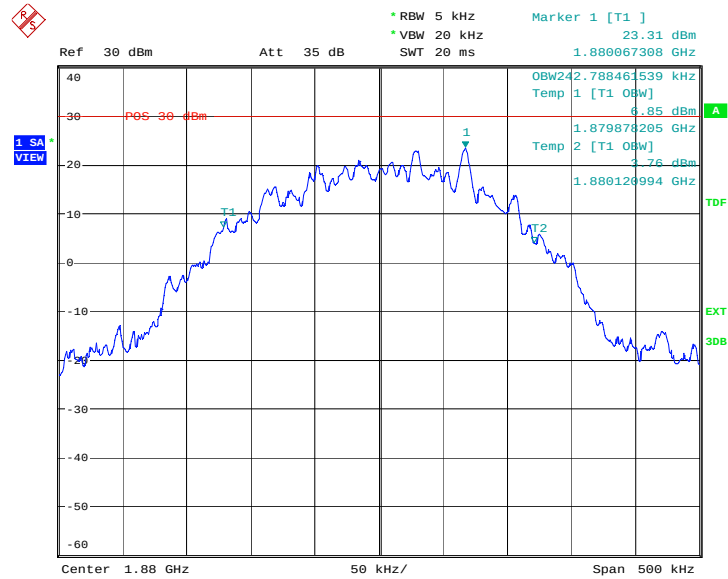

Date: 27.AUG.2013 09:04:17

Channel 810-Occupied Bandwidth (99% BW)

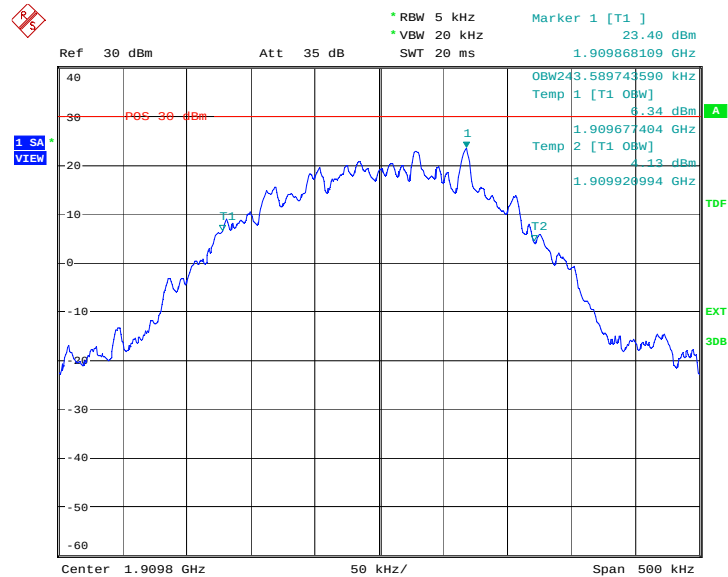


Date: 27.AUG.2013 09:04:50

GPRS 1900(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	240.385
1880.0	242.788
1909.8	248.397


GPRS 1900

Channel 512-Occupied Bandwidth 99% BW)

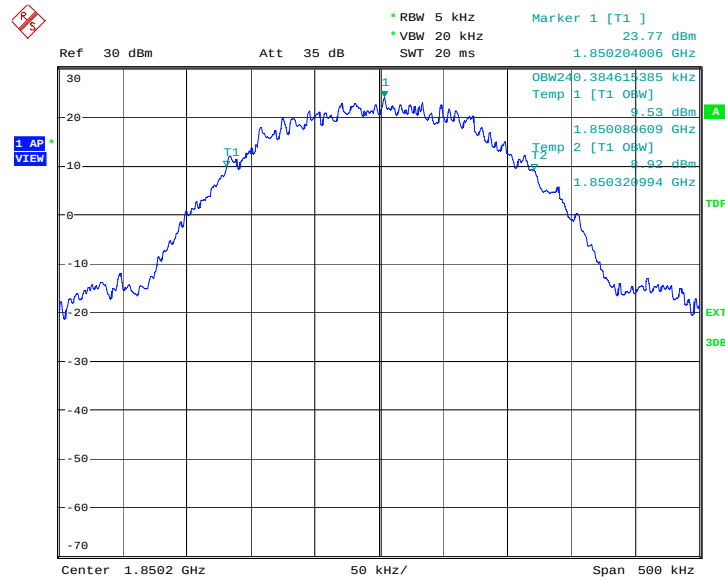


Date: 30.JUL.2013 11:18:02

Channel 661-Occupied Bandwidth (99% BW)

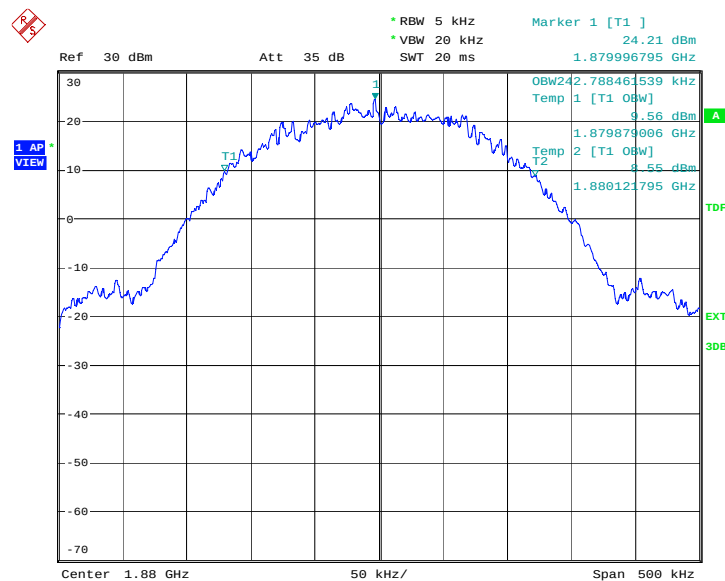

Date: 30.JUL.2013 11:18:34

Channel 810-Occupied Bandwidth (99% BW)

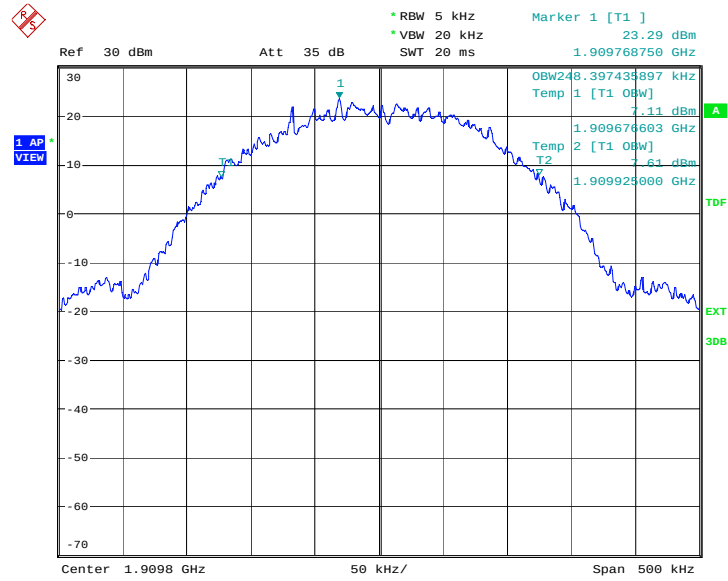

Date: 30.JUL.2013 11:19:06

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	242.788
1880.0	247.596
1909.8	243.590

1 SA VZISW

Ref 30 dBm Att 35 dB

Center 1.8502 GHz Span 500 kHz


OBW242.788461539 kHz
Temp 1 [T1 OBW] 8.16 dBm
Temp 1.850078205 GHz
2 [T1 OBW] 8.82 dBm
Temp 1.850320994 GHz

Marker 1 [T1] 23.82 dBm

*RBW 5 kHz
*VBW 20 kHz
SWT 20 ms


Date: 27.AUG.2013 09:17:48

Channel 661-Occupied Bandwidth (99% BW)

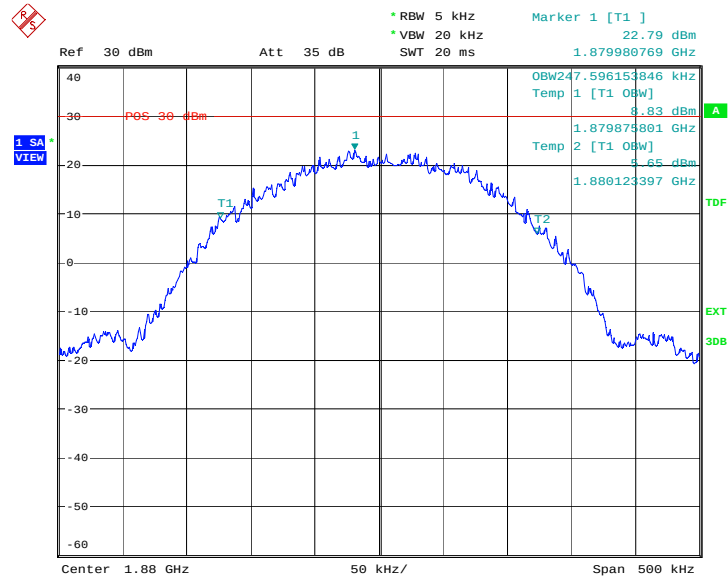

Date: 27.AUG.2013 09:18:20

Channel 810-Occupied Bandwidth (99% BW)

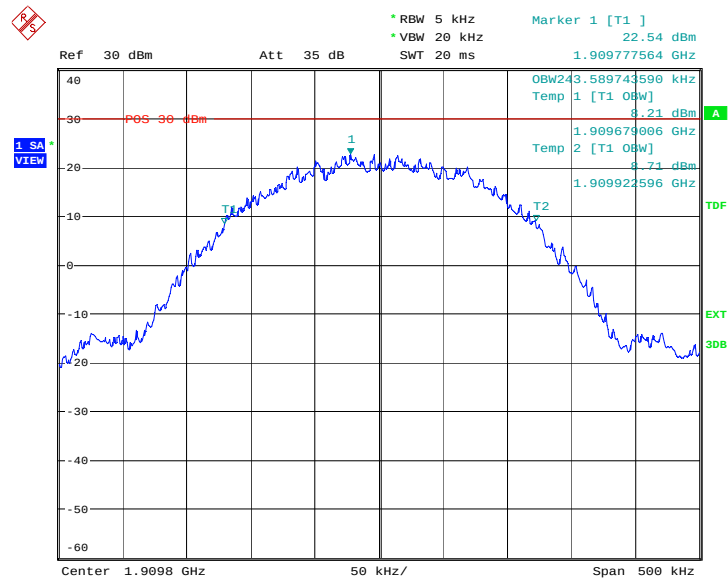

Date: 27.AUG.2013 09:18:52

A.6 EMISSION BANDWIDTH

A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. Table below lists the measured 100% BW. Spectrum analyzer plots are included on the following pages.

GSM 850(100% BW)

Frequency(MHz)	Emission Bandwidth (100% BW)(kHz)
824.2	310.096
836.6	310.096
848.8	309.295


GSM 850

Channel 128-Emission Bandwidth (100% BW)

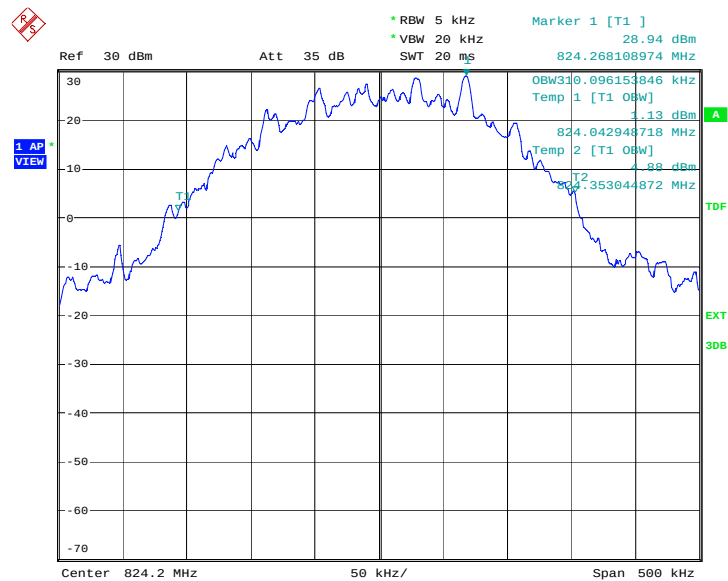


Date: 30.JUL.2013 10:39:25

Channel 190-Emission Bandwidth (100% BW)

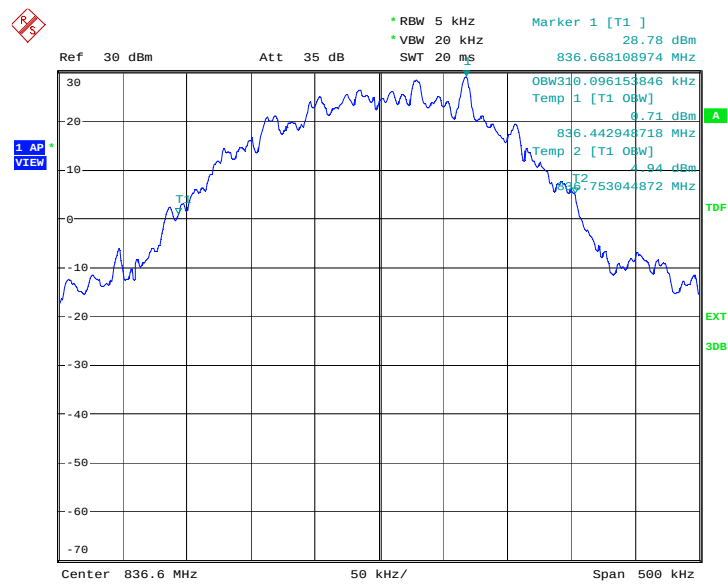

Date: 30.JUL.2013 10:39:57

Channel 251-Emission Bandwidth (100% BW)

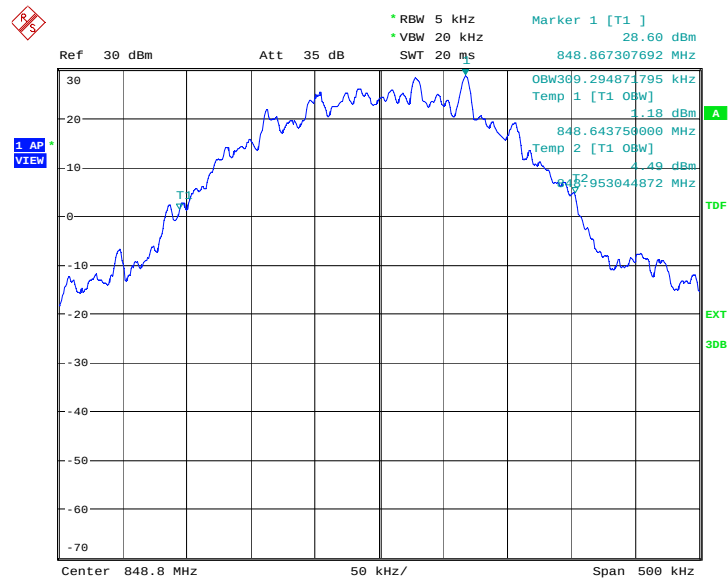


Date: 30.JUL.2013 10:40:30

GPRS 850(100% BW)

Frequency(MHz)	Emission Bandwidth (100% BW)(kHz)
824.2	309.295
836.6	309.295
848.8	306.891


GPRS 850

Channel 128-Emission Bandwidth (100% BW)

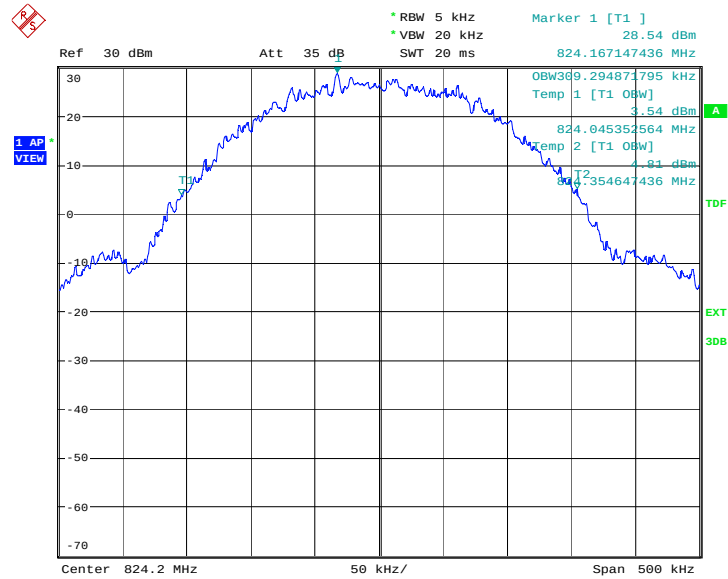


Date: 30.JUL.2013 11:14:06

Channel 190-Emission Bandwidth (100% BW)

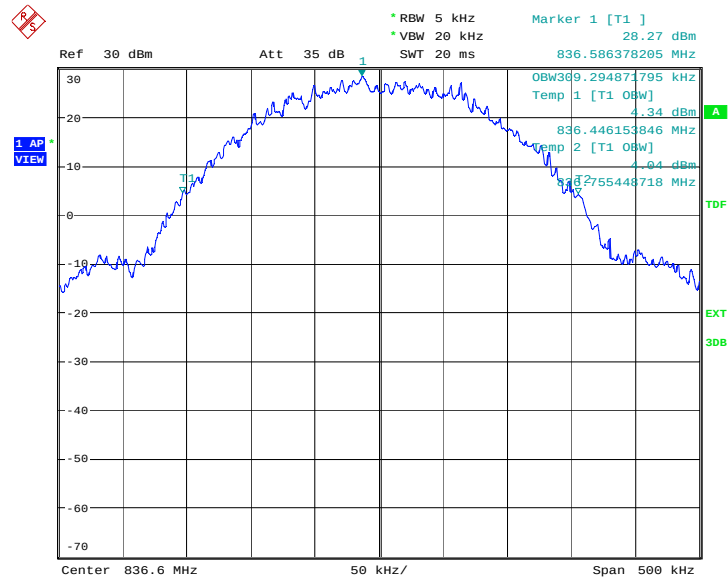

Date: 30.JUL.2013 11:14:38

Channel 251-Emission Bandwidth (100% BW)

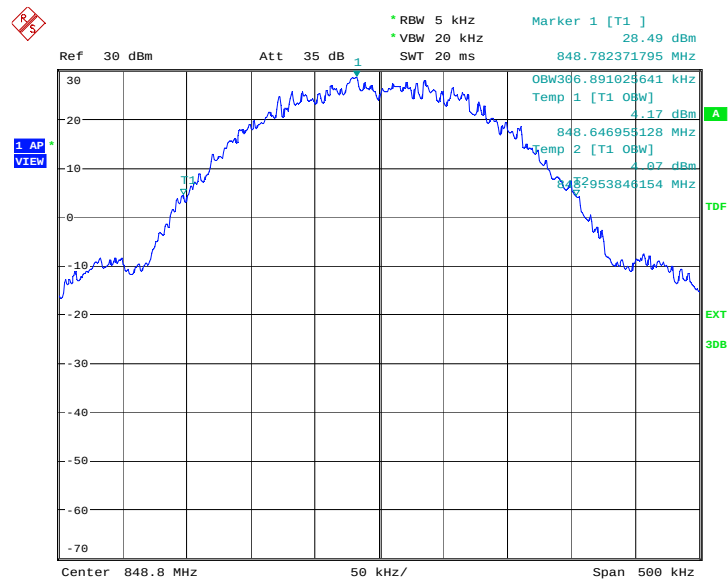


Date: 30.JUL.2013 11:15:10

PCS 1900(100% BW)

Frequency(MHz)	Emission Bandwidth (100% BW)(kHz)
1850.2	309.295
1880.0	308.494
1909.8	310.096


PCS 1900

Channel 512-Emission Bandwidth (100% BW)

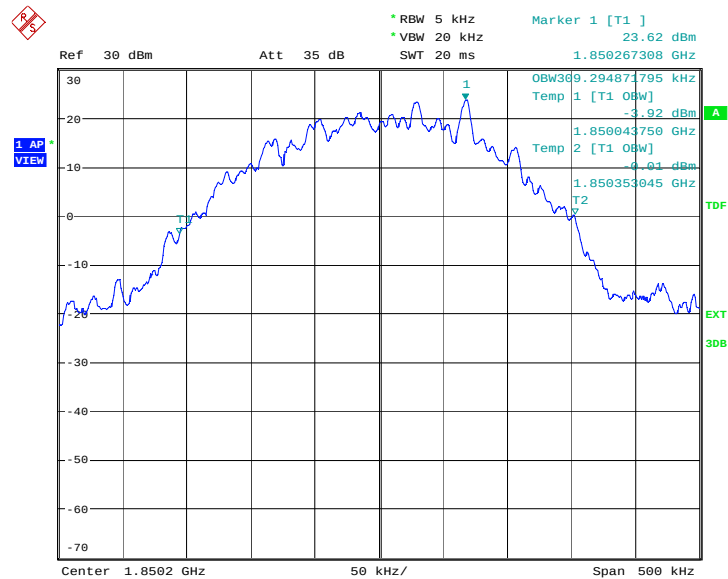

Date: 30.JUL.2013 10:53:44

Channel 661-Emission Bandwidth (100% BW)

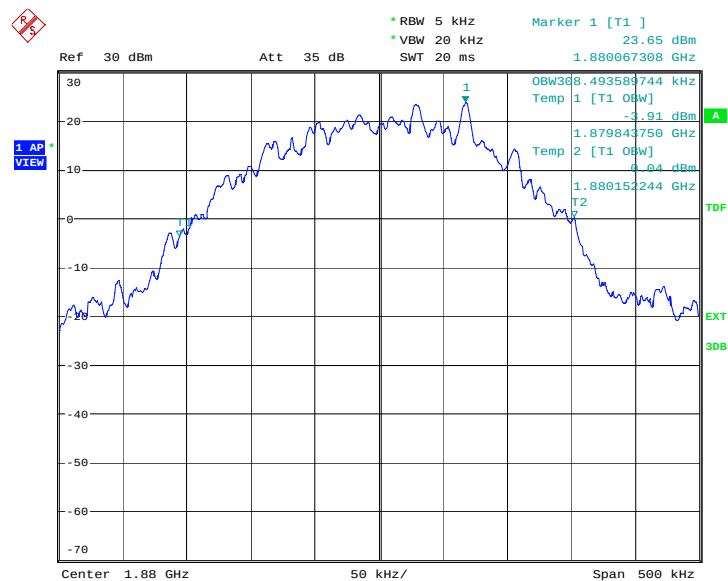

Date: 30.JUL.2013 10:54:16

The image shows a Spectrum Analyzer interface. At the top left is a logo. The top status bar displays:

- Ref 30 dBm
- Att 35 dB
- RBW 5 kHz
- VBW 20 kHz
- SWT 20 ms
- Marker 1 [T1]
- 23.64 dBm
- 1.909868109 GHz

The main display area shows a frequency spectrum plot with a blue trace. A green arrow points to a peak labeled '1' at 1.909642949 GHz. The y-axis represents power in dBm, ranging from -70 to 30. The x-axis represents frequency in kHz, with a center frequency of 1.9098 GHz and a span of 500 kHz.

On the right side, there is a data table:

OBW310	0.096153846 kHz
Temp 1	[T1 OBW]
	-4.76 dBm
Temp 2	[T1 OBW]
	-8.27 dBm
1.909642949 GHz	
1.909953045 GHz	
T2	

At the bottom, the plot parameters are: Center 1.9098 GHz, 50 kHz/, and Span 500 kHz.


Date: 30.JUL.2013 10:54:48

GPRS 1900(100% BW)

Frequency(MHz)	Emission Bandwidth (100% BW)(kHz)
1850.2	306.891
1880.0	306.090
1909.8	307.692


GPRS 1900

Channel 512-Emission Bandwidth (100% BW)

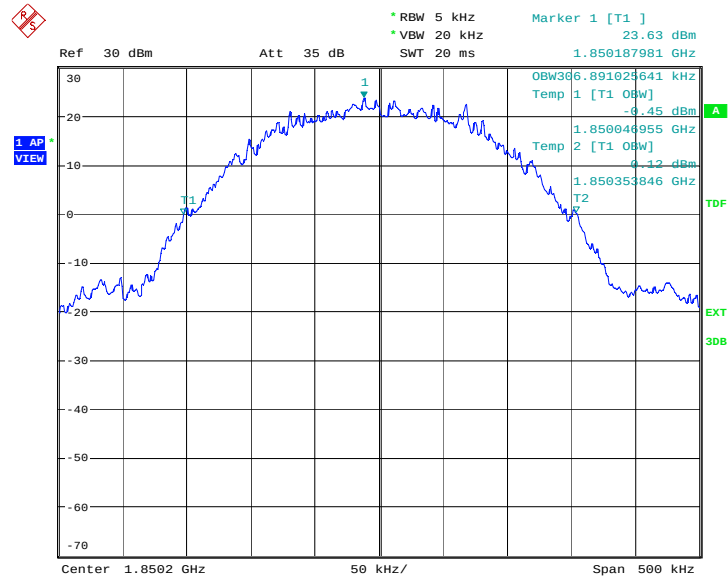


Date: 30.JUL.2013 11:19:40

Channel 661-Emission Bandwidth (100% BW)

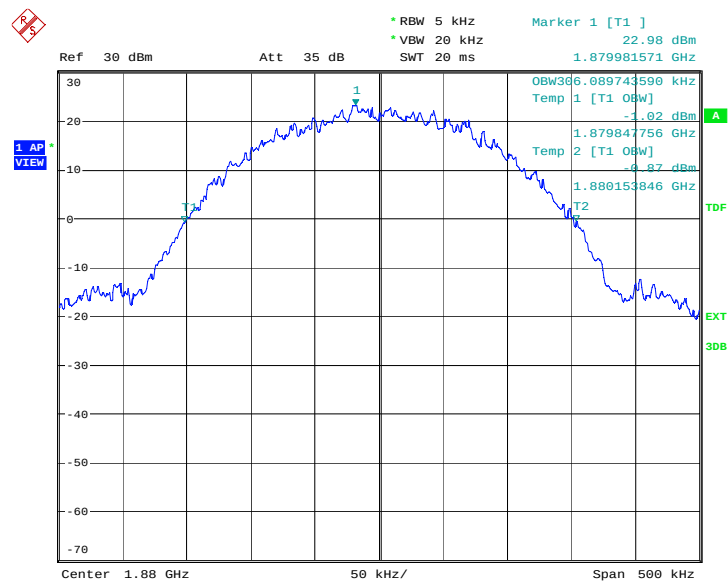


Date: 30.JUL.2013 11:20:12

Channel 810-Emission Bandwidth (100% BW)

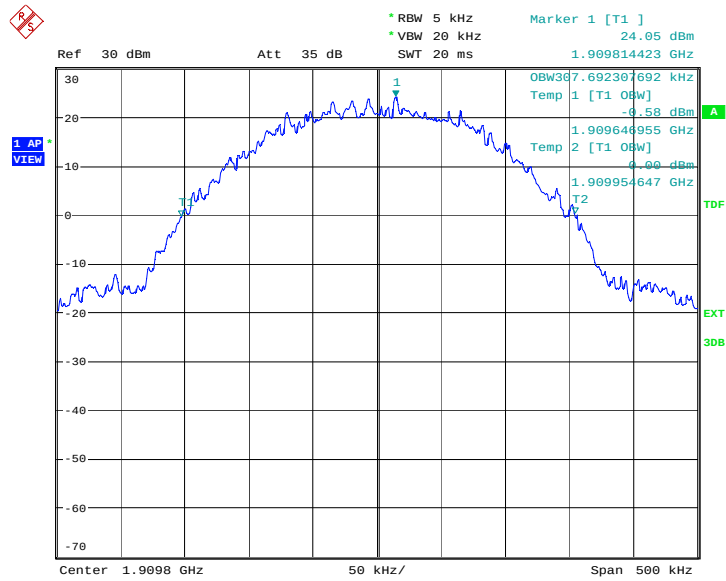

Date: 30.JUL.2013 11:20:44


LOW BAND EDGE BLOCK-A (GSM850)-Channel 128



Date: 30.JUL.2013 11:44:30


GPRS 850

LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

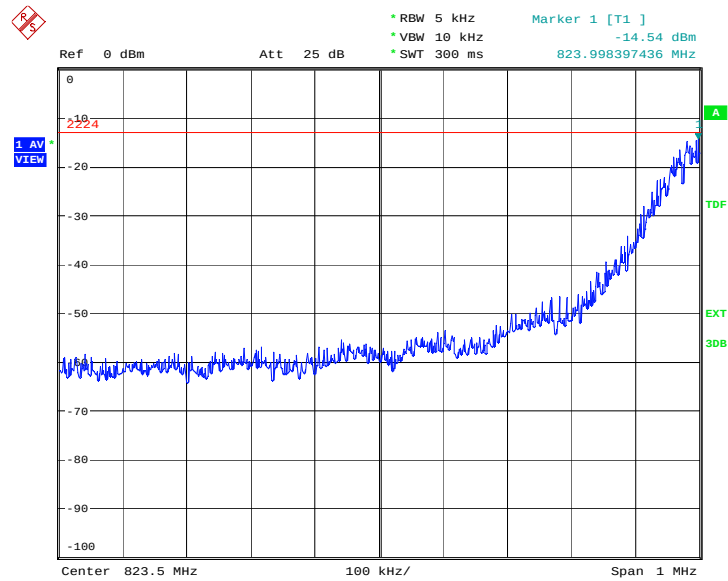

Date: 30.JUL.2013 11:15:24


HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

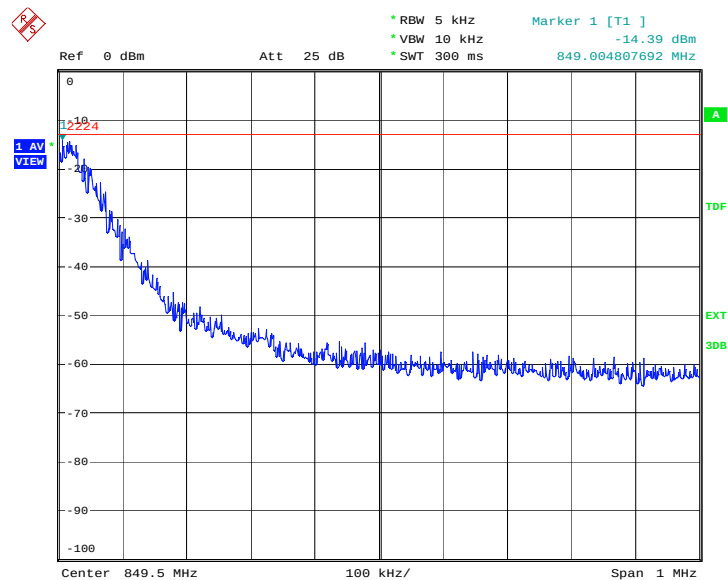

Date: 30.JUL.2013 11:15:38


PCS 1900

LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

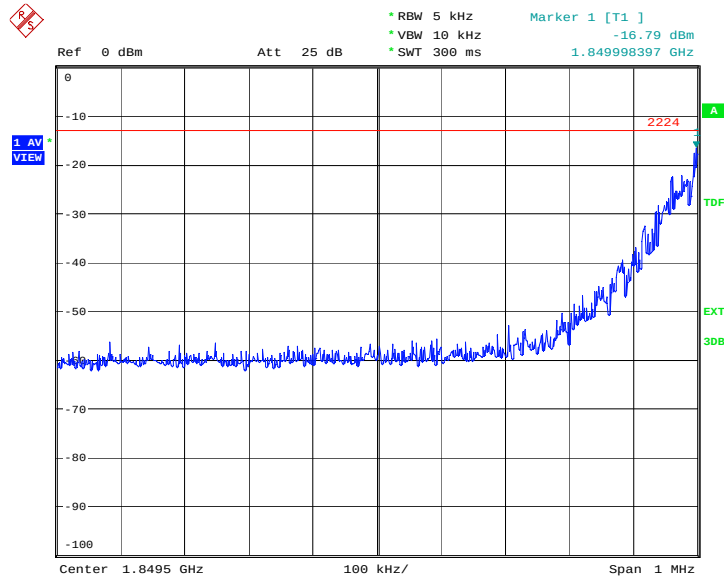

Date: 30.JUL.2013 10:55:02


HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810

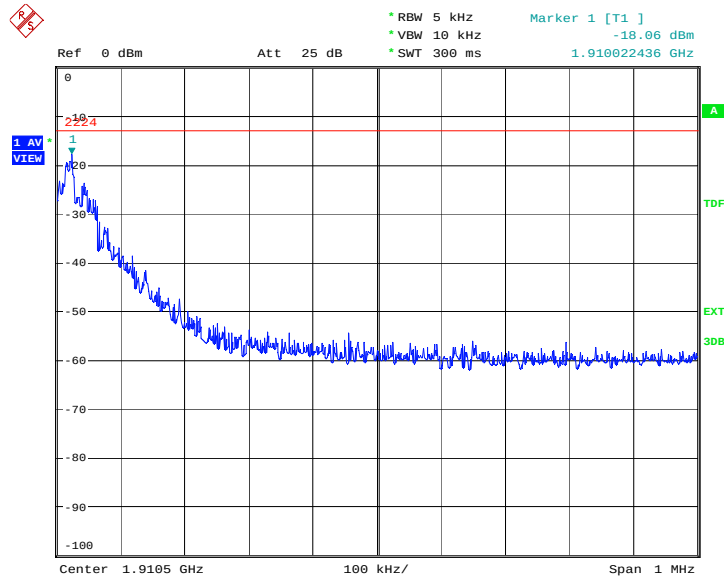

Date: 30.JUL.2013 10:55:17


GPRS 1900

LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

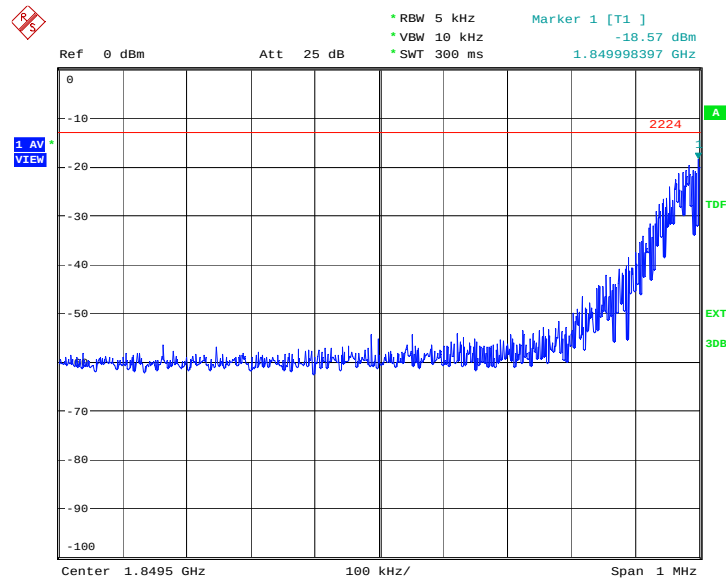

Date: 30.JUL.2013 11:20:58

HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810

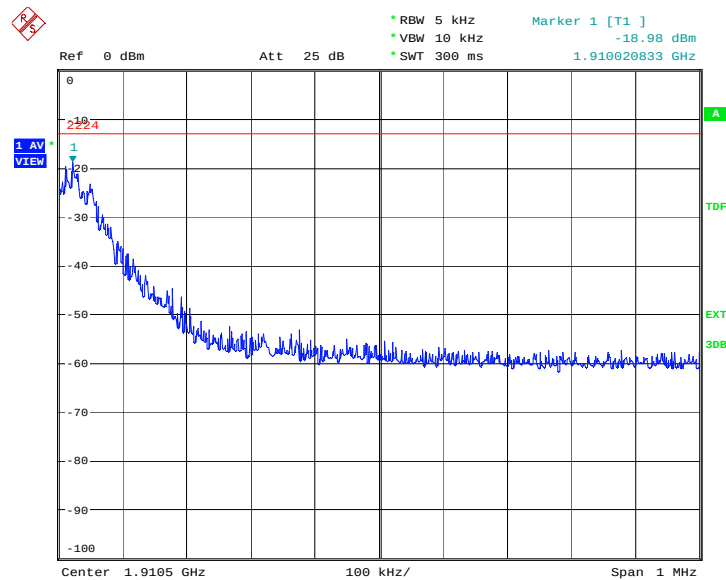

Date: 30.JUL.2013 11:21:12

A.8 CONDUCTED SPURIOUS EMISSION

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM850 Transmitter

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

PCS1900 Transmitter

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

A. 8.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


A. 8.3 Measurement result

GSM850

A.8.3.1 Channel 128: 30MHz – 1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

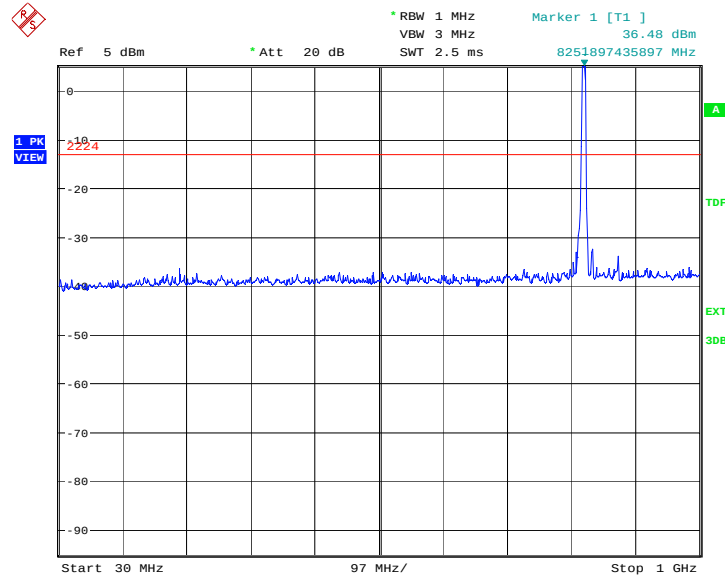

Date: 30.JUL.2013 10:41:27

A.8.3.2 Channel 128: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

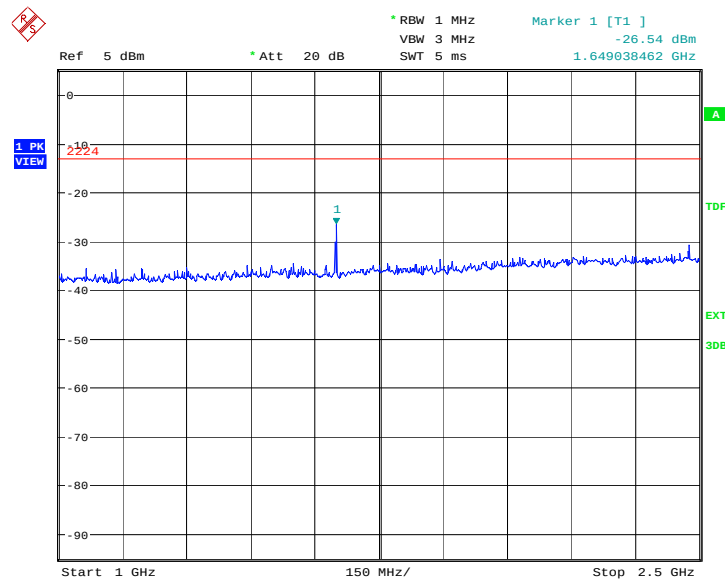

Date: 30.JUL.2013 10:41:55

A.8.3.3 Channel 128: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

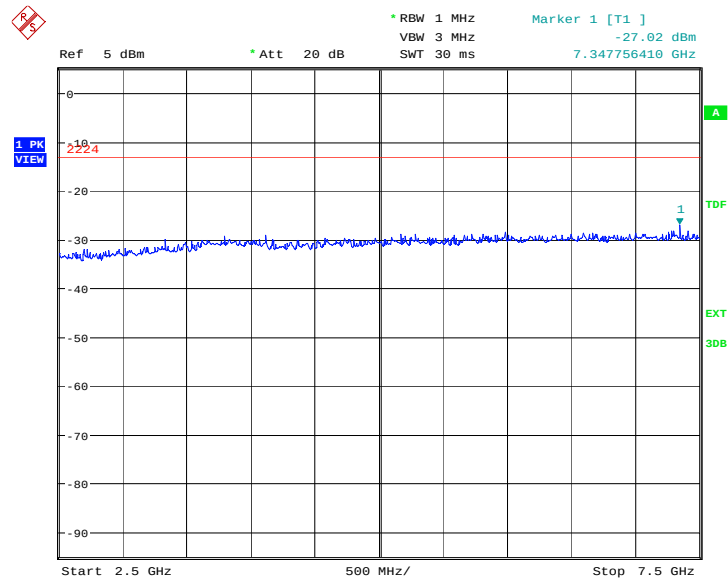

Date: 30.JUL.2013 10:42:24

A.8.3.4 Channel 128: 7.5GHz –10GHz

Spurious emission limit –13dBm.

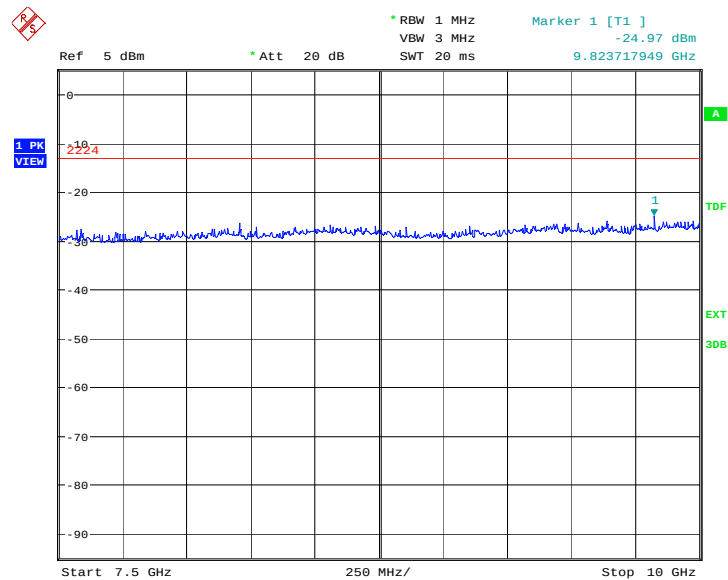


Date: 30.JUL.2013 10:42:52

A.8.3.5 Channel 190: 30MHz – 1GHz

Spurious emission limit –13dBm


NOTE: peak above the limit line is the carrier frequency.

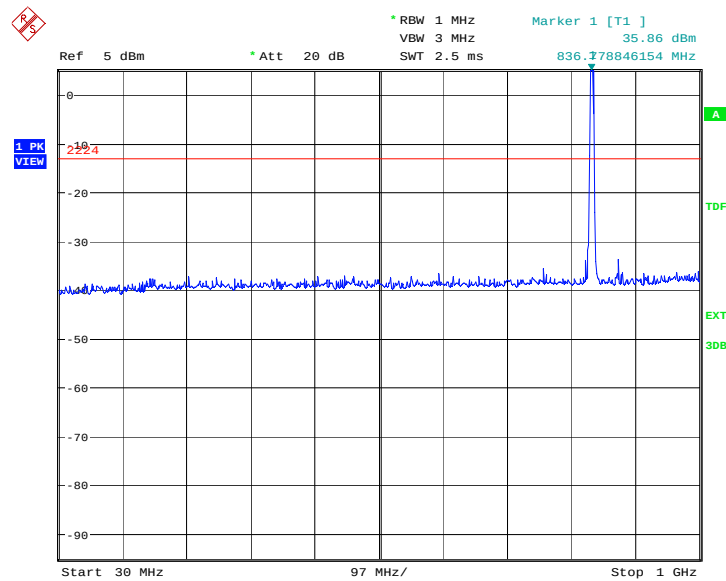

Date: 30.JUL.2013 10:43:21

A.8.3.6 Channel 190: 1GHz –2.5GHz


Spurious emission limit –13dBm

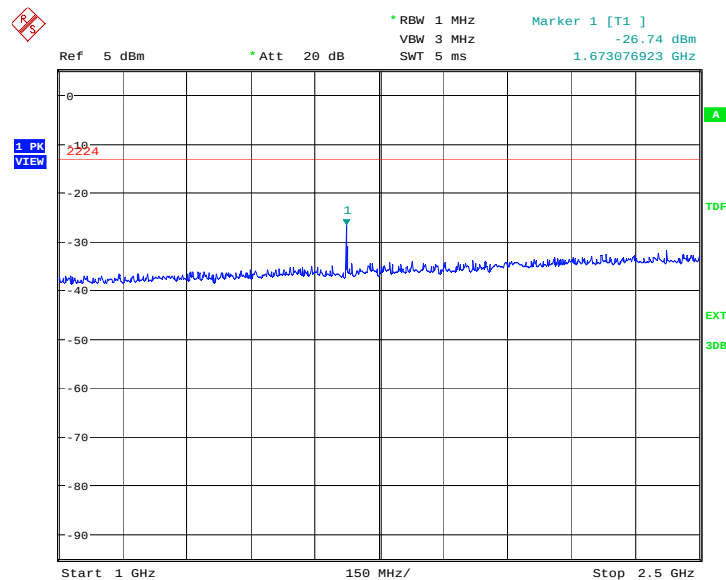

Date: 30.JUL.2013 10:43:49

A.8.3.7 Channel 190: 2.5GHz –7.5GHz


Spurious emission limit –13dBm

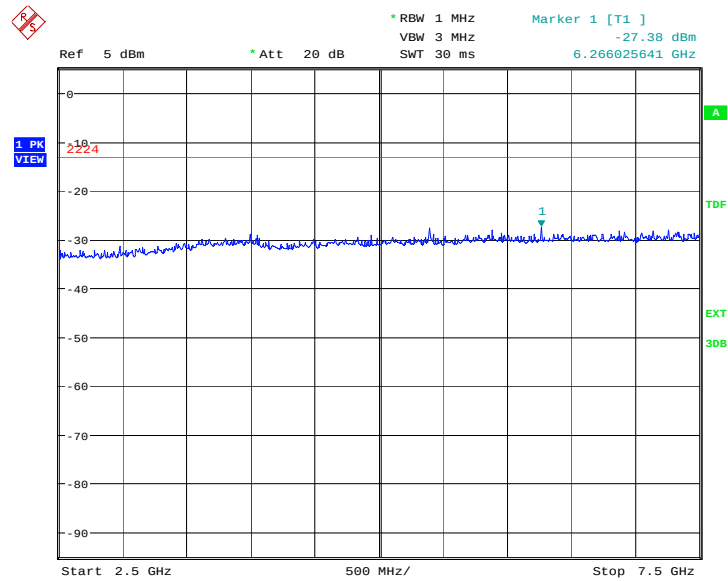

Date: 30.JUL.2013 10:44:18

A.8.3.8 Channel 190: 7.5GHz –10GHz

Spurious emission limit –13dBm

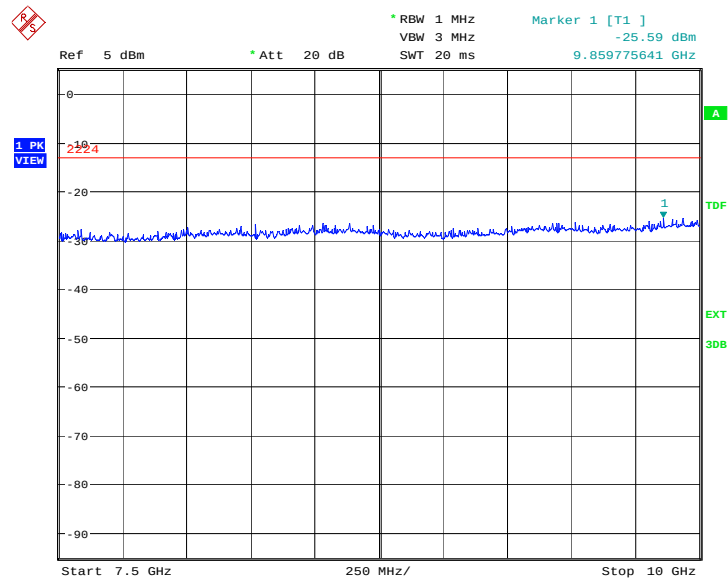


Date: 30.JUL.2013 10:44:46

A.8.3.9 Channel 251: 30MHz – 1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

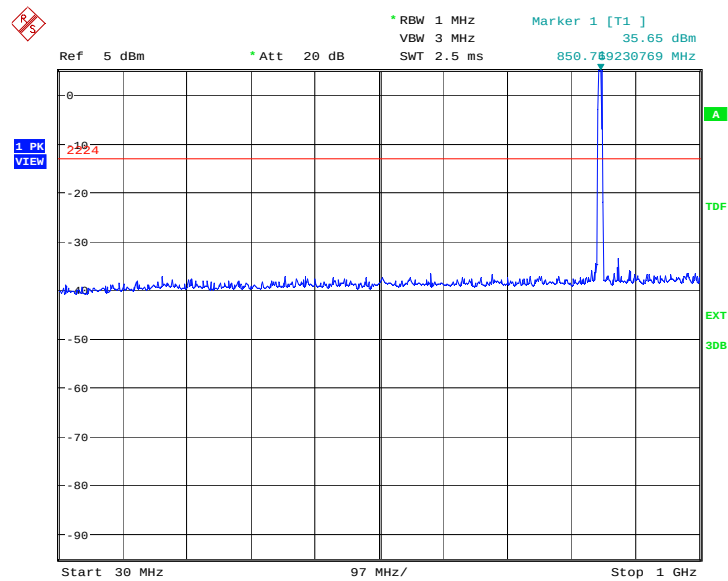

Date: 30.JUL.2013 10:45:15

A.8.3.10 Channel 251: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

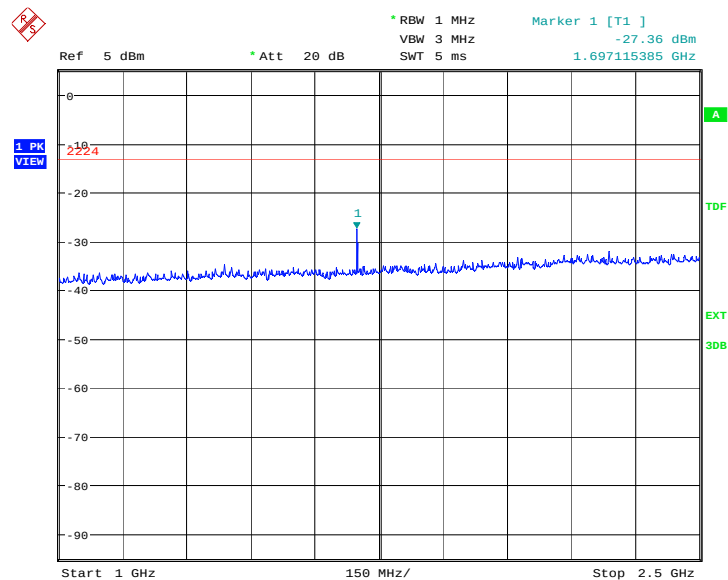

Date: 30.JUL.2013 10:45:44

A.8.3.11 Channel 251: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

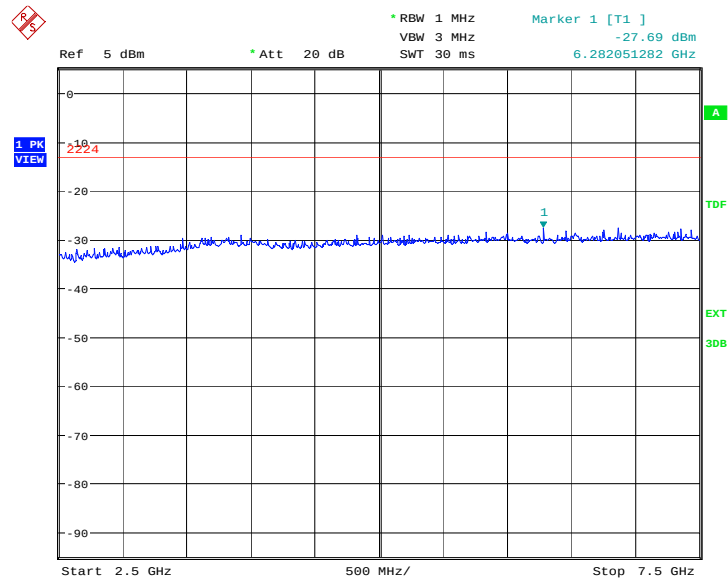

Date: 30.JUL.2013 10:46:12

A.8.3.12 Channel 251: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

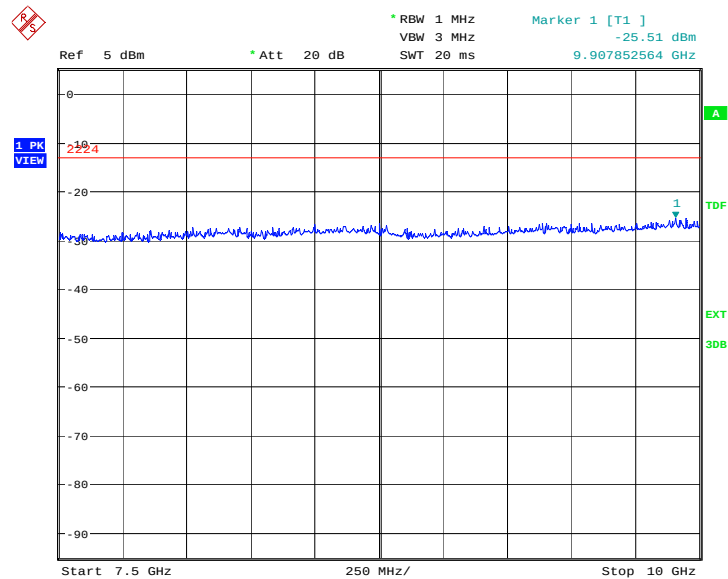

Date: 30.JUL.2013 10:46:40

A.8.3.13 Idle mode: 30MHz – 1GHz


Spurious emission limit –13dBm.

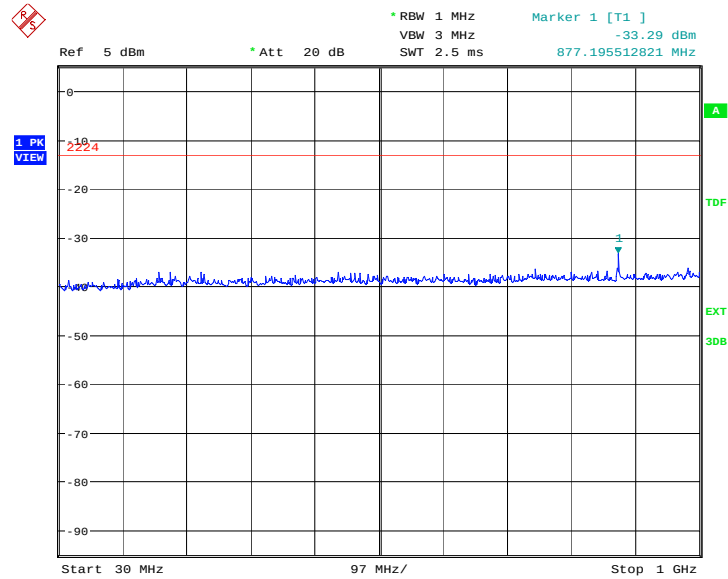

Date: 30.JUL.2013 10:47:09

A.8.3.14 Idle mode: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

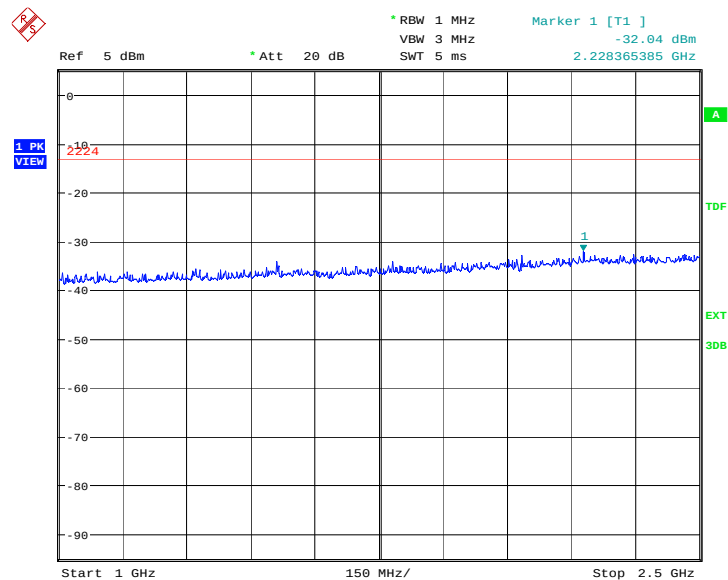

Date: 30.JUL.2013 10:47:37

A.8.3.15 Idle mode: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

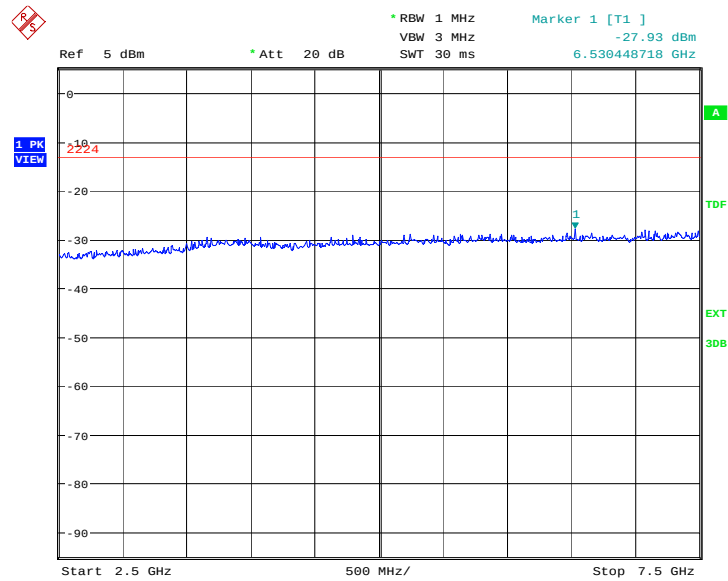

Date: 30.JUL.2013 10:48:06

A.8.3.16 Idle mode: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

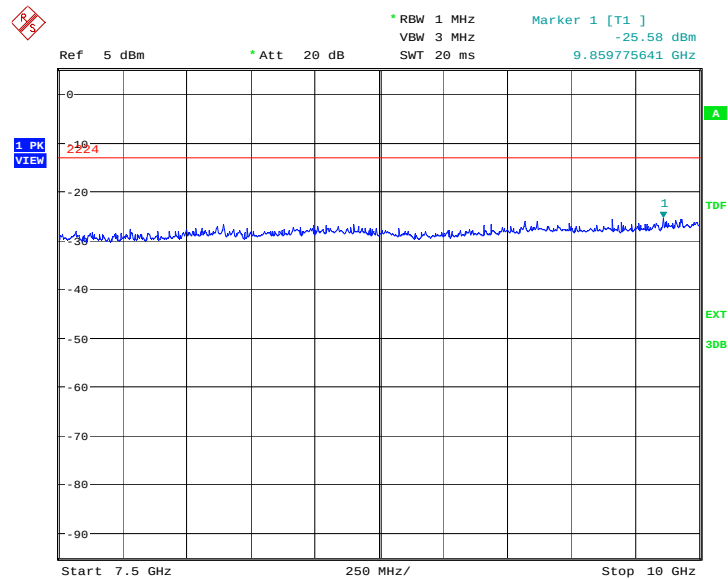


Date: 30.JUL.2013 10:48:34

PCS1900

A.8.3.17 Channel 512: 30MHz – 1GHz

Spurious emission limit –13dBm.

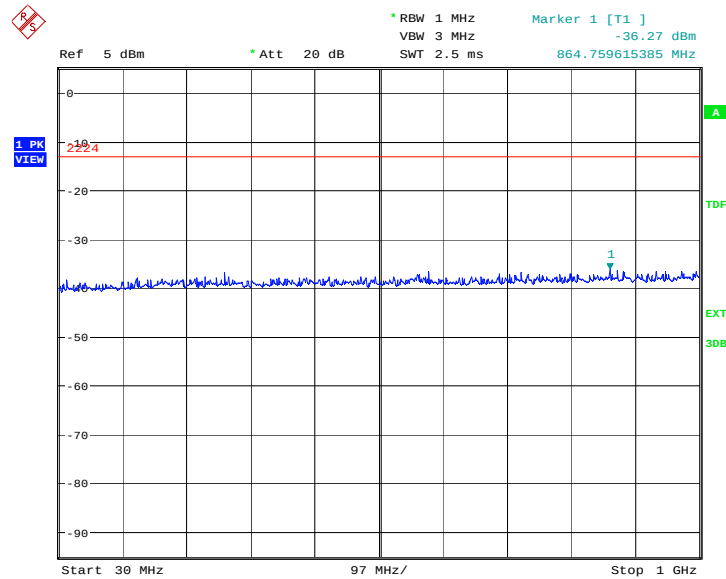


Date: 30.JUL.2013 10:55:45

A.8.3.18 Channel 512: 1GHz – 2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

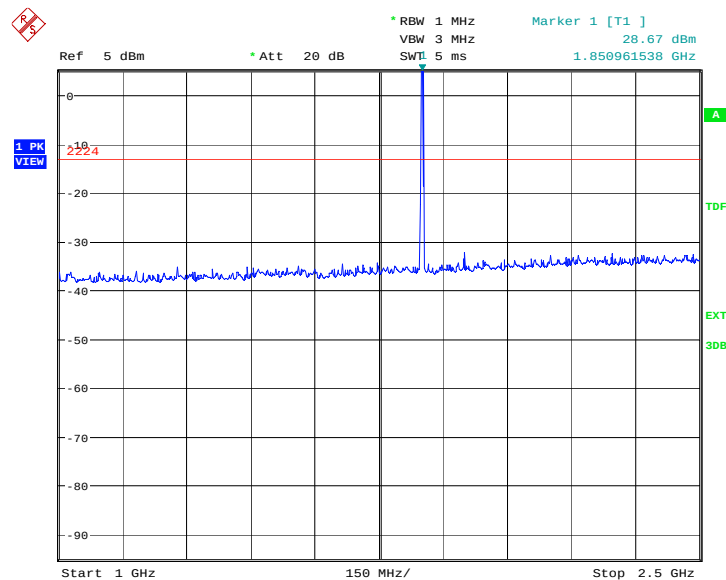

Date: 30.JUL.2013 10:56:13

A.8.3.19 Channel 512: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

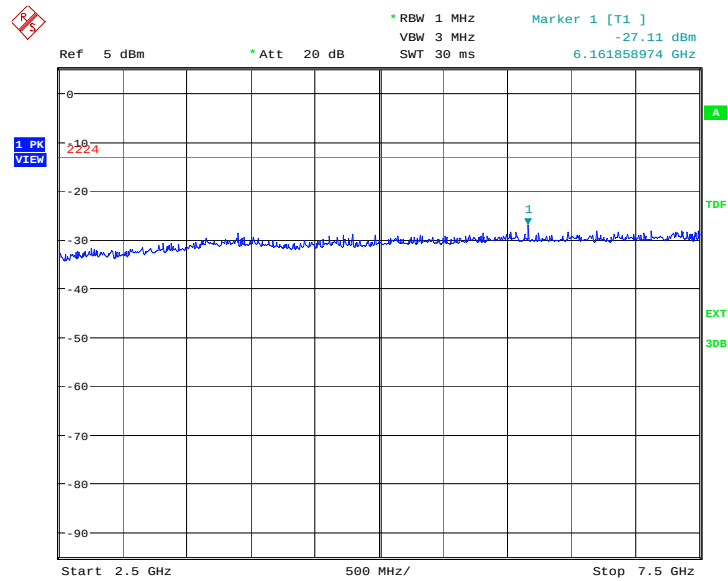

Date: 30.JUL.2013 10:56:41

A.8.3.20 Channel 512: 7.5GHz –10GHz


Spurious emission limit –13dBm.

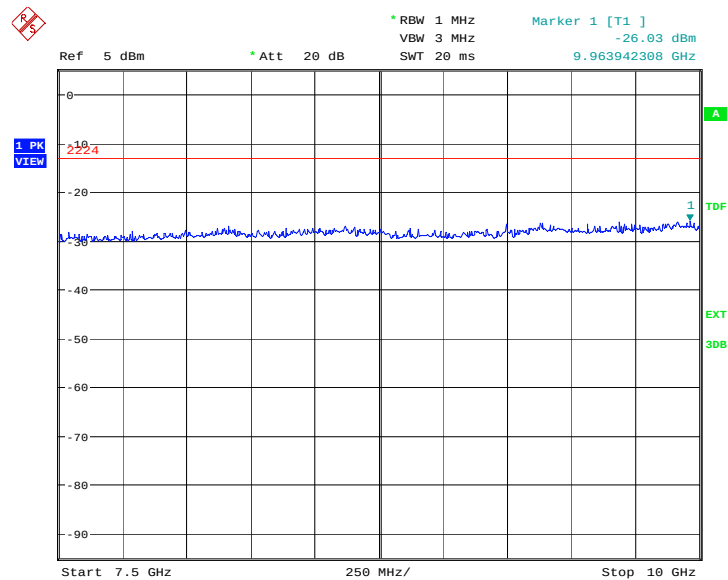

Date: 30.JUL.2013 10:57:10

A.8.3.21 Channel 512: 10GHz –15GHz


Spurious emission limit –13dBm.

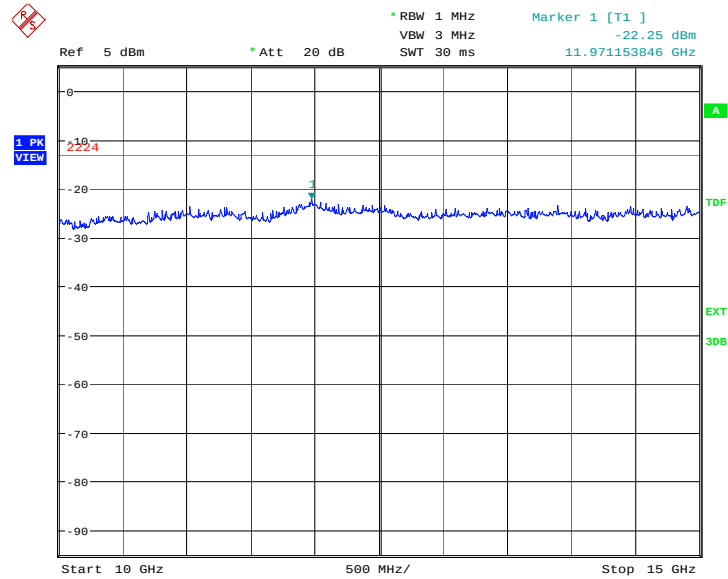

Date: 30.JUL.2013 10:57:38

A.8.3.22 Channel 512: 15GHz –20GHz


Spurious emission limit –13dBm.

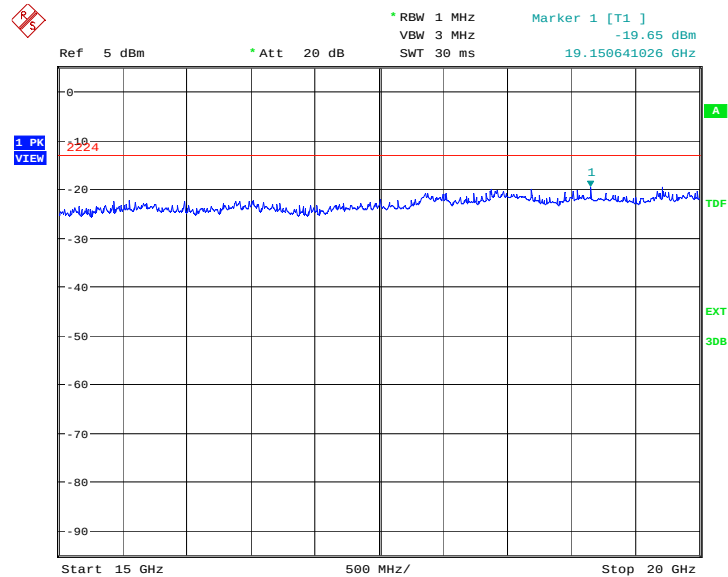

Date: 30.JUL.2013 10:58:06

A.8.3.23 Channel 661: 30MHz – 1GHz

Spurious emission limit –13dBm

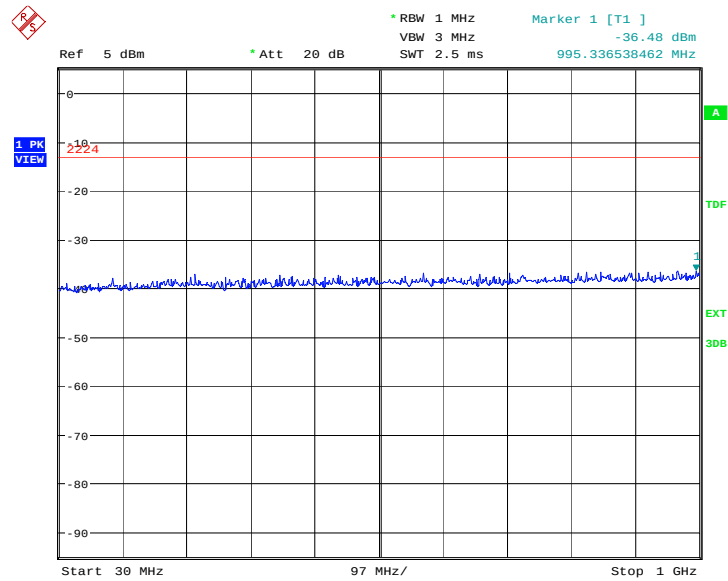


Date: 30.JUL.2013 10:58:35

A.8.3.24 Channel 661: 1GHz –2.5GHz

Spurious emission limit –13dBm


NOTE: peak above the limit line is the carrier frequency.

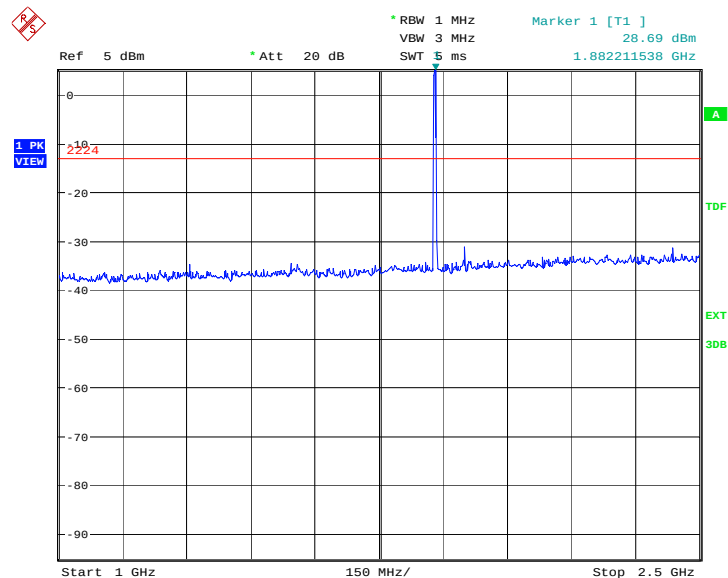

Date: 30.JUL.2013 10:59:03

A.8.3.25 Channel 661: 2.5GHz –7.5GHz


Spurious emission limit –13dBm

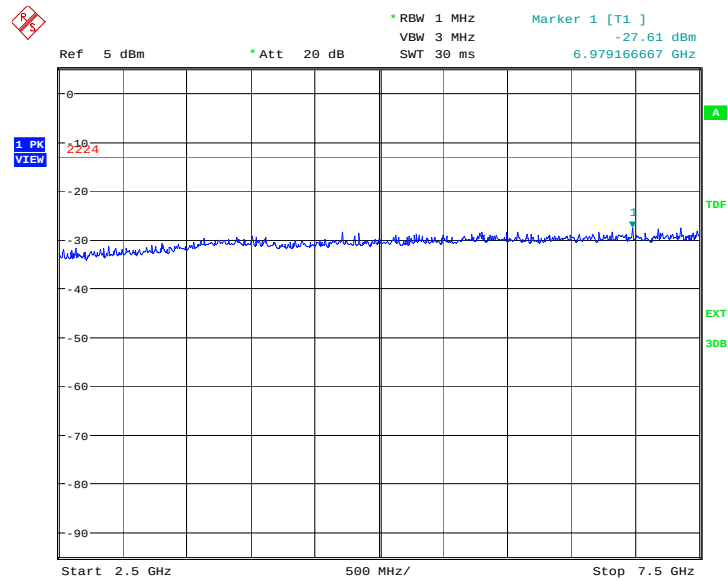

Date: 30.JUL.2013 10:59:31

A.8.3.26 Channel 661: 7.5GHz –10GHz


Spurious emission limit –13dBm

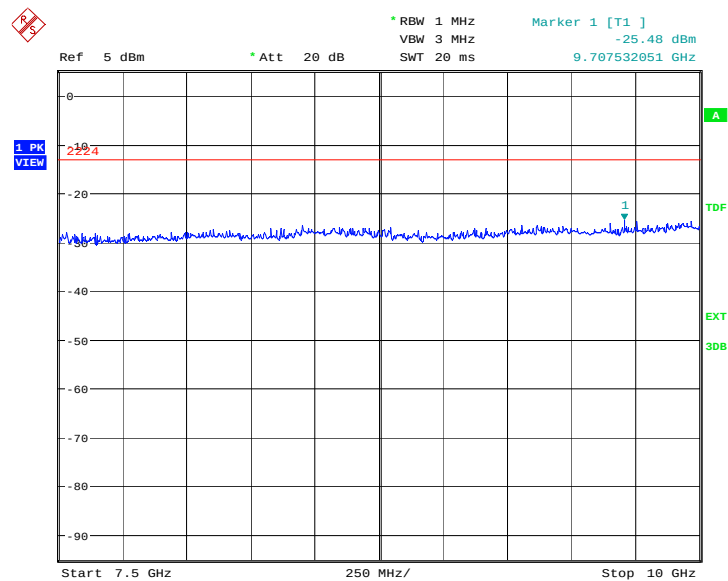

Date: 30.JUL.2013 10:59:59

A.8.3.27 Channel 661: 10GHz –15GHz


Spurious emission limit –13dBm.

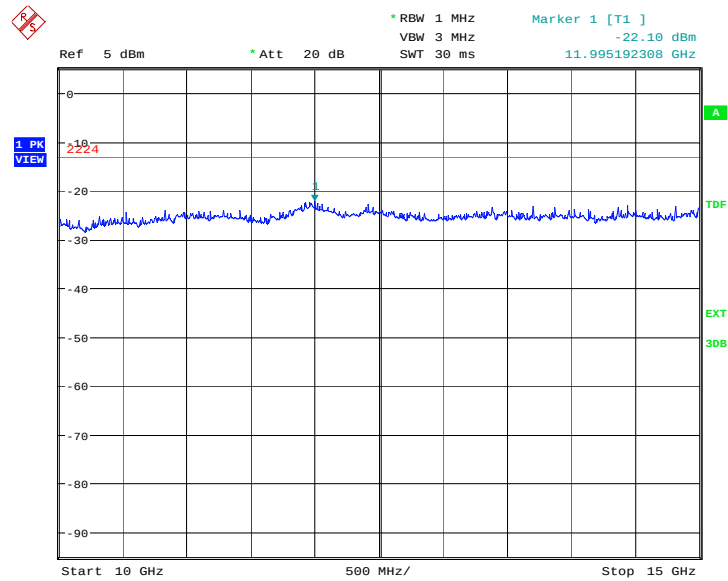

Date: 30.JUL.2013 11:00:27

A.8.3.28 Channel 661: 15GHz –20GHz


Spurious emission limit –13dBm.

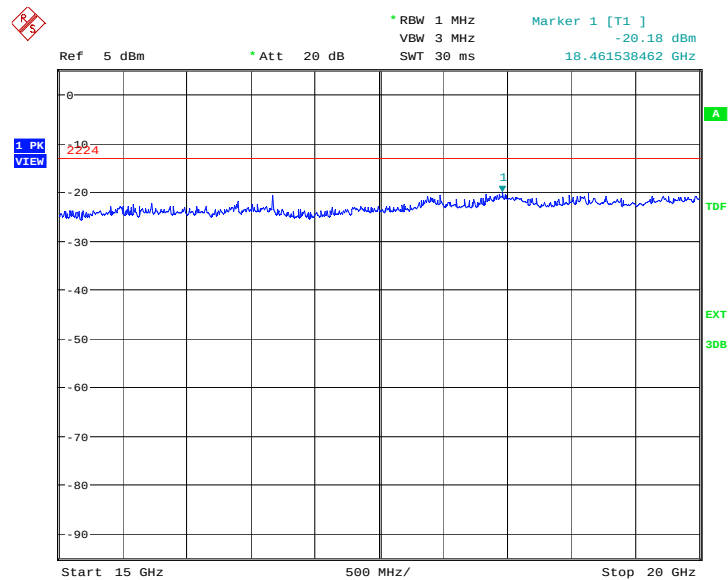

Date: 30.JUL.2013 11:00:55

A.8.3.29 Channel 810: 30MHz – 1GHz

Spurious emission limit –13dBm.

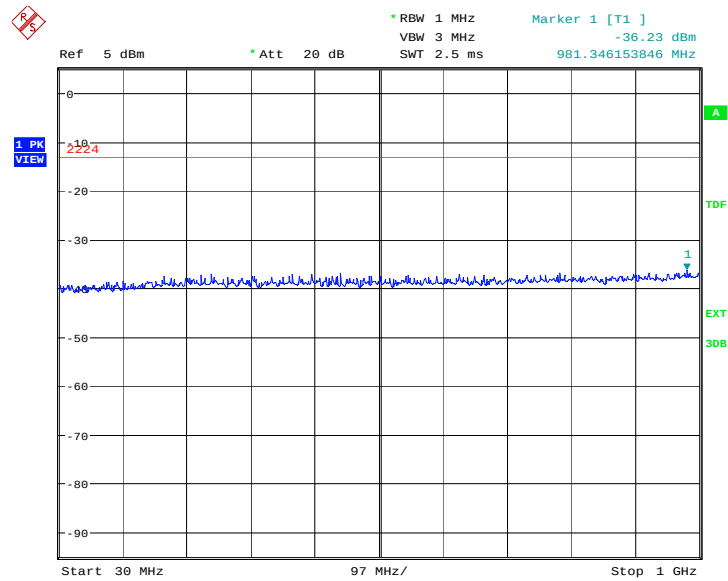


Date: 30.JUL.2013 11:01:24

A.8.3.30 Channel 810: 1GHz – 2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

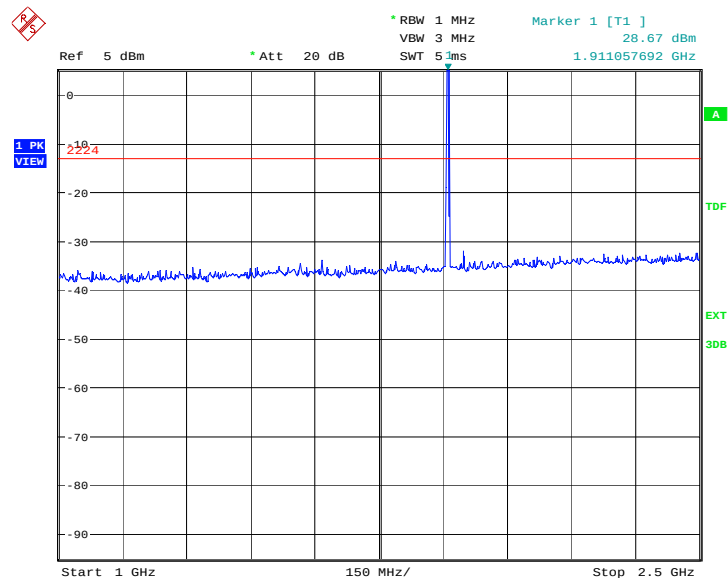

Date: 30.JUL.2013 11:01:52

A.8.3.31 Channel 810:2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

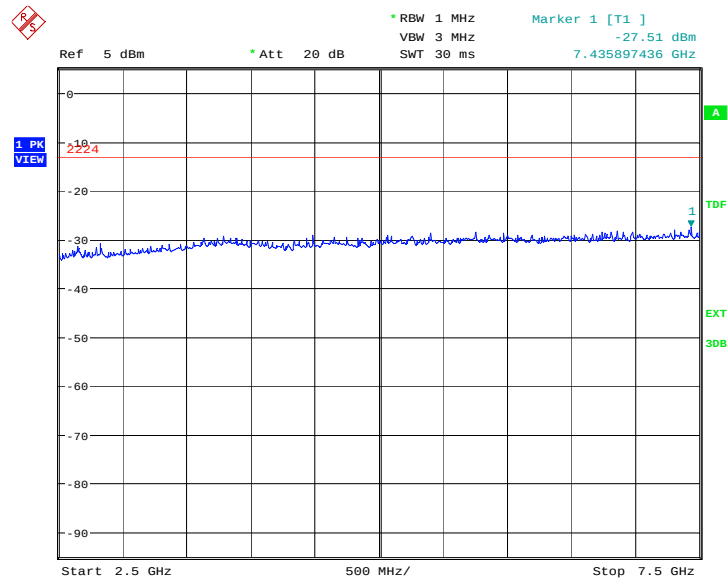

Date: 30.JUL.2013 11:02:20

A.8.3.32 Channel 810: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

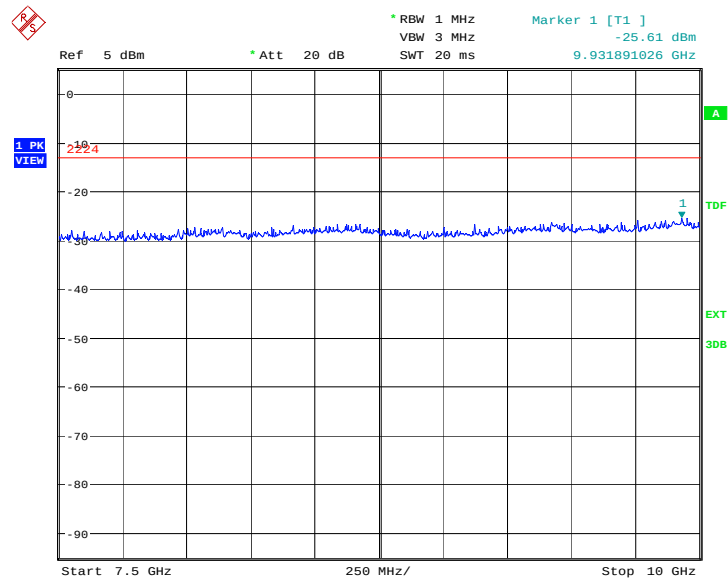

Date: 30.JUL.2013 11:02:49

A.8.3.33 Channel 810: 10GHz –15GHz


Spurious emission limit –13dBm.

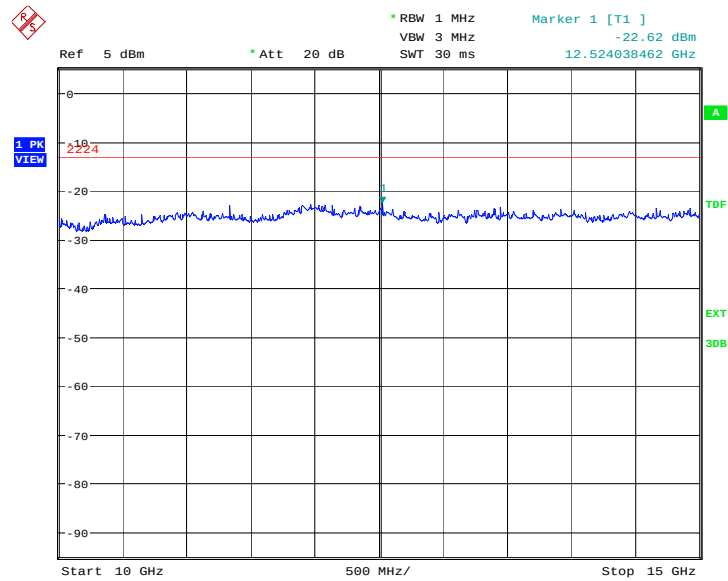

Date: 30.JUL.2013 11:03:17

A.8.3.34 Channel 810: 15GHz –20GHz


Spurious emission limit –13dBm.

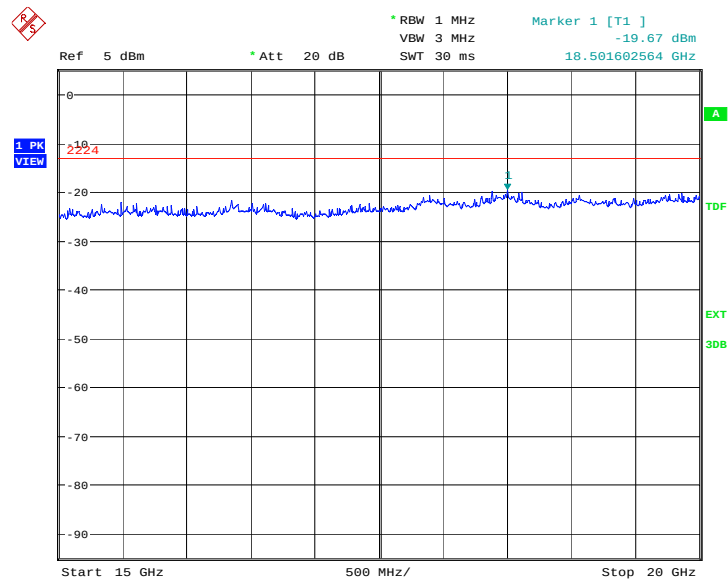

Date: 30.JUL.2013 11:03:45

A.8.3.35 Idle mode: 30MHz – 1GHz


Spurious emission limit –13dBm.

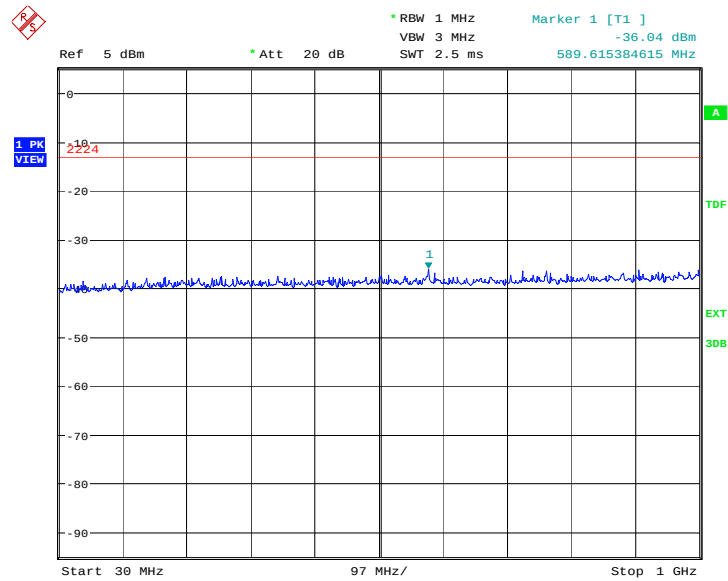

Date: 30.JUL.2013 11:04:13

A.8.3.36 Idle mode: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

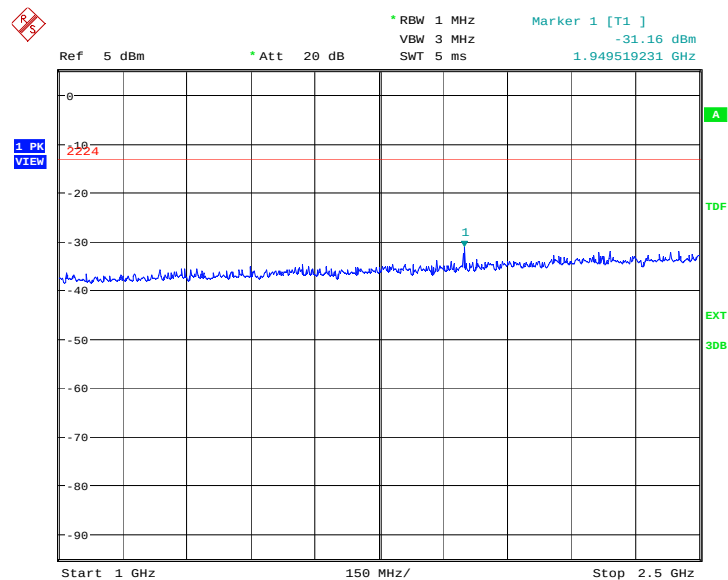

Date: 30.JUL.2013 11:04:42

A.8.3.37 Idle mode: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

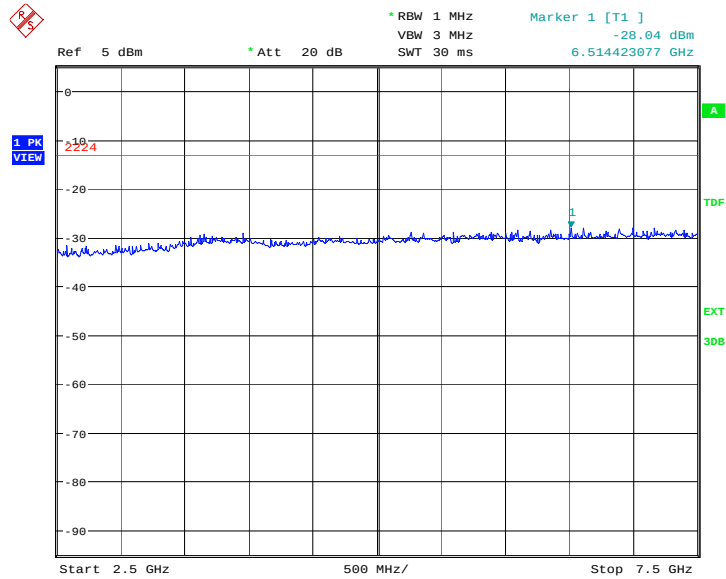

Date: 30.JUL.2013 11:05:10

A.8.3.38 Idle mode: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

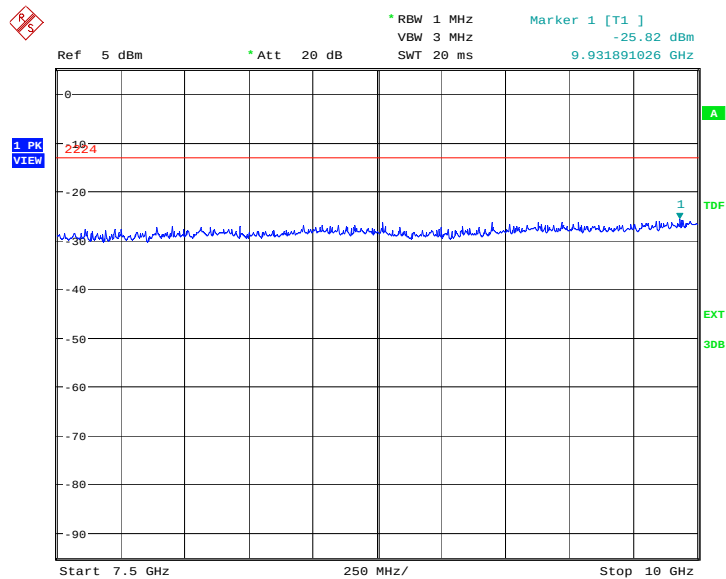

Date: 30.JUL.2013 11:05:38

A.8.3.39 Idle mode: 10GHz –15GHz


Spurious emission limit –13dBm.

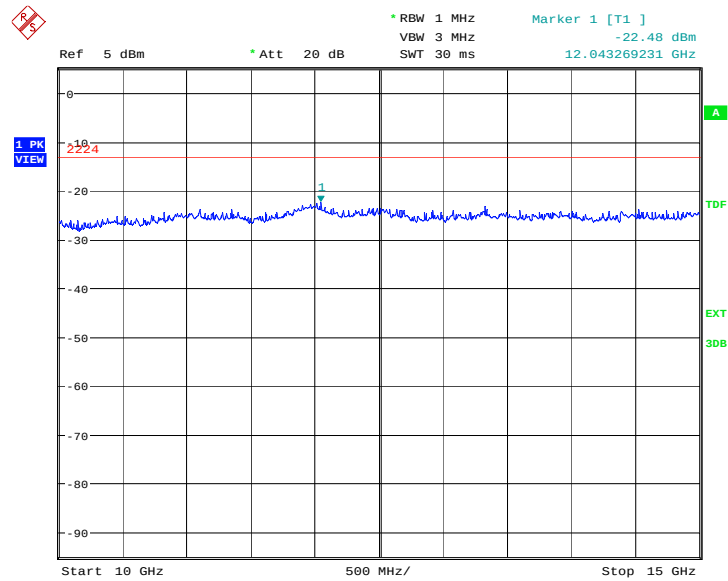

Date: 30.JUL.2013 11:06:06

A.8.3.40 IDLE mode: 15GHz –20GHz

Spurious emission limit –13dBm.

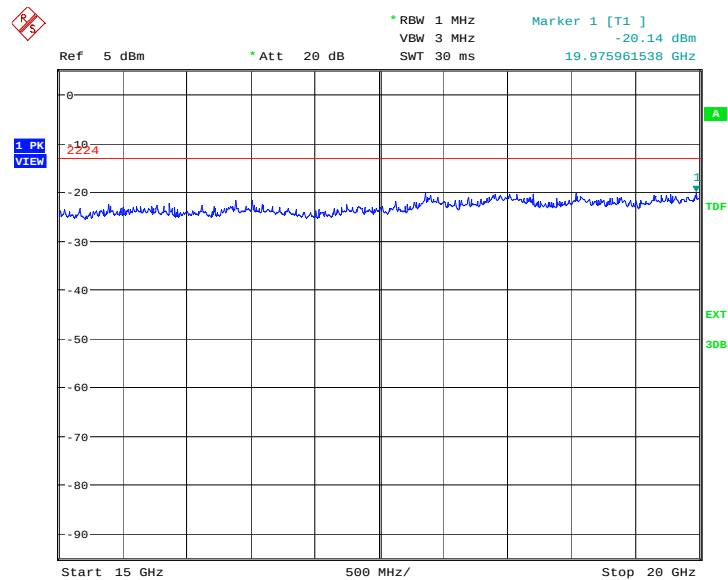

Date: 30.JUL.2013 11:06:34

A.9 PEAK-TO-AVERAGE POWER RATIO

A.9.1 Measurement description

According to RSS 132 and 133, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

The parameter of spectrum analyzer: RBW = 10MHz, detector = sample, No. of sample = 500,000

A.9.2 Measurement results

Frequency Error vs Temperature

	Frequency(MHz)	PAPR(dB)
GSM850	836.6	8.01
GPRS850	836.6	7.98
PCS1900	1880.0	7.79
GPRS1900	1880.0	7.79

A.10 RECEIVER RADIATION EMISSION

A.10.1 Method of Measurement

The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

A.10.2 Method of Measurement


Frequency of Emission (MHz)	Limit (dB μ V/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

A. 10.3 Measurement results

IF bandwidth: 120 kHz

Idle Mode: 30MHz-1GHz


Normal RE_30M-1GHz_10m

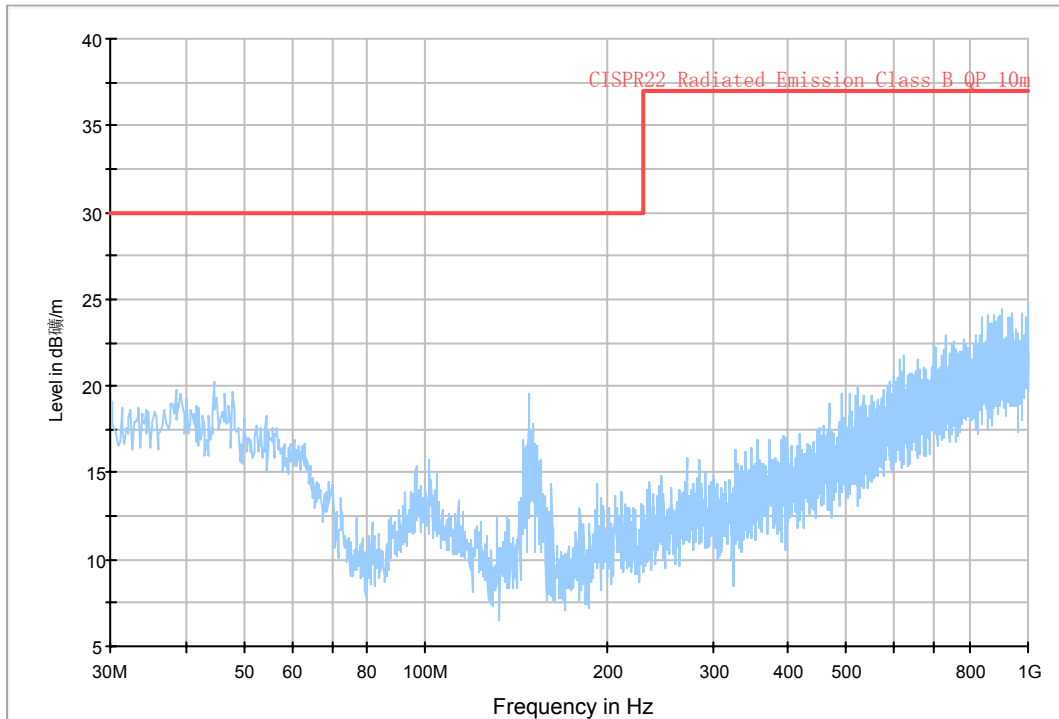

RBW / VBW 1 MHz

Idle Mode: 1GHz-18GHz

Normal RE_1G-18GHz_directly

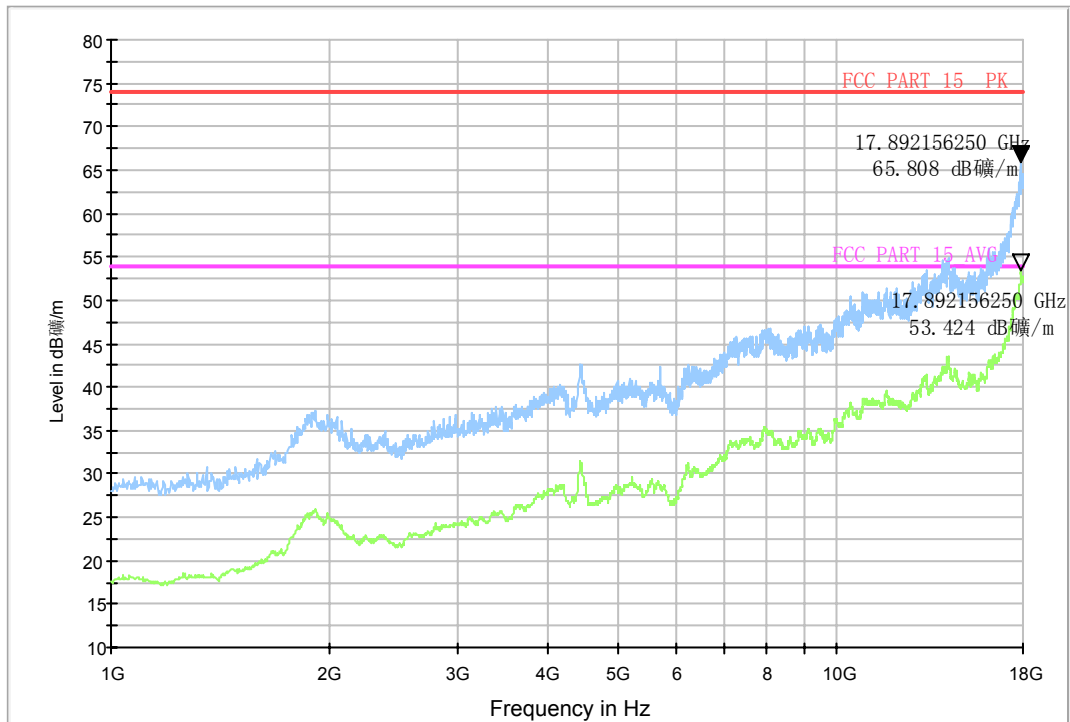

END OF REPORT