

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC_Cellular_RM-1092_10	Date of Report:	29-Dec-2014
Number of pages:	12	Customer's Contact person:	Hu Dongji
Testing laboratory:	TCC Microsoft Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Microsoft Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-1092 / Battery BL-L4A / AC Charger AC-18E / Headset WH-108		
FCC ID:	PYARM-1092	IC:	-
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24, TIA-603-C-2004 and IC standards, RSS-GEN (Issue 4, November 2014), RSS-132 (Issue 3, January 2013), RSS-133 (Issue 6, January 2013). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jia Dongsheng, Manager

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	18-Dec-2014
Testing completed	19-Dec-2014
The customer's contact person	Hu Dongji
Test Plan referred to	T:\Projects\RM-1091\TestPlan\RS_testplan_RM-1091_HW3000a.xlsm
Notes	-
Document name	FCC_Cellular_RM-1092_10

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1091	355743/06/000897/2	3000a	-	02048.00000.14431.35001	54641
Battery	BL-L4A	4175354312P10200559;0670762	-	-	-	54593
AC Charger	AC-18E	4868674226410700997;0675695	-	-	-	54598
Headset	WH-108	3491r3R	-	-	-	54633

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
\$2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
\$22.913(a)	4.4	Radiated RF output power	NP
N/A	5.4	Peak to average power ratio	NP
\$2.1049(h)	4.6.1	99 % occupied bandwidth	NP
\$22.917(a)	4.5	Band edge compliance	NP
\$22.917(a), \$2.1051	4.5	Spurious emissions at antenna terminals	NP
\$22.917(a), \$2.1053	4.5	Spurious radiated emissions	PASSED
\$2.1055(a)	4.3	Frequency stability, temperature variation	NP
\$2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM 1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
\$2.1046(a)	6.4	Conducted RF output power	NP
\$24.232(b)	6.4	Radiated RF output power	NP
N/A	6.4	Peak to average power ratio	NP
\$2.1049(h)	4.6.1	99 % occupied bandwidth	NP
\$24.238(a)	6.5	Band edge compliance	NP
\$24.238(a), \$2.1051	6.5	Spurious emissions at antenna terminals	NP
\$24.238(a), \$2.1053	6.5	Spurious radiated emissions	PASSED
\$2.1055(a)	6.3	Frequency stability, temperature variation	NP
\$2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA2:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
\$2.1046(a)	6.4	Conducted RF output power	NP

§24.232(b)	6.4	Radiated RF output power	NP
N/A	6.4	Peak to average power ratio	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA5:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
N/A	5.4	Peak to average power ratio	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

PASSED The EUT complies with the essential requirements in the standard.
 FAILED The EUT does not comply with the essential requirements in the standard.
 NP The test was not performed by the TCC Microsoft Laboratory.

The test results of PYARM-1091 are re-used for certification of the PYARM-1092. The table above indicates the results, which will be re-used

CONTENTS


1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Spurious radiated emissions (FCC §22.917(a), §22.917(a), §2.1053, §24.238(a), §2.1053, §2.1053, RSS-132 4.5, RSS-133 6.5).....	5
2.2. Test method and limit	5
2.3. GSM 850 test results	7
2.4. GSM 850 E-GPRS (MSC9) test results	7
2.5. GSM 850 GPRS (CS1) test results.....	7
2.6. GSM 1900 test results	8
2.7. GSM 1900 E-GPRS (MSC9) test results	8
2.8. GSM 1900 GPRS (CS1) test results.....	8
2.9. WCDMA2 test results	9
2.10. WCDMA5 test results.....	9
3. Test Equipment	10
3.1. Conducted measurements.....	10
3.2. Radiated measurements.....	10

2. Spurious radiated emissions

(FCC §22.917(a), §22.917(a), §2.1053, §24.238(a), §2.1053, §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-1091, DUT 54641
Accessories with DUT numbers	BL-L4A, DUT 54593 ; AC-18E, DUT 54598 ; WH-108, DUT 54633
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21/33/102.2
Date of measurements	19-Dec-2014
Measured by	Fu Roger

2.1.1 Test setup

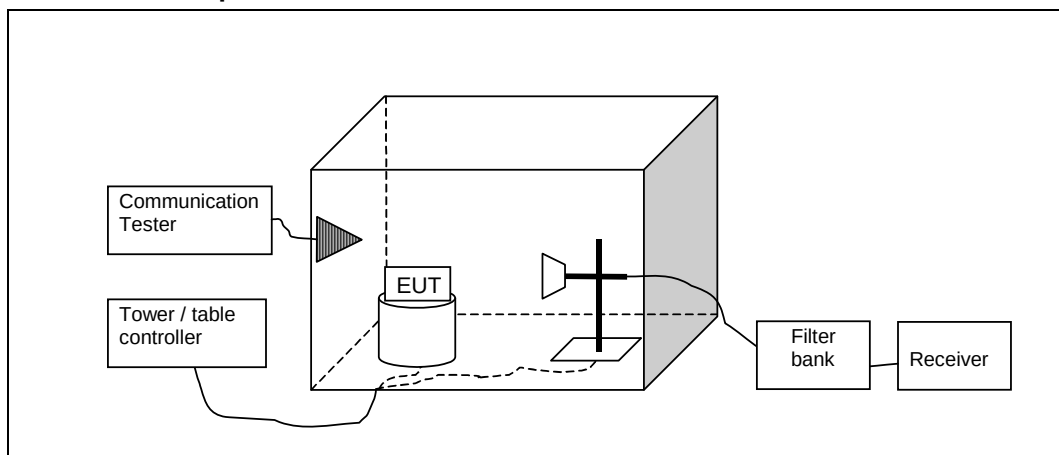

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software. The substitution corrections are obtained as described below:

$$ASUBST = PSUBST\ TX - PSUBST\ RX - LSUBST\ CABLES + GSUBST\ TX\ ANT$$

Where ASUBST is the final substitution correction including receive antenna gain. PSUBST TX is

signal generator level, PSUBST RX is receiver level, LSUBST CABLES is cable losses including both TX and RX cables and GSUBST TX ANT is substitution antenna gain.

The measurement results are obtained as described below:

$$P[\text{dBm}] = \text{PMEAS} + \text{ATOT}$$

Where PMEAS is receiver reading in dBm and ATOT is total correction factor including cable loss and substitution correction ($\text{ATOT} = \text{LCABLES} - \text{GPREAMP} + \text{ASUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850	30 - 8500	-13
GSM 1900	30 - 19100	-13
WCDMA2	30 - 19100	-13
WCDMA5	30 - 8500	-13

2.3. GSM 850 test results

Channel 190 / 836.6 MHz

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
848.82	-69.36	0.00012	-66.56	-2.8	HORIZONTAL	PASSED
1694.028	-58.87	0.0013	-62.87	4	VERTICAL	PASSED
2534.469	-52.67	0.00541	-63.57	10.9	HORIZONTAL	PASSED
2549.299	-52.99	0.00502	-63.99	11	HORIZONTAL	PASSED
3346.493	-40.89	0.08147	-48.59	7.7	HORIZONTAL	PASSED
3346.613	-40.69	0.08531	-48.39	7.7	HORIZONTAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

2.4. GSM 850 E-GPRS (MSC9) test results

Channel 190 / 836.6 MHz

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
1673.22	-48.46	0.01426	-52.46	4	VERTICAL	PASSED
2509.94	-50.13	0.00971	-60.83	10.7	VERTICAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

2.5. GSM 850 GPRS (CS1) test results

Channel 190 / 836.6 MHz

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
1673.26	-47.42	0.01811	-51.42	4	VERTICAL	PASSED
2509.98	-43.77	0.04198	-54.47	10.7	VERTICAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

2.6. GSM 1900 test results

Channel 661 / 1880.0 MHz

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
9389.339	-43.35	0.04624	-67.85	24.5	HORIZONTAL	PASSED
9746.132	-42.59	0.05508	-67.99	25.4	HORIZONTAL	PASSED
9766.774	-41.74	0.06699	-67.54	25.8	VERTICAL	PASSED
9848.657	-41.62	0.06887	-67.52	25.9	HORIZONTAL	PASSED
9923.928	-41.39	0.07261	-67.29	25.9	VERTICAL	PASSED
9944.053	-42.47	0.05662	-68.47	26	VERTICAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

2.7. GSM 1900 E-GPRS (MSC9) test results

Channel 661 / 1880.0 MHz

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
3759.94	-46.91	0.02037	-57.71	10.8	VERTICAL	PASSED
5648.076	-48.33	0.01469	-62.83	14.5	VERTICAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

2.8. GSM 1900 GPRS (CS1) test results

Channel 661 / 1880.0 MHz

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
3759.94	-50.32	0.00929	-61.12	10.8	VERTICAL	PASSED
5643.547	-48.07	0.0156	-62.57	14.5	VERTICAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

2.9. WCDMA2 test results

Channel 9400 / 1880.0 MHz

FDD mode, Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
3758.497	-47.13	0.01936	-57.83	10.7	HORIZONTAL	PASSED
5637.896	-46.43	0.02275	-60.93	14.5	VERTICAL	PASSED
7519.86	-43.48	0.04487	-65.88	22.4	VERTICAL	PASSED
8764.629	-43.55	0.04416	-66.75	23.2	HORIZONTAL	PASSED
9407.555	-42.35	0.05821	-66.65	24.3	VERTICAL	PASSED
9502.465	-42.04	0.06252	-66.84	24.8	VERTICAL	PASSED
9713.768	-41.33	0.07362	-67.03	25.7	VERTICAL	PASSED
9771.523	-42.09	0.0618	-67.69	25.6	HORIZONTAL	PASSED
9839.499	-40.06	0.09863	-65.96	25.9	VERTICAL	PASSED
9951.563	-40.27	0.09397	-66.27	26	VERTICAL	PASSED
11274.289	-39.5	0.1122	-67.6	28.1	VERTICAL	PASSED
13167.675	-50.29	0.00935	-72.29	22	HORIZONTAL	PASSED
15030.922	-48.75	0.01334	-72.75	24	VERTICAL	PASSED
16919.339	-49.25	0.01189	-72.55	23.3	HORIZONTAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

2.10. WCDMA5 test results

Channel 4175 / 835.0 MHz

FDD mode, Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Results
847.87	-46.66	0.02158	-80.96	34.3	HORIZONTAL	PASSED
848.221	-45.94	0.02547	-80.24	34.3	HORIZONTAL	PASSED
1000.14	-60.68	0.00086	-62.58	1.9	HORIZONTAL	PASSED
1671.583	-52.65	0.00543	-56.65	4	VERTICAL	PASSED
2497.725	-52.88	0.00515	-63.68	10.8	VERTICAL	PASSED
2506.313	-52.19	0.00604	-62.59	10.4	HORIZONTAL	PASSED
2520.782	-51.95	0.00638	-63.05	11.1	HORIZONTAL	PASSED
3343.186	-55.89	0.00258	-63.49	7.6	HORIZONTAL	PASSED
3345.912	-56.66	0.00216	-64.36	7.7	HORIZONTAL	PASSED
4169.77	-55.31	0.00294	-65.31	10	VERTICAL	PASSED
5013.186	-51.31	0.0074	-62.61	11.3	VERTICAL	PASSED
5849.269	-49.48	0.01127	-62.28	12.8	VERTICAL	PASSED
6679.82	-42.47	0.05662	-59.57	17.1	VERTICAL	PASSED
7511.693	-46	0.02512	-65.9	19.9	HORIZONTAL	PASSED
8343.647	-46.56	0.02208	-66.66	20.1	VERTICAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	HP6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C, 15B
BJPCPT0069	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
BJPCTC0323	Signal Generator	SMR 27	R&S	22/24/27, 15C, 15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C, 15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C, 15R
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0062	AC Power source	6812B	HP	15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0082	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0127	AC Power source	SOYI-500VA	SOYI	15B, 15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27, 15B, 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27, 15B, 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27, 15B, 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B, 15C
BJPCTC0306	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0305	GPIO converter	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0304	Spectrum Analyser	FSV30	R&S	22/24/27, 15C
BJPCTC0309	GPIO-RS232 convertor	RS232	NI	22/24/27, 15C
BJPCTC0307	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0308	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0352	Signal Generator 20GHz	MG3692B	Anritsu	22/24/27, 15C
BJBDATC0169	Temperature Test chamber	VT4002	Votsch	22/24/27, 15C
BJPCTC0334	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0342	Communication Tester	CMU200	R&S	15B, 15C
BJPCTC0343	Power Splitter	1167A	Agilent	EN300328
BJPCTC0344	Power Splitter	1167A	Agilent	EN300328
BJPCTC0345	Power Splitter	1167A	Agilent	EN300328
BJPCTC0346	Attenuator	8496A	Agilent	EN300328
BJPCTC0347	Directional Coupler	4226-20	Narda	EN300328
BJPCTC0348	Signal generator	E4438C	Agilent	EN300328
BJPCTC0336	Signal Generator	SMP22	R&S	22/24/27, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0166	Antenna	VUBA 9117	Swarzbeck	22/24/27
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C.15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C.15R
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C.15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0081	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-
BJPCTC0125	Loop Antenna	HFH2-Z2	R&S	15C
BJPCTC0126	Tripod	FHU-Z	R&S	15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0133	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0134	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0135	Open Swith and contril unit	OSP 130	R&S	15B, 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0171	Broad-band Horn Antenna	BBHA9120 D	SCHWARZBECK MESS - ELEKTRONIK	22/24/27, 15C, 15B
BJPCTC0310	Horn Antenna	QSH20SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0311	Horn Antenna	QSH18SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0312	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0313	High Pass Filter	WHKX1.0/15G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0314	High Pass Filter	WHKX8.0/18G-88SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0315	High Pass Filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0316	Preamplifier	AMT-5F-18002550-25-108	-	22/24/27, 15C, 15B
BJPCTC0317	Preamplifier	AMF-6D-02001800-29-20P	-	22/24/27, 15C, 15B
BJPCTC0350	Preamplifier	AMF-4D-01000800-30-29P	Miteq	22/24/27, 15C, 15B
BJPCTC0324	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0329	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0334	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0342	Communication Tester	CMU200	R&S	15B, 15C
BJPCTC0349	Preamplifier	AMF-4D-01000800-30-79P	Miteq	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCTC0350	Preamplifier	AMF-4D-01000800-30-29P	Miteg	22/24/27, 15C, 15B
BJPCTC0351	Preamplifier	AFS4-00101800	-	22/24/27, 15C, 15B