

47 CFR PART 15 SUBPART C TEST REPORT

for

Wireless Pocket Laser Scanner

Model No.: MS916

Wireless Pocket 2D Scanner

Multi-listing Model No.: MS926

FCC ID: HLEMS9X6B

of

Applicant: unitech Electronics Co., Ltd.

Address: 5F., No. 136, Ln. 235, Baoqiao Rd. , Xindian Dist.,
New Taipei City , Taiwan

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22302-22477-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com





TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS	3
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS.....	5
2	TECHNICAL TEST	6
2.1	SUMMARY OF TEST RESULTS	6
2.2	TEST ENVIRONMENT	6
2.3	TEST EQUIPMENT LIST	7
2.4	GENERAL TEST PROCEDURE	10
3	TEST RESULTS (ENCLOSURE)	12
3.1	PEAK OUTPUT POWER (TRANSMITTER).....	13
3.2	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS.....	19
3.3	SPURIOUS EMISSIONS (TX)	20
3.4	CARRIER FREQUENCY SEPARATION	22
3.5	NUMBER OF HOPPING FREQUENCIES.....	25
3.5.1	<i>Pseudorandom Frequency Hopping Sequence</i>	27
3.5.2	<i>Coordination of hopping sequences to other transmitters</i>	27
3.5.3	<i>System Receiver Hopping Capability</i>	27
3.6	TIME OF OCCUPANCY (DWELL TIME)	28
3.7	20DB BANDWIDTH.....	34
3.7.1	<i>System Receiver Input Bandwidth</i>	37
3.8	MINIMUM 6 dB BANDWIDTH	38
3.9	RADIATED EMISSION ON THE BAND EDGE	41
3.10	PEAK POWER SPECTRAL DENSITY	47
3.11	RADIATED EMISSION FROM DIGITAL PART	50
3.12	POWER LINE CONDUCTED EMISSION	51



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.

2. The test report may only be reproduced or published in full.

3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

Tester:

April 11, 2023

Sora Kuo

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

April 11, 2023


Kevin Wang

Date

WTS

Name

Signature



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.

6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

1.3 Details of approval holder

Name: unitech Electronics Co., Ltd.

Street: 5F., No. 136, Ln. 235, Baoqiao Rd. , Xindian Dist.,


Town: New Taipei City ,

Country: Taiwan

1.4 Application details

Date of receipt of test item: February 20, 2023

Date of test: from February 21, 2023 to March 27, 2023



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

1.5 General information of Test item

Type of test item: Wireless Pocket Laser Scanner
Model number: MS916
Brand name: unitech
Multi-listing model number: MS926 (Product name: Wireless Pocket 2D Scanner)
Sample no.: #05

Technical data

Frequency band: 2.4 GHz – 2.4835 GHz
Number of channels: BT 2.0: 79 channels
BT 4.0: 40 channels
Operation modes: Duplex
Modulation type: GFSK、 $\pi/4$ DQPSK、8DPSK
Fixed point-to-point operation: ☐ Yes / ☒ No
Type of antenna: Chip antenna
Antenna gain: 3.0 dBi
Power supply: Adaptor (I/P: 100-240V~50/60Hz, 400mA O/P: 5.0V, 2000mA)
Battery 3.7Vd.c., 680mAh, 2.516Wh
Host device: none

Transmitter

Unom

Mode A (BT 2.0 Normal mode)


Power (ch 0): Conducted: 1.49 dBm
Power (ch 39): Conducted: 0.96 dBm
Power (ch 78): Conducted: -0.21 dBm

Mode B (BT 2.0 EDR mode)

Power (ch 0): Conducted: 1.63 dBm
Power (ch 39): Conducted: 1.01 dBm
Power (ch 78): Conducted: -0.19 dBm

Mode C (BT 4.0)

Power (ch 0): Conducted: 1.50 dBm
Power (ch 19): Conducted: 0.79 dBm
Power (ch 39): Conducted: -0.46 dBm




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

Manufacturer: (if applicable)

Name: ./..
Street: ./..
Town: ./..
Country: ./..

1.6 Test standards

47 CFR PART 15 SUBPART C § 15.247 (2021-10)



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations were ascertained in the course of the tests performed.



2.2 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa


Power supply: Adaptor (I/P: 100-240V~50/60Hz, 400mA O/P: 5.0V, 2000mA)

Battery 3.7Vd.c., 680mAh, 2.516Wh

Extreme conditions parameters: ./.

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 0.94 dB Voltage probe : 0.96 dB Include Pulse Limiter : 1.52 dB
Estimation Result of Uncertainty of Radiated Emission(3M) (Transmitter Radiated Emissions in Restricted Bands, Spurious Emissions (tx), Radiated Emission from Digital Part)	Expanded Uncertainty : 0.009-30 MHz : 3.48 dB 30-1000 MHz : 3.96 dB 1-18 GHz : 2.46 dB 18-40 GHz : 2.44 dB
Estimation Result of Uncertainty of Bandwidth Measurement (20 dB Bandwidth, Minimum 6 dB Bandwidth)	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement (Peak Output Power (transmitter))	Expanded Uncertainty : 1.48 dB
Estimation Result of Uncertainty of Power Density Measurement (Peak Power Spectral Density)	Expanded Uncertainty : 1.48 dB
Estimation Result of Uncertainty of Band Edge Measurement (Radiated Emission on the band edge)	Expanded Uncertainty : 0.67 dBc
Estimation Result of Uncertainty of Frequency Separation Measurement (Carrier Frequency Separation, Number of Hopping Frequencies)	Expanded Uncertainty : 554.14 Hz
Estimation Result of Uncertainty of Duty Cycle Measurement (Time of Occupancy (Dwell Time))	Expanded Uncertainty : 0.1 ms

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2022/6/22	2023/6/21
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2022/10/24	2023/10/23
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2022/10/24	2023/10/23
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2022/8/3	2023/8/2
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2022/11/9	2023/11/8
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2022/7/29	2023/7/28
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2022/6/21	2023/6/20
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2022/10/17	2023/10/16
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2022/8/18	2023/8/17
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2022/6/13	2023/6/12
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2022/6/22	2023/6/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2022/5/23	2023/5/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2023/3/2	2024/3/1
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2022/6/28	2023/6/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2022/8/1	2023/7/31
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2023/3/22	2024/3/21
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2023/2/17	2024/2/16
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2023/2/20	2024/2/19
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2022/11/5	2023/11/4
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2022/9/16	2023/9/15
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2022/6/9	2023/6/8
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2023/1/4	2024/1/3
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2022/11/8	2023/11/7
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2022/6/20	2023/6/19
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2022/8/5	2023/8/4
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2022/8/5	2023/8/4
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2023/2/17	2024/2/16
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2022/8/5	2023/8/4
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2022/8/5	2023/8/4
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2023/2/20	2024/2/19
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2022/5/27	2023/5/26
ETSTW-RE 152	Bi-log Hybrid Antenna	MCTD 2786B	BLB20J04029	ETC	2023/1/31	2024/1/30
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2022/10/3	2023/10/2
ETSTW-RE 159	Bi-log Hybrid Antenna (30M~1000 MHz)	MCTD 2786B	BLB21N04035	ETC	2022/12/22	2023/12/21
ETSTW-RE 177	Bi-log Hybrid Antenna with 6dB Attenuator	VULB 9168&EMCI-N-6-06	01380&AT-06007	SCHWARZBECK&EMC	2022/9/1	2023/8/31
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2022/7/14	2023/7/13
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2022/6/10	2023/6/9
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2023/3/22	2024/3/21
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2022/5/9	2023/5/8
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2022/10/24	2023/10/23
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2023/1/4	2024/1/3
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2023/1/4	2024/1/3
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2023/1/4	2024/1/3
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2023/1/4	2024/1/3
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2022/9/2	2023/9/1
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2022/5/3	2023/5/2
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2022/8/5	2023/8/4
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2022/6/29	2023/6/28
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2022/5/6	2023/5/5
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2022/9/16	2023/9/15
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2022/9/16	2023/9/15
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2023/02/17	2024/2/16




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2022/5/27	2023/5/26
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2022/5/27	2023/5/26
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 076	SMA type cable (1m)	N/A	812652/4	HUBER+SUHNER	2023/2/20	2024/2/19
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2022/9/16	2023/9/15
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2022/10/28	2023/10/27



2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dBμV + 10.36 dB + 6 dB = 36.36 dBμV/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	☒	☒	☐
Equivalent isotropically radiated Power	15.247(b)	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.247(d):15.209	☒	☒	☐
Spurious Emissions conducted – Transmitter operating	15.247	☐	☐	☐
Carrier Frequency Separation	15.247(a) (1)	☒	☒	☐
Number of Hopping Frequencies	15.247(a) (1)(i)	☒	☒	☐
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	☒	☒	☐
20 dB Bandwidth	15.247(a) (1)(i)	☒	☒	☐
Minimum 6 dB Bandwidth	15.247(a)(2)	☒	☒	☐
Band-edge Compliance of RF Emission	15.247(d)	☒	☒	☐
Peak Power Spectral Density	15.247(e)	☒	☒	☐
Radiated Emission from Digital Part	15.109	☐	☐	☐
Power Line Conducted Emission	15.207(a)	☒	☒	☐



Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.
The power was measured with modulation (declared by the applicant).


Test date: March 17, 2023

Temperature: 21.6 °C


Humidity: 58.4 %

Tester: Sora


Mode A

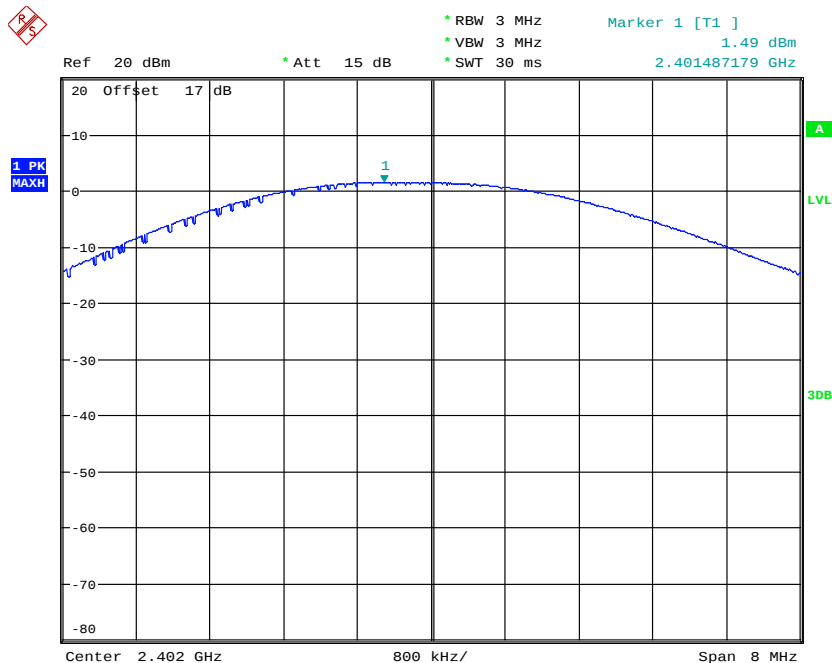


MAX OUTPUT POWER CH0
Date: 17.MAR.2023 11:26:26




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

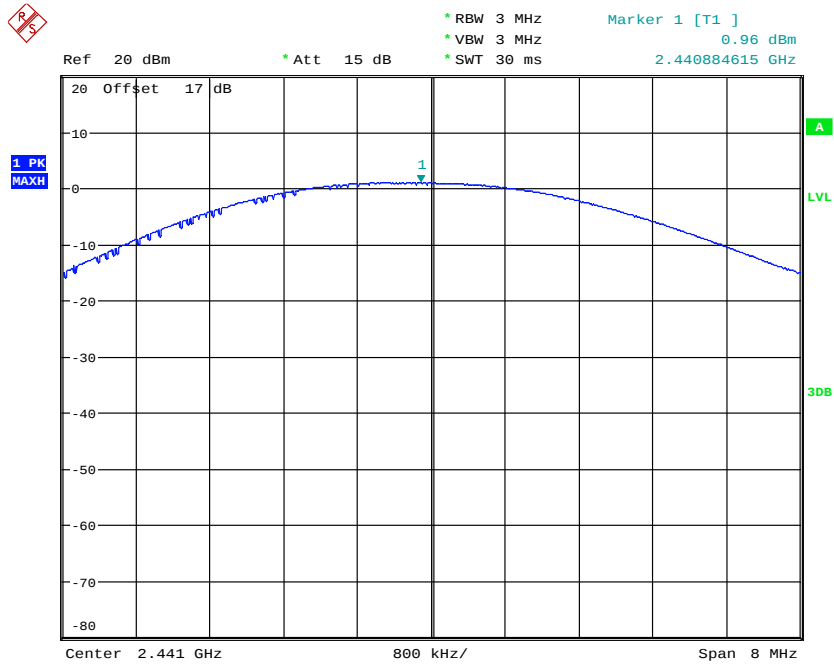

MAX OUTPUT POWER CH39
Date: 17.MAR.2023 11:27:26

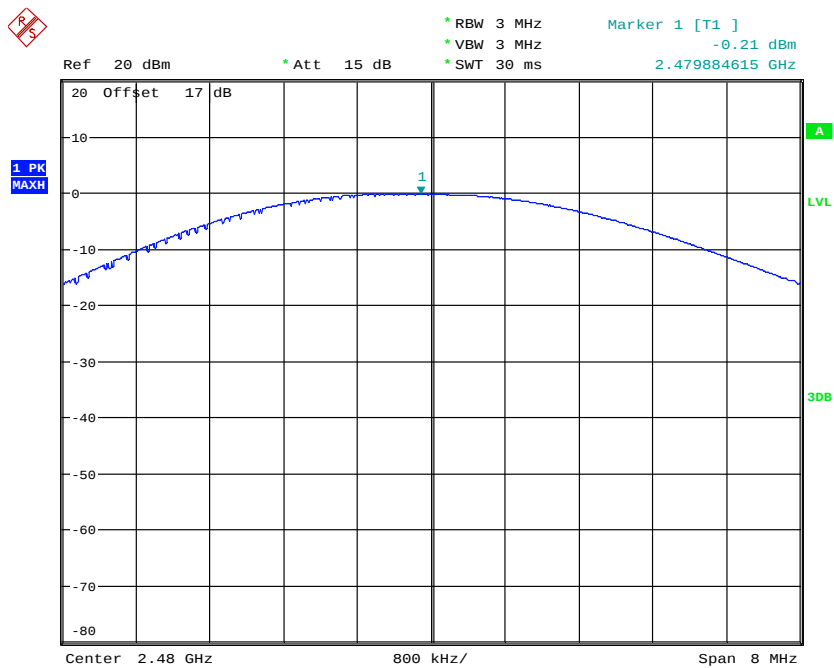


MAX OUTPUT POWER CH78
Date: 17.MAR.2023 11:28:18




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B


Mode B

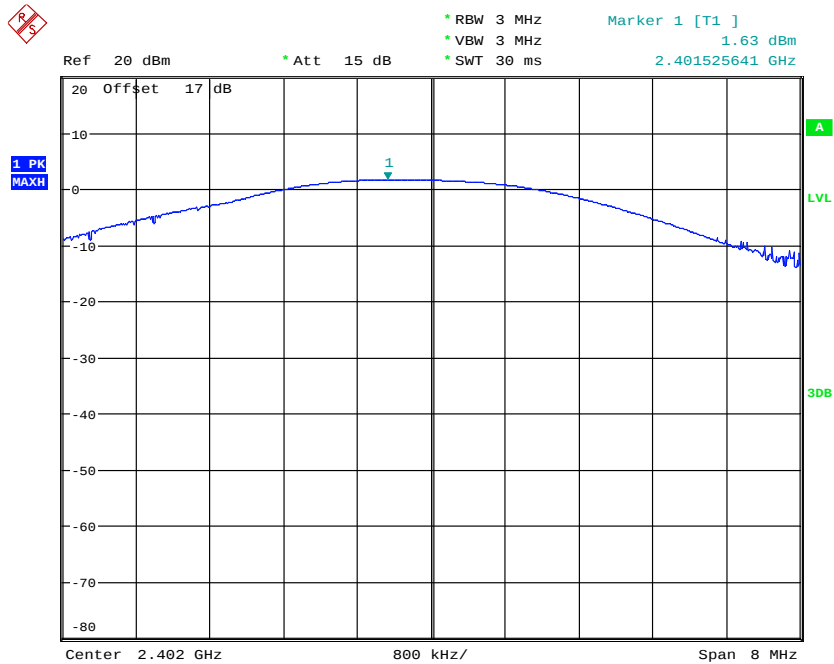


MAX OUTPUT POWER CH0 EDR MODE
Date: 17.MAR.2023 11:40:19

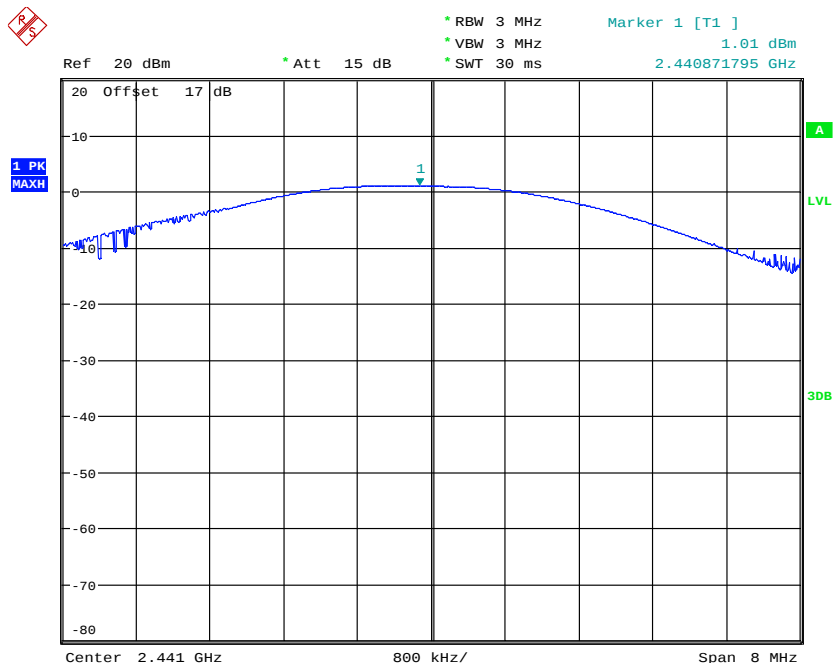

MAX OUTPUT POWER CH39 EDR MODE
Date: 17.MAR.2023 11:32:06




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

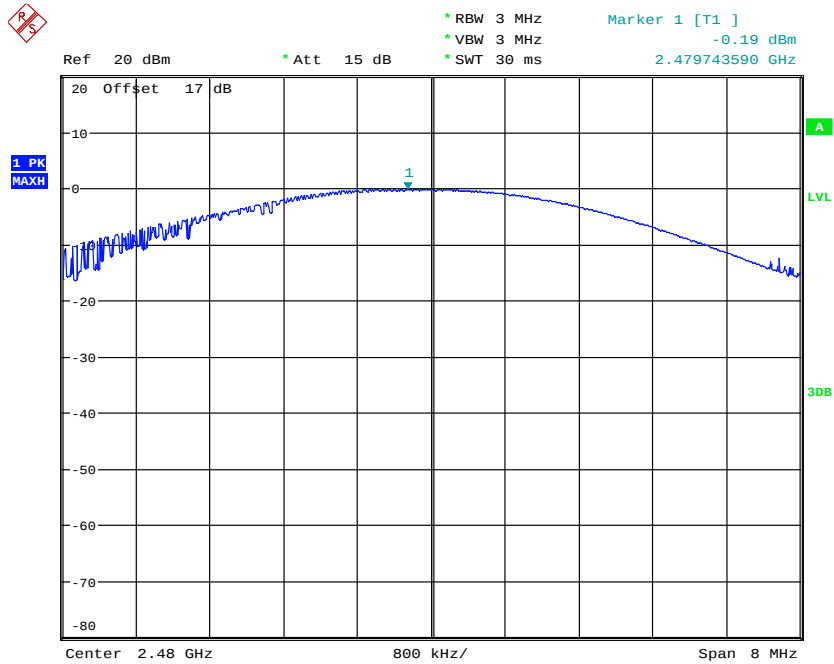


MAX OUTPUT POWER CH78 EDR MODE
Date: 17.MAR.2023 11:32:54

Mode C

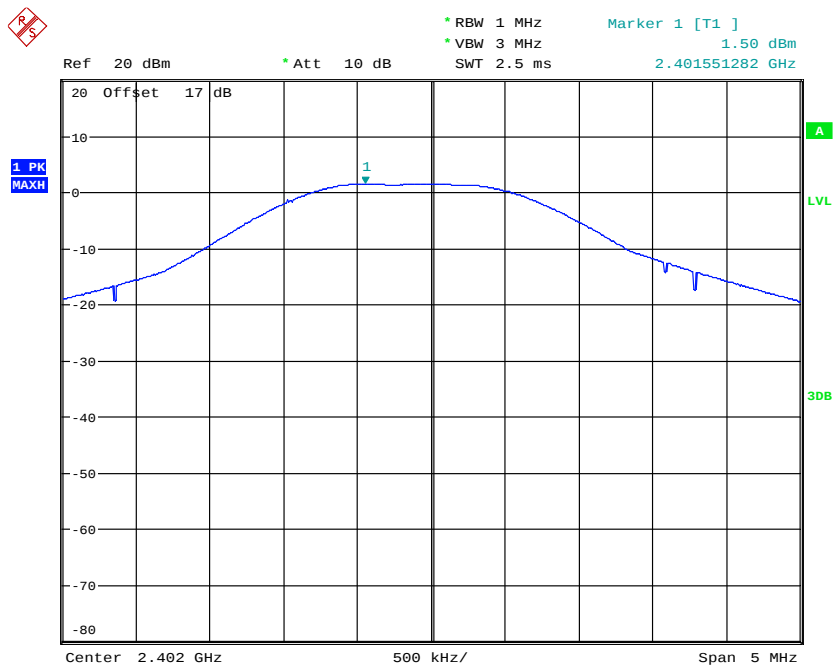


MAX OUTPUT POWER BT4.0 CH00
Date: 17.MAR.2023 11:14:10




Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

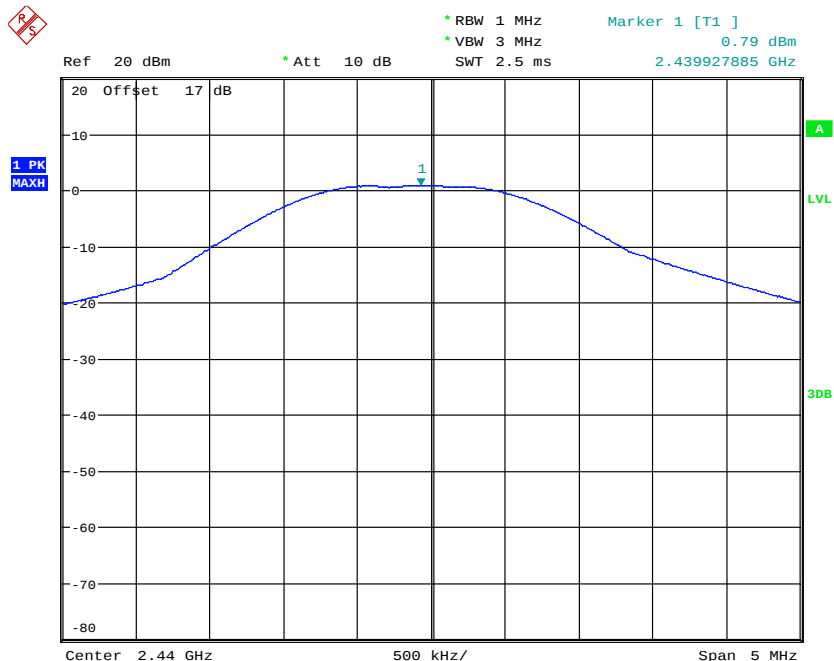


MAX OUTPUT POWER BT4.0 CH19

Date: 17.MAR.2023 11:12:35

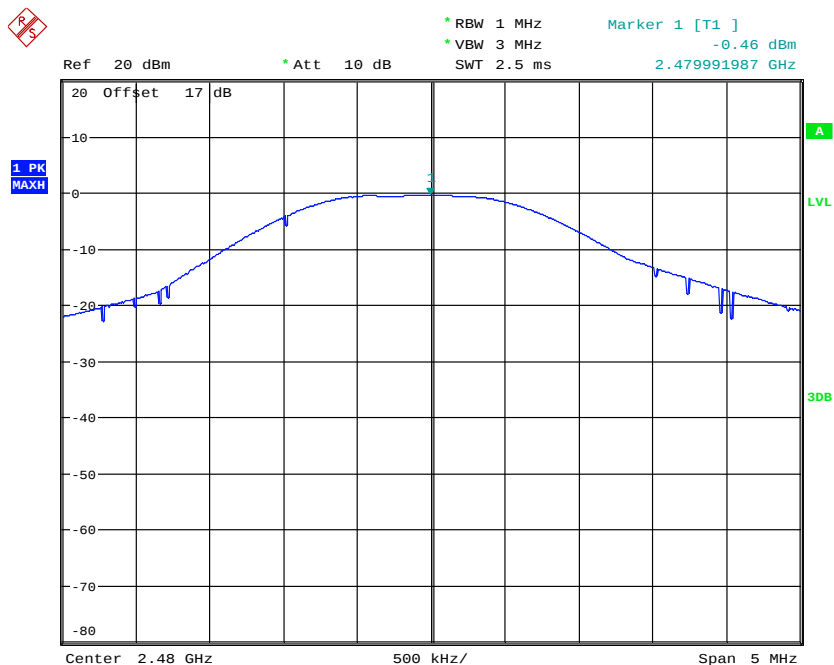

MAX OUTPUT POWER BT4.0 CH39

Date: 17.MAR.2023 11:10:36



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22477-C-1


FCC ID: HLEMS9X6B

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.2 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (d), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency $\leq$ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency $>$ 1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:


“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time} / 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.3 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:


“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

Test equipment used: ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 088, ETSTW-RE 018, ETSTW-RE 064

Note: No duty cycle correction was added to the reading of EUT.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

Summary table with radiated data of the test plots

Model: MS916 Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
 2. The formula of measured value as: Test Result = Reading + Correction Factor
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.
 5. Please see attached diagrams in appendix.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 088, ETSTW-RE 018, ETSTW-RE 064



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.4 Carrier Frequency Separation

Carrier Frequency Separation was measured with modulation (declared by manufacturer).


According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

Test date: March 17, 2023

Temperature: 21.6 °C


Humidity: 58.4 %

Tester: Sora

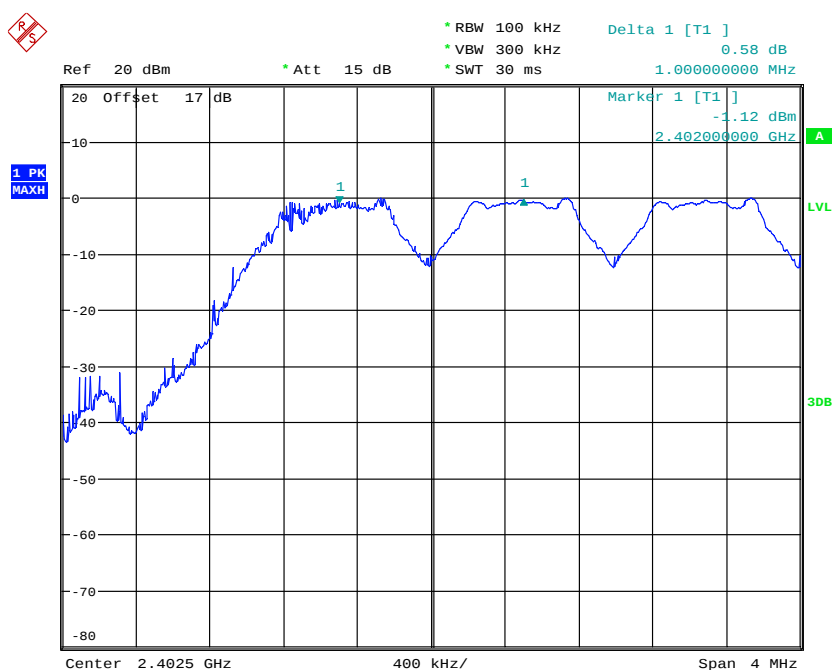


FREQUENCY SEPARATION CH0


Date: 17.MAR.2023 11:53:29




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

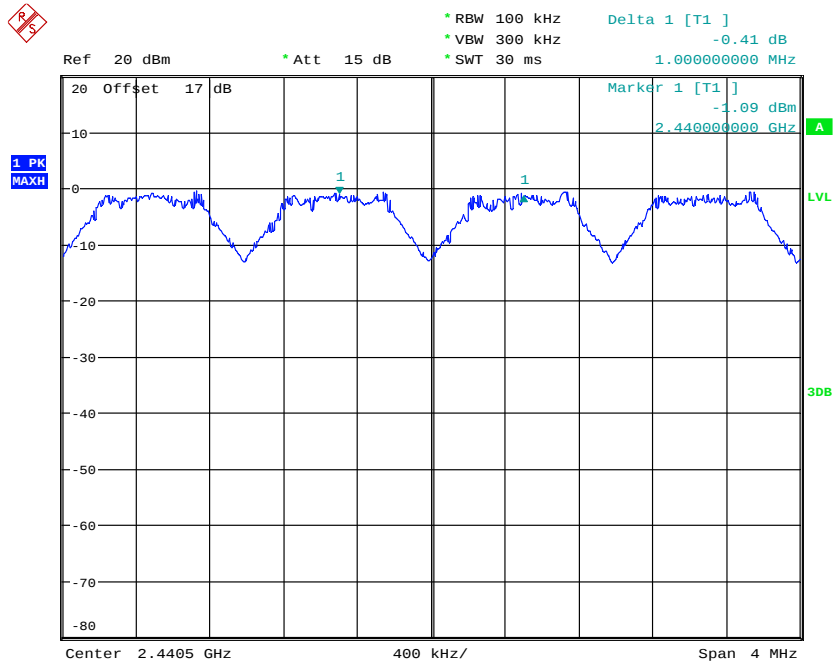

FREQUENCY SEPARATION CH39
Date: 17.MAR.2023 11:48:49

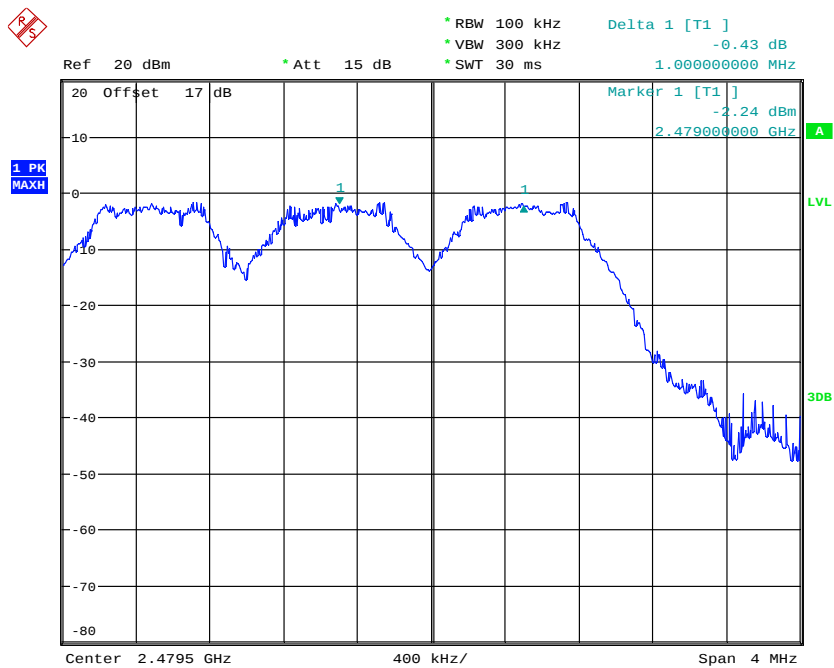

FREQUENCY SEPARATION CH78
Date: 17.MAR.2023 11:47:16




Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

Limits:

Frequency Range (MHz)	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

3.5 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.


For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

Test date: March 17, 2023


Temperature: 21.6 °C

Humidity: 58.4 %


Tester: Sora

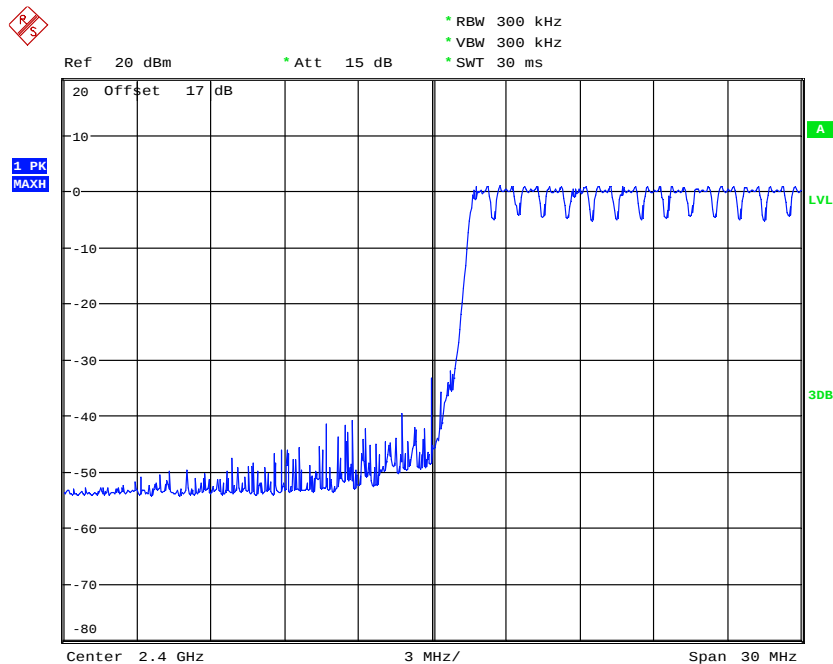


NUMBER OF HOPPING CH0-13
Date: 17.MAR.2023 11:41:14




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

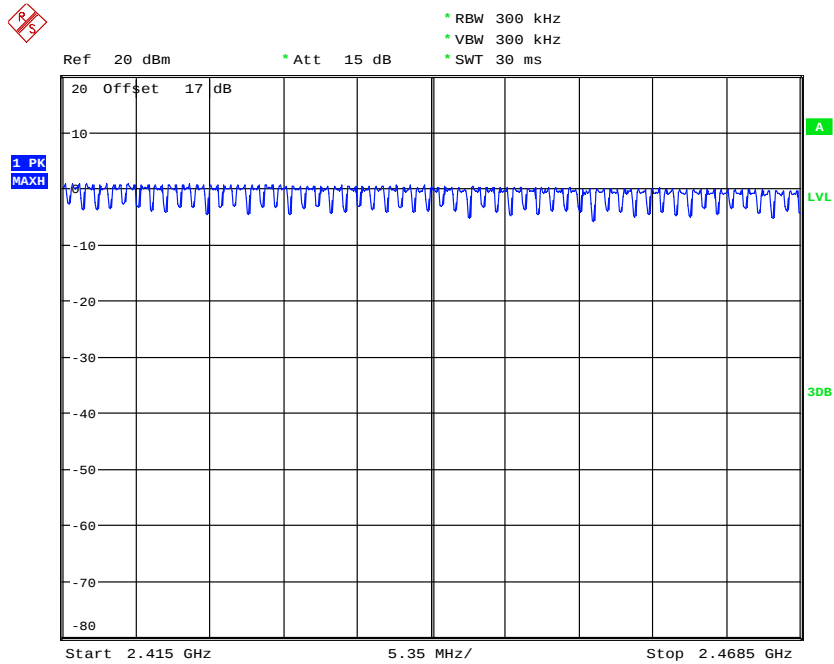

NUMBER OF HOPPING CH14-66
Date: 17.MAR.2023 11:43:02

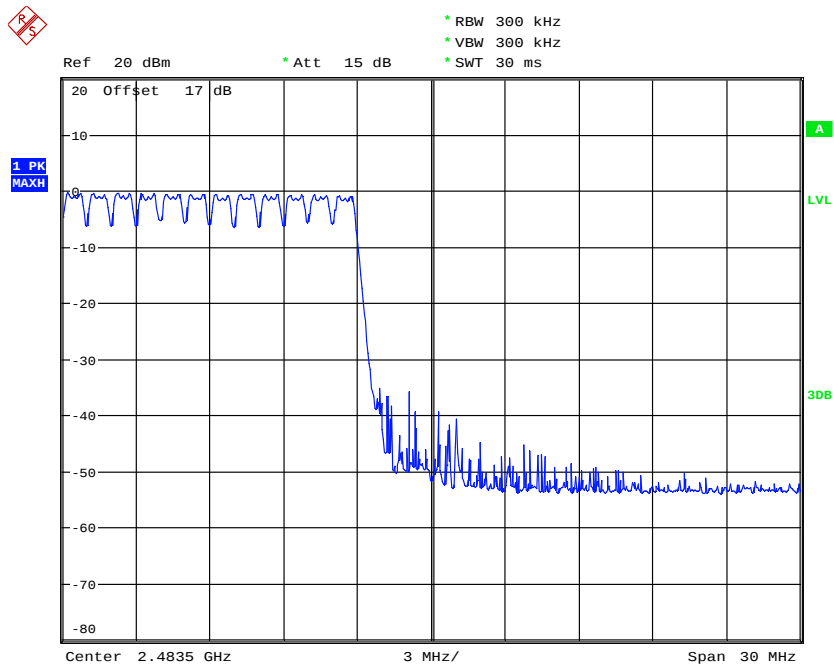

NUMBER OF HOPPING CH67-78
Date: 17.MAR.2023 11:41:54



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

Limits:

Frequency Range MHz	Limit	
	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	≥ 50
	Bandwidth ≥ 250 kHz	≥ 25
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

3.5.1 Pseudorandom Frequency Hopping Sequence


The generation of the hopping sequence is determined by the Bluetooth core specification and complies with the FCC requirements.

3.5.2 Coordination of hopping sequences to other transmitters

According to the Bluetooth core specification such a coordination is not possible. During scatternet function only one of the two hopping sequences will be used at a definite moment.

3.5.3 System Receiver Hopping Capability

According to the Bluetooth core specification. The system receivers shift frequencies in synchronization with the transmitted signals.



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.6 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.


For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Test date: March 17, 2023

Temperature: 21.6 °C


Humidity: 58.4 %

Tester: Sora

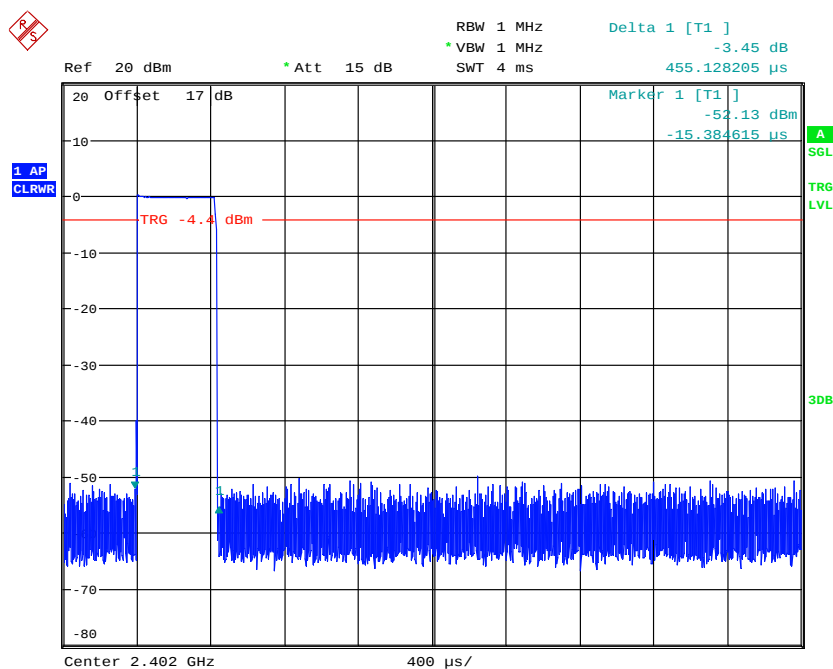


DWELL TIME CH0 DH1 (0.455ms * 320events = 145.6ms)

Date: 17.MAR.2023 11:59:00




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

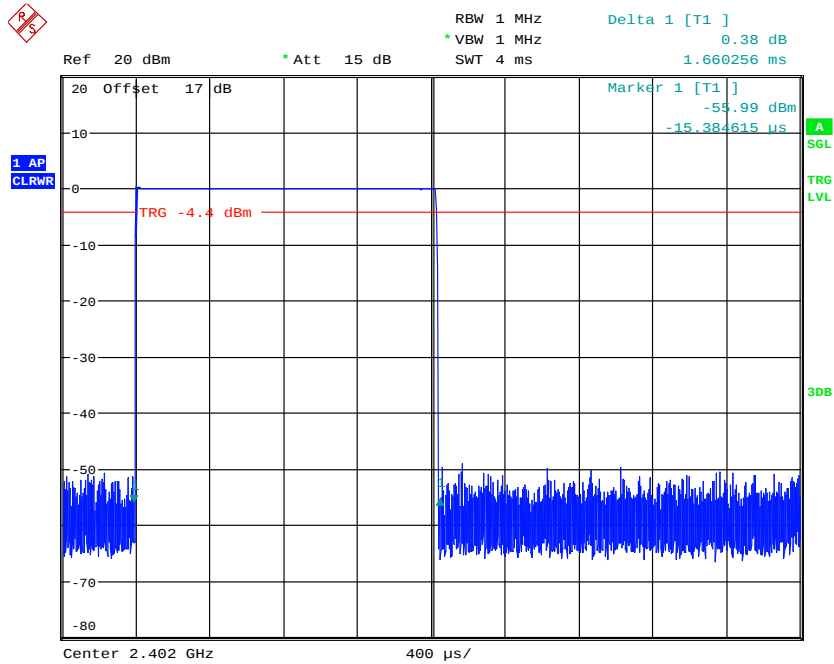



DWELL TIME CH0 DH3 (1.66ms * 160events = 265.6ms)

Date: 17.MAR.2023 13:05:06

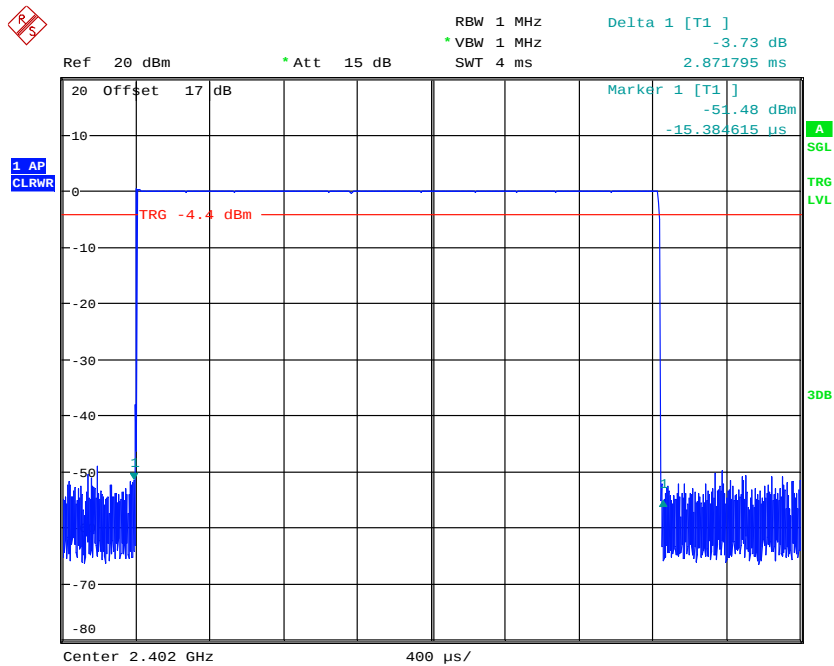



DWELL TIME CH0 DH5 (2.871ms * 106events = 304.326ms)

Date: 17.MAR.2023 13:06:30








FCC ID: HLEMS9X6B





FCC ID: HLEMS9X6B






Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

Limits and measurement periods:

Frequency MHz	Number of channels	Measurement Period	Limit
902 – 928	≥ 50	20 s	0.4 s
	$49 \geq 25$	10 s	0.4 s
2400 – 2483.5	≥ 15	0.4 s * number of used channels	0.4 s
5725- 5850	≥ 75	30 s	0.4s

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.7 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.


Test date: March 17, 2023

Temperature: 21.6 °C

Humidity: 58.4 %


Tester: Sora

Mode A

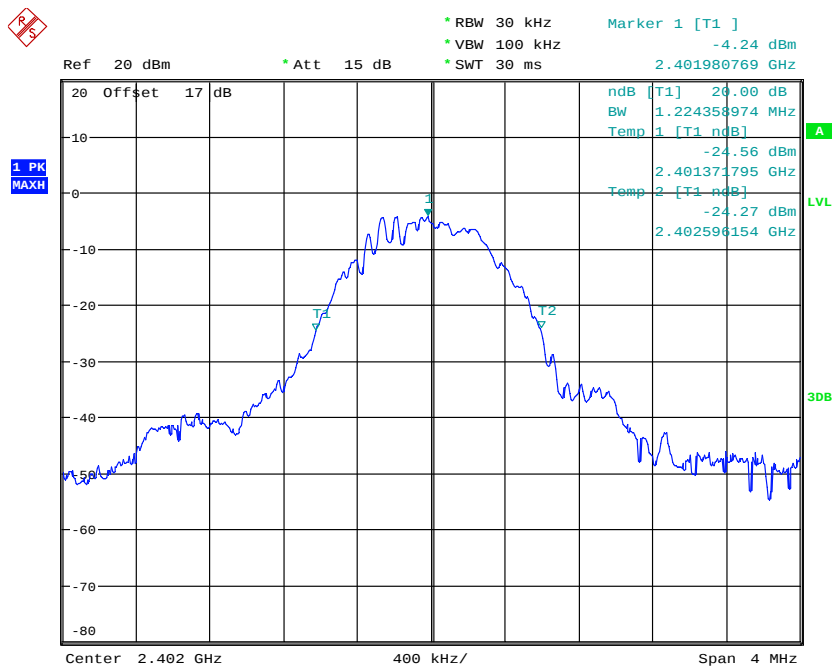


20DB BANDWIDTH CH0


Date: 17.MAR.2023 11:26:34




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

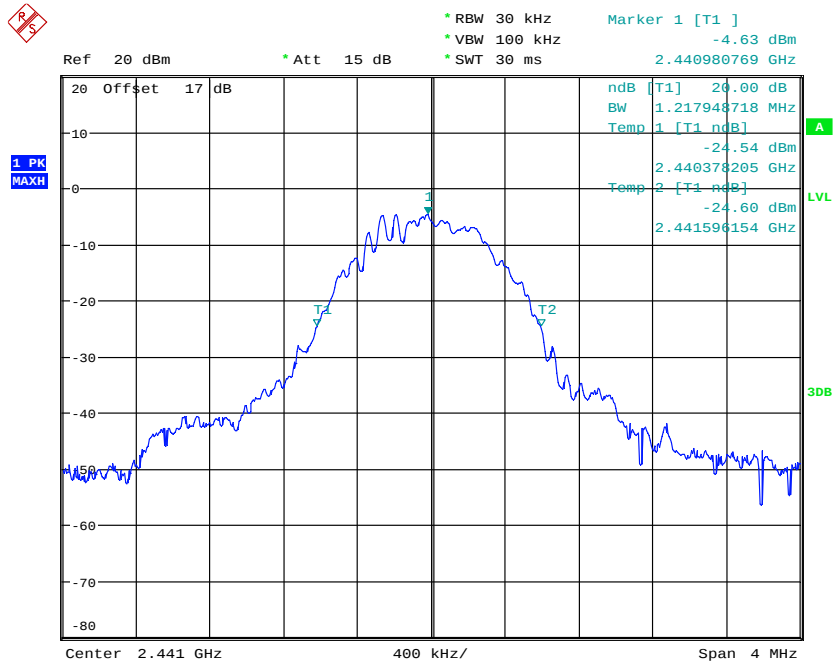

20DB BANDWIDTH CH39
Date: 17.MAR.2023 11:27:34

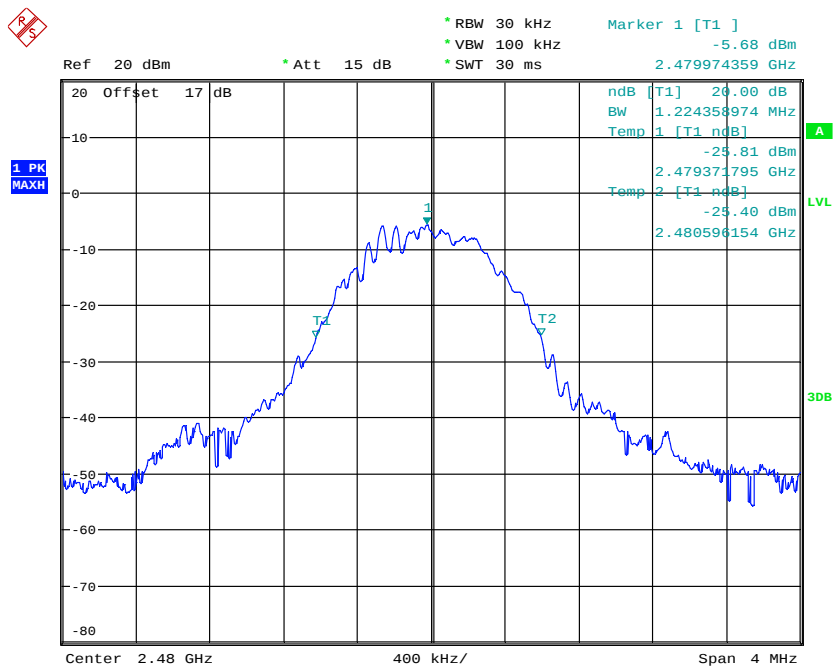


20DB BANDWIDTH CH78
Date: 17.MAR.2023 11:28:26



Registration number: W6M22302-22477-C-1


FCC ID: HLEMS9X6B

Mode B

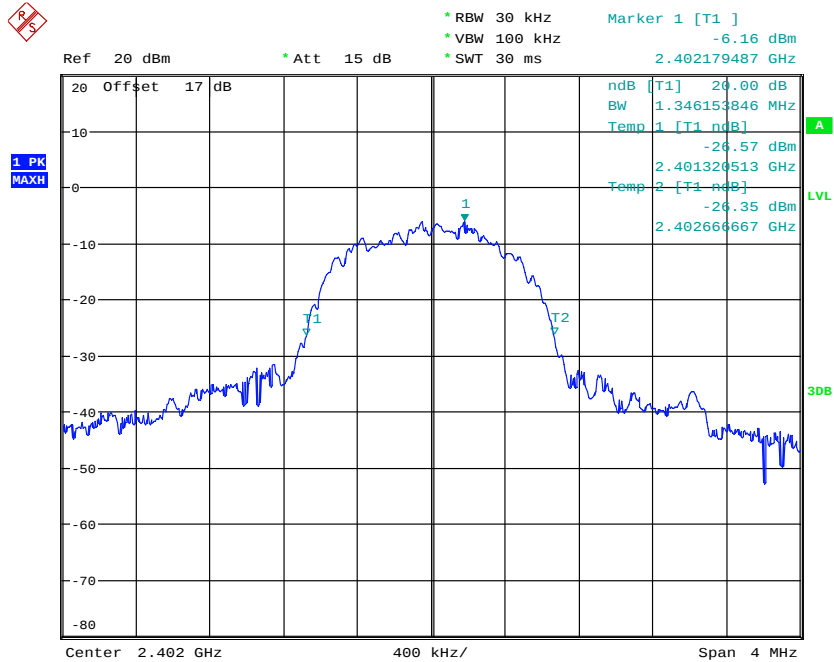

20DB BANDWIDTH CH0 EDR MODE


Date: 17.MAR.2023 11:31:10

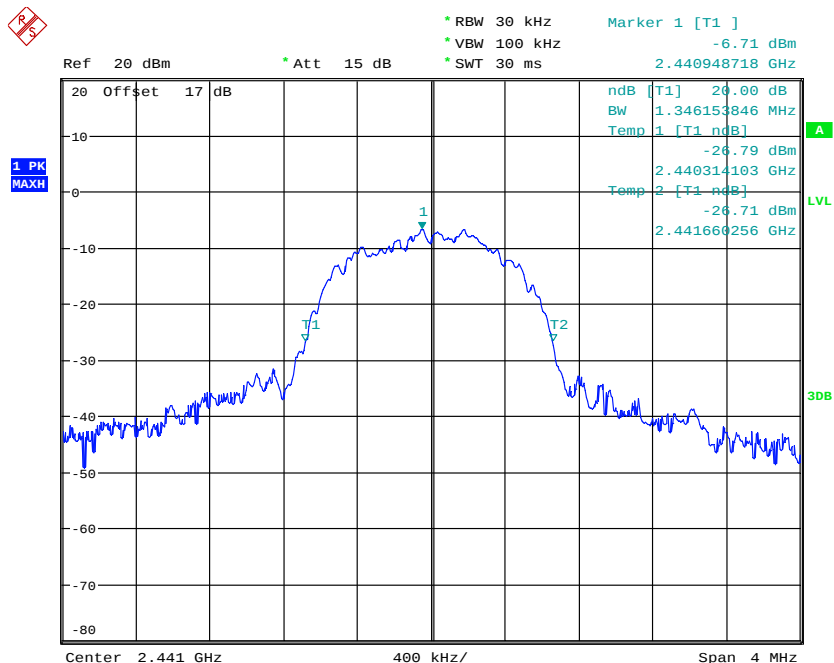

20DB BANDWIDTH CH39 EDR MODE

Date: 17.MAR.2023 11:32:14

Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

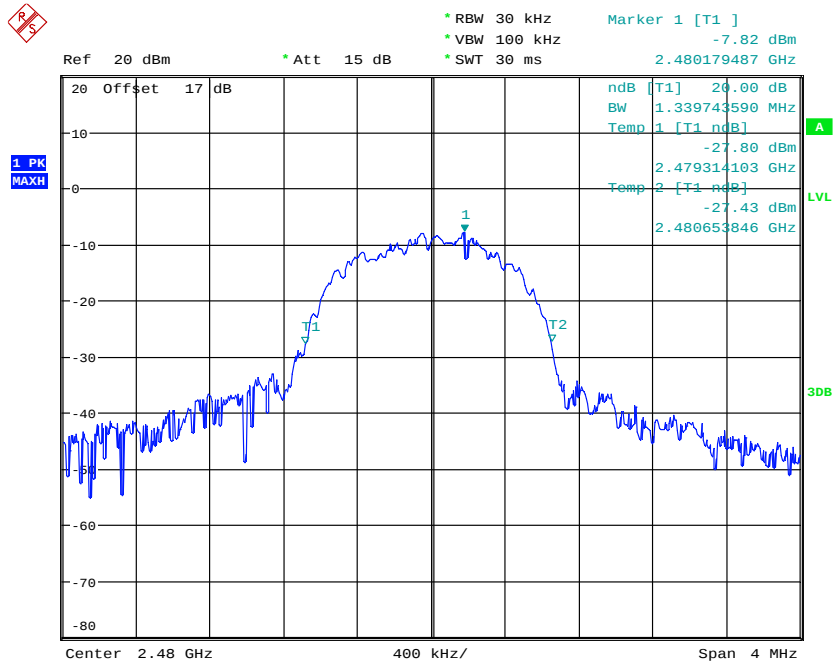

20DB BANDWIDTH CH78 EDR MODE
Date: 17.MAR.2023 11:33:02


Limits:

Frequency Range / MHz	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

3.7.1 System Receiver Input Bandwidth

It is determined in the Bluetooth core specification. The value matches to the bandwidth of transmitter signal.



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.8 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission.

The 6 dB bandwidth is the frequency difference between the two markers.


Test date: March 17, 2023

Temperature: 21.6 °C

Humidity: 58.4 %


Tester: Sora

Mode C

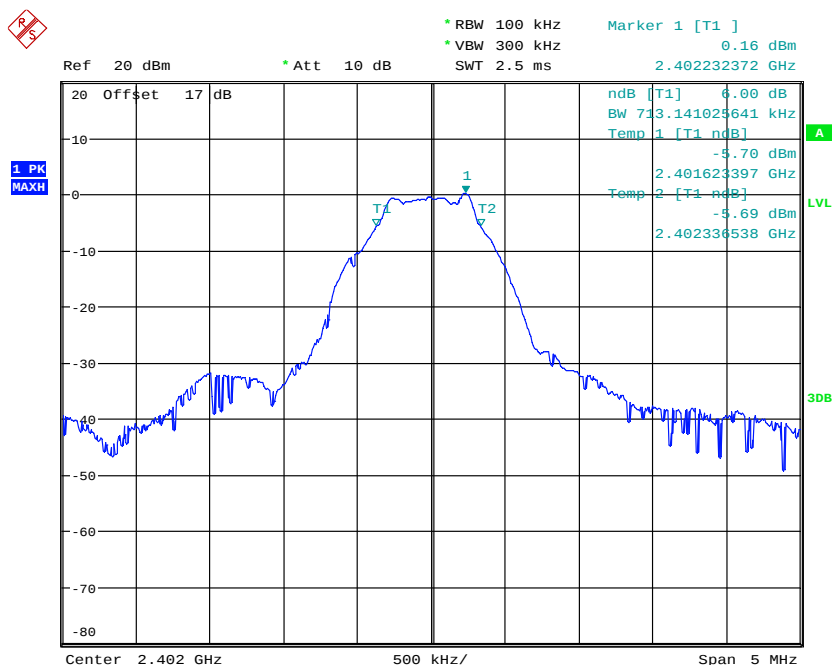


6DB BANDWIDTH BT4.0 CH00


Date: 17.MAR.2023 11:08:48




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

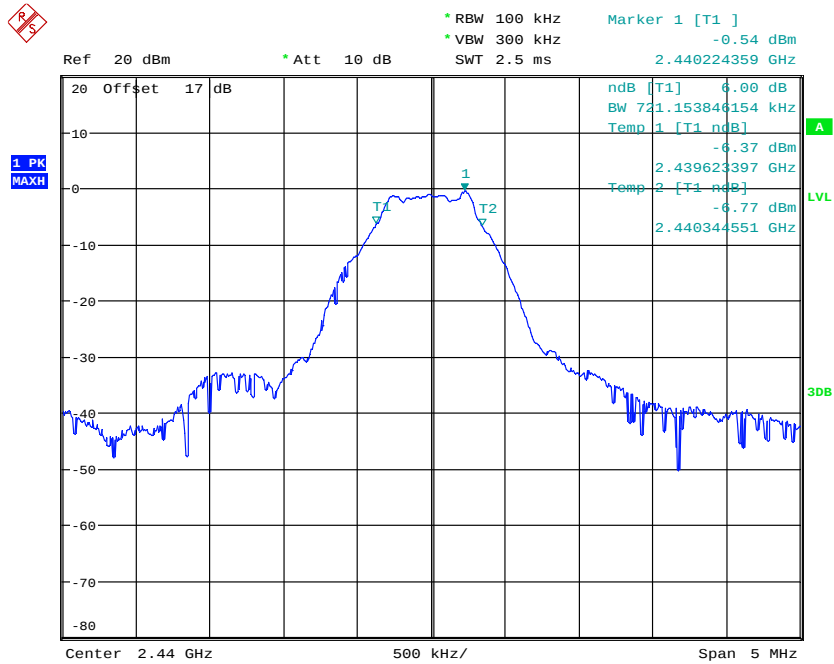

6DB BANDWIDTH BT4.0 CH19
Date: 17.MAR.2023 11:08:05

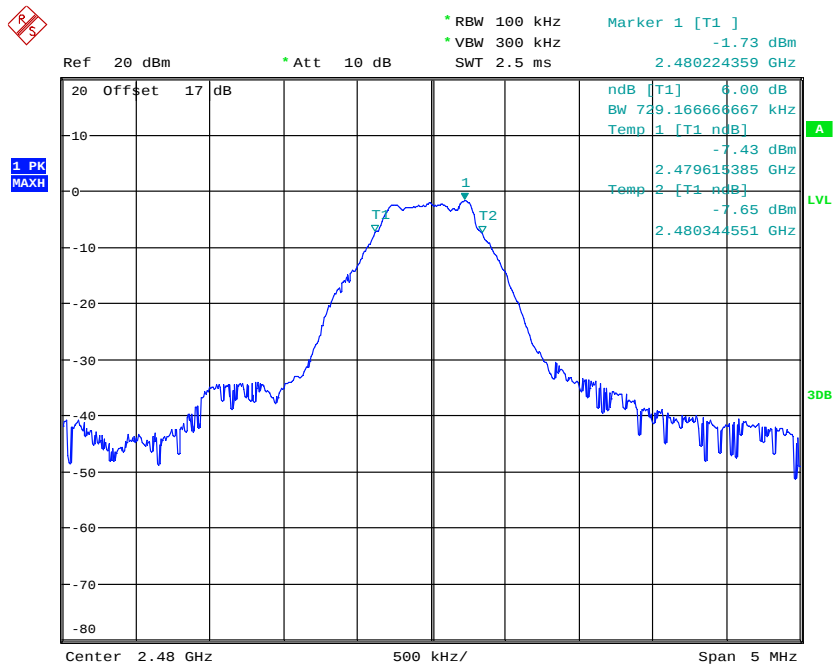

6DB BANDWIDTH BT4.0 CH39
Date: 17.MAR.2023 11:09:33




Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.9 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.


Test date: March 17, 2023

Temperature: 21.6 °C

Humidity: 58.4 %


Tester: Sora

Mode A

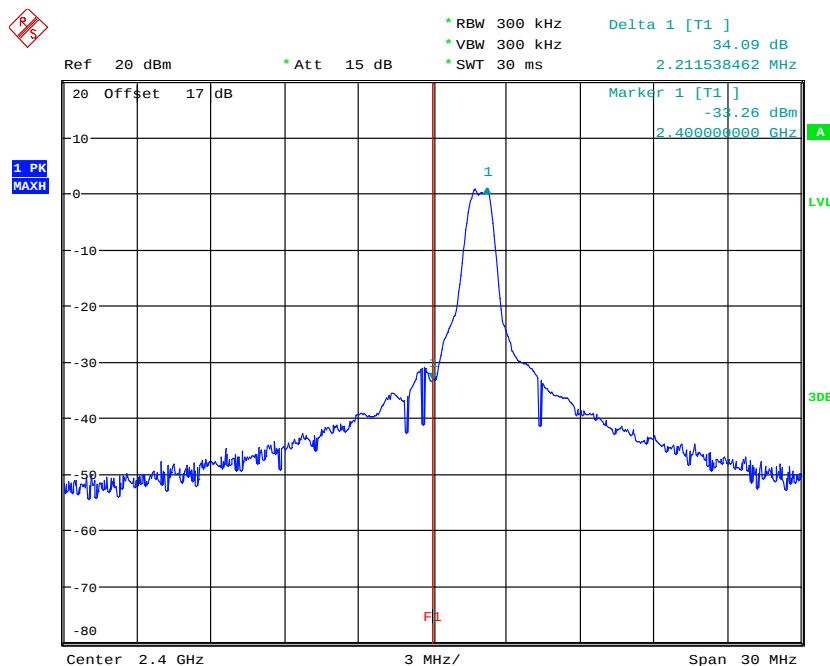

BANDEDGE CH0


Date: 17.MAR.2023 11:26:46



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

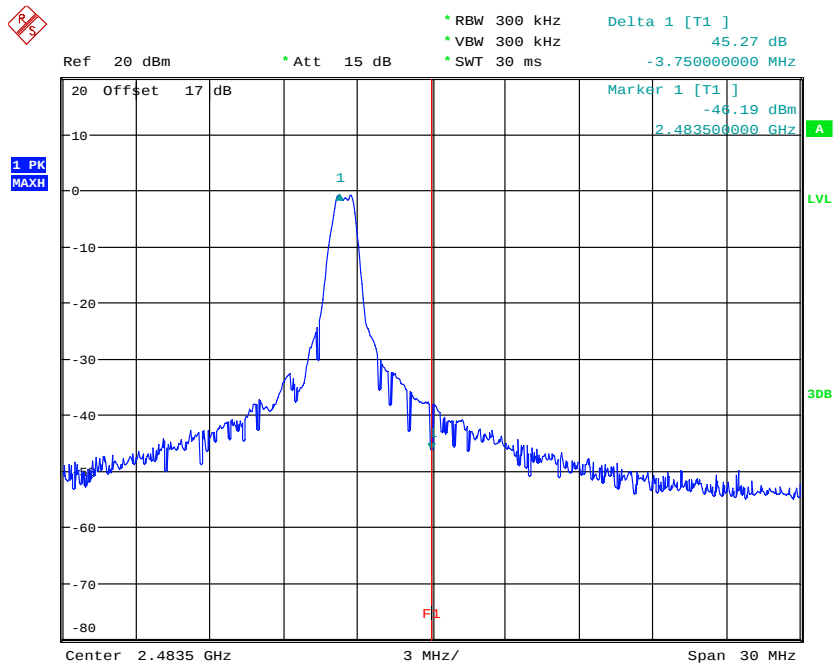


BANDEDGE CH78

Date: 17.MAR.2023 11:28:34

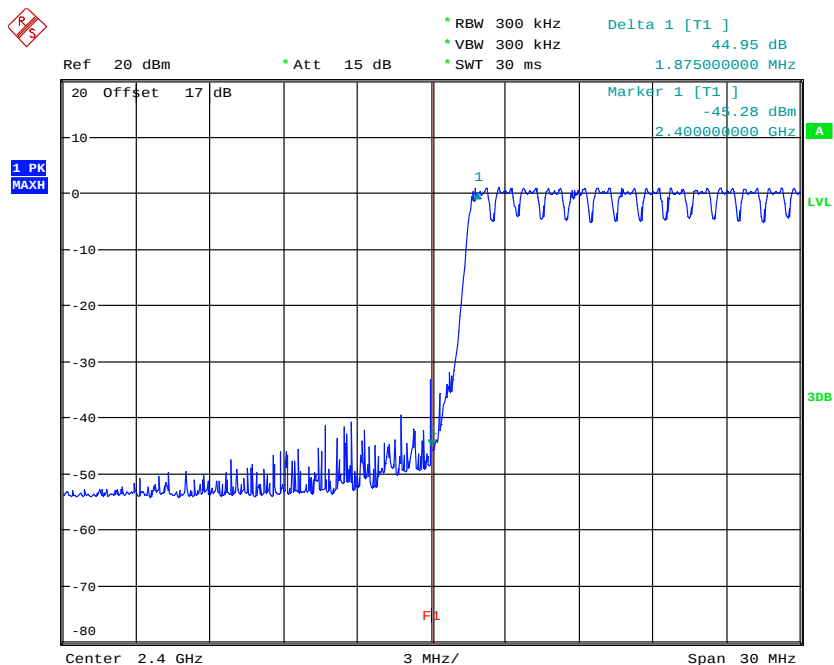


BANDEDGE CH0 HOPPING MODE

Date: 17.MAR.2023 11:41:15




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

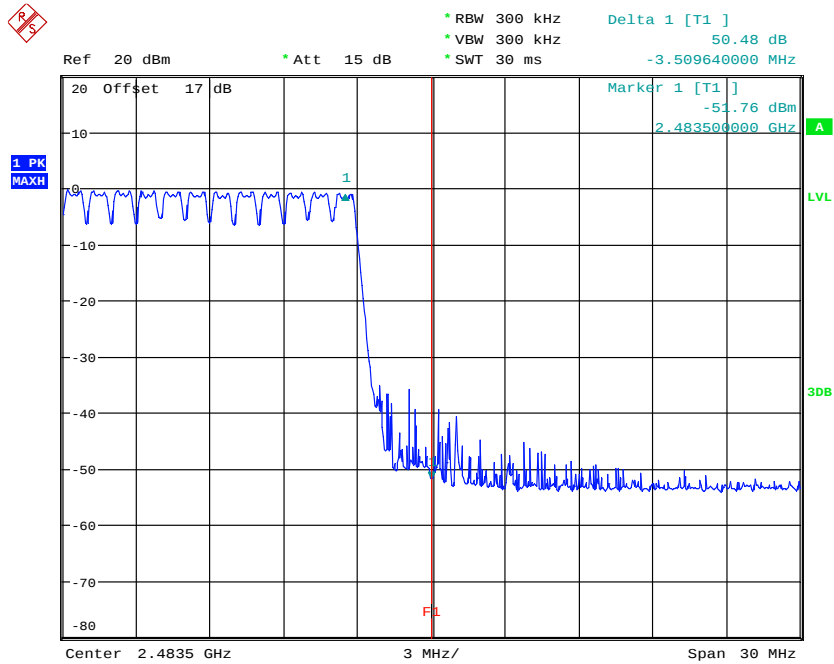


BANDEDGE CH78 HOPPING MODE
Date: 17.MAR.2023 11:41:55


Mode B

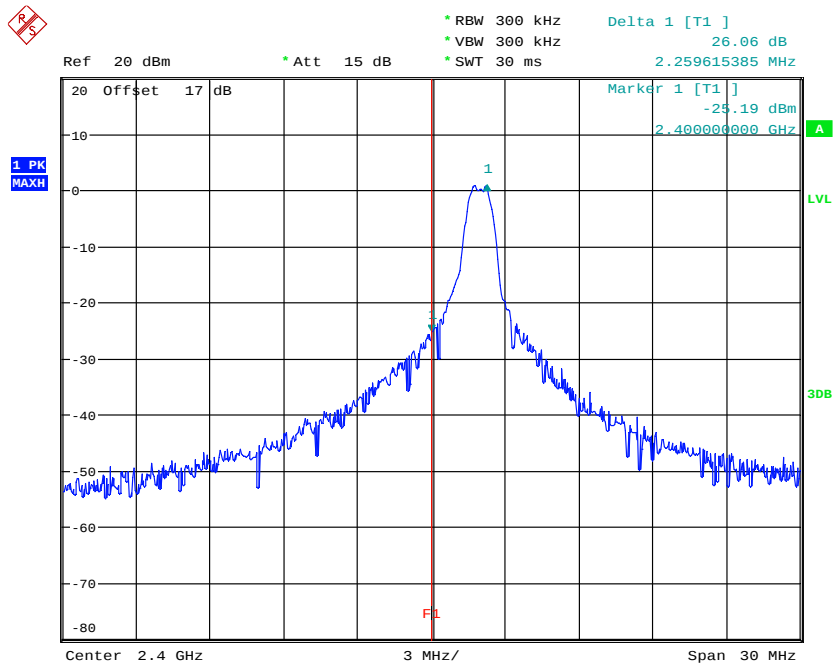


BANDEDGE CH0 EDR MODE
Date: 17.MAR.2023 11:31:18




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

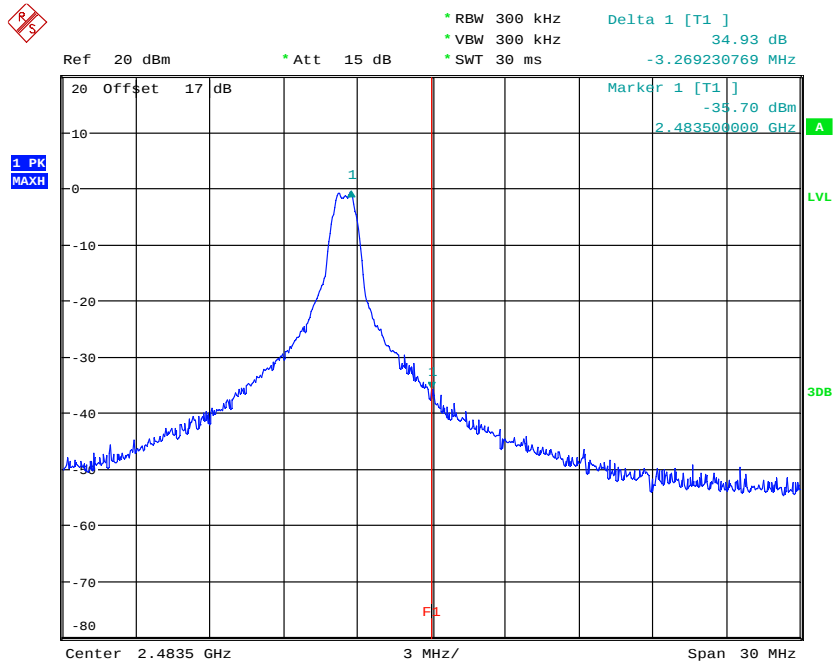


BANDEDGE CH78 EDR MODE
Date: 17.MAR.2023 11:33:14

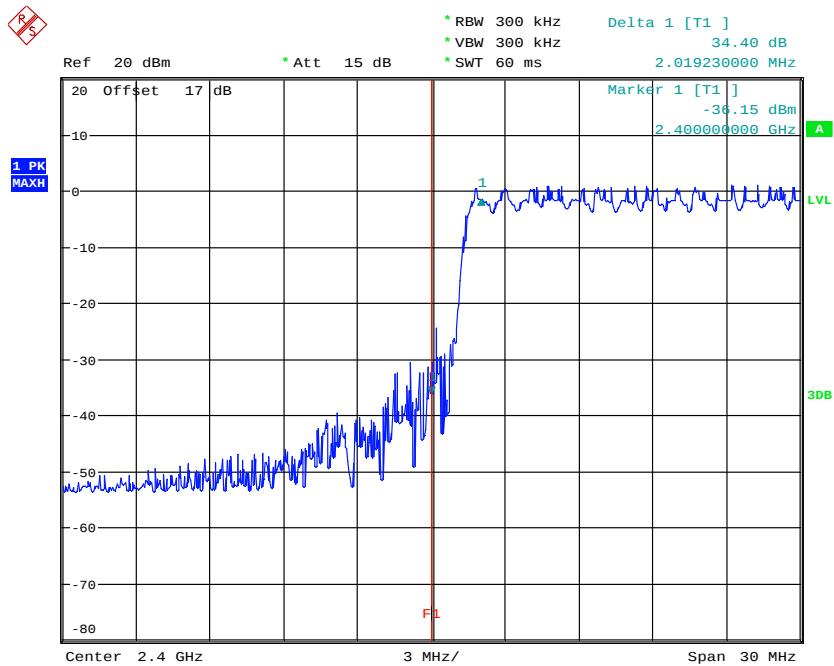

BANDEDGE CH0 EDR HOPPING MODE
Date: 17.MAR.2023 11:35:18




Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

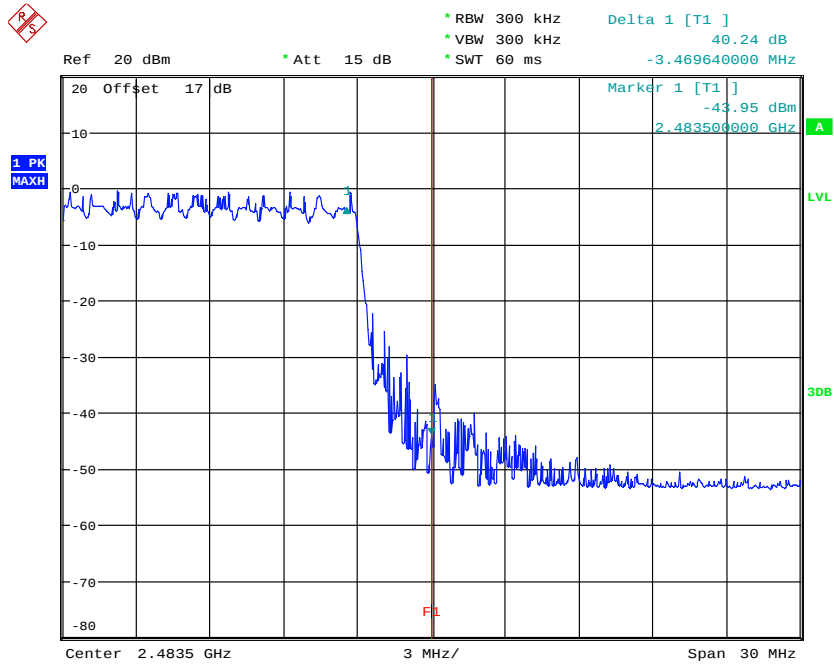


BANDEDGE CH78 EDR HOPPING MODE
Date: 17.MAR.2023 11:37:02


Mode C

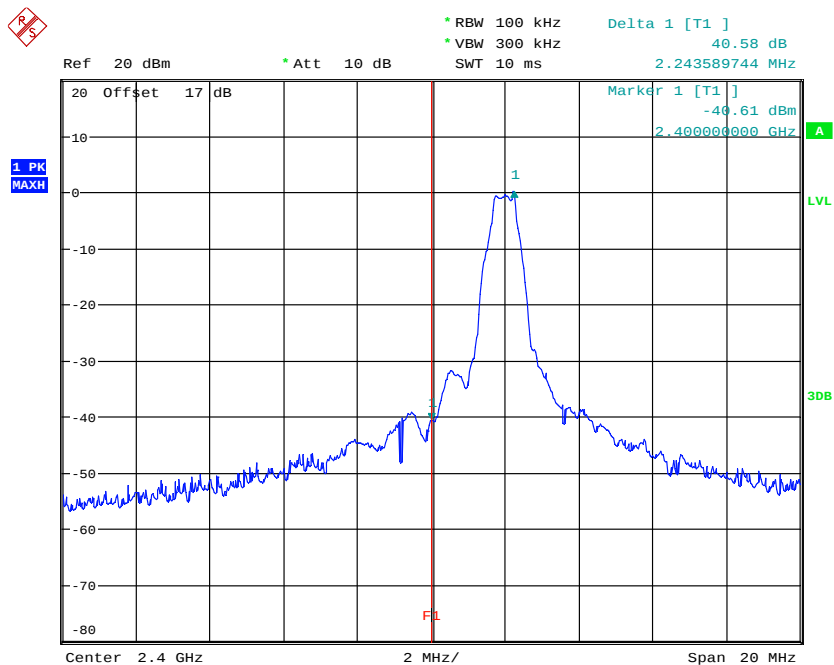

BANDEDGE BT4.0 CH00
Date: 17.MAR.2023 11:05:45



Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

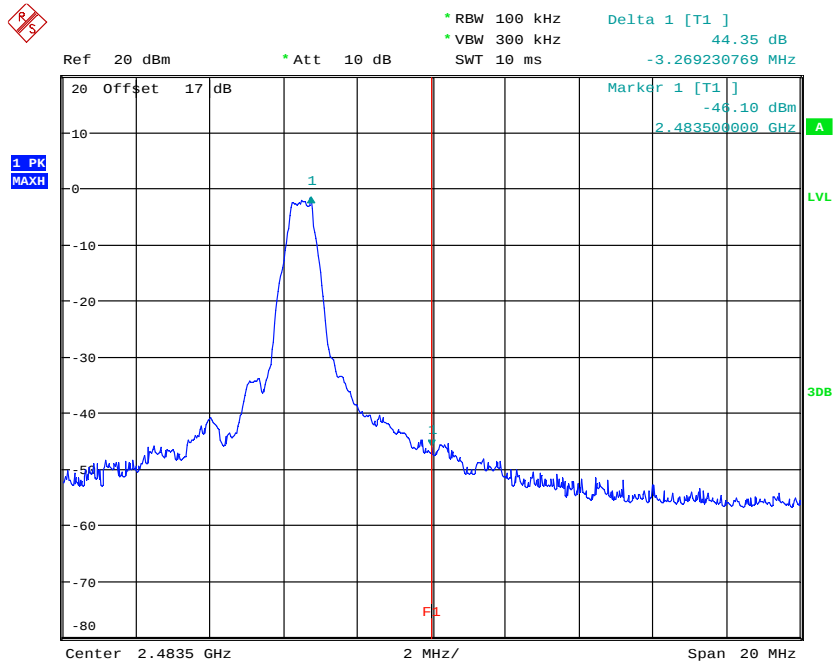


BANDEDGE BT4.0 CH39
Date: 17.MAR.2023 11:04:54

Limit:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.10 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.


Test date: March 17, 2023

Temperature: 21.6 °C

Humidity: 58.4 %


Tester: Sora

Mode C

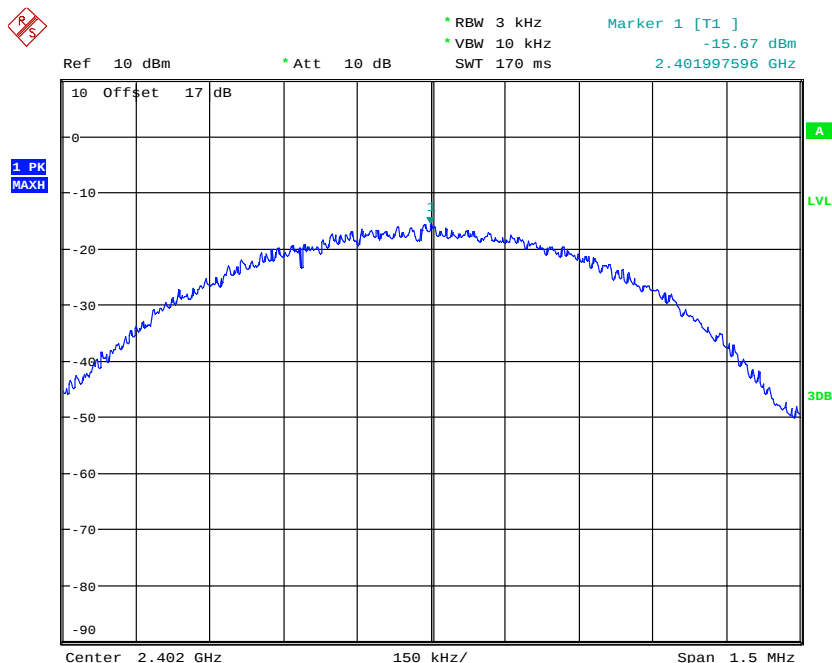


POWER DENSITY BT4.0 CH00

Date: 17.MAR.2023 11:02:26




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

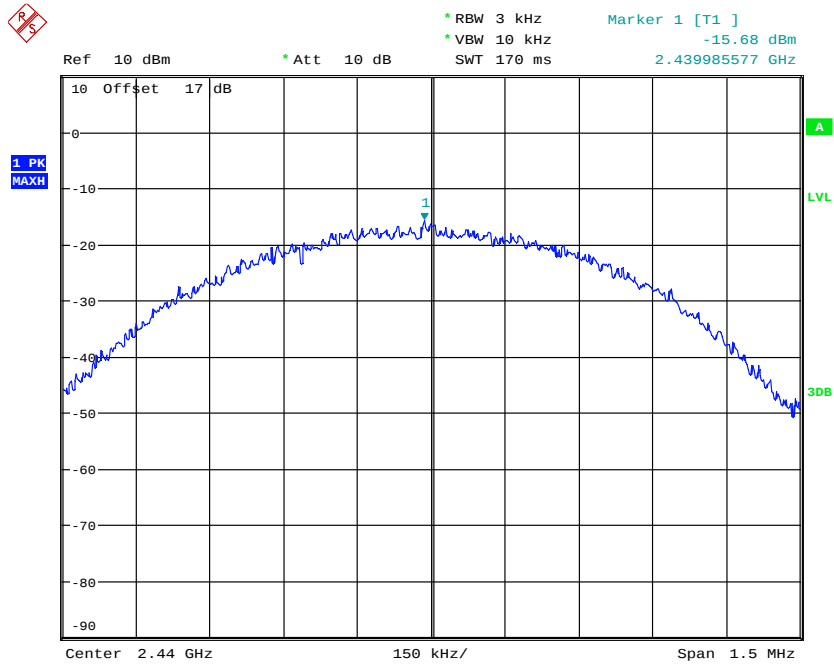

POWER DENSITY BT4.0 CH19
Date: 17.MAR.2023 11:03:12

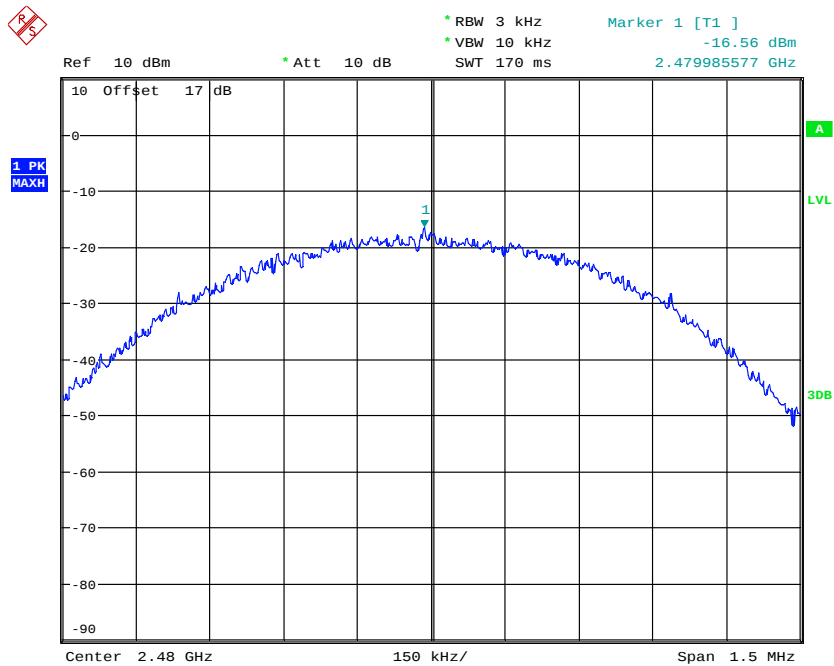

POWER DENSITY BT4.0 CH39
Date: 17.MAR.2023 11:03:48




Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

3.11 Radiated Emission from Digital Part


FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 030, ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 111

Explanation: Please refer to separated test report no.: W6M22302-22477-P-15B.




Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B


3.12 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

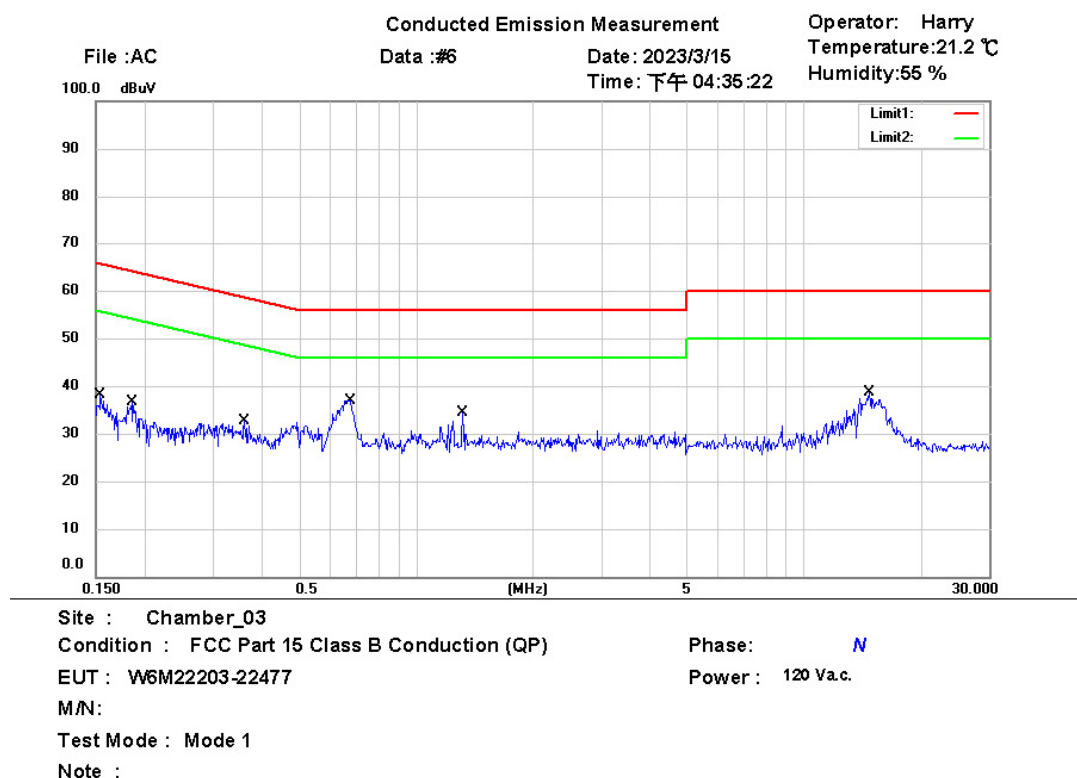


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1537	22.23	QP	9.59	31.82	65.80	-33.98	
	0.1537	19.69	AVG	9.59	29.28	55.80	-26.52	
	0.1852	21.14	QP	9.59	30.73	64.25	-33.52	
	0.1852	18.71	AVG	9.59	28.30	54.25	-25.95	
	0.3600	12.51	QP	9.63	22.14	58.73	-36.59	
	0.3600	-1.28	AVG	9.63	8.35	48.73	-40.38	
	0.6777	22.82	QP	9.65	32.47	56.00	-23.53	
*	0.6777	18.46	AVG	9.65	28.11	46.00	-17.89	
	1.3145	11.56	QP	9.65	21.21	56.00	-34.79	
	1.3145	1.41	AVG	9.65	11.06	46.00	-34.94	
	14.7000	21.12	QP	9.92	31.04	60.00	-28.96	
	14.7000	6.80	AVG	9.92	16.72	50.00	-33.28	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

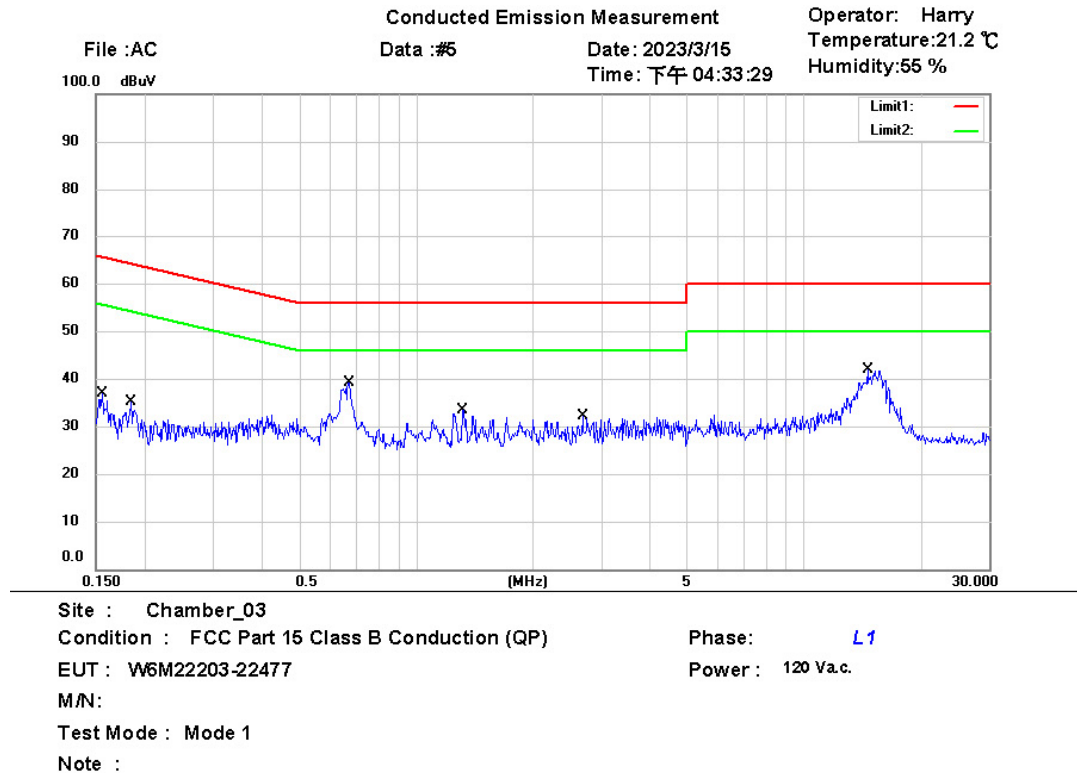


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1553	22.45	QP	9.63	32.08	65.71	-33.63	
	0.1553	20.04	AVG	9.63	29.67	55.71	-26.04	
	0.1838	20.25	QP	9.63	29.88	64.31	-34.43	
	0.1838	17.19	AVG	9.63	26.82	54.31	-27.49	
	0.6687	24.24	QP	9.68	33.92	56.00	-22.08	
*	0.6687	19.58	AVG	9.68	29.26	46.00	-16.74	
	1.3168	11.06	QP	9.68	20.74	56.00	-35.26	
	1.3168	0.42	AVG	9.68	10.10	46.00	-35.90	
	2.6690	11.73	QP	9.72	21.45	56.00	-34.55	
	2.6690	4.75	AVG	9.72	14.47	46.00	-31.53	
	14.5750	23.03	QP	10.03	33.06	60.00	-26.94	
	14.5750	9.92	AVG	10.03	19.95	50.00	-30.05	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

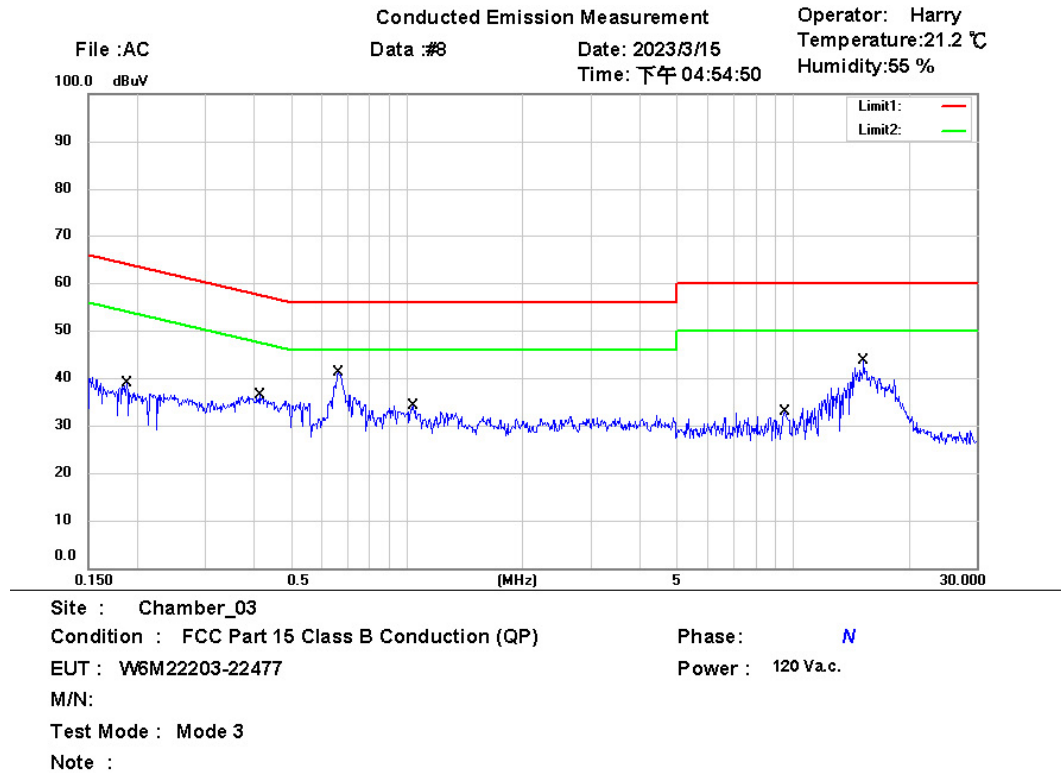


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1880	20.31	QP	9.59	29.90	64.12	-34.22	
	0.1880	13.13	AVG	9.59	22.72	54.12	-31.40	
	0.4144	20.03	QP	9.64	29.67	57.56	-27.89	
	0.4144	8.22	AVG	9.64	17.86	47.56	-29.70	
	0.6620	27.46	QP	9.65	37.11	56.00	-18.89	
*	0.6620	21.94	AVG	9.65	31.59	46.00	-14.41	
	1.0422	17.91	QP	9.66	27.57	56.00	-28.43	
	1.0422	10.29	AVG	9.66	19.95	46.00	-26.05	
	9.4625	12.37	QP	9.78	22.15	60.00	-37.85	
	9.4625	2.36	AVG	9.78	12.14	50.00	-37.86	
	15.3000	24.56	QP	9.93	34.49	60.00	-25.51	
	15.3000	10.14	AVG	9.93	20.07	50.00	-29.93	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22302-22477-C-1

FCC ID: HLEMS9X6B

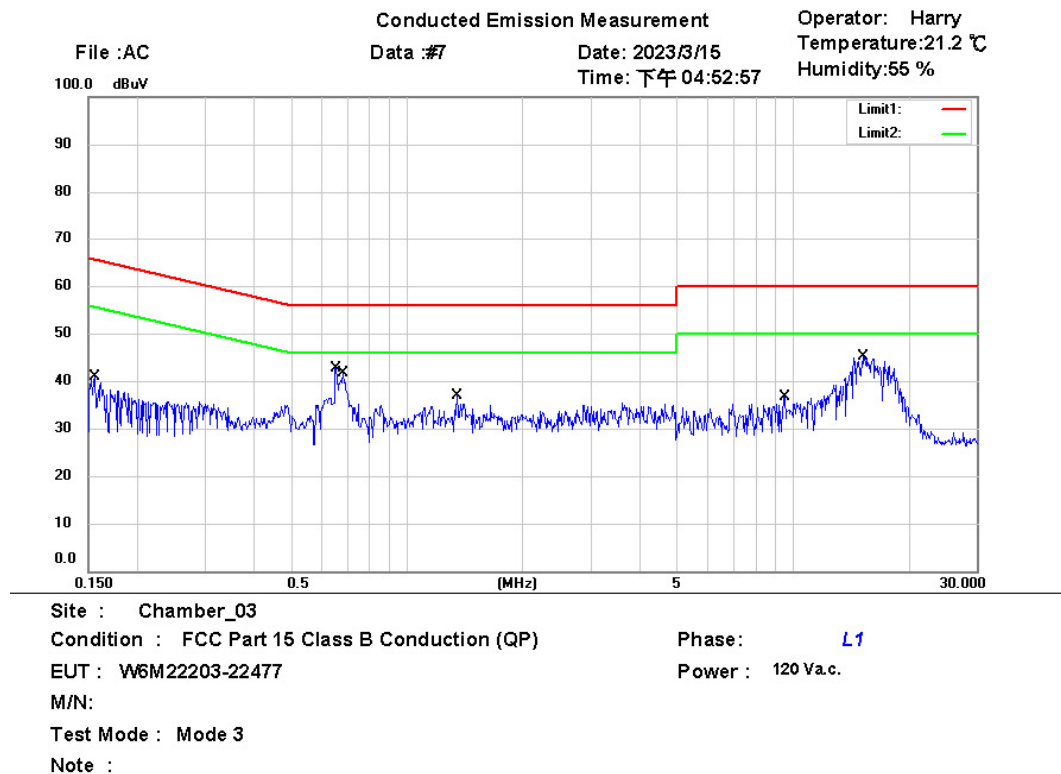


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1553	22.55	QP	9.63	32.18	65.71	-33.53	
	0.1553	17.54	AVG	9.63	27.17	55.71	-28.54	
	0.6530	24.31	QP	9.68	33.99	56.00	-22.01	
	0.6530	18.45	AVG	9.68	28.13	46.00	-17.87	
	0.6821	26.60	QP	9.68	36.28	56.00	-19.72	
*	0.6821	20.01	AVG	9.68	29.69	46.00	-16.31	
	1.3483	18.09	QP	9.68	27.77	56.00	-28.23	
	1.3483	9.54	AVG	9.68	19.22	46.00	-26.78	
	9.4625	16.20	QP	9.88	26.08	60.00	-33.92	
	9.4625	7.47	AVG	9.88	17.35	50.00	-32.65	
	15.3000	26.68	QP	10.05	36.73	60.00	-23.27	
	15.3000	15.47	AVG	10.05	25.52	50.00	-24.48	

- Note:
1. The formula of measured value as: Test Result = Reading + Correction Factor
 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.
 5. Up Line: QP Limit Line, Down Line: Ave Limit Line.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



Registration number: W6M22302-22477-C-1
FCC ID: HLEMS9X6B

Appendix

Measurement diagrams

Spurious Emissions radiated

Radiated Emission Measurement

Operator: Eason

File :1_BT_TX 2402MHz

Data :#1


Date: 2023/3/21

Temperature:24.1 °C

80.0 dBuV/m

Time: 上午 01:12:42

Humidity:61.6 %

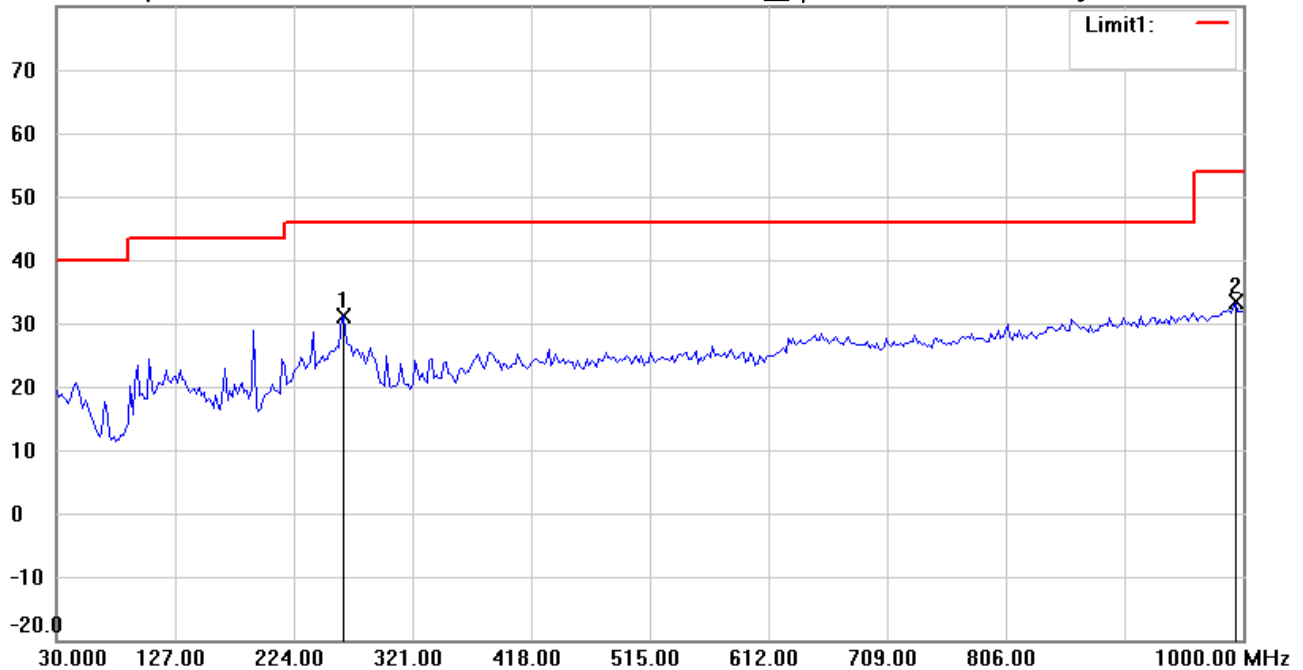

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22302-22477

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	265.2104	38.08	peak	-6.85	31.23	46.00	151	230	-14.77	
	994.1683	27.44	peak	6.06	33.50	54.00	150	192	-20.50	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :1_BT_TX 2402MHz

Data :#2

Date: 2023/3/21

Temperature:24.1 °C

80.0 dBuV/m

Time: 上午 01:13:42

Humidity:61.6 %



Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	45.5511	41.73	peak	-9.33	32.40	40.00	150	122	-7.60	
	1000.0000	26.20	peak	6.26	32.46	54.00	153	180	-21.54	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:16:53

Humidity:66.0 %

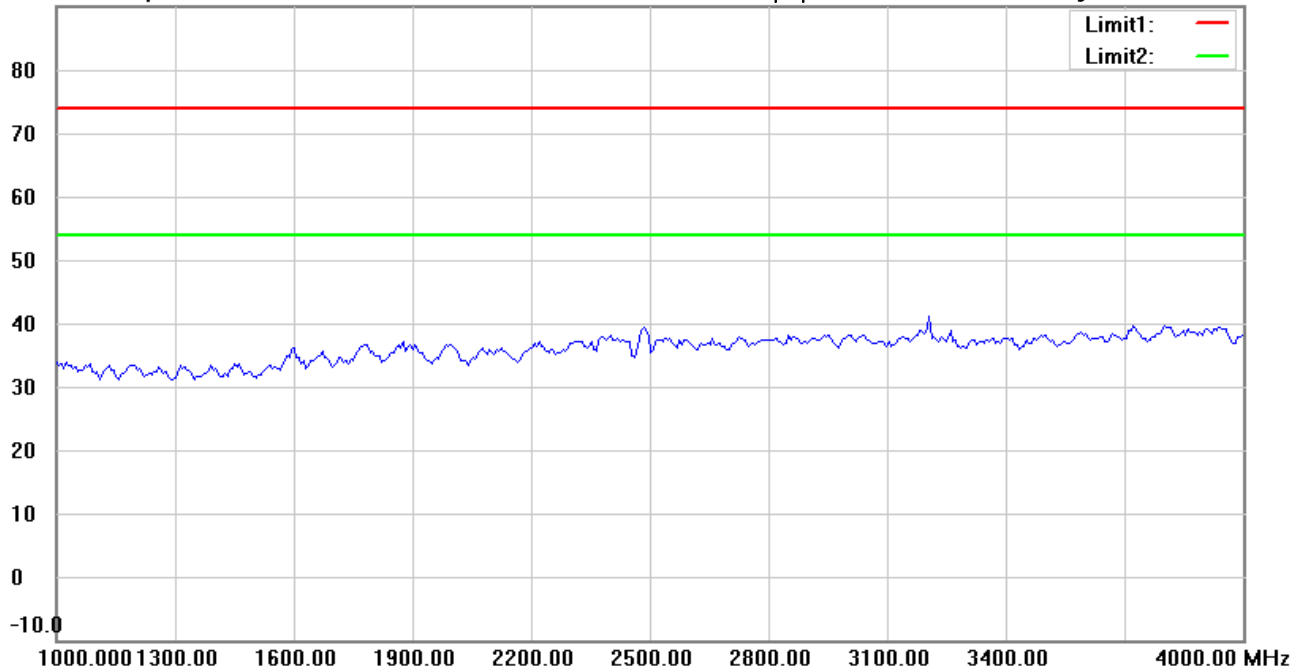

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:20:59

Humidity:66.0 %

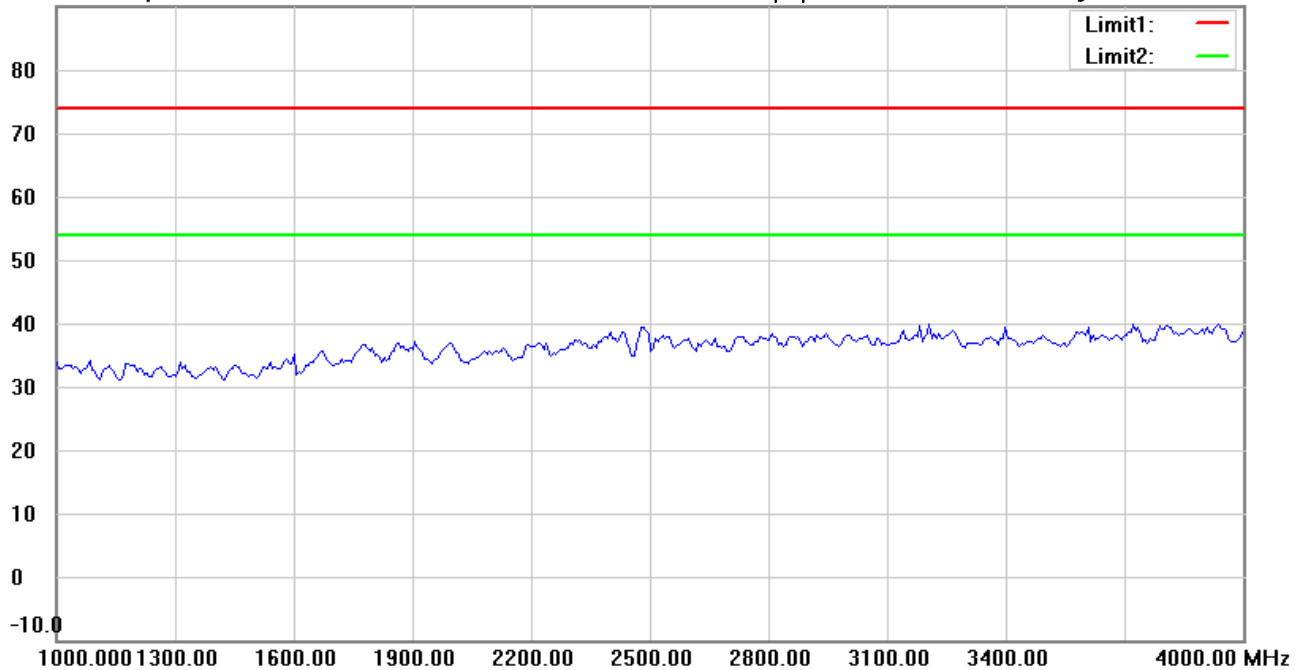

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:17:55

Humidity: 66.0 %

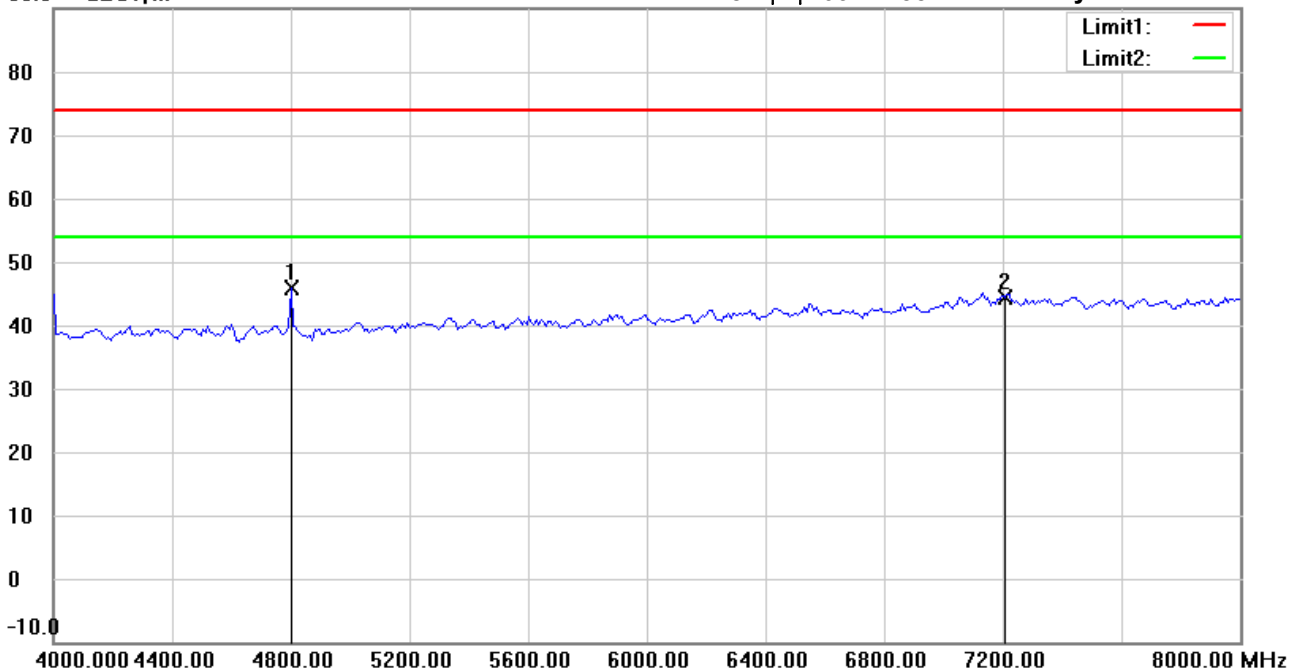

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4801.603	47.50	peak	-1.74	45.76	74.00	150	114	-28.24	
	7206.000	40.36	peak	4.01	44.37	74.00	150	201	-29.63	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:22:01

Humidity: 66.0 %

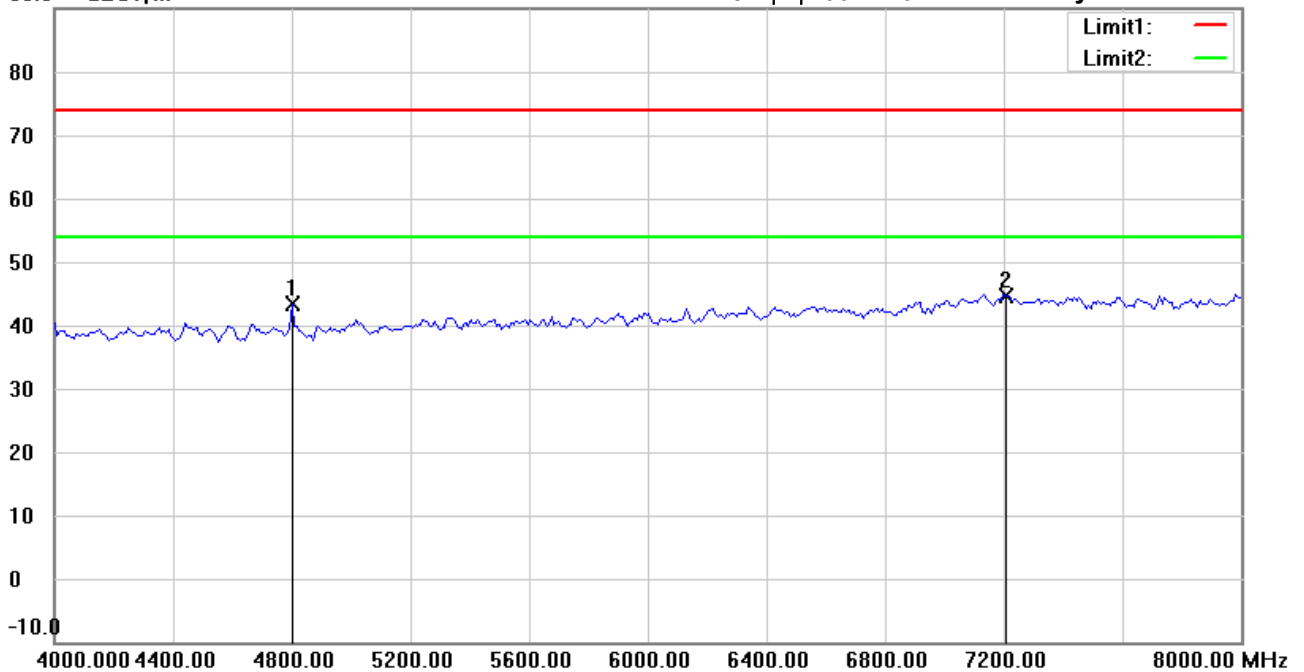

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	45.18	peak	-1.74	43.44	74.00	150	17	-30.56	
*	7206.000	40.55	peak	4.01	44.56	74.00	150	339	-29.44	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:19:28

Humidity:66.0 %

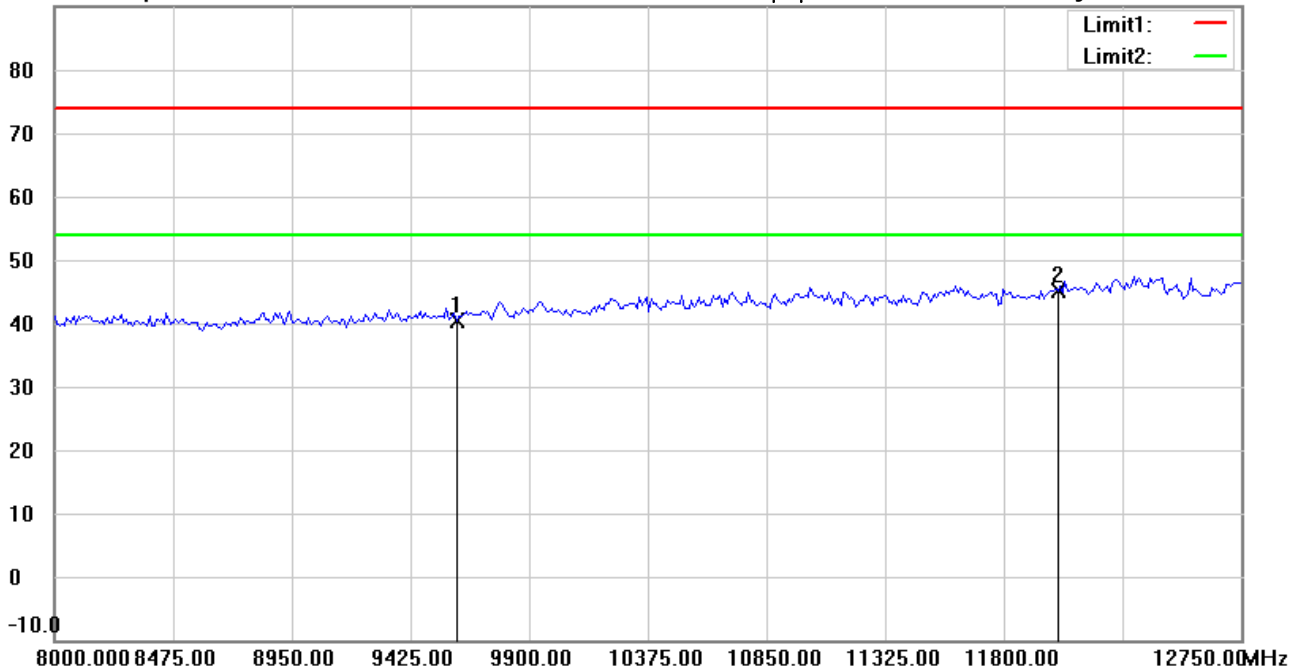

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	33.65	peak	6.80	40.45	74.00	150	107	-33.55	
*	12010.000	33.05	peak	12.09	45.14	74.00	150	116	-28.86	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:23:15

Humidity: 66.0 %

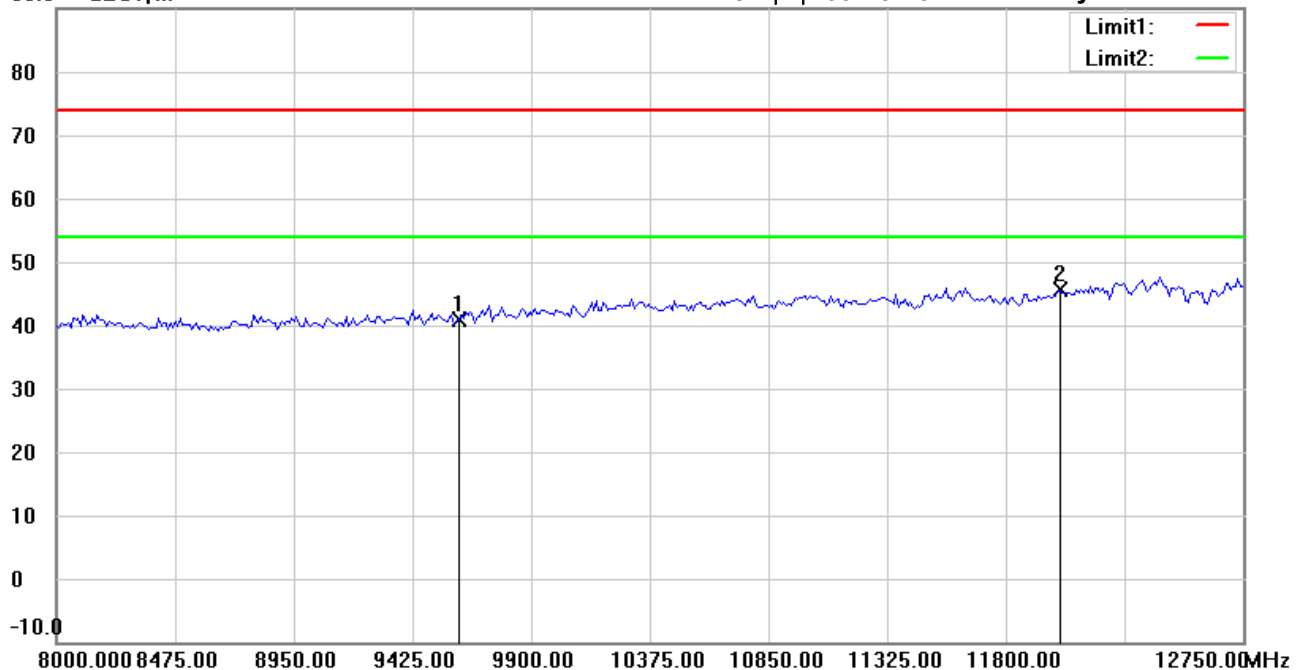

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.16	peak	6.80	40.96	74.00	150	21	-33.04	
*	12010.000	33.58	peak	12.09	45.67	74.00	150	100	-28.33	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:19:44

Humidity:66.0 %

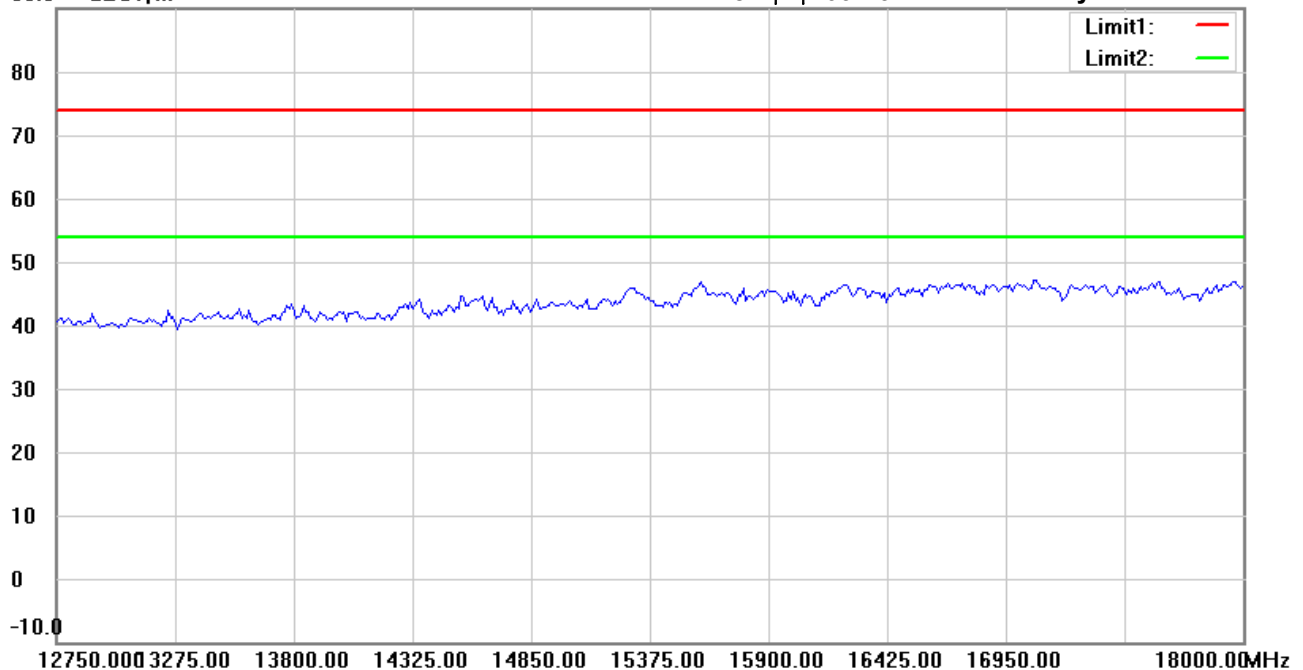

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:23:30

Humidity:66.0 %

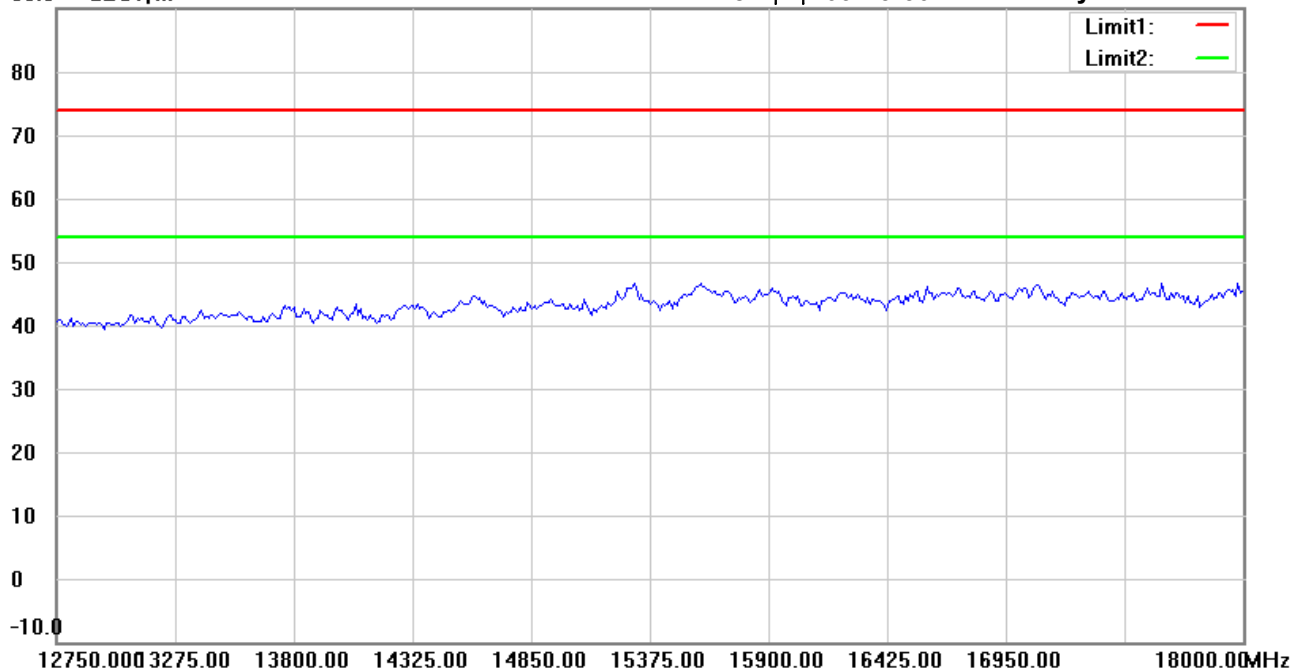

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:19:55

Humidity:66.0 %

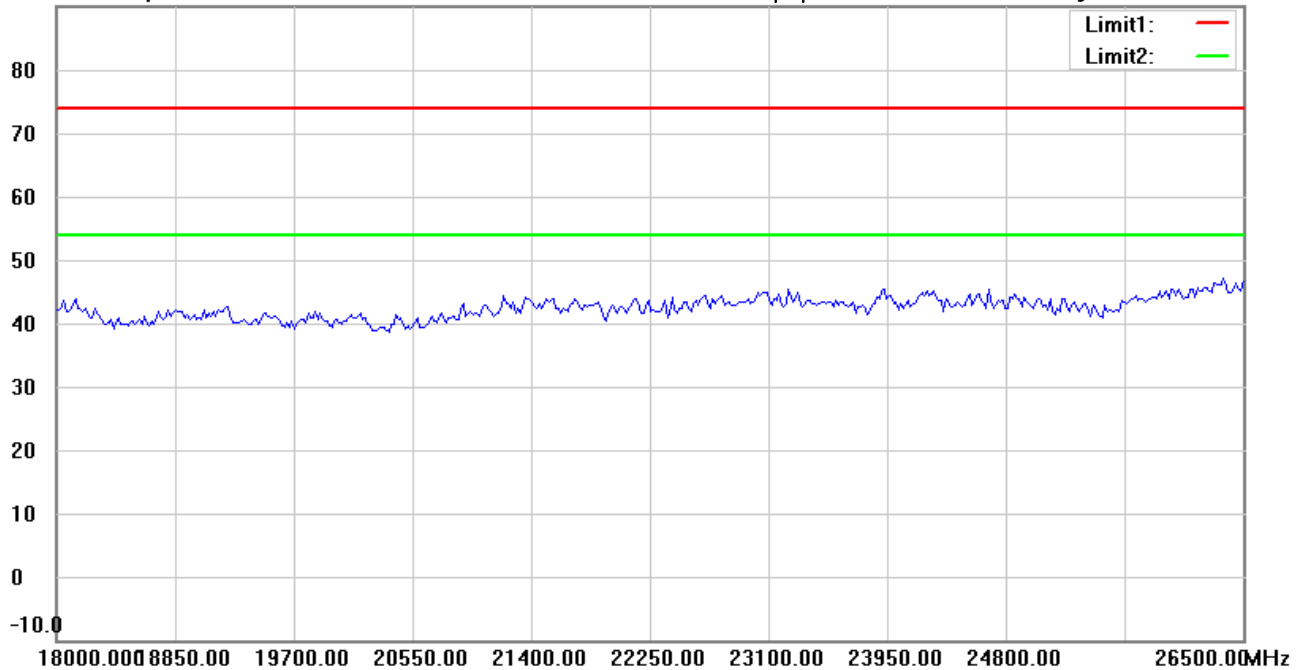

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:23:41

Humidity:66.0 %

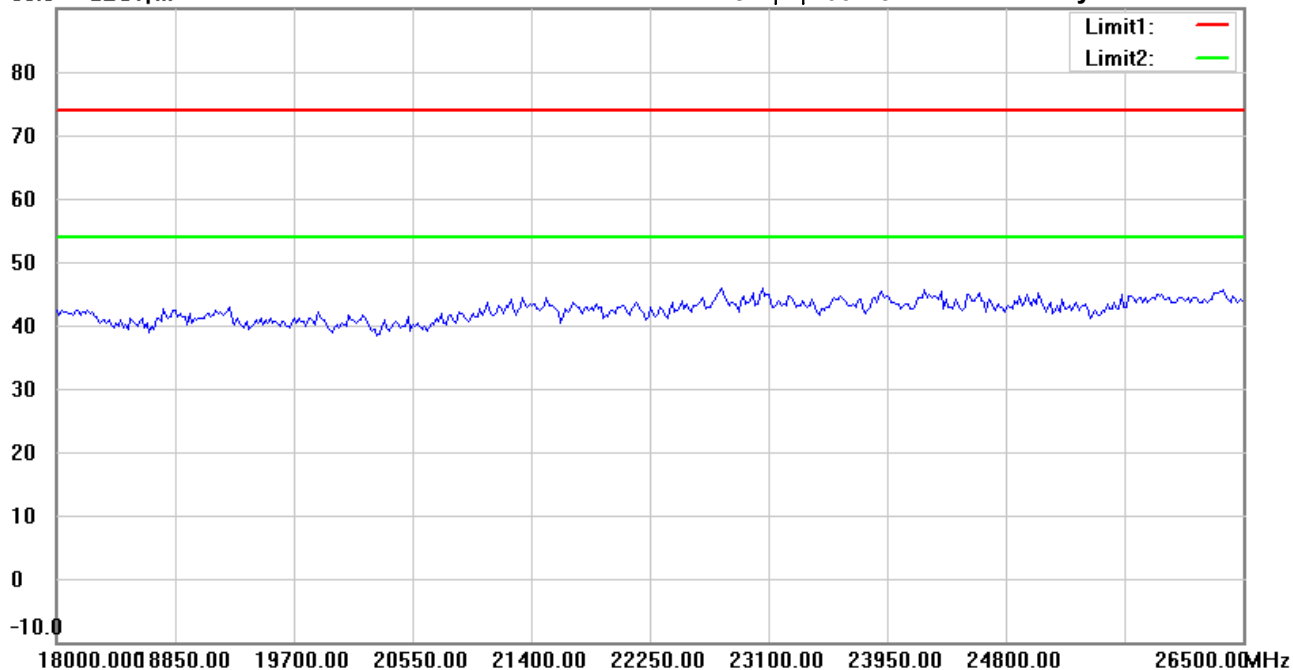

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:27:07

Humidity:66.0 %

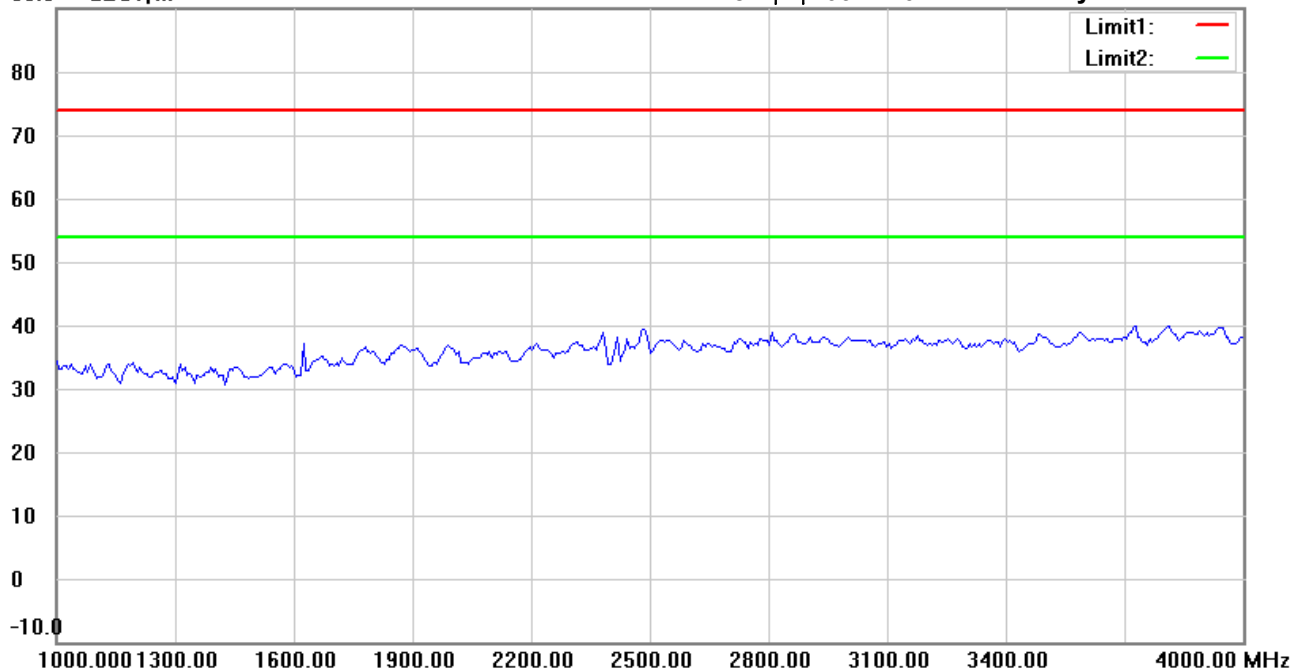

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:31:23

Humidity:66.0 %

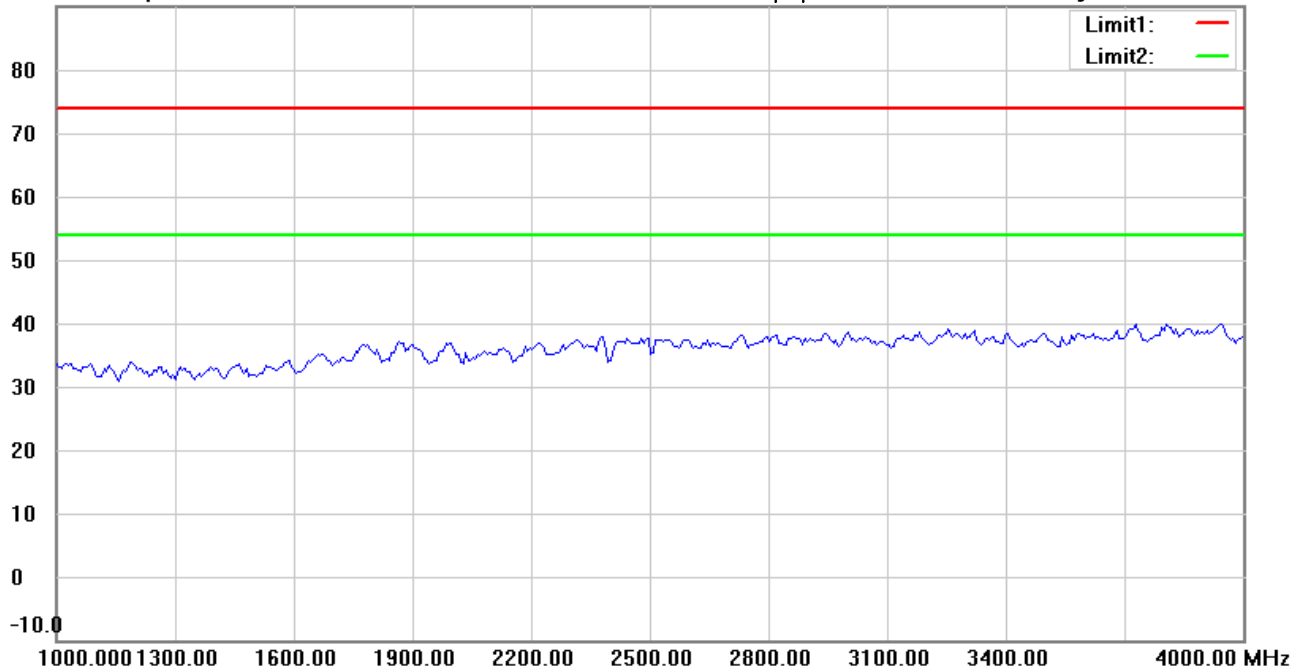

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:28:08

Humidity: 66.0 %

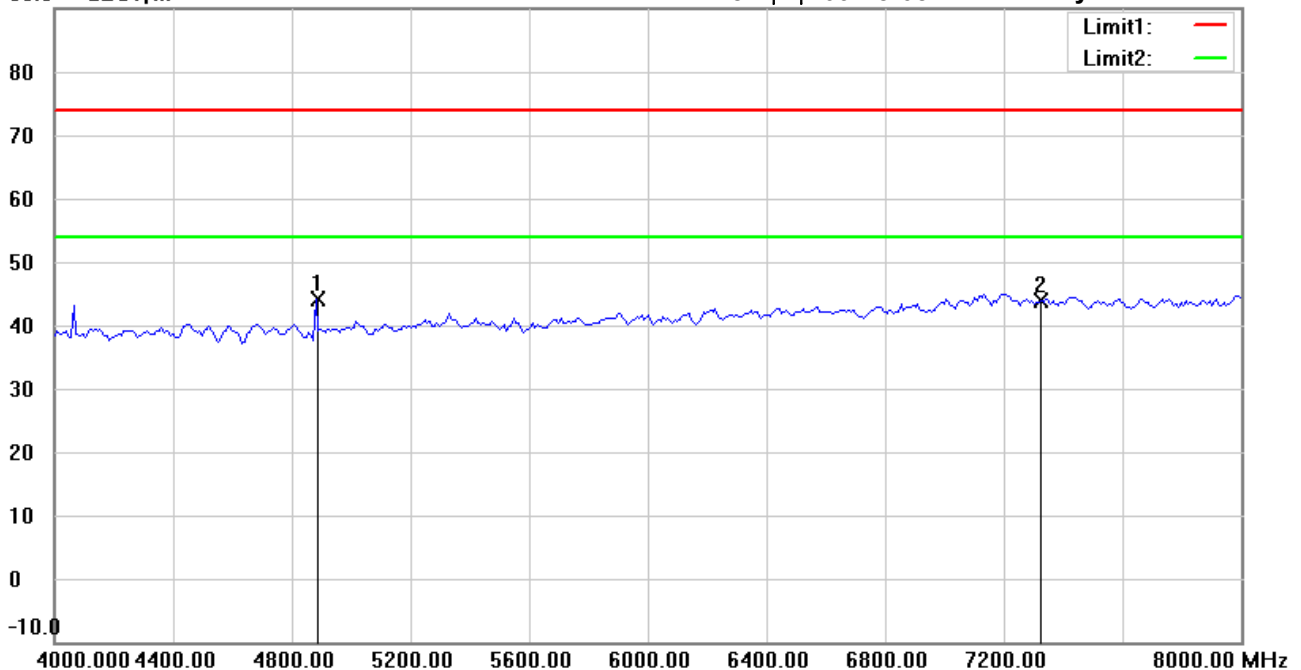

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4881.764	45.47	peak	-1.40	44.07	74.00	150	107	-29.93	
	7323.000	39.96	peak	3.86	43.82	74.00	150	42	-30.18	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:32:23

Humidity: 66.0 %

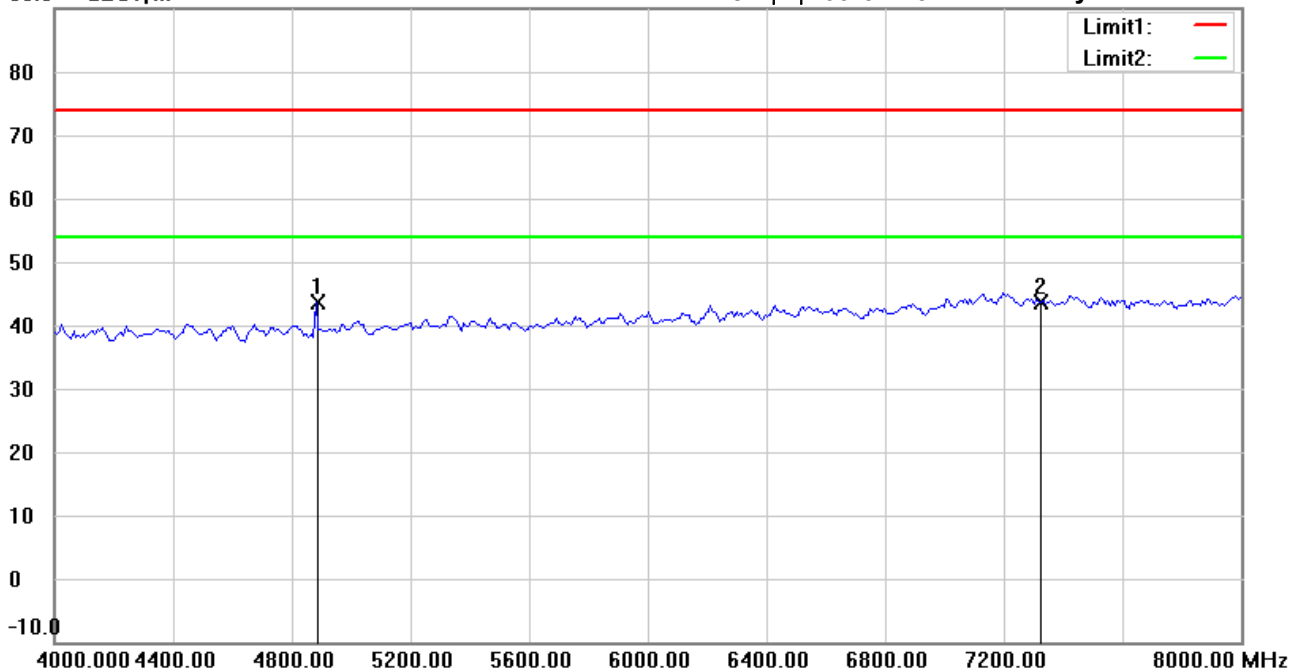

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	44.93	peak	-1.40	43.53	74.00	150	226	-30.47	
*	7323.000	39.87	peak	3.86	43.73	74.00	150	93	-30.27	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:29:56

Humidity:66.0 %

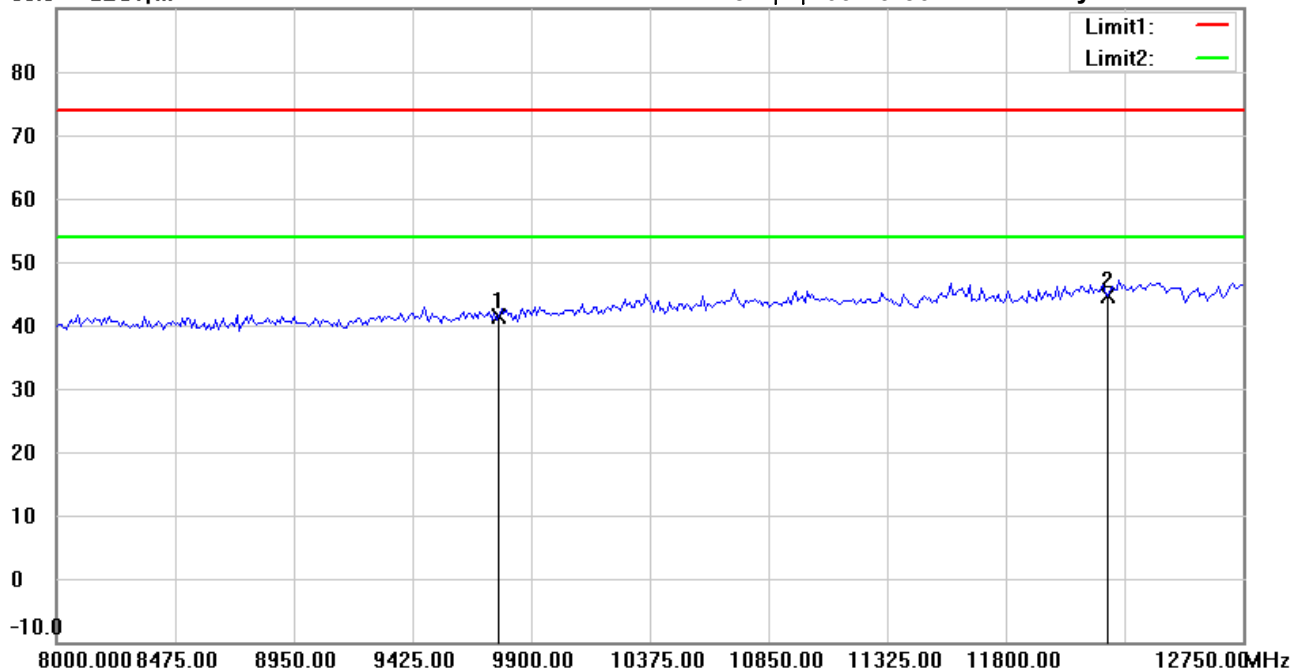

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	34.46	peak	7.03	41.49	74.00	150	107	-32.51	
*	12205.000	31.11	peak	13.58	44.69	74.00	150	299	-29.31	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:33:31

Humidity: 66.0 %

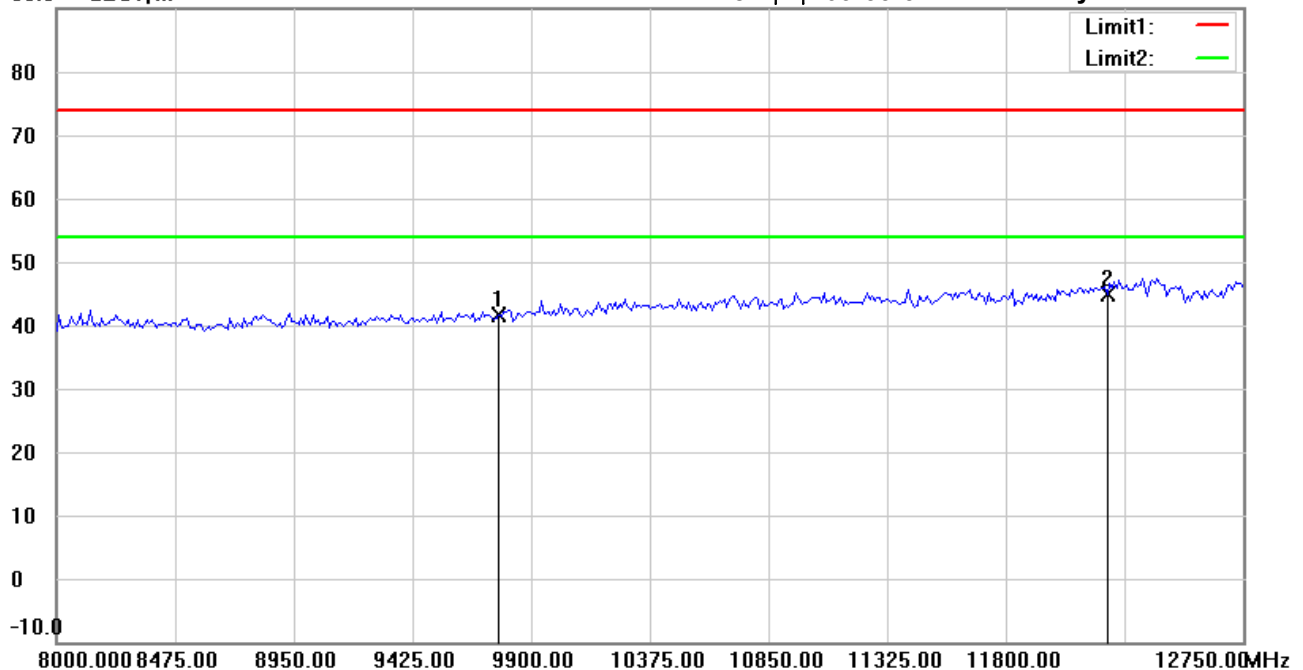

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	34.68	peak	7.03	41.71	74.00	150	301	-32.29	
*	12205.000	31.24	peak	13.58	44.82	74.00	150	229	-29.18	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:30:10

Humidity: 66.0 %

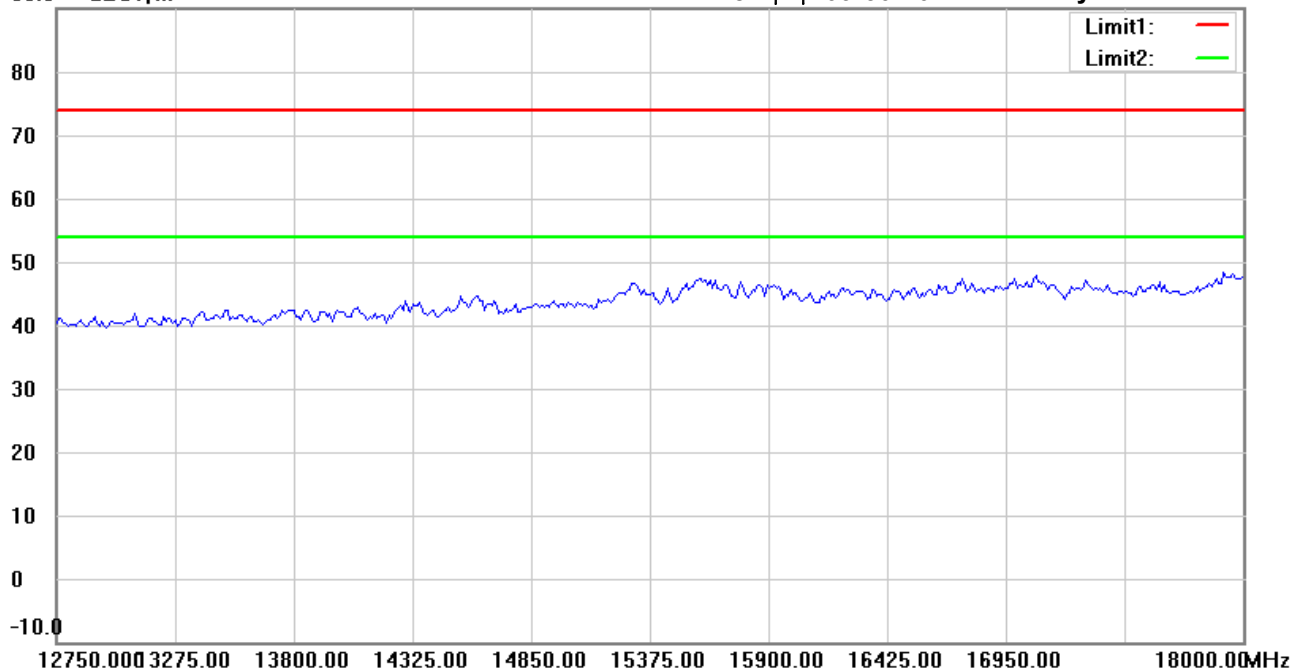

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:33:45

Humidity:66.0 %

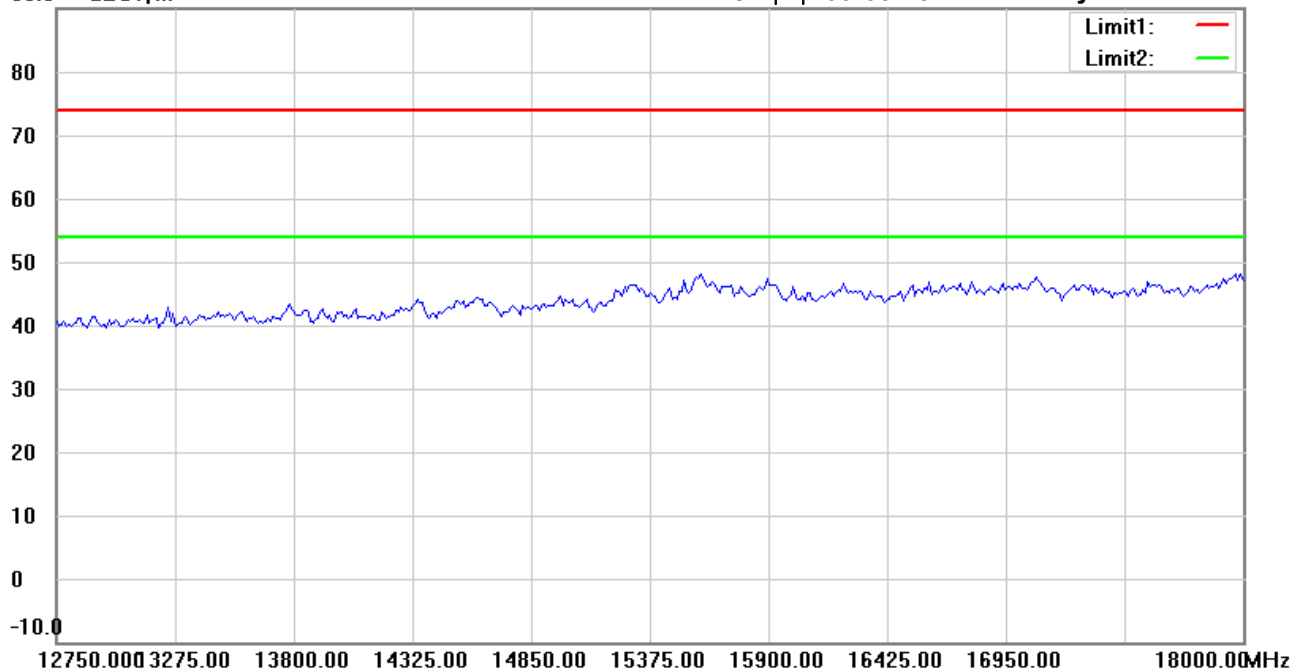

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:30:20

Humidity:66.0 %

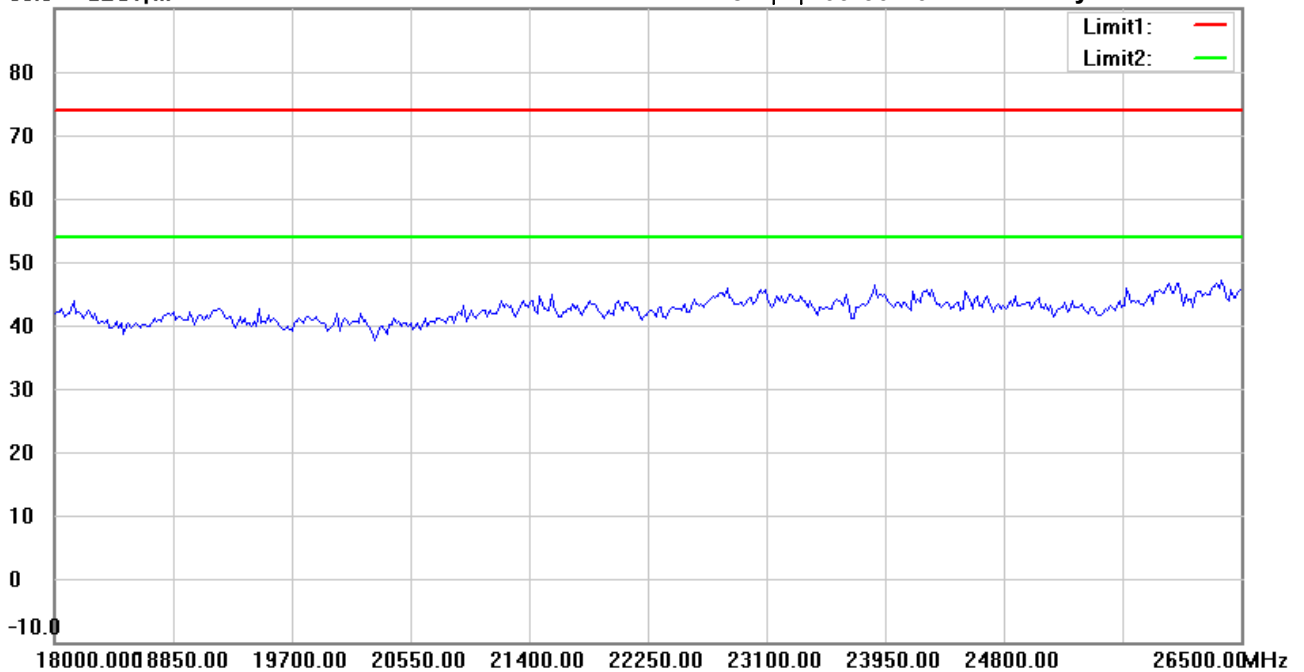

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:33:55

Humidity:66.0 %

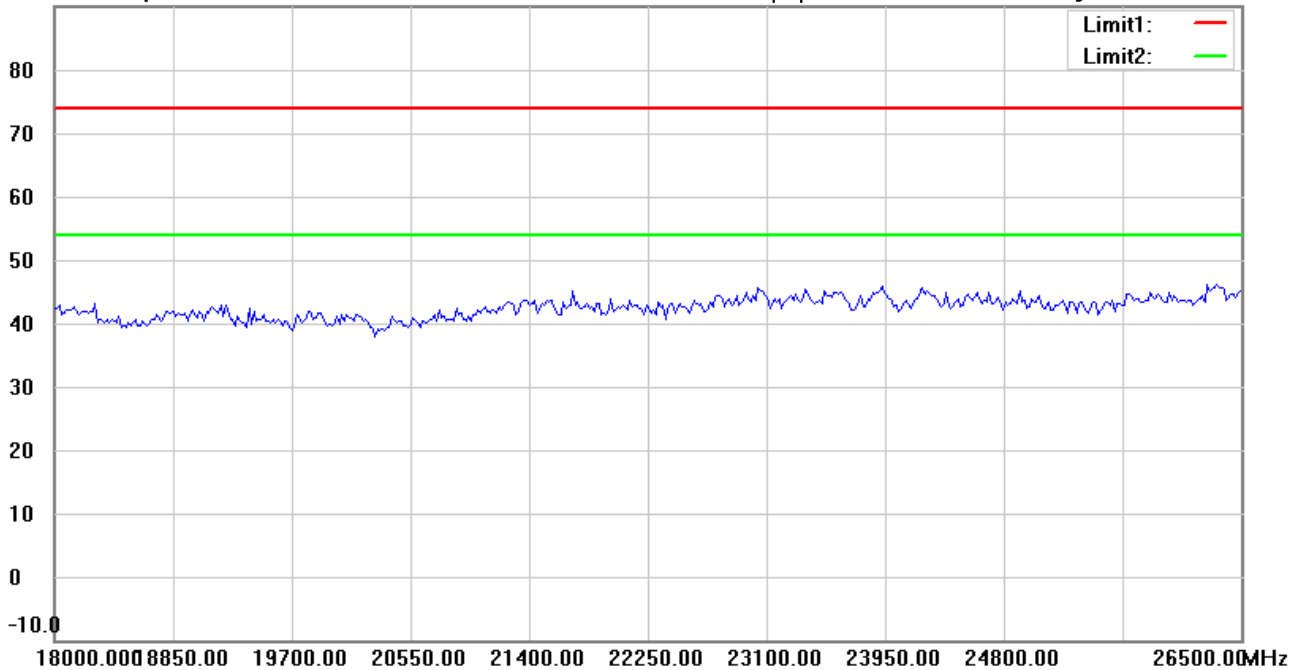

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:37:27

Humidity:66.0 %

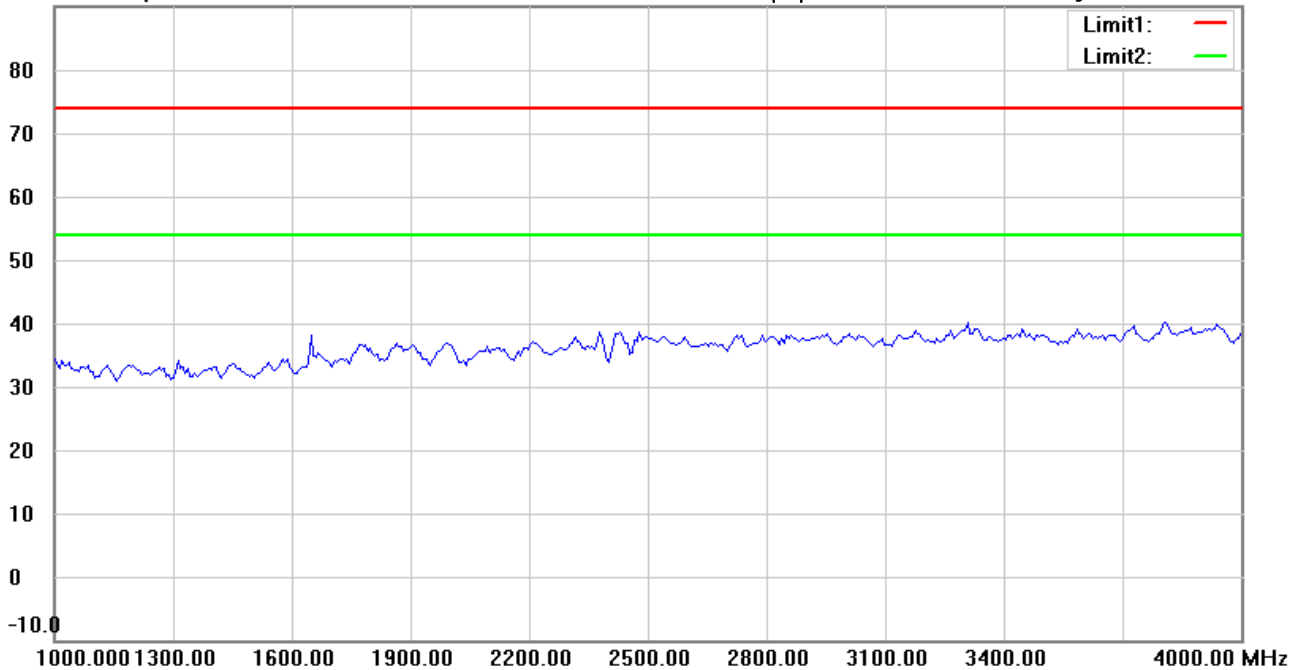

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:41:31

Humidity:66.0 %

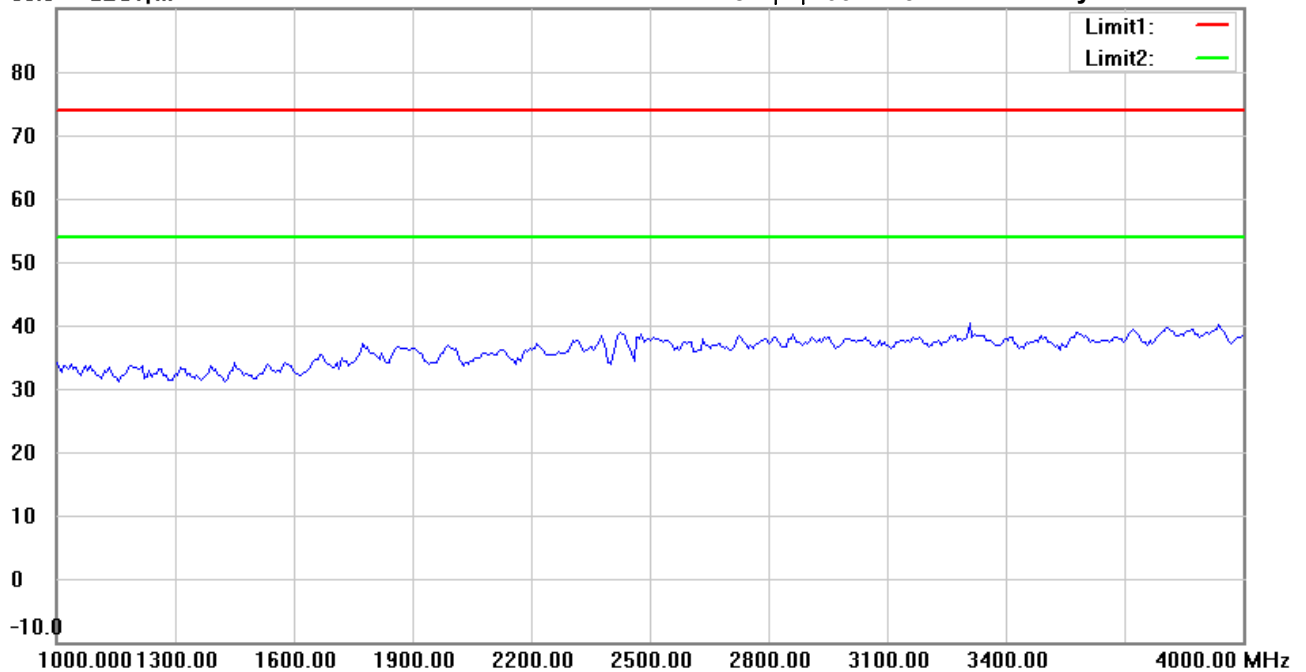

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:38:27

Humidity: 66.0 %

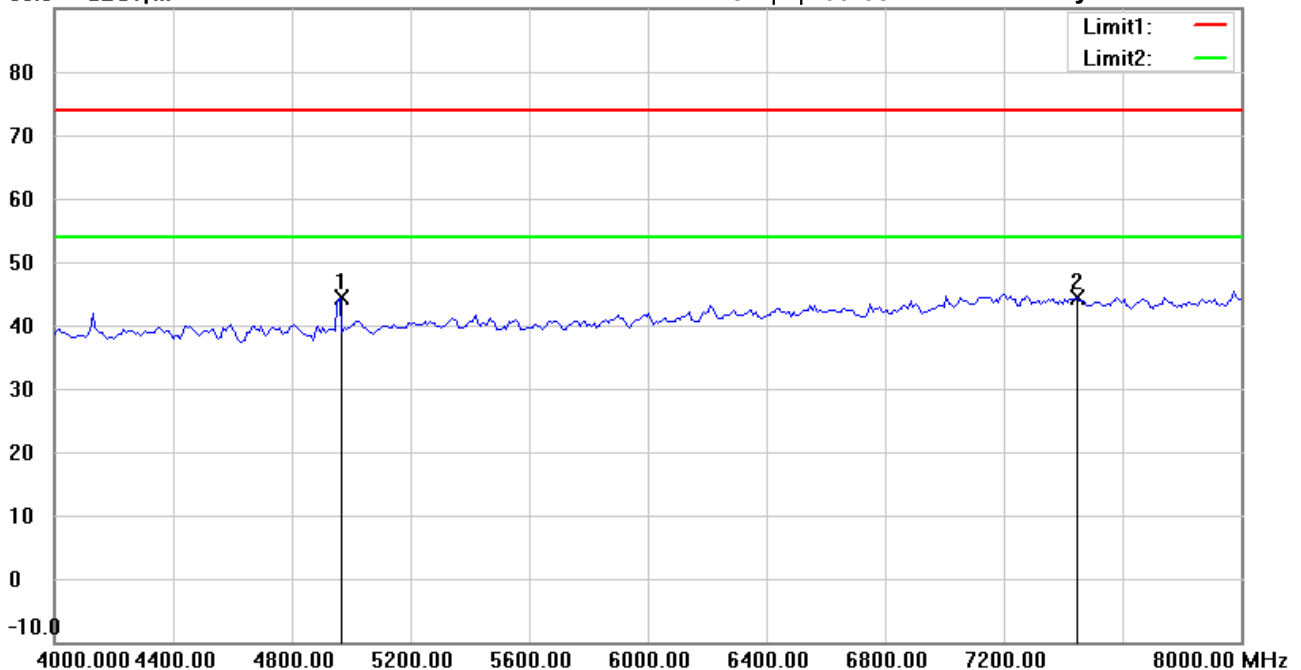

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4961.924	45.19	peak	-0.78	44.41	74.00	150	110	-29.59	
*	7440.000	40.62	peak	3.83	44.45	74.00	150	249	-29.55	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:42:32

Humidity: 66.0 %

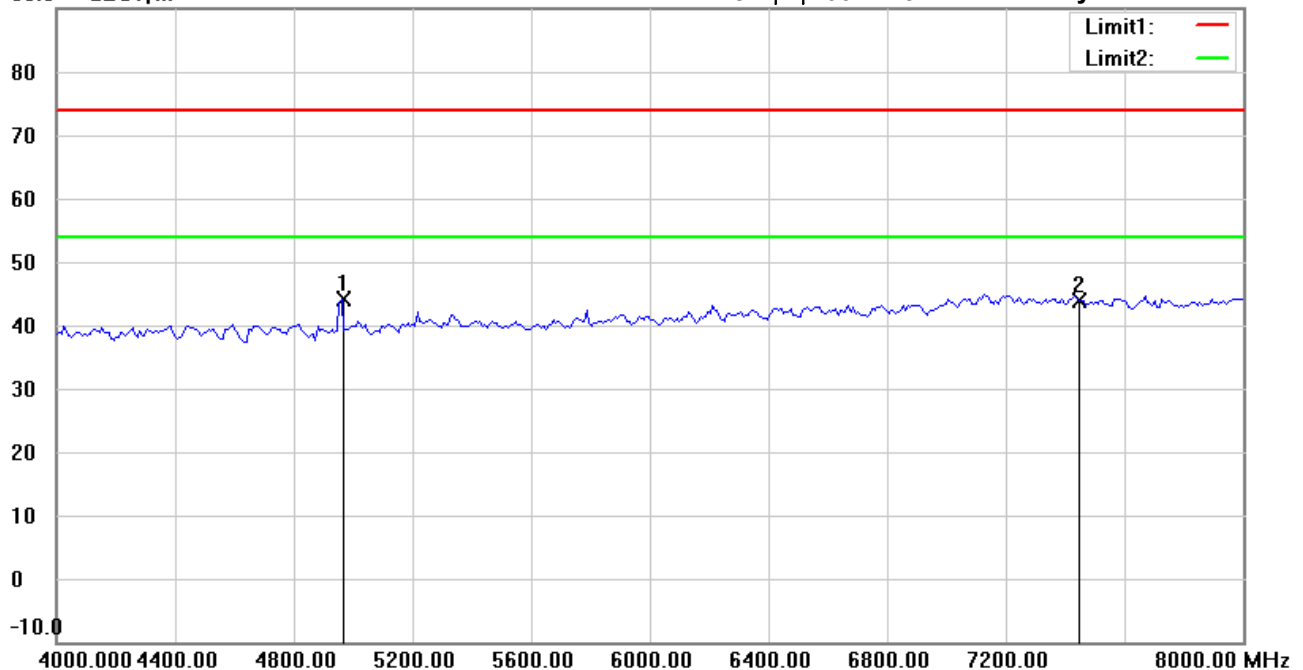

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4961.924	44.80	peak	-0.78	44.02	74.00	150	100	-29.98	
	7440.000	39.98	peak	3.83	43.81	74.00	150	302	-30.19	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:39:55

Humidity:66.0 %

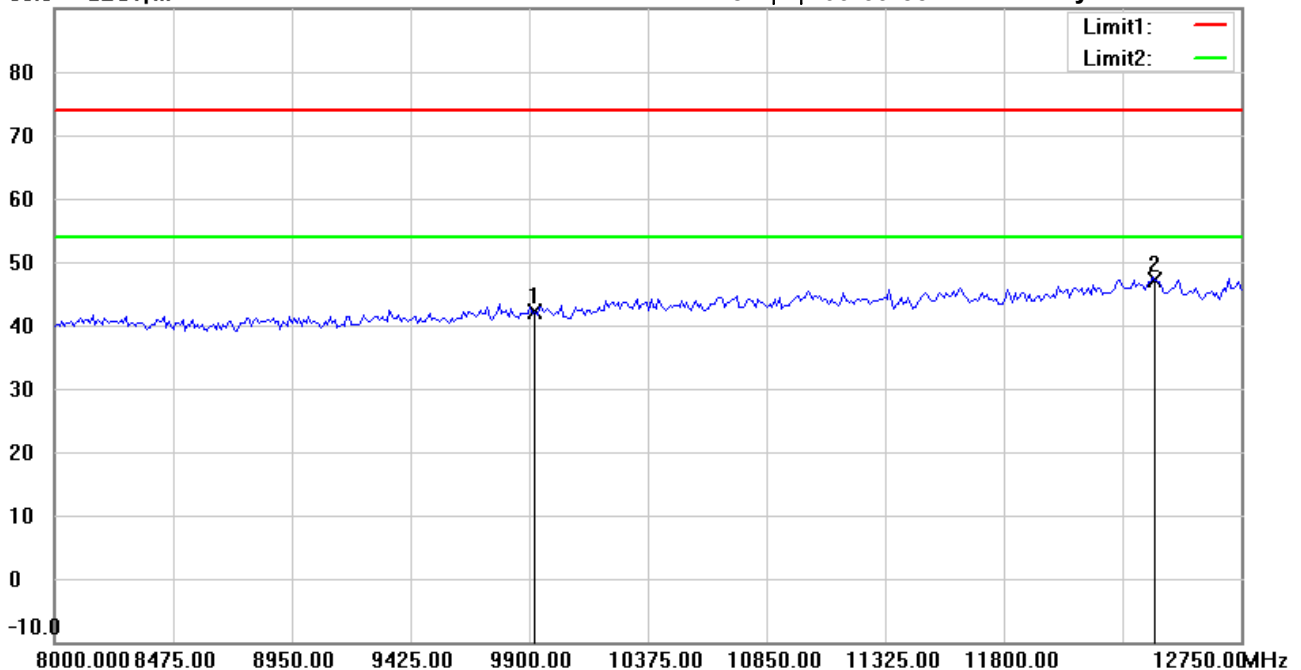

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.54	peak	7.54	42.08	74.00	150	31	-31.92	
*	12400.000	33.35	peak	13.71	47.06	74.00	150	4	-26.94	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:45:20

Humidity: 66.0 %

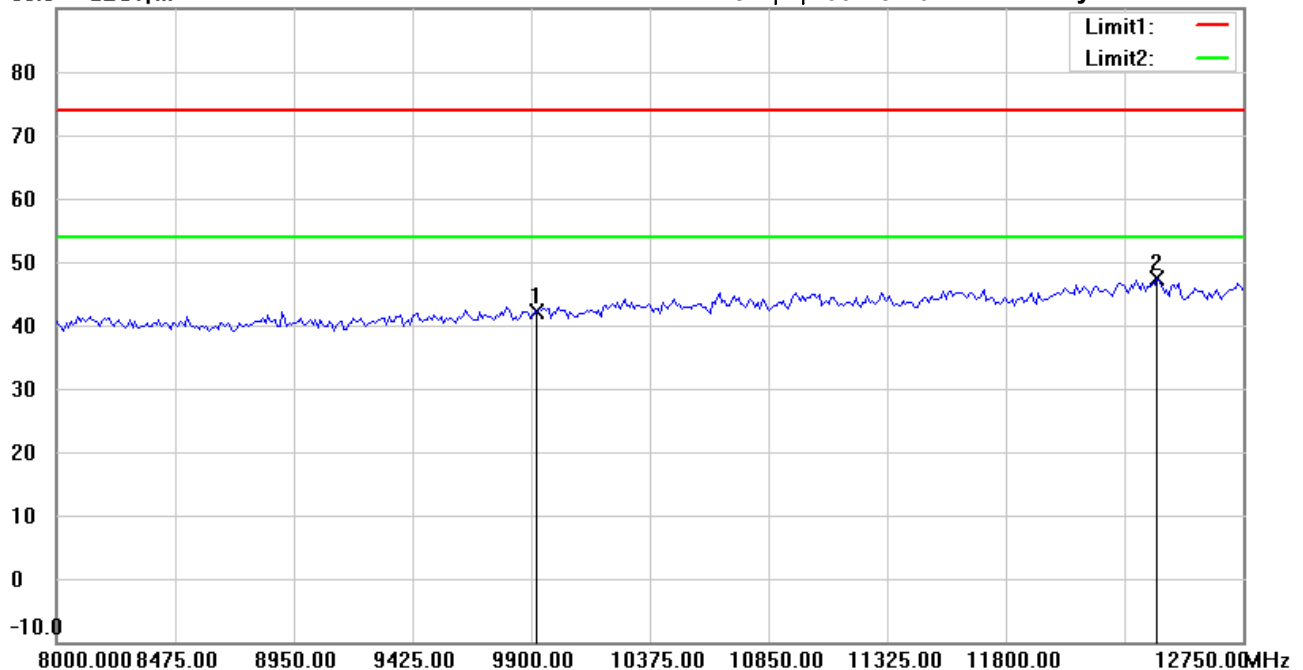

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.53	peak	7.54	42.07	74.00	150	42	-31.93	
*	12400.000	33.57	peak	13.71	47.28	74.00	150	110	-26.72	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:40:09

Humidity:66.0 %

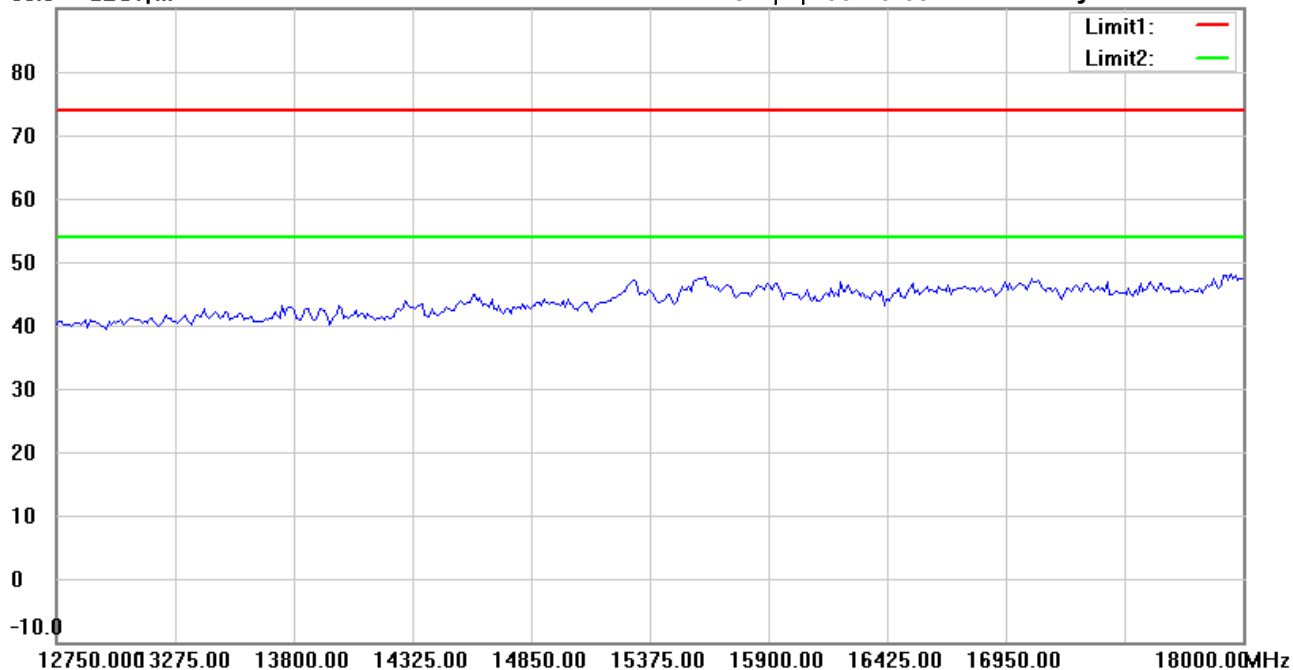

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:45:34

Humidity:66.0 %

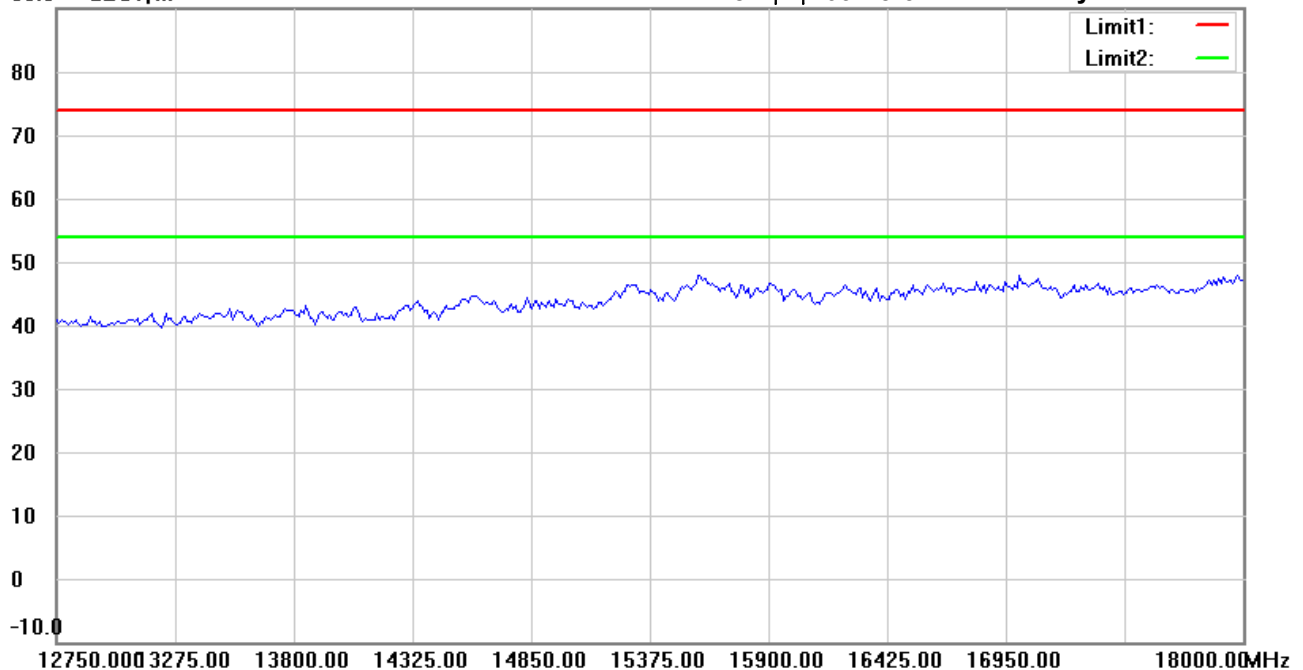

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:40:19

Humidity:66.0 %

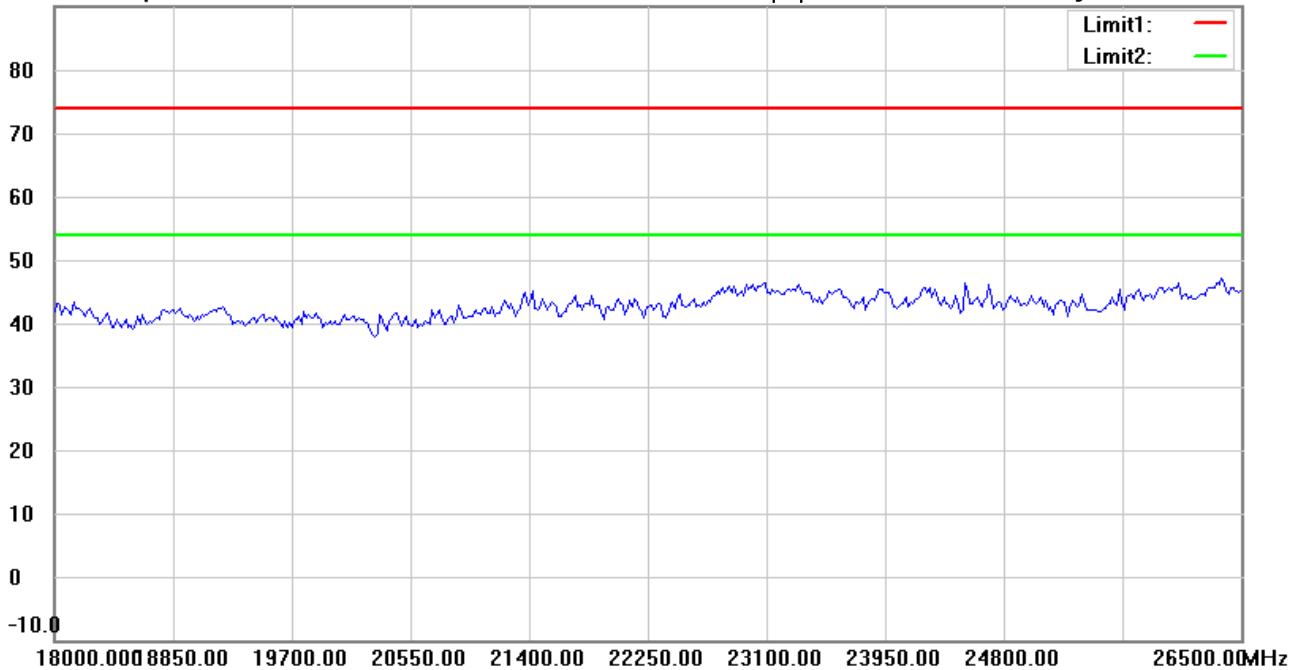

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:45:44

Humidity:66.0 %

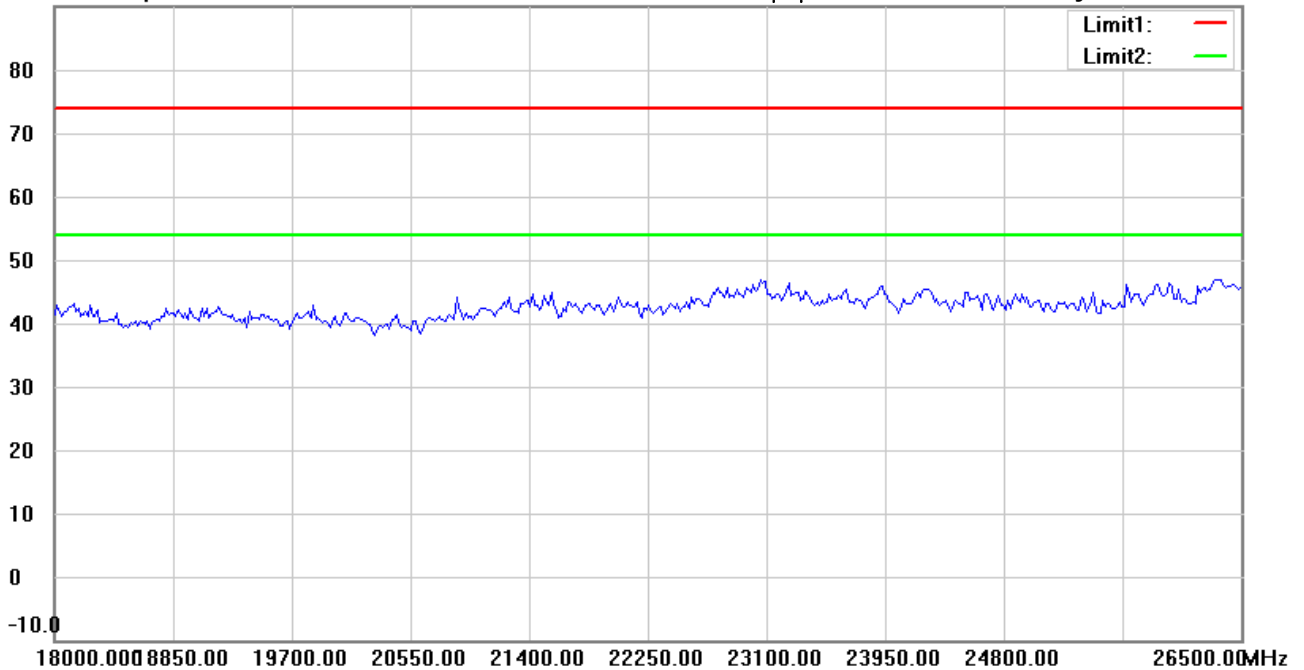

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

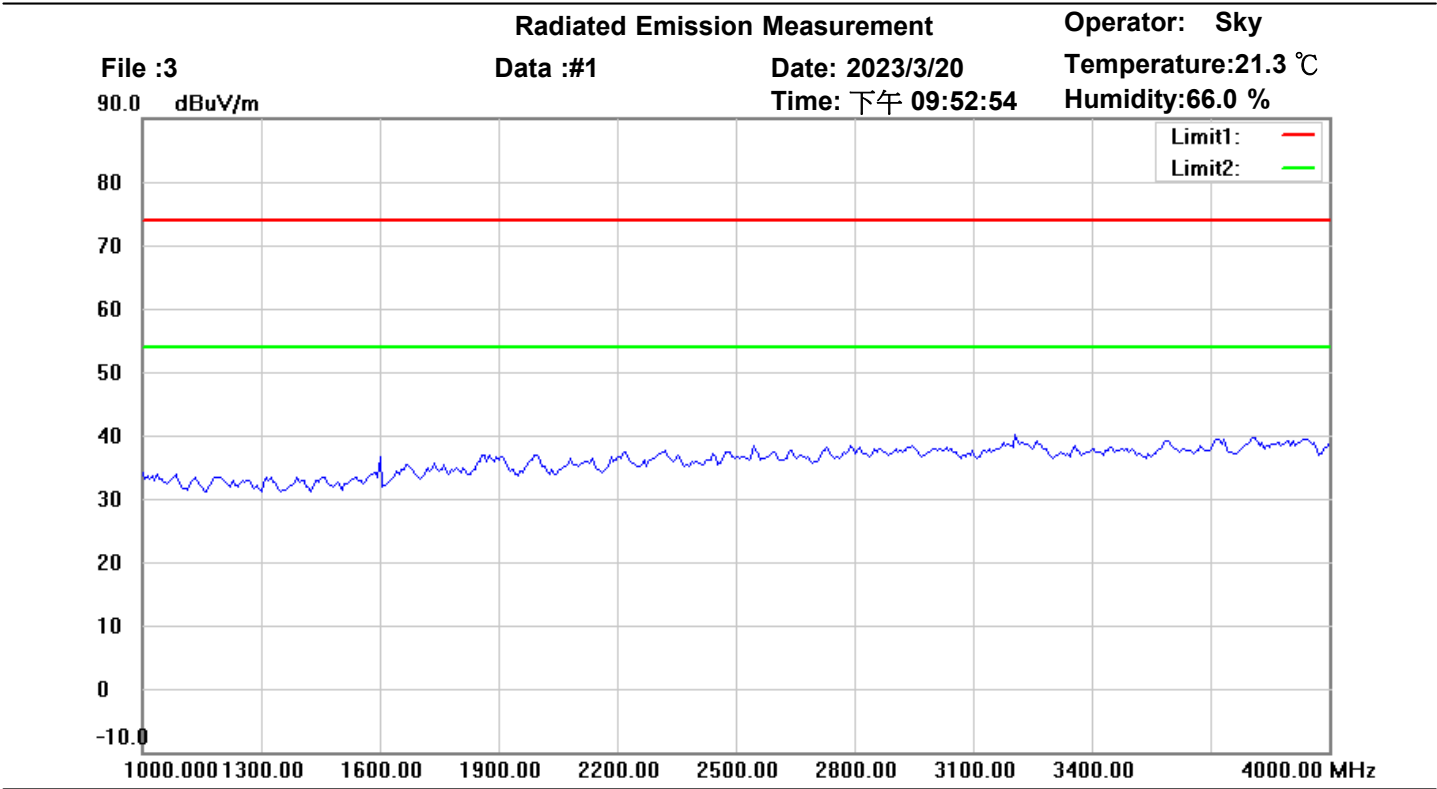

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:57:28

Humidity:66.0 %

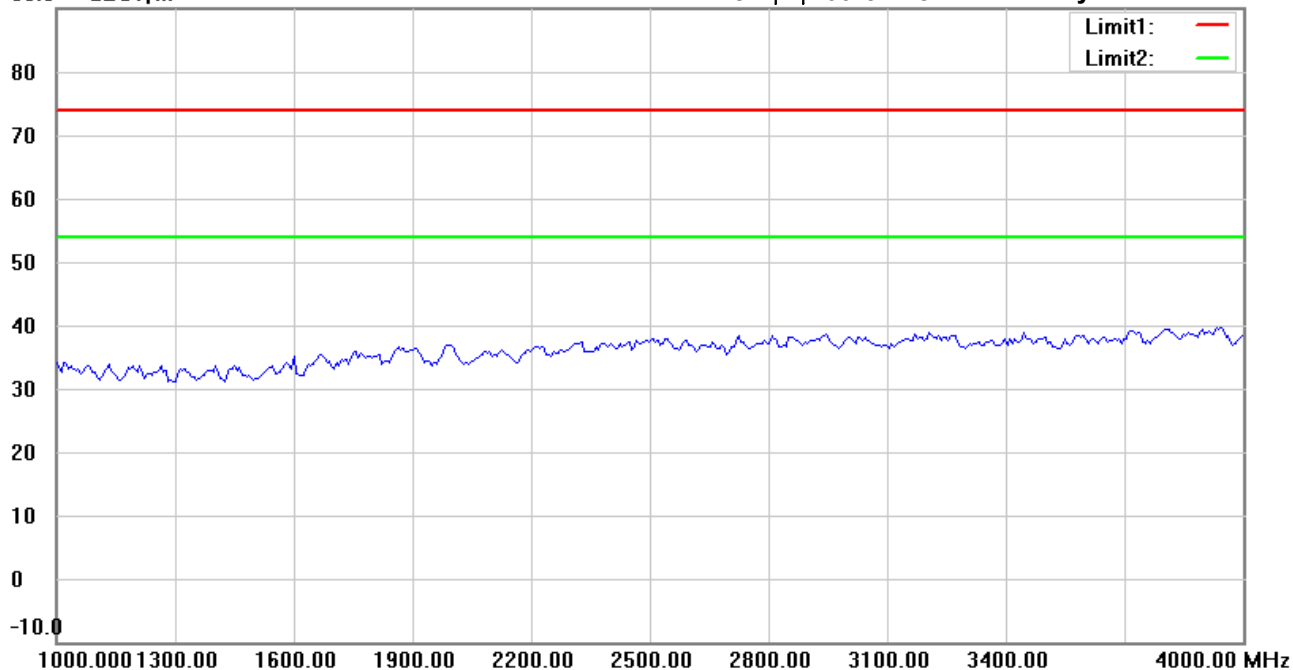

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:53:56

Humidity: 66.0 %

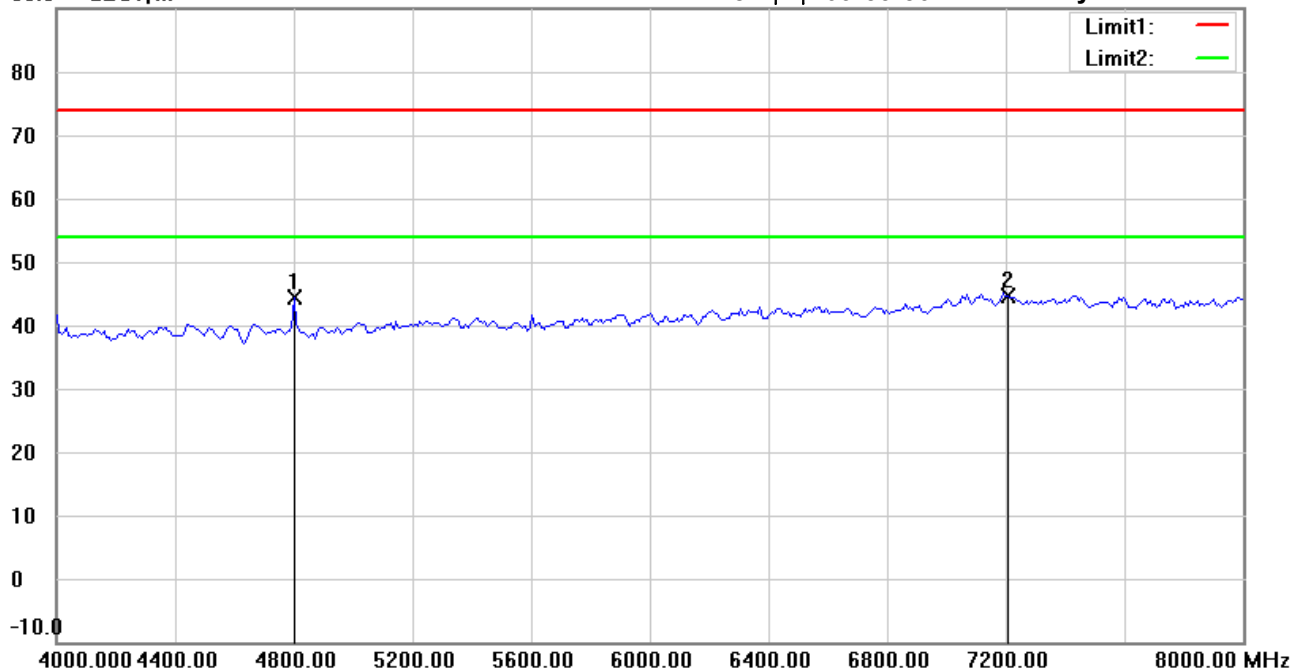

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	46.14	peak	-1.74	44.40	74.00	150	302	-29.60	
*	7206.000	40.69	peak	4.01	44.70	74.00	150	90	-29.30	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:58:30

Humidity: 66.0 %

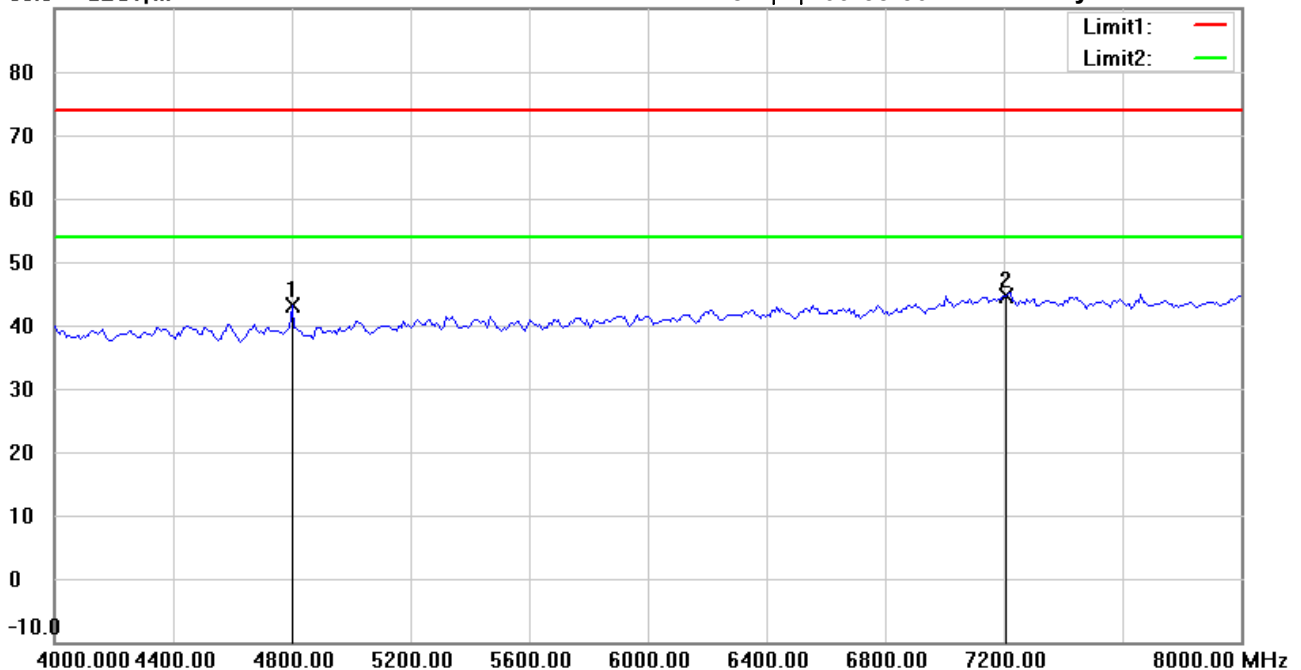

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	44.94	peak	-1.74	43.20	74.00	150	7	-30.80	
*	7206.000	40.63	peak	4.01	44.64	74.00	150	201	-29.36	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 09:55:22

Humidity: 66.0 %

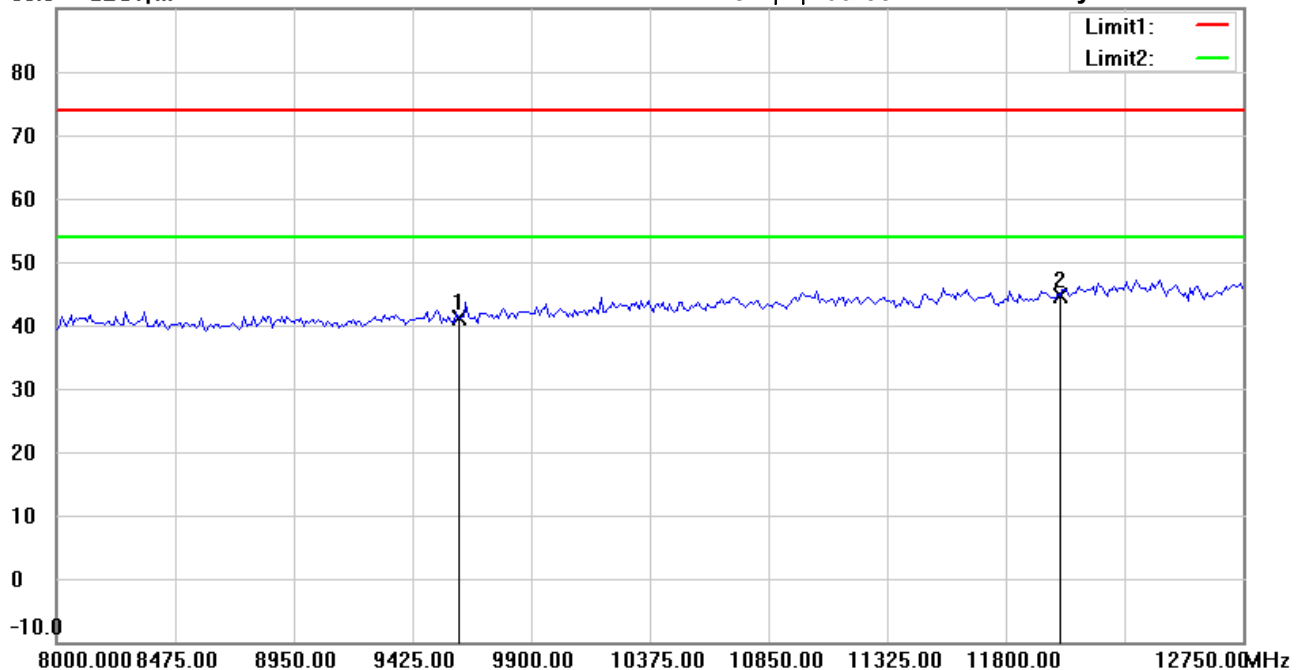

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.33	peak	6.80	41.13	74.00	150	302	-32.87	
*	12010.000	32.56	peak	12.09	44.65	74.00	150	114	-29.35	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:00:13

Humidity: 66.0 %

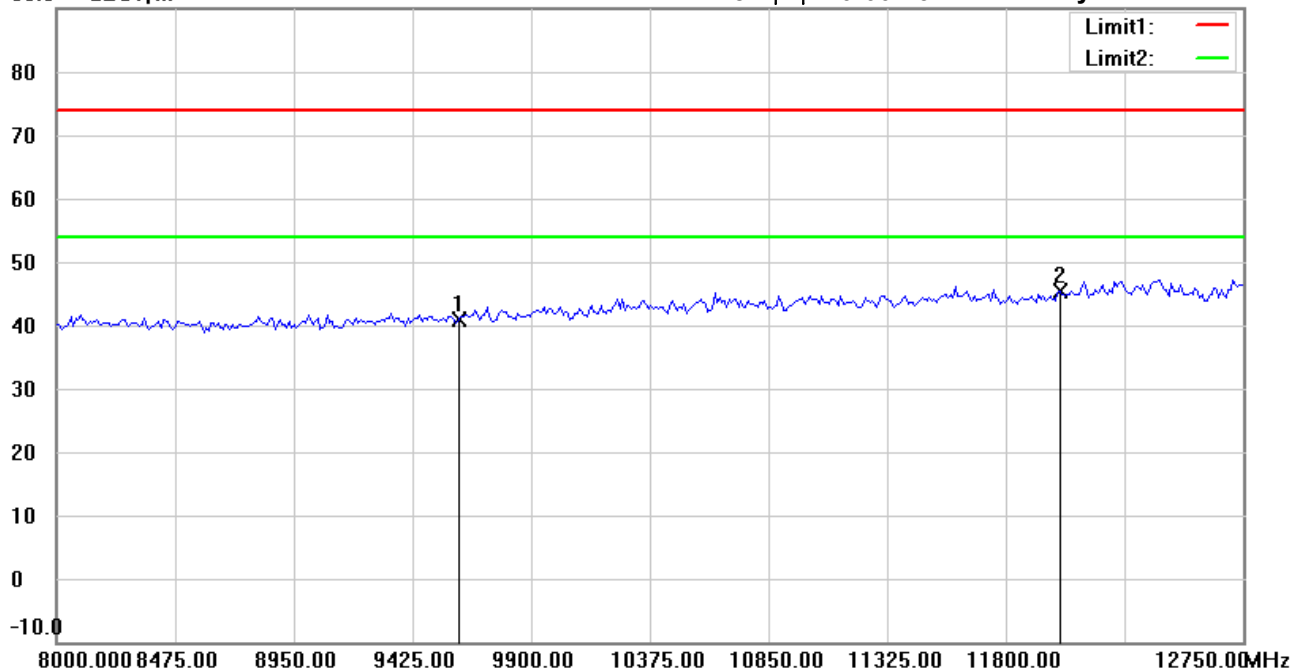

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.11	peak	6.80	40.91	74.00	150	43	-33.09	
*	12010.000	33.31	peak	12.09	45.40	74.00	150	29	-28.60	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:55:38

Humidity:66.0 %

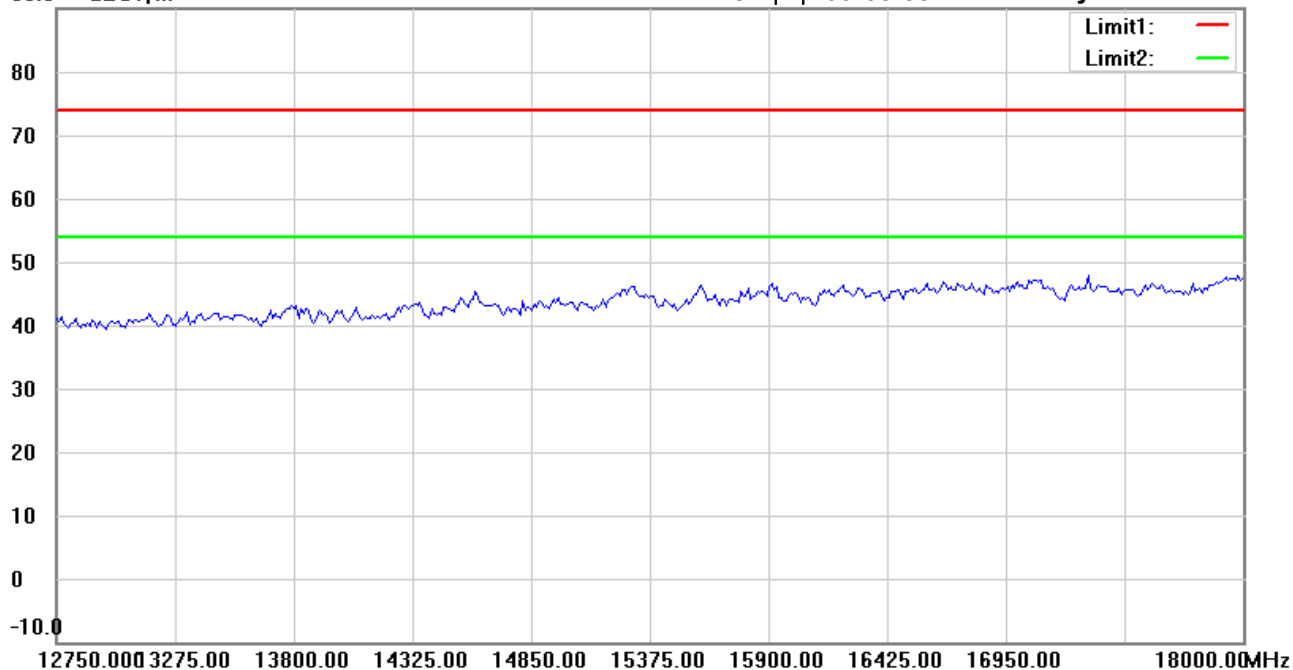

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:00:29

Humidity:66.0 %

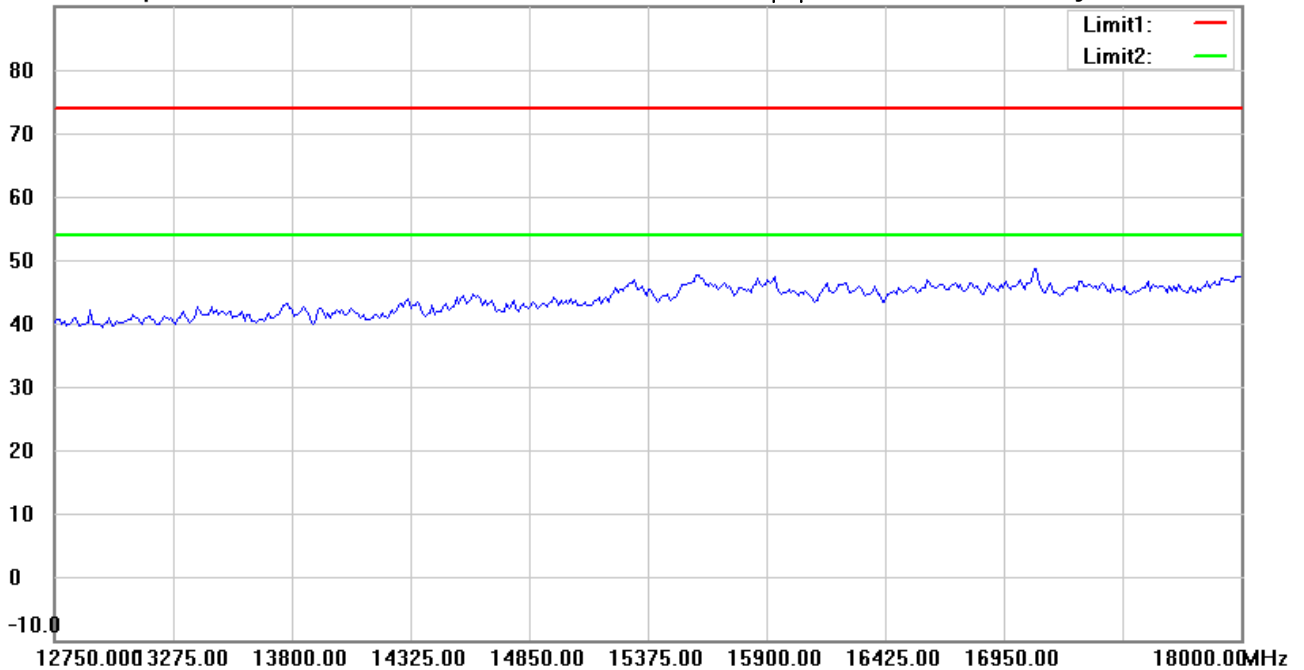

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 09:55:49

Humidity:66.0 %

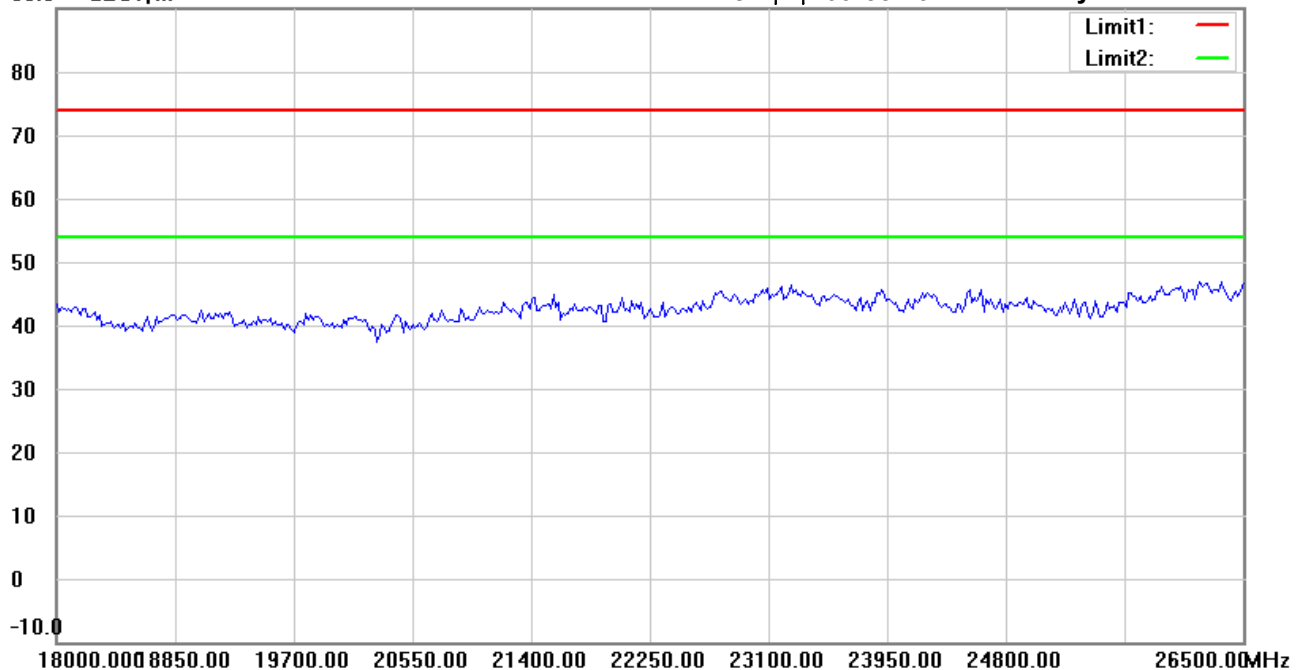

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:00:39

Humidity:66.0 %

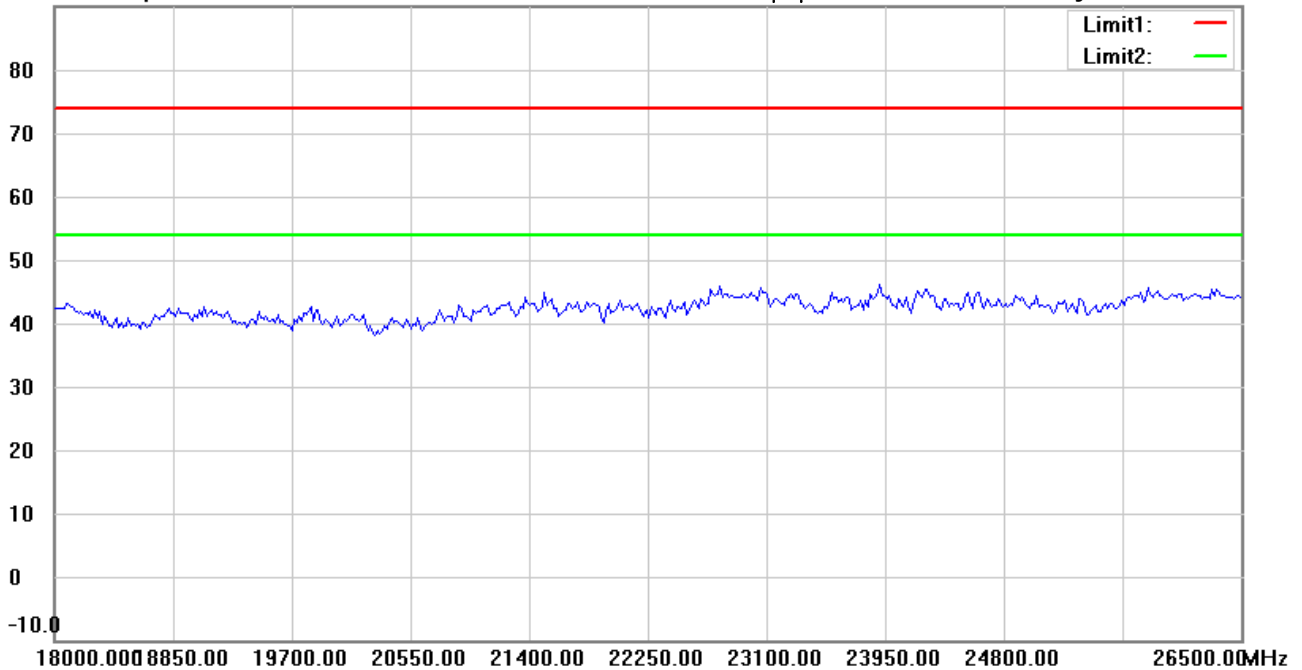

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:04:33

Humidity:66.0 %

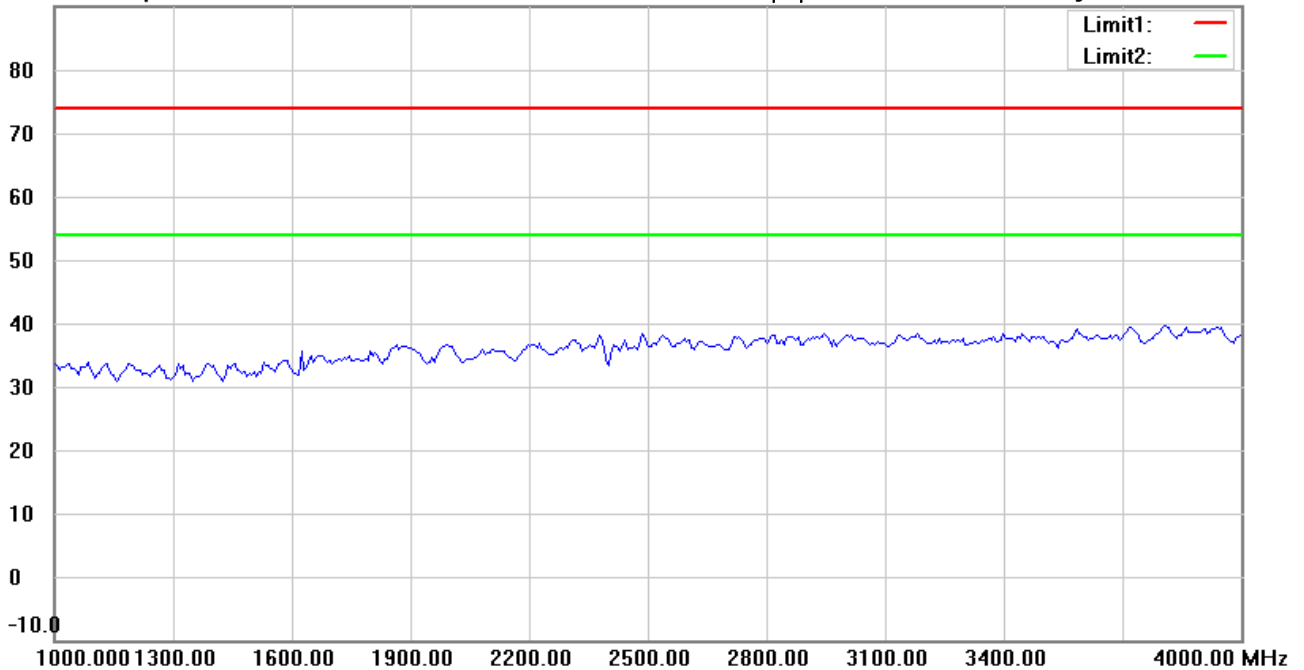

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:08:43

Humidity:66.0 %

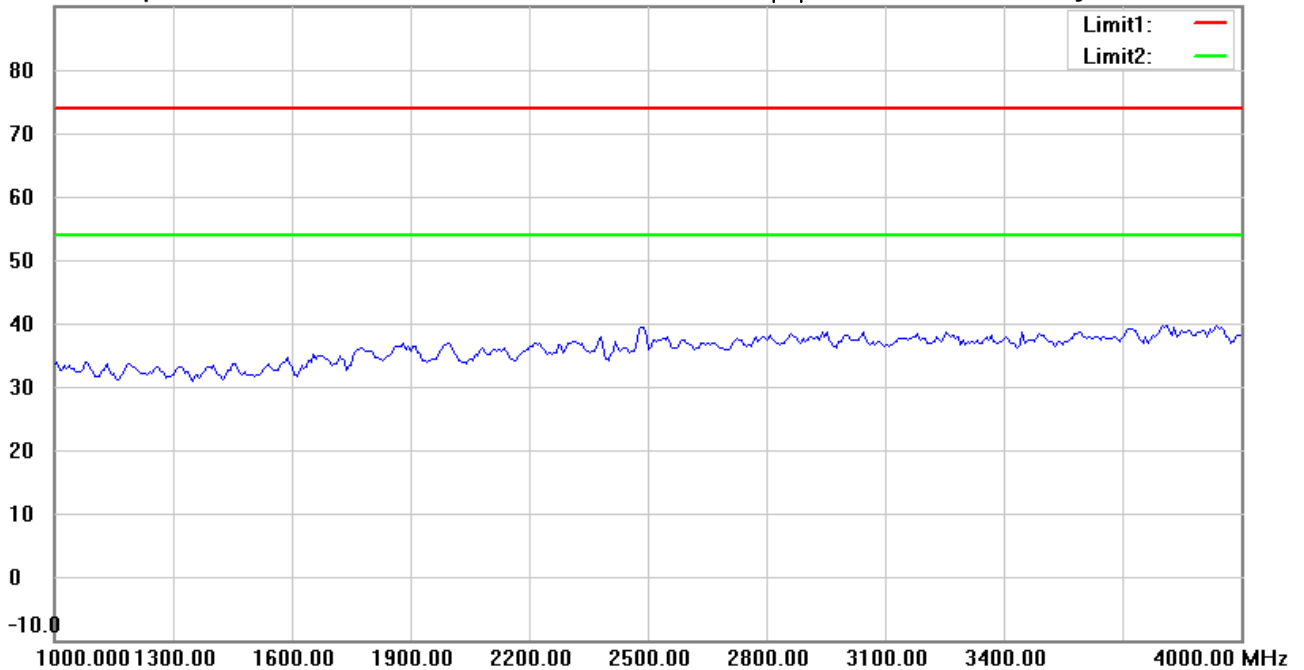

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:05:33

Humidity:66.0 %

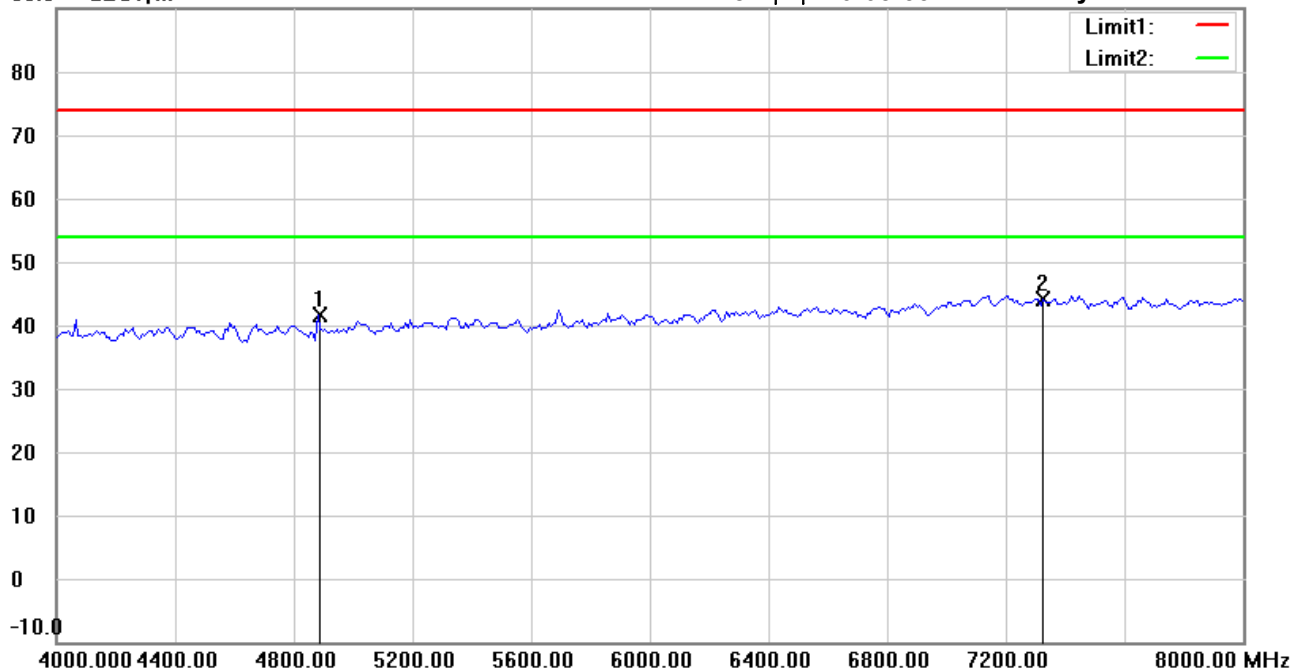

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	42.93	peak	-1.40	41.53	74.00	150	119	-32.47	
*	7323.000	40.38	peak	3.86	44.24	74.00	150	20	-29.76	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:09:44

Humidity: 66.0 %

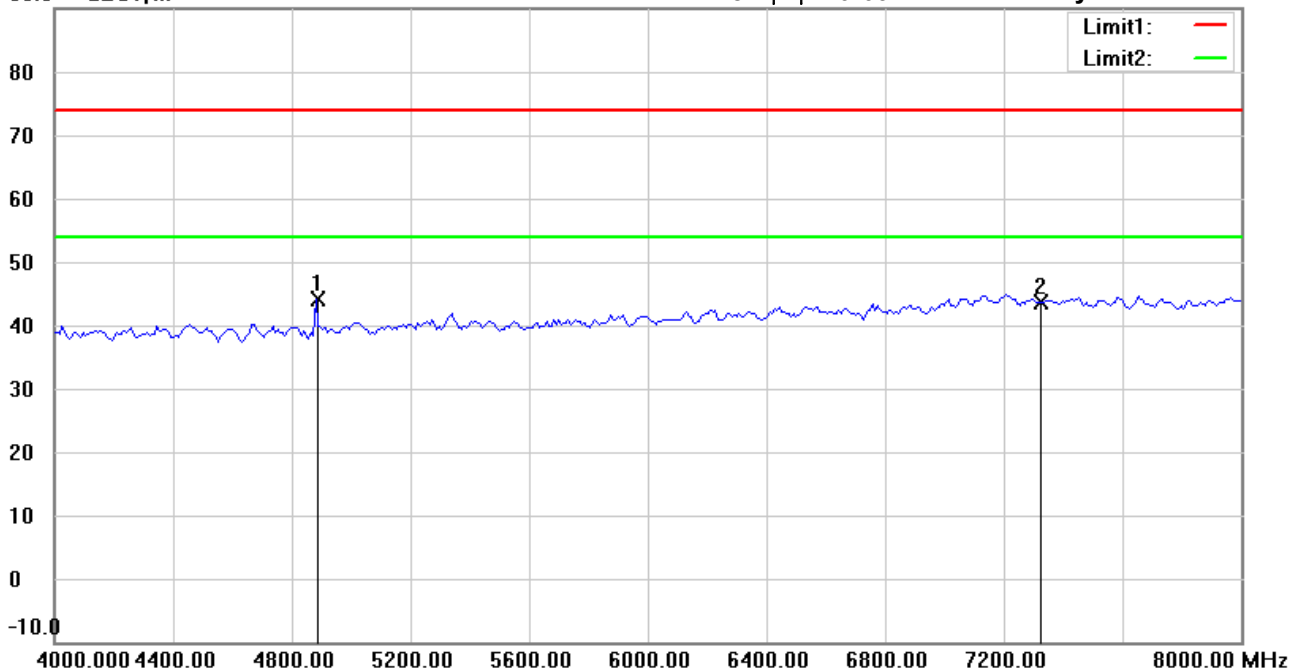

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4881.764	45.48	peak	-1.40	44.08	74.00	150	107	-29.92	
	7323.000	39.73	peak	3.86	43.59	74.00	150	288	-30.41	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:07:15

Humidity:66.0 %

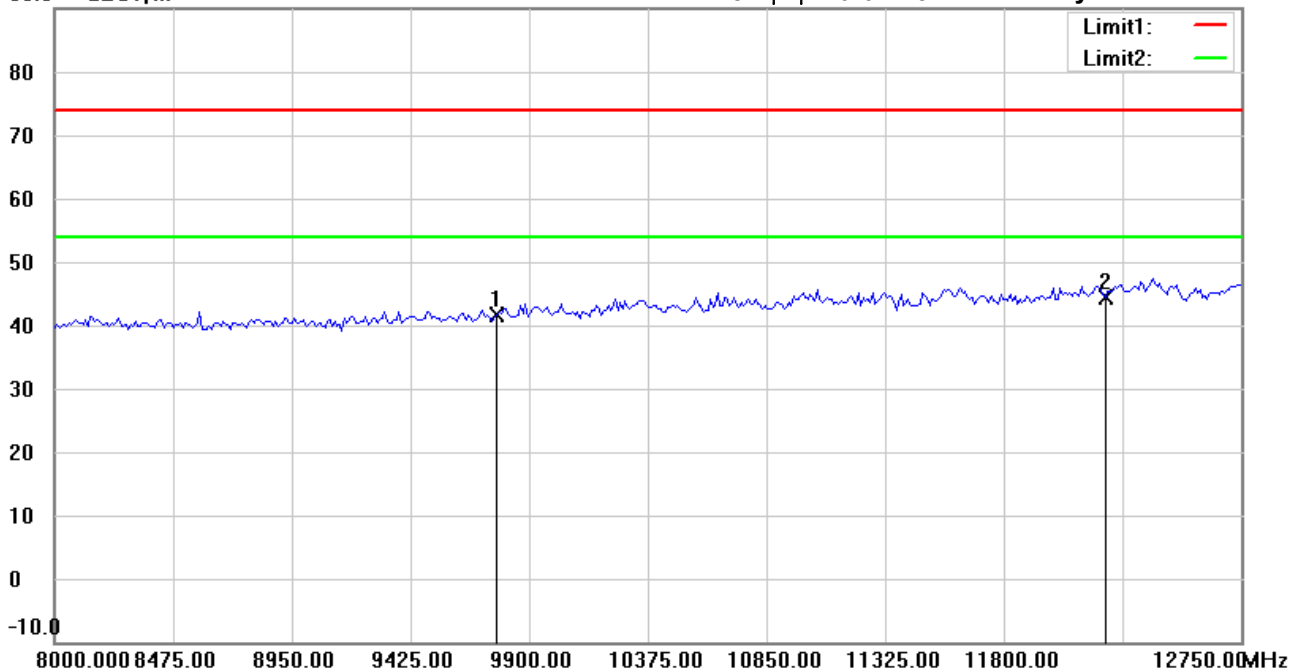

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	34.51	peak	7.03	41.54	74.00	150	302	-32.46	
*	12205.000	30.70	peak	13.58	44.28	74.00	150	104	-29.72	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:11:14

Humidity:66.0 %

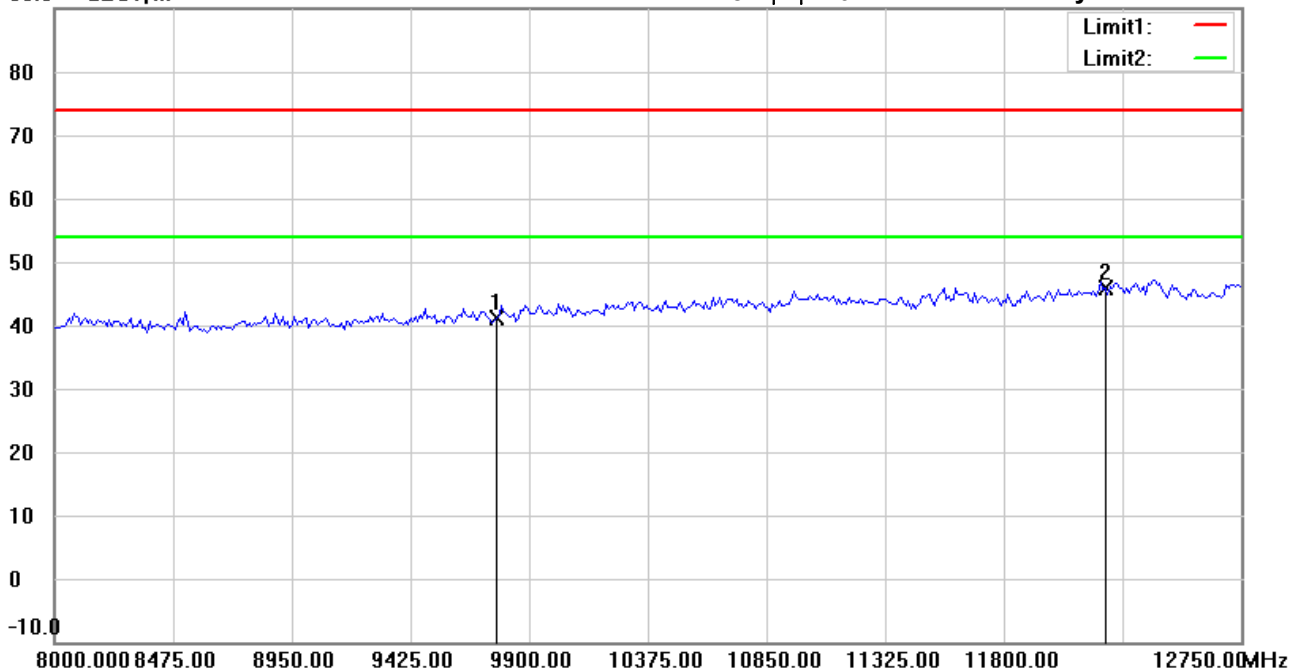

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	34.12	peak	7.03	41.15	74.00	150	24	-32.85	
*	12205.000	32.22	peak	13.58	45.80	74.00	150	71	-28.20	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:07:29

Humidity:66.0 %

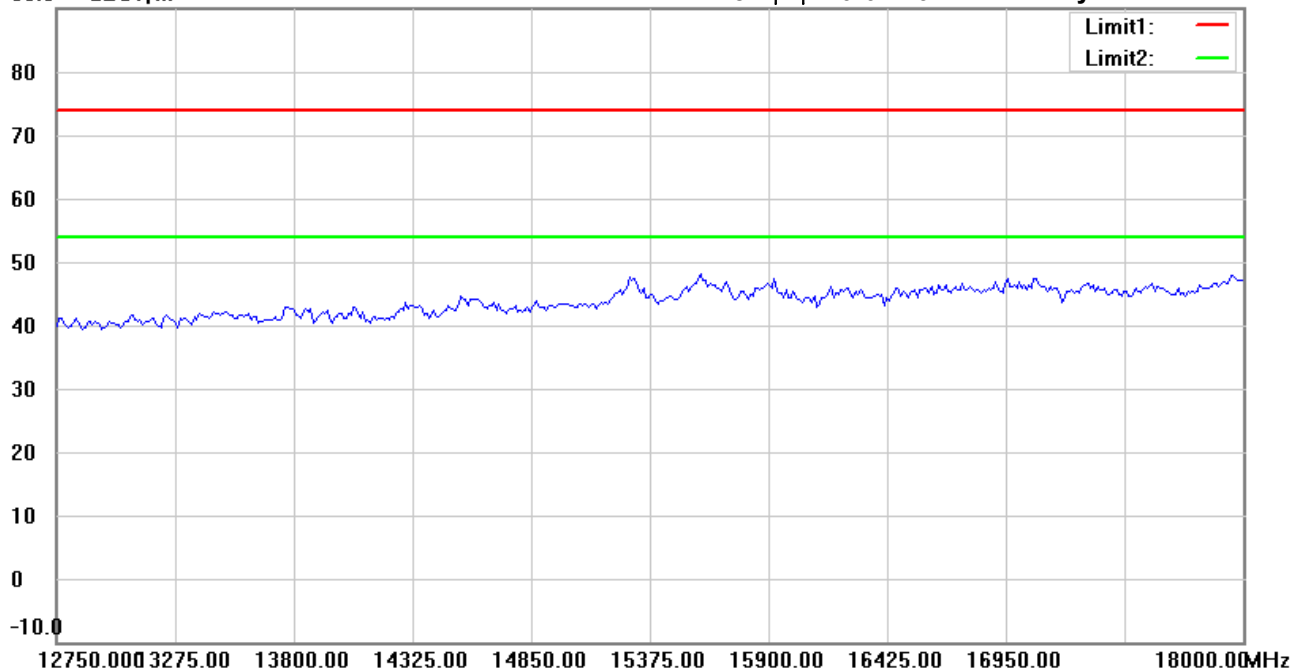

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:11:28

Humidity:66.0 %

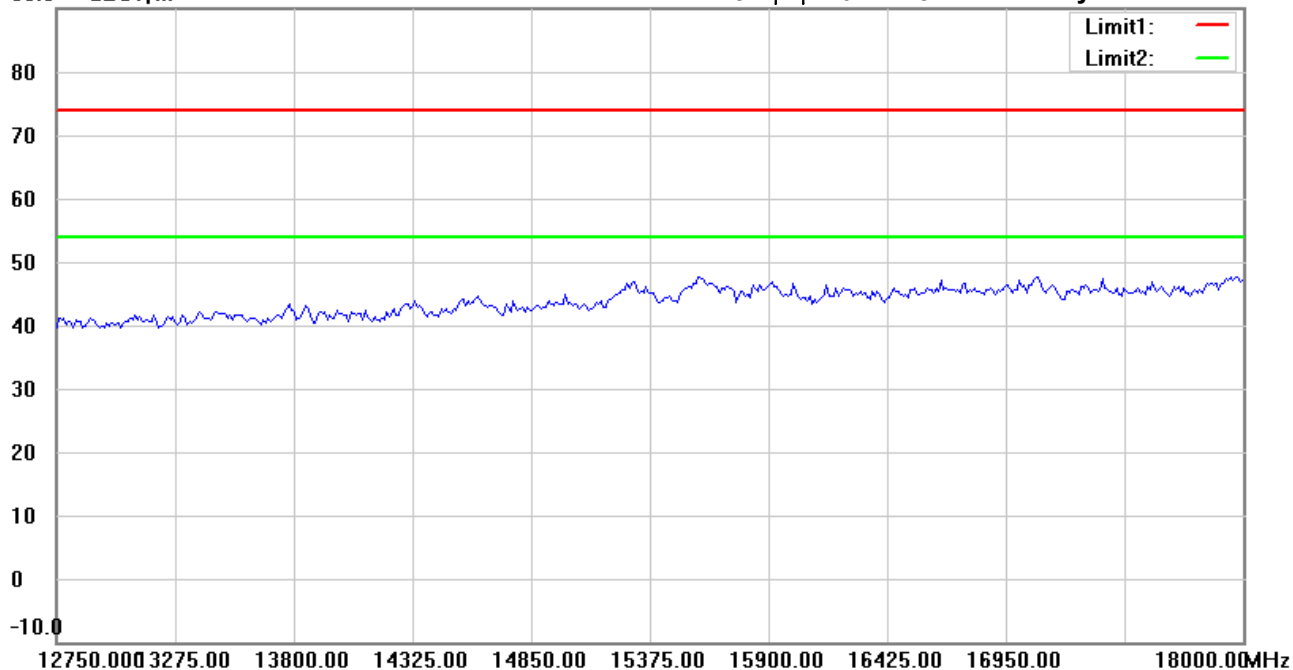

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:07:39

Humidity:66.0 %

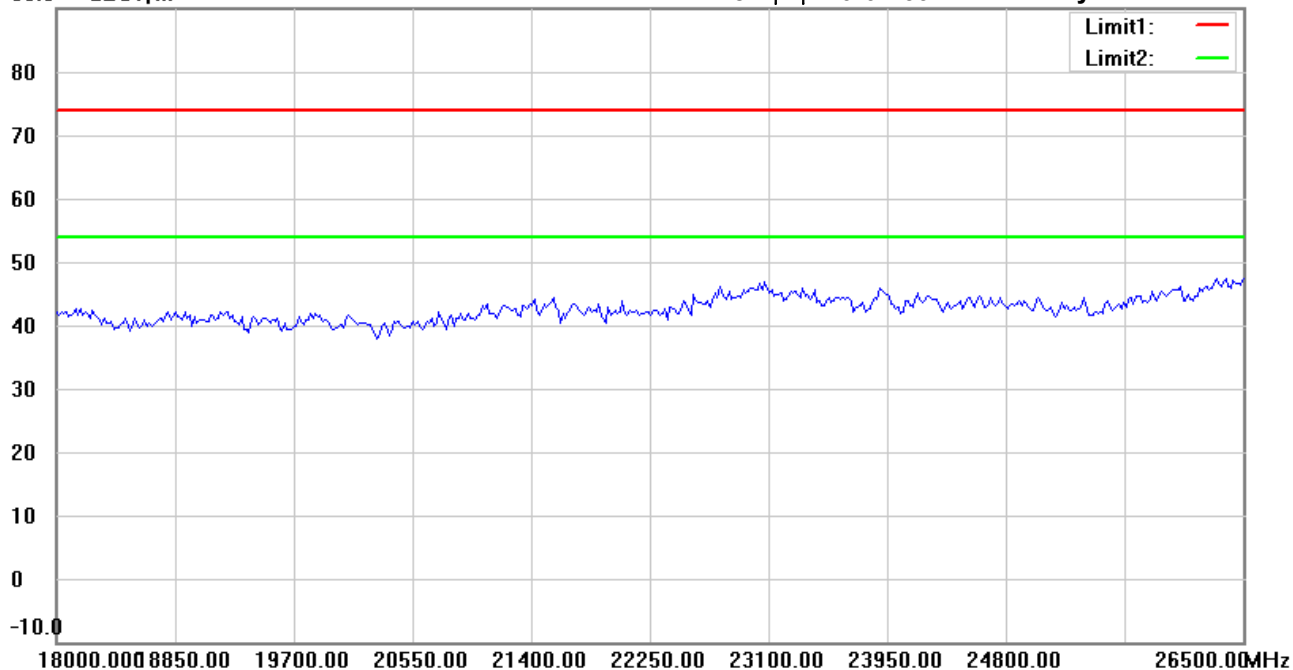

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:11:38

Humidity:66.0 %

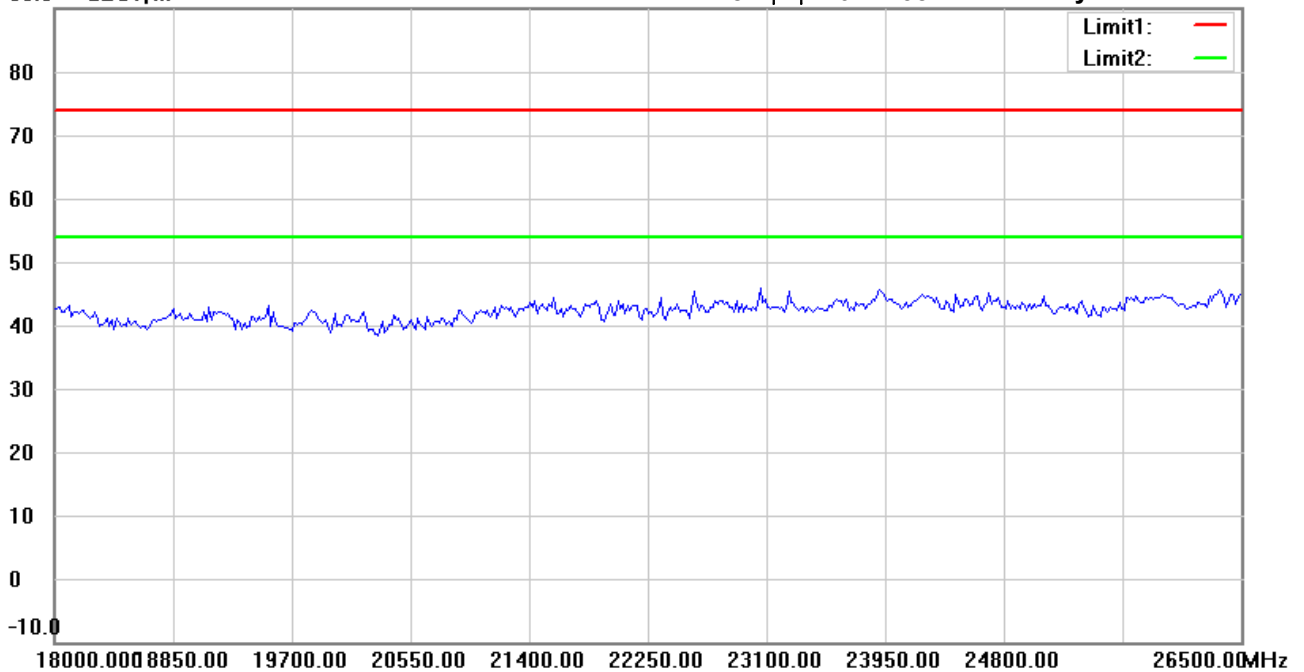

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:16:34

Humidity: 66.0 %

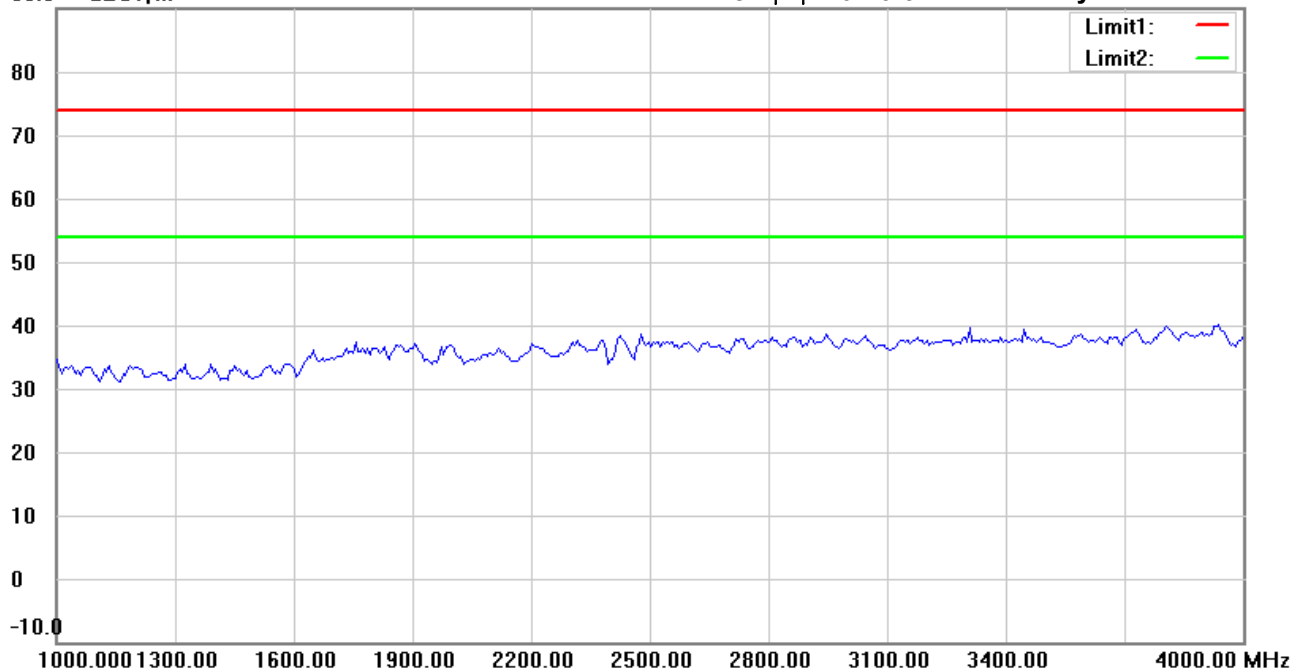

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:20:33

Humidity:66.0 %

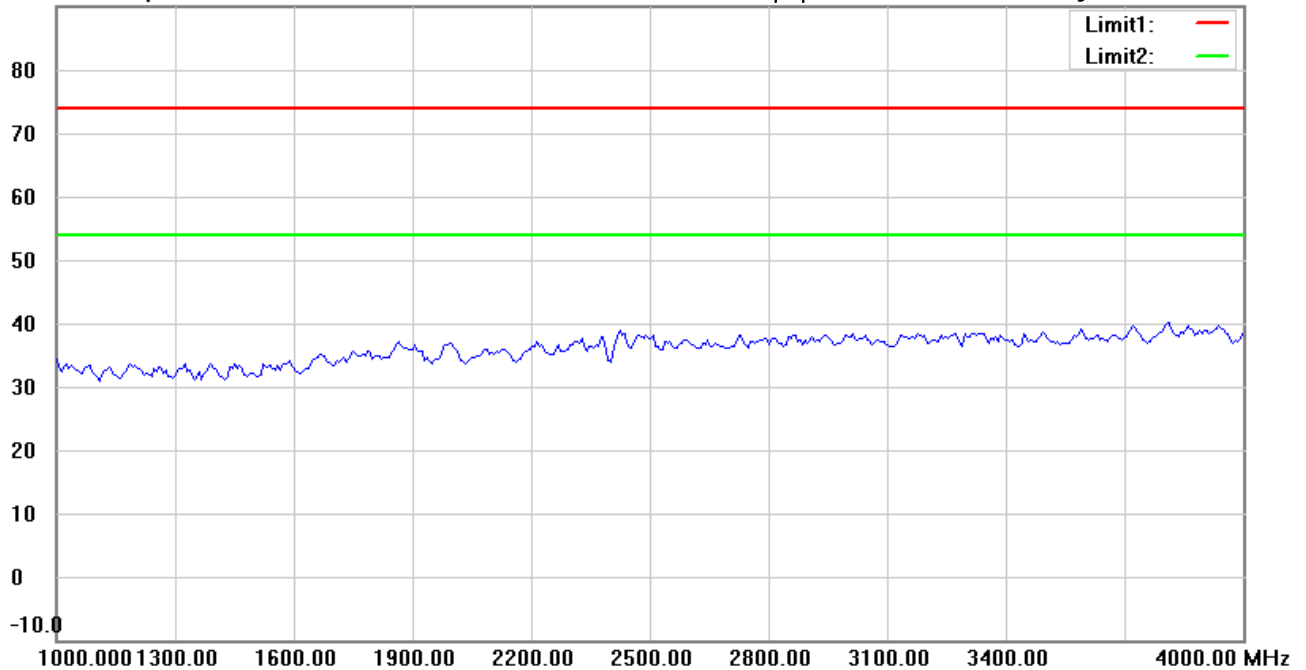

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:17:35

Humidity: 66.0 %

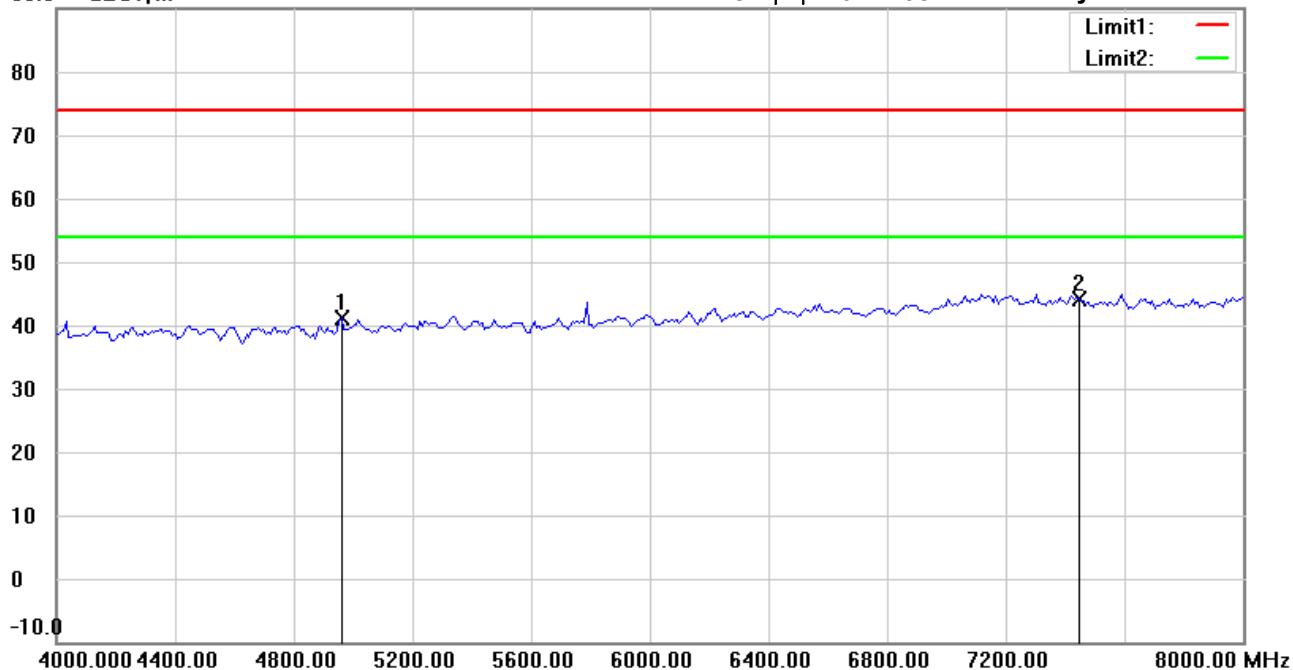

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	42.04	peak	-0.79	41.25	74.00	150	7	-32.75	
*	7440.000	40.27	peak	3.83	44.10	74.00	150	104	-29.90	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:21:34

Humidity: 66.0 %

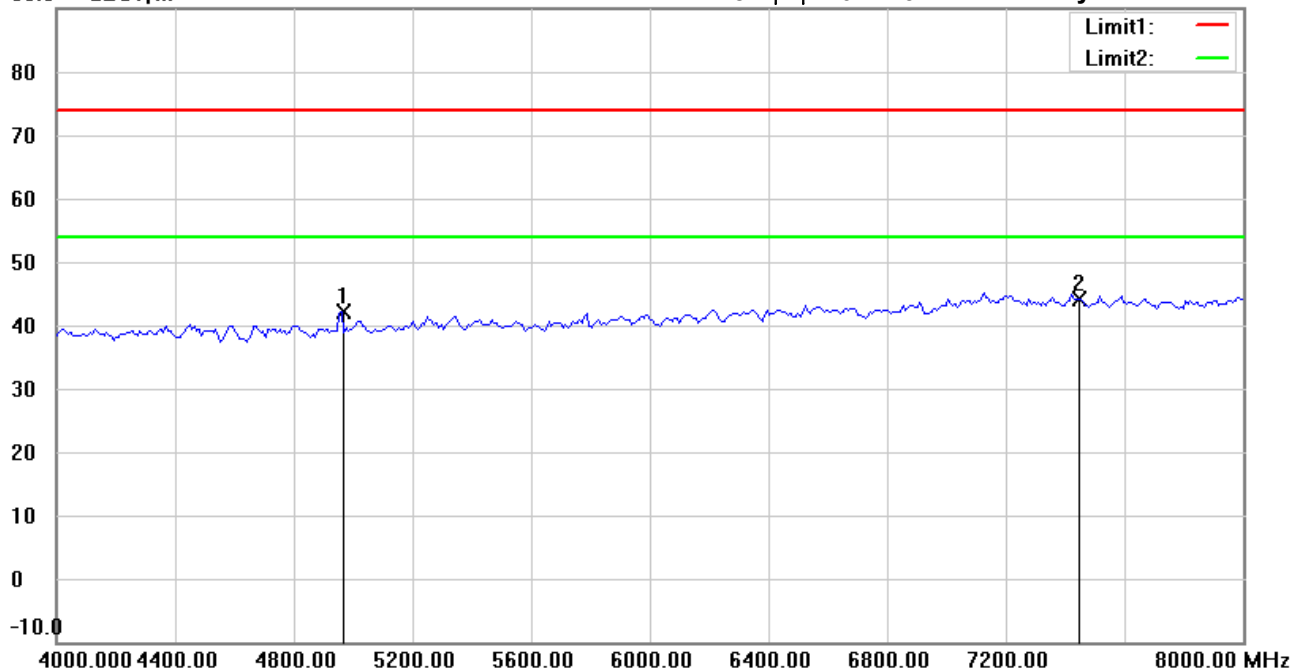

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4961.924	42.89	peak	-0.78	42.11	74.00	150	118	-31.89	
*	7440.000	40.29	peak	3.83	44.12	74.00	150	302	-29.88	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:19:03

Humidity: 66.0 %

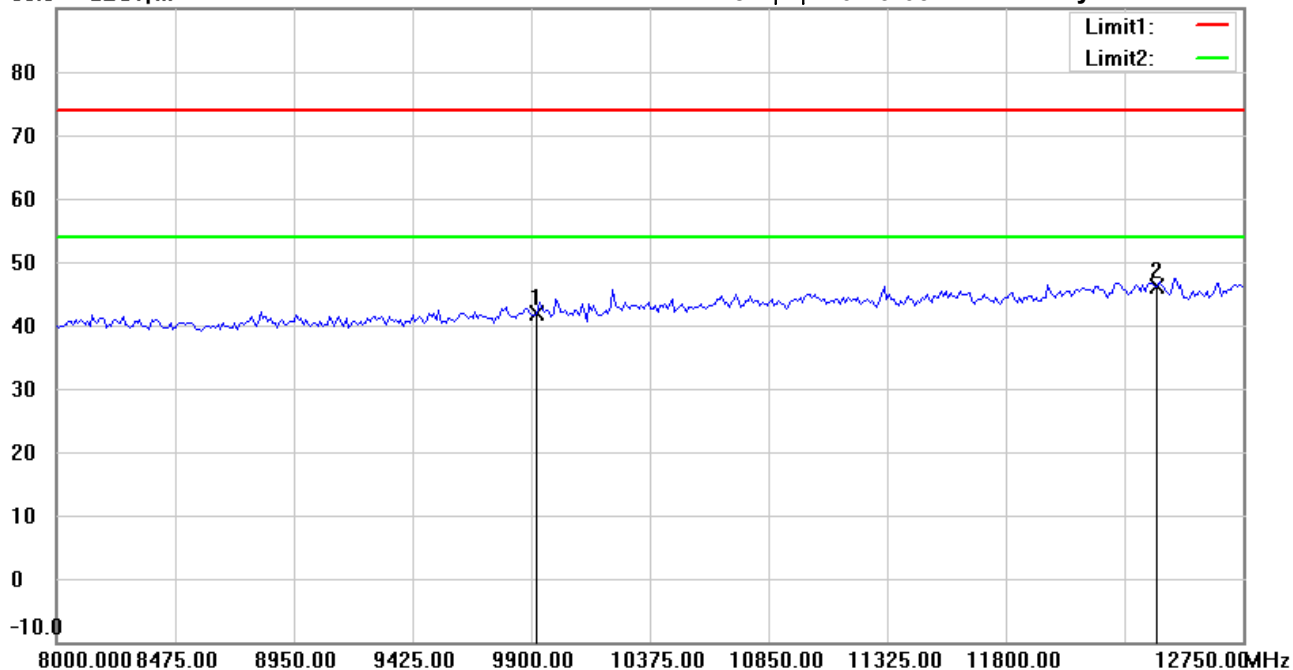

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.27	peak	7.54	41.81	74.00	150	18	-32.19	
*	12400.000	32.45	peak	13.71	46.16	74.00	150	6	-27.84	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:22:41

Humidity: 66.0 %

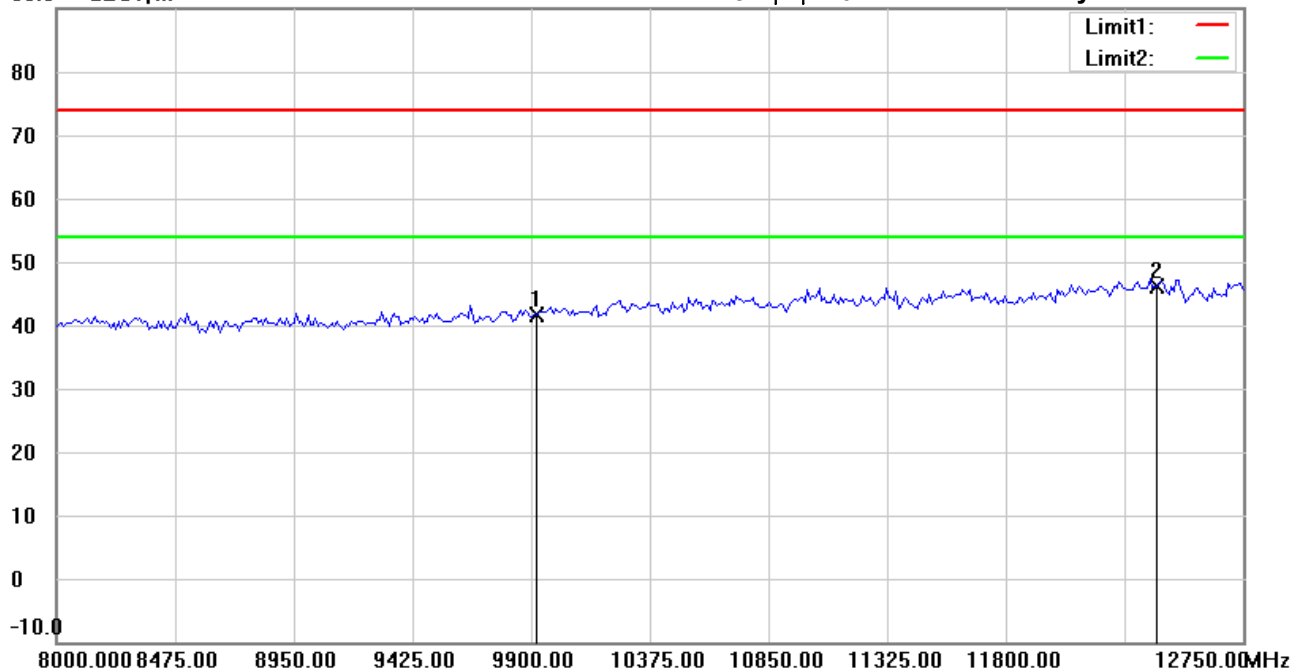

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.02	peak	7.54	41.56	74.00	150	21	-32.44	
*	12400.000	32.46	peak	13.71	46.17	74.00	150	4	-27.83	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:19:17

Humidity: 66.0 %

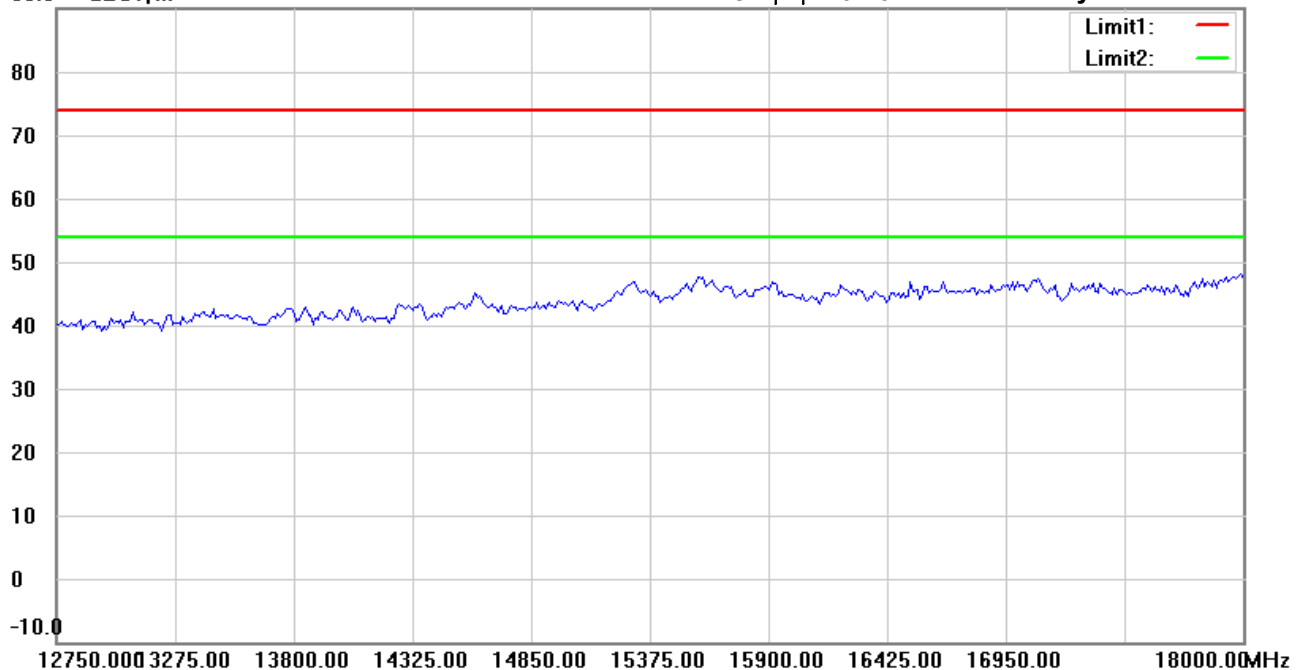

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:22:55

Humidity:66.0 %

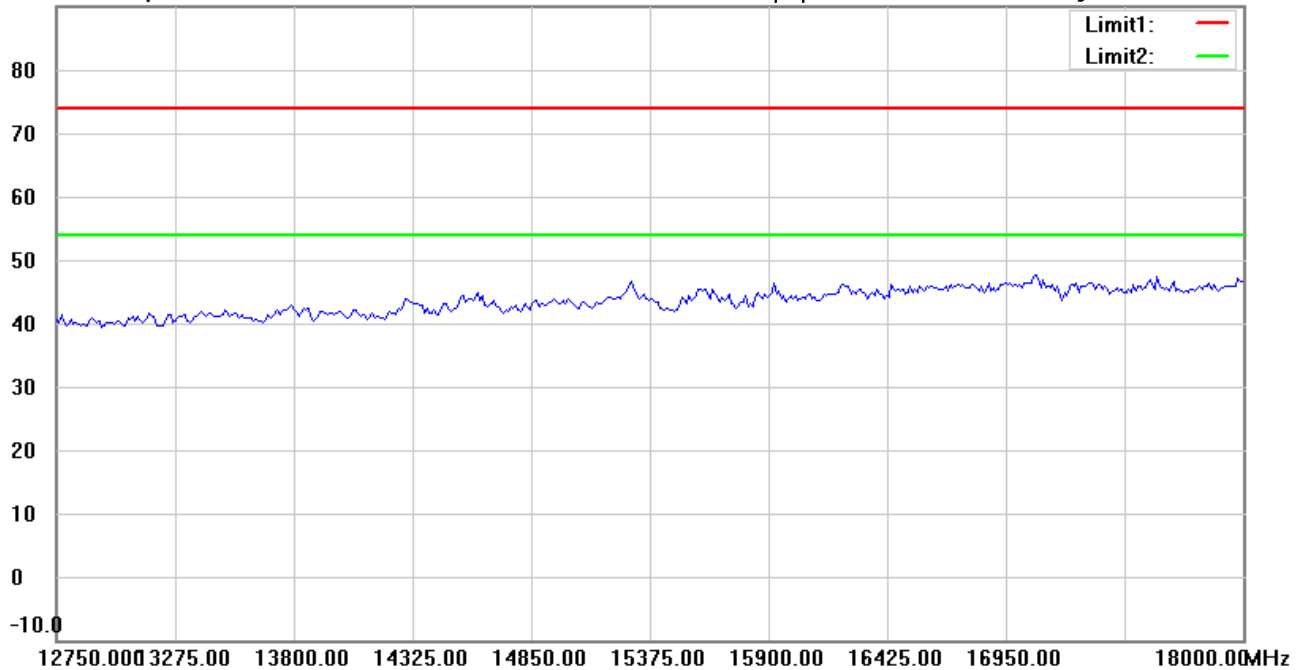

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:19:27

Humidity:66.0 %

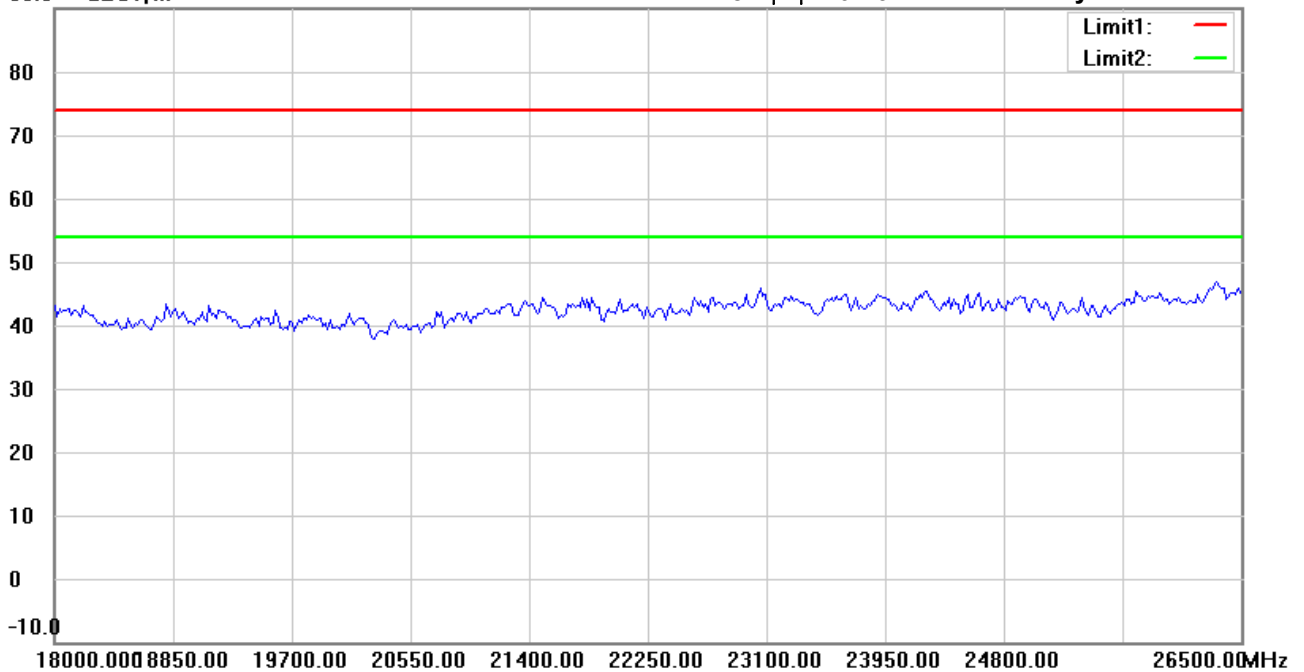

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:23:05

Humidity:66.0 %

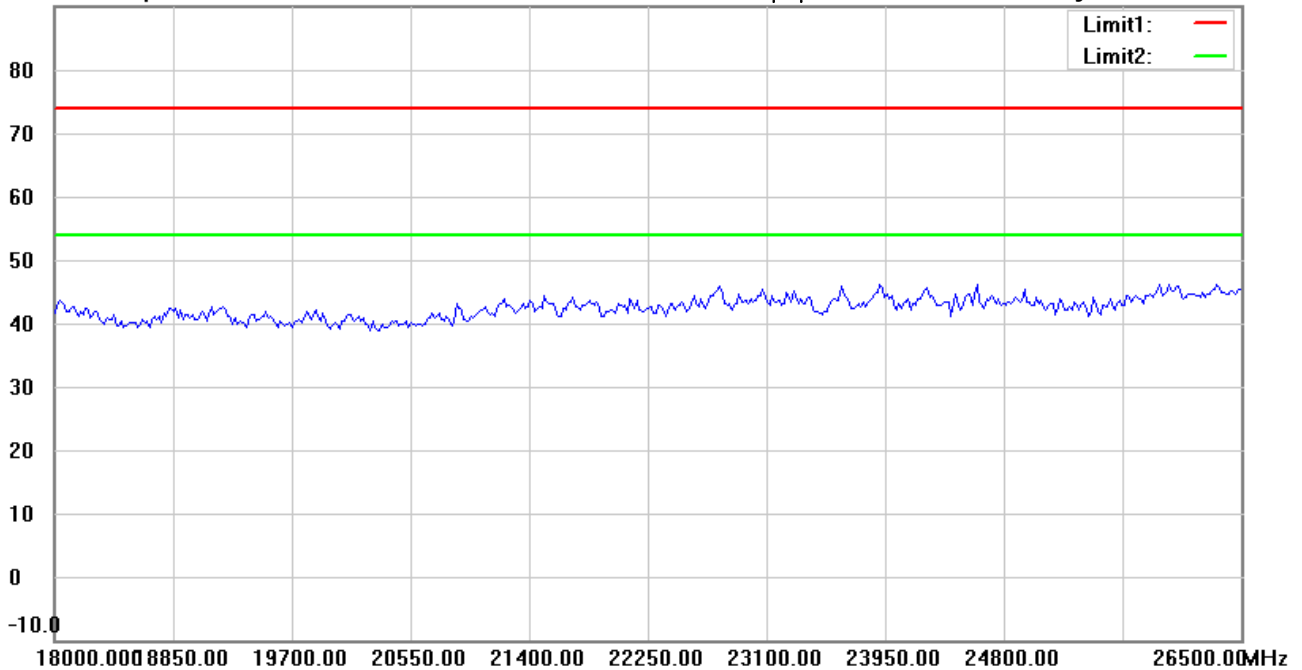

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Nei-hu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 1_系列-BT_TX

Data : #1


Date: 2023/3/21

Temperature: 24.1 °C

80.0 dBuV/m

Time: 上午 02:30:05

Humidity: 61.6 %

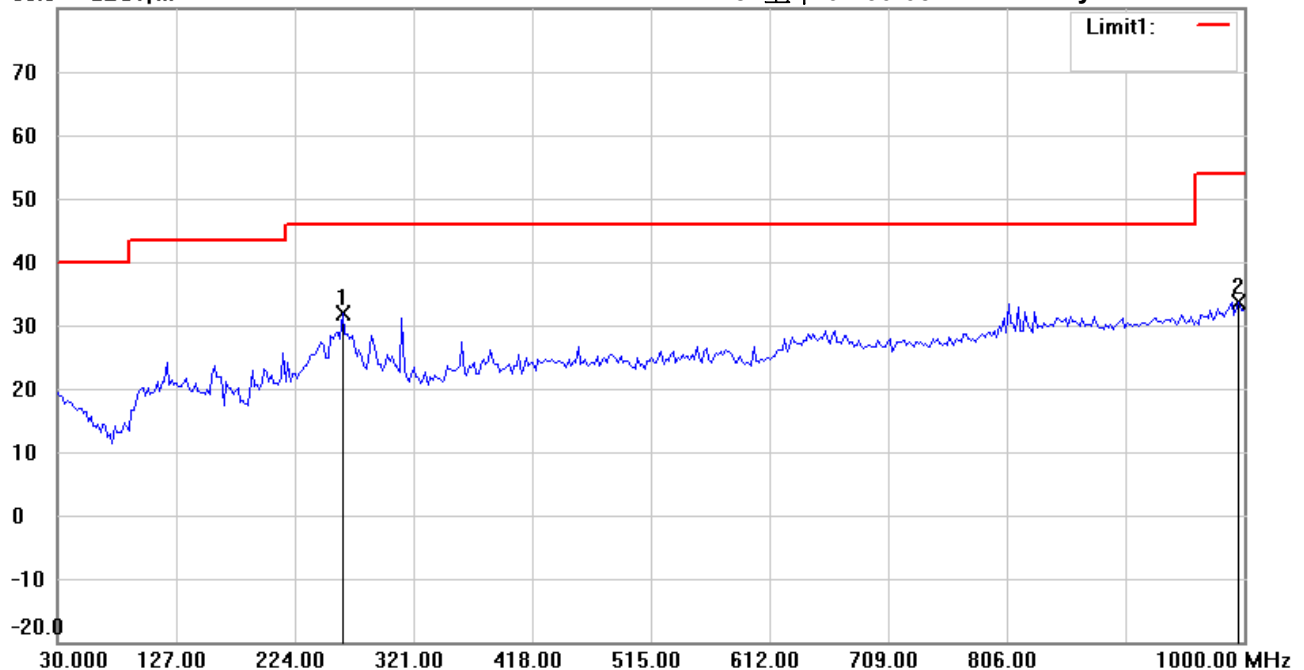

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	263.2664	38.88	peak	-6.96	31.92	46.00	152	160	-14.08	
	996.1122	27.52	peak	6.13	33.65	54.00	151	311	-20.35	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :1_系列-BT_TX

Data :#2

Date: 2023/3/21

Temperature:24.1 °C

80.0 dBuV/m

Time: 上午 02:31:05

Humidity:61.6 %



Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: **Vertical**

EUT : W6M22302-22477

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	531.5230	34.73	peak	-2.20	32.53	46.00	150	112	-13.47	
	980.5611	27.50	peak	5.59	33.09	54.00	156	267	-20.91	

*:Maximum data x:Over limit !:over margin




Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason
Temperature:24.1 °C
Humidity:61.6 %

File :1_BLE(1M)_TX 2402MHz Data :#1

Date: 2023/3/21
Time: 上午 01:16:09

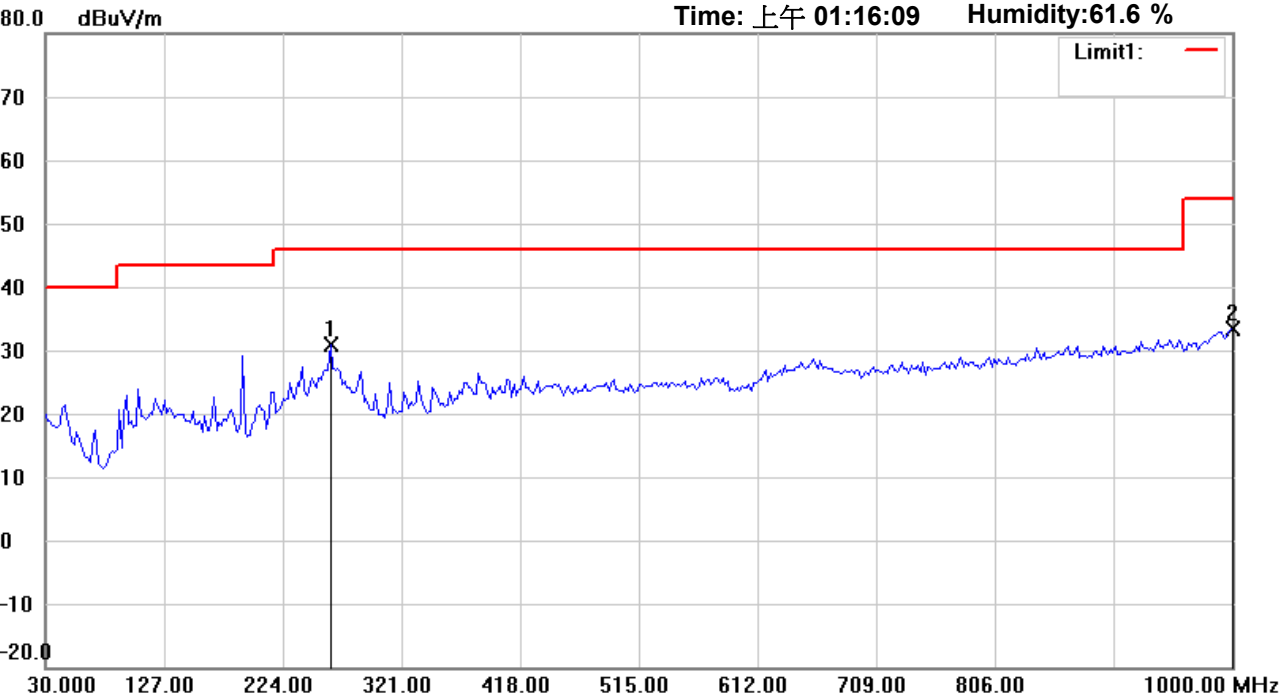

Site : Chamber
Condition : FCC_part 15 RE-Class C_30-1000MHz
EUT : W6M22302-22477
M/N:
Test Mode : TX 2402MHz
Note :

Polarization: Horizontal
Power : 120 Va.c.
Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	263.2664	37.81	peak	-6.96	30.85	46.00	152	168	-15.15	
	1000.0000	27.00	peak	6.26	33.26	54.00	151	315	-20.74	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :1_BLE(1M)_TX 2402MHz Data :#2


Date: 2023/3/21

Temperature:24.1 °C

80.0 dBuV/m

Time: 上午 01:17:09

Humidity:61.6 %

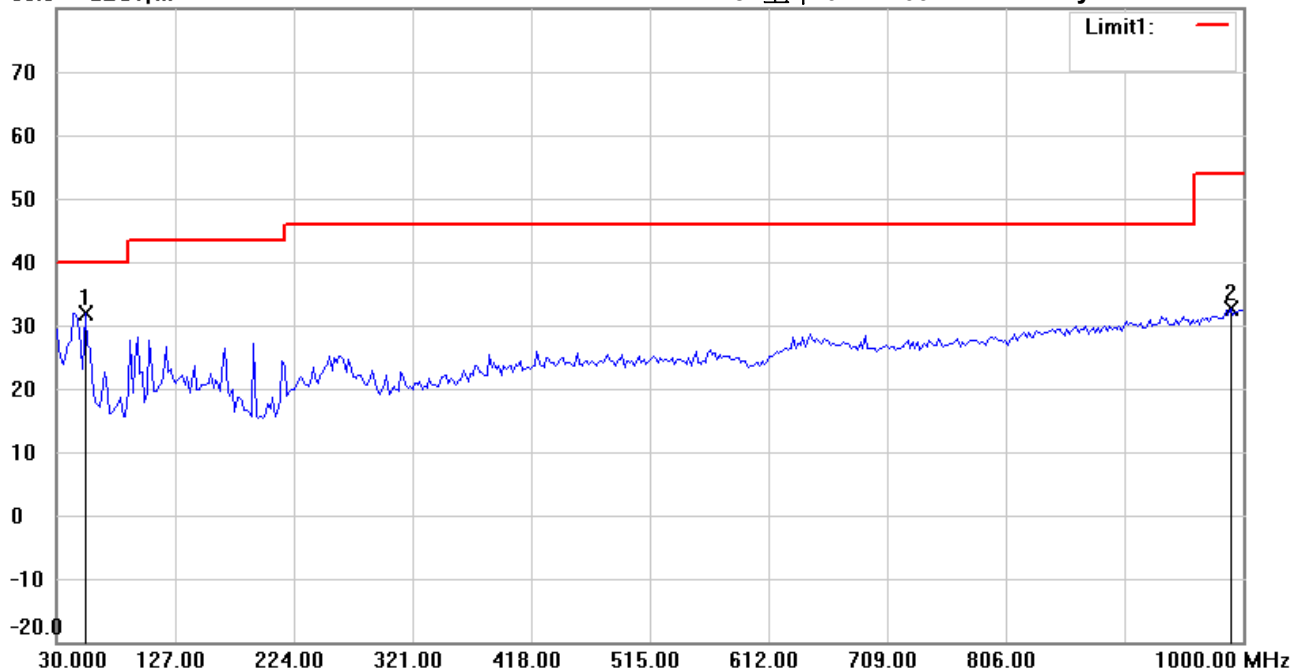

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	53.3267	42.49	peak	-10.54	31.95	40.00	150	172	-8.05	
	990.2806	26.73	peak	5.93	32.66	54.00	153	268	-21.34	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:27:51

Humidity: 66.0 %

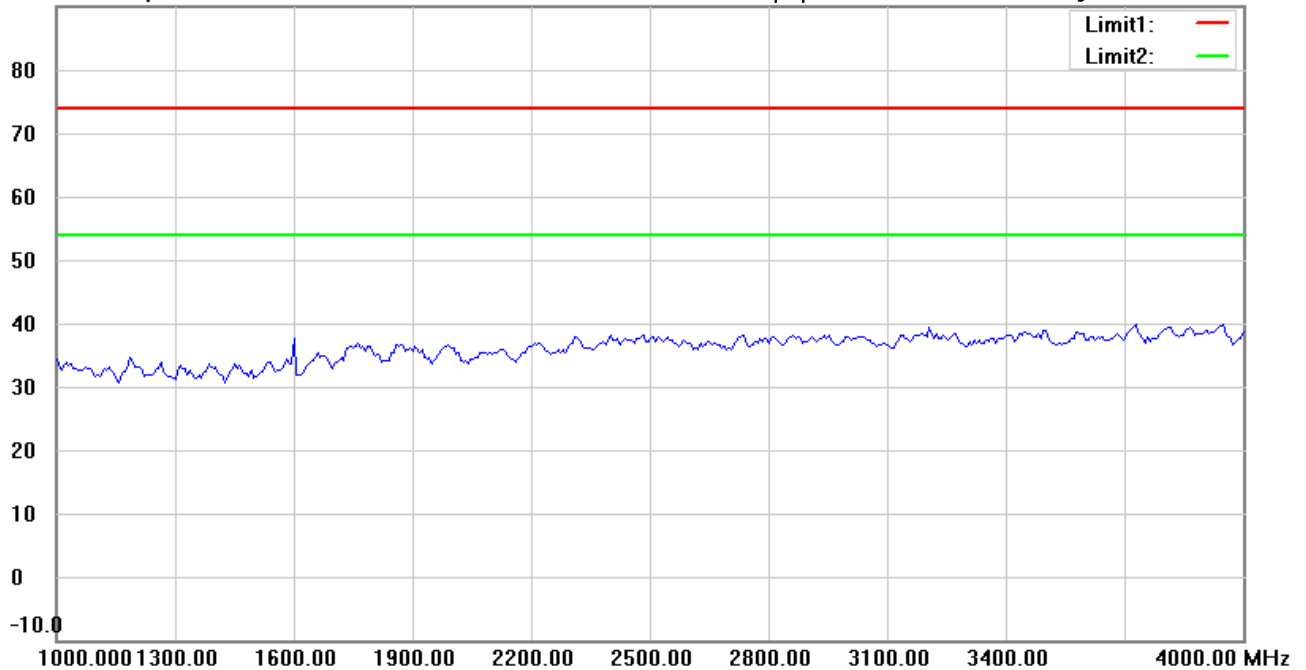

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:33:47

Humidity:66.0 %

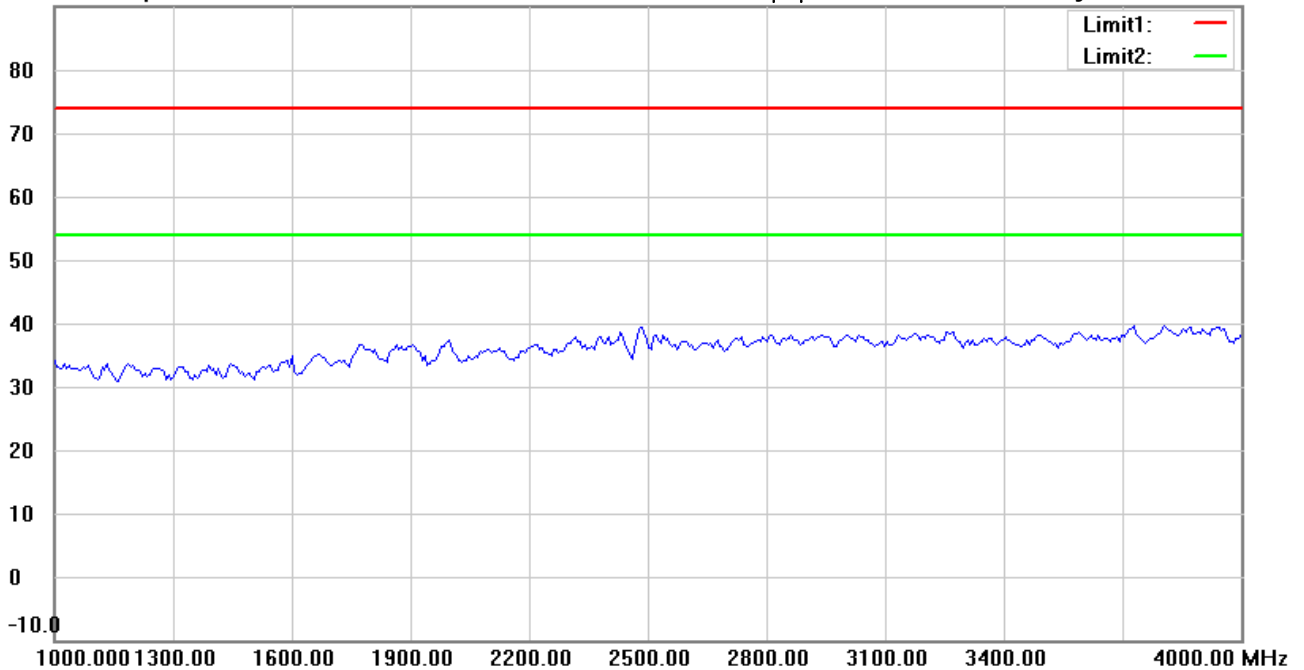

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:28:53

Humidity: 66.0 %

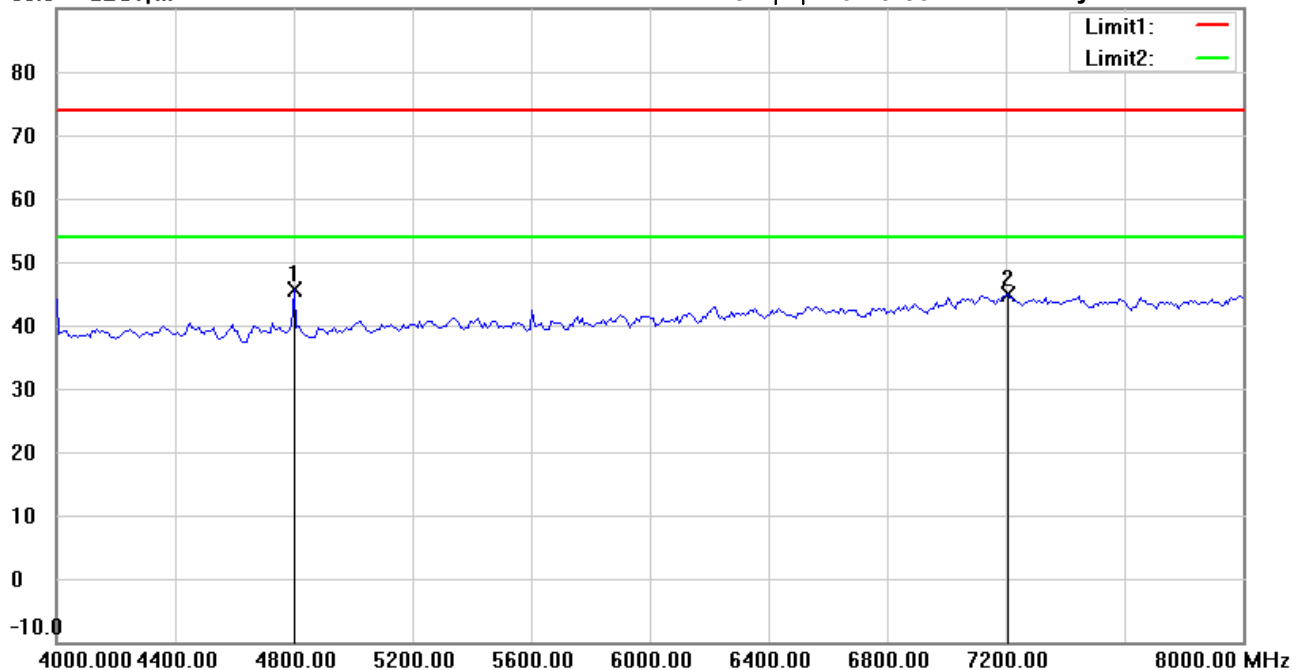

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4801.603	47.40	peak	-1.74	45.66	74.00	150	350	-28.34	
	7206.000	40.94	peak	4.01	44.95	74.00	150	9	-29.05	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:34:49

Humidity: 66.0 %

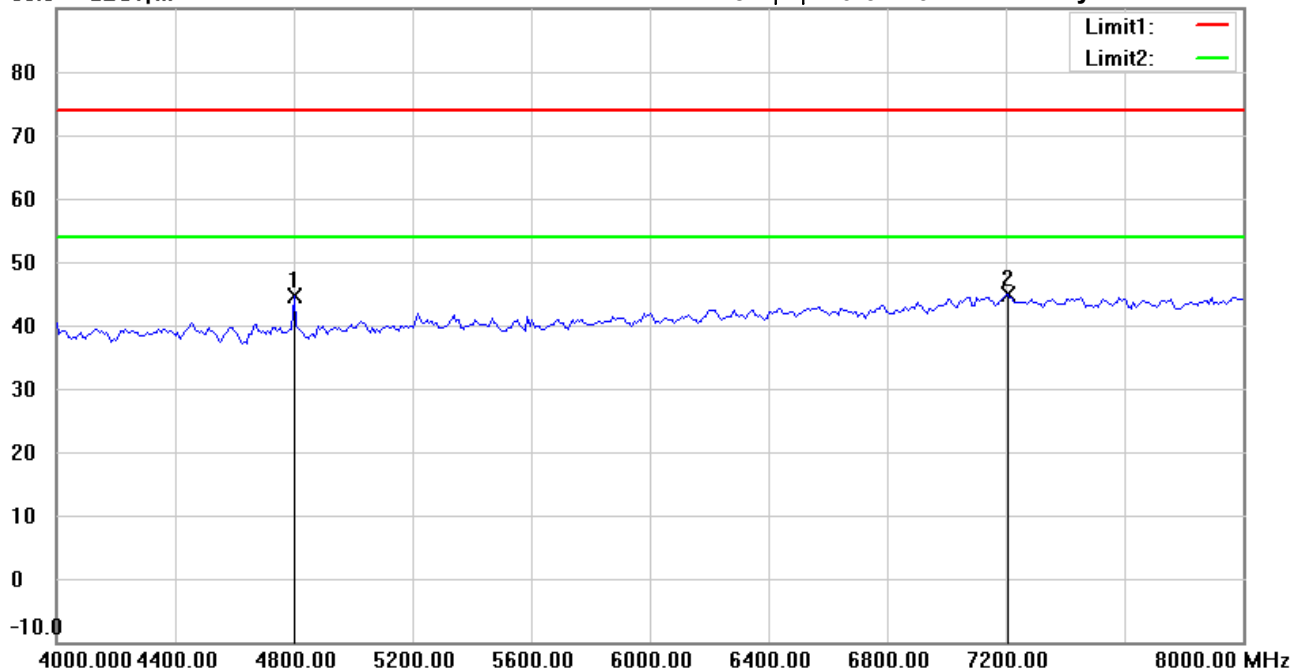

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	46.47	peak	-1.74	44.73	74.00	150	228	-29.27	
*	7206.000	40.83	peak	4.01	44.84	74.00	150	46	-29.16	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:30:46

Humidity:66.0 %

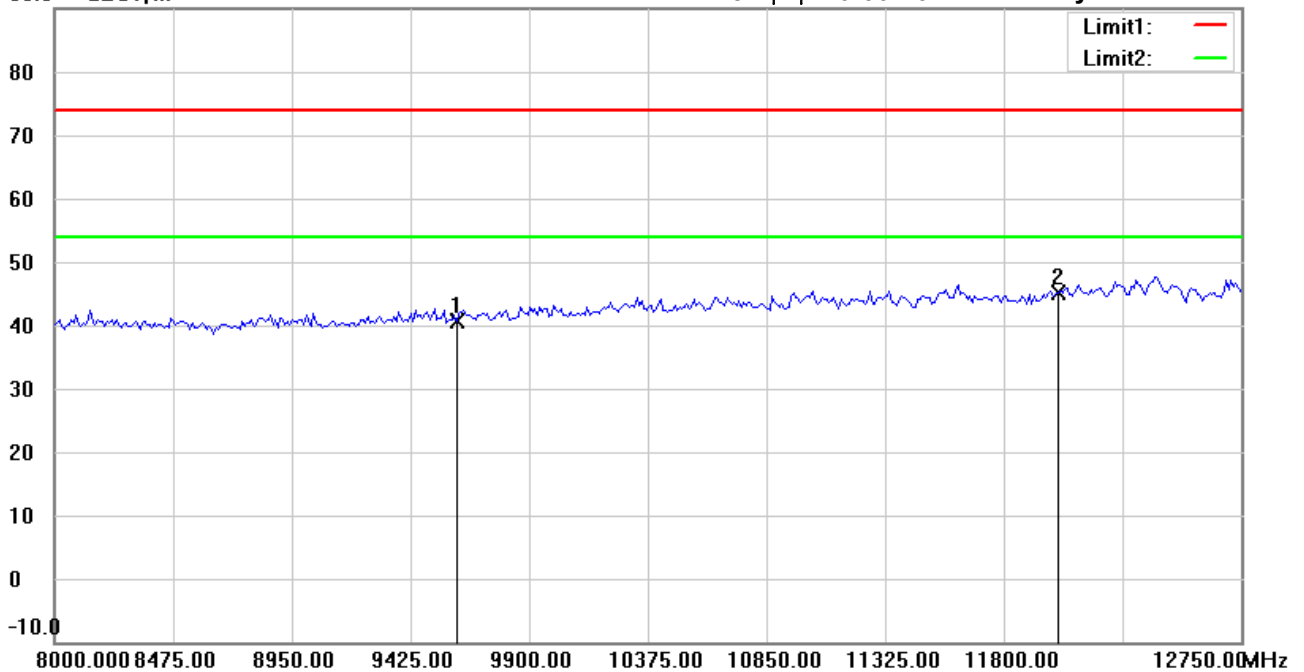

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	33.78	peak	6.80	40.58	74.00	150	123	-33.42	
*	12010.000	32.92	peak	12.09	45.01	74.00	150	271	-28.99	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:36:22

Humidity:66.0 %

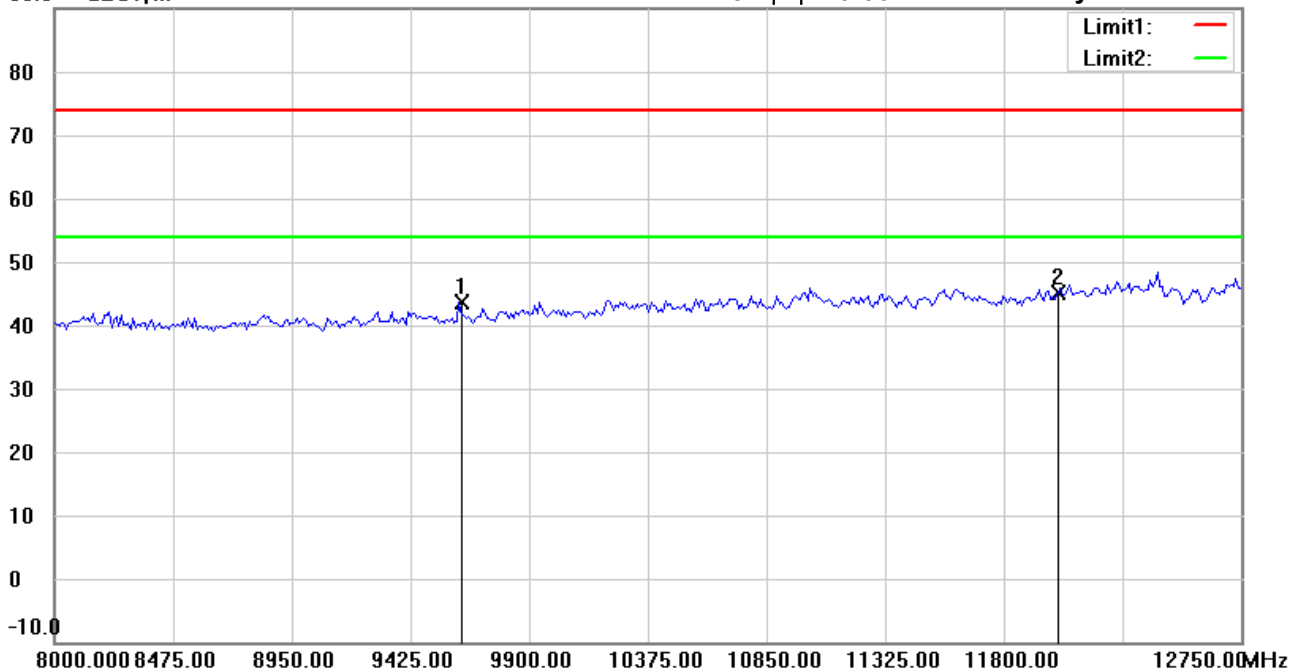

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9618.237	36.72	peak	6.80	43.52	74.00	150	173	-30.48	
*	12010.000	33.11	peak	12.09	45.20	74.00	150	24	-28.80	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:31:01

Humidity:66.0 %

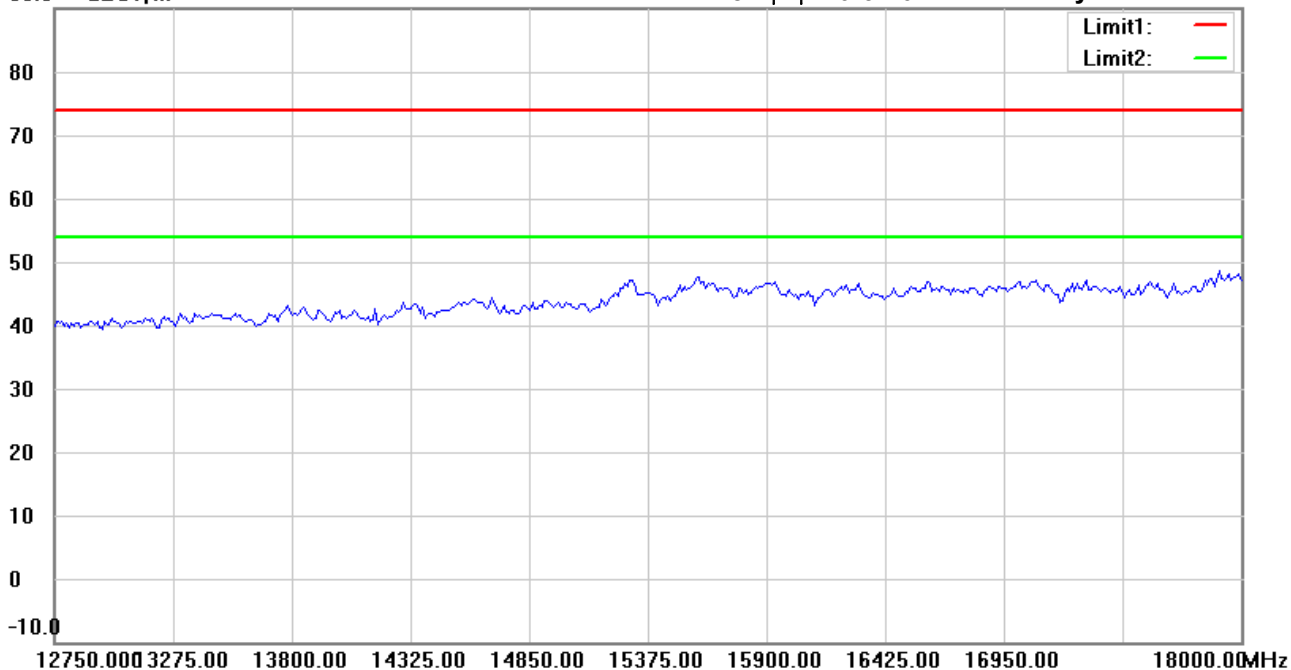

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:36:38

Humidity:66.0 %

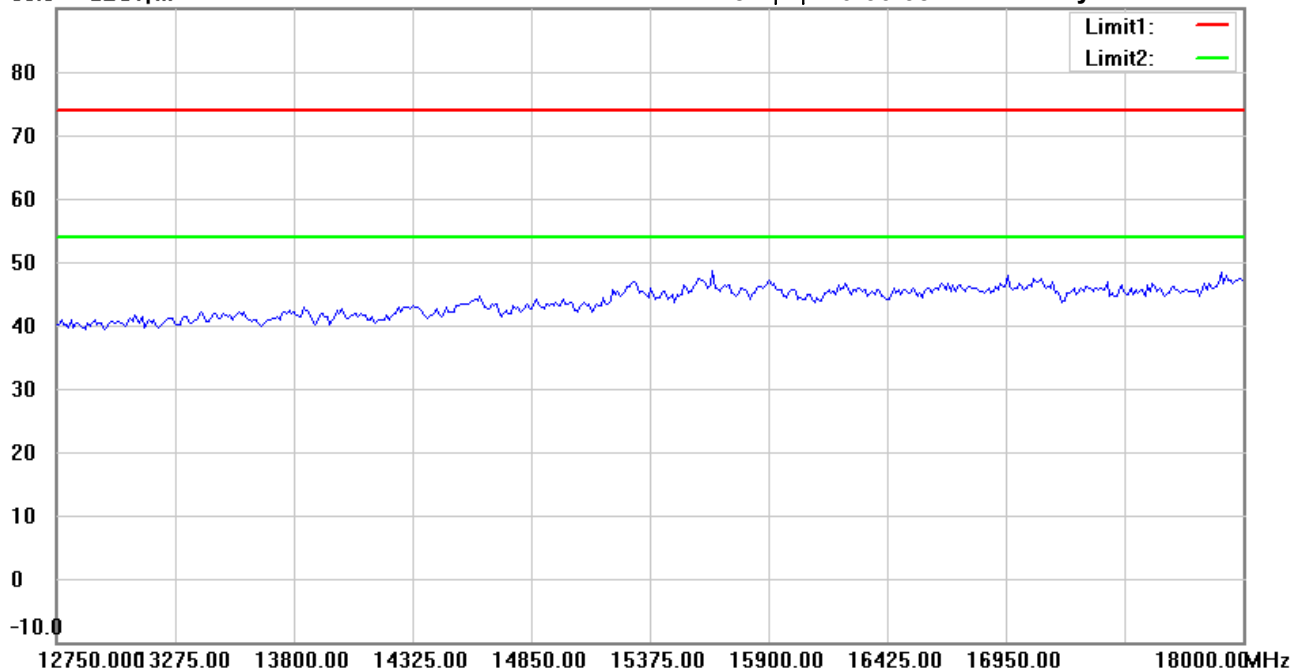

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:31:12

Humidity:66.0 %

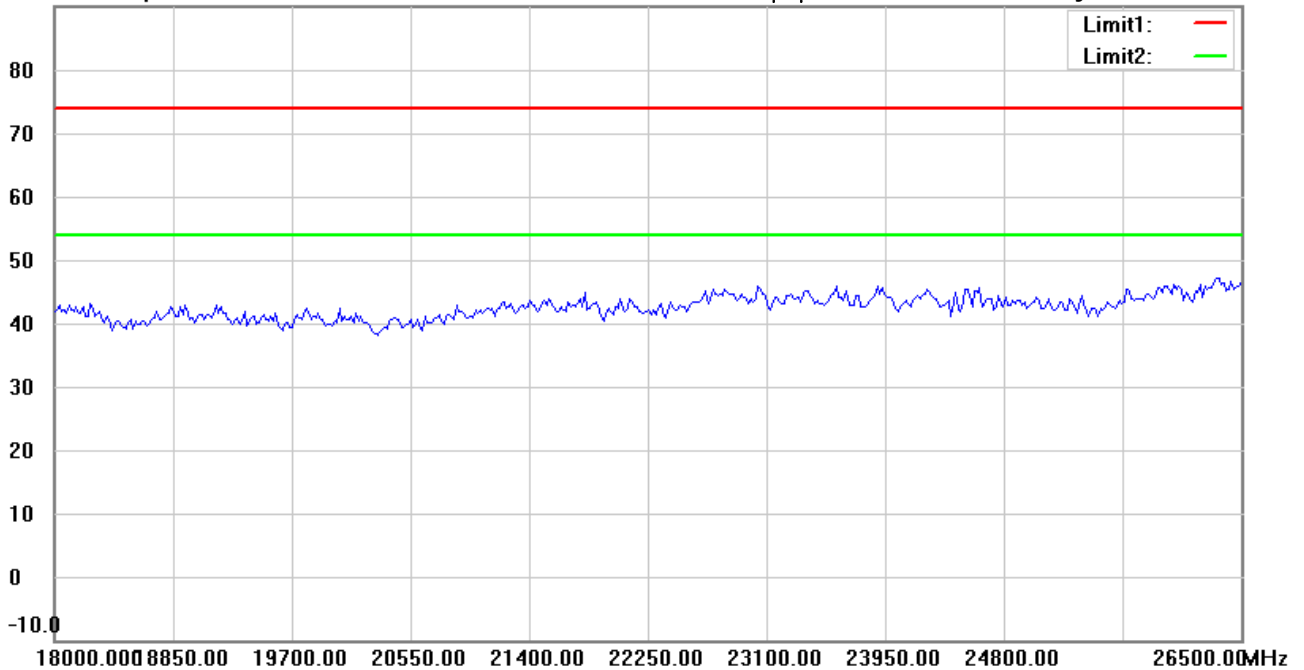

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:36:49

Humidity:66.0 %

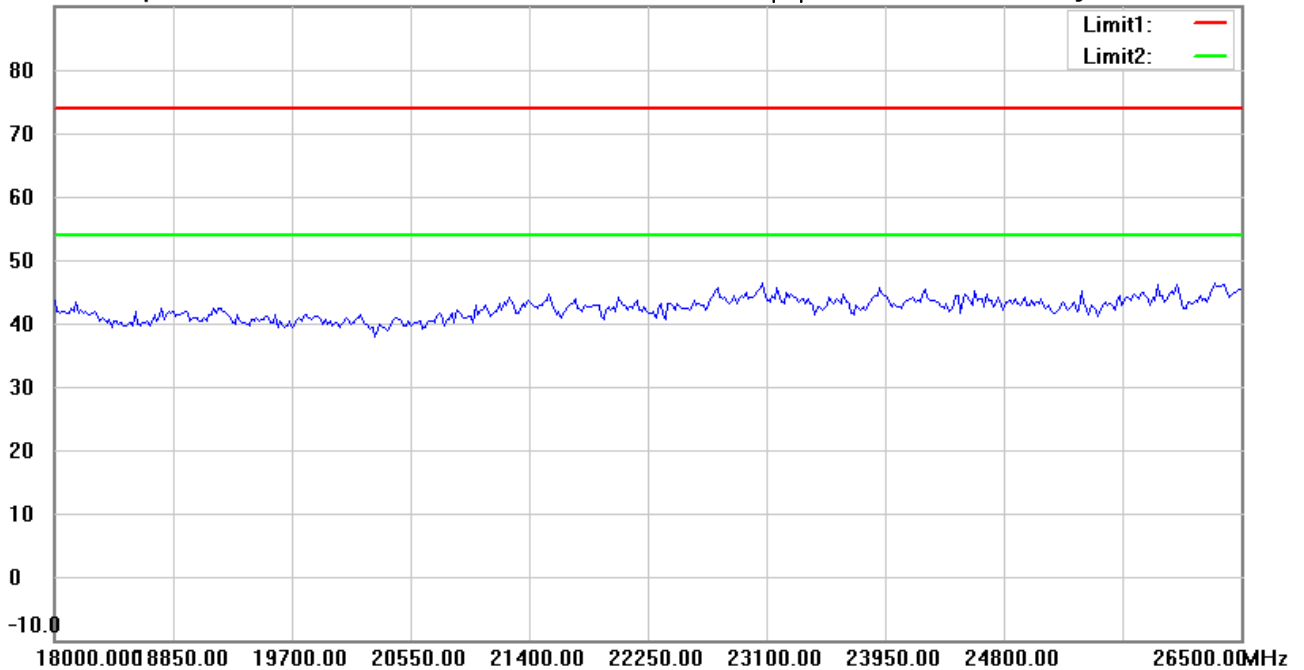

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:40:58

Humidity: 66.0 %

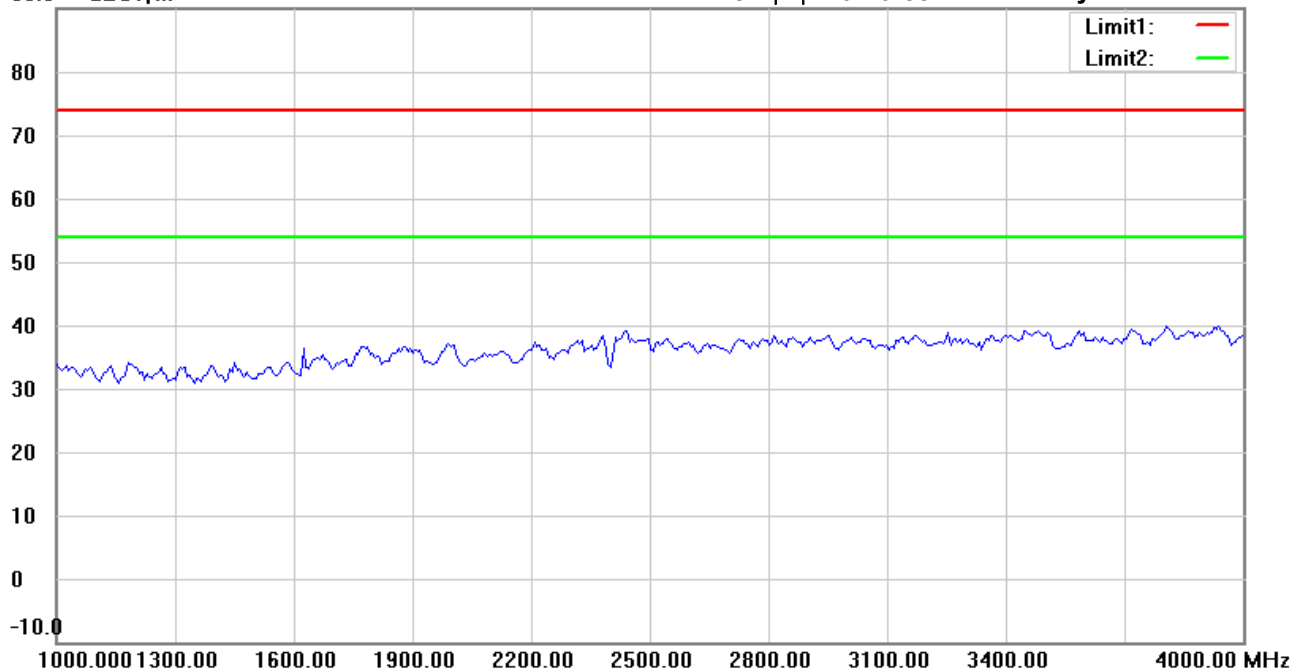

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:51:04

Humidity: 66.0 %

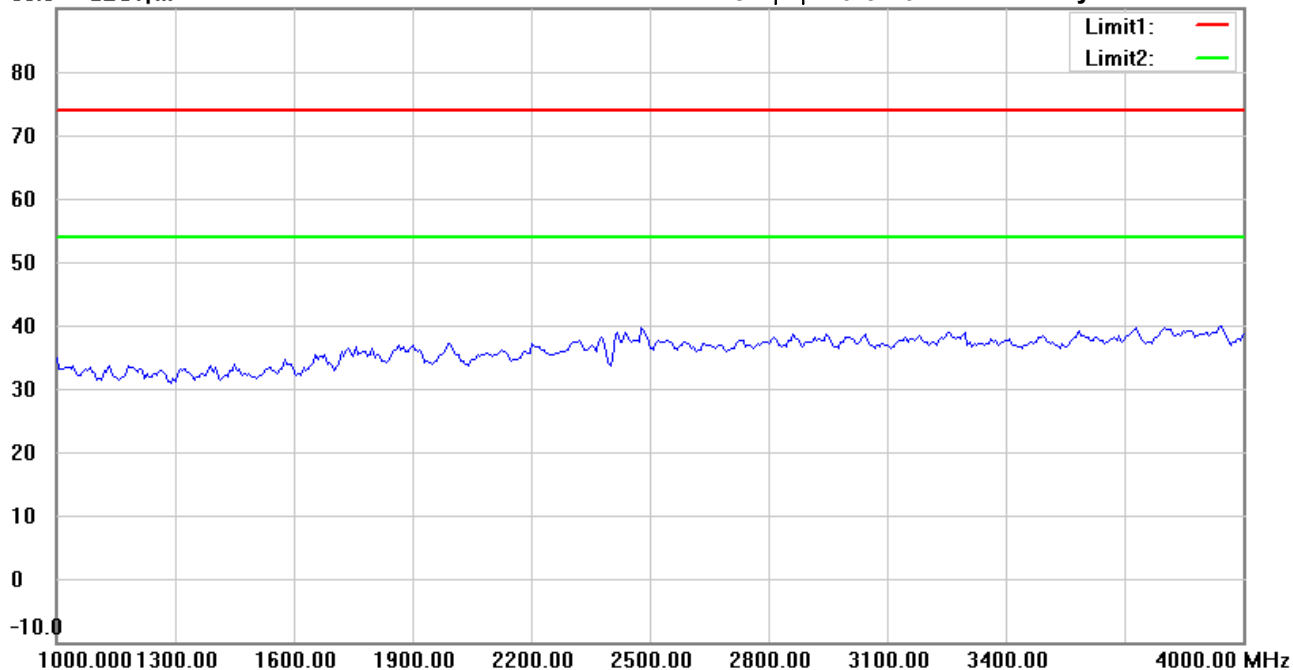

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:41:59

Humidity: 66.0 %

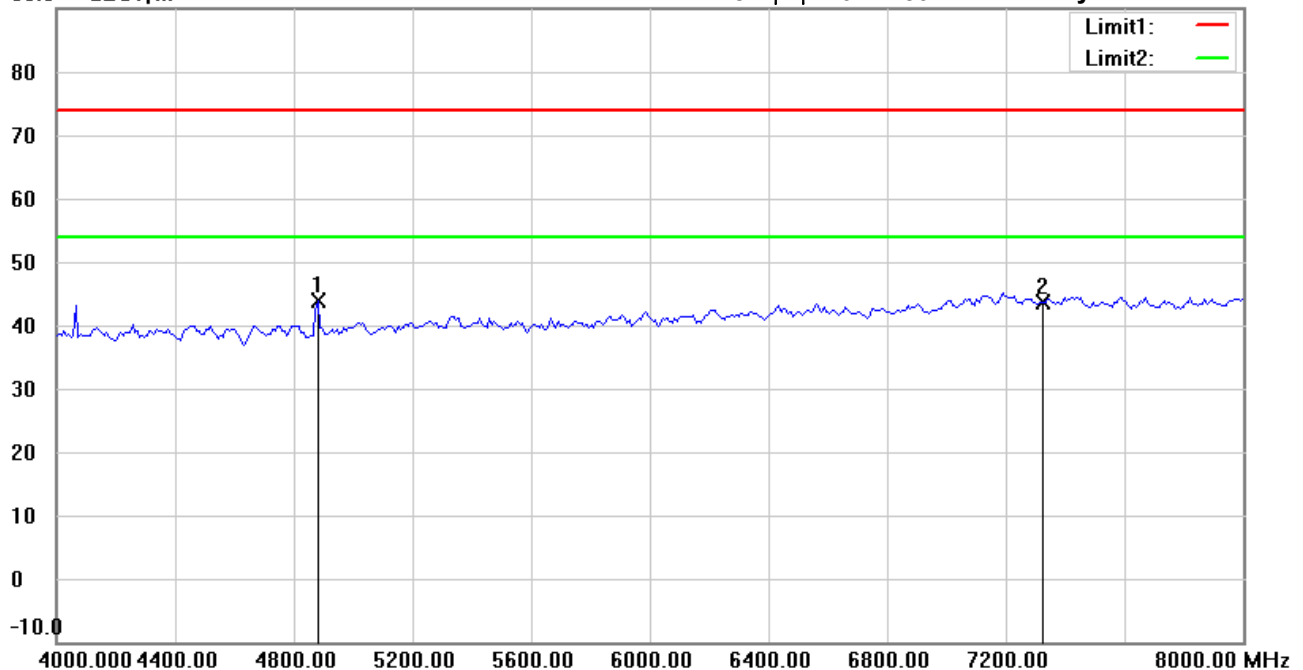

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4880.000	45.17	peak	-1.41	43.76	74.00	150	3	-30.24	
	7320.000	39.90	peak	3.85	43.75	74.00	150	29	-30.25	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:52:05

Humidity: 66.0 %

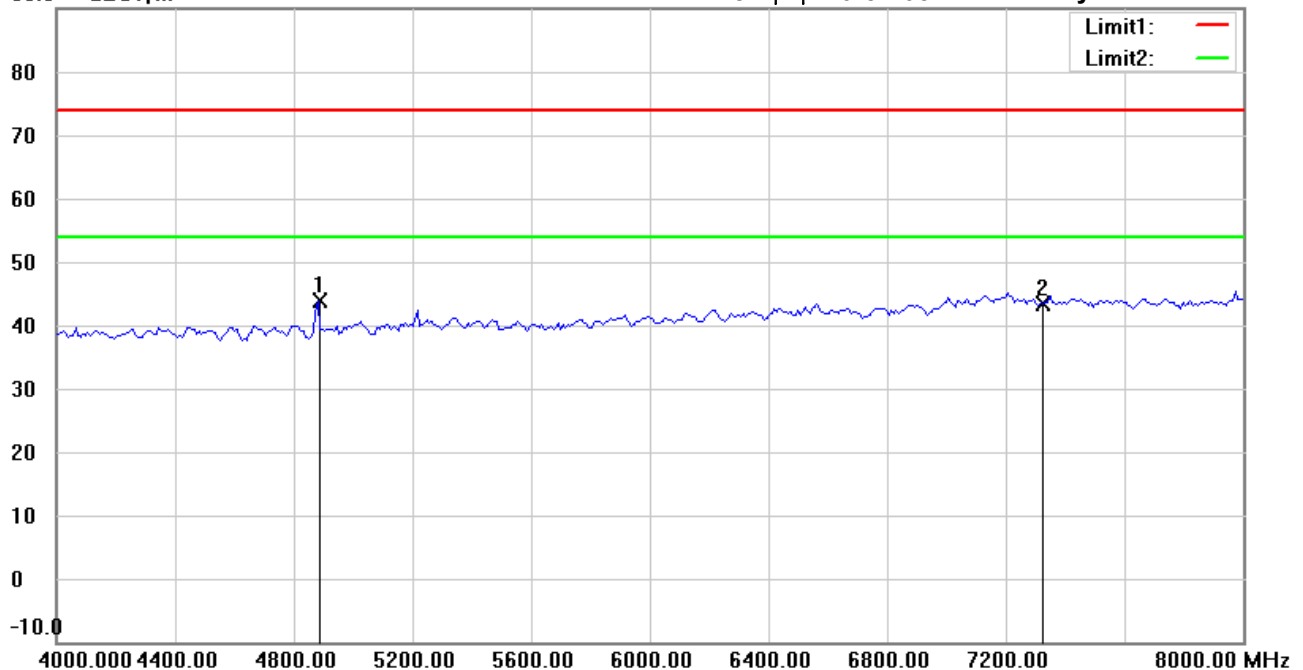

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4881.764	45.21	peak	-1.40	43.81	74.00	150	47	-30.19	
	7320.000	39.45	peak	3.85	43.30	74.00	150	211	-30.70	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:49:39

Humidity:66.0 %

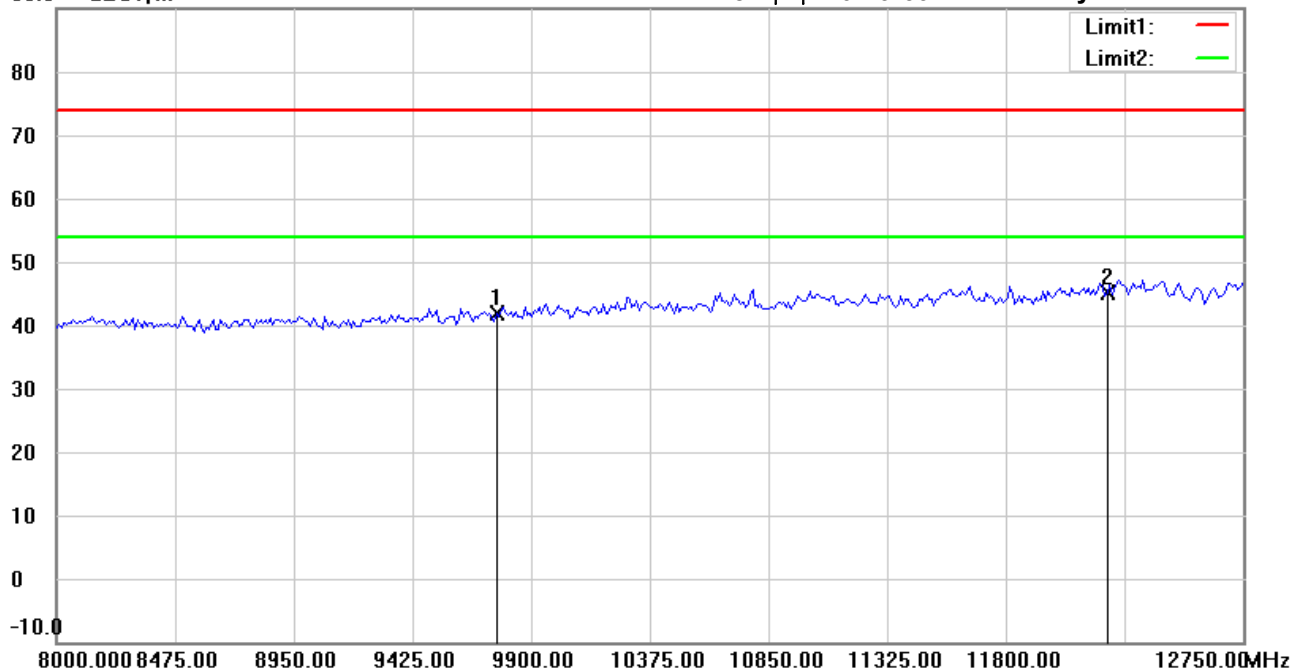

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	34.95	peak	7.02	41.97	74.00	150	202	-32.03	
*	12200.000	31.48	peak	13.60	45.08	74.00	150	14	-28.92	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:53:12

Humidity: 66.0 %

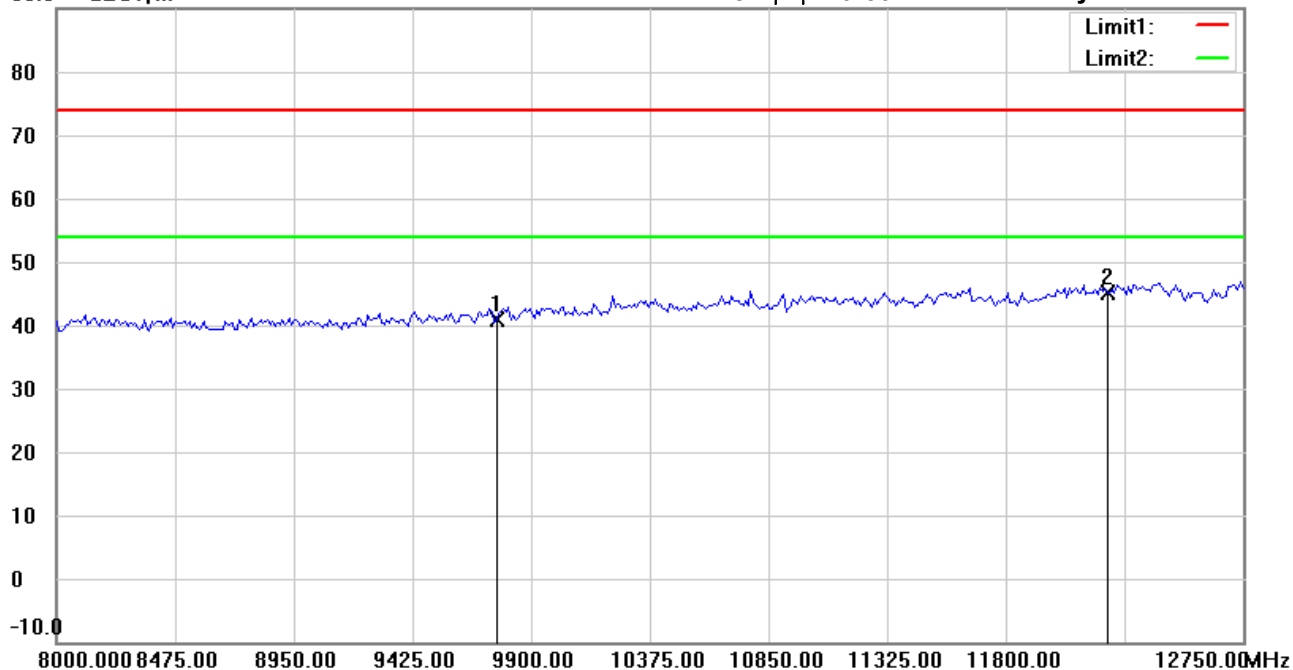

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	33.80	peak	7.02	40.82	74.00	150	24	-33.18	
*	12200.000	31.43	peak	13.60	45.03	74.00	150	71	-28.97	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #4


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:49:53

Humidity: 66.0 %

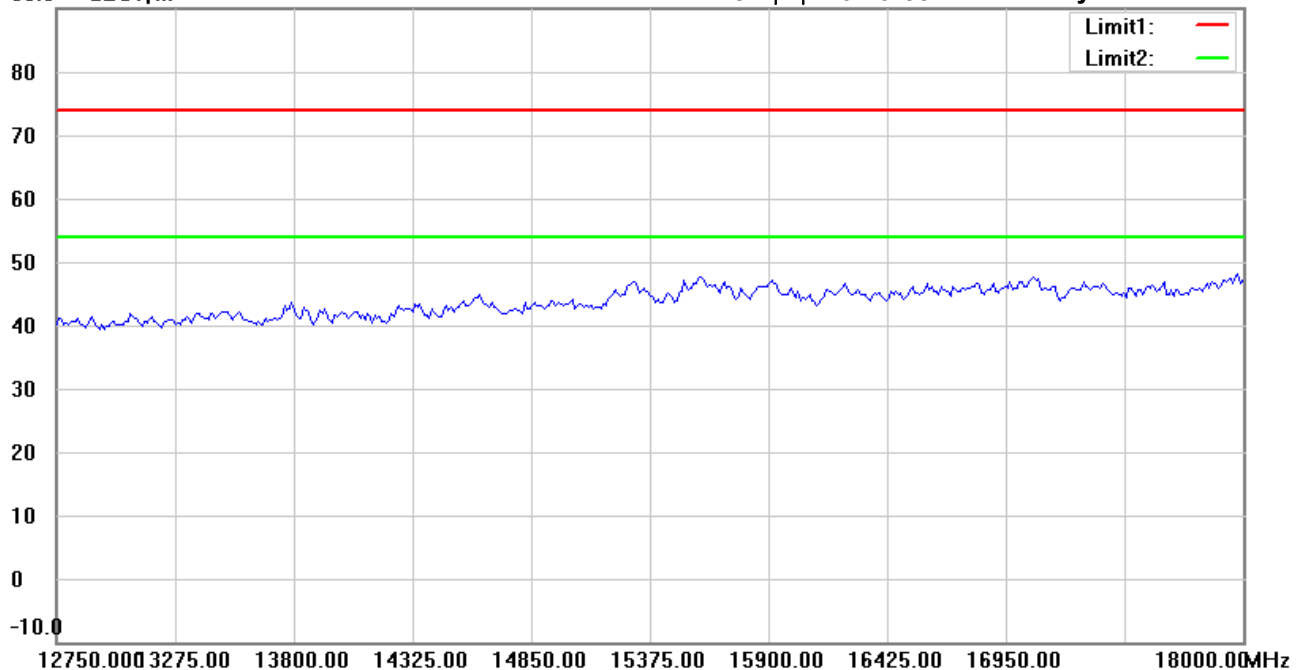

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:53:26

Humidity:66.0 %

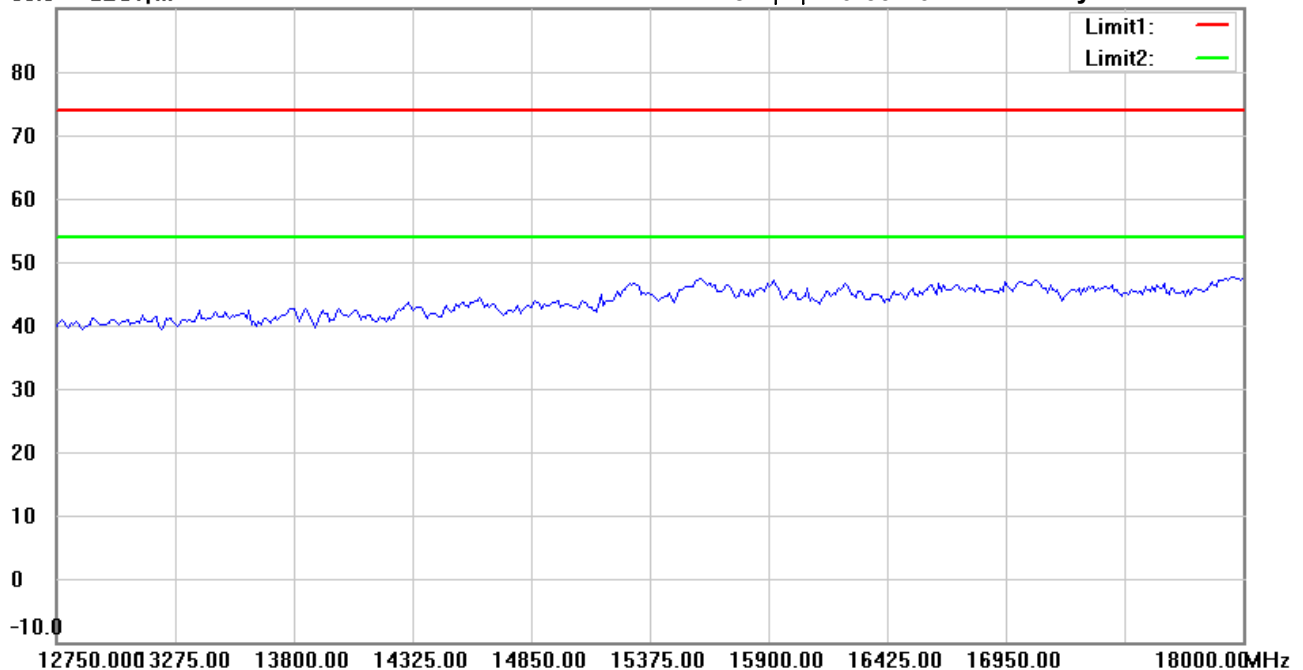

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:50:02

Humidity:66.0 %

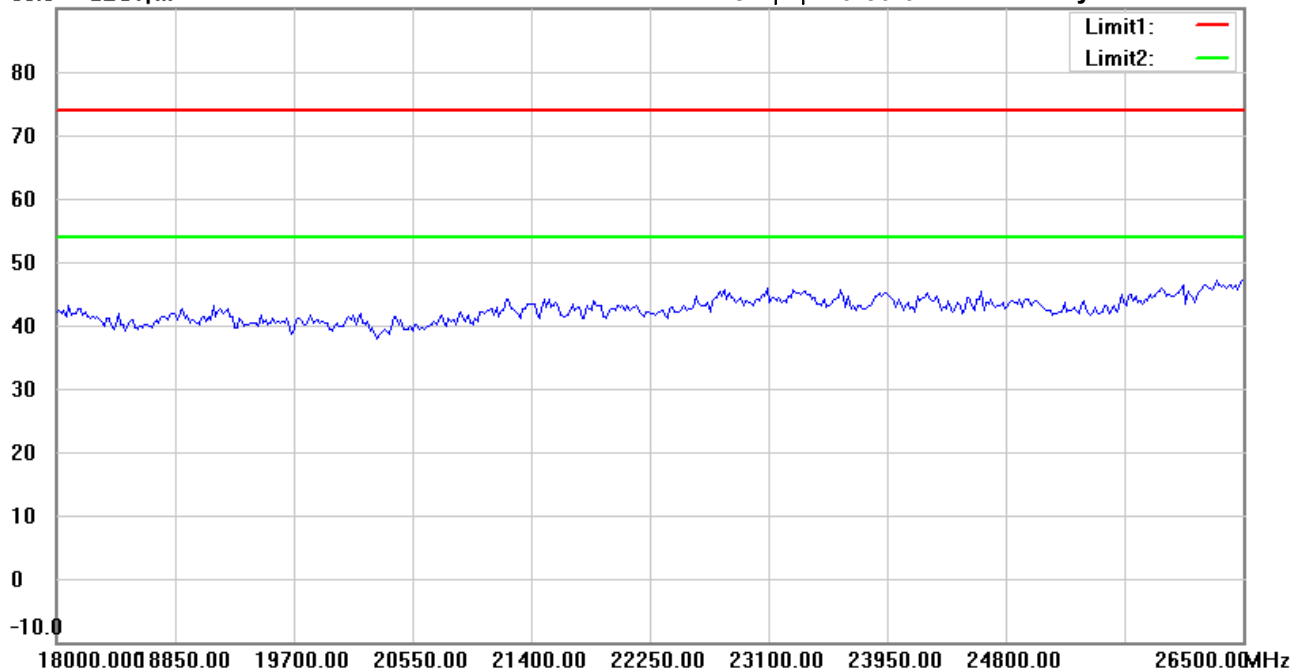

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:53:36

Humidity:66.0 %

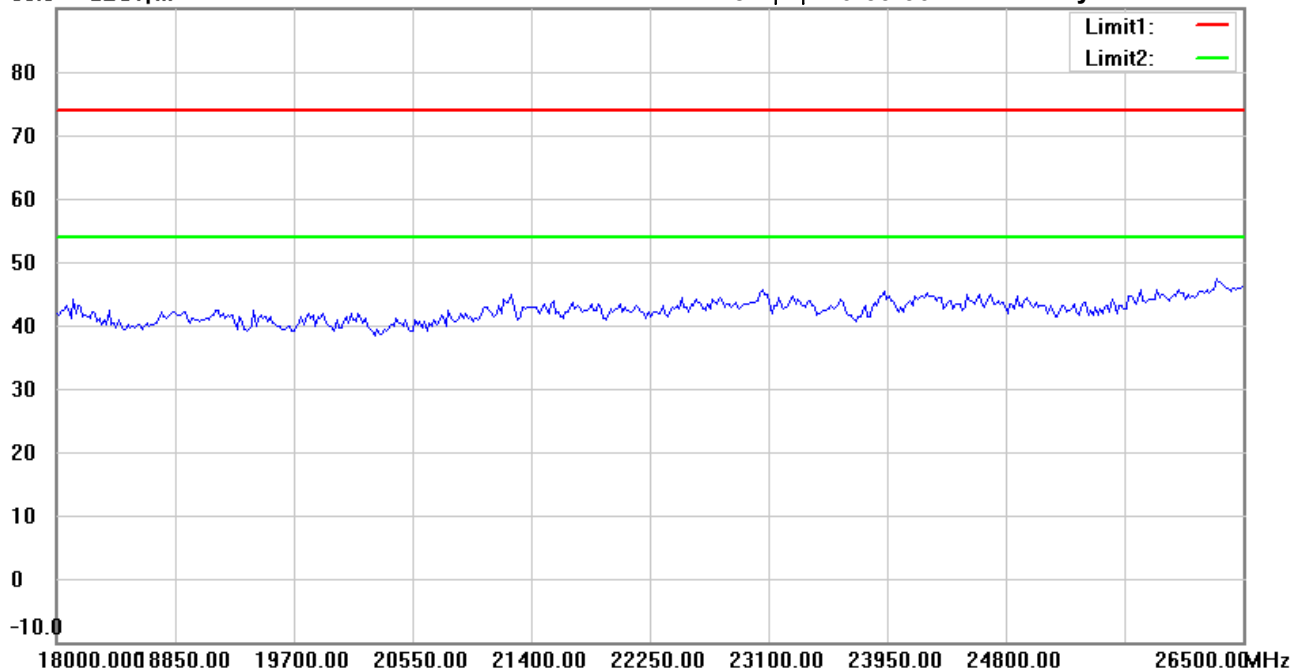

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 10:58:32

Humidity:66.0 %

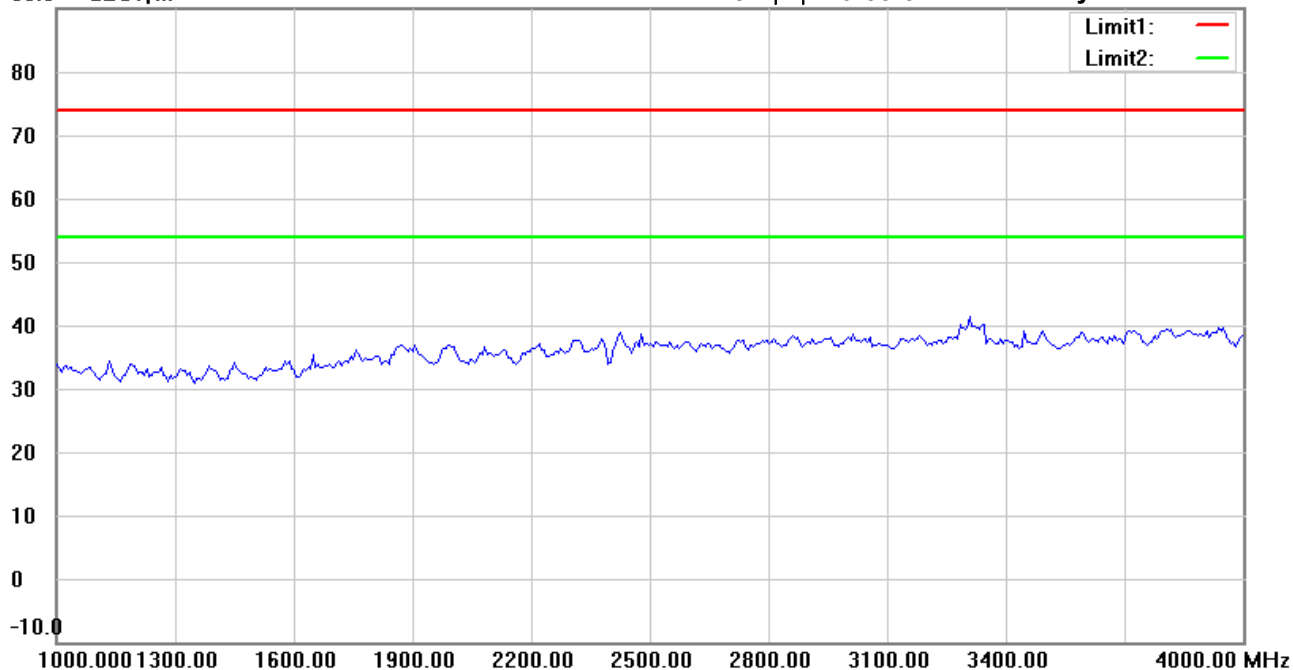

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 11:02:21

Humidity:66.0 %

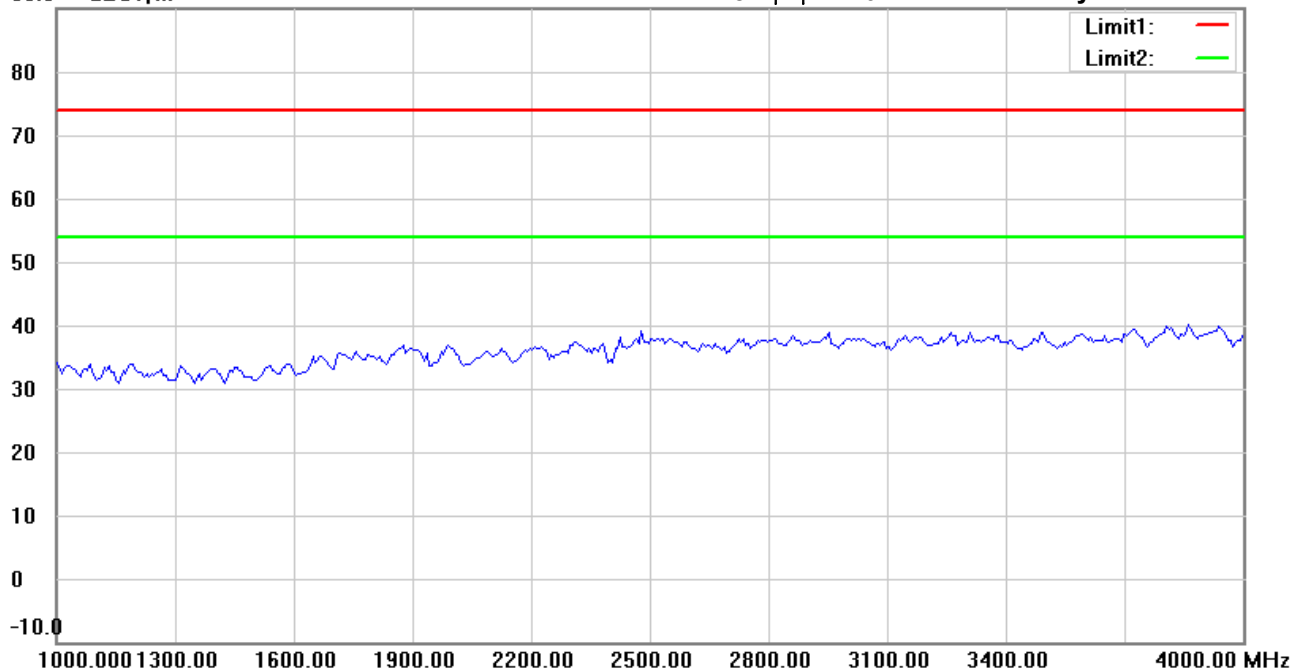

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 10:59:32

Humidity: 66.0 %

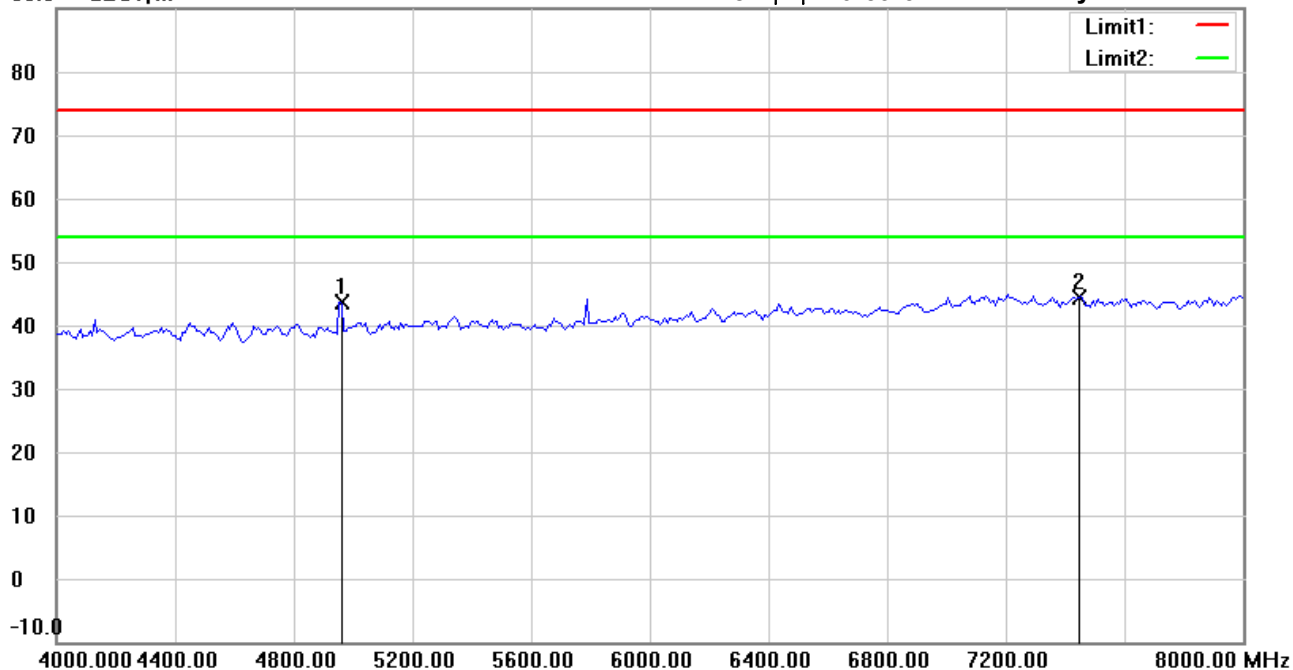

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4953.908	44.52	peak	-0.85	43.67	74.00	150	3	-30.33	
*	7440.000	40.65	peak	3.83	44.48	74.00	150	90	-29.52	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 11:03:22

Humidity: 66.0 %

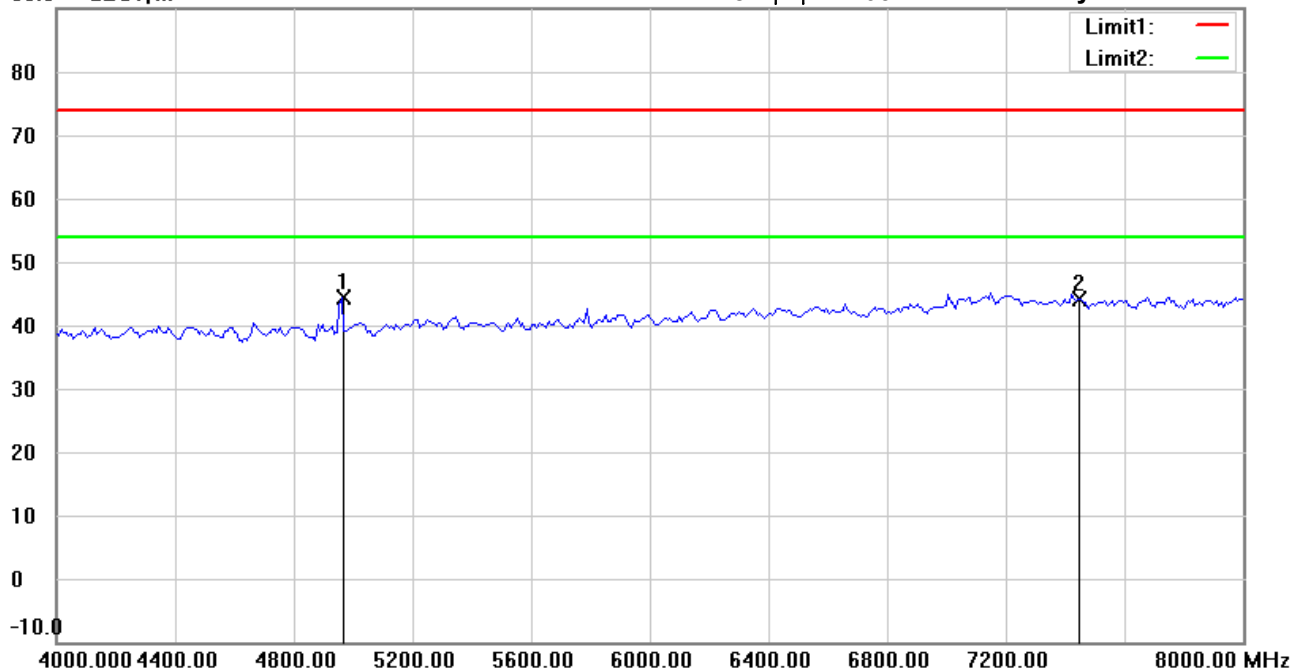

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4961.924	45.11	peak	-0.78	44.33	74.00	150	46	-29.67	
	7440.000	40.40	peak	3.83	44.23	74.00	150	17	-29.77	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/3/20

Temperature: 21.3 °C

90.0 dBuV/m

Time: 下午 11:00:52

Humidity: 66.0 %

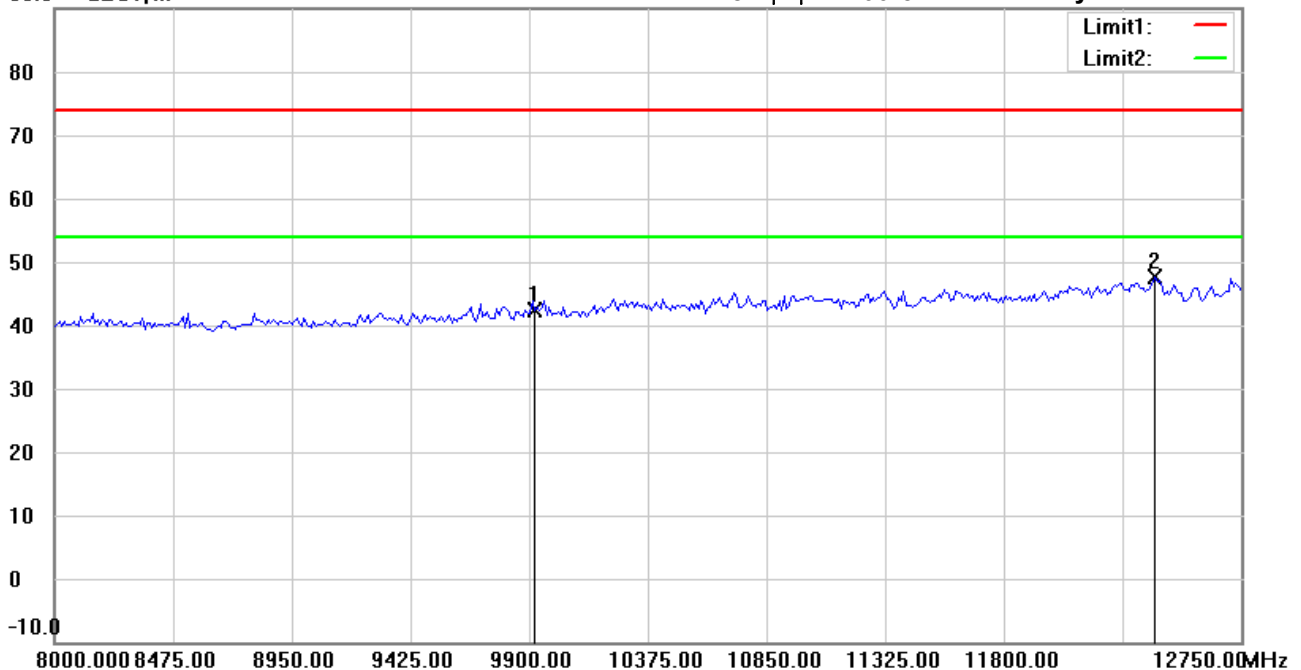

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.83	peak	7.54	42.37	74.00	150	104	-31.63	
*	12400.000	33.82	peak	13.71	47.53	74.00	150	117	-26.47	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 11:05:12

Humidity:66.0 %

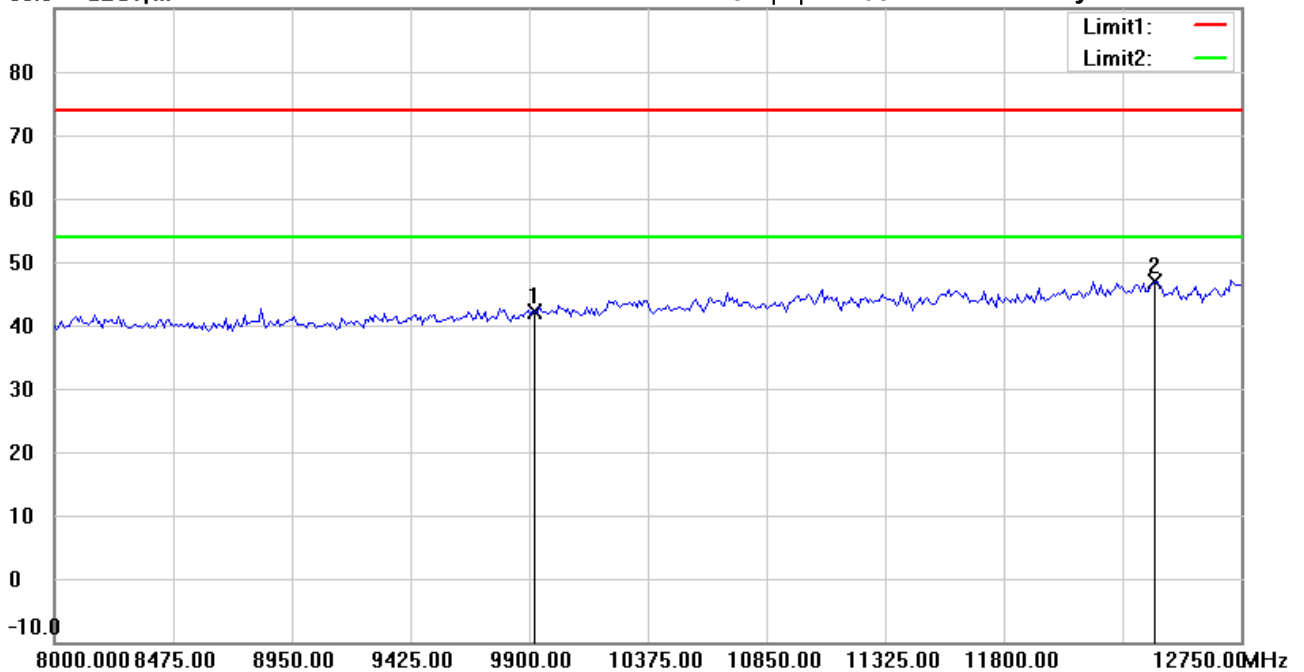

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.54	peak	7.54	42.08	74.00	150	21	-31.92	
*	12400.000	33.09	peak	13.71	46.80	74.00	150	330	-27.20	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 11:01:06

Humidity:66.0 %

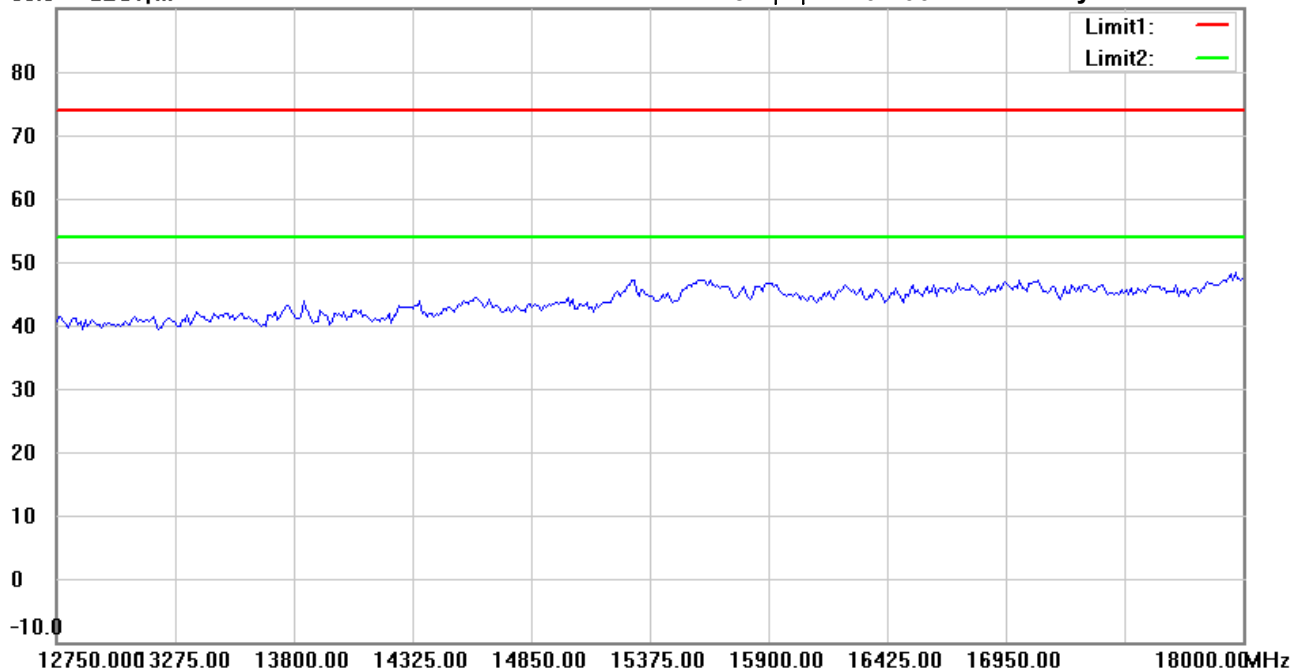

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 11:05:26

Humidity:66.0 %

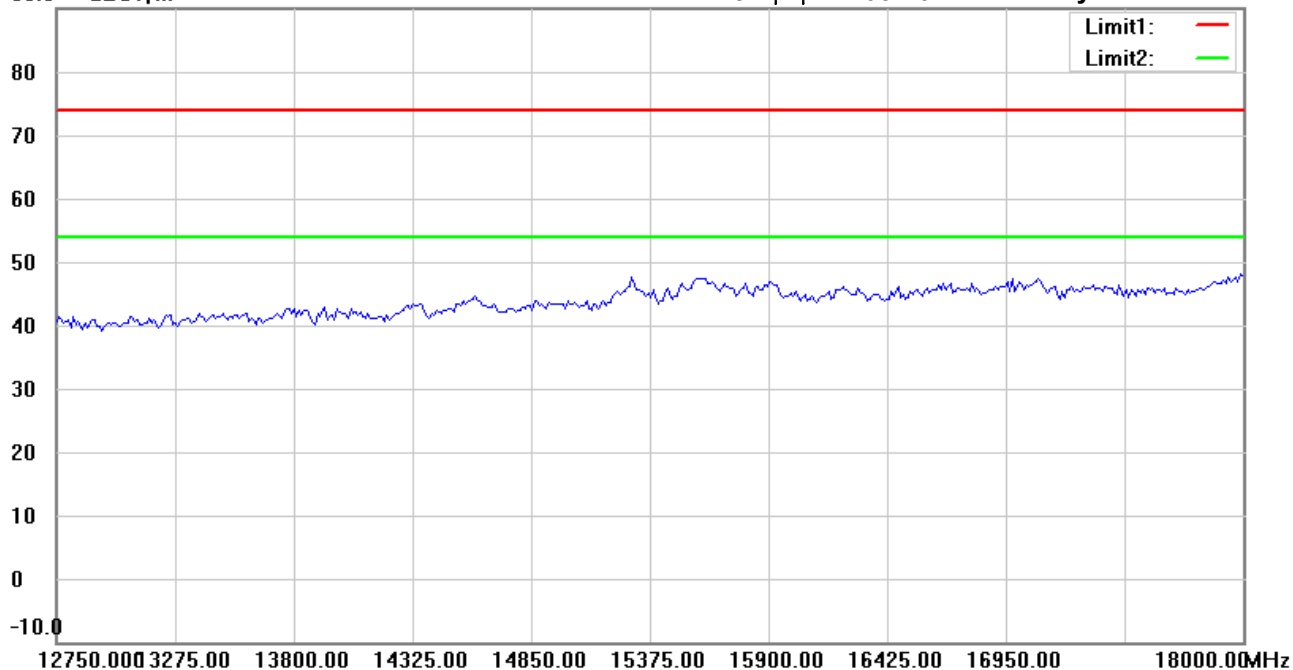

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 11:01:16

Humidity:66.0 %

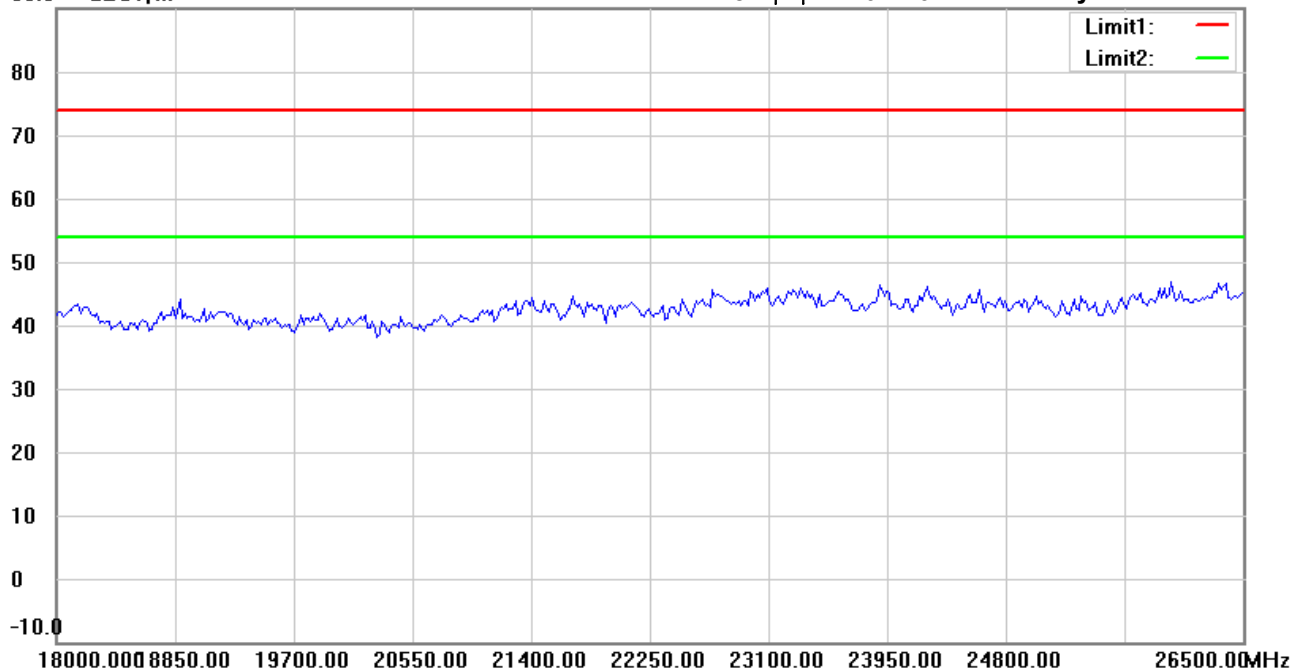

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/3/20

Temperature:21.3 °C

90.0 dBuV/m

Time: 下午 11:05:35

Humidity:66.0 %

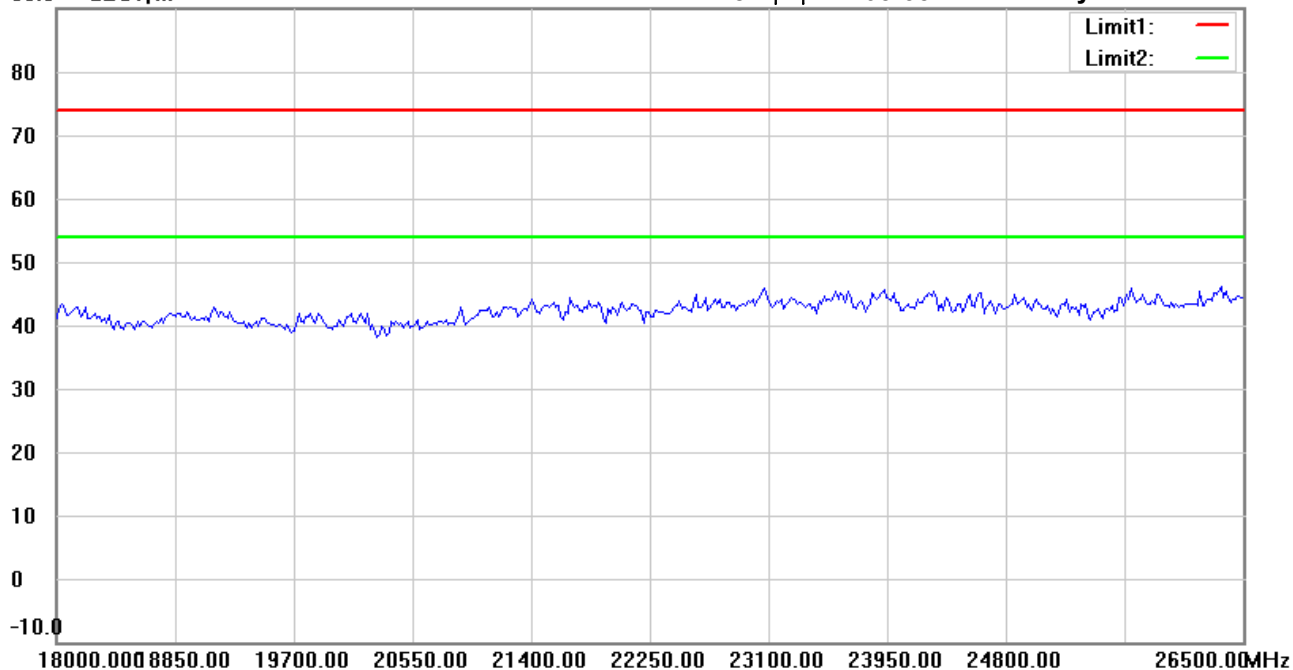

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

File :1_系列-BLE(1M)_TX Radiated Emission Measurement Operator: Eason
Data :#1 Date: 2023/3/21 Temperature:24.1 °C
Time: 上午 02:34:24 Humidity:61.6 %

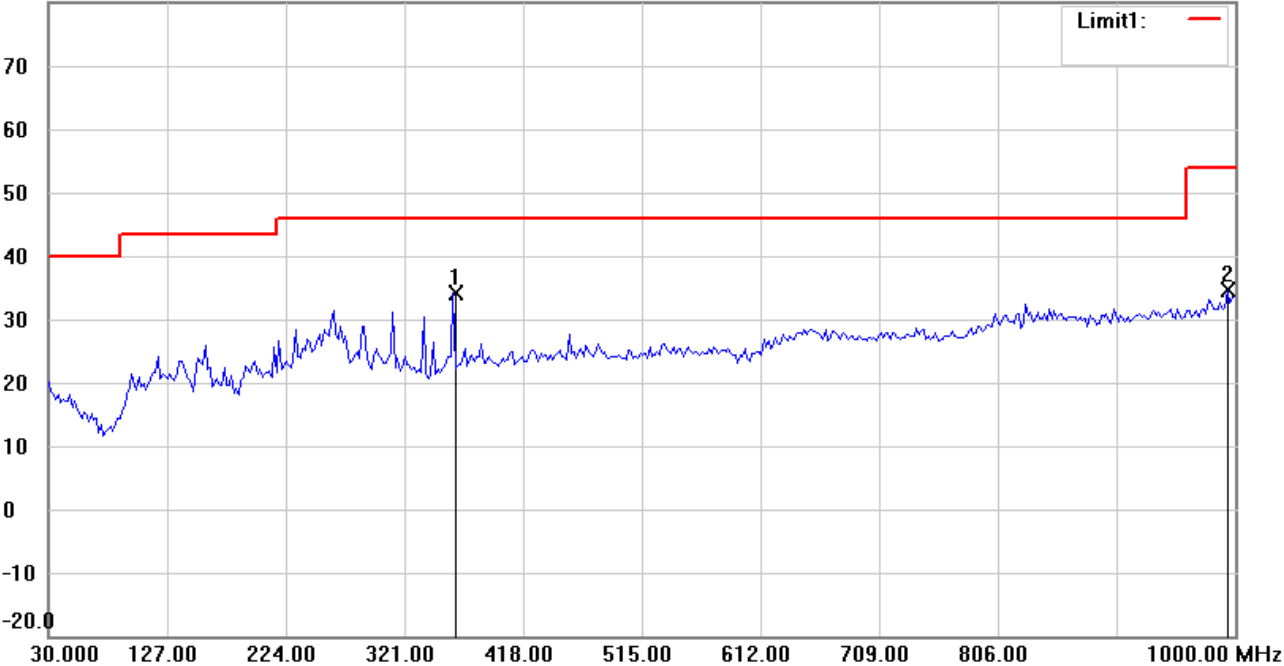

Site : Chamber
Condition : FCC_part 15 RE-Class C_30-1000MHz Polarization: Horizontal
EUT : W6M22302-22477 Power : 120 Va.c.
M/N: Distance: 3m
Test Mode : TX 2402MHz
Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	360.4610	38.89	peak	-4.76	34.13	46.00	150	288	-11.87	
	994.1683	28.47	peak	6.06	34.53	54.00	153	169	-19.47	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :1_系列-BLE(1M)_TX

Data :#2


Date: 2023/3/21

Temperature:24.1 °C

80.0 dBuV/m

Time: 上午 02:35:25

Humidity:61.6 %

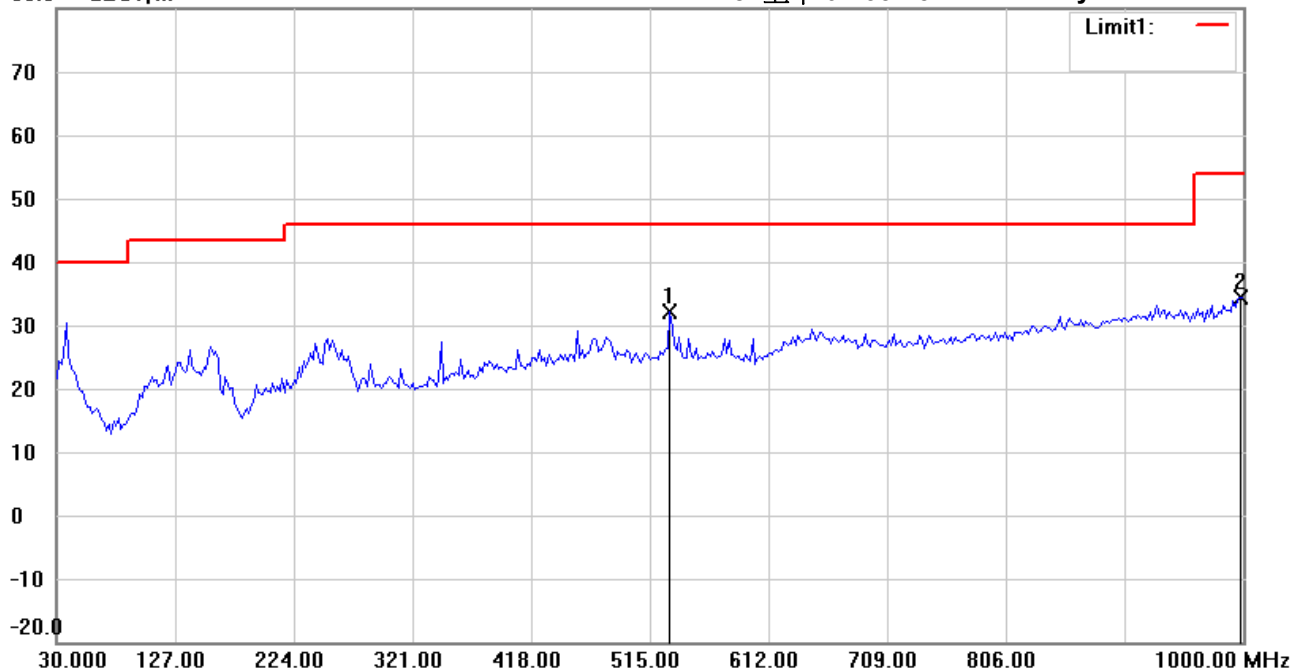

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	531.5230	34.31	peak	-2.20	32.11	46.00	151	184	-13.89	
	998.0561	28.10	peak	6.19	34.29	54.00	156	215	-19.71	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/3/20

Temperature: 21.3 °C

120.0 dBuV/m

Time: 下午 08:24:28

Humidity: 66.0 %

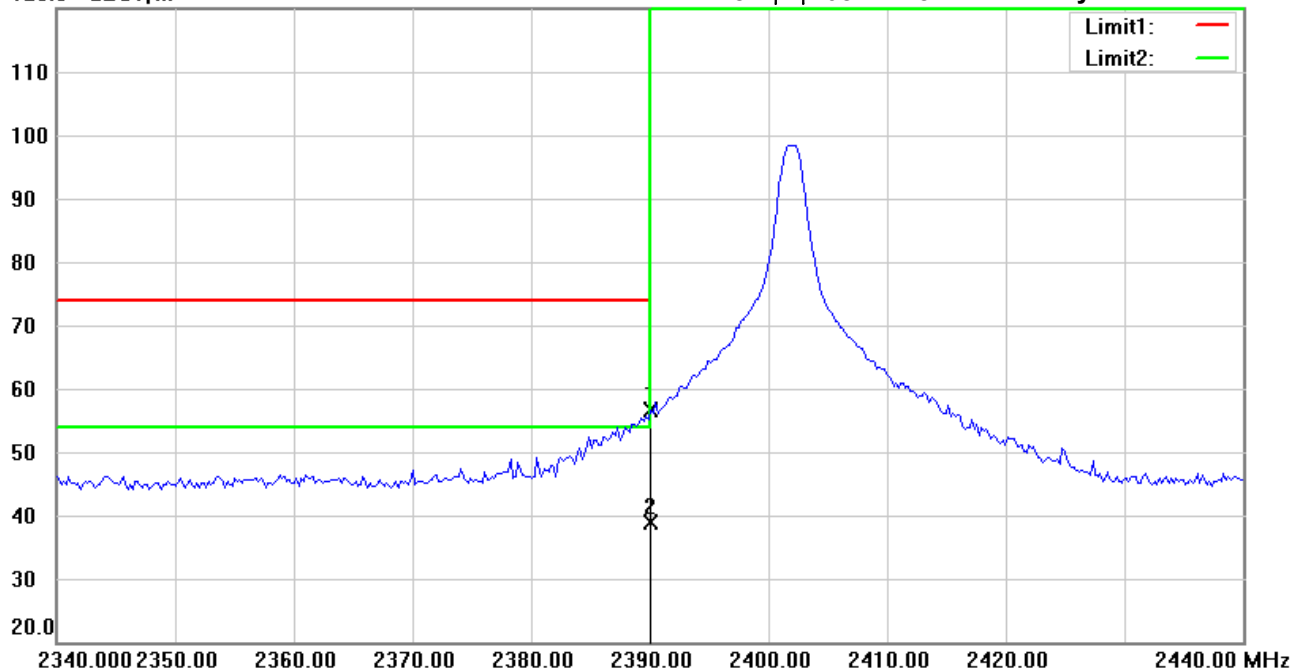

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	19.42	peak	37.11	56.53	74.00	150	160	-17.47	
*	2390.000	1.67	AVG	37.11	38.78	54.00	150	160	-15.22	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

120.0 dBuV/m

Time: 下午 08:27:08

Humidity: 66.0 %

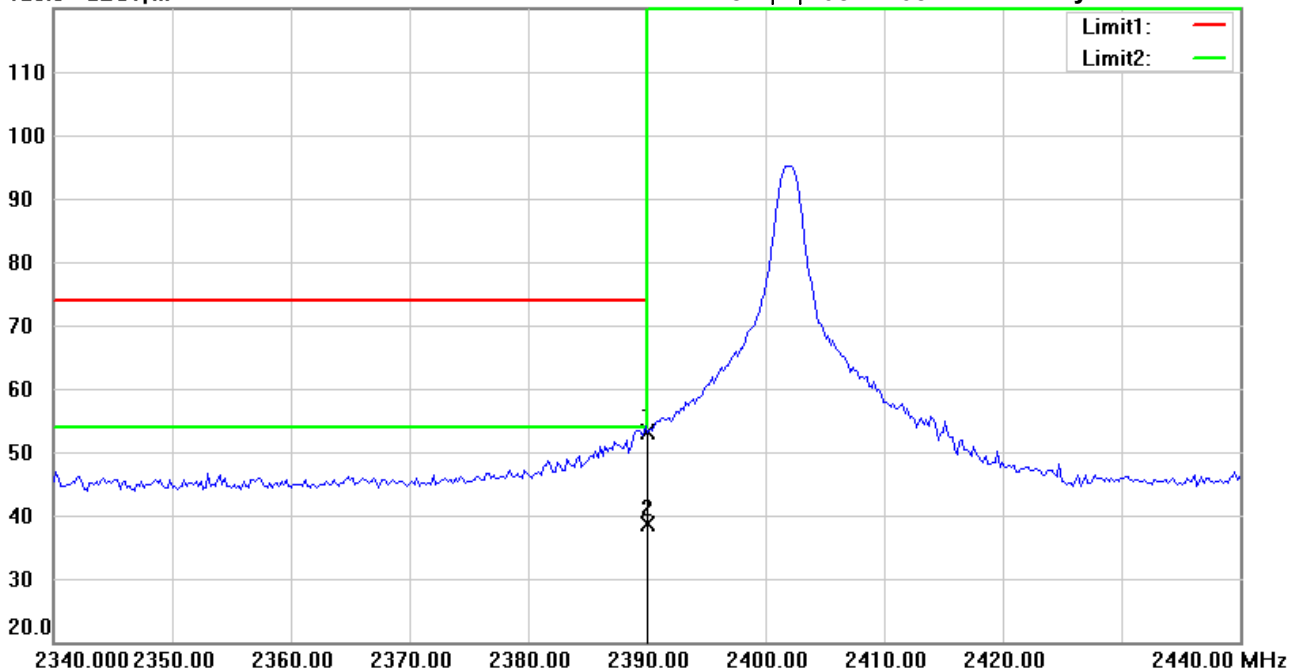

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	16.10	peak	37.11	53.21	74.00	150	359	-20.79	
*	2390.000	1.60	AVG	37.11	38.71	54.00	150	359	-15.29	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/3/20

Temperature: 21.3 °C

120.0 dBuV/m

Time: 下午 09:05:55

Humidity: 66.0 %

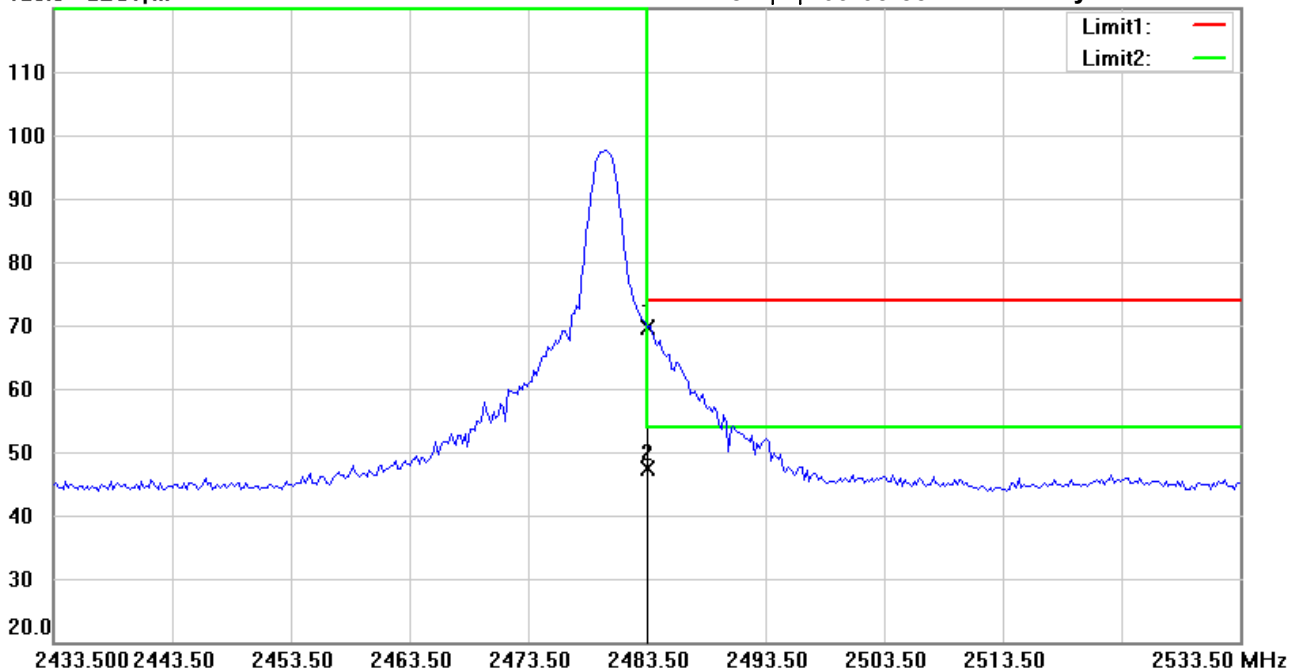

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	31.49	peak	38.14	69.63	74.00	150	170	-4.37	
	2483.500	9.30	AVG	38.14	47.44	54.00	150	170	-6.56	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

120.0 dBuV/m

Time: 下午 09:08:38

Humidity: 66.0 %

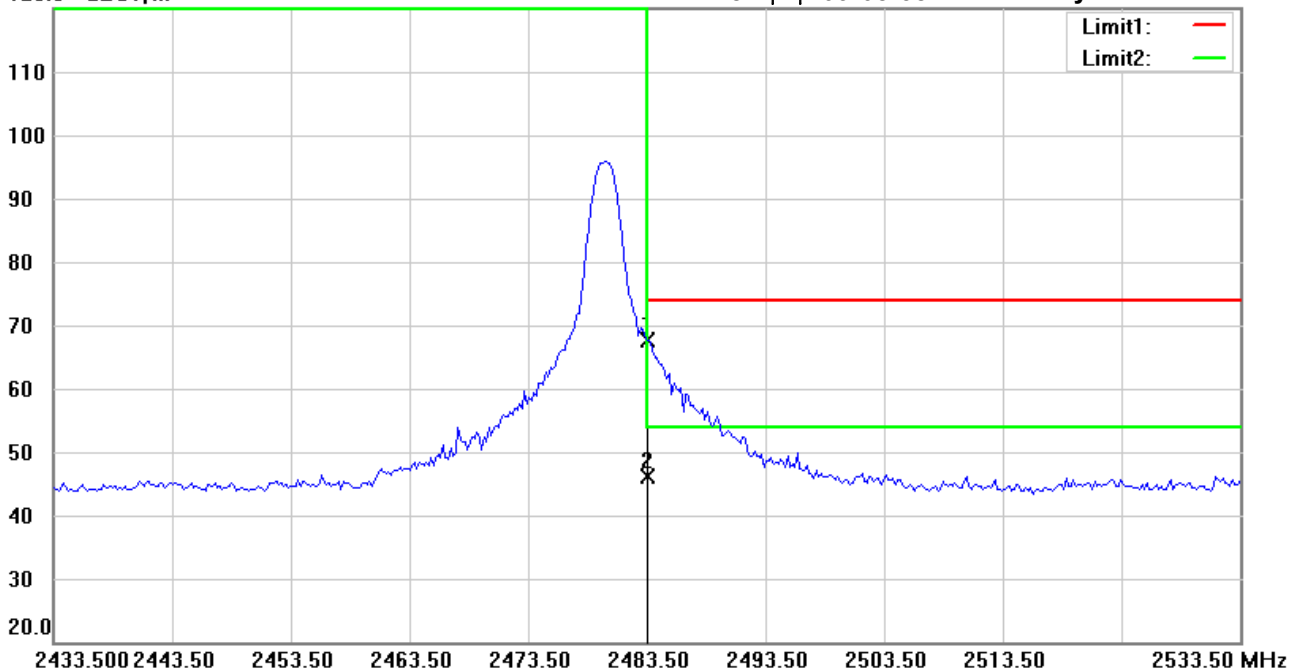

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	29.49	peak	38.14	67.63	74.00	150	170	-6.37	
	2483.500	7.91	AVG	38.14	46.05	54.00	150	170	-7.95	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/3/20

Temperature: 21.3 °C

120.0 dBuV/m

Time: 下午 08:30:57

Humidity: 66.0 %

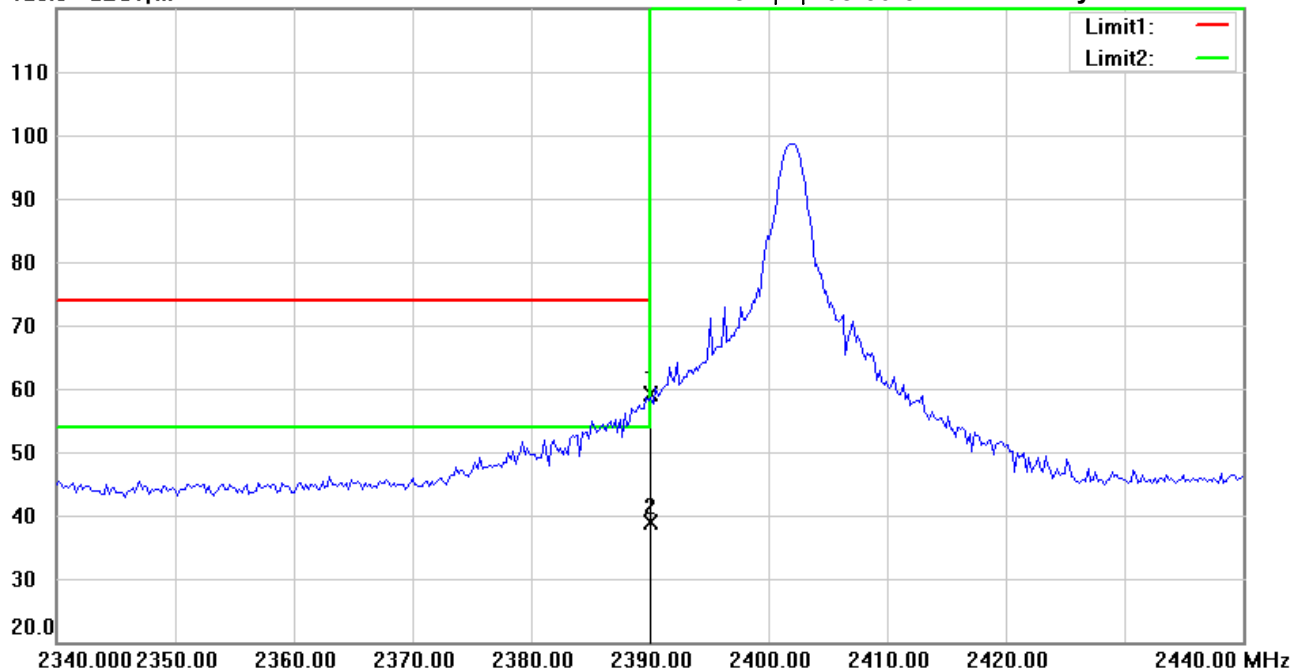

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2390.000	21.92	peak	37.11	59.03	74.00	150	160	-14.97	
	2390.000	1.74	AVG	37.11	38.85	54.00	150	160	-15.15	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/3/20

Temperature:21.3 °C

120.0 dBuV/m

Time: 下午 08:34:22

Humidity:66.0 %

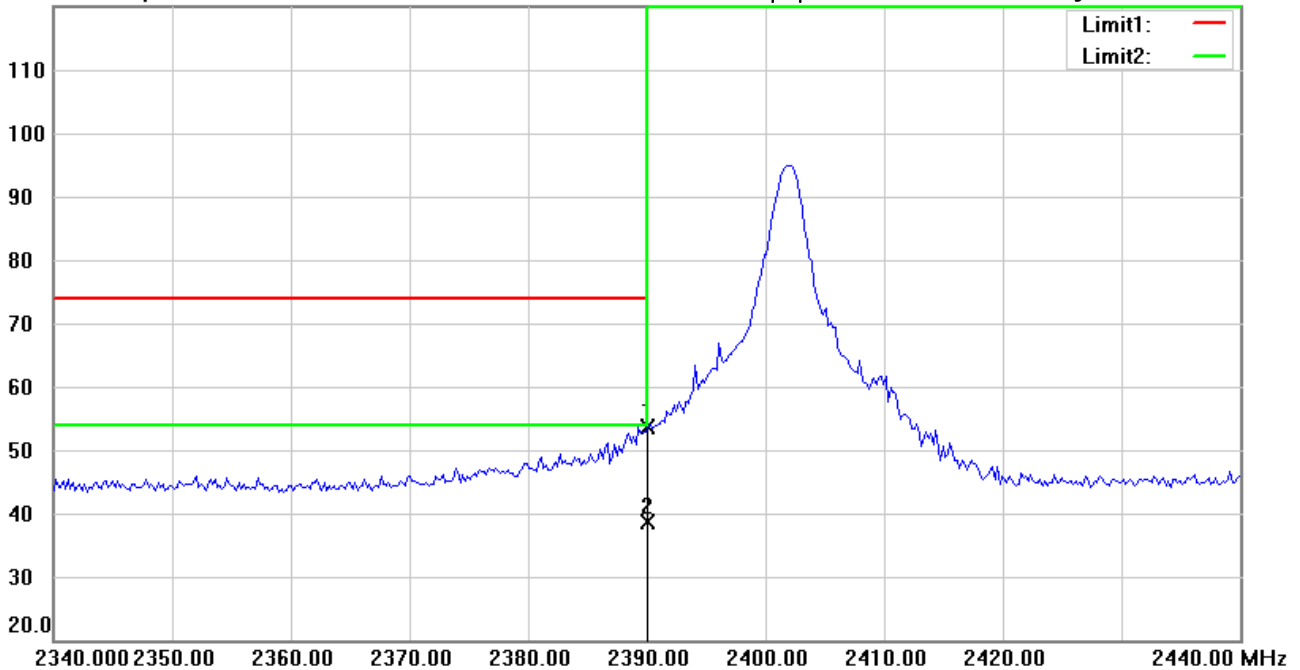

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	16.54	peak	37.11	53.65	74.00	150	360	-20.35	
*	2390.000	1.59	AVG	37.11	38.70	54.00	150	360	-15.30	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/3/20

Temperature: 21.3 °C

120.0 dBuV/m

Time: 下午 08:57:12

Humidity: 66.0 %

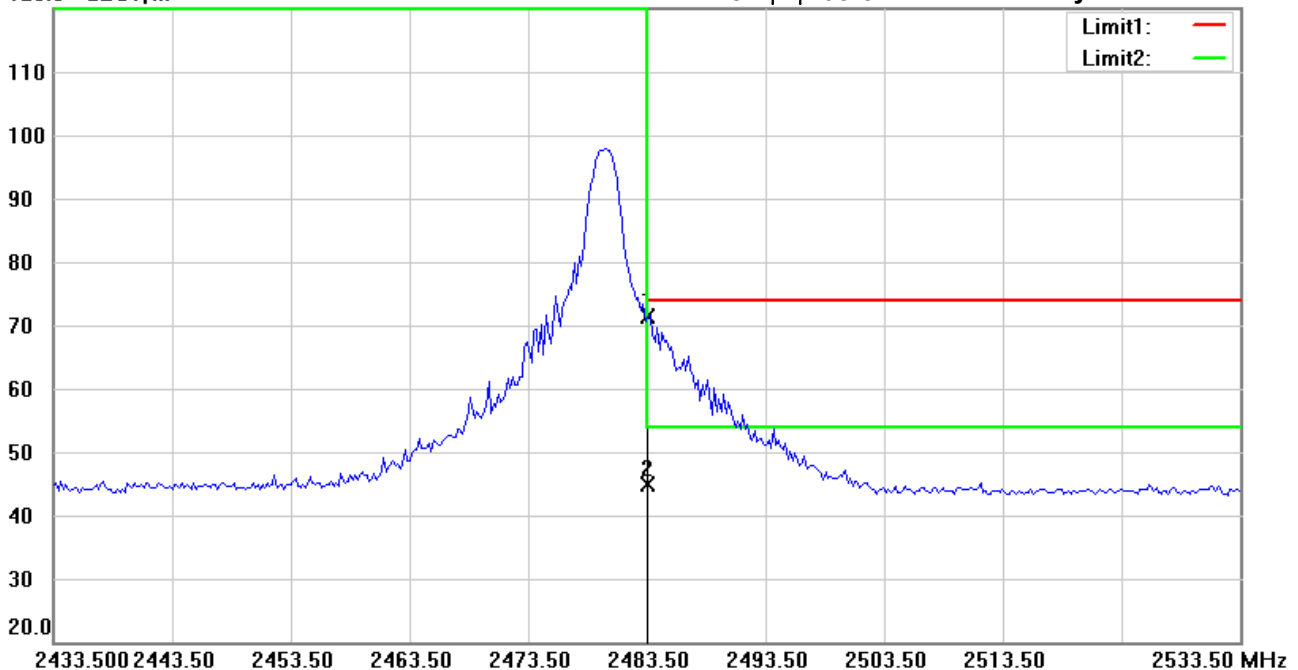

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

Polarization: **Horizontal**

EUT : W6M22302-22477

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	33.17	peak	38.14	71.31	74.00	180	165	-2.69	
	2483.500	6.85	AVG	38.14	44.99	54.00	180	165	-9.01	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 2023/3/20

Temperature: 21.3 °C

120.0 dBuV/m

Time: 下午 09:01:25

Humidity: 66.0 %

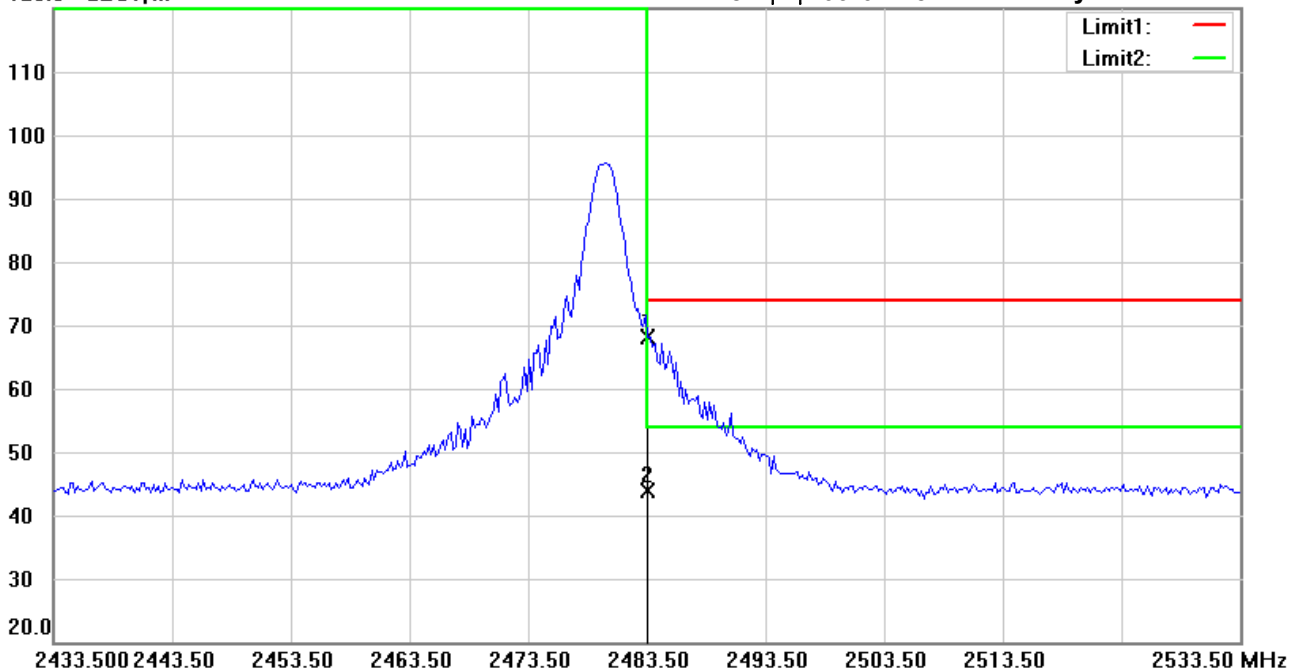

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

Polarization: Vertical

EUT : W6M22302-22477

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	29.88	peak	38.14	68.02	74.00	150	170	-5.98	
	2483.500	5.81	AVG	38.14	43.95	54.00	150	170	-10.05	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#1


Date: 2023/3/20

Temperature:21.3 °C

120.0 dBuV/m

Time: 下午 08:37:34

Humidity:66.0 %

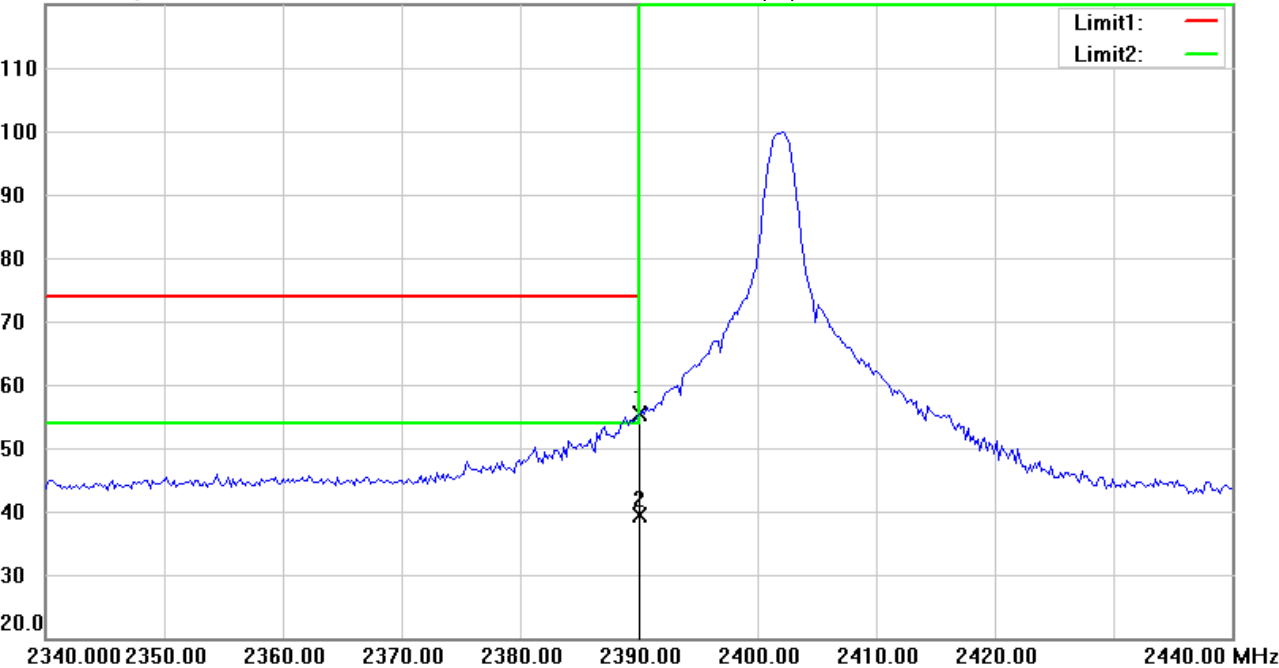

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	18.36	peak	37.11	55.47	74.00	150	160	-18.53	
*	2390.000	2.18	AVG	37.11	39.29	54.00	150	160	-14.71	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/3/20

Temperature:21.3 °C

120.0 dBuV/m

Time: 下午 08:41:07

Humidity:66.0 %

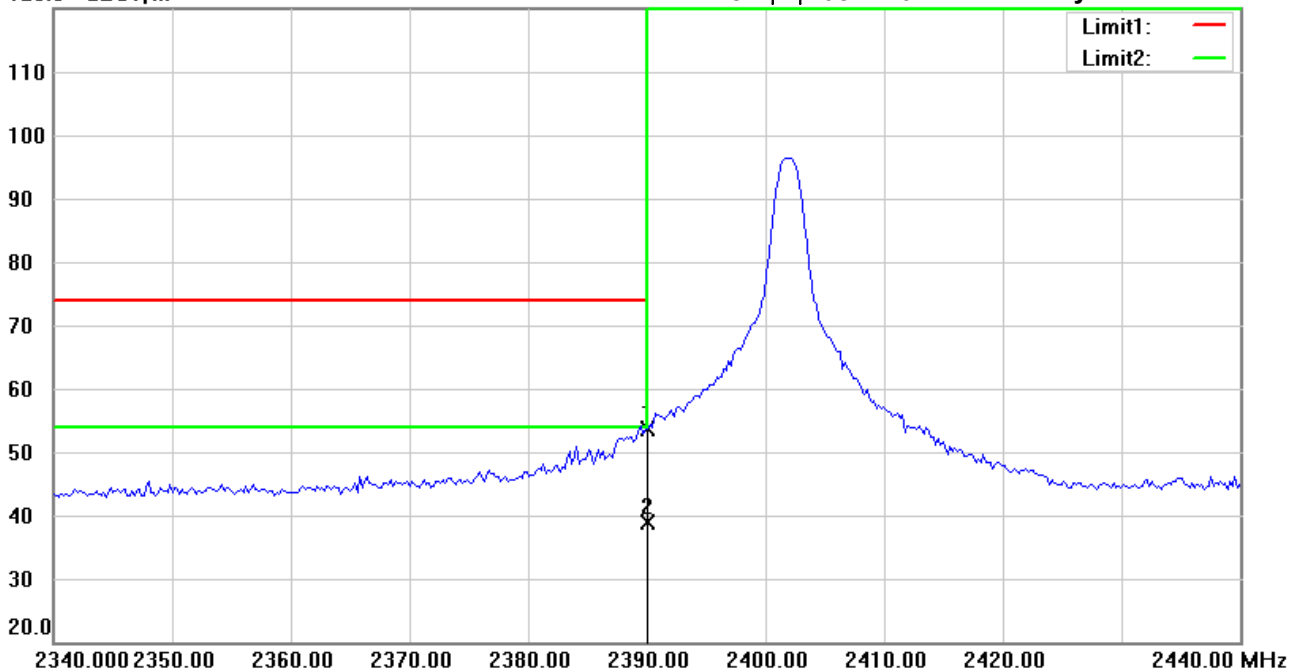

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	16.43	peak	37.11	53.54	74.00	150	360	-20.46	
*	2390.000	1.77	AVG	37.11	38.88	54.00	150	360	-15.12	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/3/20

Temperature: 21.3 °C

120.0 dBuV/m

Time: 下午 08:49:19

Humidity: 66.0 %

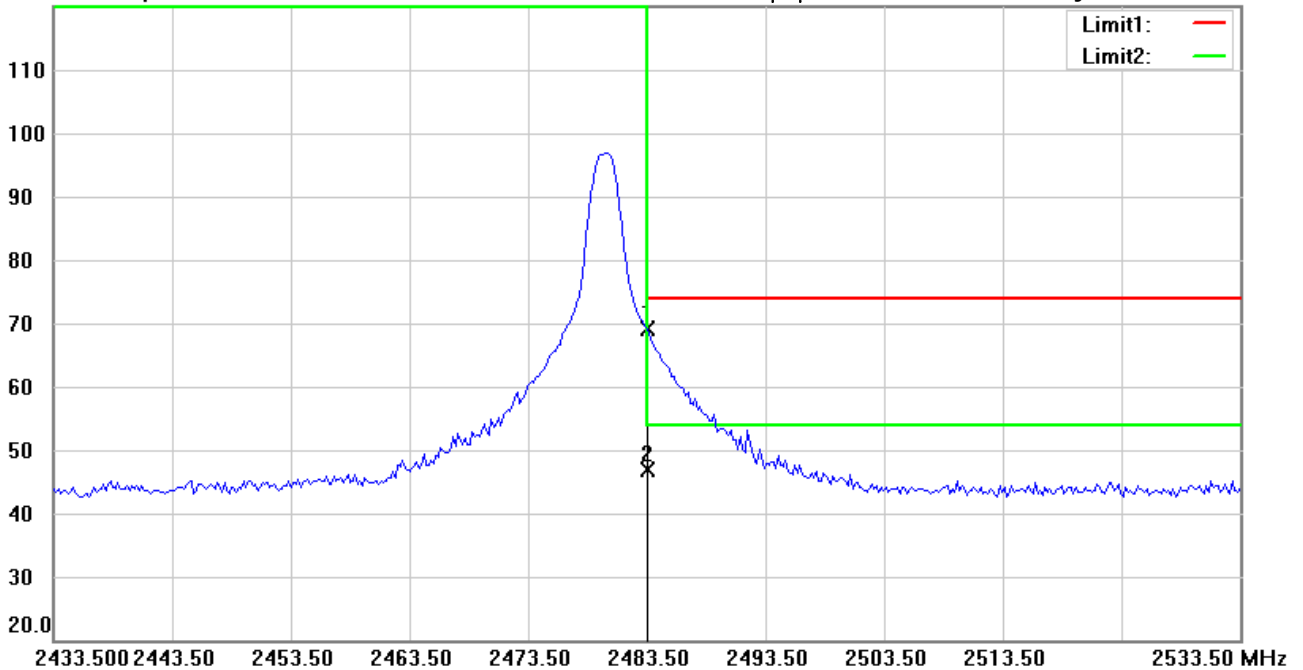

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22302-22477

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	31.10	peak	38.14	69.24	74.00	214	170	-4.76	
	2483.500	8.76	AVG	38.14	46.90	54.00	214	170	-7.10	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/3/20

Temperature:21.3 °C

120.0 dBuV/m

Time: 下午 08:52:25

Humidity:66.0 %

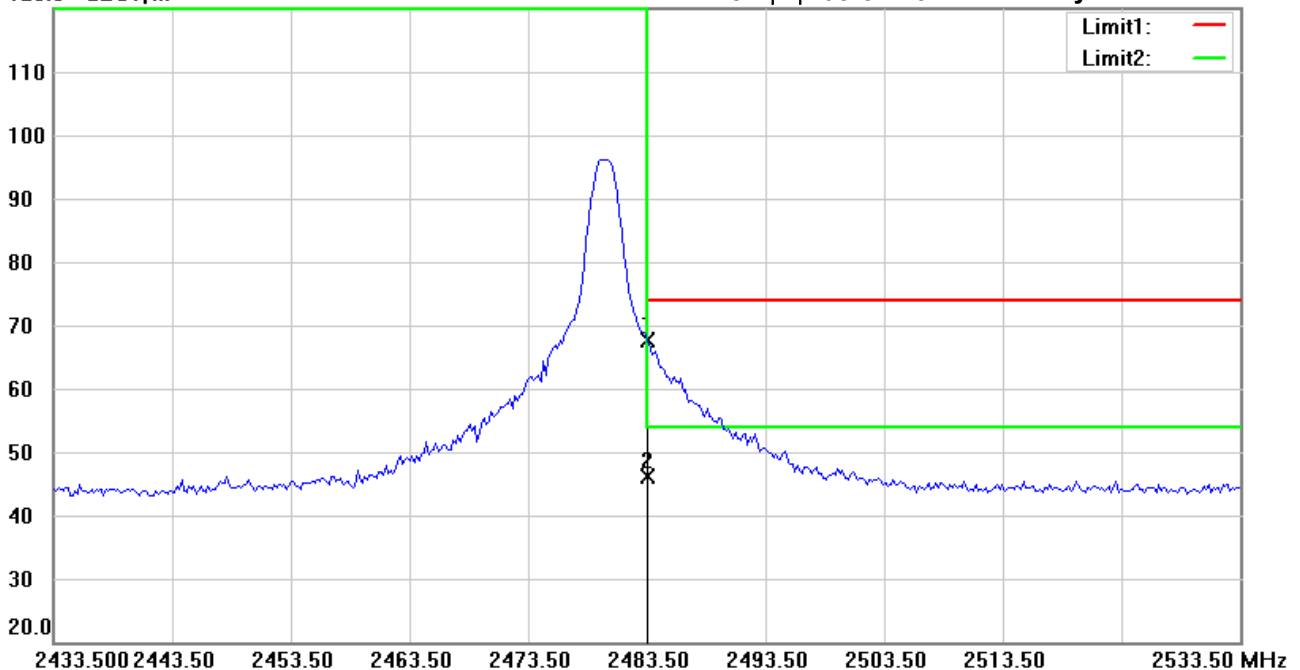

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

Polarization: **Vertical**

EUT : W6M22302-22477

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	29.43	peak	38.14	67.57	74.00	150	179	-6.43	
	2483.500	8.01	AVG	38.14	46.15	54.00	150	179	-7.85	

*:Maximum data x:Over limit !:over margin