






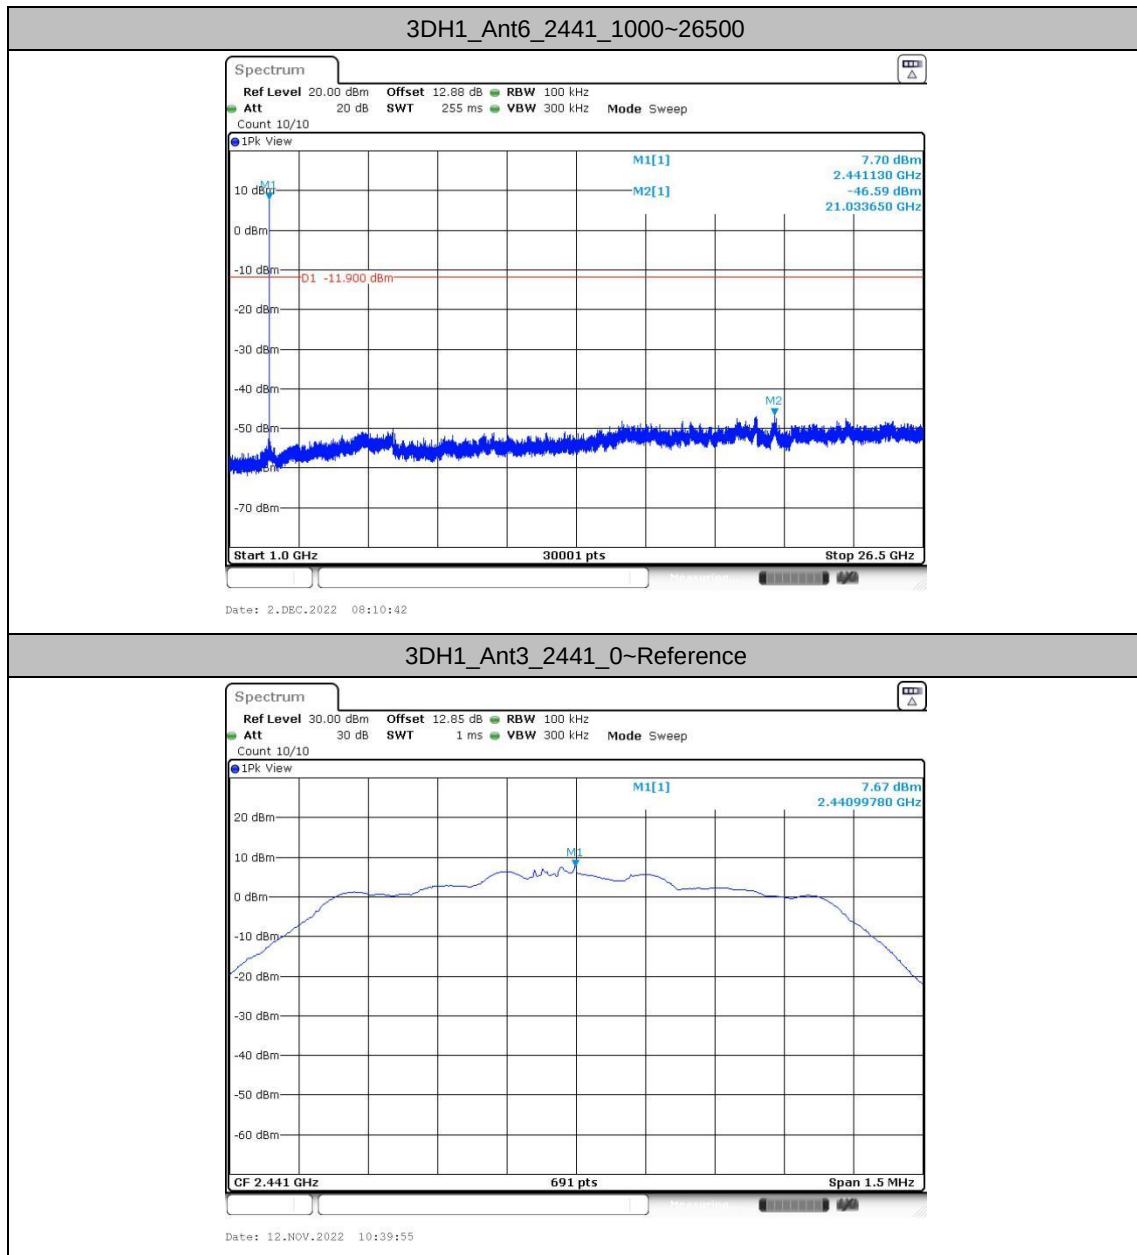

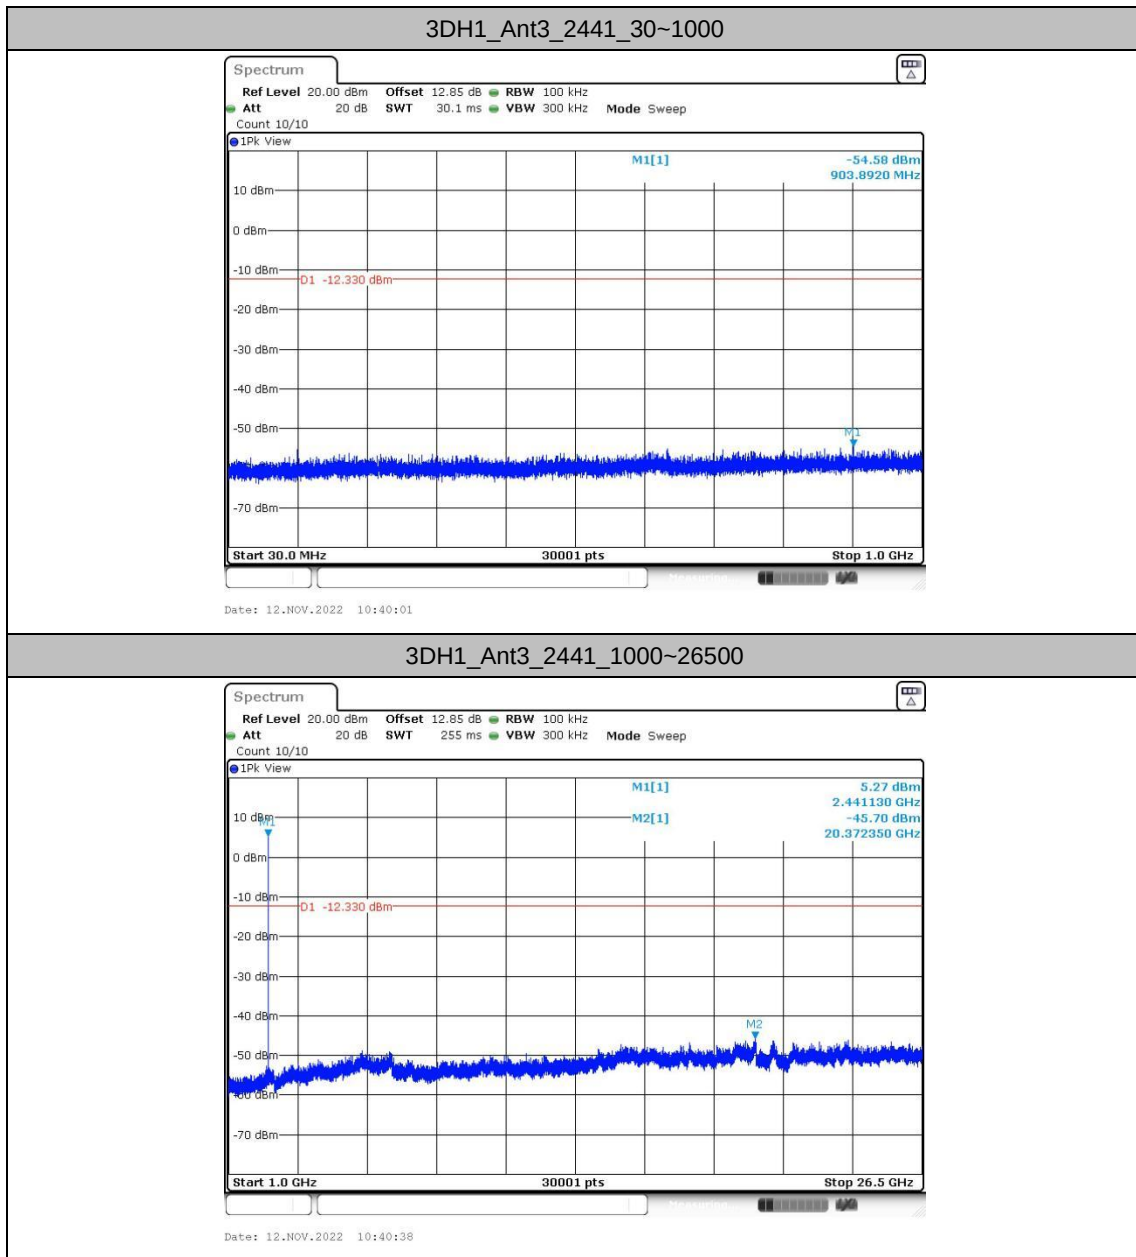

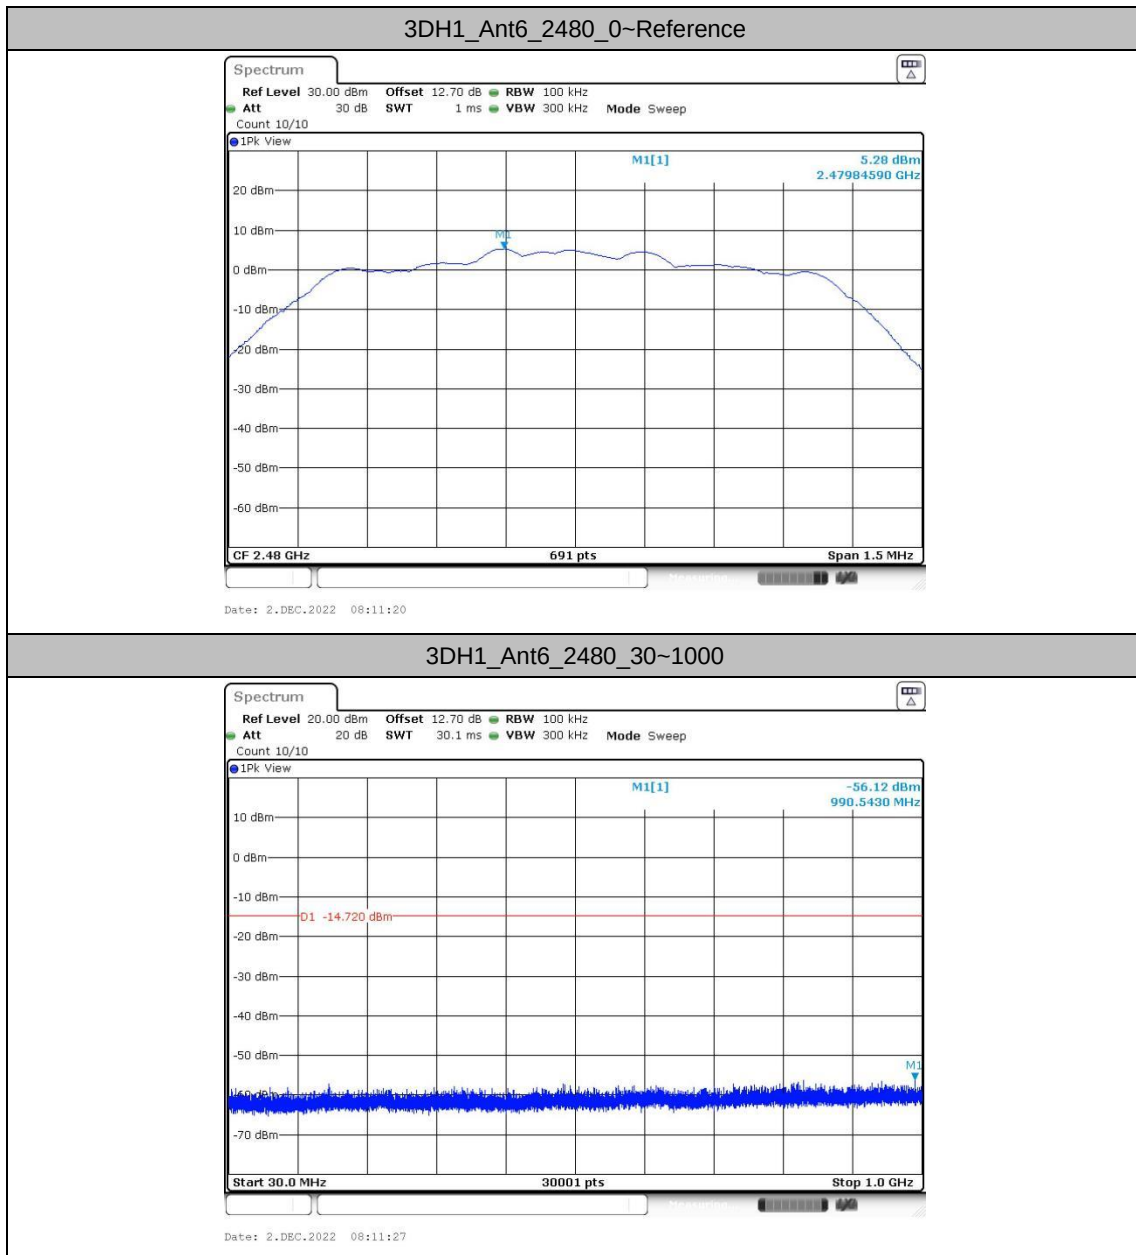


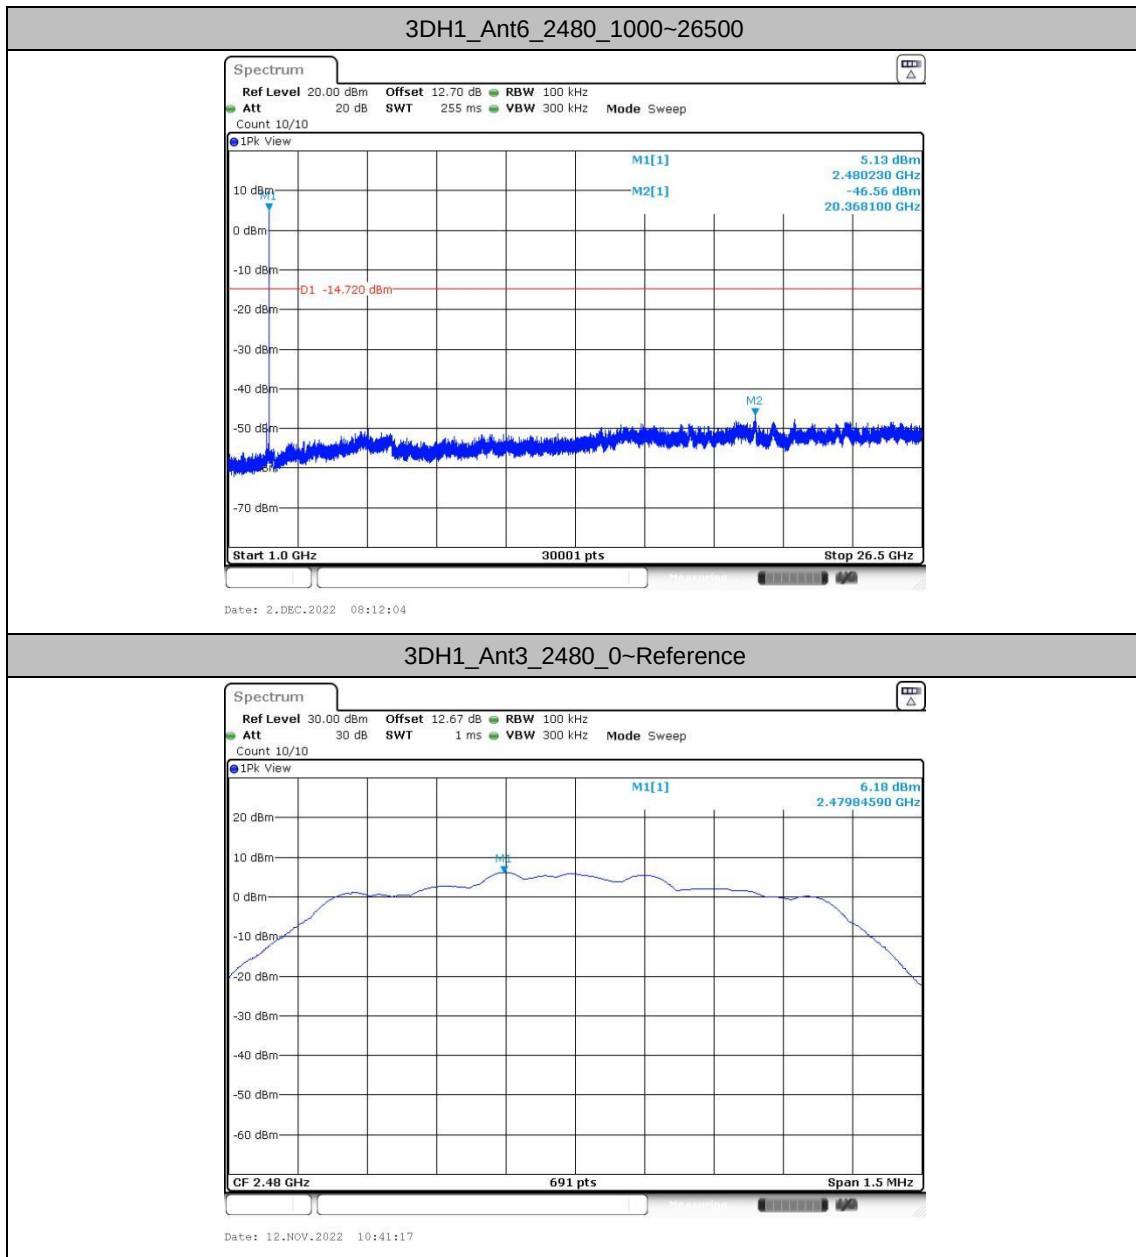

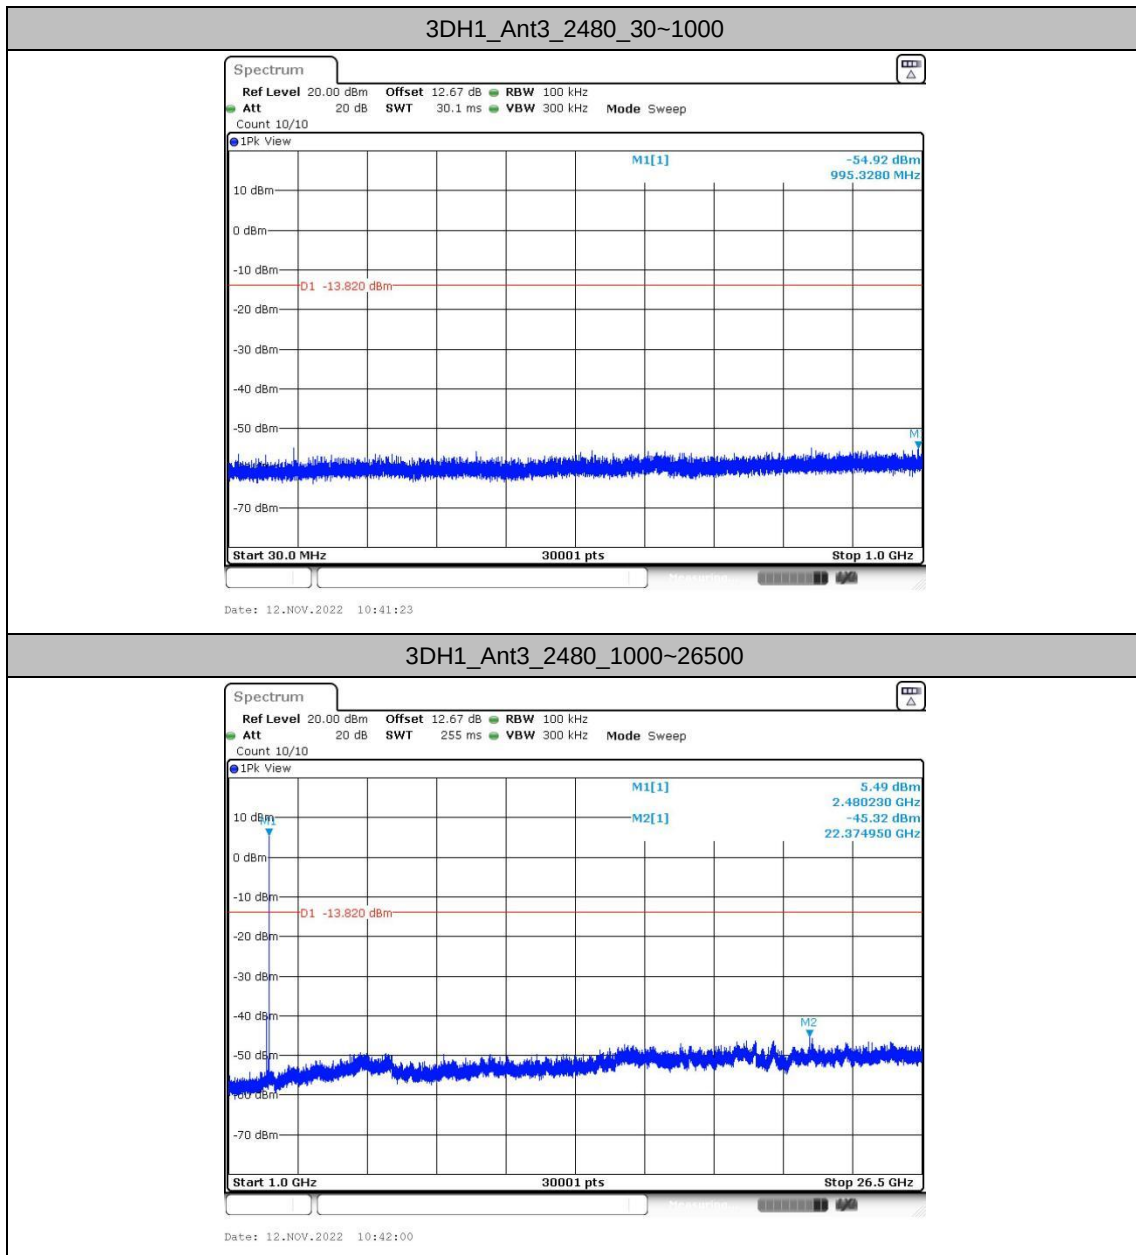




Appendix B. AC Conducted Emission Test Results

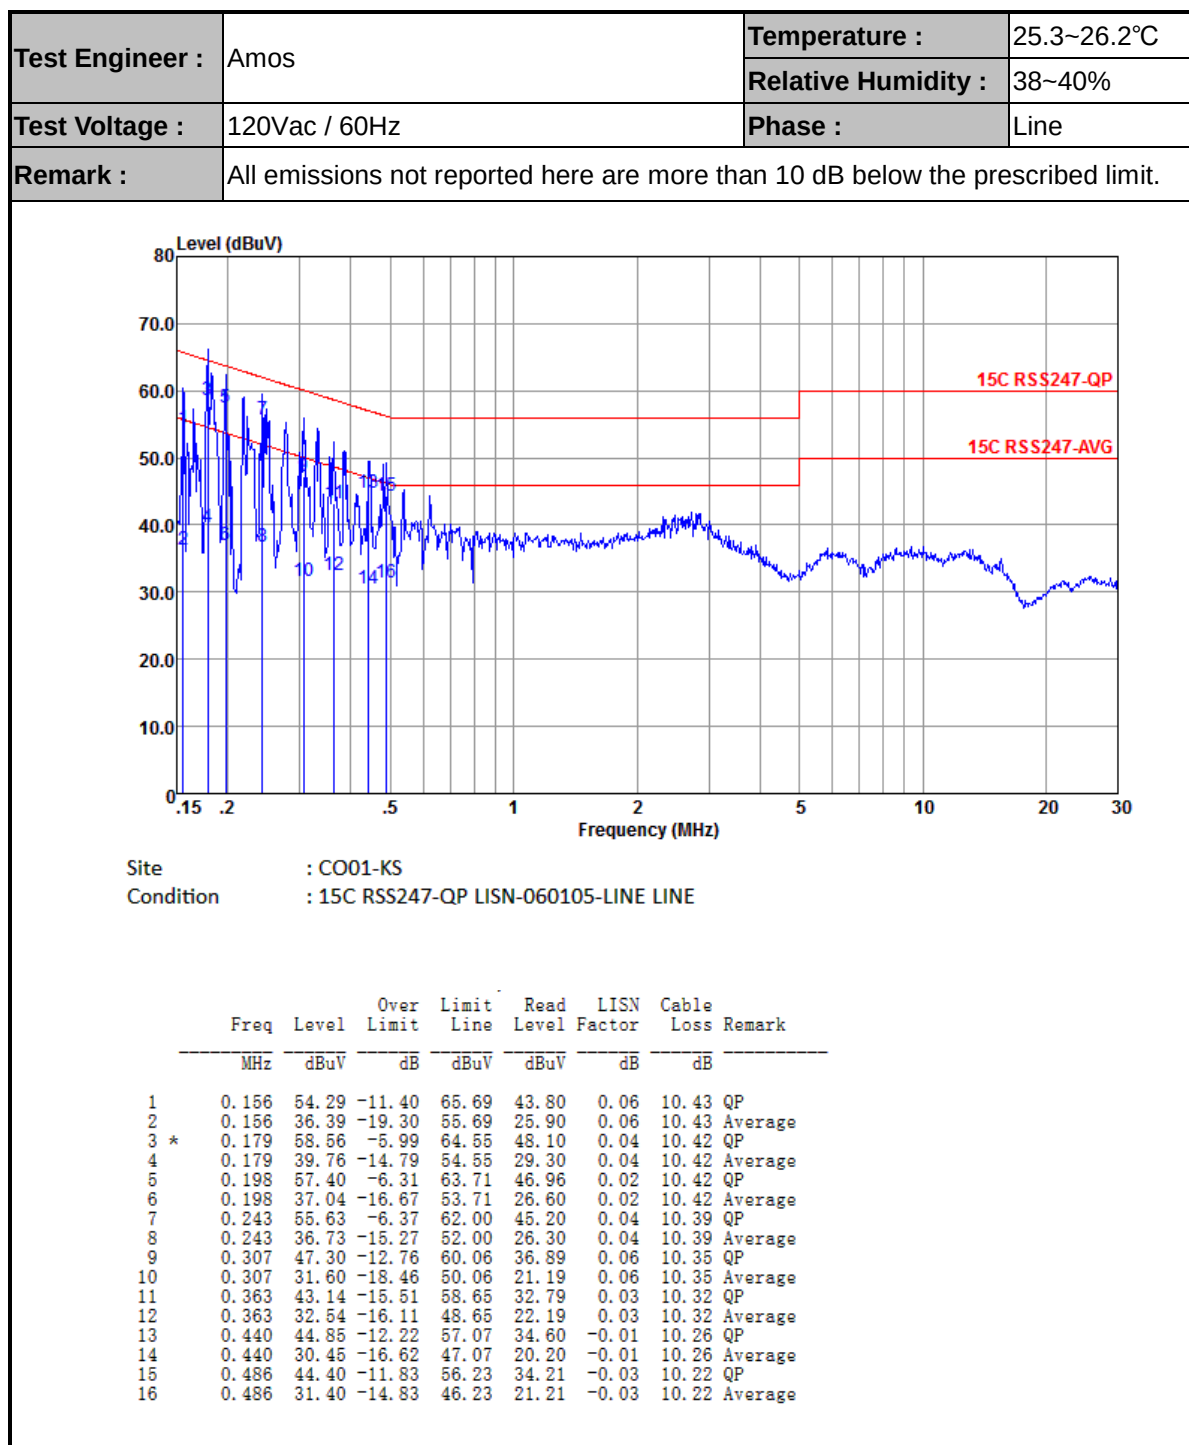



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

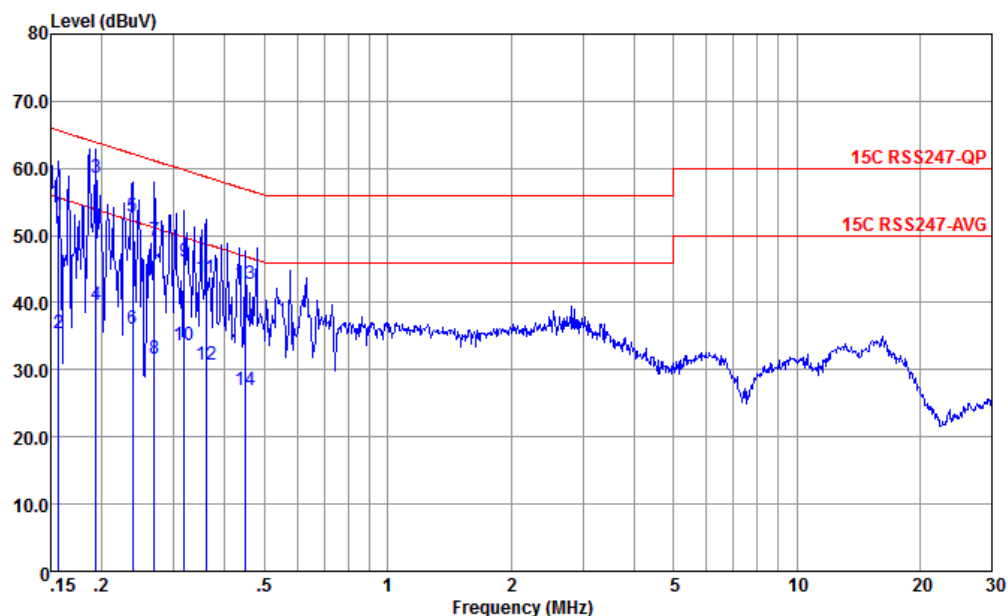

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.156	52.96	-12.69	65.65	42.50	0.03	10.43	QP
2	0.156	35.36	-20.29	55.65	24.90	0.03	10.43	Average
3 *	0.193	58.57	-5.32	63.89	48.10	0.05	10.42	QP
4	0.193	39.77	-14.12	53.89	29.30	0.05	10.42	Average
5	0.238	52.90	-9.27	62.17	42.50	0.01	10.39	QP
6	0.238	36.00	-16.17	52.17	25.60	0.01	10.39	Average
7	0.269	49.24	-11.92	61.16	38.89	-0.02	10.37	QP
8	0.269	31.54	-19.62	51.16	21.19	-0.02	10.37	Average
9	0.318	46.19	-13.56	59.75	35.90	-0.05	10.34	QP
10	0.318	33.59	-16.16	49.75	23.30	-0.05	10.34	Average
11	0.360	43.76	-14.98	58.74	33.50	-0.06	10.32	QP
12	0.360	30.86	-17.88	48.74	20.60	-0.06	10.32	Average
13	0.447	42.68	-14.25	56.93	32.49	-0.07	10.26	QP
14	0.447	26.98	-19.95	46.93	16.79	-0.07	10.26	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	3	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	3	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 3	2400-2483.5	3	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 4	2400-2483.5	6	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 5	2400-2483.5	6	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 6	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 7	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	1Mbps	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	0	2351.73	53.58	74	-20.42	V	Peak	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4800.00	38.53	74	-35.47	H	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7320.00	40.8	74	-33.2	H	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2490.1	54.12	74	-19.88	V	Peak	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	40.13	74	-33.87	H	Peak	Pass	Harmonic
4	Bluetooth BR_GFSK	00	2386.44	57.61	74	-16.39	H	PEAK	Pass	Band Edge
4	Bluetooth BR_GFSK	00	4804.00	40.83	74	-33.17	V	PEAK	Pass	Harmonic
5	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
5	Bluetooth BR_GFSK	39	7323.00	42.83	74	-31.17	H	PEAK	Pass	Harmonic
6	Bluetooth BR_GFSK	78	2486.78	57.84	74	-16.16	H	PEAK	Pass	Band Edge
6	Bluetooth BR_GFSK	78	7440.00	42.48	74	-31.52	V	PEAK	Pass	Harmonic
7	Bluetooth BR_GFSK	78	47.46	35.28	40	-4.72	V	PEAK	Pass	LF





Mode	1																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																								
ANT	3																																																																																								
Pol.	Horizontal	Fundamental																																																																																							
Peak	Horizontal polarization spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a peak at 2402.00 MHz. The y-axis ranges from 14.6 to 117 dBuV/m. The x-axis ranges from 2310 to 2440 MHz. The plot includes FCC PART 15C and FCC PART 15C (AVG) limits. <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2375.13</td><td>53.36</td><td>74.00</td><td>-20.64</td><td>37.89</td><td>33.29</td><td>9.06</td><td>32.88</td><td>6.00</td><td>116</td><td>114 Peak</td></tr><tr><td>2</td><td>2375.13</td><td>28.57</td><td>54.00</td><td>-25.43</td><td>13.10</td><td>33.29</td><td>9.06</td><td>32.88</td><td>6.00</td><td>116</td><td>114 Average</td></tr></table>	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	Aux	A/Pos	T/Pos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.13	53.36	74.00	-20.64	37.89	33.29	9.06	32.88	6.00	116	114 Peak	2	2375.13	28.57	54.00	-25.43	13.10	33.29	9.06	32.88	6.00	116	114 Average	Fundamental polarization spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a peak at 2402.00 MHz. The y-axis ranges from 14.6 to 117 dBuV/m. The x-axis ranges from 1000 to 3000 MHz. The plot includes FCC PART 15C and FCC PART 15C (AVG) limits. <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>2402.00</td><td>97.88</td><td>-----</td><td>82.13</td><td>33.50</td><td>9.09</td><td>32.84</td><td>6.00</td><td>116</td><td>114 Peak</td></tr><tr><td>2 *</td><td>2402.00</td><td>73.09</td><td>-----</td><td>57.34</td><td>33.50</td><td>9.09</td><td>32.84</td><td>6.00</td><td>116</td><td>114 Average</td></tr></table>	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	Aux	A/Pos	T/Pos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 *	2402.00	97.88	-----	82.13	33.50	9.09	32.84	6.00	116	114 Peak	2 *	2402.00	73.09	-----	57.34	33.50	9.09	32.84	6.00	116	114 Average
	Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	Aux	A/Pos	T/Pos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2375.13	53.36	74.00	-20.64	37.89	33.29	9.06	32.88	6.00	116	114 Peak																																																																														
2	2375.13	28.57	54.00	-25.43	13.10	33.29	9.06	32.88	6.00	116	114 Average																																																																														
Freq	Level	Limit	Over	ReadAntenna	Cable Preamp	Aux	A/Pos	T/Pos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1 *	2402.00	97.88	-----	82.13	33.50	9.09	32.84	6.00	116	114 Peak																																																																															
2 *	2402.00	73.09	-----	57.34	33.50	9.09	32.84	6.00	116	114 Average																																																																															

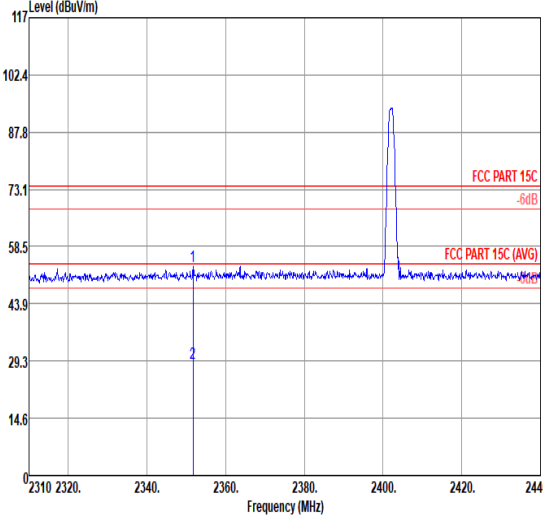
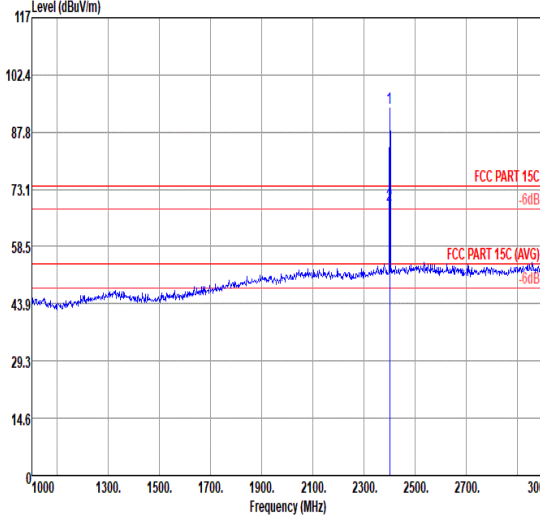


Mode	1																																																												
	Band Edge																																																												
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																												
ANT	3																																																												
Pol.	Vertical																																																												
Peak																																																													
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2351.73</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>38.40</td><td>33.08</td><td>9.02</td><td>32.92</td><td>6.00</td><td>345</td><td>82 Peak</td></tr><tr><td>2</td><td>2351.73</td><td>28.79</td><td>54.00</td><td>-25.21</td><td>13.61</td><td>33.08</td><td>9.02</td><td>32.92</td><td>6.00</td><td>345</td><td>82 Average</td></tr></table>														Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2351.73	53.58	74.00	-20.42	38.40	33.08	9.02	32.92	6.00	345	82 Peak	2	2351.73	28.79	54.00	-25.21	13.61	33.08	9.02	32.92	6.00	345	82 Average
		Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																			
1	2351.73	53.58	74.00	-20.42	38.40	33.08	9.02	32.92	6.00	345	82 Peak																																																		
2	2351.73	28.79	54.00	-25.21	13.61	33.08	9.02	32.92	6.00	345	82 Average																																																		
																																																													
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2402.00</td><td>94.02</td><td>-----</td><td>-----</td><td>78.27</td><td>33.50</td><td>9.09</td><td>32.84</td><td>6.00</td><td>345</td><td>82 Peak</td></tr><tr><td>2 *</td><td>2402.00</td><td>69.23</td><td>-----</td><td>-----</td><td>53.48</td><td>33.50</td><td>9.09</td><td>32.84</td><td>6.00</td><td>345</td><td>82 Average</td></tr></table>														Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 *	2402.00	94.02	-----	-----	78.27	33.50	9.09	32.84	6.00	345	82 Peak	2 *	2402.00	69.23	-----	-----	53.48	33.50	9.09	32.84	6.00	345	82 Average	
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																			
1 *	2402.00	94.02	-----	-----	78.27	33.50	9.09	32.84	6.00	345	82 Peak																																																		
2 *	2402.00	69.23	-----	-----	53.48	33.50	9.09	32.84	6.00	345	82 Average																																																		

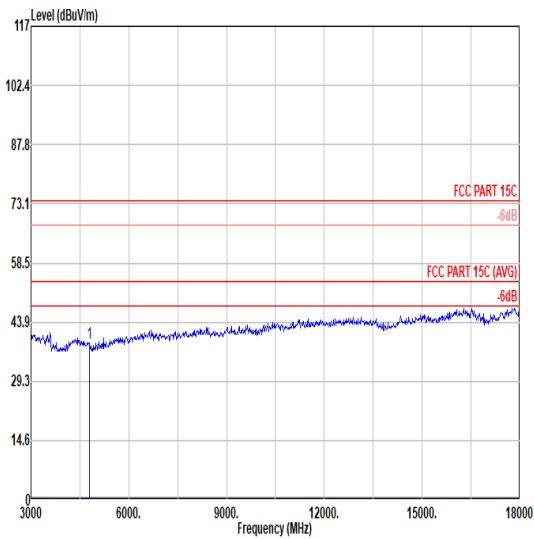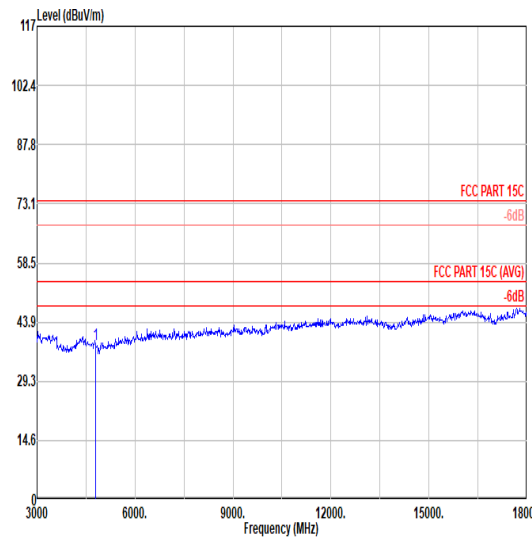

Mode	1																																																																																																
	Harmonic																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																
ANT	3																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4800.00</td><td>38.53</td><td>74.00</td><td>-35.47</td><td>56.62</td><td>34.29</td><td>9.44</td><td>61.82</td><td>0.00</td><td>300</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4800.00	38.53	74.00	-35.47	56.62	34.29	9.44	61.82	0.00	300	0 Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4800.00</td><td>38.44</td><td>74.00</td><td>-35.56</td><td>56.53</td><td>34.29</td><td>9.44</td><td>61.82</td><td>0.00</td><td>100</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4800.00	38.44	74.00	-35.56	56.53	34.29	9.44	61.82	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4800.00	38.53	74.00	-35.47	56.62	34.29	9.44	61.82	0.00	300	0 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4800.00	38.44	74.00	-35.56	56.53	34.29	9.44	61.82	0.00	100	0 Peak																																																																																						

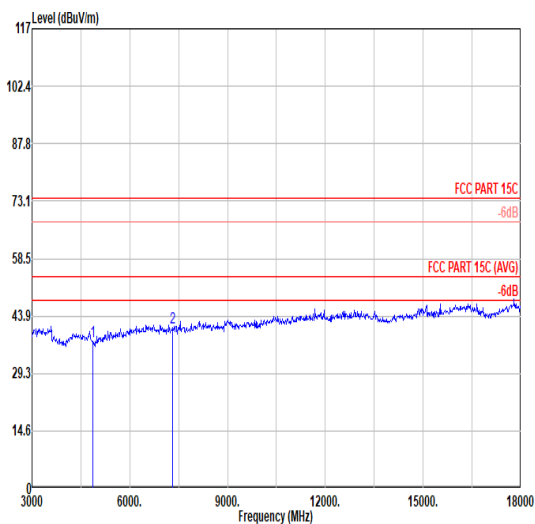
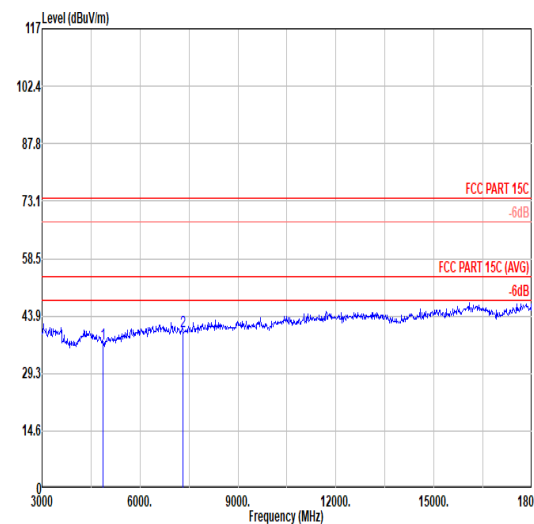


Mode	2																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5 Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																									
ANT	3																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4875.00</td><td>37.31</td><td>74.00</td><td>-36.69</td><td>55.42</td><td>34.14</td><td>9.52</td><td>61.77</td><td>0.00</td><td>300</td><td>0 Peak</td></tr><tr><td>2</td><td>7320.00</td><td>40.80</td><td>74.00</td><td>-33.20</td><td>55.47</td><td>35.70</td><td>11.69</td><td>62.06</td><td>0.00</td><td>300</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4875.00	37.31	74.00	-36.69	55.42	34.14	9.52	61.77	0.00	300	0 Peak	2	7320.00	40.80	74.00	-33.20	55.47	35.70	11.69	62.06	0.00	300	0 Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4875.00</td><td>36.82</td><td>74.00</td><td>-37.18</td><td>54.93</td><td>34.14</td><td>9.52</td><td>61.77</td><td>0.00</td><td>100</td><td>0 Peak</td></tr><tr><td>2</td><td>7320.00</td><td>40.07</td><td>74.00</td><td>-33.93</td><td>54.74</td><td>35.70</td><td>11.69</td><td>62.06</td><td>0.00</td><td>100</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4875.00	36.82	74.00	-37.18	54.93	34.14	9.52	61.77	0.00	100	0 Peak	2	7320.00	40.07	74.00	-33.93	54.74	35.70	11.69	62.06	0.00	100	0 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4875.00	37.31	74.00	-36.69	55.42	34.14	9.52	61.77	0.00	300	0 Peak																																																																																																															
2	7320.00	40.80	74.00	-33.20	55.47	35.70	11.69	62.06	0.00	300	0 Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4875.00	36.82	74.00	-37.18	54.93	34.14	9.52	61.77	0.00	100	0 Peak																																																																																																															
2	7320.00	40.07	74.00	-33.93	54.74	35.70	11.69	62.06	0.00	100	0 Peak																																																																																																															





Mode	3																																																								
	Band Edge																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																								
ANT	3																																																								
Pol.	Horizontal																																																								
Peak	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.58</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>38.14</td><td>32.86</td><td>9.27</td><td>32.64</td><td>6.00</td><td>105</td><td>123 Peak</td></tr><tr><td>2</td><td>2484.58</td><td>28.84</td><td>54.00</td><td>-25.16</td><td>13.35</td><td>32.86</td><td>9.27</td><td>32.64</td><td>6.00</td><td>105</td><td>123 Average</td></tr></table>											Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.58	53.63	74.00	-20.37	38.14	32.86	9.27	32.64	6.00	105	123 Peak	2	2484.58	28.84	54.00	-25.16	13.35	32.86	9.27	32.64	6.00	105	123 Average
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2484.58	53.63	74.00	-20.37	38.14	32.86	9.27	32.64	6.00	105	123 Peak																																														
2	2484.58	28.84	54.00	-25.16	13.35	32.86	9.27	32.64	6.00	105	123 Average																																														
	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>2480.00</td><td>97.11</td><td>-----</td><td>-----</td><td>81.62</td><td>32.86</td><td>9.27</td><td>32.64</td><td>6.00</td><td>105</td><td>123 Peak</td></tr><tr><td>2 *</td><td>2480.00</td><td>72.32</td><td>-----</td><td>-----</td><td>56.83</td><td>32.86</td><td>9.27</td><td>32.64</td><td>6.00</td><td>105</td><td>123 Average</td></tr></table>											Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 *	2480.00	97.11	-----	-----	81.62	32.86	9.27	32.64	6.00	105	123 Peak	2 *	2480.00	72.32	-----	-----	56.83	32.86	9.27	32.64	6.00	105	123 Average
Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1 *	2480.00	97.11	-----	-----	81.62	32.86	9.27	32.64	6.00	105	123 Peak																																														
2 *	2480.00	72.32	-----	-----	56.83	32.86	9.27	32.64	6.00	105	123 Average																																														

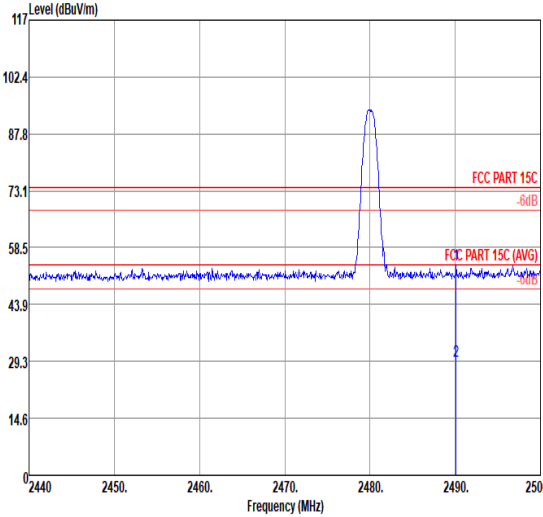
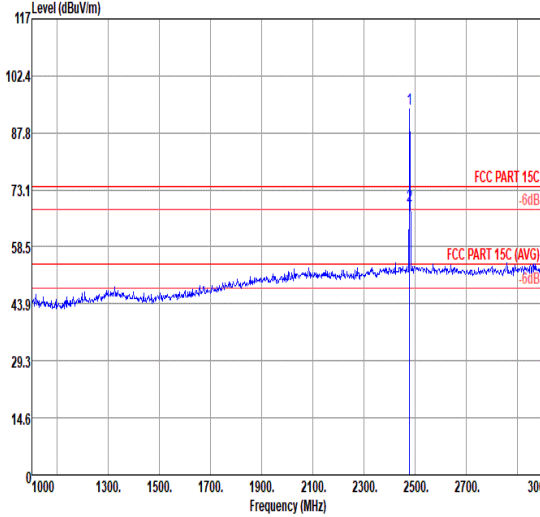


Mode	3																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz																																																																																																	
ANT	3																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C -6dB FCC PART 15C (AVG) -6dB <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2490.10</td><td>54.12</td><td>74.00</td><td>-19.88</td><td>38.73</td><td>32.73</td><td>9.30</td><td>32.64</td><td>6.00</td><td>371</td><td>77 Peak</td></tr><tr><td>2</td><td>2490.10</td><td>29.33</td><td>54.00</td><td>-24.67</td><td>13.94</td><td>32.73</td><td>9.30</td><td>32.64</td><td>6.00</td><td>371</td><td>77 Average</td></tr></tbody></table>		Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2490.10	54.12	74.00	-19.88	38.73	32.73	9.30	32.64	6.00	371	77 Peak	2	2490.10	29.33	54.00	-24.67	13.94	32.73	9.30	32.64	6.00	371	77 Average	 Level (dBuV/m) Frequency (MHz) FCC PART 15C -6dB FCC PART 15C (AVG) -6dB <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 *</td><td>2480.00</td><td>94.02</td><td>-----</td><td>-----</td><td>78.53</td><td>32.86</td><td>9.27</td><td>32.64</td><td>6.00</td><td>371</td><td>77 Peak</td></tr><tr><td>2 *</td><td>2480.00</td><td>69.23</td><td>-----</td><td>-----</td><td>53.74</td><td>32.86</td><td>9.27</td><td>32.64</td><td>6.00</td><td>371</td><td>77 Average</td></tr></tbody></table>		Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 *	2480.00	94.02	-----	-----	78.53	32.86	9.27	32.64	6.00	371	77 Peak	2 *	2480.00	69.23	-----	-----	53.74	32.86	9.27	32.64	6.00	371	77 Average
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2490.10	54.12	74.00	-19.88	38.73	32.73	9.30	32.64	6.00	371	77 Peak																																																																																							
2	2490.10	29.33	54.00	-24.67	13.94	32.73	9.30	32.64	6.00	371	77 Average																																																																																							
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 *	2480.00	94.02	-----	-----	78.53	32.86	9.27	32.64	6.00	371	77 Peak																																																																																							
2 *	2480.00	69.23	-----	-----	53.74	32.86	9.27	32.64	6.00	371	77 Average																																																																																							

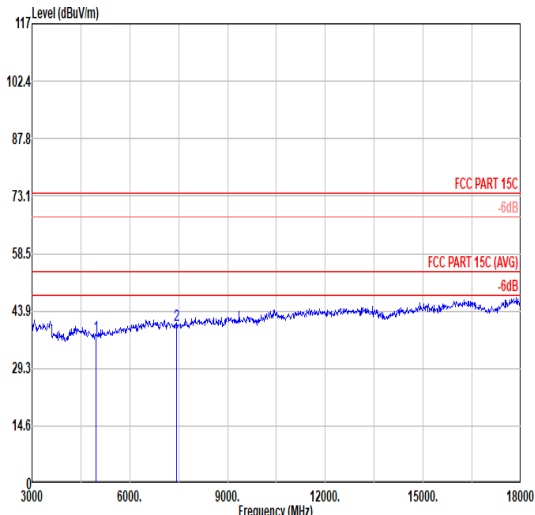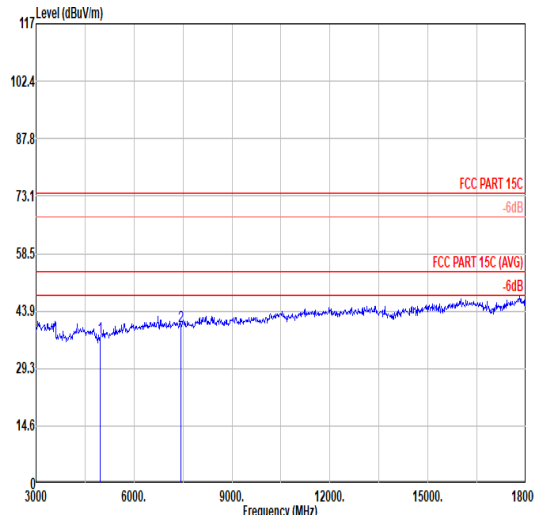

Mode	3																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	3																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4965.00</td><td>37.43</td><td>74.00</td><td>-36.57</td><td>55.42</td><td>34.10</td><td>9.62</td><td>61.71</td><td>0.00</td><td>300</td><td>0</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>40.13</td><td>74.00</td><td>-33.87</td><td>54.73</td><td>35.70</td><td>11.77</td><td>62.07</td><td>0.00</td><td>300</td><td>0</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4965.00	37.43	74.00	-36.57	55.42	34.10	9.62	61.71	0.00	300	0	Peak	2	7440.00	40.13	74.00	-33.87	54.73	35.70	11.77	62.07	0.00	300	0	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4965.00</td><td>37.02</td><td>74.00</td><td>-36.98</td><td>55.01</td><td>34.10</td><td>9.62</td><td>61.71</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>39.99</td><td>74.00</td><td>-34.01</td><td>54.59</td><td>35.70</td><td>11.77</td><td>62.07</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4965.00	37.02	74.00	-36.98	55.01	34.10	9.62	61.71	0.00	100	0	Peak	2	7440.00	39.99	74.00	-34.01	54.59	35.70	11.77	62.07	0.00	100	0	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4965.00	37.43	74.00	-36.57	55.42	34.10	9.62	61.71	0.00	300	0	Peak																																																																																																																		
2	7440.00	40.13	74.00	-33.87	54.73	35.70	11.77	62.07	0.00	300	0	Peak																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4965.00	37.02	74.00	-36.98	55.01	34.10	9.62	61.71	0.00	100	0	Peak																																																																																																																		
2	7440.00	39.99	74.00	-34.01	54.59	35.70	11.77	62.07	0.00	100	0	Peak																																																																																																																		

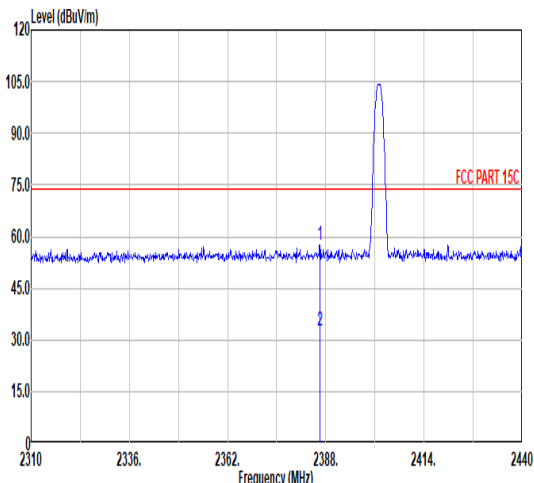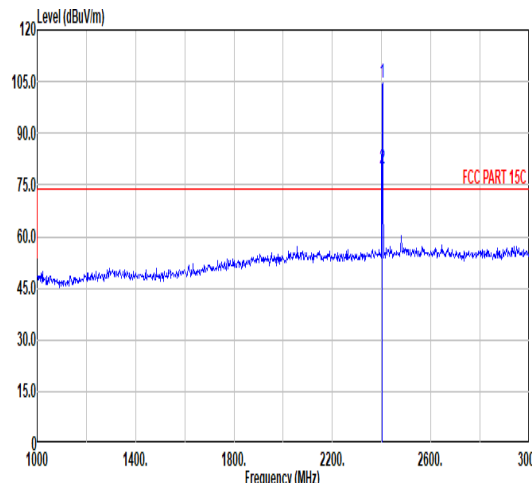

		4																																																																			
Mode		Band Edge																																																																			
		2400-2483.5 Bluetooth BR_GFSK_CH00_2402MHz																																																																			
ANT		6																																																																			
Pol.		Horizontal																																																																			
Peak																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.44</td><td>57.61</td><td>74.00</td><td>-16.39</td><td>45.61</td><td>32.27</td><td>6.60</td><td>32.87</td><td>6.00</td><td>100</td><td>286</td><td>PEAK</td></tr><tr><td>2</td><td>2386.44</td><td>32.82</td><td>54.00</td><td>-21.18</td><td>20.82</td><td>32.27</td><td>6.60</td><td>32.87</td><td>6.00</td><td>100</td><td>286</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.44	57.61	74.00	-16.39	45.61	32.27	6.60	32.87	6.00	100	286	PEAK	2	2386.44	32.82	54.00	-21.18	20.82	32.27	6.60	32.87	6.00	100	286	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2386.44	57.61	74.00	-16.39	45.61	32.27	6.60	32.87	6.00	100	286	PEAK																																																									
2	2386.44	32.82	54.00	-21.18	20.82	32.27	6.60	32.87	6.00	100	286	AVERAGE																																																									
		Fundamental																																																																			
Peak																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>104.38</td><td>-----</td><td>-----</td><td>92.30</td><td>32.30</td><td>6.62</td><td>32.84</td><td>6.00</td><td>100</td><td>286</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>79.59</td><td>-----</td><td>-----</td><td>67.51</td><td>32.30</td><td>6.62</td><td>32.84</td><td>6.00</td><td>100</td><td>286</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.38	-----	-----	92.30	32.30	6.62	32.84	6.00	100	286	PEAK	2	2402.00	79.59	-----	-----	67.51	32.30	6.62	32.84	6.00	100	286	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2402.00	104.38	-----	-----	92.30	32.30	6.62	32.84	6.00	100	286	PEAK																																																									
2	2402.00	79.59	-----	-----	67.51	32.30	6.62	32.84	6.00	100	286	AVERAGE																																																									



Mode	4																																																																							
	Band Edge																																																																							
	2400-2483.5 Bluetooth BR_GFSK_CH00_2402MHz																																																																							
ANT	6																																																																							
Pol.	Vertical						Fundamental																																																																	
Peak																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2361.48</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>44.70</td><td>32.17</td><td>6.56</td><td>32.91</td><td>6.00</td><td>313</td><td>0 PEAK</td></tr><tr><td>2</td><td>2361.48</td><td>31.73</td><td>54.00</td><td>-22.27</td><td>19.91</td><td>32.17</td><td>6.56</td><td>32.91</td><td>6.00</td><td>313</td><td>0 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2361.48	56.52	74.00	-17.48	44.70	32.17	6.56	32.91	6.00	313	0 PEAK	2	2361.48	31.73	54.00	-22.27	19.91	32.17	6.56	32.91	6.00	313	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	2361.48	56.52	74.00	-17.48	44.70	32.17	6.56	32.91	6.00	313	0 PEAK																																																													
2	2361.48	31.73	54.00	-22.27	19.91	32.17	6.56	32.91	6.00	313	0 AVERAGE																																																													
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>99.47</td><td>-----</td><td>-----</td><td>87.39</td><td>32.30</td><td>6.62</td><td>32.84</td><td>6.00</td><td>313</td><td>0 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>74.68</td><td>-----</td><td>-----</td><td>62.60</td><td>32.30</td><td>6.62</td><td>32.84</td><td>6.00</td><td>313</td><td>0 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2402.00	99.47	-----	-----	87.39	32.30	6.62	32.84	6.00	313	0 PEAK	2	2402.00	74.68	-----	-----	62.60	32.30	6.62	32.84	6.00	313	0 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	2402.00	99.47	-----	-----	87.39	32.30	6.62	32.84	6.00	313	0 PEAK																																																													
2	2402.00	74.68	-----	-----	62.60	32.30	6.62	32.84	6.00	313	0 AVERAGE																																																													





Mode	4																																																																																																		
	Harmonic																																																																																																		
	2400-2483.5 Bluetooth BR_GFSK_CH00_2402MHz																																																																																																		
ANT	6																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.26</td><td>74.00</td><td>-33.74</td><td>58.34</td><td>34.30</td><td>9.44</td><td>61.82</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.26	74.00	-33.74	58.34	34.30	9.44	61.82	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.83</td><td>74.00</td><td>-33.17</td><td>58.91</td><td>34.30</td><td>9.44</td><td>61.82</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.83	74.00	-33.17	58.91	34.30	9.44	61.82	0.00	100	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4804.00	40.26	74.00	-33.74	58.34	34.30	9.44	61.82	0.00	300	0	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4804.00	40.83	74.00	-33.17	58.91	34.30	9.44	61.82	0.00	100	0	PEAK																																																																																							



Mode	5																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5 Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																													
ANT	6																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>39.36</td><td>74.00</td><td>-34.64</td><td>57.47</td><td>34.13</td><td>9.53</td><td>61.77</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>42.83</td><td>74.00</td><td>-31.17</td><td>57.50</td><td>35.70</td><td>11.69</td><td>62.06</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	39.36	74.00	-34.64	57.47	34.13	9.53	61.77	0.00	300	0	PEAK	2	7323.00	42.83	74.00	-31.17	57.50	35.70	11.69	62.06	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>39.41</td><td>74.00</td><td>-34.59</td><td>57.52</td><td>34.13</td><td>9.53</td><td>61.77</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>41.87</td><td>74.00</td><td>-32.13</td><td>56.54</td><td>35.70</td><td>11.69</td><td>62.06</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	39.41	74.00	-34.59	57.52	34.13	9.53	61.77	0.00	100	0	PEAK	2	7323.00	41.87	74.00	-32.13	56.54	35.70	11.69	62.06	0.00	100	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4882.00	39.36	74.00	-34.64	57.47	34.13	9.53	61.77	0.00	300	0	PEAK																																																																																																																		
2	7323.00	42.83	74.00	-31.17	57.50	35.70	11.69	62.06	0.00	300	0	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4882.00	39.41	74.00	-34.59	57.52	34.13	9.53	61.77	0.00	100	0	PEAK																																																																																																																		
2	7323.00	41.87	74.00	-32.13	56.54	35.70	11.69	62.06	0.00	100	0	PEAK																																																																																																																		

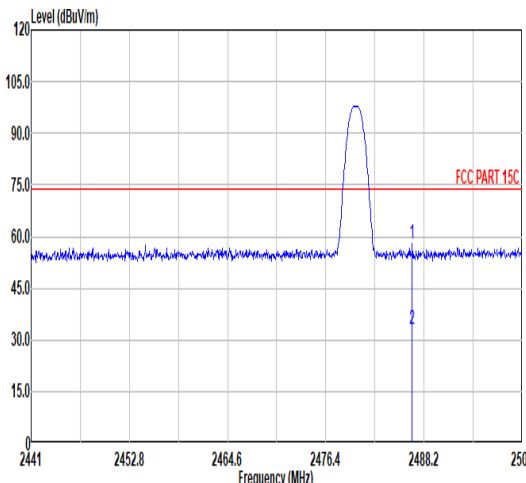
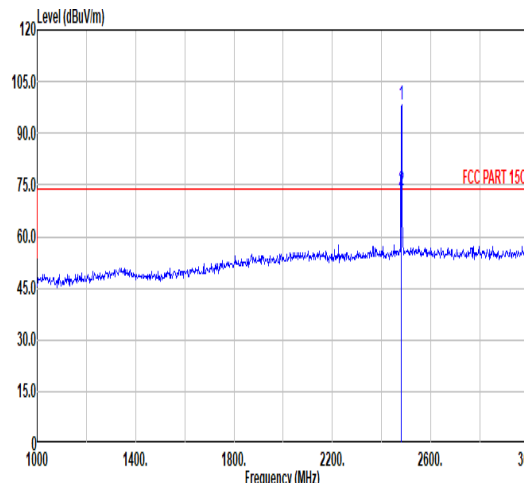


Mode	6																																																																																																																									
	Band Edge																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																									
ANT	6																																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																																			
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.78</td><td>57.84</td><td>74.00</td><td>-16.16</td><td>45.26</td><td>32.46</td><td>6.74</td><td>32.62</td><td>6.00</td><td>379</td><td>45 PEAK</td></tr><tr><td>2</td><td>2486.78</td><td>33.05</td><td>54.00</td><td>-20.95</td><td>20.47</td><td>32.46</td><td>6.74</td><td>32.62</td><td>6.00</td><td>379</td><td>45 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.78	57.84	74.00	-16.16	45.26	32.46	6.74	32.62	6.00	379	45 PEAK	2	2486.78	33.05	54.00	-20.95	20.47	32.46	6.74	32.62	6.00	379	45 AVERAGE	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.07</td><td>-----</td><td>-----</td><td>85.52</td><td>32.45</td><td>6.73</td><td>32.63</td><td>6.00</td><td>379</td><td>45 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>73.28</td><td>-----</td><td>-----</td><td>60.73</td><td>32.45</td><td>6.73</td><td>32.63</td><td>6.00</td><td>379</td><td>45 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.07	-----	-----	85.52	32.45	6.73	32.63	6.00	379	45 PEAK	2	2480.00	73.28	-----	-----	60.73	32.45	6.73	32.63	6.00	379	45 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2486.78	57.84	74.00	-16.16	45.26	32.46	6.74	32.62	6.00	379	45 PEAK																																																																																																															
2	2486.78	33.05	54.00	-20.95	20.47	32.46	6.74	32.62	6.00	379	45 AVERAGE																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2480.00	98.07	-----	-----	85.52	32.45	6.73	32.63	6.00	379	45 PEAK																																																																																																															
2	2480.00	73.28	-----	-----	60.73	32.45	6.73	32.63	6.00	379	45 AVERAGE																																																																																																															





Mode	6																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																	
ANT	6																																																																	
Pol.	Vertical																																																																	
Peak																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.04</td><td>57.06</td><td>74.00</td><td>-16.94</td><td>44.44</td><td>32.48</td><td>6.74</td><td>32.60</td><td>6.00</td><td>379</td><td>45 PEAK</td></tr><tr><td>2</td><td>2492.04</td><td>32.27</td><td>54.00</td><td>-21.73</td><td>19.65</td><td>32.48</td><td>6.74</td><td>32.60</td><td>6.00</td><td>379</td><td>45 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.04	57.06	74.00	-16.94	44.44	32.48	6.74	32.60	6.00	379	45 PEAK	2	2492.04	32.27	54.00	-21.73	19.65	32.48	6.74	32.60	6.00	379	45 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2492.04	57.06	74.00	-16.94	44.44	32.48	6.74	32.60	6.00	379	45 PEAK																																																							
2	2492.04	32.27	54.00	-21.73	19.65	32.48	6.74	32.60	6.00	379	45 AVERAGE																																																							
Fundamental																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.31</td><td>-----</td><td>-----</td><td>86.76</td><td>32.45</td><td>6.73</td><td>32.63</td><td>6.00</td><td>379</td><td>45 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>74.52</td><td>-----</td><td>-----</td><td>61.97</td><td>32.45</td><td>6.73</td><td>32.63</td><td>6.00</td><td>379</td><td>45 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.31	-----	-----	86.76	32.45	6.73	32.63	6.00	379	45 PEAK	2	2480.00	74.52	-----	-----	61.97	32.45	6.73	32.63	6.00	379	45 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2480.00	99.31	-----	-----	86.76	32.45	6.73	32.63	6.00	379	45 PEAK																																																							
2	2480.00	74.52	-----	-----	61.97	32.45	6.73	32.63	6.00	379	45 AVERAGE																																																							

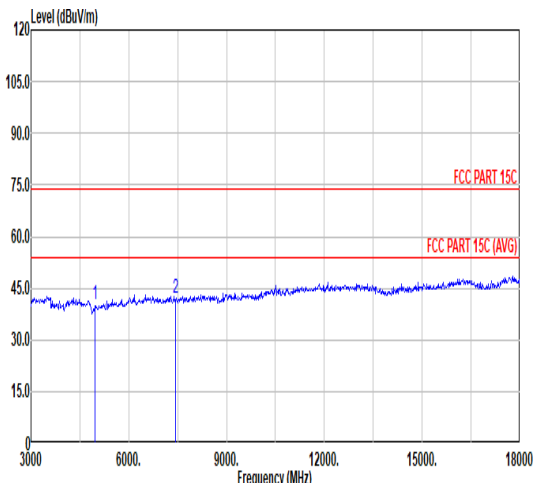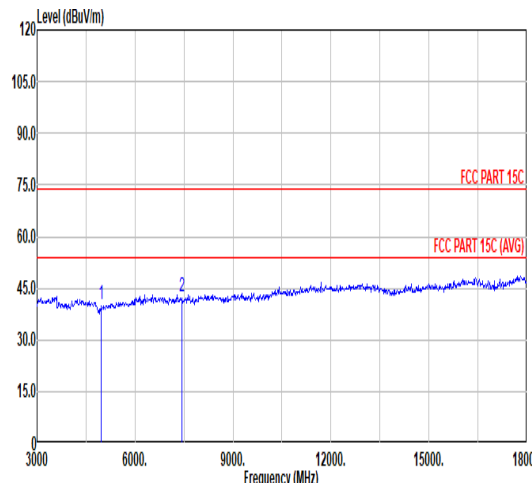

Mode	6																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	6																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.31</td><td>74.00</td><td>-33.69</td><td>58.31</td><td>34.10</td><td>9.61</td><td>61.71</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.27</td><td>74.00</td><td>-31.73</td><td>56.87</td><td>35.70</td><td>11.77</td><td>62.07</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.31	74.00	-33.69	58.31	34.10	9.61	61.71	0.00	300	0	PEAK	2	7440.00	42.27	74.00	-31.73	56.87	35.70	11.77	62.07	0.00	300	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.43</td><td>74.00</td><td>-33.57</td><td>58.43</td><td>34.10</td><td>9.61</td><td>61.71</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.48</td><td>74.00</td><td>-31.52</td><td>57.08</td><td>35.70</td><td>11.77</td><td>62.07</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.43	74.00	-33.57	58.43	34.10	9.61	61.71	0.00	100	0	PEAK	2	7440.00	42.48	74.00	-31.52	57.08	35.70	11.77	62.07	0.00	100	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.31	74.00	-33.69	58.31	34.10	9.61	61.71	0.00	300	0	PEAK																																																																																																																		
2	7440.00	42.27	74.00	-31.73	56.87	35.70	11.77	62.07	0.00	300	0	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.43	74.00	-33.57	58.43	34.10	9.61	61.71	0.00	100	0	PEAK																																																																																																																		
2	7440.00	42.48	74.00	-31.52	57.08	35.70	11.77	62.07	0.00	100	0	PEAK																																																																																																																		

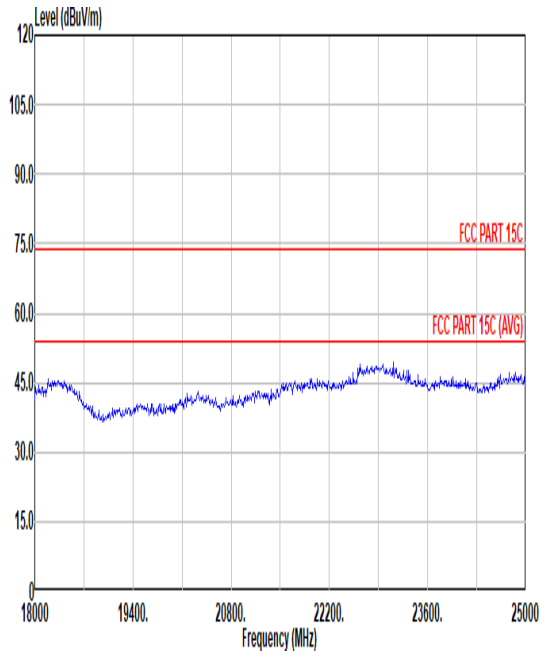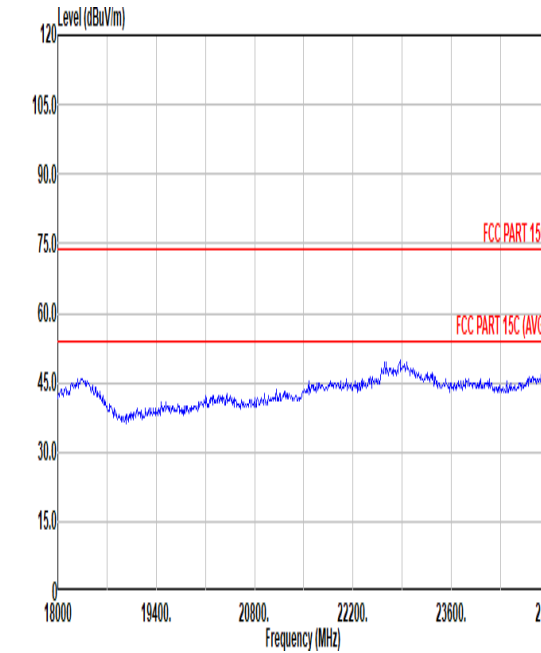


Mode	6	
	SHF	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	6	
Pol.	Horizontal	Vertical
Peak	 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red horizontal line for FCC PART 15C, and a red horizontal line for FCC PART 15C (AVG). The signal level is approximately 45 dBuV/m, well below the 75 dBuV/m limit.	 Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red horizontal line for FCC PART 15C, and a red horizontal line for FCC PART 15C (AVG). The signal level is approximately 45 dBuV/m, well below the 75 dBuV/m limit.
Avg	Blank	Blank




Mode	7																																																																																																																																																																																	
	LF																																																																																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																	
ANT	6																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red line for FCC PART 15C limit and a blue line for the measured signal. Peaks are labeled 1 through 6. <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>47.46</td><td>29.98</td><td>-10.02</td><td>40.00</td><td>45.62</td><td>15.87</td><td>0.69</td><td>32.20</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>115.36</td><td>31.49</td><td>-12.01</td><td>43.50</td><td>44.90</td><td>17.33</td><td>1.43</td><td>32.17</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>204.60</td><td>35.49</td><td>-8.01</td><td>43.50</td><td>50.51</td><td>15.15</td><td>1.94</td><td>32.11</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>256.98</td><td>31.54</td><td>-14.46</td><td>46.00</td><td>41.58</td><td>19.99</td><td>2.16</td><td>32.19</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>334.58</td><td>27.66</td><td>-18.34</td><td>46.00</td><td>37.33</td><td>20.03</td><td>2.47</td><td>32.17</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>717.73</td><td>26.58</td><td>-19.42</td><td>46.00</td><td>27.97</td><td>27.23</td><td>3.62</td><td>32.24</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	47.46	29.98	-10.02	40.00	45.62	15.87	0.69	32.20	---	Peak	2	115.36	31.49	-12.01	43.50	44.90	17.33	1.43	32.17	---	Peak	3	204.60	35.49	-8.01	43.50	50.51	15.15	1.94	32.11	---	Peak	4	256.98	31.54	-14.46	46.00	41.58	19.99	2.16	32.19	---	Peak	5	334.58	27.66	-18.34	46.00	37.33	20.03	2.47	32.17	---	Peak	6	717.73	26.58	-19.42	46.00	27.97	27.23	3.62	32.24	---	Peak	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red line for FCC PART 15C limit and a blue line for the measured signal. Peaks are labeled 1 through 6. <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 !</td><td>47.46</td><td>35.28</td><td>-4.72</td><td>40.00</td><td>50.92</td><td>15.87</td><td>0.69</td><td>32.20</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>108.57</td><td>23.72</td><td>-19.78</td><td>43.50</td><td>37.59</td><td>16.91</td><td>1.40</td><td>32.18</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>206.54</td><td>29.77</td><td>-13.73</td><td>43.50</td><td>44.76</td><td>15.17</td><td>1.95</td><td>32.11</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>257.95</td><td>30.54</td><td>-15.46</td><td>46.00</td><td>40.44</td><td>20.12</td><td>2.16</td><td>32.18</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>467.47</td><td>25.81</td><td>-20.19</td><td>46.00</td><td>31.75</td><td>23.41</td><td>2.92</td><td>32.27</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>610.06</td><td>26.01</td><td>-19.99</td><td>46.00</td><td>29.01</td><td>25.94</td><td>3.34</td><td>32.28</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 !	47.46	35.28	-4.72	40.00	50.92	15.87	0.69	32.20	---	Peak	2	108.57	23.72	-19.78	43.50	37.59	16.91	1.40	32.18	---	Peak	3	206.54	29.77	-13.73	43.50	44.76	15.17	1.95	32.11	---	Peak	4	257.95	30.54	-15.46	46.00	40.44	20.12	2.16	32.18	---	Peak	5	467.47	25.81	-20.19	46.00	31.75	23.41	2.92	32.27	---	Peak	6	610.06	26.01	-19.99	46.00	29.01	25.94	3.34	32.28	---	Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1	47.46	29.98	-10.02	40.00	45.62	15.87	0.69	32.20	---	Peak																																																																																																																																																																								
2	115.36	31.49	-12.01	43.50	44.90	17.33	1.43	32.17	---	Peak																																																																																																																																																																								
3	204.60	35.49	-8.01	43.50	50.51	15.15	1.94	32.11	---	Peak																																																																																																																																																																								
4	256.98	31.54	-14.46	46.00	41.58	19.99	2.16	32.19	---	Peak																																																																																																																																																																								
5	334.58	27.66	-18.34	46.00	37.33	20.03	2.47	32.17	---	Peak																																																																																																																																																																								
6	717.73	26.58	-19.42	46.00	27.97	27.23	3.62	32.24	---	Peak																																																																																																																																																																								
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1 !	47.46	35.28	-4.72	40.00	50.92	15.87	0.69	32.20	---	Peak																																																																																																																																																																								
2	108.57	23.72	-19.78	43.50	37.59	16.91	1.40	32.18	---	Peak																																																																																																																																																																								
3	206.54	29.77	-13.73	43.50	44.76	15.17	1.95	32.11	---	Peak																																																																																																																																																																								
4	257.95	30.54	-15.46	46.00	40.44	20.12	2.16	32.18	---	Peak																																																																																																																																																																								
5	467.47	25.81	-20.19	46.00	31.75	23.41	2.92	32.27	---	Peak																																																																																																																																																																								
6	610.06	26.01	-19.99	46.00	29.01	25.94	3.34	32.28	---	Peak																																																																																																																																																																								

Appendix D. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 39

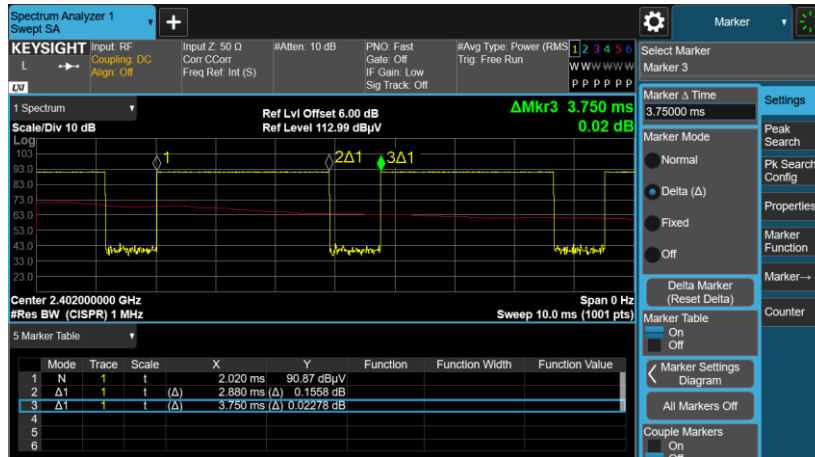

3DH5 on time (Count Pulses) Plot on Channel 39

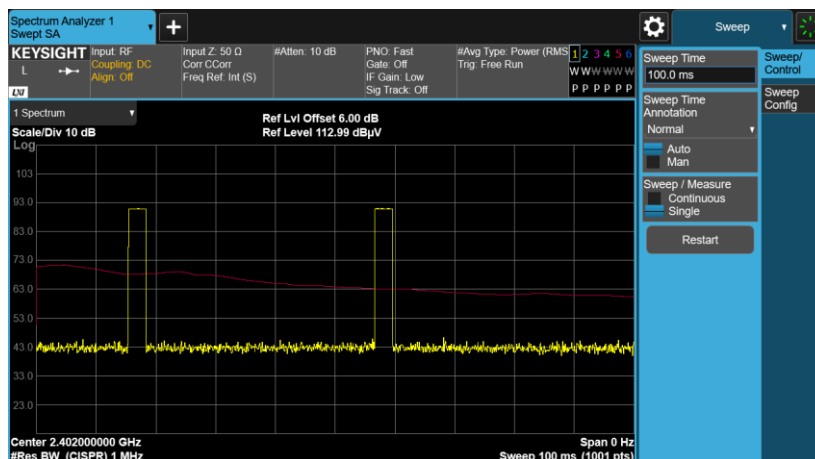

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.