



**FCC 47 CFR PART 15 SUBPART C
ISED RSS-210 ISSUE 11**

CERTIFICATION TEST REPORT

For

Monitor (Interactive Digital Board)

**MODEL NUMBER: 86TR3DQ-B, 86TR3DQ-I, 55TR3DQ-B, 55TR3DQ-I
65TR3DQ-B, 65TR3DQ-I, 75TR3DQ-B, 75TR3DQ-I**

REPORT NUMBER: 4791554105-1-RF-1

ISSUE DATE: December 2, 2024

**FCC ID: 2AFG6-TR3DQ
IC: 22166-TR3DQ**

Prepared for

**Guangzhou Shirui Electronics Co., Ltd.
192 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology
Development District, Guangzhou, Guangdong, China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

<u>Revision History</u>			
<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	December 2, 2024	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	Transmitter 99% Emission Bandwidth / 20dB Bandwidth	RSS-Gen 6.7/ Part 15.215 (c)	PASS
2	Transmitter Frequency Stability (Temperature & Voltage Variation)	CFR 47 FCC §15.225(e) ISED RSS-Gen Clause 6.11 ISED RSS-210 Annex B.6	PASS
3	Fundamental Field Strength	CFR 47 FCC §5.225(a)(b)(c)(d) ISED RSS-Gen Clause 6.12 ISED RSS-210 Annex B.6	PASS
4	Radiated Emissions	CFR 47 FCC§15.209(a) CFR 47 FCC§15.225(d) ISED RSS-Gen Clause 6.13 ISED RSS-210 Annex B.6	PASS
5	Band Edge Radiated Emissions	CFR 47 FCC §15.209(a) CFR 47 FCC §15.225(c)(d) ISED RSS-Gen Clause 6.13 ISED RSS-210 Annex B.6	PASS
6	Conducted Emission Test for AC Power Port	CFR 47 FCC §15.207 ISED RSS-Gen Clause 8.8	PASS
7	Antenna Requirement	CFR 47 FCC §15.203 ISED RSS-Gen Clause 6.8	Pass
<p>Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>Note 2: The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C, ISED RSS-210 Issue 11 and ISED RSS-GEN Issue 5 > when <simple acceptance> decision rule is applied.</p>			

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT.....	9
5.2. MAXIMUM FIELD STRENGTH.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	9
5.4. TEST ENVIRONMENT.....	10
5.5. DESCRIPTION OF TEST SETUP.....	11
5.6. MEASURING INSTRUMENT AND SOFTWARE USED	12
6. ANTENNA PORT TEST RESULTS	14
6.1. 99% & 20dB BANDWIDTH.....	14
6.2. TRANSMITTER FREQUENCY STABILITY	16
7. RADIATED EMISSION TEST RESULTS.....	18
7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS.....	25
7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30MHz	26
7.3. SPURIOUS EMISSIONS BELOW 30MHz	28
8. AC POWER LINE CONDUCTED EMISSIONS	31
9. ANTENNA REQUIREMENTS	41

1. ATTESTATION OF TEST RESULTS


Applicant Information

Company Name: Guangzhou Shirui Electronics Co., Ltd.
Address: 192 Kezhu Road, Scienteck Park, Guangzhou Economic & Technology Development District, Guangzhou, Guangdong, China

Manufacturer Information


Company Name: Guangzhou Shirui Electronics Co., Ltd.
Address: 192 Kezhu Road, Scienteck Park, Guangzhou Economic & Technology Development District, Guangzhou, Guangdong, China

EUT Information

EUT Name: Monitor (Interactive Digital Board)
Model Name: 86TR3DQ-B
Series Model: 55TR3DQ-B, 55TR3DQ-I, 65TR3DQ-B, 65TR3DQ-I, 75TR3DQ-B, 75TR3DQ-I, 86TR3DQ-I
Model Difference: Please refer to clause 5.1
Brand Name: 
Sample Received Date: November 8, 2024
Sample Status: Normal
Sample ID: 7816866
Date of Tested: November 8 ~ December 2, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-210 Issue 11	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:



Fanny Huang

Project Engineer

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, ISED RSS-210 Issue 11 and RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiation Emission test (include Fundamental emission) (9KHz-30MHz)	2.2 dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	4.00 dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	5.78 dB (1 GHz-18 GHz)
	5.23 dB (18 GHz-26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name:	Monitor (Interactive Digital Board)
Model Name	86TR3DQ-B
Series Model	55TR3DQ-B,55TR3DQ-I, 65TR3DQ-B,65TR3DQ-I 75TR3DQ-B,75TR3DQ-I, 86TR3DQ-I
Model Difference:	Compared with 86TR3DQ-B, 55TR3DQ-B,55TR3DQ-I, 65TR3DQ-B, 65TR3DQ-I, 75TR3DQ-B and 75TR3DQ-I are only different in size and rating, and the rest is exactly the same. 86TR3DQ-I is all the same except for the model name.
Operation Frequency	13.56MHz
Modulation	ASK
Rated Input	100-240V~ 50/60Hz

5.2. MAXIMUM FIELD STRENGTH

Frequency (MHz)	Max Peak field strength @30m(dBμV/m)
13.56	5.57

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
13.56	Loop antenna	0

5.4. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage:	VL	AC 207V
	VN	AC 230V
	VH	AC 253V

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage
VH= Upper Extreme Test Voltage
TN= Normal Temperature

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Specification
1	Tag	/	/	/

I/O CABLES

Item	Type of cable	Shielded Type	Ferrite Core	Length
1	AC	/	Unshielded	3.0


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can transmit the NFC signal through Swiping card (NFC)
NFC support both ISO /IEC 14443A and ISO /IEC 14443B. All lowest and highest data rates as per the standards are supported - 106 kbps, 212 kbps, 424 kbps and 848 kbps, all the modes had been tested, but only the worst data (ISO 14443A 106 kbps) was recorded in the report.

SETUP DIAGRAM FOR TESTS

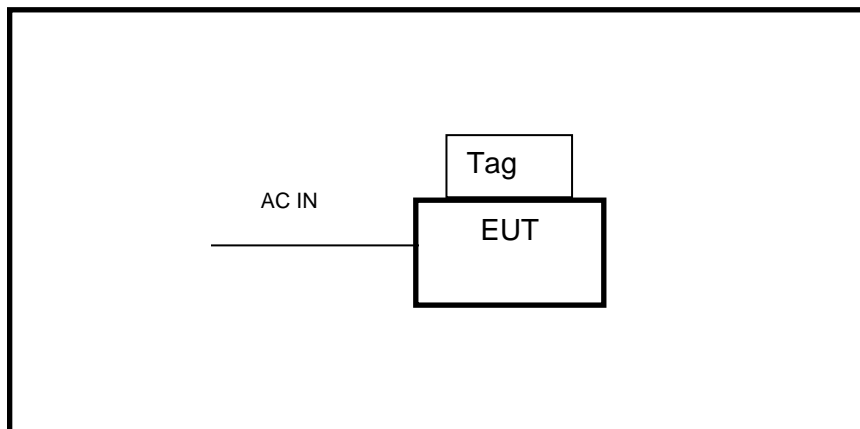

Note: Test was performed with tag and without tag, but only the worst-case data (with tag) was recorded in the report.

5.6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description		Manufacturer	Name		Version
Tonsend SRD Test System		Tonsend	JS1120-3 RF Test System		V3.2.22

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	May.08, 2023	May.07 2026
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Software					
Description		Manufacturer	Name	Version	
Test Software for Radiated Emissions		Farad	EZ-EMC	Ver. UL-3A1	

6. ANTENNA PORT TEST RESULTS

6.1. 99% & 20dB BANDWIDTH

LIMITS

Section	Test Item	Limit
ANSI C63.10 Section 6.9.2	20dB% Bandwidth	For reporting purposes only.
ISED RSS-Gen Clause 6.7 Issue 5	99 % Occupied Bandwidth	For reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1 kHz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

The type of band for the signal is narrowband.

TEST SETUP

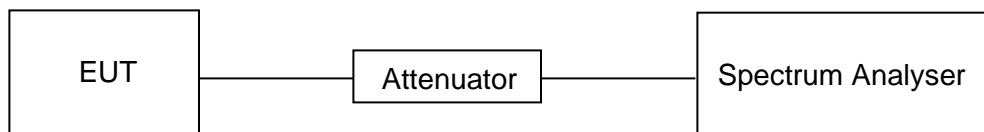


TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	48%
Atmosphere Pressure	101kPa	Test Voltage	AC 230 V, 50 Hz

RESULTS

Frequency (MHz)	99% Occupied Bandwidth (kHz)	20dB bandwidth (kHz)
13.56	2.996	3.400

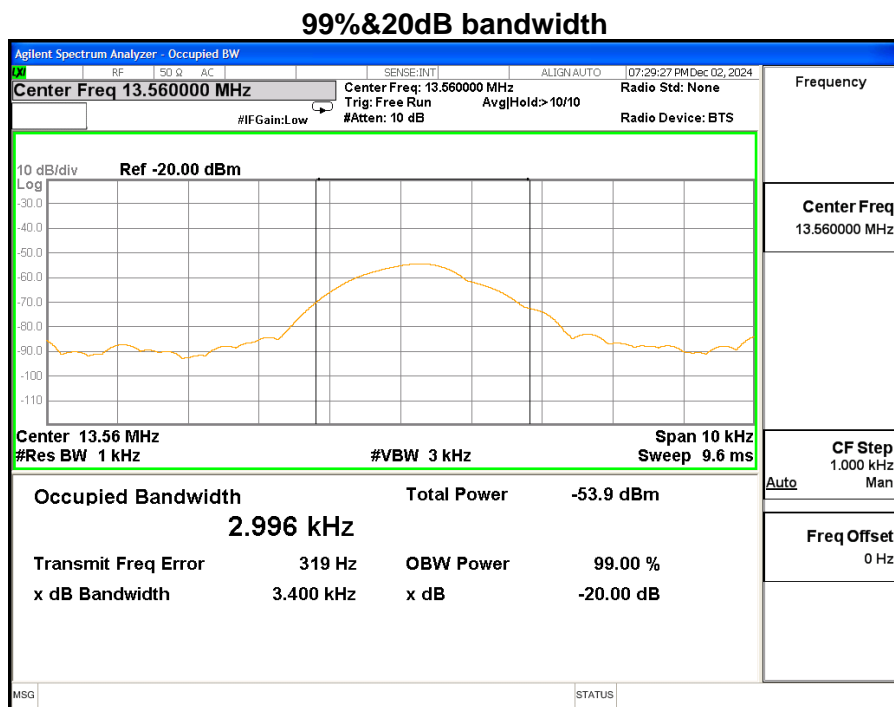

6.2. TRANSMITTER FREQUENCY STABILITY

LIMITS

CFR 47 FCC §15.225(e)
ISED RSS-210 Annex B B.6

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.


TEST SETUP AND PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	10kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST SETUP

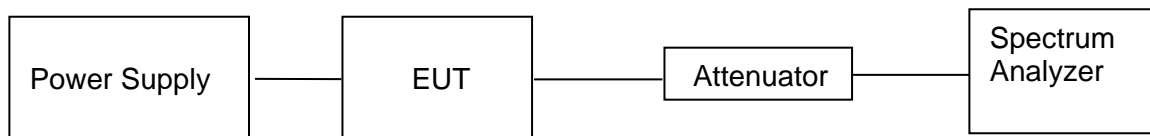

TEST RESULTS

Maximum frequency error of the EUT with variations in ambient temperature

Temperature (°C)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
0	13.5605	13.5604	13.5610	13.5608
10	13.5610	13.5602	13.5606	13.5606
20	13.5602	13.5608	13.5605	13.5603
30	13.5611	13.5612	13.5607	13.5603
40	13.5607	13.5610	13.5606	13.5605
Maximum frequency error	0.0081%	0.0088%	0.0081%	0.0066%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass

Maximum frequency error of the EUT with variations in nominal operating voltage at an ambient 20 degrees C temperature.

Supply Voltage (V)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
AC 207V	13.5610	13.5610	13.5606	13.5609
AC 230V	13.5611	13.5606	13.5610	13.5607
AC 253V	13.5608	13.5609	13.5610	13.5608
Maximum frequency error	0.0081%	0.0074%	0.0074%	0.0081%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass

7. RADIATED EMISSION TEST RESULTS

LIMITS

Fundamental field strength

FCC Reference:	Part 15.225(a)(b)(c)(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 & RSS-210 B.6 & RSS-GEN Clause 8.9
Test Method Used:	ANSI C63.10 Sections 6.3, 6.4 and 6.5

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Measured Distance (Meters)
13.553-13.567	15848	84	30
13.410-13.553/13.567-13.710	334	50.47	30
13.110-13.410/13.710-14.010	106	40.51	30

Note(s):

1. The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

2. The limit is specified at a test distance of 30 meters. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).

Radiation Disturbance Test Limit for FCC (Class B) (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30MHz.

Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


²Above 38.6c

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

TEST SETUP AND PROCEDURE

Below 30MHz

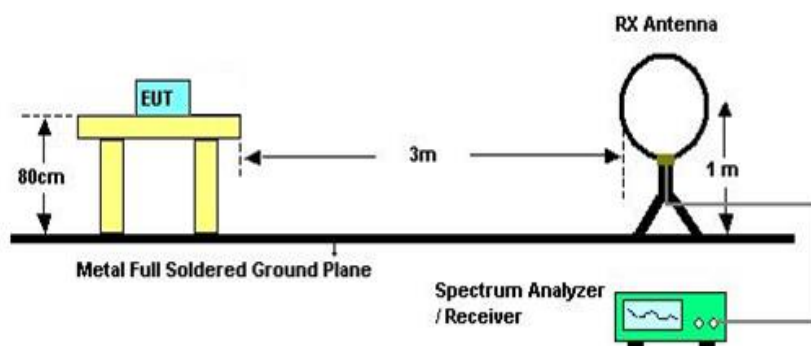


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
6. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
7. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
8. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open field site. Therefore, the sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G

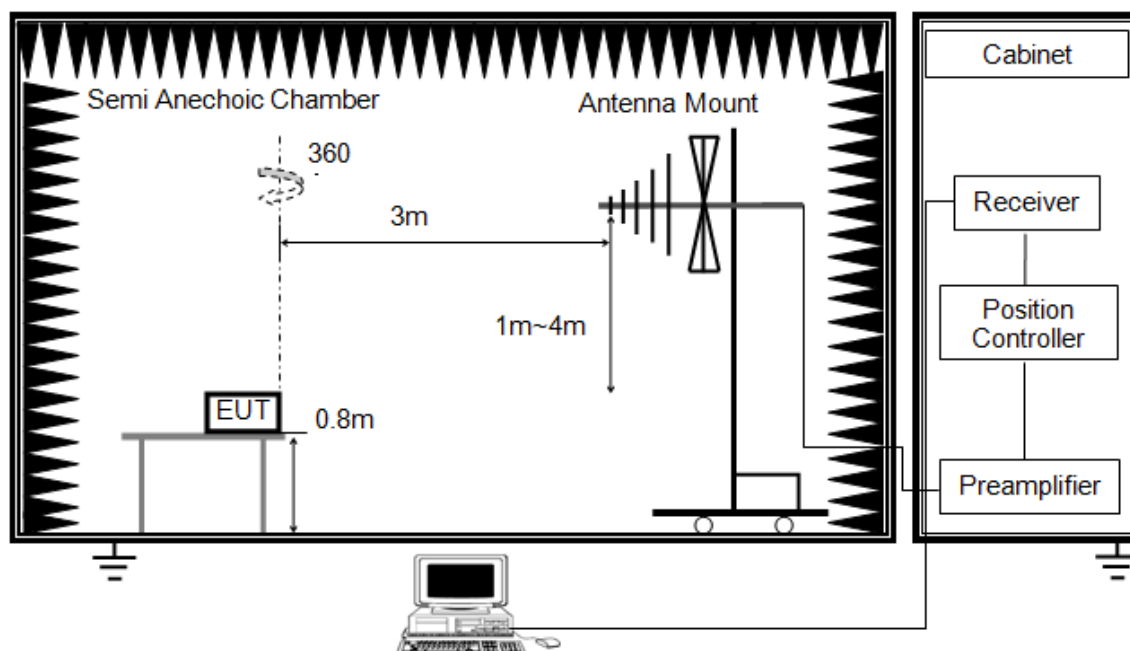

The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
7. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

Note 1: The manufacturer has recommended that the EUT only be used in the desktop (horizontal) orientation; therefore, all radiated testing was performed in desktop orientation.

TEST ENVIRONMENT

Temperature	23.2 °C	Relative Humidity	53 %
Atmosphere Pressure	101kPa	Test Voltage	AC 230 V, 50 Hz

RESULTS

Note:

Simultaneously transmission condition:


Condition	Technology (NFC)	Technology (Module SKI.WB663U.1)	Technology (Module SKI.WB902.1)		Support (YES/NO)
1	NFC	WLAN (2.4G)	BT/BLE	WLAN (5G)	YES
2	NFC	WLAN (2.4G)	BT/BLE	WLAN (6G)	YES
3	NFC	WLAN (5G)	BT/BLE	WLAN (2.4G)	YES
4	NFC	WLAN (5G)	BT/BLE	WLAN (6G)	YES

Note:

1. The emission of the simultaneous operation has been evaluated and no non-compliance was found.
2. We have pre-tested all conditions, and no worst emissions were found.
3. Consider the NFC frequency band is far from BT/WIFI 2.4G/5G/6G frequency band, only the NFC test data recorded in the report.

7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

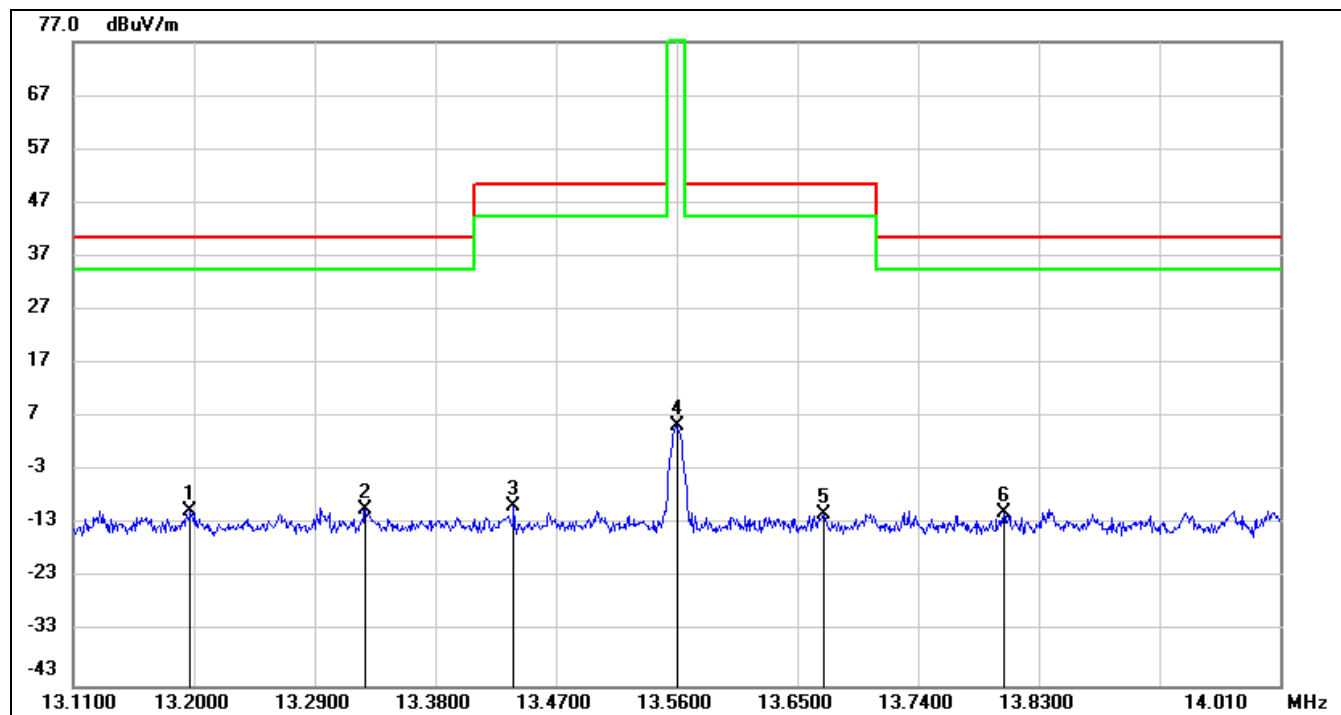

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.1973	36.98	-47.43	-10.45	40.51	-50.96	peak
2	13.3278	37.42	-47.44	-10.02	40.51	-50.53	peak
3	13.4385	37.84	-47.44	-9.60	50.47	-60.07	peak
4	13.5600	53.00	-47.43	5.57	84.00	-78.43	peak
5	13.6698	36.39	-47.43	-11.04	50.47	-61.51	peak
6	13.8039	36.70	-47.44	-10.74	40.51	-51.25	peak


Note: 1. Result Level = Read Level + Correct Factor.

2. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

3. The test result is for 30m, the distance extrapolation factor (40dB/decade) has been considered in the test result.

7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30MHz


SPURIOUS EMISSIONS (HORIZONTAL)

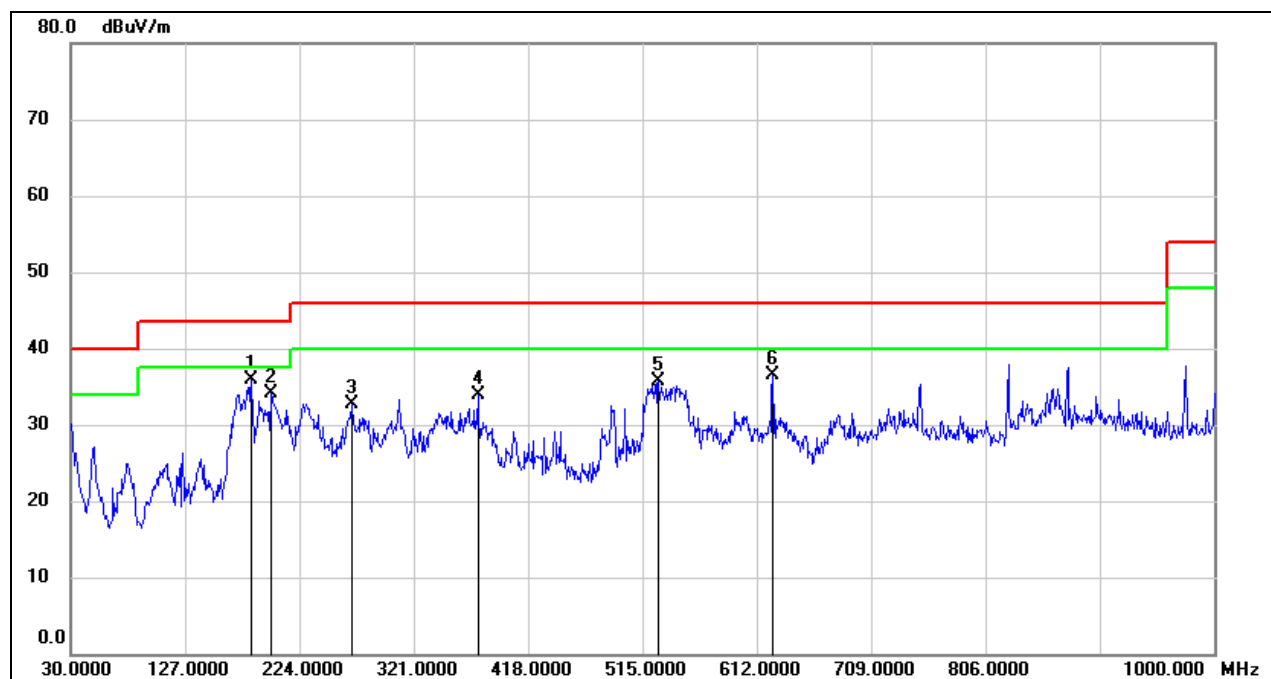

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	183.2600	46.88	-10.96	35.92	43.50	-7.58	QP
2	199.7500	45.14	-11.09	34.05	43.50	-9.45	QP
3	268.6200	45.36	-12.62	32.74	46.00	-13.26	QP
4	375.3200	42.40	-8.53	33.87	46.00	-12.13	QP
5	528.5800	41.88	-6.17	35.71	46.00	-10.29	QP
6	625.5800	41.48	-4.89	36.59	46.00	-9.41	QP

Note: 1. Result Level = Read Level + Correct Factor.

HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

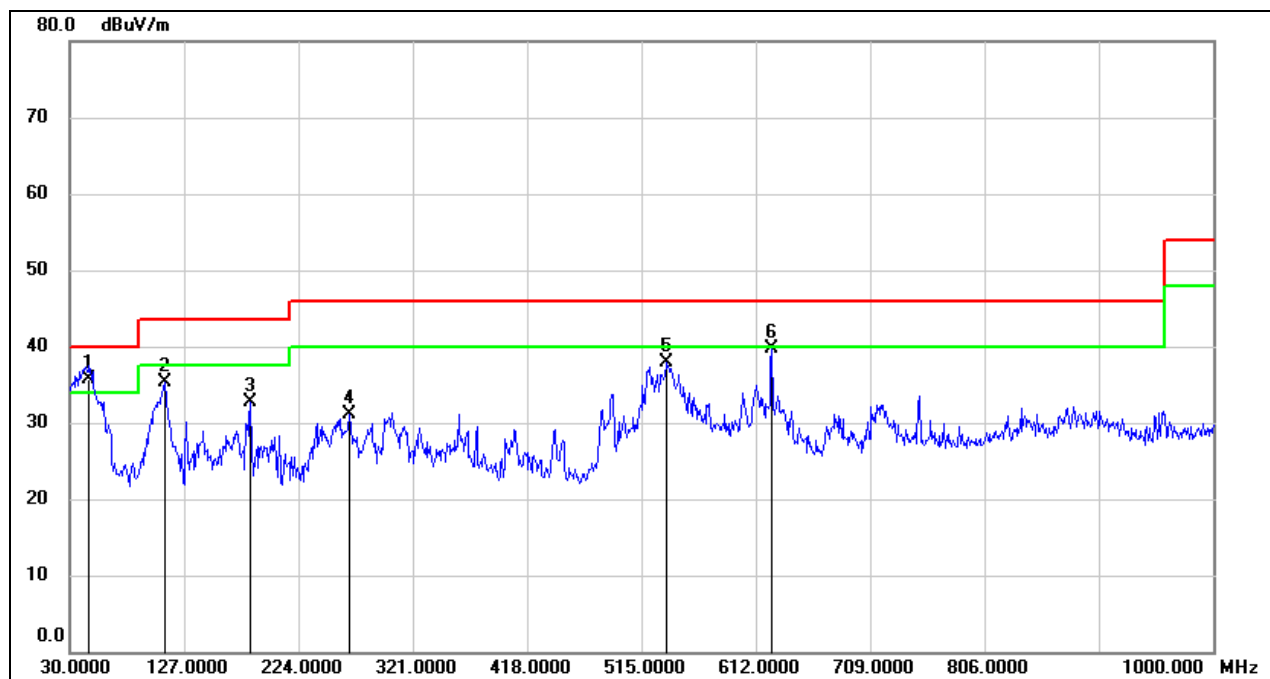


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	46.4900	50.60	-14.80	35.80	40.00	-4.20	QP
2	110.5100	50.51	-15.17	35.34	43.50	-8.16	peak
3	183.2600	43.72	-10.96	32.76	43.50	-10.74	peak
4	266.6800	43.81	-12.74	31.07	46.00	-14.93	peak
5	536.3400	44.11	-6.11	38.00	46.00	-8.00	peak
6	625.5800	44.65	-4.89	39.76	46.00	-6.24	peak

Note: 1. Result Level = Read Level + Correct Factor.

7.3. SPURIOUS EMISSIONS BELOW 30MHz

SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

9 kHz~ 150 kHz

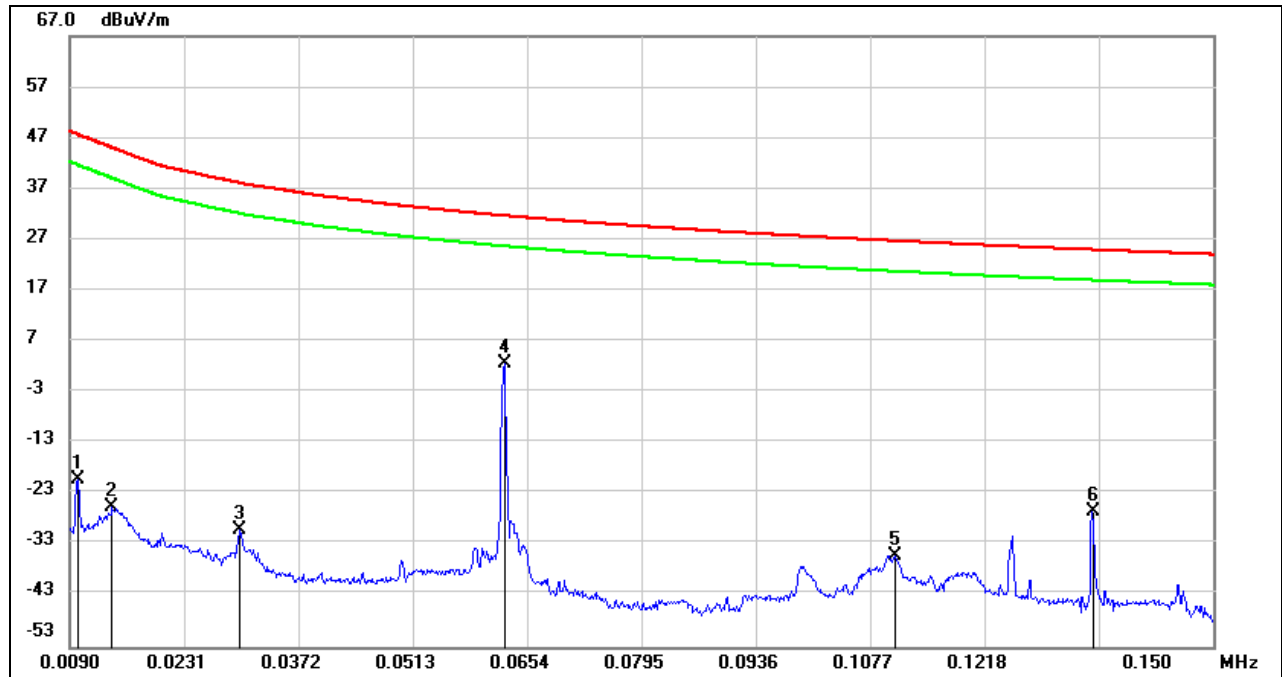


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	67.94	-88.00	-20.06	47.60	-71.56	-3.90	-67.66	peak
2	0.0142	62.39	-87.88	-25.49	45.07	-76.99	-6.43	-70.56	peak
3	0.0300	58.09	-88.13	-30.04	38.06	-81.54	-13.44	-68.10	peak
4	0.0626	90.91	-88.35	2.56	31.69	-48.94	-19.81	-29.13	peak
5	0.1108	53.52	-88.63	-35.11	26.72	-86.61	-24.78	-61.83	peak
6	0.1351	62.40	-88.92	-26.52	25.00	-78.02	-26.50	-51.52	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150 kHz ~ 490 kHz

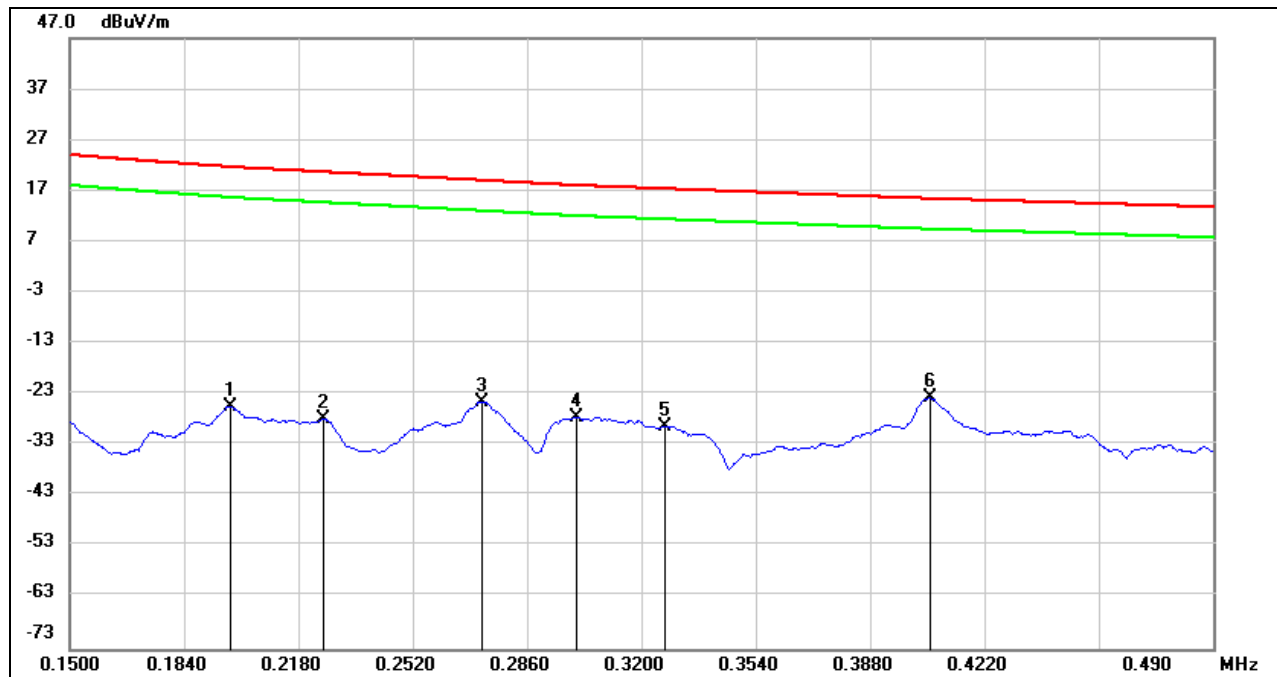


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1976	63.74	-89.05	-25.31	21.69	-76.81	-29.81	-47.00	peak
2	0.2255	61.20	-89.02	-27.82	20.68	-79.32	-30.82	-48.50	peak
3	0.2727	64.56	-88.99	-24.43	19.02	-75.93	-32.48	-43.45	peak
4	0.3006	61.57	-88.98	-27.41	18.04	-78.91	-33.46	-45.45	peak
5	0.3271	59.67	-88.96	-29.29	17.38	-80.79	-34.12	-46.67	peak
6	0.4057	65.15	-88.91	-23.76	15.45	-75.26	-36.05	-39.21	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490kHz ~ 30MHz

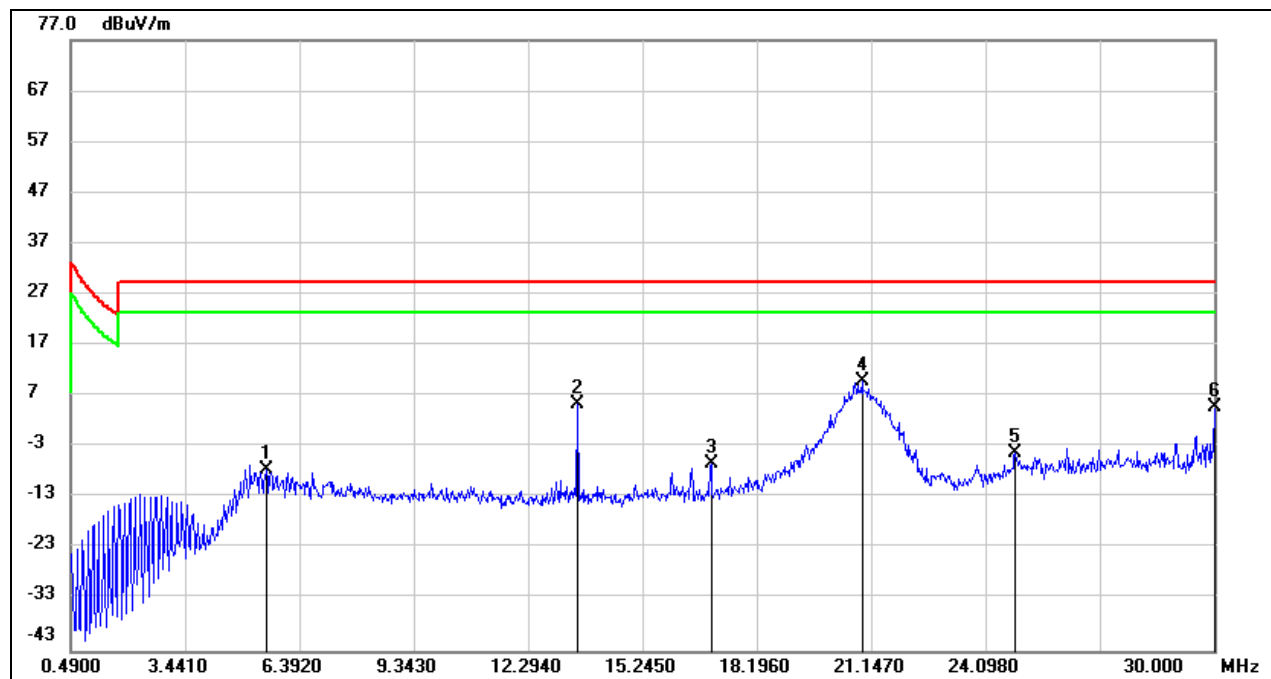

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	5.5362	40.98	-48.52	-7.54	29.54	-59.04	-21.96	-37.08	peak
2	13.5629	52.84	-47.43	5.41	/	/	/	/	peak
3	17.0155	40.86	-47.19	-6.33	29.54	-57.83	-21.96	-35.87	peak
4	20.9109	56.81	-46.78	10.03	29.54	-41.47	-21.96	-19.51	peak
5	24.8653	42.62	-46.70	-4.08	29.54	-55.58	-21.96	-33.62	peak
6	30.0000	51.11	-46.40	4.71	29.54	-46.79	-21.96	-24.83	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. About the Fundamental emission test result please refer to section 7.1.

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The diagram illustrates the experimental setup. A black box labeled 'EUT' is placed on a stand. The distance from the left wall to the EUT is 40cm. The height of the EUT from the floor is 80cm. A cable labeled 'AMN' is connected to the EUT, with a distance of 80cm indicated between the EUT and the AMN. The AMN is connected to a 'Receiver' unit, which is further connected to a computer system (monitor, keyboard, mouse) on a table.


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch FORM NO: 10-SL-F0059
*This report shall not be reproduced except in full, without the written approval of UL Verification Services
 (Guangzhou) Co., Ltd, Song Shan Lake Branch.*

TEST ENVIRONMENT

Temperature	22.4°C	Relative Humidity	46%
Atmosphere Pressure	101kPa	Test Voltage	AC 480V_60Hz

LINE N RESULTS with modified sample (transmitter terminated into a dummy load)

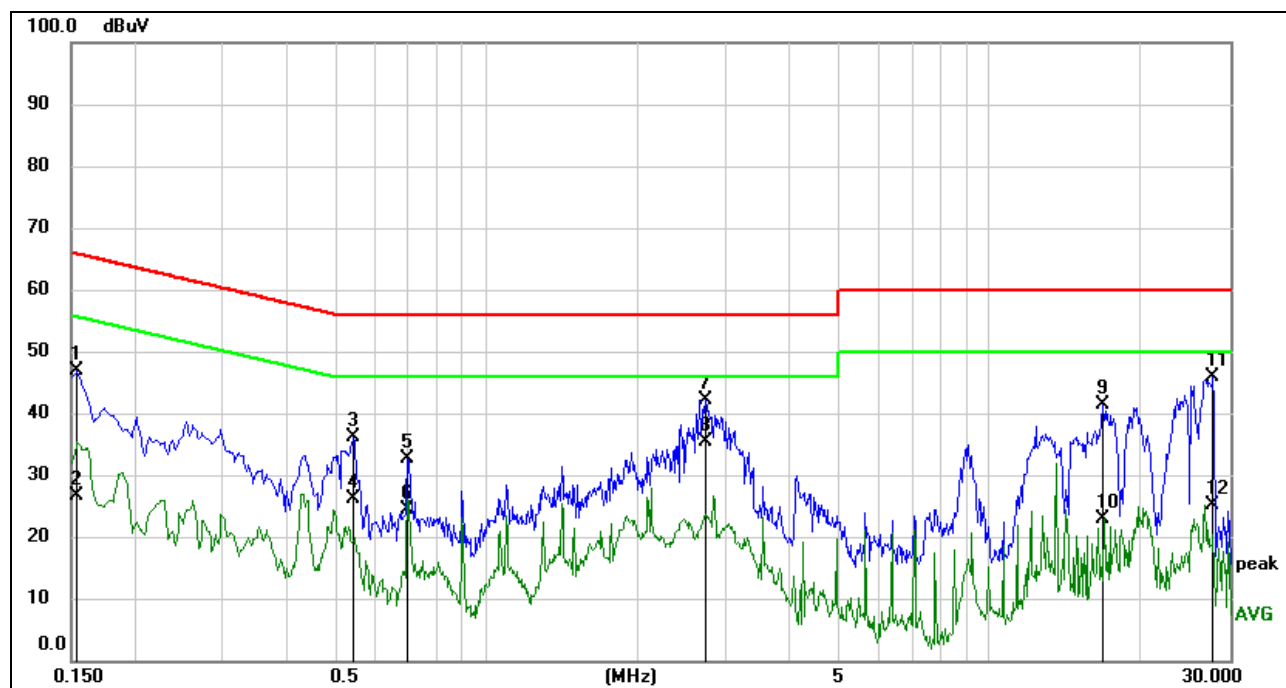


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	46.42	0.46	46.88	65.79	-18.91	QP
2	0.1539	26.21	0.46	26.67	55.79	-29.12	AVG
3	0.5460	35.82	0.37	36.19	56.00	-19.81	QP
4	0.5460	25.66	0.37	26.03	46.00	-19.97	AVG
5	0.6976	32.23	0.41	32.64	56.00	-23.36	QP
6	0.6976	24.03	0.41	24.44	46.00	-21.56	AVG
7	2.7300	41.59	0.47	42.06	56.00	-13.94	QP
8	2.7300	34.90	0.47	35.37	46.00	-10.63	AVG
9	16.8379	40.37	1.04	41.41	60.00	-18.59	QP
10	16.8379	21.76	1.04	22.80	50.00	-27.20	AVG
11	27.7340	44.27	1.51	45.78	60.00	-14.22	QP
12	27.7340	23.50	1.51	25.01	50.00	-24.99	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L1 RESULTS with modified sample (transmitter terminated into a dummy load)

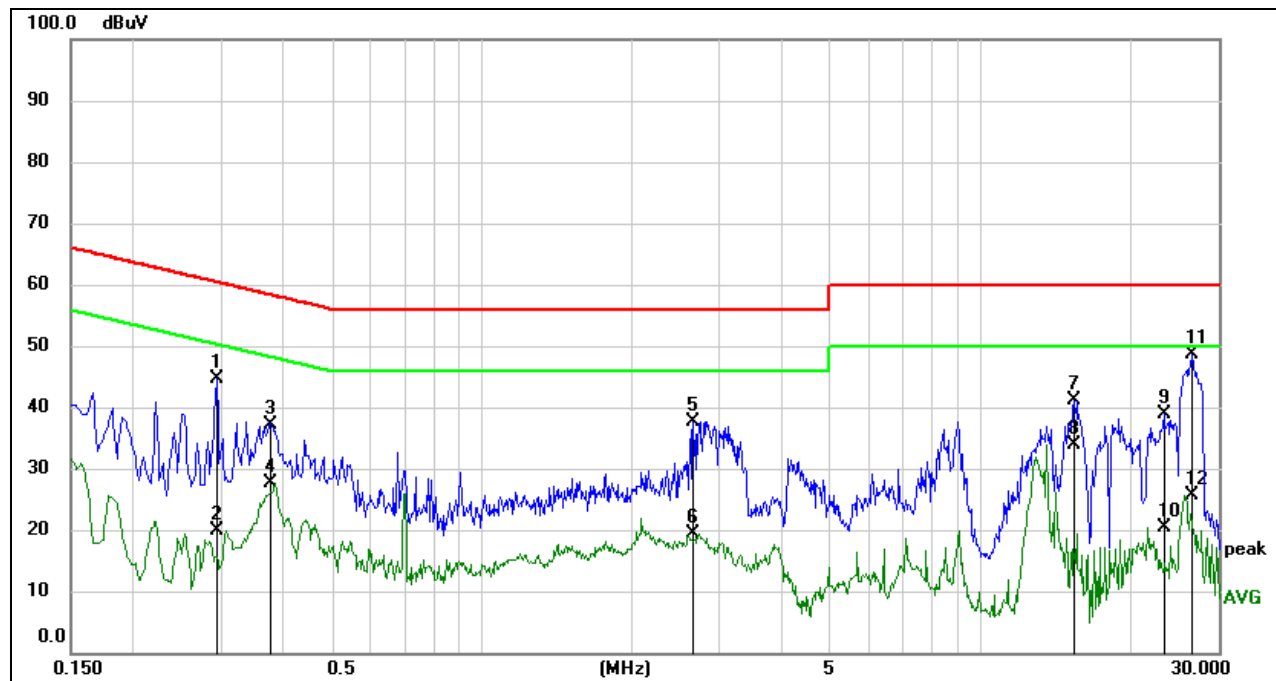


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2939	44.36	0.33	44.69	60.41	-15.72	QP
2	0.2939	19.44	0.33	19.77	50.41	-30.64	AVG
3	0.3780	36.96	0.29	37.25	58.32	-21.07	QP
4	0.3780	27.30	0.29	27.59	48.32	-20.73	AVG
5	2.6538	37.18	0.47	37.65	56.00	-18.35	QP
6	2.6538	18.80	0.47	19.27	46.00	-26.73	AVG
7	15.4300	40.09	0.94	41.03	60.00	-18.97	QP
8	15.4300	32.92	0.94	33.86	50.00	-16.14	AVG
9	23.2700	37.60	1.38	38.98	60.00	-21.02	QP
10	23.2700	19.00	1.38	20.38	50.00	-29.62	AVG
11	26.5979	47.09	1.47	48.56	60.00	-11.44	QP
12	26.5979	24.11	1.47	25.58	50.00	-24.42	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L2 RESULTS with modified sample (transmitter terminated into a dummy load)

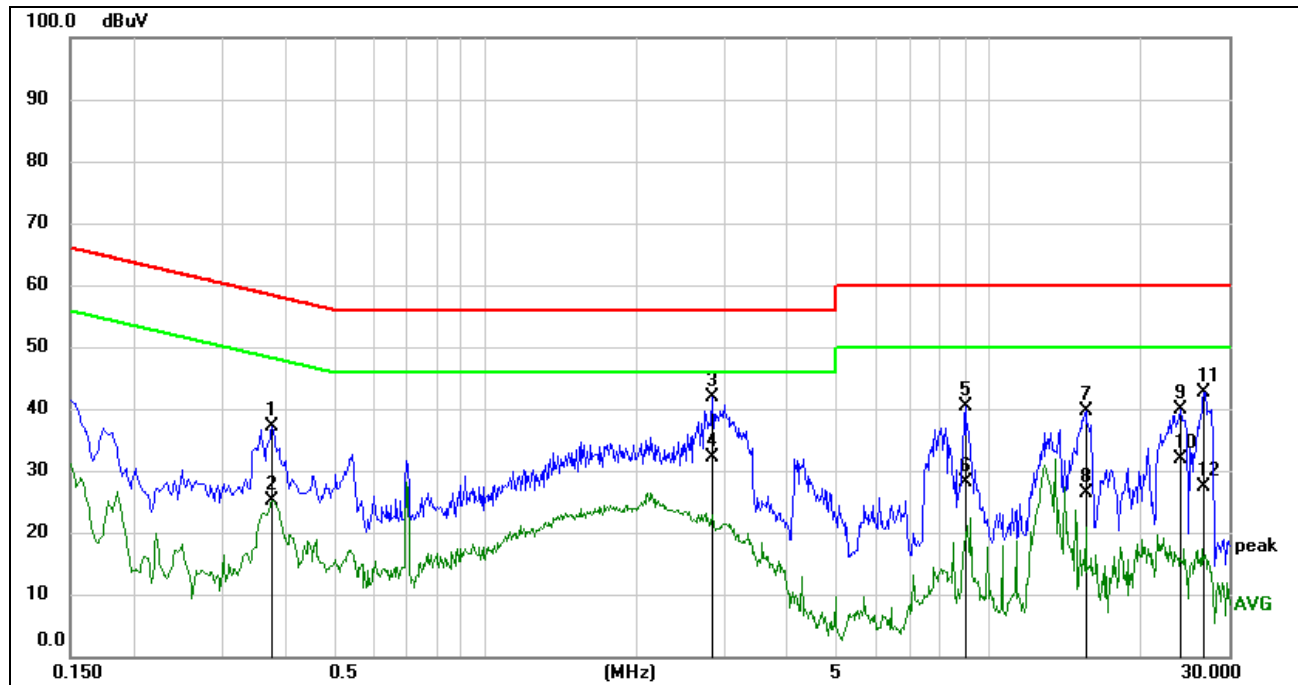


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3780	36.87	0.29	37.16	58.32	-21.16	QP
2	0.3780	24.80	0.29	25.09	48.32	-23.23	AVG
3	2.8340	41.42	0.47	41.89	56.00	-14.11	QP
4	2.8340	31.62	0.47	32.09	46.00	-13.91	AVG
5	8.9700	39.63	0.82	40.45	60.00	-19.55	QP
6	8.9700	27.23	0.82	28.05	50.00	-21.95	AVG
7	15.6138	38.60	0.96	39.56	60.00	-20.44	QP
8	15.6138	25.51	0.96	26.47	50.00	-23.53	AVG
9	24.0259	38.40	1.40	39.80	60.00	-20.20	QP
10	24.0259	30.52	1.40	31.92	50.00	-18.08	AVG
11	26.8260	41.18	1.49	42.67	60.00	-17.33	QP
12	26.8260	25.78	1.49	27.27	50.00	-22.73	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L3 RESULTS with modified sample (transmitter terminated into a dummy load)

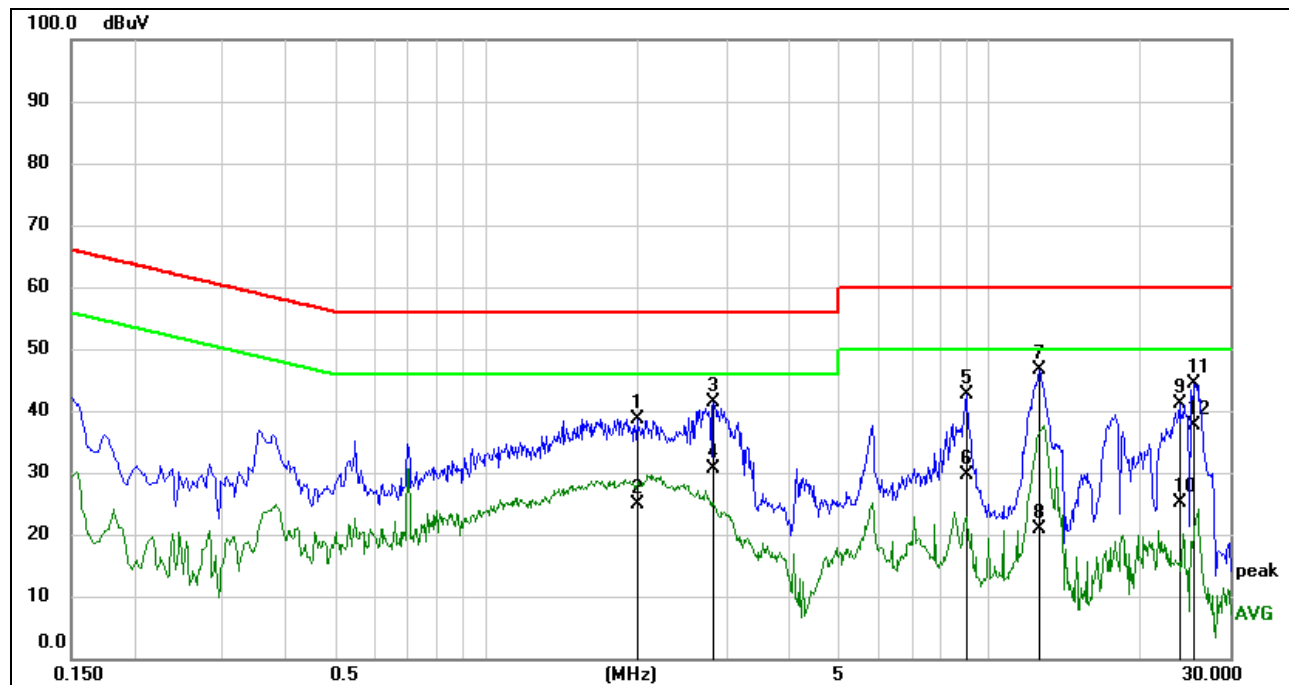


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1.9939	38.28	0.43	38.71	56.00	-17.29	QP
2	1.9939	24.45	0.43	24.88	46.00	-21.12	AVG
3	2.8340	40.81	0.47	41.28	56.00	-14.72	QP
4	2.8340	30.16	0.47	30.63	46.00	-15.37	AVG
5	8.9818	41.92	0.82	42.74	60.00	-17.26	QP
6	8.9818	28.76	0.82	29.58	50.00	-20.42	AVG
7	12.5500	45.67	0.88	46.55	60.00	-13.45	QP
8	12.5500	19.92	0.88	20.80	50.00	-29.20	AVG
9	23.8779	39.72	1.40	41.12	60.00	-18.88	QP
10	23.8779	23.81	1.40	25.21	50.00	-24.79	AVG
11	25.5700	42.86	1.44	44.30	60.00	-15.70	QP
12	25.5700	36.16	1.44	37.60	50.00	-12.40	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE N RESULTS with modified sample (transmitter terminated into a dummy load)

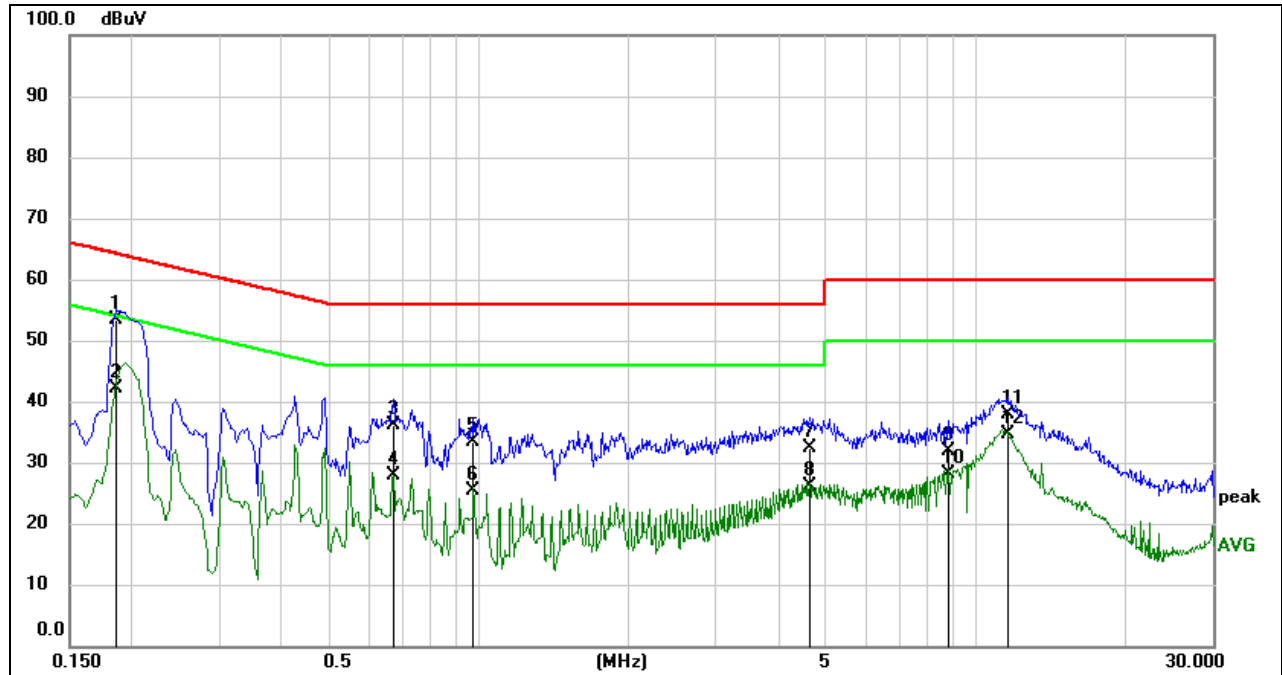


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1862	43.18	10.17	53.35	64.20	-10.85	QP
2	0.1862	31.92	10.17	42.09	54.20	-12.11	AVG
3	0.6725	26.16	10.03	36.19	56.00	-19.81	QP
4	0.6725	17.92	10.03	27.95	46.00	-18.05	AVG
5	0.9768	23.46	9.85	33.31	56.00	-22.69	QP
6	0.9768	15.64	9.85	25.49	46.00	-20.51	AVG
7	4.6461	22.14	10.35	32.49	56.00	-23.51	QP
8	4.6461	15.87	10.35	26.22	46.00	-19.78	AVG
9	8.8024	21.56	10.43	31.99	60.00	-28.01	QP
10	8.8024	17.61	10.43	28.04	50.00	-21.96	AVG
11	11.6147	27.32	10.49	37.81	60.00	-22.19	QP
12	11.6147	24.18	10.49	34.67	50.00	-15.33	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE N RESULTS with unmodified sample (antenna present)

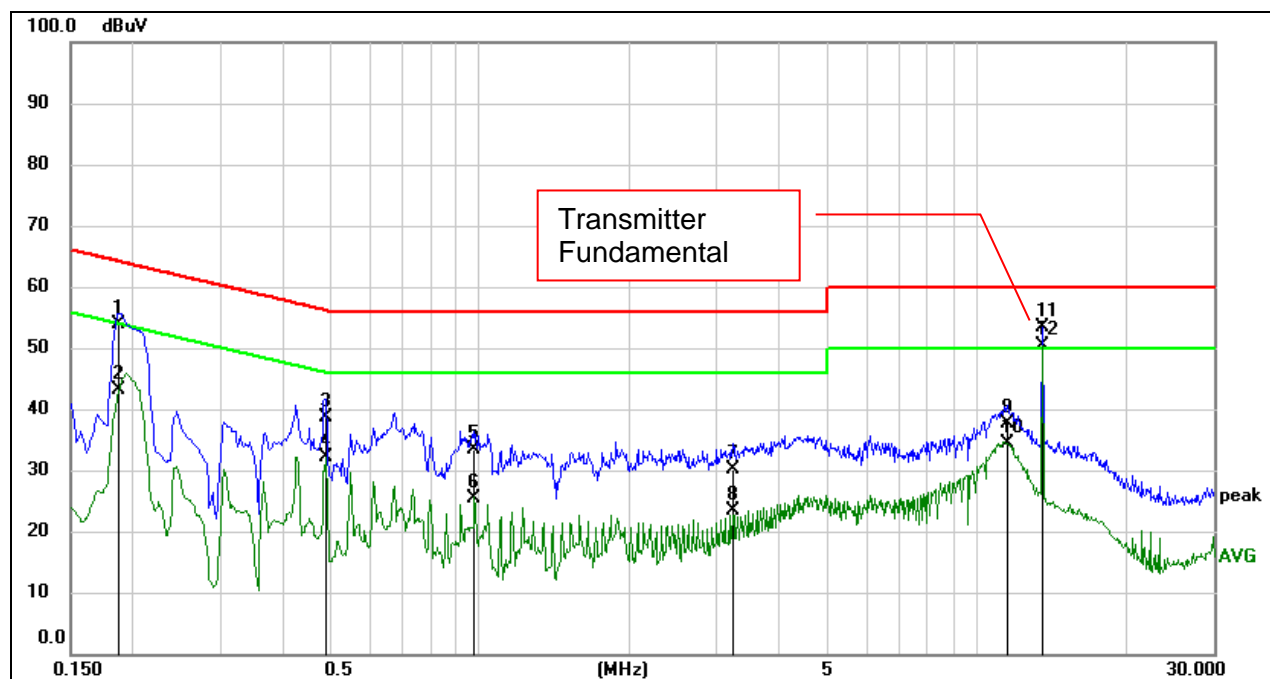


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1874	43.60	10.16	53.76	64.15	-10.39	QP
2	0.1874	33.03	10.16	43.19	54.15	-10.96	AVG
3	0.4892	28.52	10.04	38.56	56.18	-17.62	QP
4	0.4892	22.19	10.04	32.23	46.18	-13.95	AVG
5	0.9795	23.54	9.84	33.38	56.00	-22.62	QP
6	0.9795	15.43	9.84	25.27	46.00	-20.73	AVG
7	3.2400	19.83	10.22	30.05	56.00	-25.95	QP
8	3.2400	13.27	10.22	23.49	46.00	-22.51	AVG
9	11.5541	27.03	10.49	37.52	60.00	-22.48	QP
10	11.5541	23.83	10.49	34.32	50.00	-15.68	AVG
11	13.5579	42.72	10.58	53.30	/	/	fundamental
12	13.5579	39.68	10.58	50.26	/	/	fundamental

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with modified sample (transmitter terminated into a dummy load)

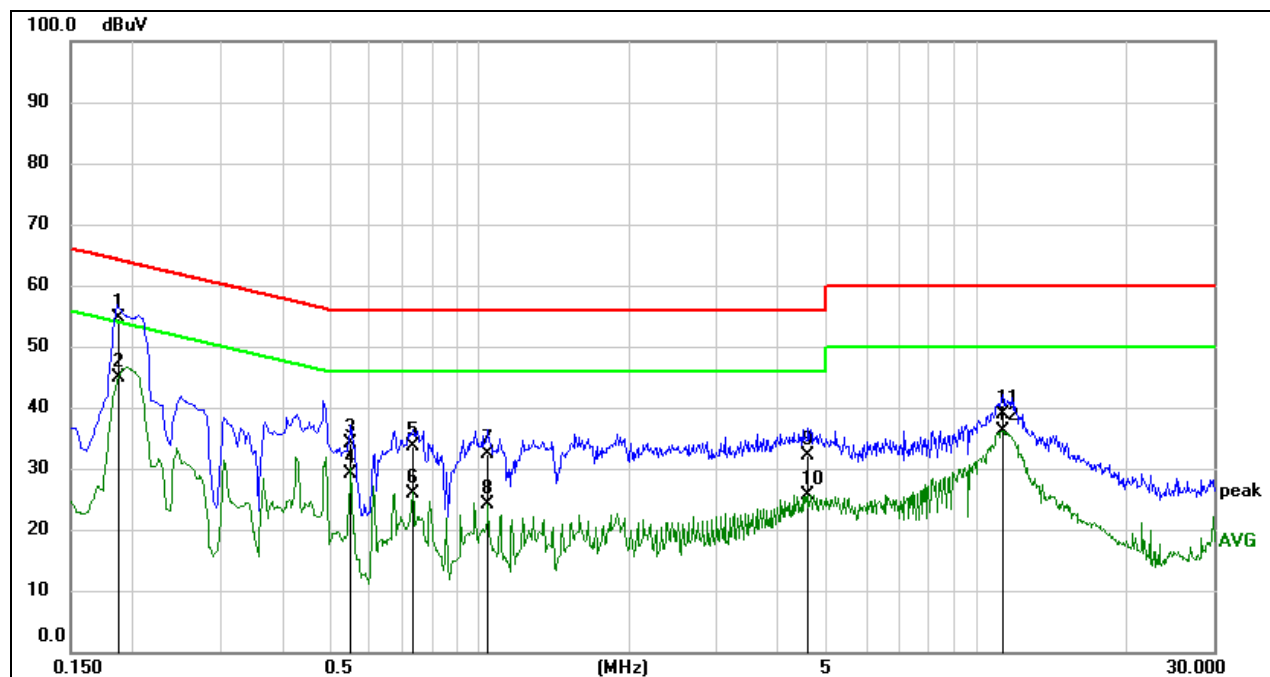


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1875	44.31	10.26	54.57	64.15	-9.58	QP
2	0.1875	34.56	10.26	44.82	54.15	-9.33	AVG
3	0.5503	24.00	10.24	34.24	56.00	-21.76	QP
4	0.5503	18.79	10.24	29.03	46.00	-16.97	AVG
5	0.7344	23.37	10.21	33.58	56.00	-22.42	QP
6	0.7344	15.71	10.21	25.92	46.00	-20.08	AVG
7	1.0392	22.34	10.03	32.37	56.00	-23.63	QP
8	1.0392	14.19	10.03	24.22	46.00	-21.78	AVG
9	4.5841	21.85	10.25	32.10	56.00	-23.90	QP
10	4.5841	15.49	10.25	25.74	46.00	-20.26	AVG
11	11.3088	28.60	10.38	38.98	60.00	-21.02	QP
12	11.3088	25.75	10.38	36.13	50.00	-13.87	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with unmodified sample (antenna present)

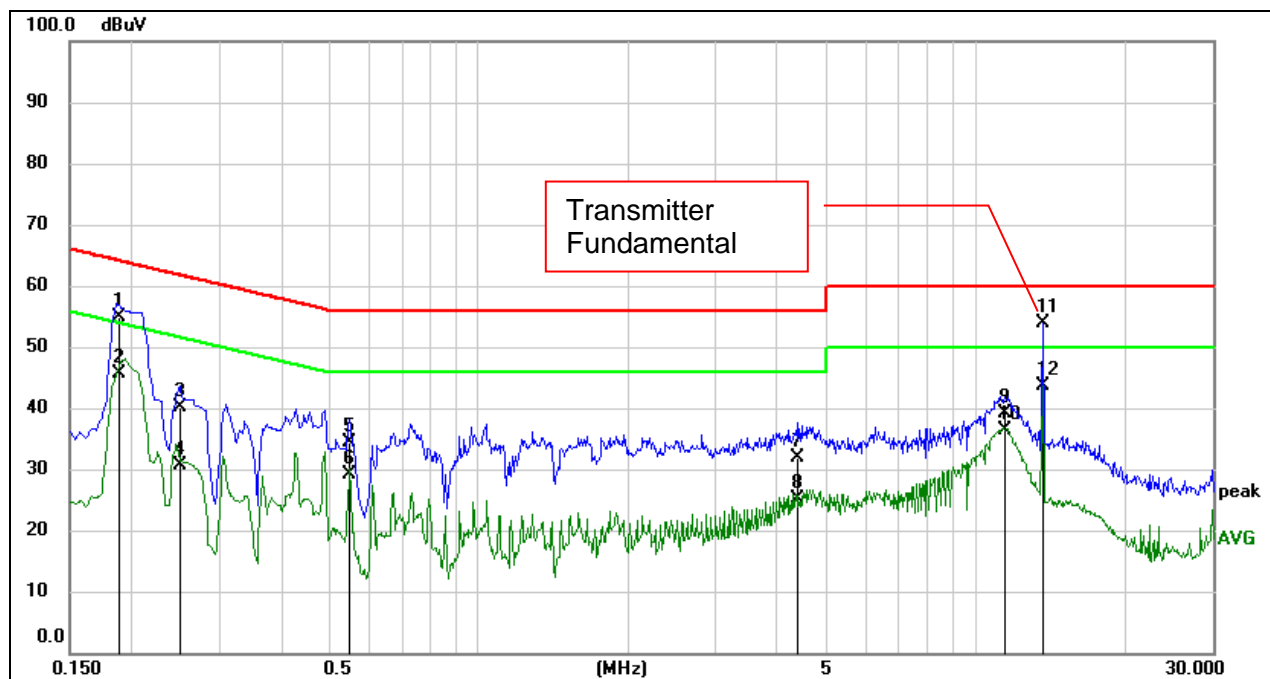

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1884	44.52	10.26	54.78	64.11	-9.33	QP
2	0.1884	35.35	10.26	45.61	54.11	-8.50	AVG
3	0.2497	29.82	10.24	40.06	61.77	-21.71	QP
4	0.2497	20.36	10.24	30.60	51.77	-21.17	AVG
5	0.5493	24.09	10.24	34.33	56.00	-21.67	QP
6	0.5493	18.80	10.24	29.04	46.00	-16.96	AVG
7	4.4016	21.61	10.24	31.85	56.00	-24.15	QP
8	4.4016	14.87	10.24	25.11	46.00	-20.89	AVG
9	11.4921	28.67	10.39	39.06	60.00	-20.94	QP
10	11.4921	25.87	10.39	36.26	50.00	-13.74	AVG
11	13.6339	43.35	10.49	53.84	/	/	fundamental
12	13.6339	33.18	10.49	43.67	/	/	fundamental

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

RESULTS

Complies

END OF REPORT