

10. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

10.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

10.2. Test Setup

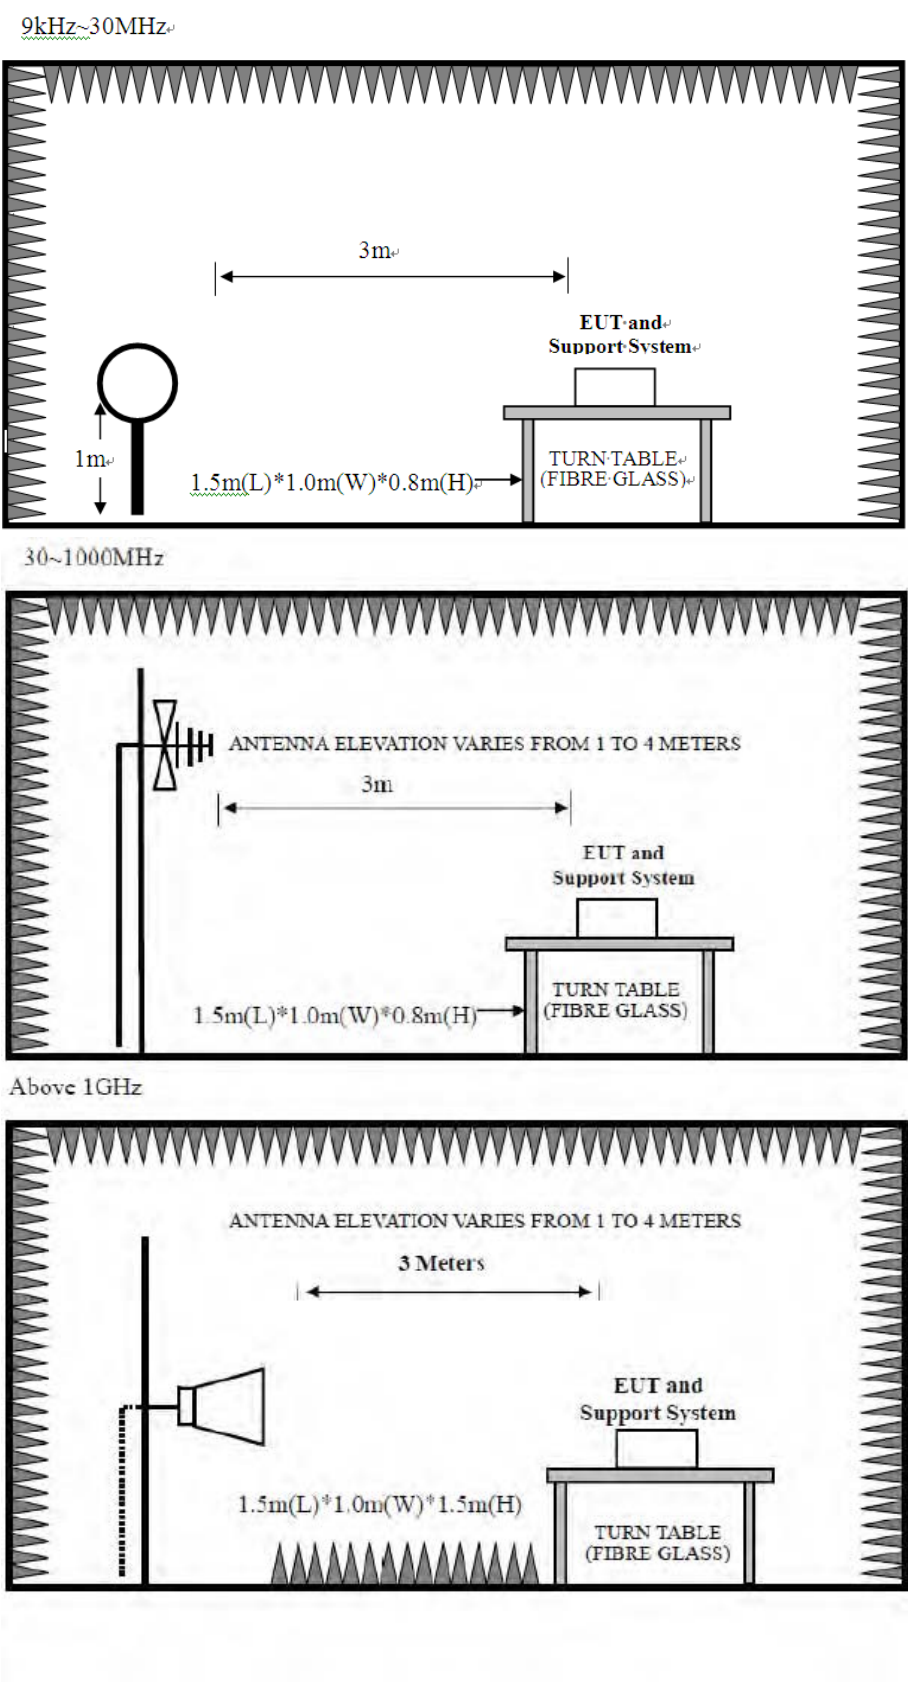

10.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq 98\%$, VBW=10Hz
		Duty cycle $< 98\%$, VBW $\geq 1/T$
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

10.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 10.3.
- g. Repeat above procedures until all channels and test modes were measured.
- h. Record the results in the test report.

Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2402MHz ,2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

10.5. Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan,Guangdong,China
Tel:+86-769-83081888
Fax:+86-769-83081878

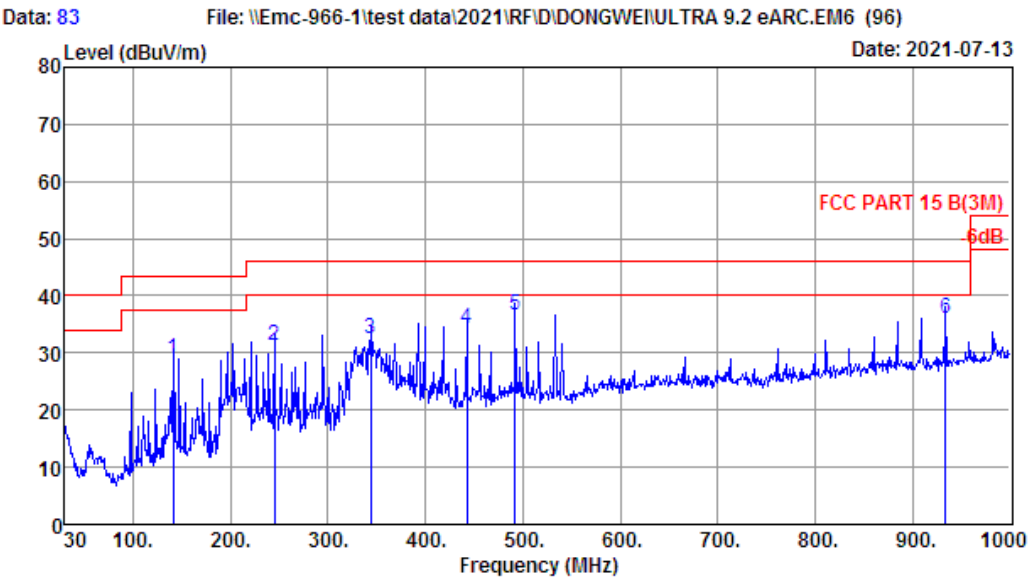

Site no. : 1# 966 Chamber Data no. : 83
Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:23.9℃;Humi:43%;Press:101.82kPa
Engineer : XJF
EUT : Shockwafe Sound Bar with
Wireless Subwoofer
Power : DC 19V From Adapter Input AC 120V/60Hz
M/N : ULTRA 9.2 eARC
Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	141.55	12.23	1.05	15.57	28.85	43.50	14.65	QP
2	245.34	11.60	1.61	18.15	31.36	46.00	14.64	QP
3	344.28	14.98	2.07	15.41	32.46	46.00	13.54	QP
4	442.25	16.98	2.48	14.68	34.14	46.00	11.86	QP
5	491.72	18.14	2.66	15.79	36.59	46.00	9.41	QP
6	934.04	24.22	4.26	7.54	36.02	46.00	9.98	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 84

File: \\Emc-966-1\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)

Date: 2021-07-13

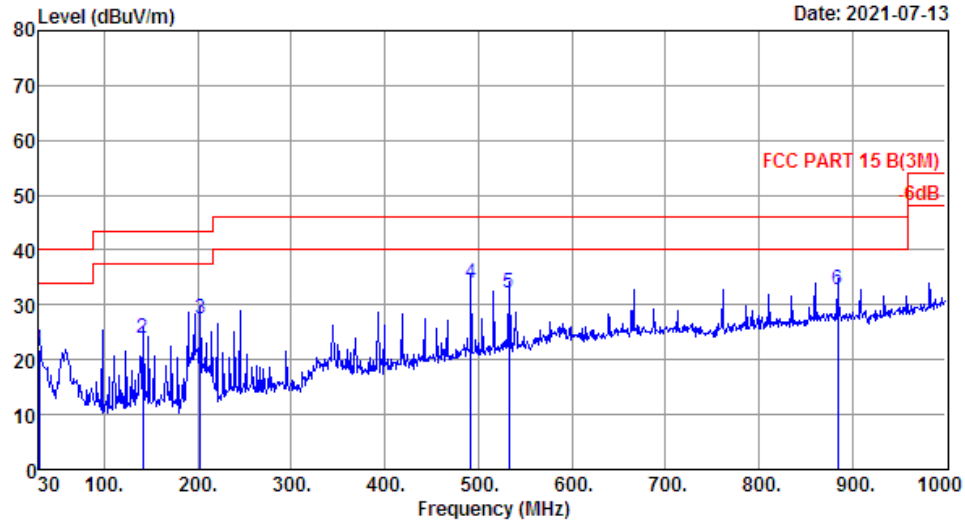

Site no. : 1# 966 Chamber Data no. : 84
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.9°C;Humi:43%;Press:101.82kPa
 Engineer : XJF
 EUT : Shockwafe Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.00	18.40	0.14	3.32	21.86	40.00	18.14	QP
2	141.55	12.23	1.05	10.63	23.91	43.50	19.59	QP
3	202.66	8.52	1.28	17.71	27.51	43.50	15.99	QP
4	491.72	18.14	2.66	13.04	33.84	46.00	12.16	QP
5	532.46	18.88	2.79	10.57	32.24	46.00	13.76	QP
6	884.57	23.85	3.88	5.18	32.91	46.00	13.09	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All test mode had been pre-test, only the worst case was reported.

Radiated Emissions Above 1G


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 17

File: \\Emc-966-1\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)

Date: 2021-07-07

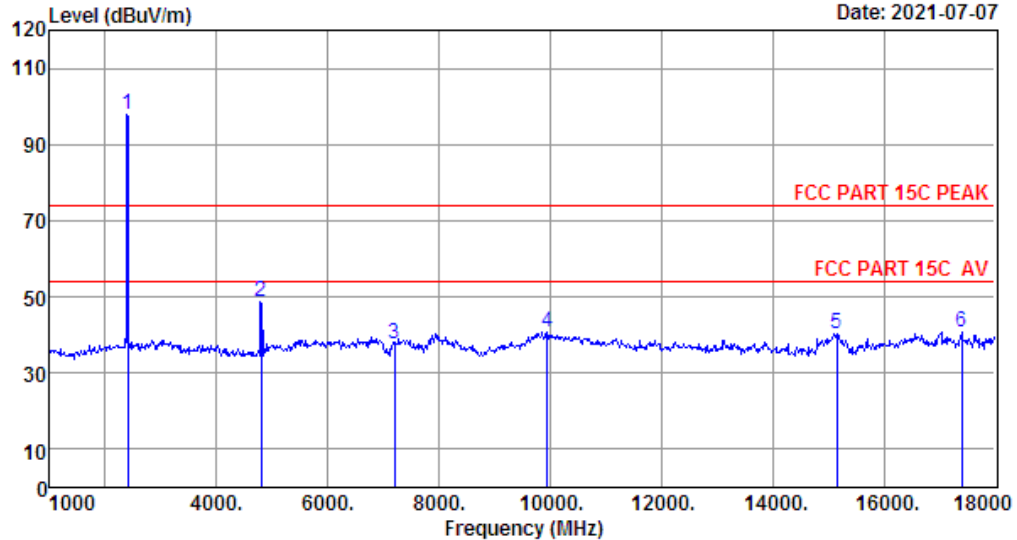

Site no. : 1# 966 Chamber Data no. : 17
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.1'; Humi:60%; Press:101.52kPa
 Engineer : DUO
 EUT : Shockwafe Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2402.00	27.26	1.45	34.64	104.00	98.07	74.00	-24.07	Peak
2	4804.00	31.12	3.25	34.66	48.94	48.65	74.00	25.35	Peak
3	7206.00	36.21	5.19	34.82	30.88	37.46	74.00	36.54	Peak
4	9942.00	38.80	5.85	34.21	30.49	40.93	74.00	33.07	Peak
5	15161.00	40.73	6.69	34.54	27.46	40.34	74.00	33.66	Peak
6	17405.00	44.15	7.82	34.36	22.99	40.60	74.00	33.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 18

File: \\Emc-966-1\test data\2021\RF\ID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)

Date: 2021-07-07

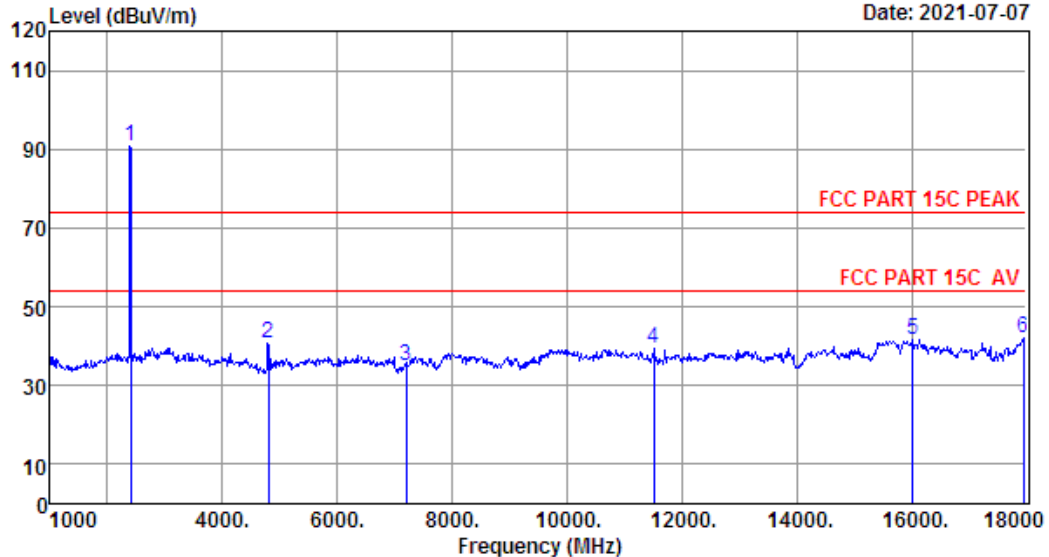

Site no. : 1# 966 Chamber Data no. : 18
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.1';Humi:60%;Press:101.52kPa
 Engineer : DUO
 EUT : Shockwafe Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	1.45	34.64	96.67	90.74	74.00	-16.74	Peak
2	4804.00	31.12	3.25	34.66	40.83	40.54	74.00	33.46	Peak
3	7206.00	36.21	5.19	34.82	28.20	34.78	74.00	39.22	Peak
4	11506.00	39.90	6.15	34.65	28.02	39.42	74.00	34.58	Peak
5	16028.00	39.84	6.92	34.21	29.06	41.61	74.00	32.39	Peak
6	17949.00	48.49	8.21	34.31	19.47	41.86	74.00	32.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 19

File: \\Emc-966-1\test data\2021\RF\ID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)

Date: 2021-07-07

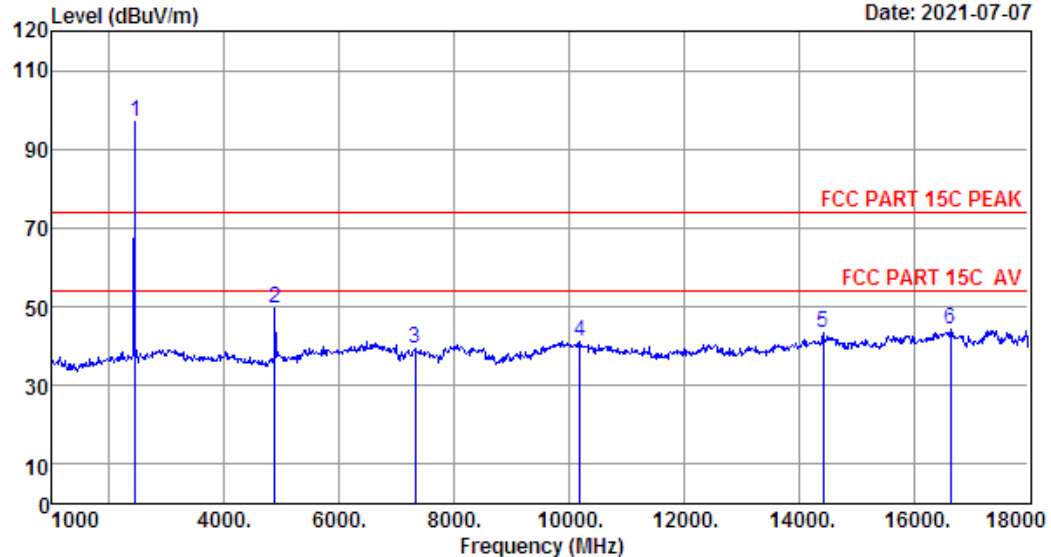

Site no. : 1# 966 Chamber Data no. : 19
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:24.1';Humi:60%;Press:101.52kPa
Engineer : DUO
EUT : Shockwave Sound Bar with
Wireless Subwoofer
Power : DC 19V From Adapter Input AC 120V/60Hz
M/N : ULTRA 9.2 eARC
Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	1.47	34.62	102.72	96.90	74.00	-22.90	Peak
2	4882.00	31.37	3.31	34.68	49.72	49.72	74.00	24.28	Peak
3	7323.00	36.46	5.22	34.83	32.50	39.35	74.00	34.65	Peak
4	10197.00	39.10	5.94	34.26	30.56	41.34	74.00	32.66	Peak
5	14430.00	41.02	6.85	34.43	30.02	43.46	74.00	30.54	Peak
6	16640.00	40.51	7.20	34.33	31.05	44.43	74.00	29.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 20

File: \\Emc-966-1\test data\2021\RF\ID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)

Date: 2021-07-07

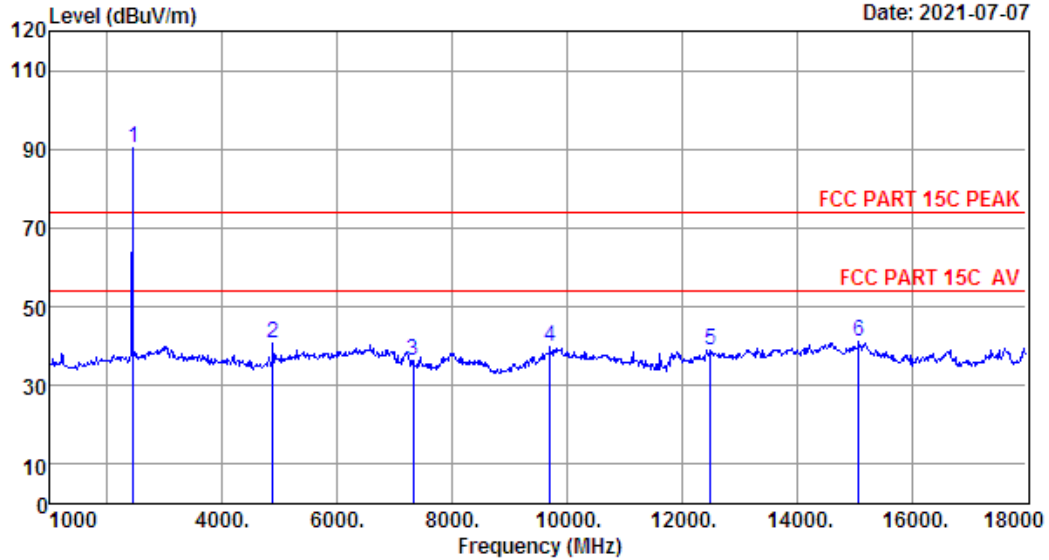

Site no. : 1# 966 Chamber Data no. : 20
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:24.1'; Humi:60%; Press:101.52kPa
Engineer : DUO
EUT : Shockwave Sound Bar with
Wireless Subwoofer
Power : DC 19V From Adapter Input AC 120V/60Hz
M/N : ULTRA 9.2 eARC
Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	1.47	34.62	96.08	90.26	74.00	-16.26	Peak
2	4882.00	31.37	3.31	34.68	40.90	40.90	74.00	33.10	Peak
3	7323.00	36.46	5.22	34.83	29.48	36.33	74.00	37.67	Peak
4	9704.00	38.31	5.66	34.26	30.15	39.86	74.00	34.14	Peak
5	12492.00	39.65	6.21	34.60	27.75	39.01	74.00	34.99	Peak
6	15076.00	40.82	6.76	34.57	28.36	41.37	74.00	32.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 21

File: \\Emc-966-1\test data\2021\RF\ID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)


Date: 2021-07-07

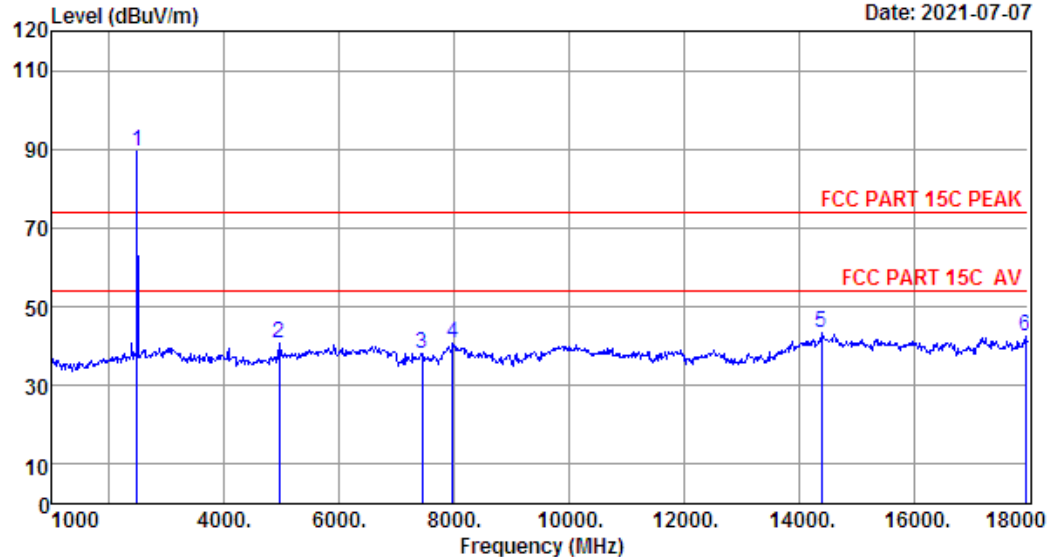

Site no. : 1# 966 Chamber Data no. : 21
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.1'; Humi:60%; Press:101.52kPa
 Engineer : DUO
 EUT : Shockwave Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	1.48	34.61	95.28	89.53	74.00	-15.53	Peak
2	4960.00	31.68	3.38	34.69	40.23	40.60	74.00	33.40	Peak
3	7440.00	36.70	5.26	34.84	31.00	38.12	74.00	35.88	Peak
4	7970.00	36.89	5.78	34.90	33.11	40.88	74.00	33.12	Peak
5	14396.00	41.02	6.82	34.42	30.03	43.45	74.00	30.55	Peak
6	17949.00	48.49	8.21	34.31	20.11	42.50	74.00	31.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

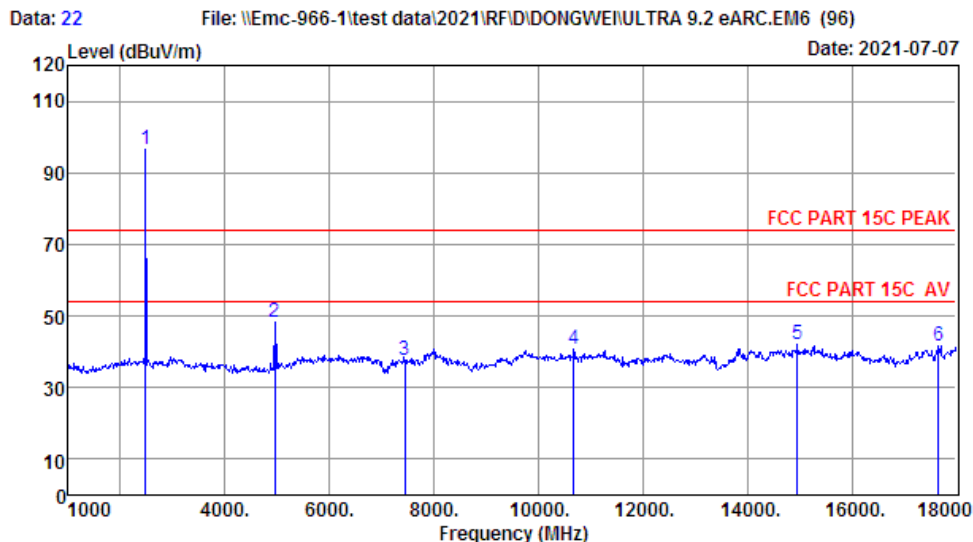

Site no. : 1# 966 Chamber Data no. : 22
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.1';Humi:60%;Press:101.52kPa
 Engineer : DUO
 EUT : Shockwave Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	1.48	34.61	102.38	96.63	74.00	-22.63	Peak
2	4960.00	31.68	3.38	34.69	47.68	48.05	74.00	25.95	Peak
3	7440.00	36.70	5.26	34.84	30.56	37.68	74.00	36.32	Peak
4	10673.00	39.58	6.05	34.40	29.54	40.77	74.00	33.23	Peak
5	14957.00	40.91	6.82	34.58	28.95	42.10	74.00	31.90	Peak
6	17660.00	46.19	8.02	34.33	21.69	41.57	74.00	32.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All test mode had been pre-test, only Low/Middle/High Channel of the worst case modulation mode was reported.

Radiated Band Edge


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 23

File: \\Emc-966-1\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)

Date: 2021-07-07

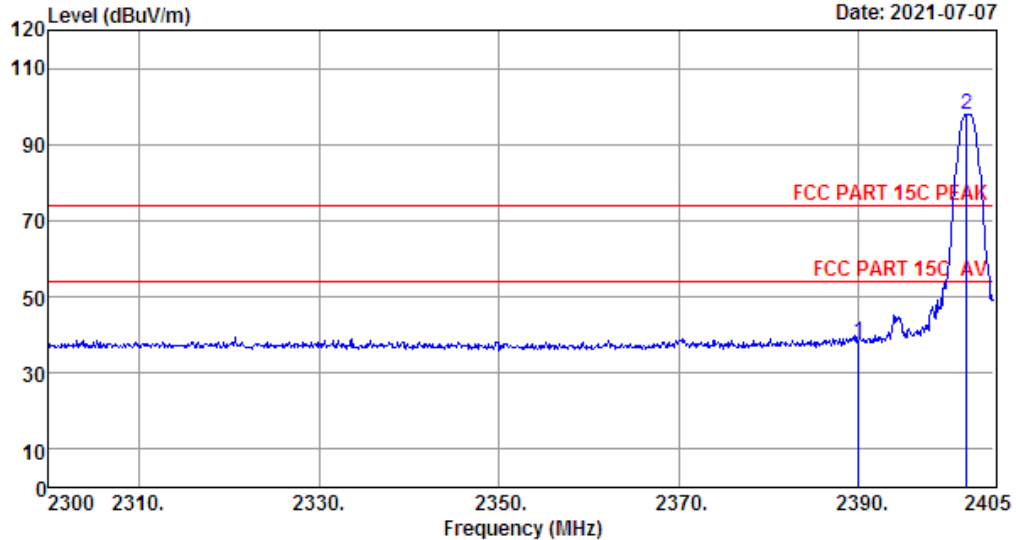

Site no. : 1# 966 Chamber Data no. : 23
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.1'; Humi:60%; Press:101.52kPa
 Engineer : DUO
 EUT : Shockwafe Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.26	1.45	34.64	44.02	38.09	74.00	35.91	Peak
2	2401.96	27.26	1.45	34.64	104.01	98.08	74.00	-24.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 24

File: \\Emc-966-1\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)

Date: 2021-07-07

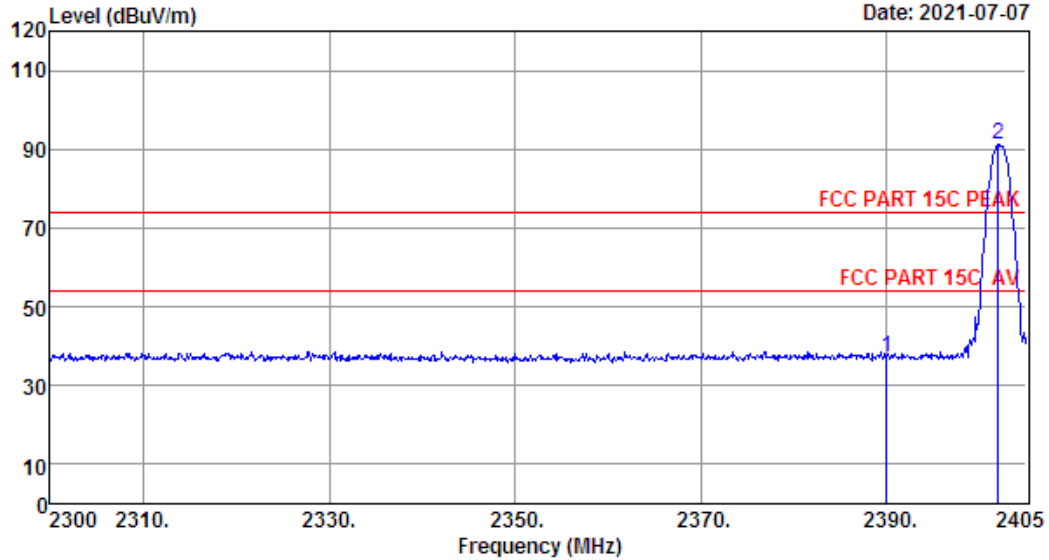

Site no. : 1# 966 Chamber Data no. : 24
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.1';Humi:60%;Press:101.52kPa
 Engineer : DUO
 EUT : Shockwave Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.26	1.45	34.64	42.92	36.99	74.00	37.01	Peak
2	2401.97	27.26	1.45	34.64	96.97	91.04	74.00	-17.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 25

File: \\Emc-966-1\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (96)

Date: 2021-07-07

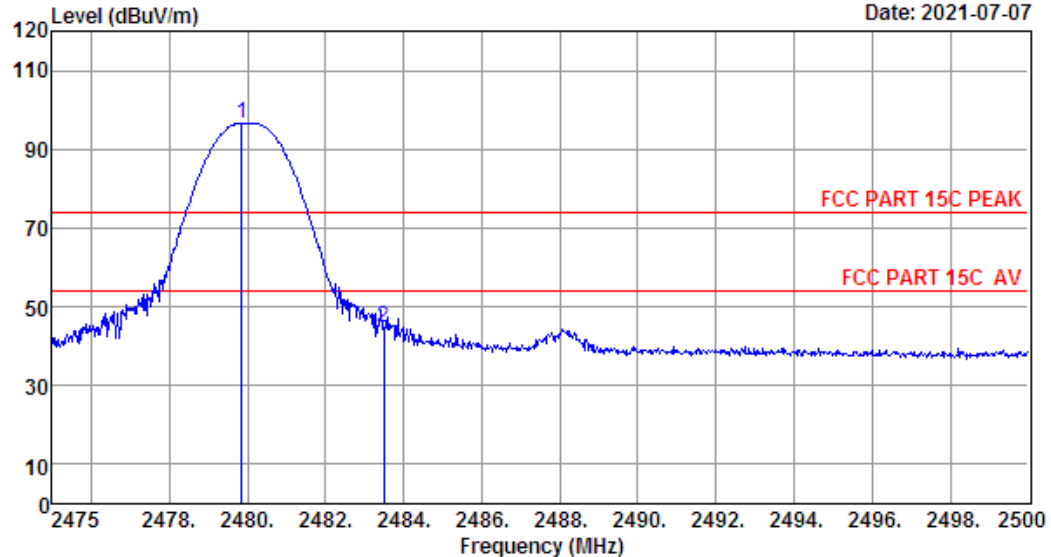


Site no. : 1# 966 Chamber Data no. : 25
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.1';Humi:60%;Press:101.52kPa
 Engineer : DUO
 EUT : Shockwafe Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.85	27.38	1.48	34.61	102.36	96.61	74.00	-22.61	Peak
2	2483.50	27.38	1.48	34.61	50.43	44.68	74.00	29.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official
 limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan,Guangdong,China
Tel:+86-769-83081888
Fax:+86-769-83081878

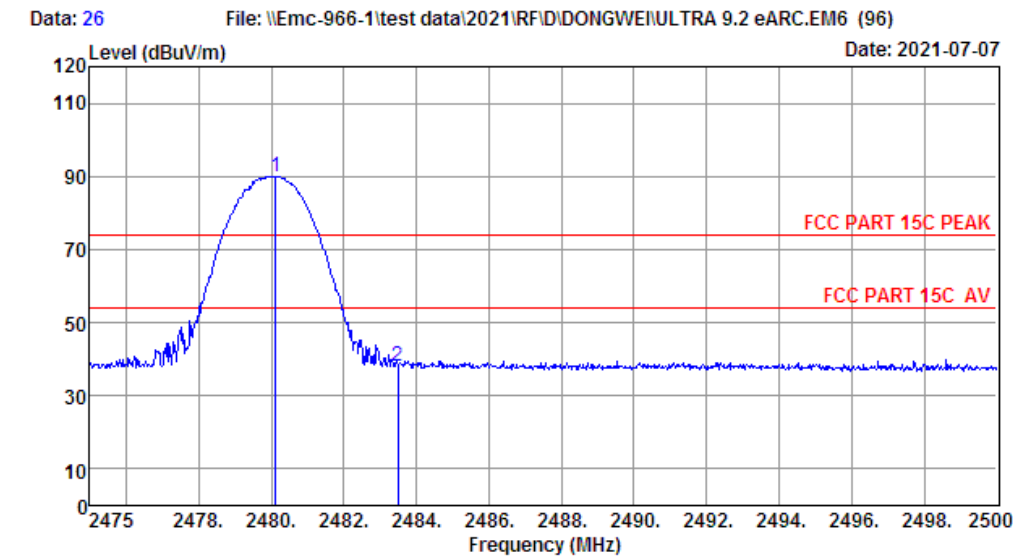

Site no. : 1# 966 Chamber Data no. : 26
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:24.1';Humi:60%;Press:101.52kPa
Engineer : DUO
EUT : Shockwafe Sound Bar with
Wireless Subwoofer
Power : DC 19V From Adapter Input AC 120V/60Hz
M/N : ULTRA 9.2 eARC
Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.13	27.38	1.48	34.61	95.53	89.78	74.00	-15.78	Peak
2	2483.50	27.38	1.48	34.61	44.03	38.28	74.00	35.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official
limit are not reported.

Note:

1. All test mode had been pre-test,only Low/High Channel of the worst case modulation mode was reported.



11.AC POWER LINE CONDUCTED EMISSIONS


11.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

11.2. Test Setup

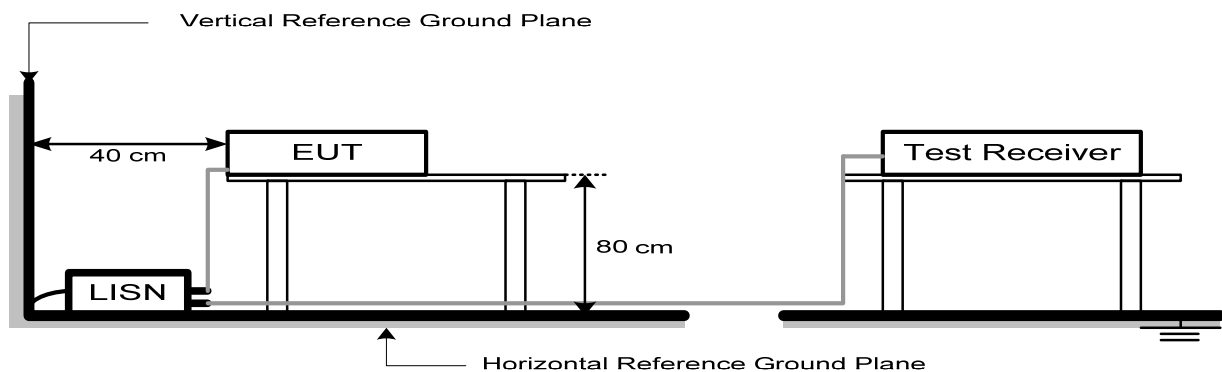

11.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold

11.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 11.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

11.5. Test Result


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 18

File: \\Emc-ce-2\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (36)

Date: 2021-07-12

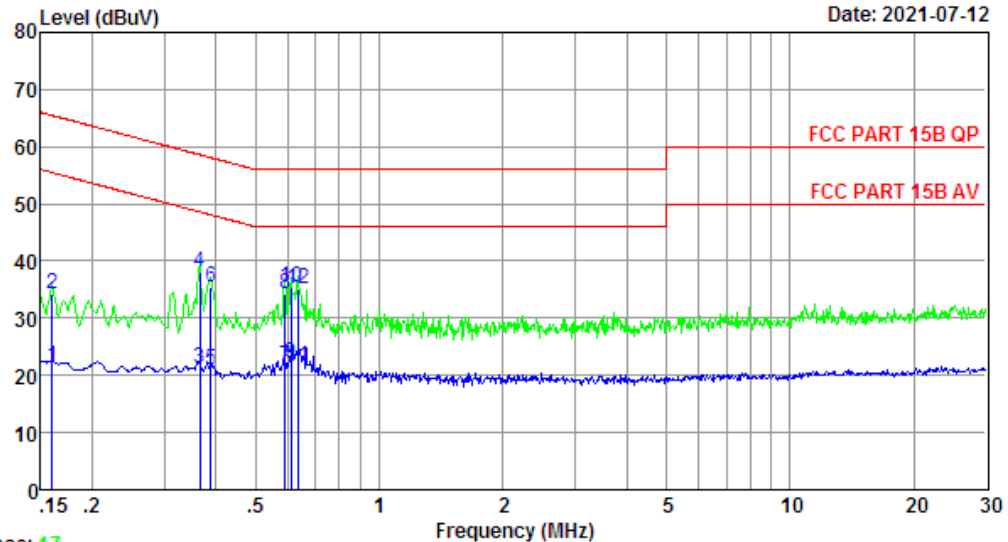

Trace: 17

Site no : 2#CE Shield Room Data no. : 18
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Shockwafe Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 120V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1598	9.68	9.69	2.20	21.57	55.47	33.90	Average
2	0.1598	9.68	9.69	14.80	34.17	65.47	31.30	QP
3	0.3653	9.75	9.92	1.49	21.16	48.61	27.45	Average
4	0.3653	9.75	9.92	18.33	38.00	58.61	20.61	QP
5	0.3893	9.76	9.92	1.37	21.05	48.08	27.03	Average
6	0.3893	9.76	9.92	15.65	35.33	58.08	22.75	QP
7	0.5885	9.81	9.92	1.92	21.65	46.00	24.35	Average
8	0.5885	9.81	9.92	14.65	34.38	56.00	21.62	QP
9	0.6108	9.81	9.92	2.44	22.17	46.00	23.83	Average
10	0.6108	9.81	9.92	15.65	35.38	56.00	20.62	QP
11	0.6372	9.82	9.92	1.95	21.69	46.00	24.31	Average
12	0.6372	9.82	9.92	15.45	35.19	56.00	20.81	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 20

File: \\Emc-ce-2\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (36)

Date: 2021-07-12

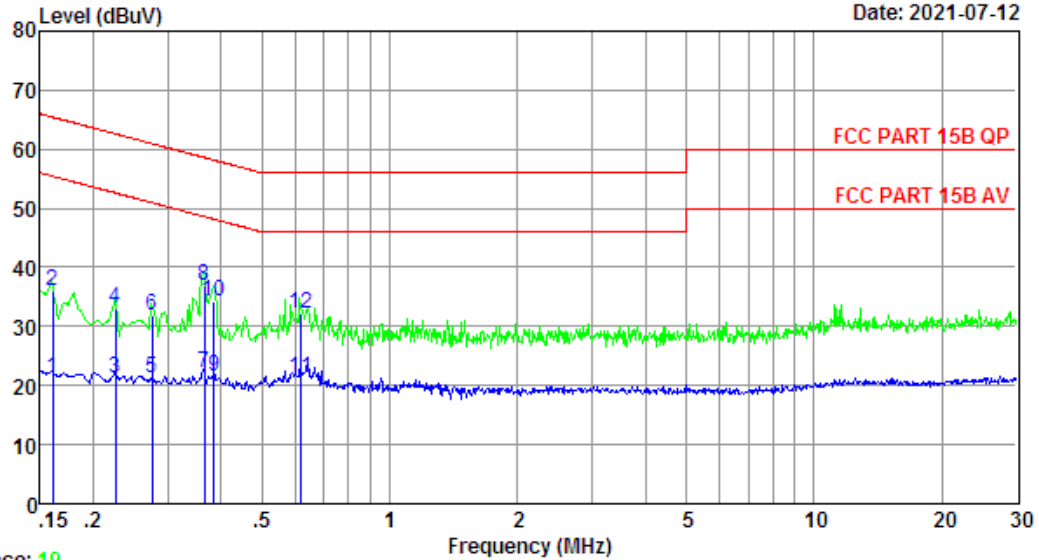

Trace: 19

Site no : 2#CE Shield Room Data no. : 20
Env. / Ins. : Temp:22.8℃ Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : FCC PART 15B QP
Engineer : ZSX
EUT : Shockwafe Sound Bar with
Wireless Subwoofer
Power : DC 19V From Adapter Input AC 120V/60Hz
M/N : ULTRA 9.2 eARC
Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1607	9.64	9.69	1.89	21.22	55.43	34.21	Average
2	0.1607	9.64	9.69	16.77	36.10	65.43	29.33	QP
3	0.2256	9.65	9.84	1.75	21.24	52.61	31.37	Average
4	0.2256	9.65	9.84	13.55	33.04	62.61	29.57	QP
5	0.2759	9.66	9.92	1.55	21.13	50.94	29.81	Average
6	0.2759	9.66	9.92	12.24	31.82	60.94	29.12	QP
7	0.3653	9.67	9.92	2.48	22.07	48.61	26.54	Average
8	0.3653	9.67	9.92	17.35	36.94	58.61	21.67	QP
9	0.3852	9.68	9.92	1.82	21.42	48.17	26.75	Average
10	0.3852	9.68	9.92	14.77	34.37	58.17	23.80	QP
11	0.6173	9.71	9.92	1.72	21.35	46.00	24.65	Average
12	0.6173	9.71	9.92	12.51	32.14	56.00	23.86	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 22

File: \\Emc-ce-2\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (36)

Date: 2021-07-12

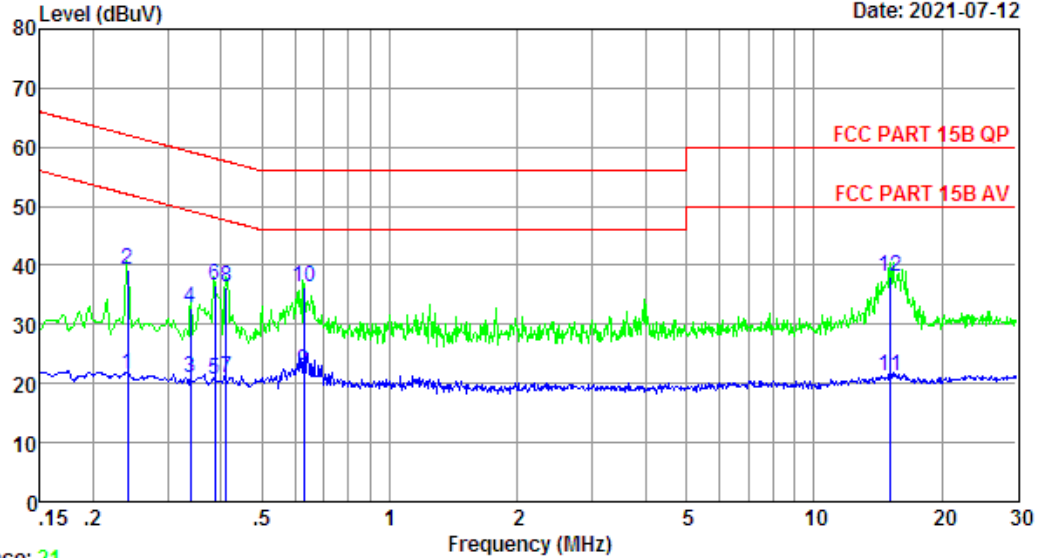

Trace: 21

Site no : 2#CE Shield Room Data no. : 22
 Env. / Ins. : Temp:22.8℃ Humi:58% Press:101.30kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Shockwafe Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 240V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.2416	9.71	9.92	1.97	21.60	52.04	30.44	Average
2	0.2416	9.71	9.92	19.77	39.40	62.04	22.64	QP
3	0.3392	9.74	9.92	1.21	20.87	49.22	28.35	Average
4	0.3392	9.74	9.92	13.24	32.90	59.22	26.32	QP
5	0.3872	9.76	9.92	1.04	20.72	48.12	27.40	Average
6	0.3872	9.76	9.92	17.05	36.73	58.12	21.39	QP
7	0.4127	9.76	9.92	1.23	20.91	47.59	26.68	Average
8	0.4127	9.76	9.92	16.53	36.21	57.59	21.38	QP
9	0.6271	9.82	9.92	2.39	22.13	46.00	23.87	Average
10	0.6271	9.82	9.92	16.47	36.21	56.00	19.79	QP
11	15.0656	9.98	10.12	1.08	21.18	50.00	28.82	Average
12	15.0656	9.98	10.12	18.09	38.19	60.00	21.81	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 24

File: \\Emc-ce-2\test data\2021\RFID\DONGWEI\ULTRA 9.2 eARC.EM6 (36)

Date: 2021-07-12

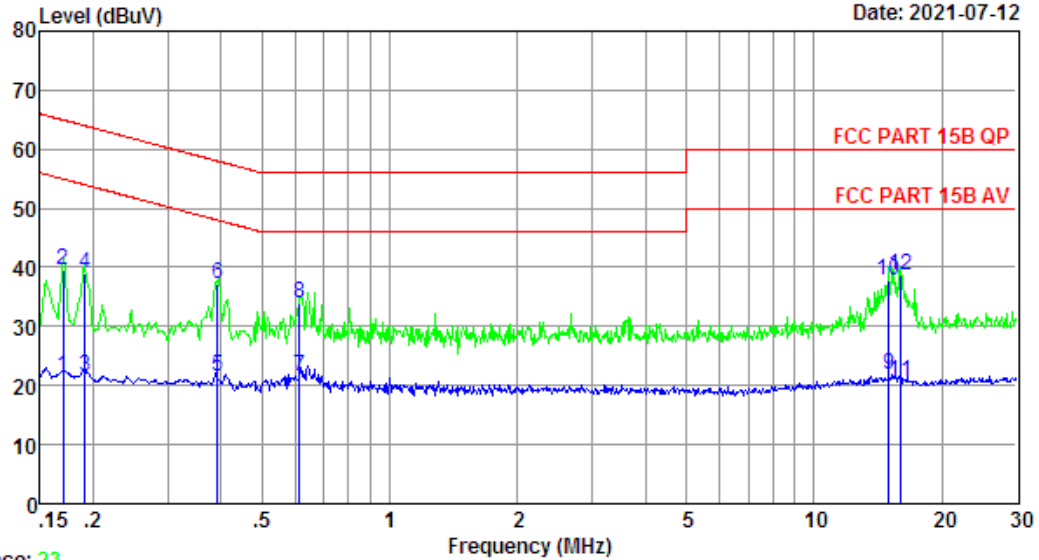

Trace: 23

Site no : 2#CE Shield Room Data no. : 24
 Env. / Ins. : Temp:22.8℃ Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Shockwafe Sound Bar with
 Wireless Subwoofer
 Power : DC 19V From Adapter Input AC 240V/60Hz
 M/N : ULTRA 9.2 eARC
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.1703	9.64	9.69	2.21	21.54	54.94	33.40	Average
2	0.1703	9.64	9.69	20.35	39.68	64.94	25.26	QP
3	0.1914	9.65	9.77	2.23	21.65	53.98	32.33	Average
4	0.1914	9.65	9.77	19.43	38.85	63.98	25.13	QP
5	0.3934	9.68	9.92	1.86	21.46	47.99	26.53	Average
6	0.3934	9.68	9.92	17.54	37.14	57.99	20.85	QP
7	0.6140	9.71	9.92	2.02	21.65	46.00	24.35	Average
8	0.6140	9.71	9.92	14.27	33.90	56.00	22.10	QP
9	14.9860	10.11	10.12	1.61	21.84	50.00	28.16	Average
10	14.9860	10.11	10.12	17.51	37.74	60.00	22.26	QP
11	16.0546	10.08	10.12	0.40	20.60	50.00	29.40	Average
12	16.0546	10.08	10.12	18.36	38.56	60.00	21.44	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

12. ANTENNA REQUIREMENTS

12.1. Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

12.2. Test Result

The antennas used for this product is integral antenna ,so compliance with antenna requirements.
(Please refer to the EUT photo for details)

13. TEST SETUP PHOTO


Conducted Test



Radiated Test (Below 1GHz)




Radiated Test (Above 1GHz)


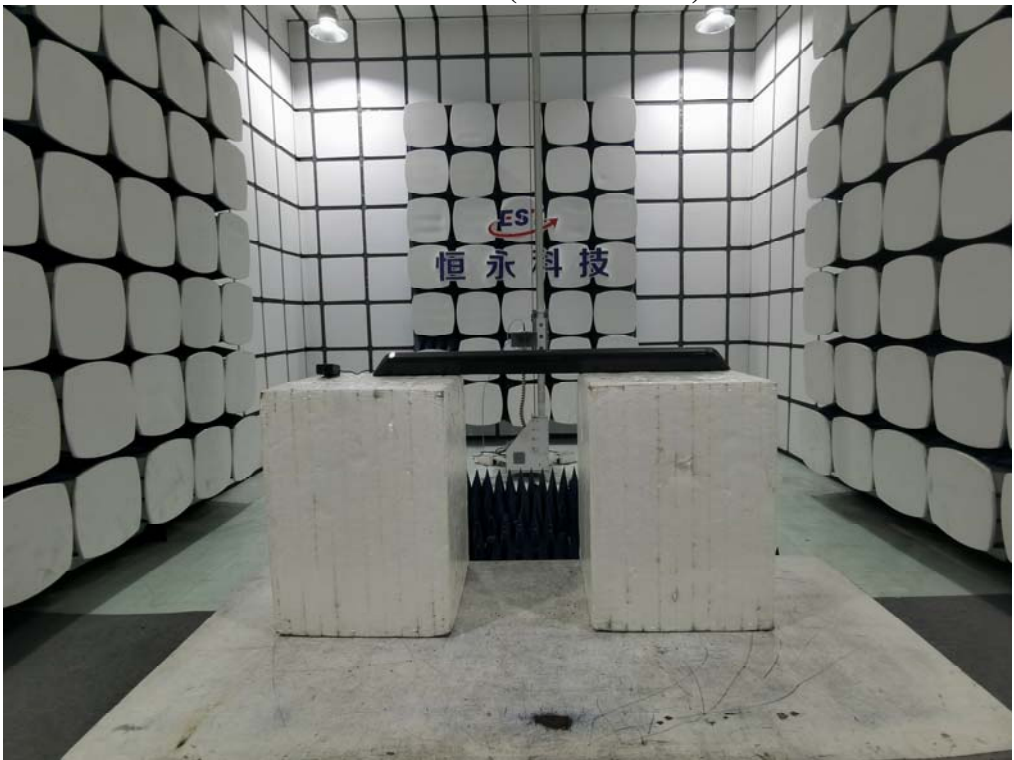


14.EUT PHOTO

External Photos
M/N: ULTRA 9.2 eARC

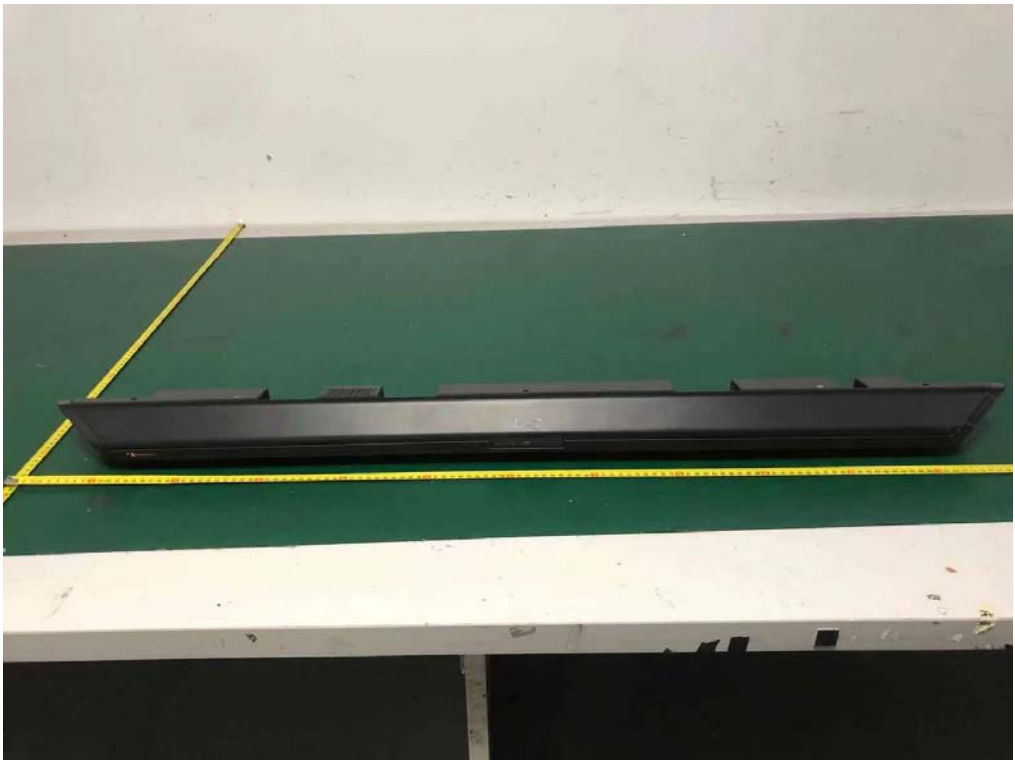

External Photos
M/N: ULTRA 9.2 eARC

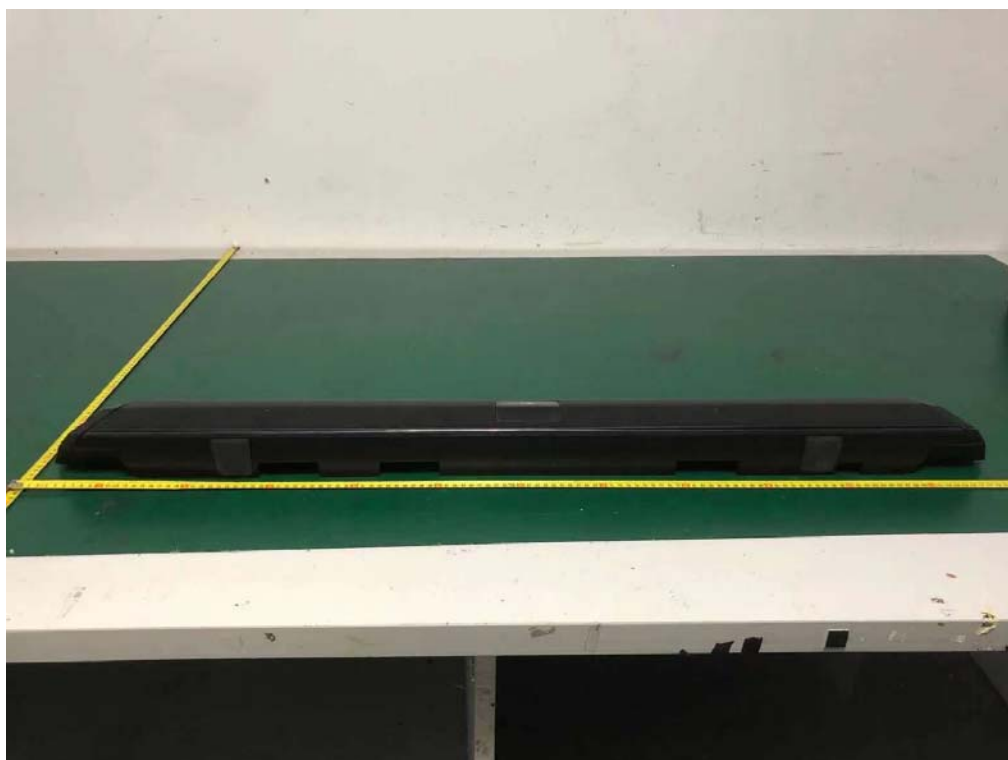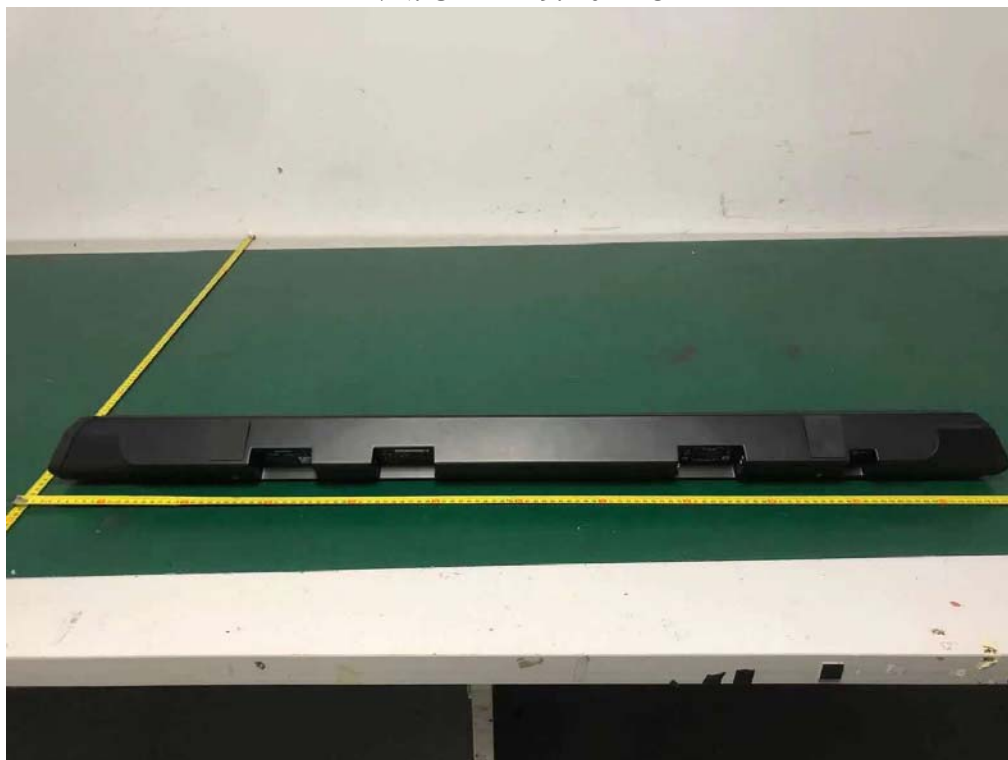

External Photos
M/N: ULTRA 9.2 eARC



External Photos
M/N: ULTRA 9.2 eARC



External Photos
M/N: ULTRA 9.2 eARC



External Photos
M/N: ULTRA 9.2 eARC



External Photos
M/N: ULTRA 9.2 eARC



External Photos
M/N: ULTRA 9.2 eARC




External Photos
M/N: ULTRA 9.2 eARC




Internal Photos
M/N: ULTRA 9.2 eARC



Internal Photos
M/N: ULTRA 9.2 eARC

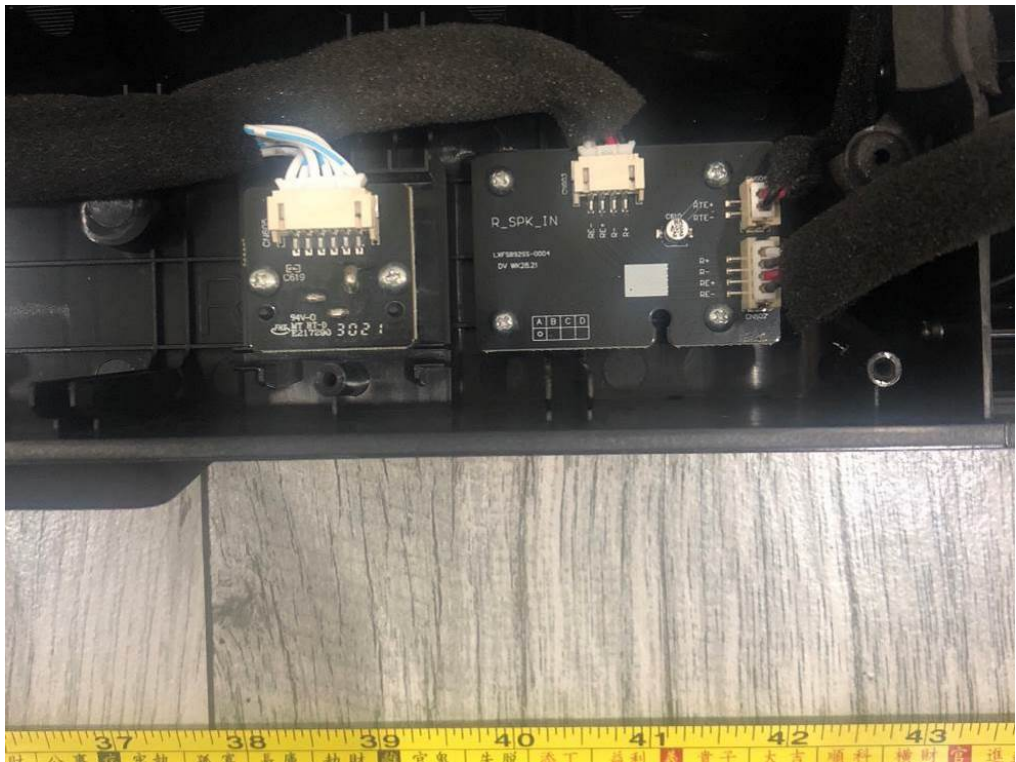



Internal Photos
M/N: ULTRA 9.2 eARC

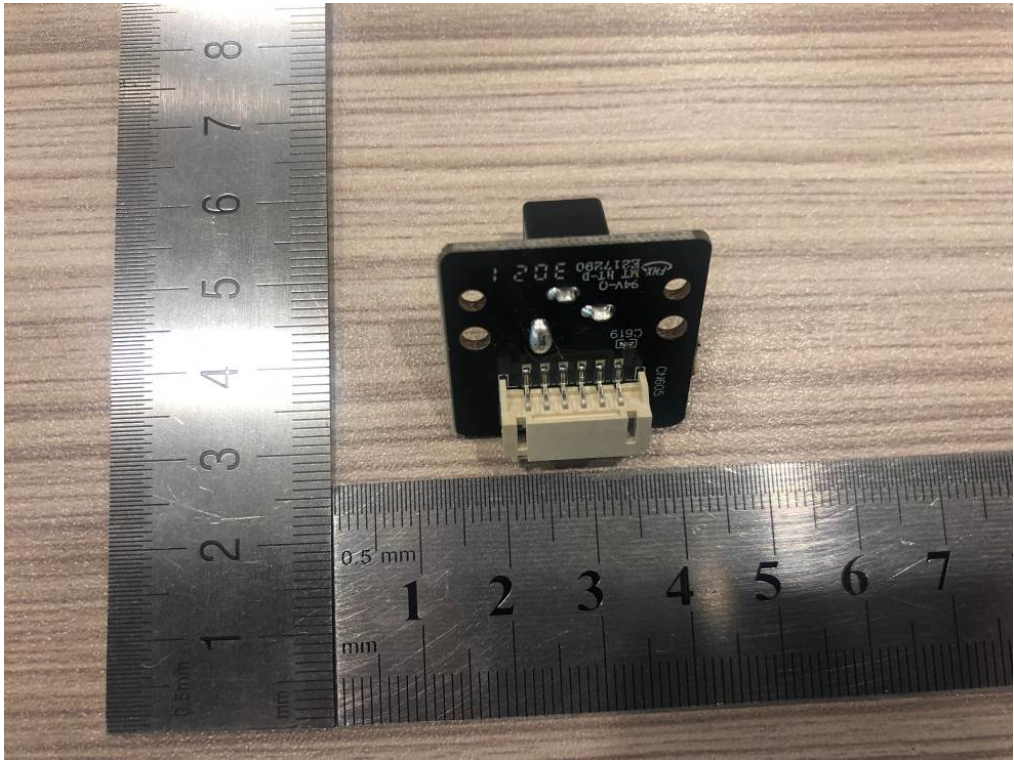

Internal Photos
M/N: ULTRA 9.2 eARC



Internal Photos
M/N: ULTRA 9.2 eARC

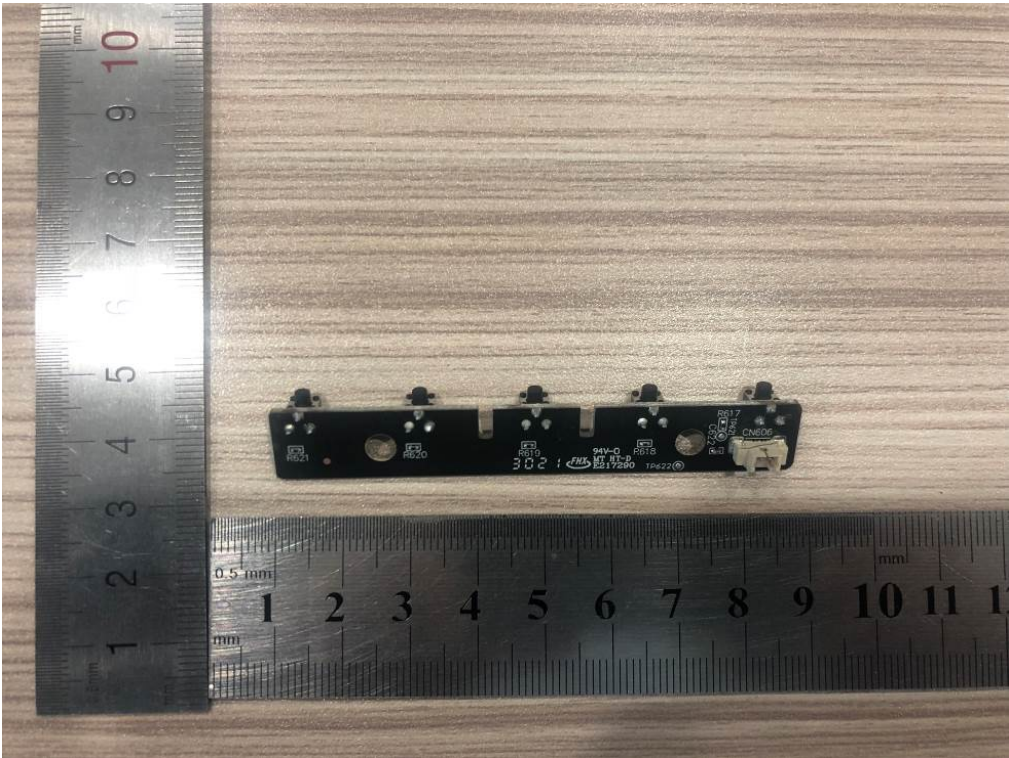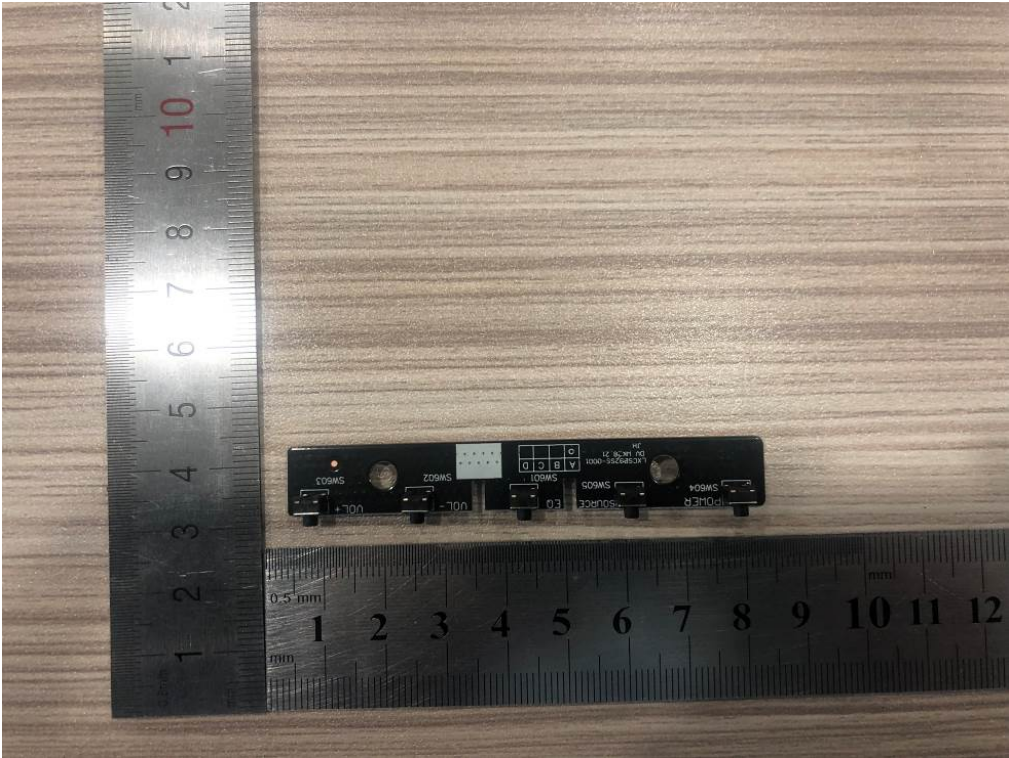


Internal Photos
M/N: ULTRA 9.2 eARC




Internal Photos
M/N: ULTRA 9.2 eARC




Internal Photos
M/N: ULTRA 9.2 eARC

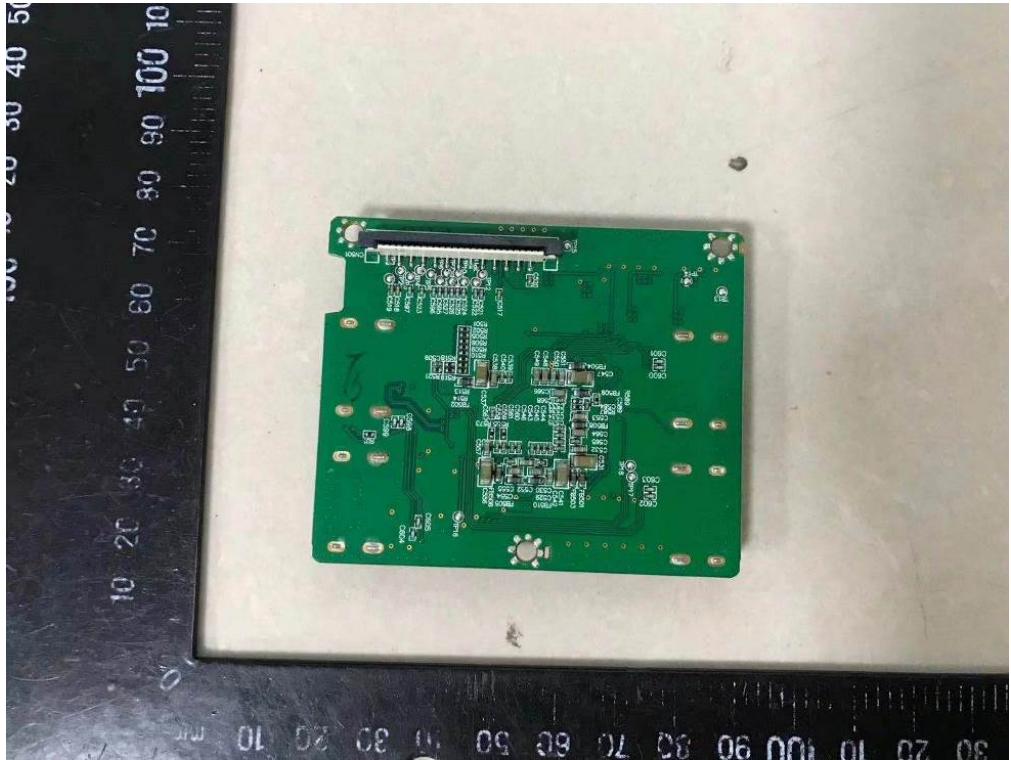



Internal Photos
M/N: ULTRA 9.2 eARC

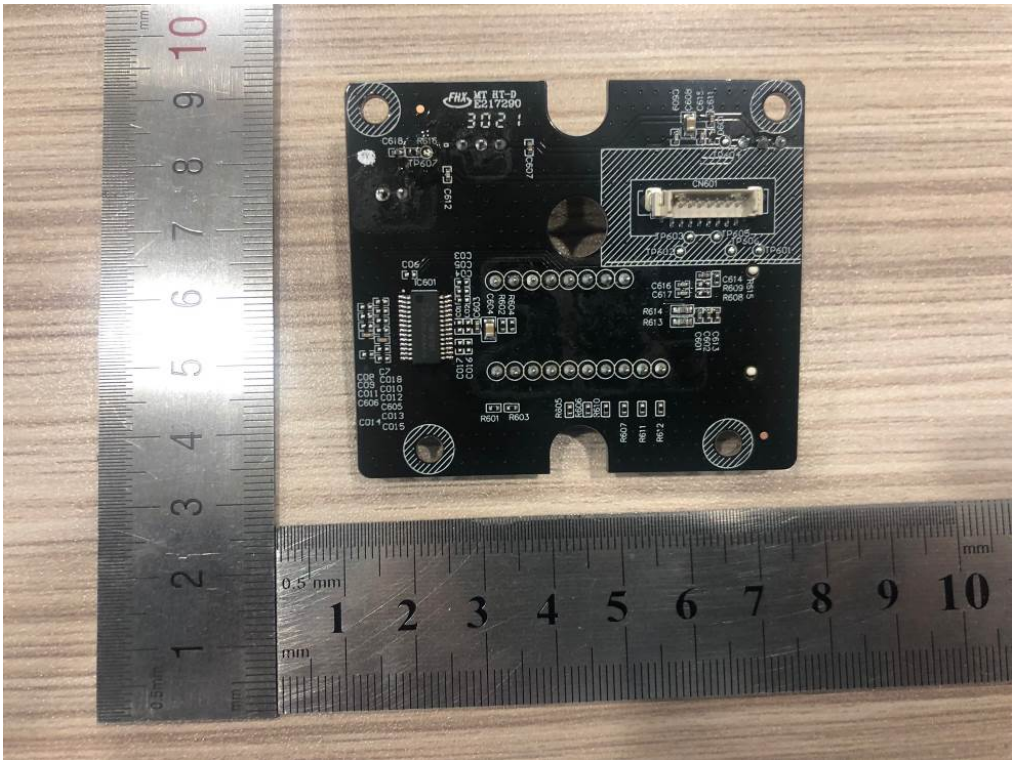



Internal Photos
M/N: ULTRA 9.2 eARC

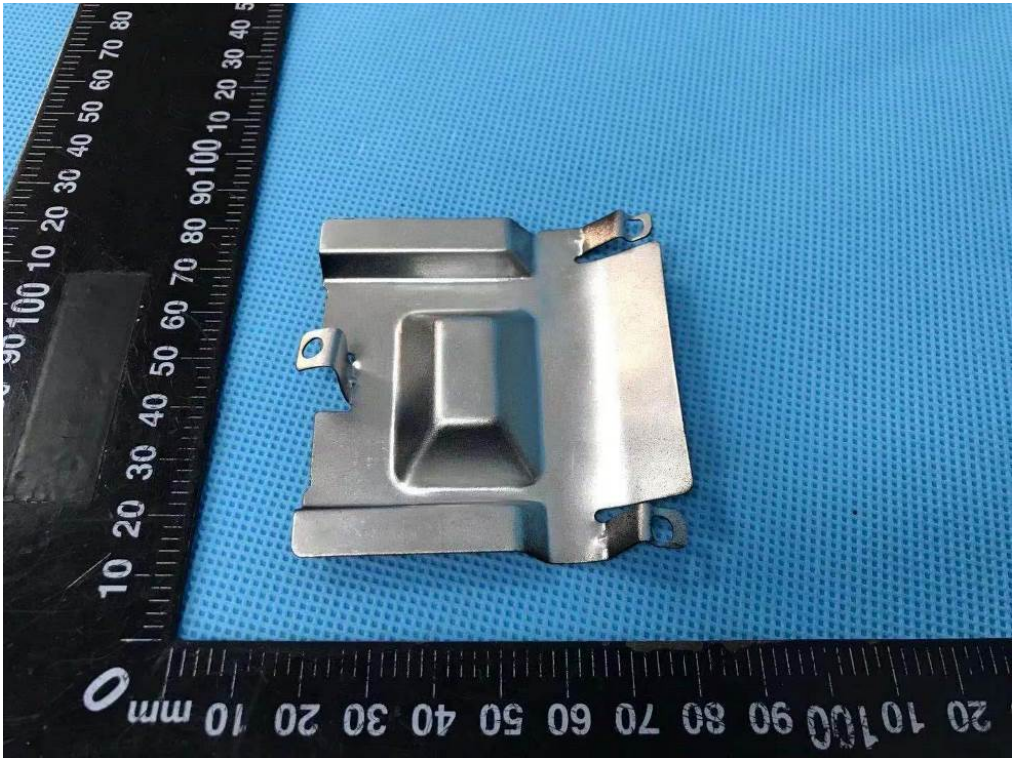

Internal Photos
M/N: ULTRA 9.2 eARC

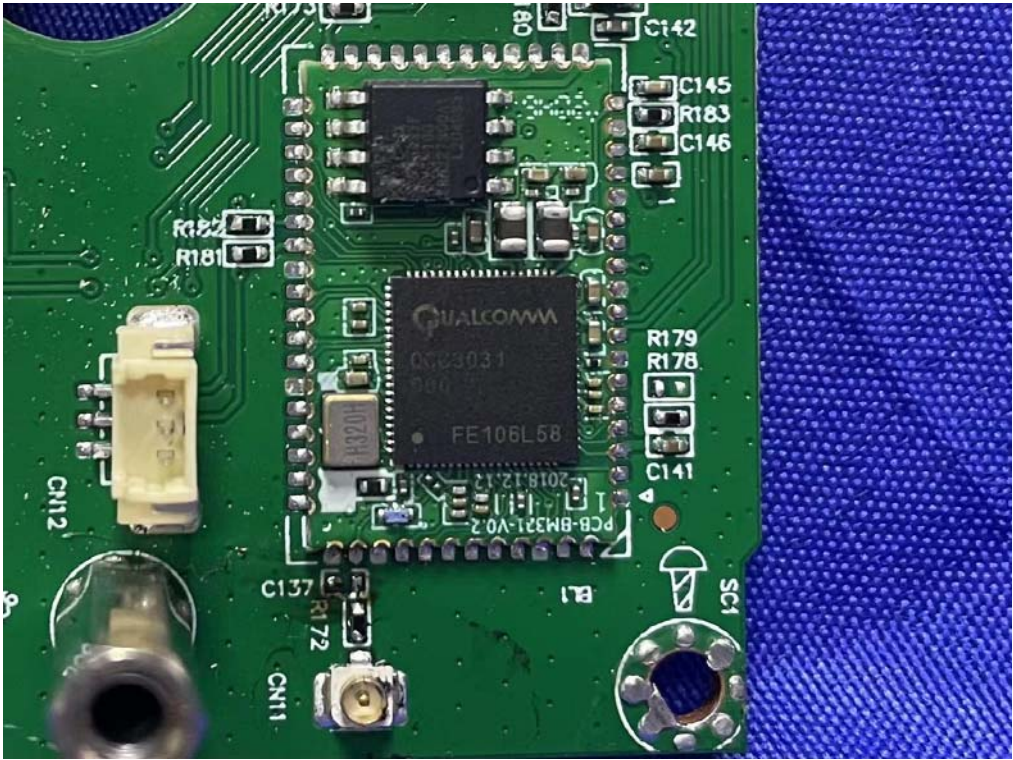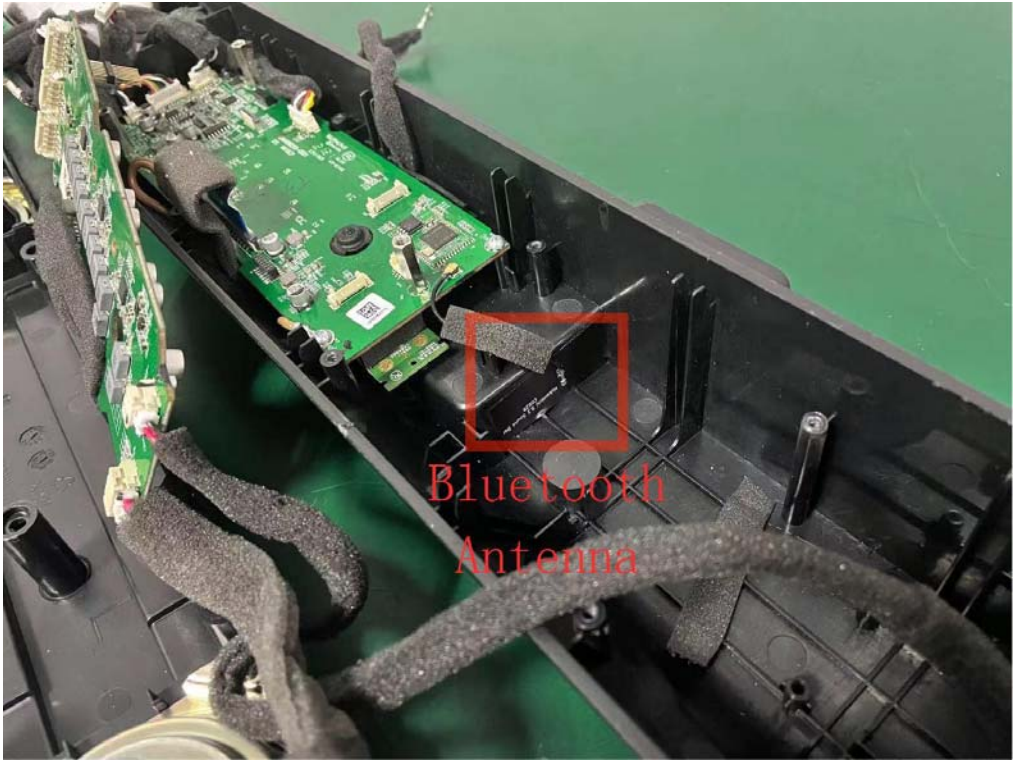

Internal Photos
M/N: ULTRA 9.2 eARC

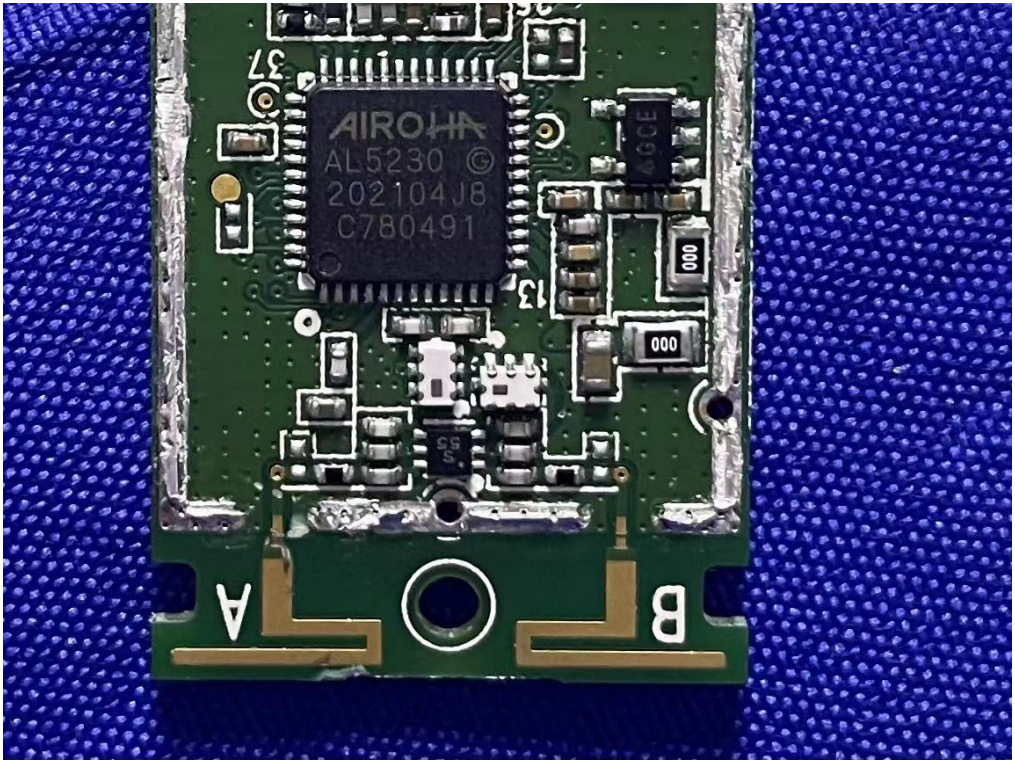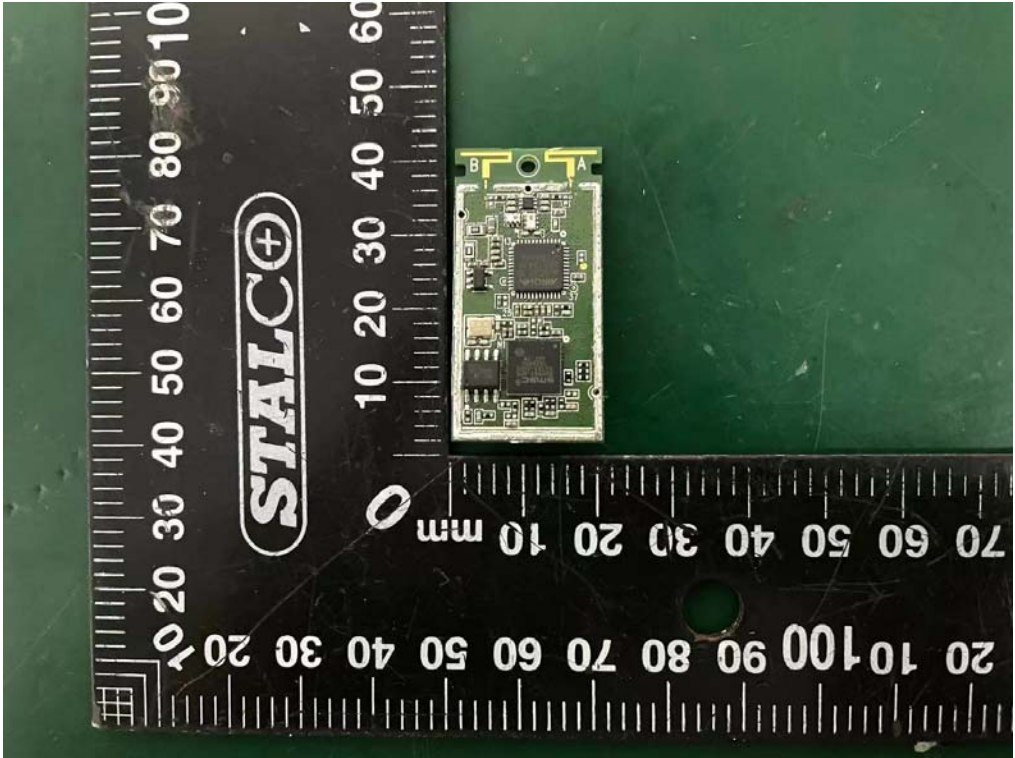

End of Test Report