




# TEST REPORT

FCC ID..... :	2BG4I-BIOSENSEWATCH	
Test Report No..... :	TCT250410E054	
Date of issue..... :	Apr. 24, 2025	
Testing laboratory .....	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	VYVO TECHNOLOGY PTE LTD	
Address..... :	37 Kallang Pudding Road #03-01 Tong Lee Building Block B Singapore 349315, Singapore	
Manufacturer's name ... :	Shenzhen Iwown Technology Co., Ltd	
Address..... :	Room 1201. Shenzhen Qianhai Yidu Building, No. 99, Gangcheng Street, Nanshan Street, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen, China	
Standard(s) .....	FCC CFR Title 47 Part 15 Subpart C Section 15.247 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2020	
Product Name..... :	BioSense Watch	
Trade Mark .....	vyvo	
Model/Type reference..... :	BioSense Watch	
Rating(s)..... :	Rechargeable Li-ion Battery DC 3.85V	
Date of receipt of test item .....	Apr. 10, 2025	
Date (s) of performance of test..... :	Apr. 10, 2025 ~ Apr. 24, 2025	
Tested by (+signature) ... :	Aaron MO	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	

**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## Table of Contents

<b>1. General Product Information .....</b>	<b>3</b>
1.1. EUT description .....	3
1.2. Model(s) list.....	3
1.3. Operation Frequency .....	4
<b>2. Test Result Summary .....</b>	<b>4</b>
<b>3. General Information.....</b>	<b>6</b>
3.1. Test environment and mode.....	6
3.2. Description of Support Units.....	6
<b>4. Facilities and Accreditations .....</b>	<b>7</b>
4.1. Facilities .....	7
4.2. Location .....	7
4.3. Measurement Uncertainty.....	7
<b>5. Test Results and Measurement Data .....</b>	<b>8</b>
5.1. Antenna requirement .....	8
5.2. Conducted Emission.....	9
5.3. Conducted Output Power .....	13
5.4. Emission Bandwidth .....	14
5.5. Power Spectral Density.....	15
5.6. Conducted Band Edge and Spurious Emission Measurement .....	16
5.7. Radiated Spurious Emission Measurement.....	18
<b>Appendix A: Test Result of Conducted Test</b>	
<b>Appendix B: Photographs of Test Setup</b>	
<b>Appendix C: Photographs of EUT</b>	

## 1. General Product Information

### 1.1. EUT description

Product Name.....:	BioSense Watch
Model/Type reference.....:	BioSense Watch
Sample Number.....:	TCT250410E053-0101
Bluetooth Version .....	V5.3 (This report is for BLE)
Operation Frequency .....	For BLE(1M): 2402MHz~2480MHz For BLE(2M): 2404MHz~2478MHz
Channel Separation.....:	2MHz
Data Rate.....:	LE 1M PHY, LE 2M PHY
Number of Channel .....	40
Modulation Type .....	GFSK
Antenna Type.....:	Internal Antenna
Antenna Gain.....:	2dBi
Rating(s).....:	Rechargeable Li-ion Battery DC 3.85V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2. Model(s) list

None.

### 1.3. Operation Frequency

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
...	...	...	...	...	...	...	...
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note: BLE 2M is not support channel 0/12/39.

The EUT operation in above frequency list, and used test software to control the EUT for staying in continuous transmitting and receiving mode. So test frequency is below:

Test channel	Data rate	Frequency (MHz)
		GFSK
Lowest channel	1M PHY	2402MHz
Middle channel		2440MHz
Highest channel		2480MHz
Lowest channel	2M PHY	2404MHz
Middle channel		2440MHz
Highest channel		2478MHz

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. General Information

#### 3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	23.1 °C	23.7 °C
Humidity:	51 % RH	50 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Software:		
Software Information:	BT FCC Tool	
Power Level:	3	
Test Mode:		
Engineer mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery.	
The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case (Z axis) are shown in Test Results of the following pages.		

#### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
BioSense Watch Charger	BioSense Watch	/	/	vyvo

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

## 4. Facilities and Accreditations

### 4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Innovation, Science and Economic Development Canada for radio equipment testing.

### 4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

### 4.3. Measurement Uncertainty


The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 3.10$ dB
2	RF power, conducted	$\pm 0.12$ dB
3	Spurious emissions, conducted	$\pm 0.11$ dB
4	All emissions, radiated(<1 GHz)	$\pm 4.56$ dB
5	All emissions, radiated(1 GHz - 18 GHz)	$\pm 4.22$ dB
6	All emissions, radiated(18 GHz- 40 GHz)	$\pm 4.36$ dB



## 5. Test Results and Measurement Data

### 5.1. Antenna requirement
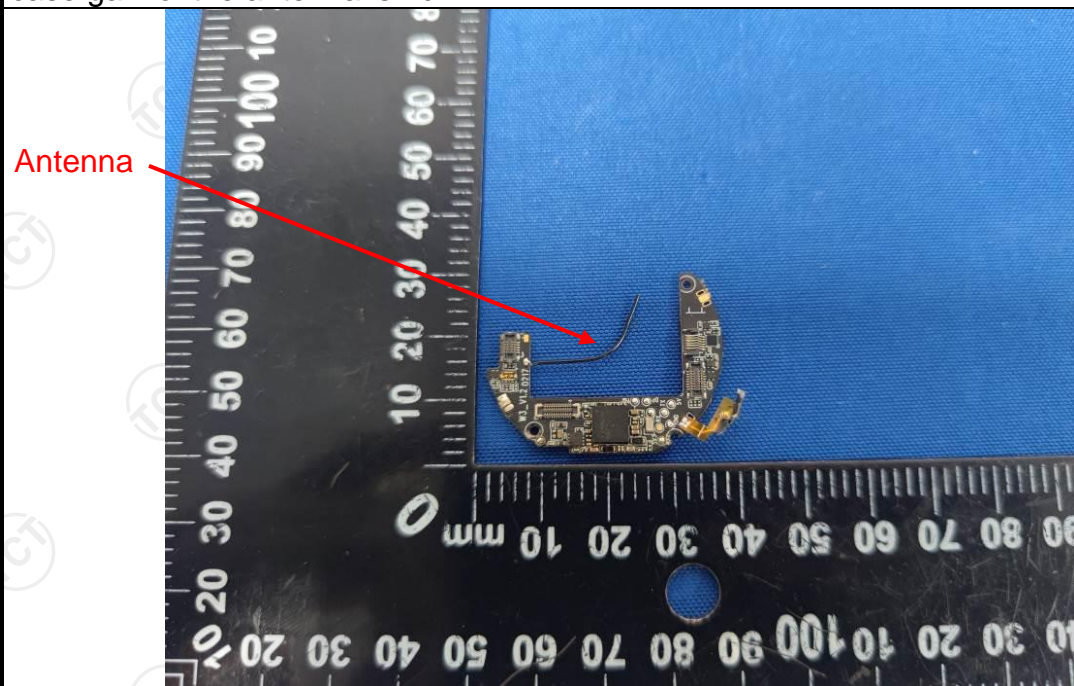
<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>E.U.T Antenna:</b>	
<p>The Bluetooth antenna is internal antenna which permanently attached, and the best case gain of the antenna is 2dBi.</p>	
	



## 5.2. Conducted Emission

### 5.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<div><p>Reference Plane</p><p>40cm</p><p>E.U.T</p><p>AC power</p><p>80cm</p><p>LISN</p><p>Filter</p><p>AC power</p><p>EMI Receiver</p><p>Test table/Insulation plane</p><p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	<div><div>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.</div></div>														
Test Result:	PASS														


**5.2.2. Test Instruments**

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI3	100898	Jun. 27, 2024	Jun. 26, 2025
LISN	Schwarzbeck	NSLK 8126	8126453	Jan. 21, 2025	Jan. 20, 2026
Attenuator	N/A	10dB	164080	Jun. 27, 2024	Jun. 26, 2025
Line-5	TCT	CE-05	/	Jun. 27, 2024	Jun. 26, 2025
EMI Test Software	EZ_EMG	EMEC-3A1	1.1.4.2	/	/

### 5.2.3. Test data

Please refer to following diagram for individual

#### Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

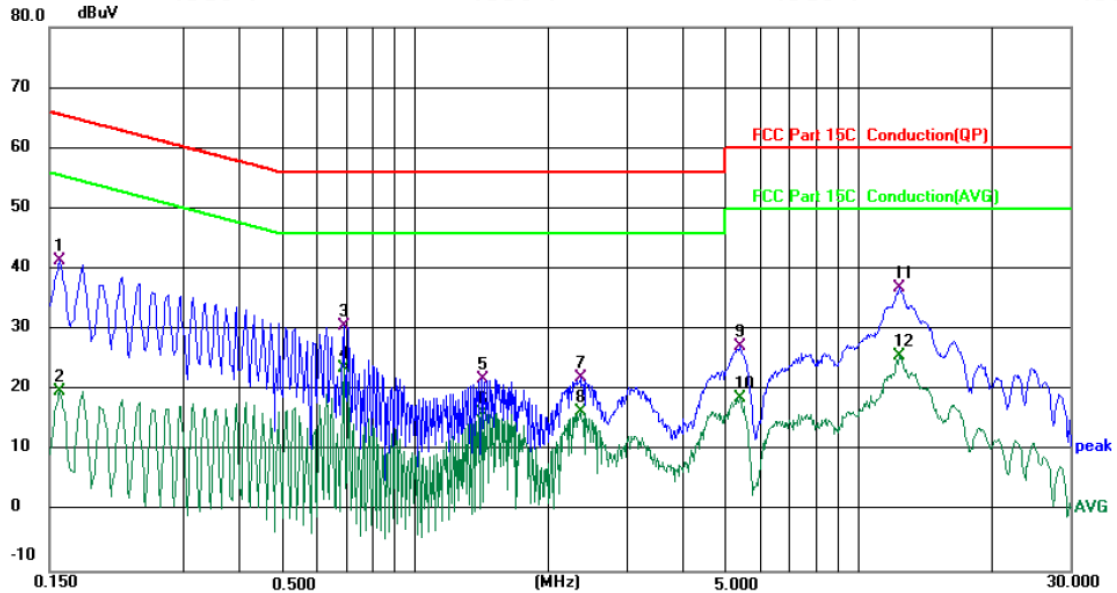

Site 844 Shielding Room

Phase: L1

Temperature: 21.5 (°C)

Humidity: 48 %

Limit: FCC Part 15C Conduction(QP)

Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	31.41	9.95	41.36	65.57	-24.21	QP	
2		0.1580	9.87	9.95	19.82	55.57	-35.75	AVG	
3		0.6900	20.69	9.90	30.59	56.00	-25.41	QP	
4	*	0.6900	13.74	9.90	23.64	46.00	-22.36	AVG	
5		1.4179	11.94	9.97	21.91	56.00	-34.09	QP	
6		1.4179	6.24	9.97	16.21	46.00	-29.79	AVG	
7		2.3620	11.95	10.04	21.99	56.00	-34.01	QP	
8		2.3620	6.48	10.04	16.52	46.00	-29.48	AVG	
9		5.4100	17.04	10.15	27.19	60.00	-32.81	QP	
10		5.4100	8.44	10.15	18.59	50.00	-31.41	AVG	
11		12.3819	26.59	10.35	36.94	60.00	-23.06	QP	
12		12.3819	15.38	10.35	25.73	50.00	-24.27	AVG	

#### Note:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

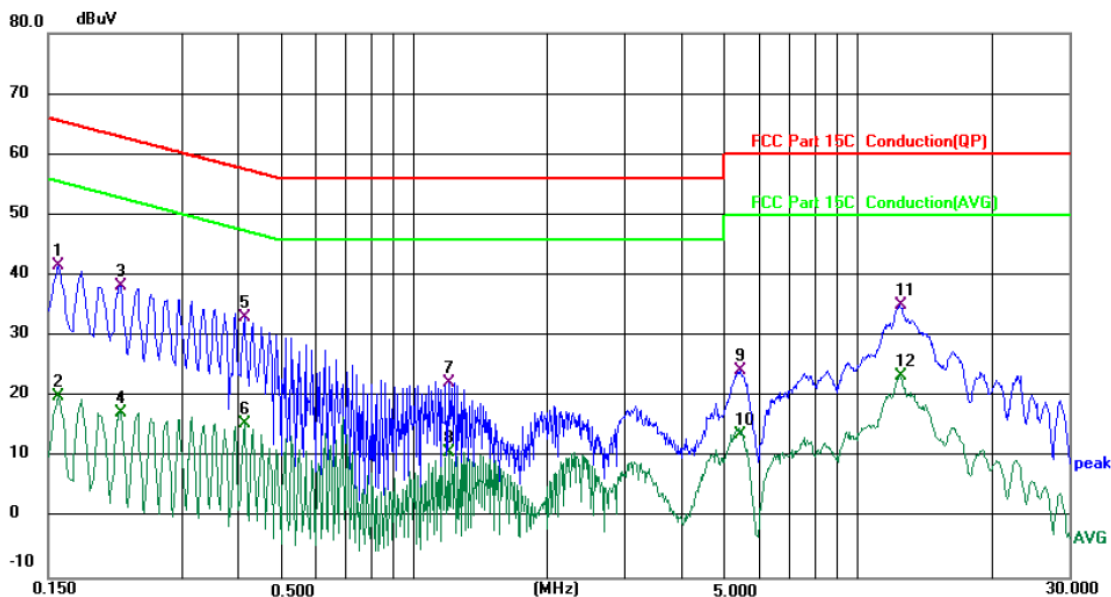

Site 844 Shielding Room

Phase: **N**

Temperature: 21.5 (°C)

Humidity: 48 %

Limit: FCC Part 15C Conduction(OP)

Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1	*	0.1580	31.75	9.94	41.69	65.57	-23.88	QP	
2		0.1580	9.99	9.94	19.93	55.57	-35.64	AVG	
3		0.2179	28.43	9.93	38.36	62.90	-24.54	QP	
4		0.2179	7.50	9.93	17.43	52.90	-35.47	AVG	
5		0.4139	23.17	9.94	33.11	57.57	-24.46	QP	
6		0.4139	5.69	9.94	15.63	47.57	-31.94	AVG	
7		1.1979	12.30	9.98	22.28	56.00	-33.72	QP	
8		1.1979	0.88	9.98	10.86	46.00	-35.14	AVG	
9		5.4500	14.13	10.16	24.29	60.00	-35.71	QP	
10		5.4500	3.69	10.16	13.85	50.00	-36.15	AVG	
11		12.4819	24.76	10.41	35.17	60.00	-24.83	QP	
12		12.4819	12.95	10.41	23.36	50.00	-26.64	AVG	

**Note1:** Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak


AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

**Note2:** Speed for 1M and 2M modulations of EUT have been tested, but the test data only show the worst case in this report, and we found the worst case is 1M speed modulation. Measurements were conducted in all three channels (high, middle, low), and the worst case Mode (Lowest channel) was submitted only.

### 5.3. Conducted Output Power

#### 5.3.1. Test Specification


<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (b)(3)
<b>Test Method:</b>	KDB 558074 D01 v05r02
<b>Limit:</b>	30dBm
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Refer to item 3.1
<b>Test Procedure:</b>	<p>Set spectrum analyzer as following:</p> <ul style="list-style-type: none"> <li>a) Set the RBW <math>\geq</math> DTS bandwidth.</li> <li>b) Set VBW <math>\geq 3 \times</math> RBW.</li> <li>c) Set span <math>\geq 3 \times</math> RBW</li> <li>d) Sweep time = auto couple.</li> <li>e) Detector = peak.</li> <li>f) Trace mode = max hold.</li> <li>g) Allow trace to fully stabilize.</li> <li>h) Use peak marker function to determine the peak amplitude level.</li> </ul>
<b>Test Result:</b>	PASS

#### 5.3.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 27, 2024	Jun. 26, 2025
Power detector box	MWRFtest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

## 5.4. Emission Bandwidth

### 5.4.1. Test Specification


<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (a)(2)
<b>Test Method:</b>	KDB 558074 D01 v05r02
<b>Limit:</b>	>500kHz
<b>Test Setup:</b>	 <p>Spectrum Analyzer      EUT</p>
<b>Test Mode:</b>	Refer to item 3.1
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>2. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li> <li>3. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS

### 5.4.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 27, 2024	Jun. 26, 2025
Power detector box	MWRFTest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026

## 5.5. Power Spectral Density

### 5.5.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (e)
<b>Test Method:</b>	KDB 558074 D01 v05r02
<b>Limit:</b>	The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Refer to item 3.1
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): <math>3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}</math>. Video bandwidth VBW <math>\geq 3 \times \text{RBW}</math>. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)</li> <li>4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.</li> <li>5. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS


### 5.5.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 27, 2024	Jun. 26, 2025
Power detector box	MWRFTest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026



## 5.6. Conducted Band Edge and Spurious Emission Measurement

### 5.6.1. Test Specification


<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d)
<b>Test Method:</b>	KDB 558074 D01 v05r02
<b>Limit:</b>	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup. On the left is a green rectangular box labeled 'Spectrum Analyzer'. A black line representing an RF cable connects the Spectrum Analyzer to a yellow rectangular box on the right labeled 'EUT'.</p>
<b>Test Mode:</b>	Refer to item 3.1
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).</li> <li>4. Measure and record the results in the test report.</li> <li>5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li> </ol>
<b>Test Result:</b>	PASS


### 5.6.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 27, 2024	Jun. 26, 2025
Power detector box	MWRFTest	MW100-RFCB	MW210531TCT	Jan. 21, 2025	Jan. 20, 2026


## 5.7. Radiated Spurious Emission Measurement

### 5.7.1. Test Specification
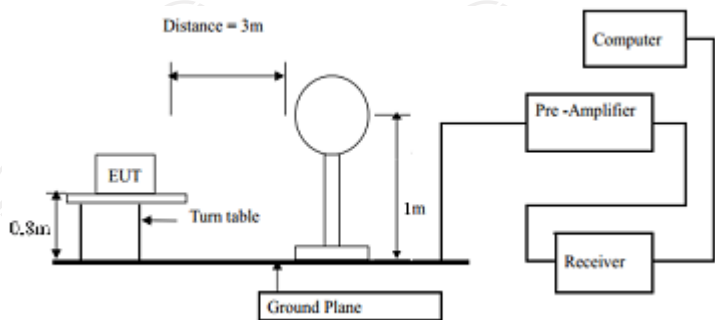
<b>Test Requirement:</b>	FCC Part15 C Section 15.209			
<b>Test Method:</b>	ANSI C63.10:2020			
<b>Frequency Range:</b>	9 kHz to 25 GHz			
<b>Measurement Distance:</b>	3 m			
<b>Antenna Polarization:</b>	Horizontal & Vertical			
<b>Operation mode:</b>	Refer to item 3.1			
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	120KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
<b>Limit:</b>	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Remark
	0.009-0.490	2400/F(KHz)	300	Quasi-peak Value
	0.490-1.705	24000/F(KHz)	30	Quasi-peak Value
	1.705-30	30	30	Quasi-peak Value
	30-88	100	3	Quasi-peak Value
<b>Test setup:</b>	88-216	150	3	Quasi-peak Value
	216-960	200	3	Quasi-peak Value
	Above 960	500	3	Quasi-peak Value
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
	<p>For radiated emissions below 30MHz</p>  <p>30MHz to 1GHz</p>			

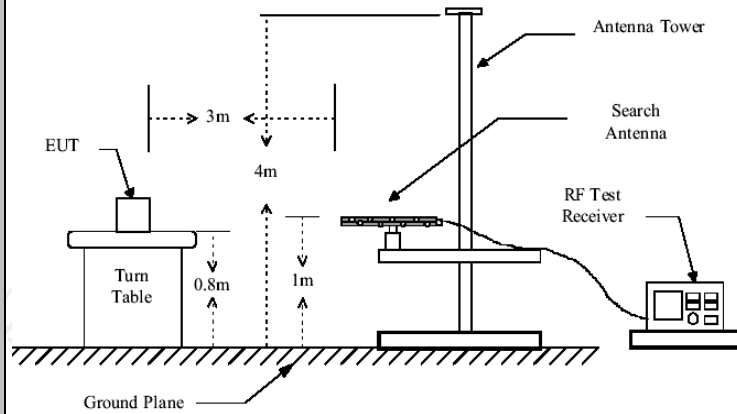

Above 1GHz

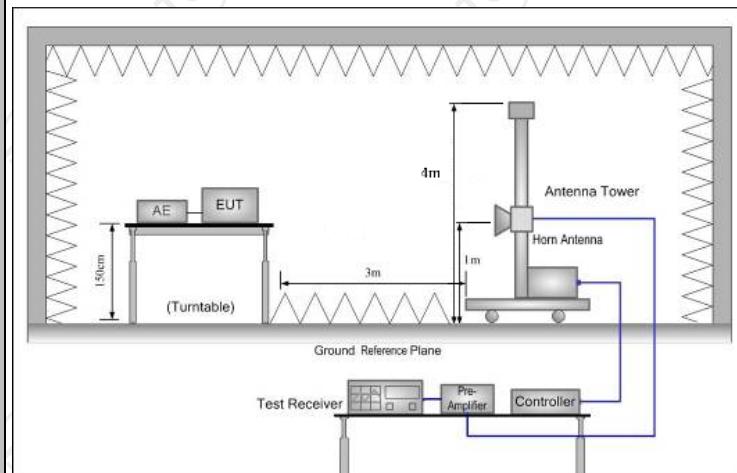

### Test Procedure:

1. For the radiated emission test below 1GHz:  
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.  
For the radiated emission test above 1GHz:  
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final

	<p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>4. Use the following spectrum analyzer settings:</p> <p>(1) Span shall wide enough to fully capture the emission being measured;</p> <p>(2) Set RBW=120 kHz for <math>f &lt; 1</math> GHz; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold;</p> <p>(3) Set RBW = 1 MHz, VBW= 3MHz for <math>f &gt; 1</math> GHz for peak measurement.</p> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
<b>Test mode:</b>	Refer to section 3.1 for details
<b>Test results:</b>	PASS


### 5.7.2. Test Instruments

Radiated Emission Test Site (966)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESC17	100529	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 27, 2024	Jun. 26, 2025
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	HP	8447D	2727A05017	Jun. 27, 2024	Jun. 26, 2025
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 27, 2024	Jun. 26, 2025
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2024	Jun. 28, 2025
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2024	Jun. 28, 2025
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 23, 2025	Jan. 22, 2026
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2024	Jun. 26, 2025
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2024	Jun. 26, 2025
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ EMC	FA-03A2 RE+	1.1.4.2	/	/

## 5.7.3. Test Data

Please refer to following diagram for individual  
Below 1GHz

Horizontal:

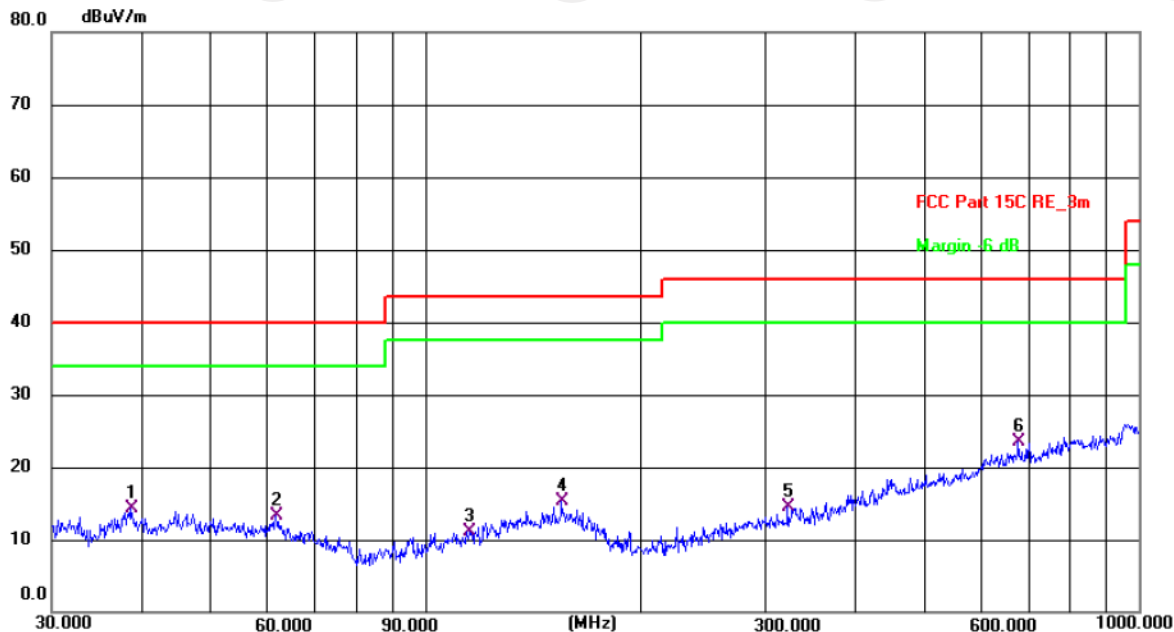

Site 3m Anechoic Chamber2

Polarization: **Horizontal**

Temperature: 23.7(C) Humidity: 50 %


Limit: FCC Part 15C RE\_3m

Power: DC 3.85 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	38.7518	33.02	-18.63	14.39	40.00	-25.61	QP	P	
2	61.7781	32.33	-19.01	13.32	40.00	-26.68	QP	P	
3	115.7256	31.13	-19.96	11.17	43.50	-32.33	QP	P	
4	155.3644	32.22	-16.88	15.34	43.50	-28.16	QP	P	
5	322.1886	32.19	-17.67	14.52	46.00	-31.48	QP	P	
6 *	677.5798	31.82	-8.28	23.54	46.00	-22.46	QP	P	



Vertical:

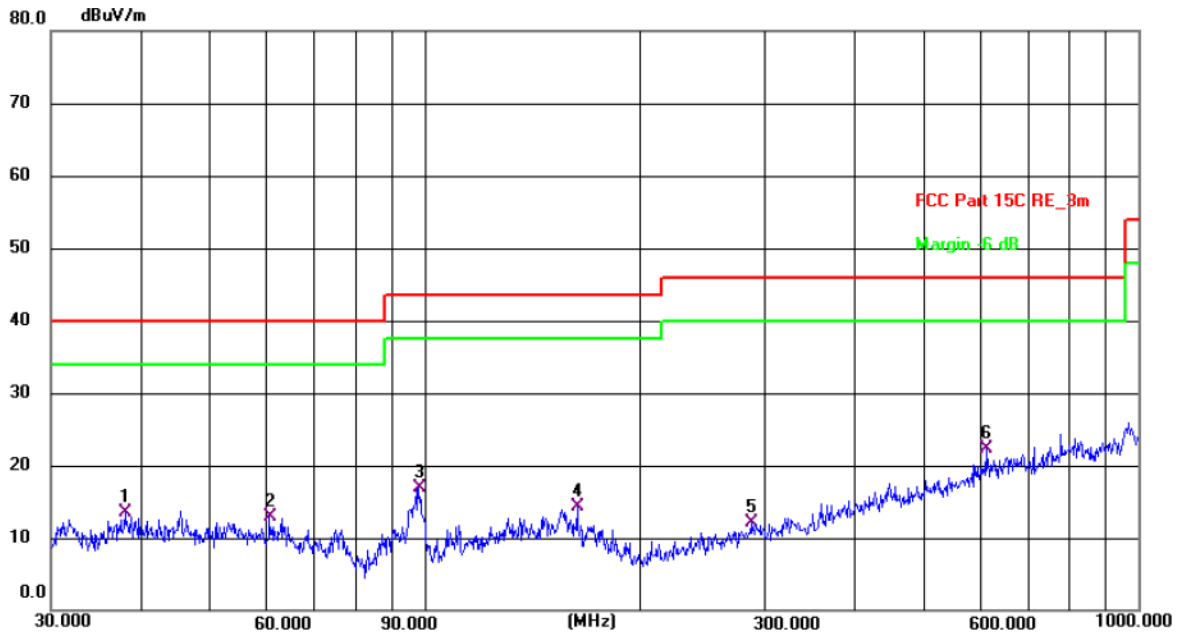

Site 3m Anechoic Chamber2

Polarization: **Vertical**

Temperature: 23.7(C) Humidity: 50 %

Limit: FCC Part 15C RE\_3m

Power: DC 3.85 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	38.0783	32.31	-18.77	13.54	40.00	-26.46	QP	P	
2	60.7044	31.83	-18.99	12.84	40.00	-27.16	QP	P	
3	98.1419	38.39	-21.50	16.89	43.50	-26.61	QP	P	
4	163.7550	31.67	-17.44	14.23	43.50	-29.27	QP	P	
5	286.9823	29.89	-17.76	12.13	46.00	-33.87	QP	P	
6 *	612.0642	31.92	-9.70	22.22	46.00	-23.78	QP	P	

**Note:** 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Speed for 1M and 2M modulations of EUT have been tested, but the test data only show the worst case in this report, and we found the worst case is 1M speed modulation. Measurements were conducted in all three channels (high, middle, low), and the worst case Mode (Lowest channel) was submitted only.

3. Freq. = Emission frequency in MHz

Measurement (dBuV/m) = Reading level (dBuV) + Corr. Factor (dB)

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Limit (dBuV/m) = Limit stated in standard


Margin (dB) = Measurement (dBuV/m) – Limits (dBuV/m)

\* is meaning the worst frequency has been tested in the test frequency range

## Test Result of Radiated Spurious at Band edges

Lowest channel 2402:

Horizontal:

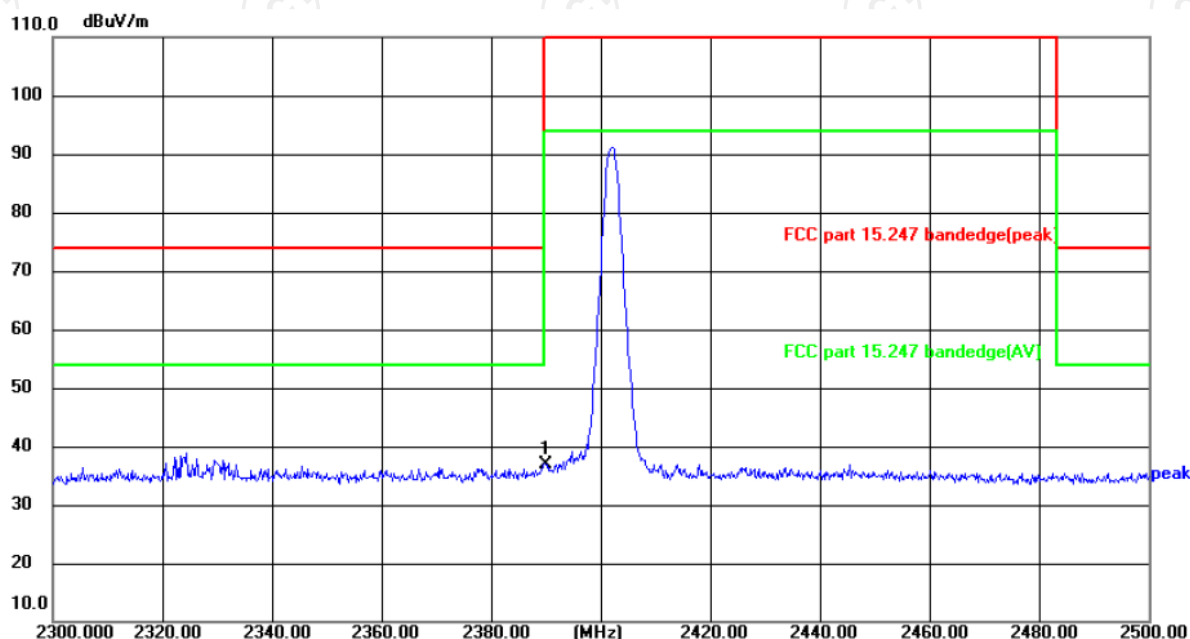

Site: 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 24.6(°C)

Humidity: 52 %

Limit: FCC part 15.247 bandedge(peak)

Power:DC 3.85 V


Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2390.000	H	53.82	---	-16.76	36.96	---	74	54	-14.04

### Note:

1. Emission Level = Peak Reading + Correction Factor; Correction Factor = Antenna Factor + Cable loss - Pre-amplifier

2. Margin (dB) = Emission Level (Peak) (dBuV/m) - Average limit (dBuV/m)

Vertical:

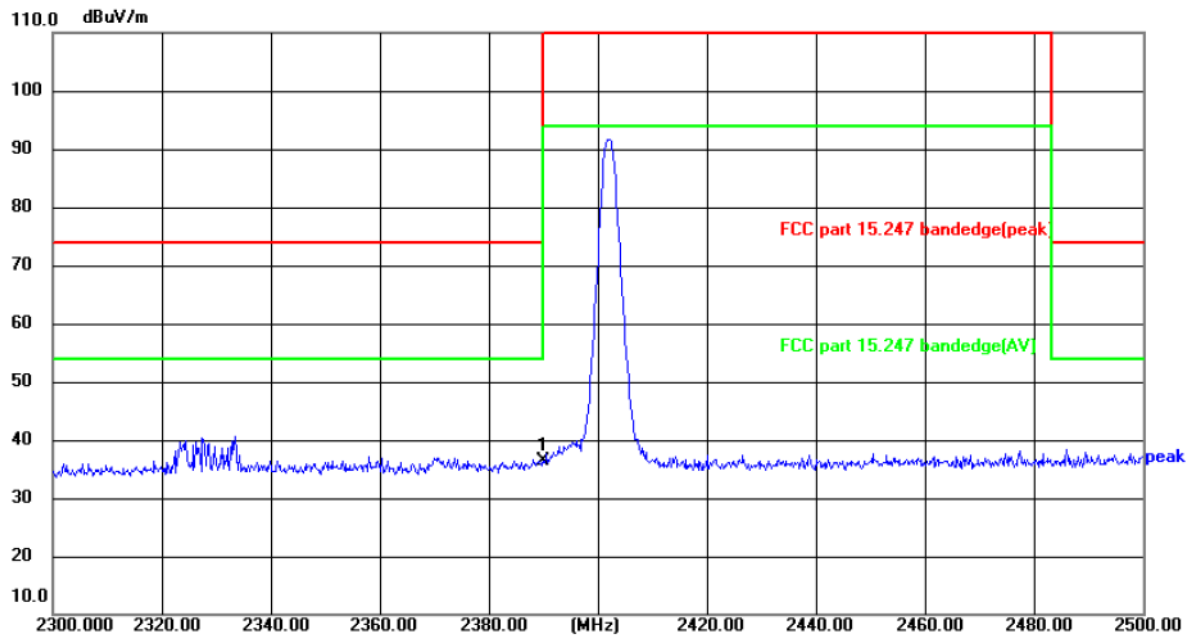

Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 24.6(°C) Humidity: 52 %

Limit: FCC part 15.247 bandedge(peak)

Power:DC 3.85 V


Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
2390.000	V	53.19	---	-16.76	36.43	---	74	54	-17.57

**Note:**

- 1.Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
- 2.Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m))

Highest channel 2480:

Horizontal:

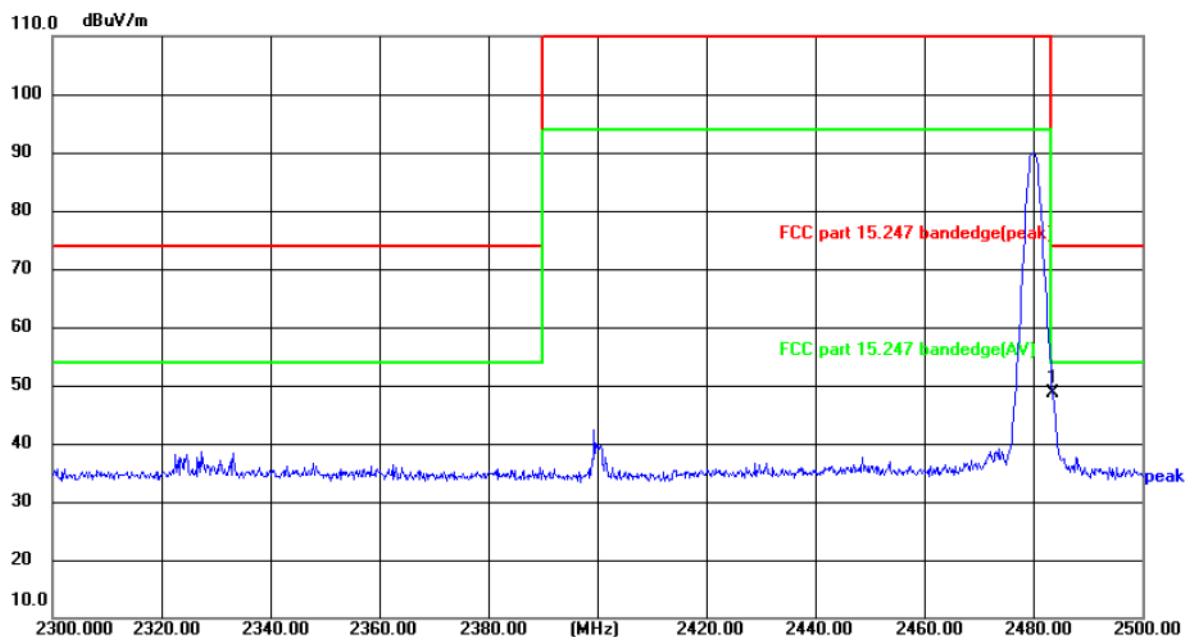

Site: 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 24.6(°C)

Humidity: 52 %

Limit: FCC part 15.247 bandedge(peak)


Power:DC 3.85 V

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
2483.500	H	65.19	---	-16.50	48.69	---	74	54	-5.31

**Note:**

- 1.Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
- 2.Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m))

Vertical:

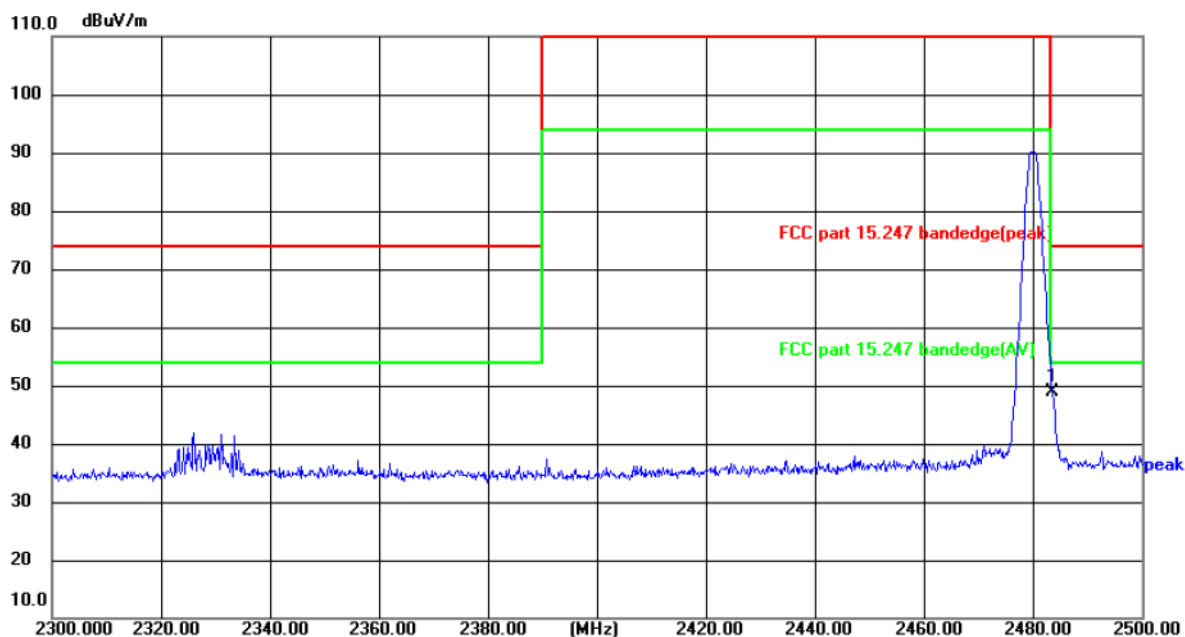

Site: 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 24.6(°C)

Humidity: 52 %

Limit: FCC part 15.247 bandedge(peak)

Power:DC 3.85 V

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
2483.500	V	65.31	---	-16.50	48.81	---	74	54	-5.19

**Note:**

- 1.Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
- 2.Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m))
- 3.Speed for 1M and 2M modulations of EUT have been tested, but the test data only show the worst case in this report, and we found the worst case is 1M speed modulation.

## Above 1GHz

### Low channel: 2402 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4804	H	55.01	---	-9.51	45.50	---	74	54	-8.50
7206	H	45.45	---	-1.41	44.04	---	74	54	-9.96
---	H	---	---	---	---	---	---	---	---
4804	V	54.69	---	-9.51	45.18	---	74	54	-8.82
7206	V	46.54	---	-1.41	45.13	---	74	54	-8.87
---	V	---	---	---	---	---	---	---	---

### Middle channel: 2440 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4880	H	55.53	---	-9.36	46.17	---	74	54	-7.83
7320	H	45.08	---	-1.15	43.93	---	74	54	-10.07
---	H	---	---	---	---	---	---	---	---
4880	V	54.87	---	-9.36	45.51	---	74	54	-8.49
7320	V	46.44	---	-1.15	45.29	---	74	54	-8.71
---	V	---	---	---	---	---	---	---	---

### High channel: 2480 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4960	H	55.46	---	-9.20	46.26	---	74	54	-7.74
7440	H	45.52	---	-0.96	44.56	---	74	54	-9.44
---	H	---	---	---	---	---	---	---	---
4960	V	55.30	---	-9.20	46.10	---	74	54	-7.90
7440	V	46.61	---	-0.96	45.65	---	74	54	-8.35
---	V	---	---	---	---	---	---	---	---

### Note:


1. Emission Level=Peak Reading + Correction Factor; Correction Factor=Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. Speed for 1M and 2M modulations of EUT have been tested, but the test data only show the worst case in this report, and we found the worst case is 2M speed modulation.
7. All the restriction bands are compliance with the limit of 15.209.

## Appendix A: Test Result of Conducted Test


Duty Cycle				
Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	BLE 1M	2402	91.61	0.38
NVNT	BLE 1M	2440	91.71	0.38
NVNT	BLE 1M	2480	91.41	0.39
NVNT	BLE 2M	2404	78.59	1.05
NVNT	BLE 2M	2440	85.01	0.71
NVNT	BLE 2M	2478	78.63	1.04




### Test Graphs Duty Cycle NVNT BLE 1M 2402MHz

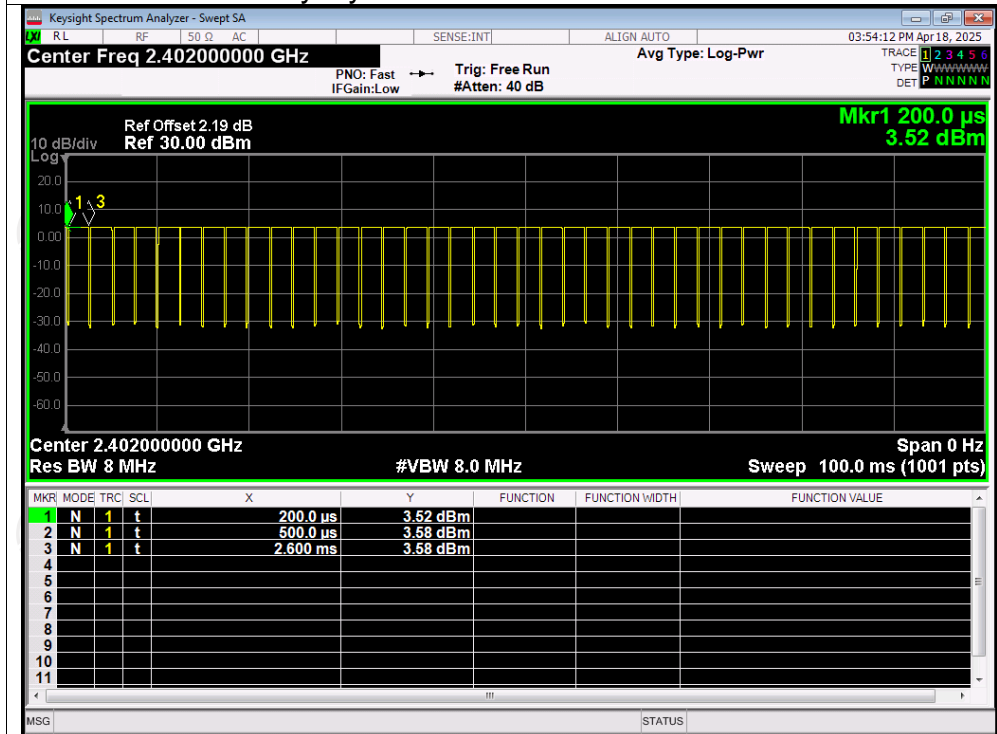


### Duty Cycle NVNT BLE 1M 2440MHz

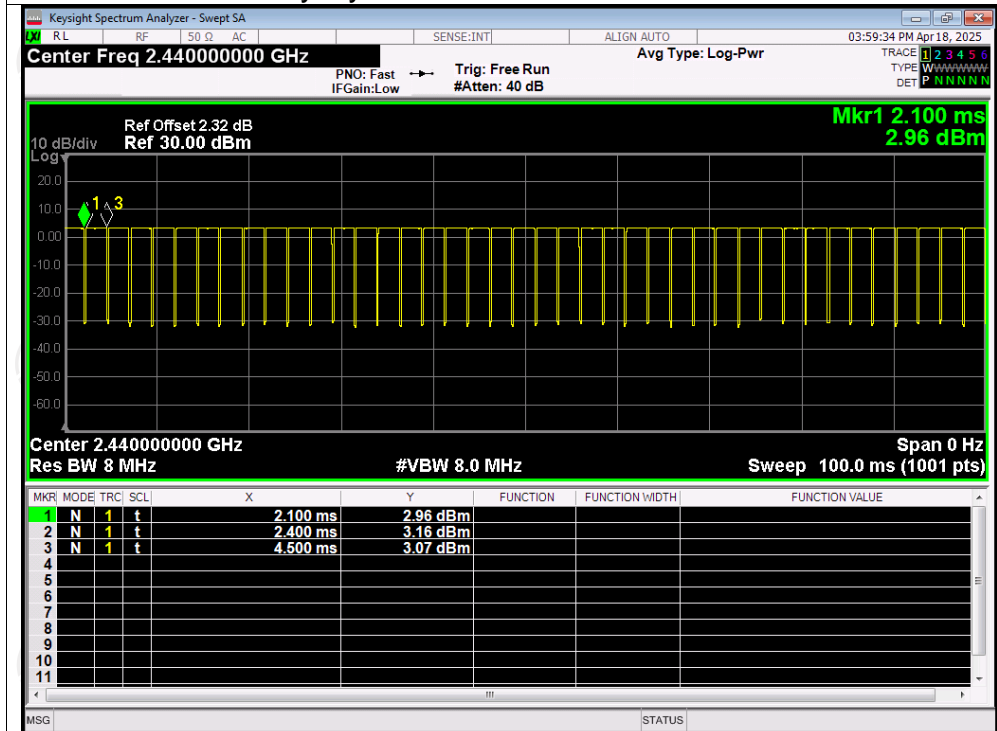


### Duty Cycle NVNT BLE 1M 2480MHz

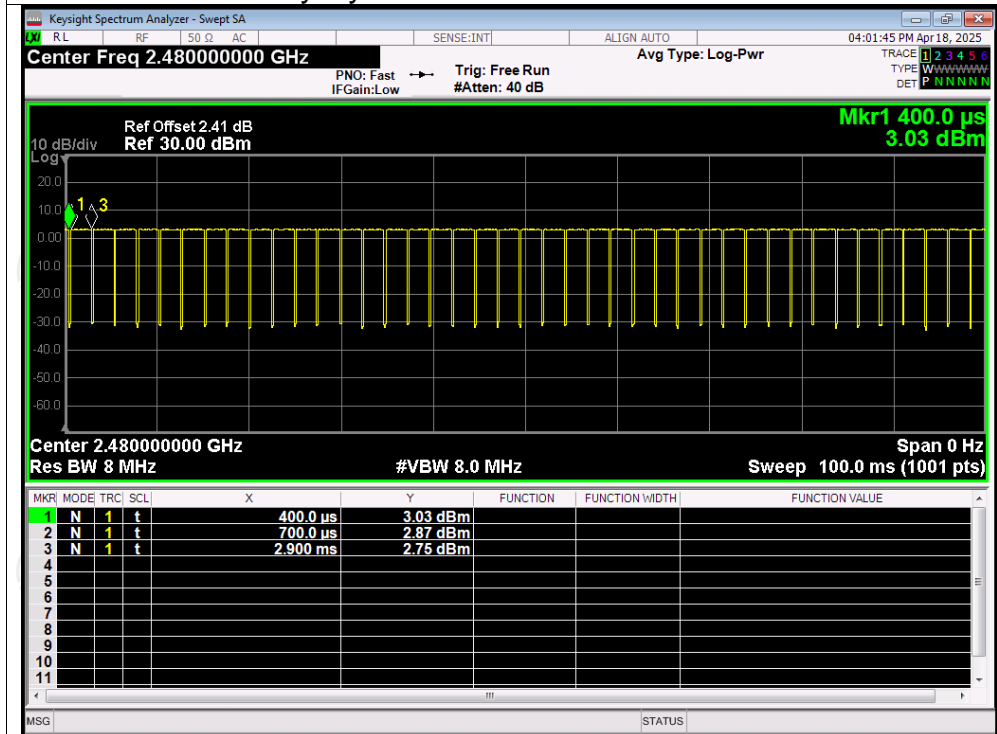


### Duty Cycle NVNT BLE 2M 2404MHz

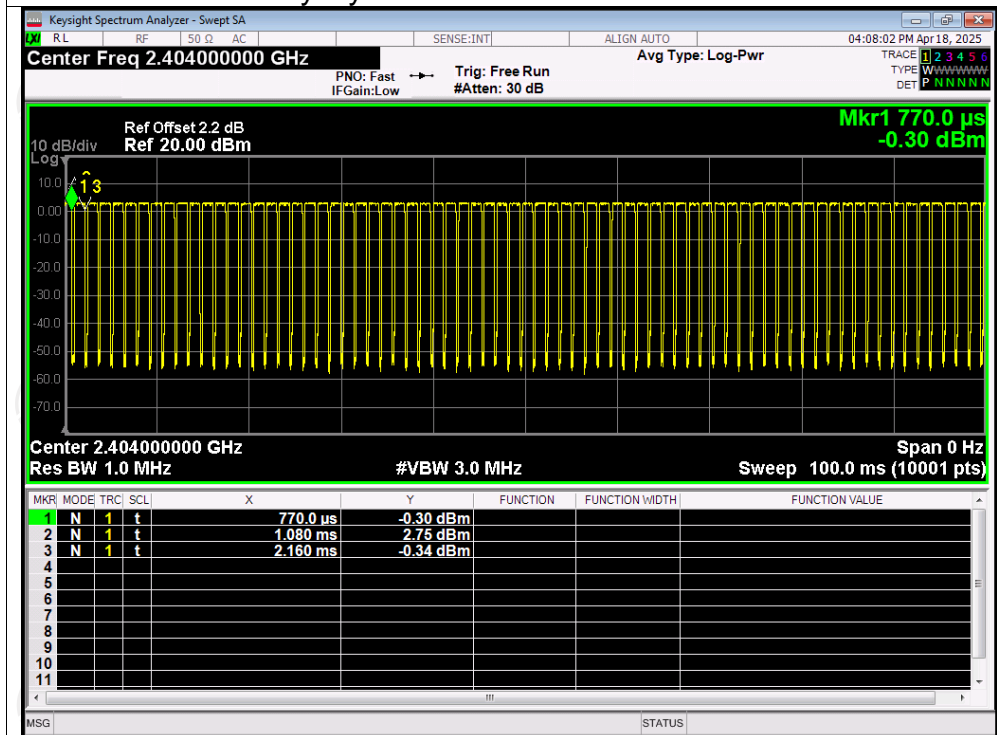

### Duty Cycle NVNT BLE 2M 2440MHz

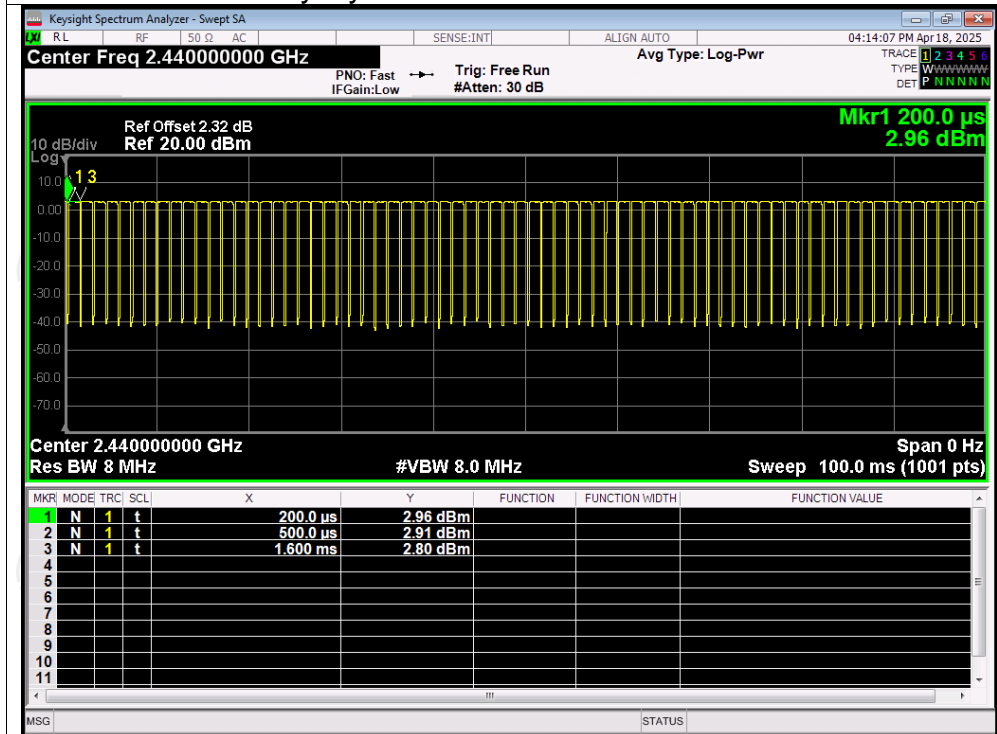

### Duty Cycle NVNT BLE 2M 2478MHz

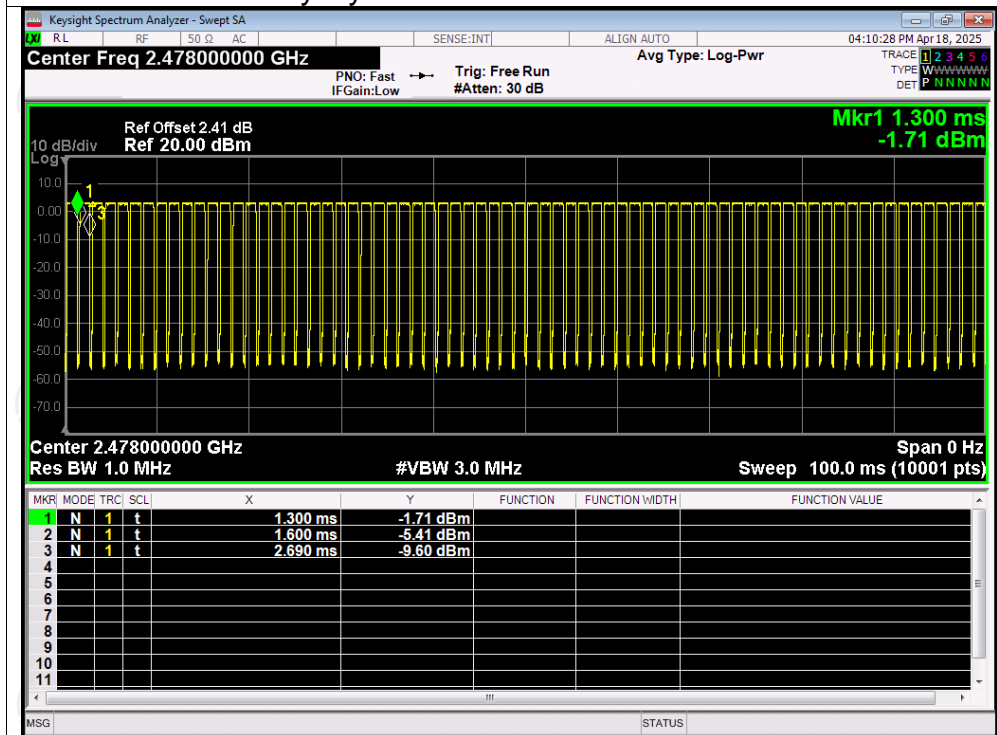


**Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	3.58	30	Pass
NVNT	BLE 1M	2440	3.13	30	Pass
NVNT	BLE 1M	2480	3.04	30	Pass
NVNT	BLE 2M	2404	3.26	30	Pass
NVNT	BLE 2M	2440	2.84	30	Pass
NVNT	BLE 2M	2478	3.39	30	Pass

### Test Graphs


#### Power NVNT BLE 1M 2402MHz

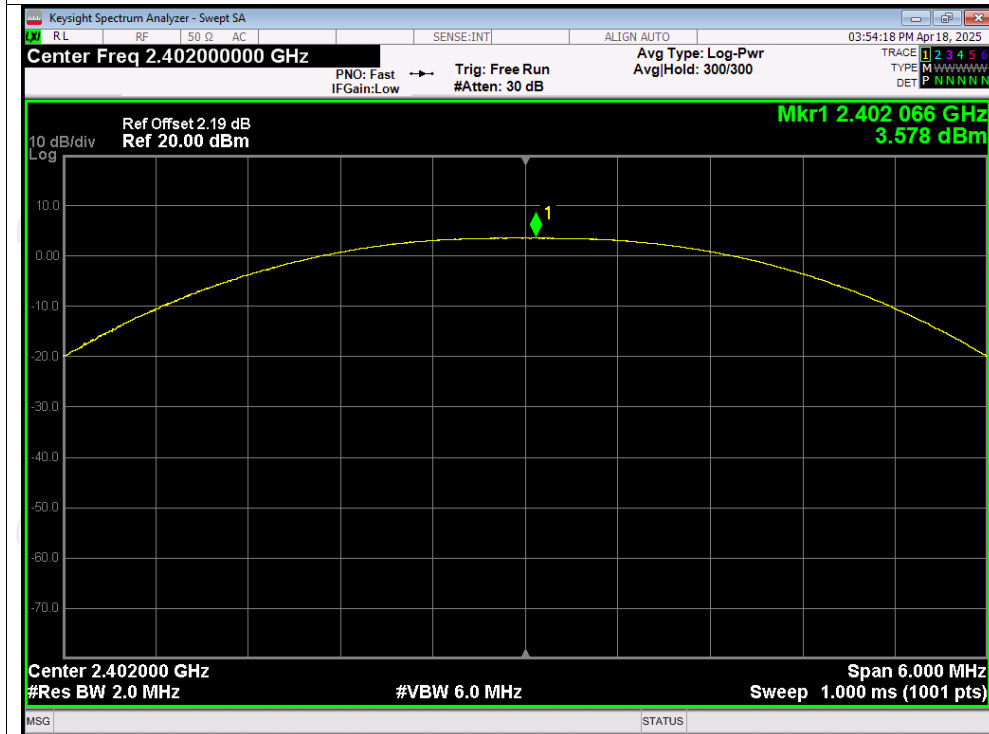


#### Power NVNT BLE 1M 2440MHz

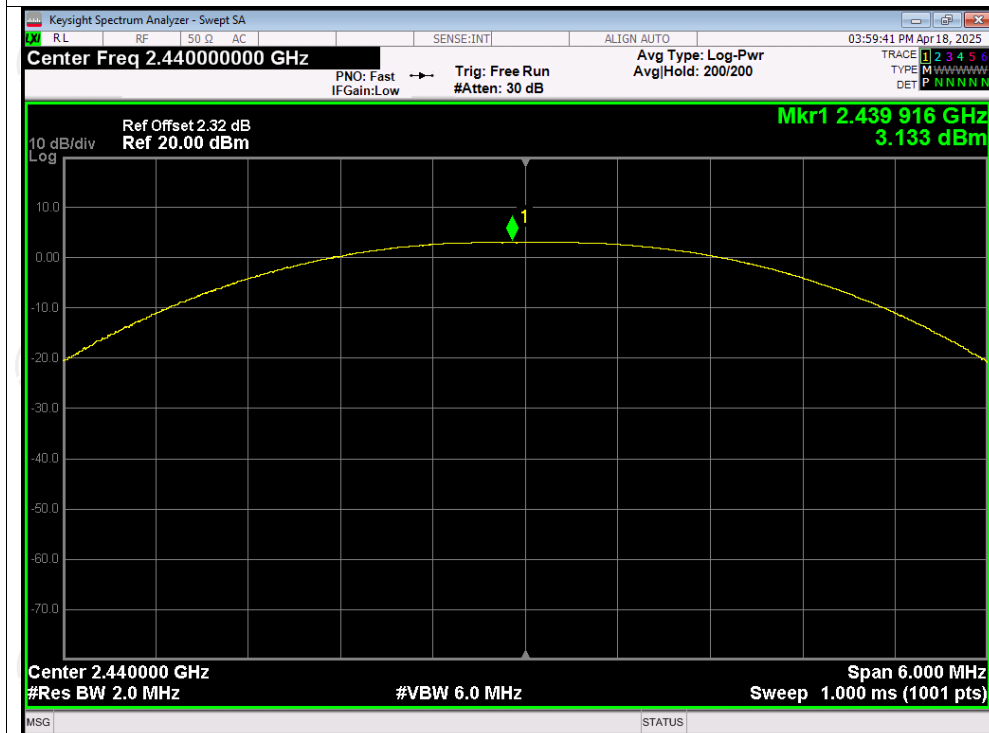


## Power NVNT BLE 1M 2480MHz

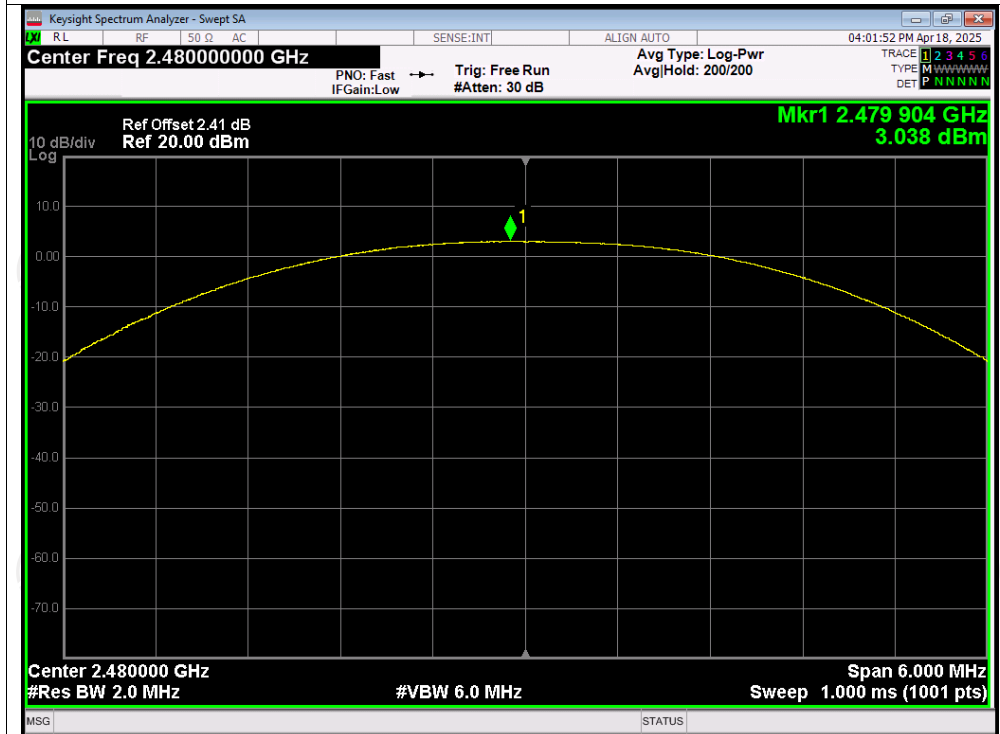


## Power NVNT BLE 2M 2404MHz

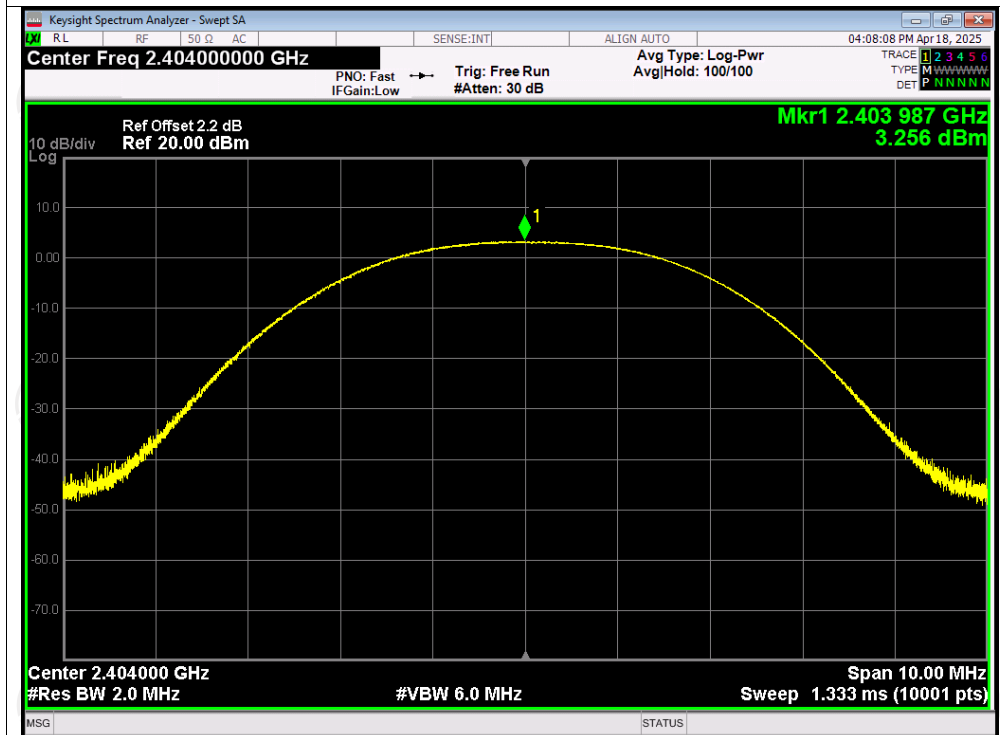

## Power NVNT BLE 2M 2440MHz

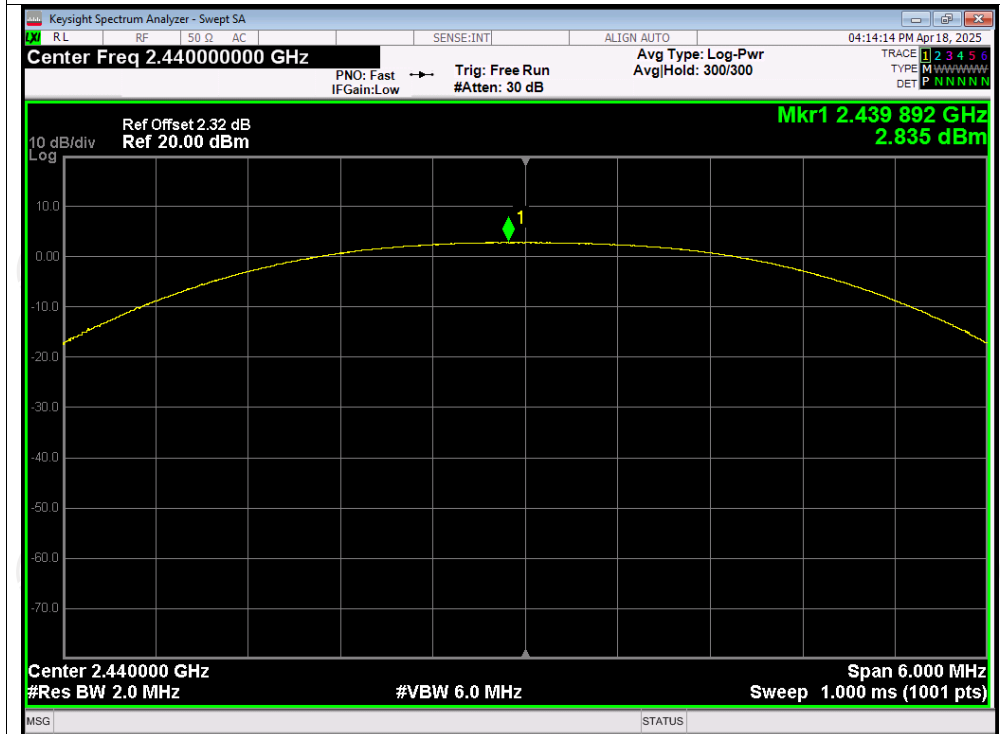

## Power NVNT BLE 2M 2478MHz

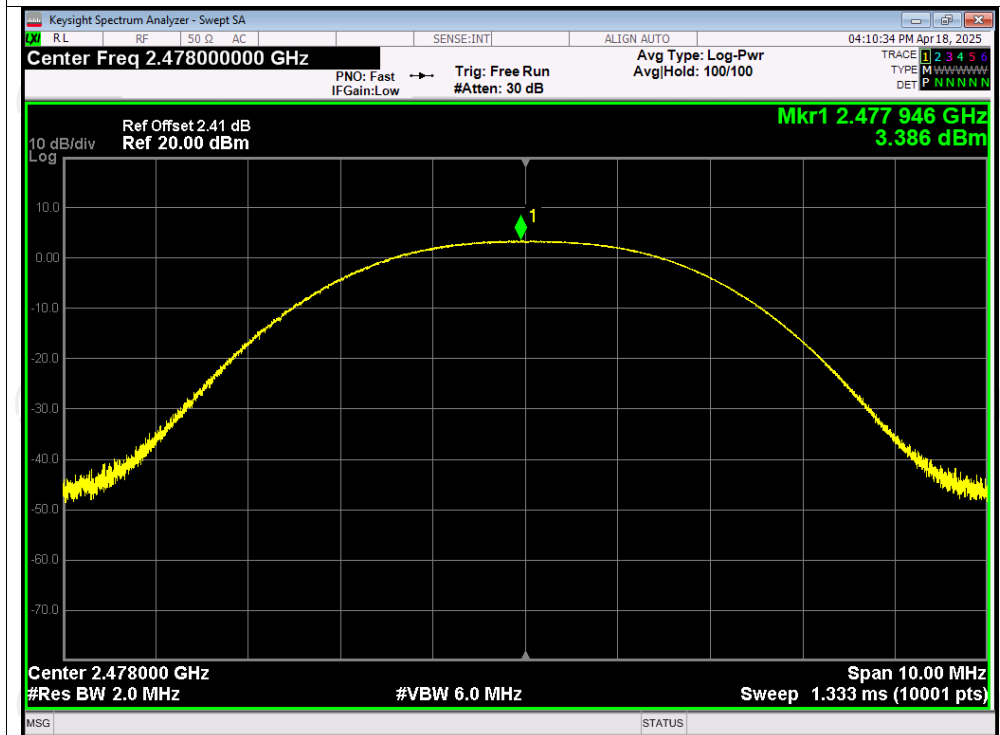




**-6dB Bandwidth**


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.726	0.5	Pass
NVNT	BLE 1M	2440	0.733	0.5	Pass
NVNT	BLE 1M	2480	0.738	0.5	Pass
NVNT	BLE 2M	2404	1.168	0.5	Pass
NVNT	BLE 2M	2440	1.187	0.5	Pass
NVNT	BLE 2M	2478	1.171	0.5	Pass



### Test Graphs



#### -6dB Bandwidth NVNT BLE 1M 2402MHz

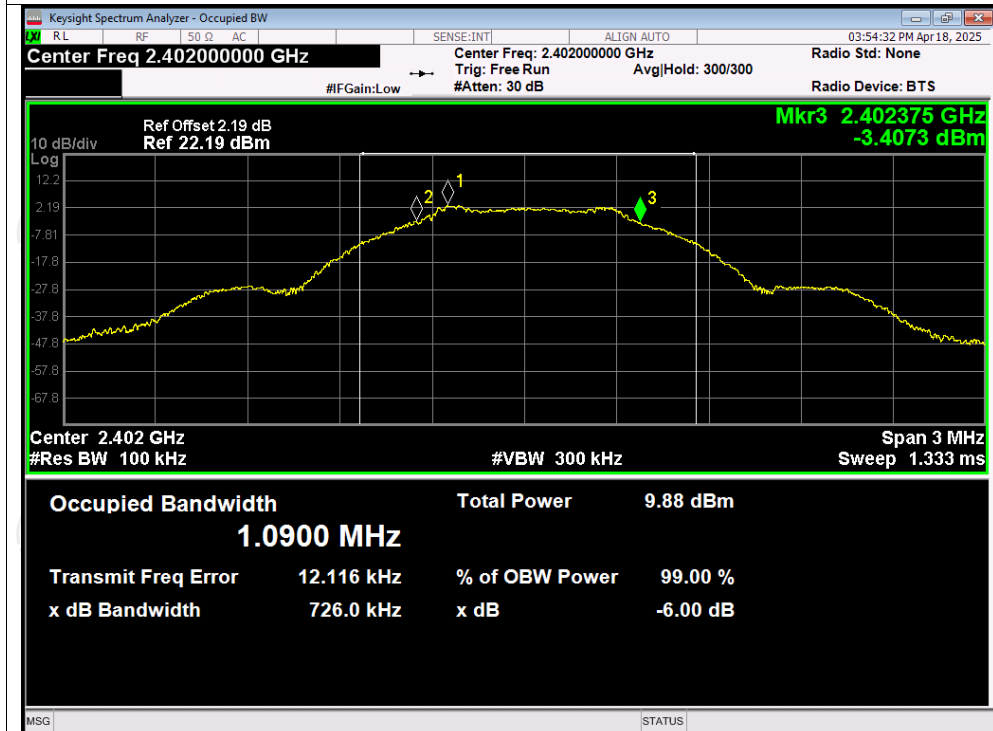

#### -6dB Bandwidth NVNT BLE 1M 2440MHz

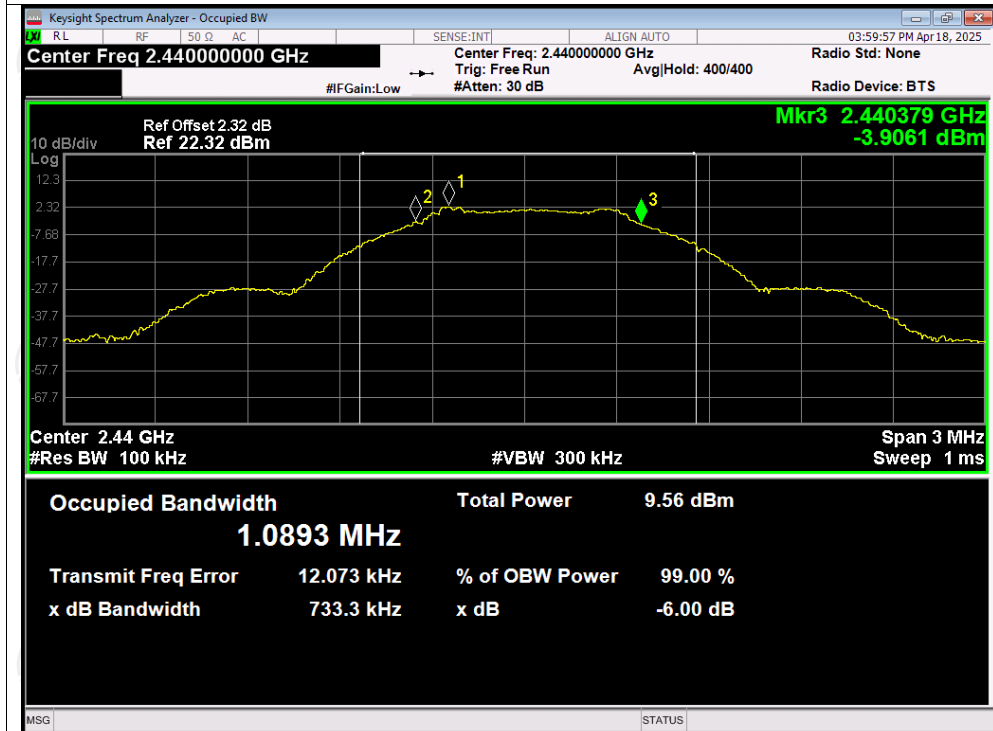

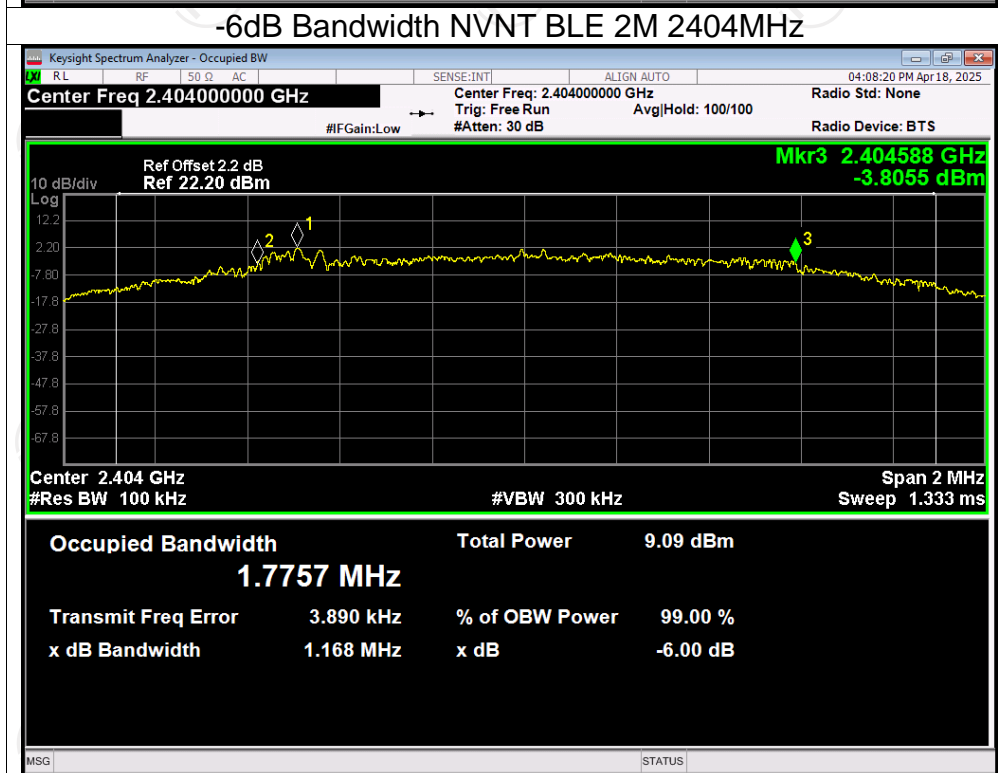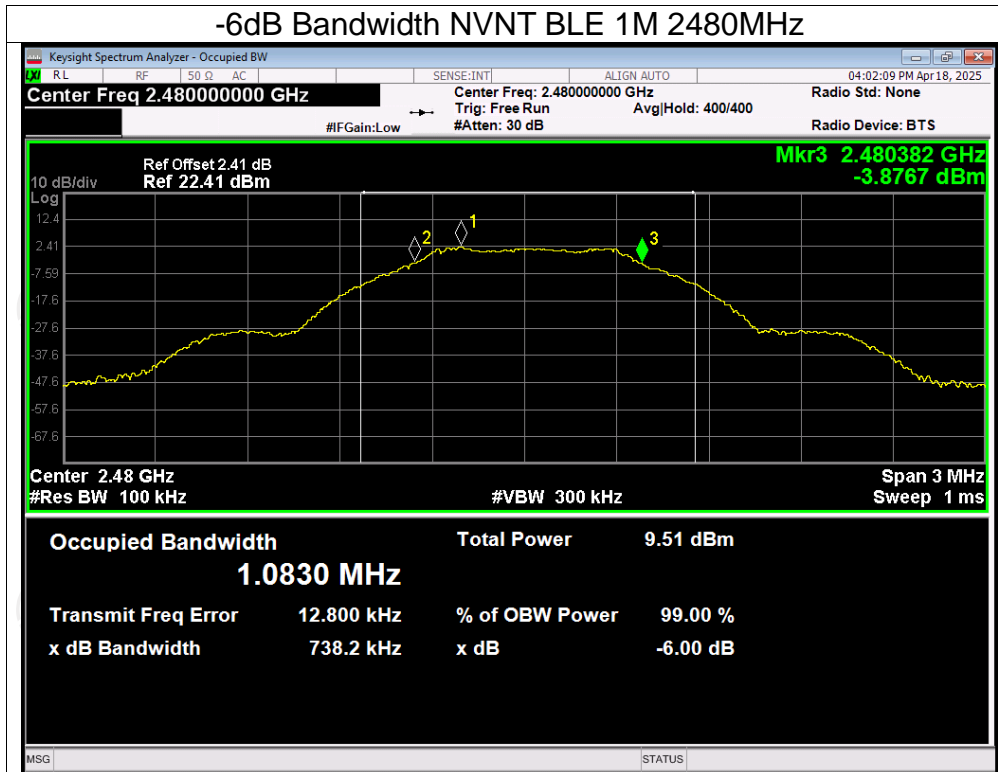

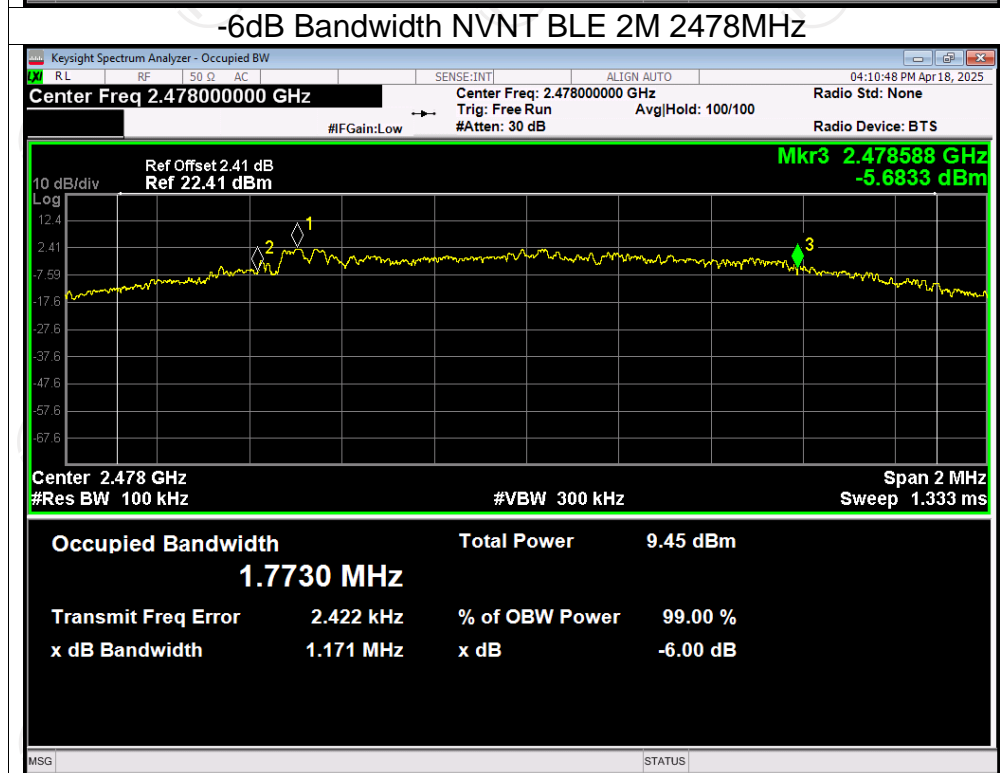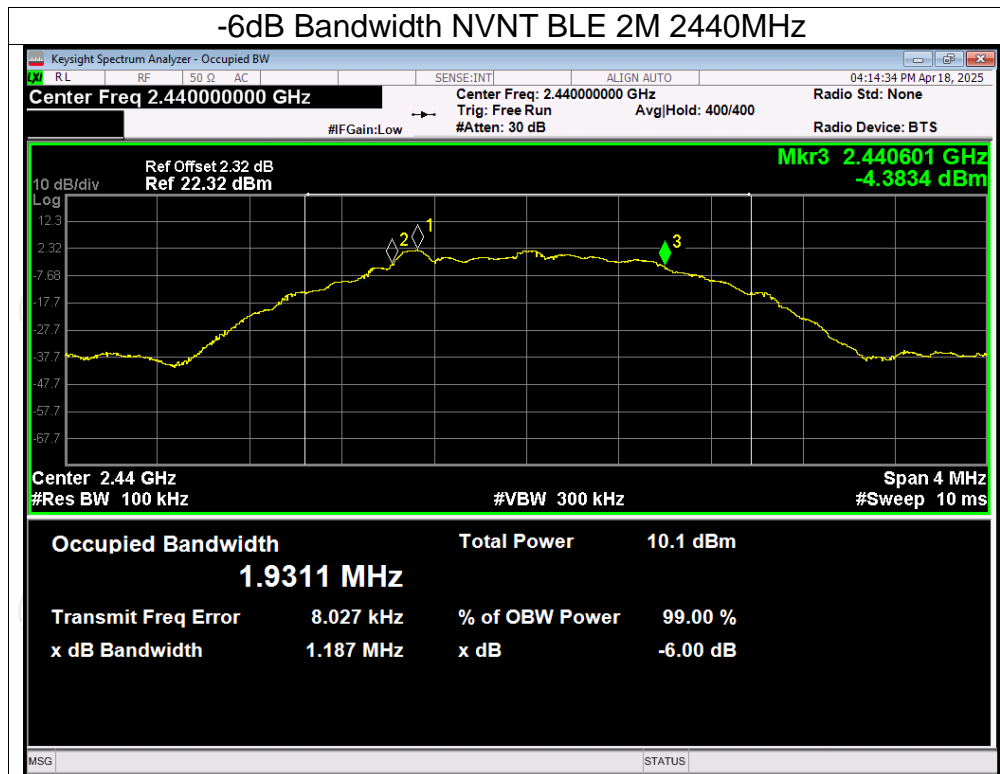


**Maximum Power Spectral Density Level**


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-11.68	8	Pass
NVNT	BLE 1M	2440	-11.94	8	Pass
NVNT	BLE 1M	2480	-11.68	8	Pass
NVNT	BLE 2M	2404	-14.60	8	Pass
NVNT	BLE 2M	2440	-15.20	8	Pass
NVNT	BLE 2M	2478	-14.60	8	Pass

### Test Graphs


#### PSD NVNT BLE 1M 2402MHz

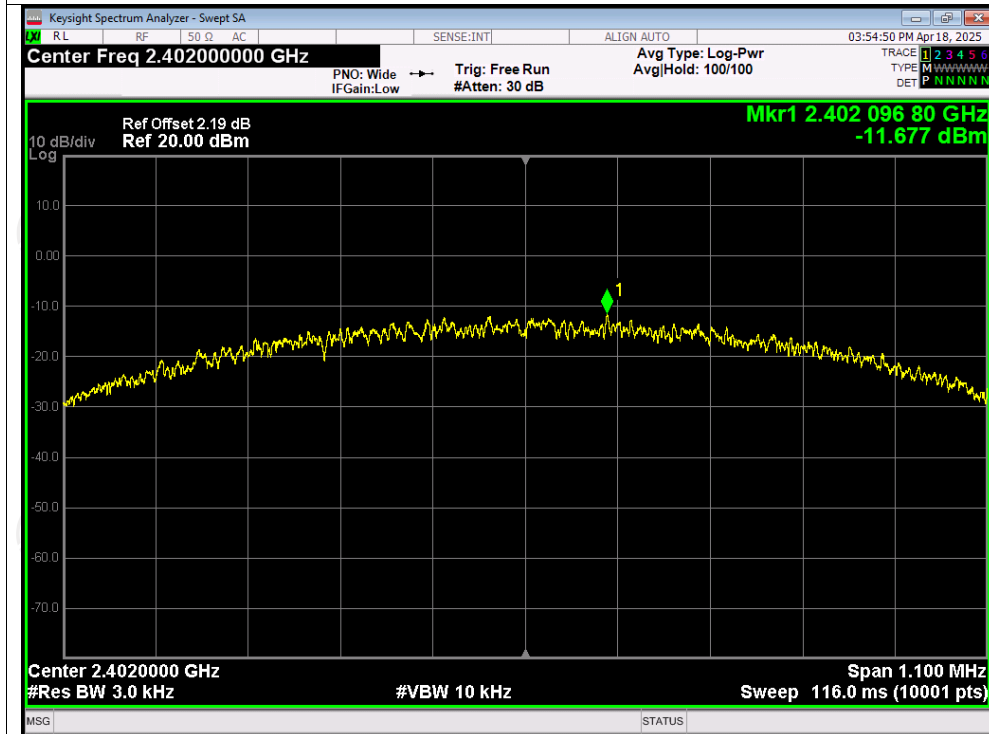


#### PSD NVNT BLE 1M 2440MHz

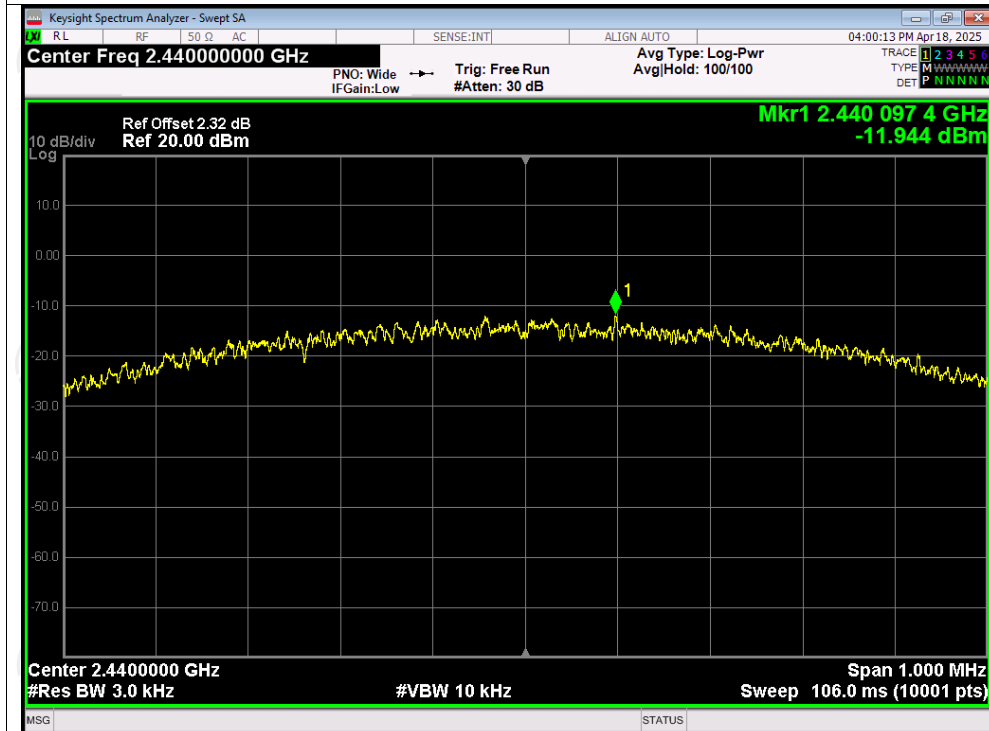


## PSD NVNT BLE 1M 2480MHz

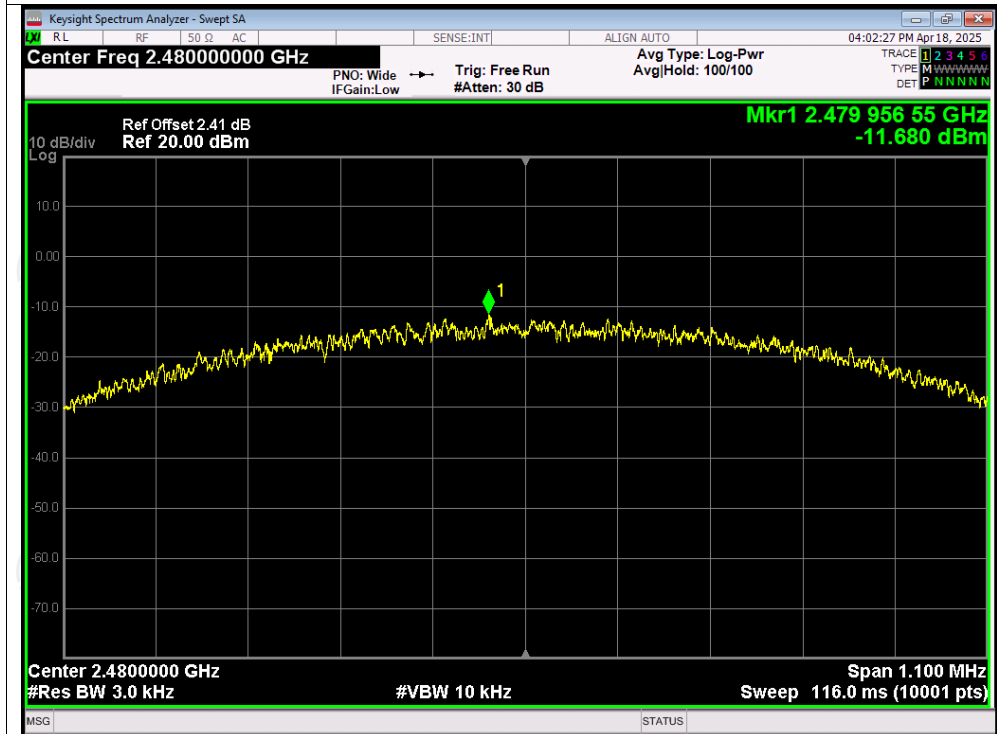


## PSD NVNT BLE 2M 2404MHz

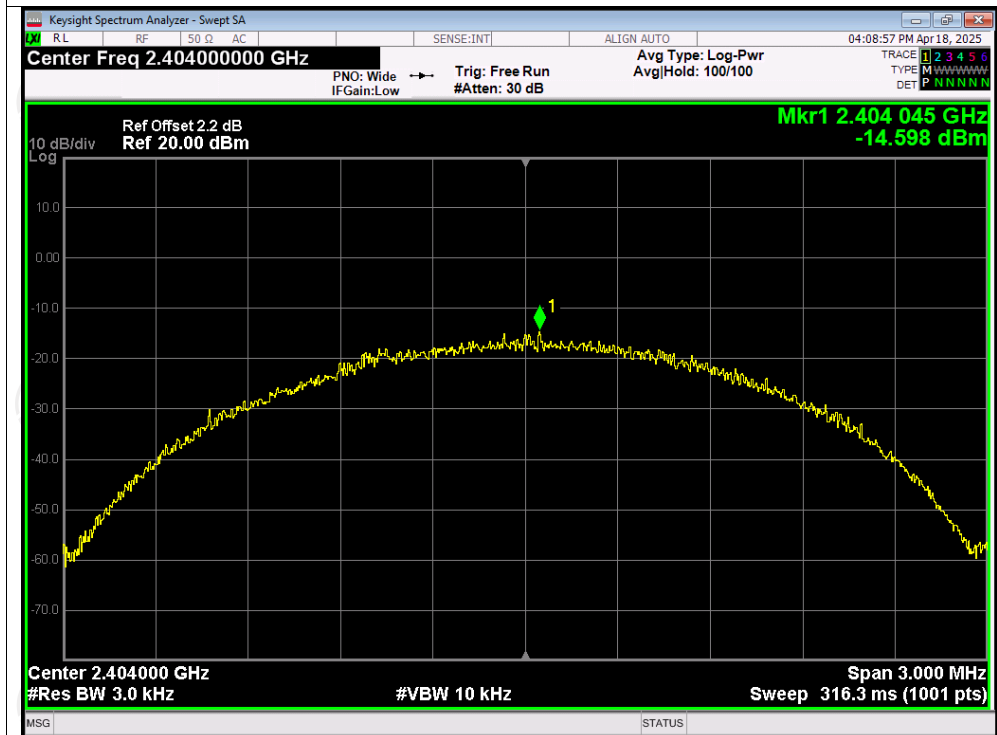

## PSD NVNT BLE 2M 2440MHz

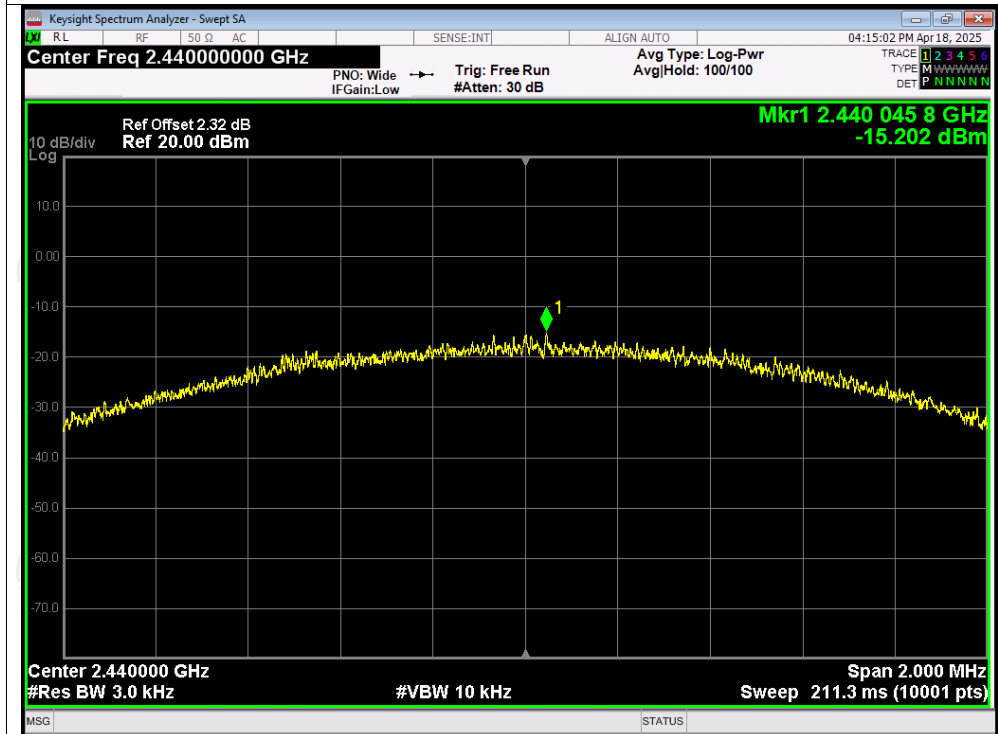

## PSD NVNT BLE 2M 2478MHz

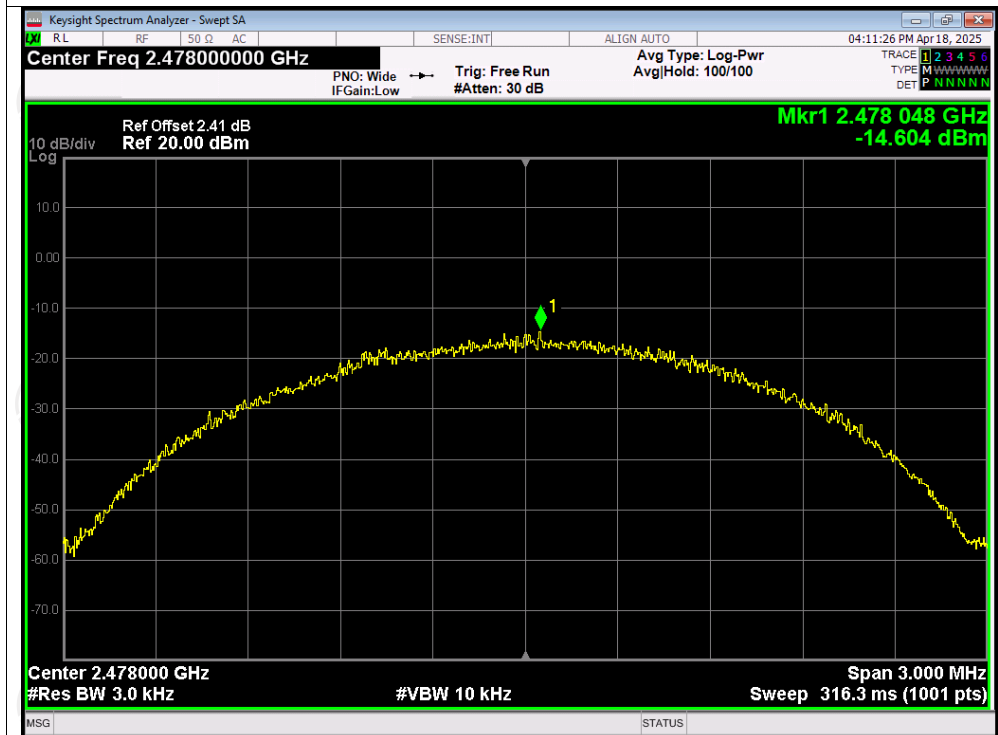




**Band Edge**


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-59.74	-20	Pass
NVNT	BLE 1M	2480	-58.10	-20	Pass
NVNT	BLE 2M	2404	-57.45	-20	Pass
NVNT	BLE 2M	2478	-59.73	-20	Pass

## Test Graphs


### Band Edge NVNT BLE 1M 2402MHz Ref

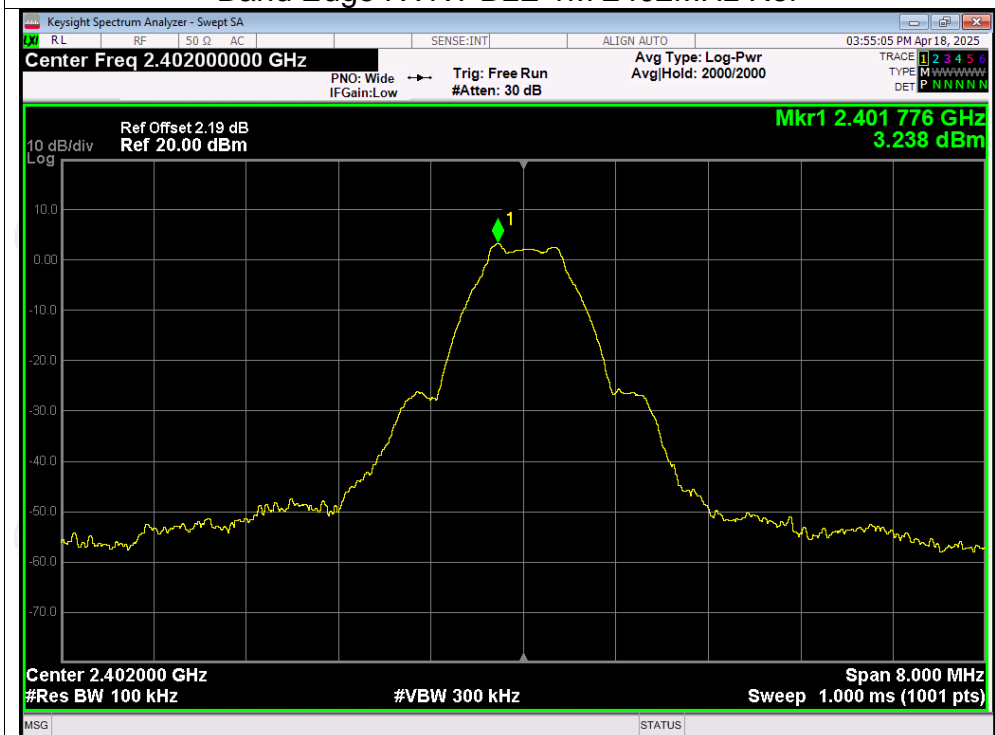


### Band Edge NVNT BLE 1M 2402MHz Emission

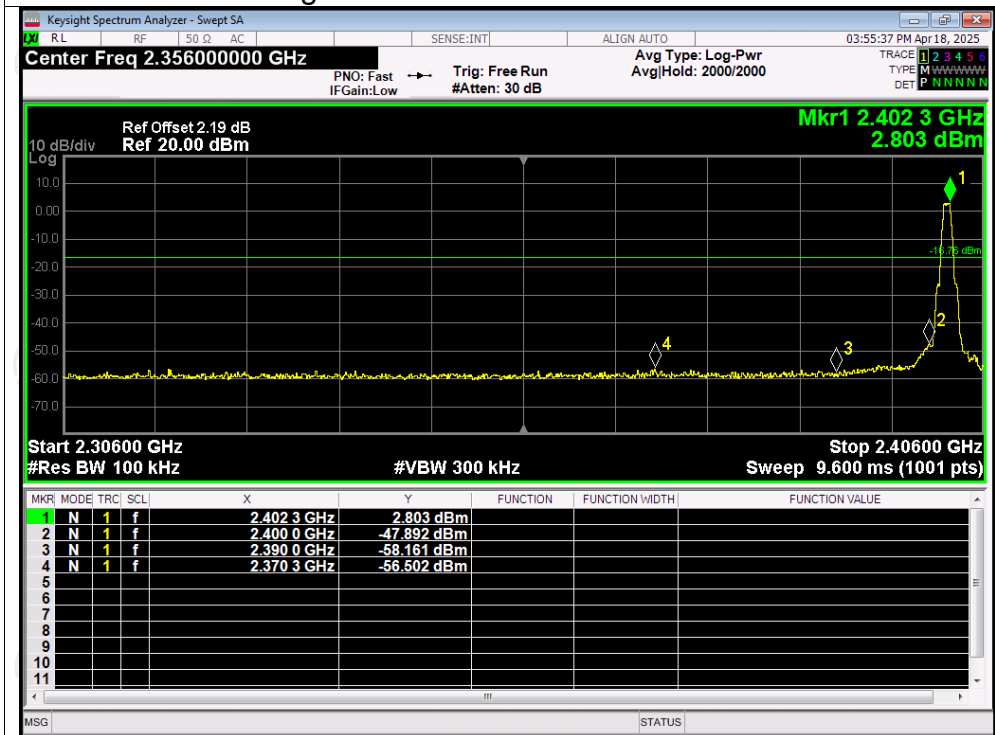


## Band Edge NVNT BLE 1M 2480MHz Ref

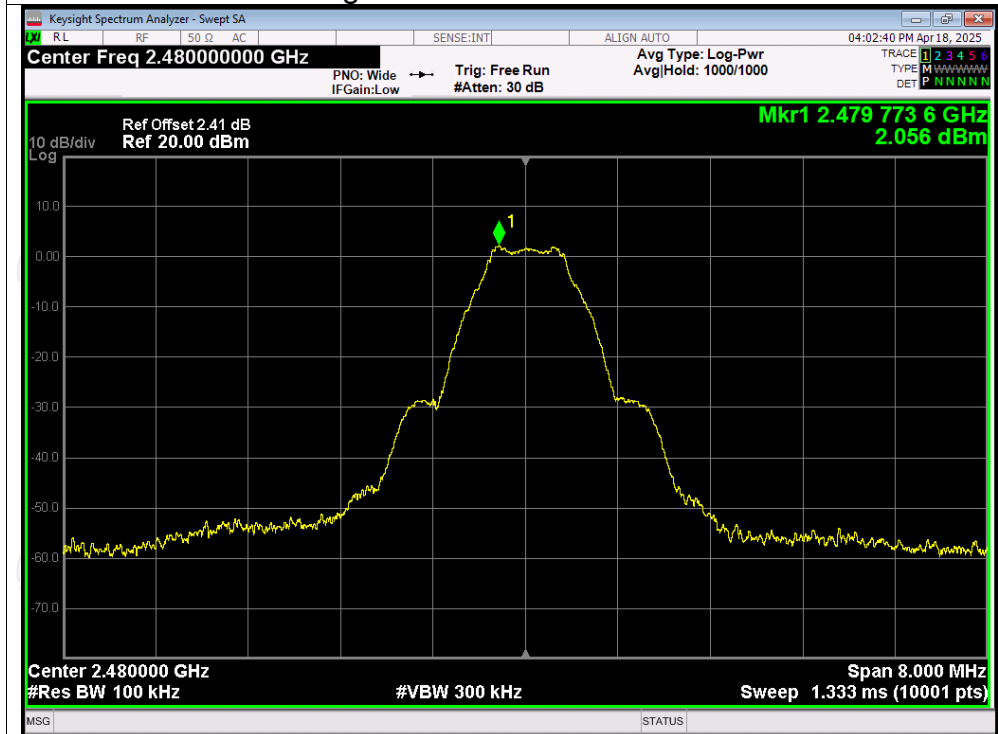


## Band Edge NVNT BLE 1M 2480MHz Emission

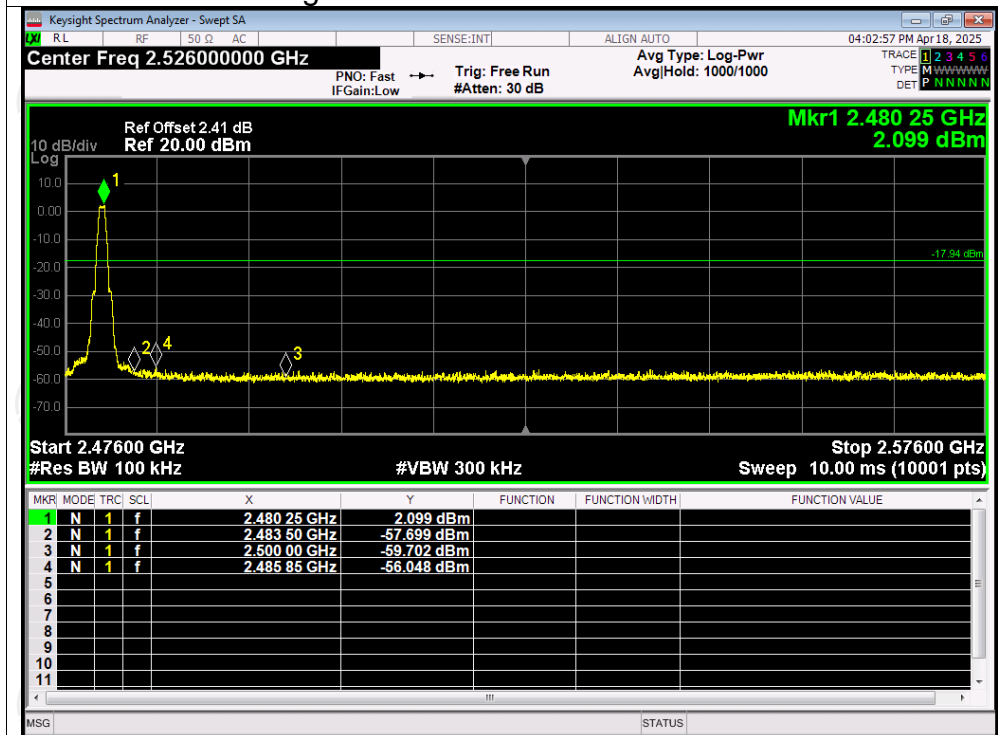


## Band Edge NVNT BLE 2M 2404MHz Ref

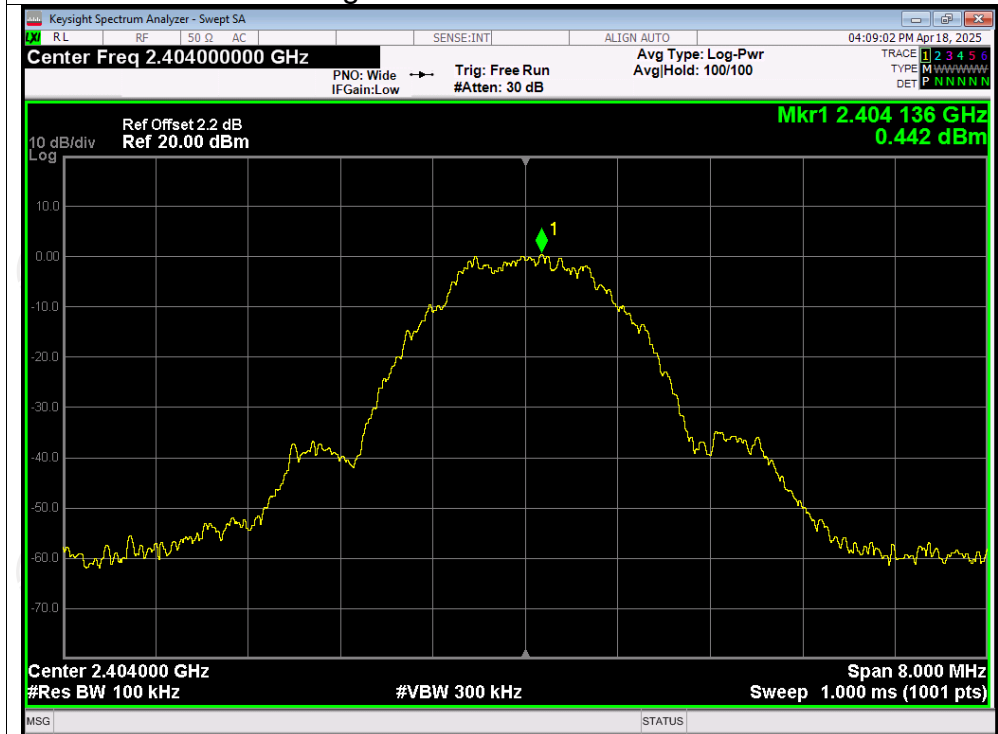


## Band Edge NVNT BLE 2M 2404MHz Emission

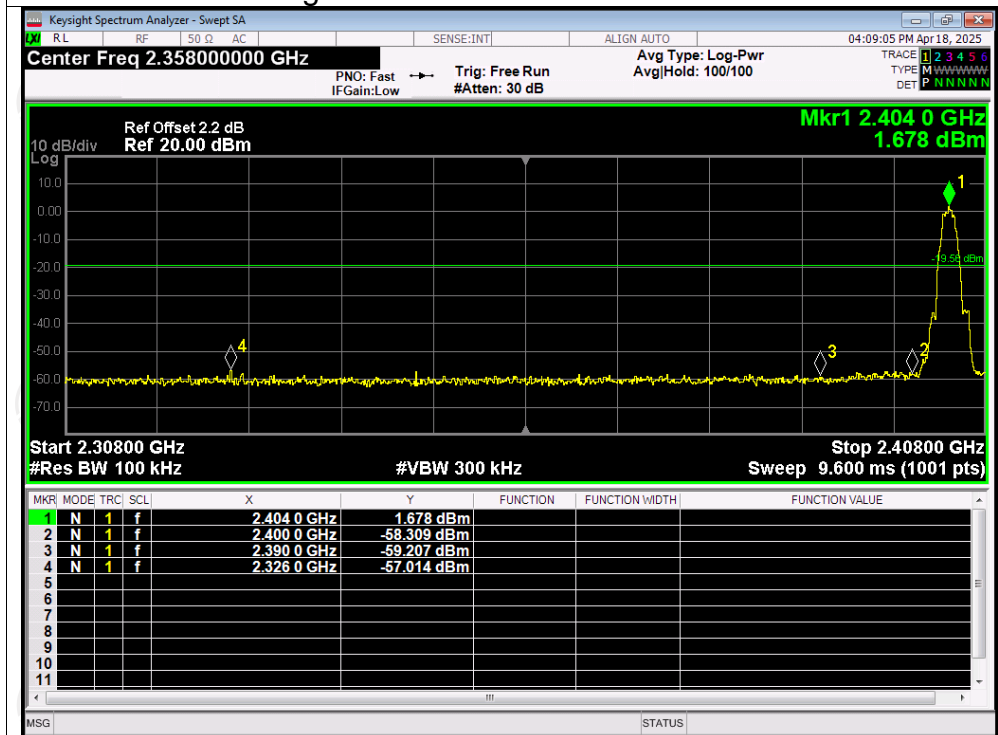

### Band Edge NVNT BLE 2M 2478MHz Ref

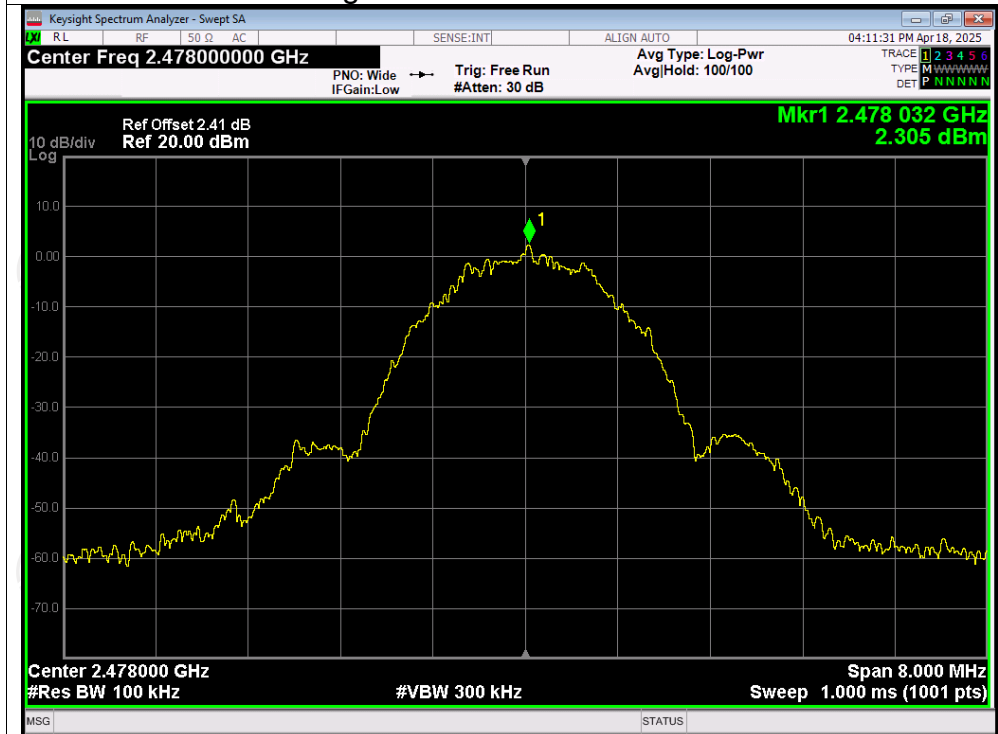

### Band Edge NVNT BLE 2M 2478MHz Emission

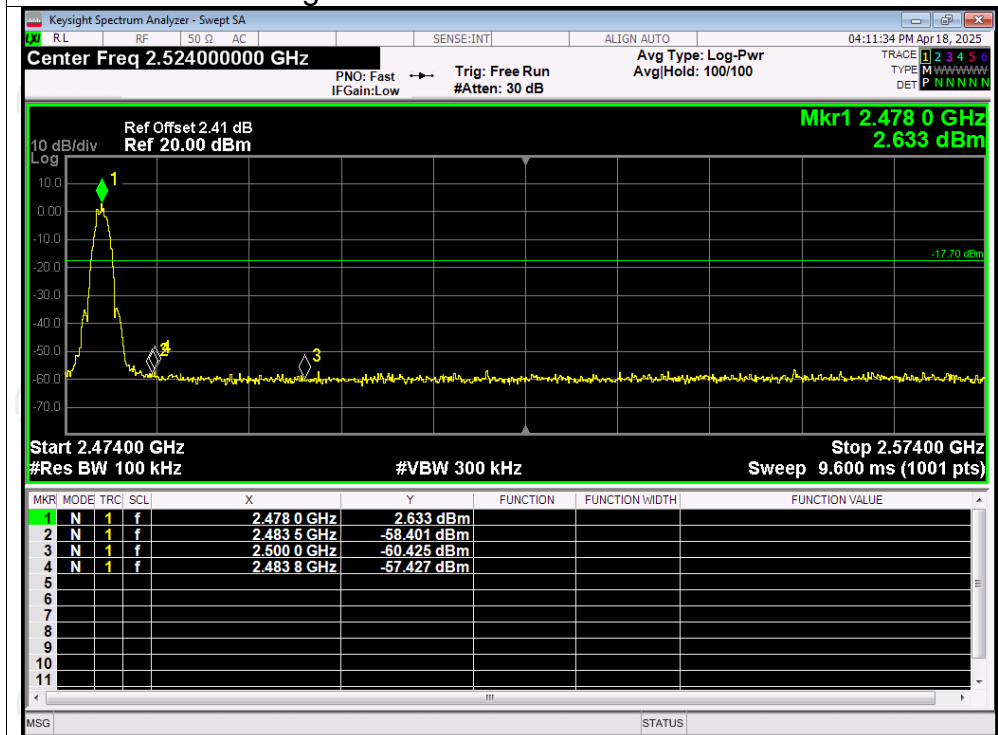


### Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-39.03	-20	Pass
NVNT	BLE 1M	2440	-40.92	-20	Pass
NVNT	BLE 1M	2480	-43.06	-20	Pass
NVNT	BLE 2M	2404	-40.50	-20	Pass
NVNT	BLE 2M	2440	-41.05	-20	Pass
NVNT	BLE 2M	2478	-40.87	-20	Pass

## Test Graphs


### Tx. Spurious NVNT BLE 1M 2402MHz Ref

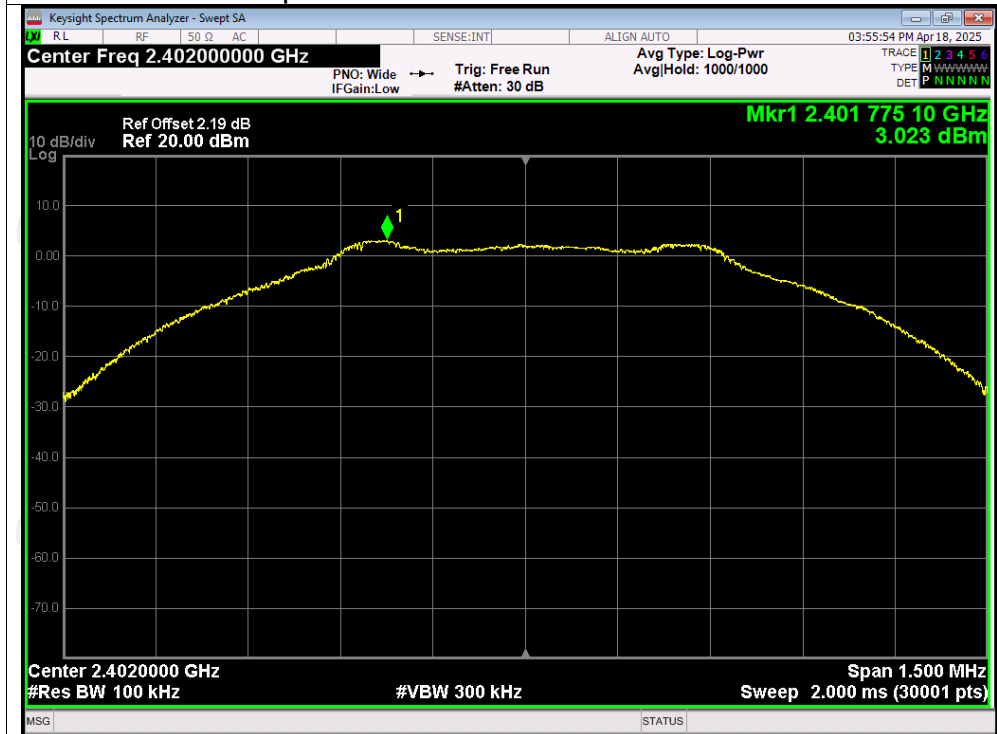


### Tx. Spurious NVNT BLE 1M 2402MHz Emission

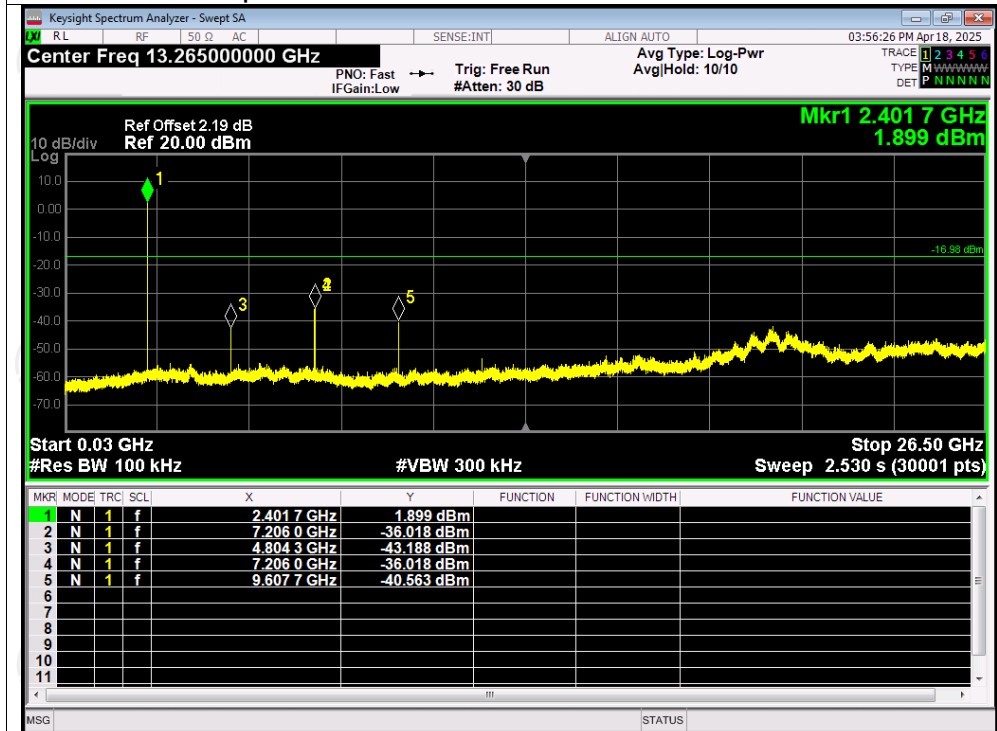

## Tx. Spurious NVNT BLE 1M 2440MHz Ref

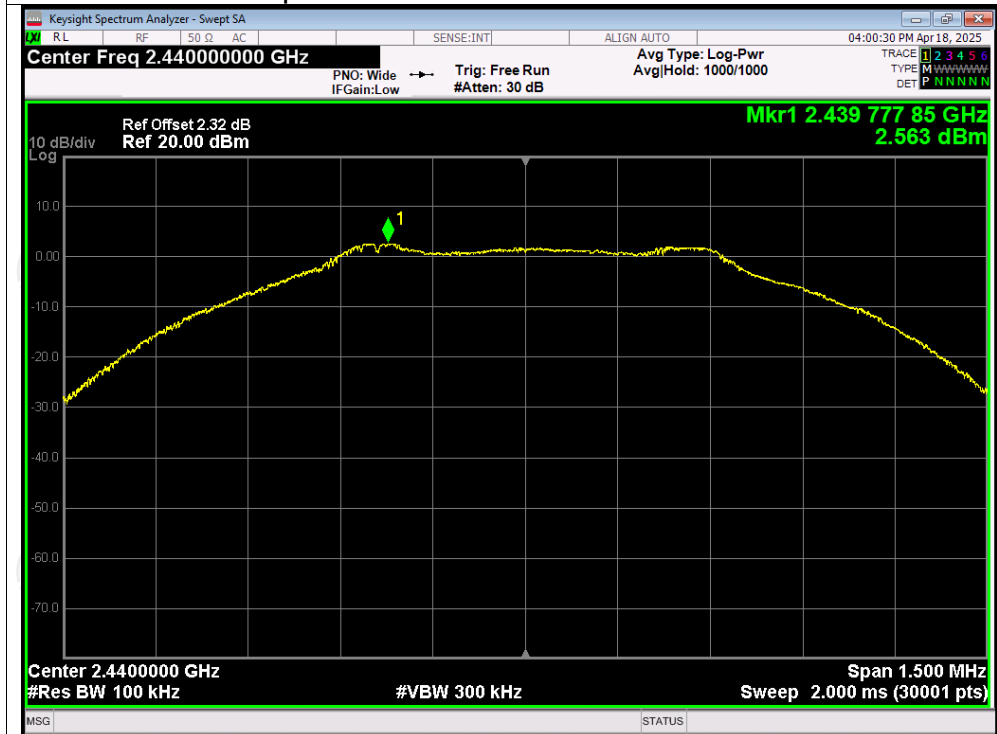


## Tx. Spurious NVNT BLE 1M 2440MHz Emission

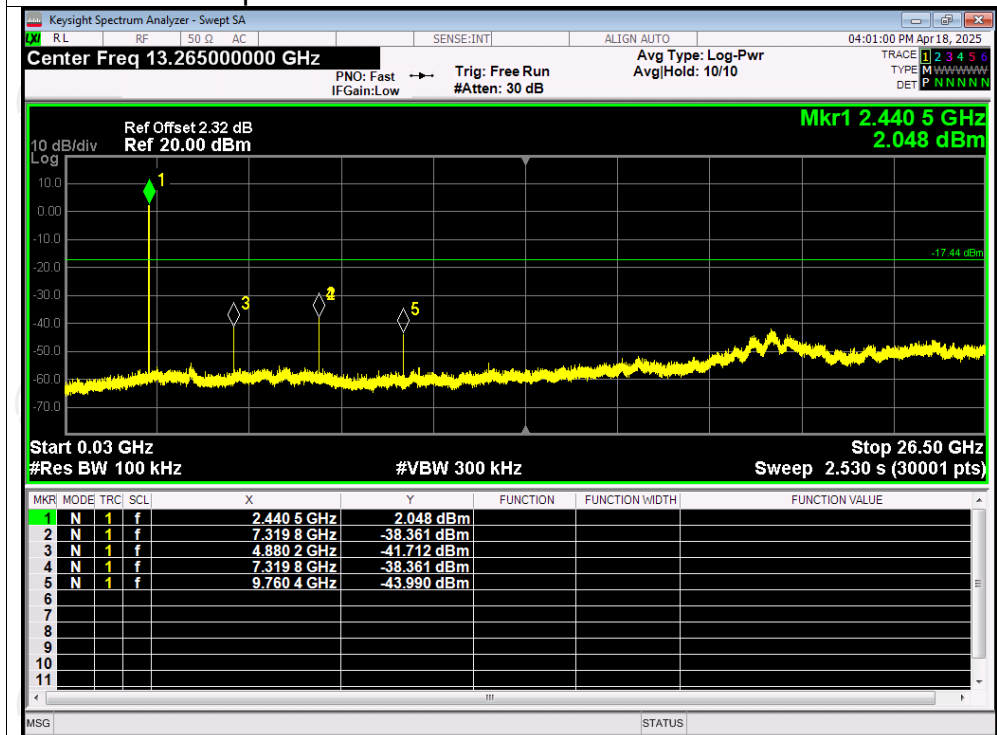




## Tx. Spurious NVNT BLE 1M 2480MHz Ref

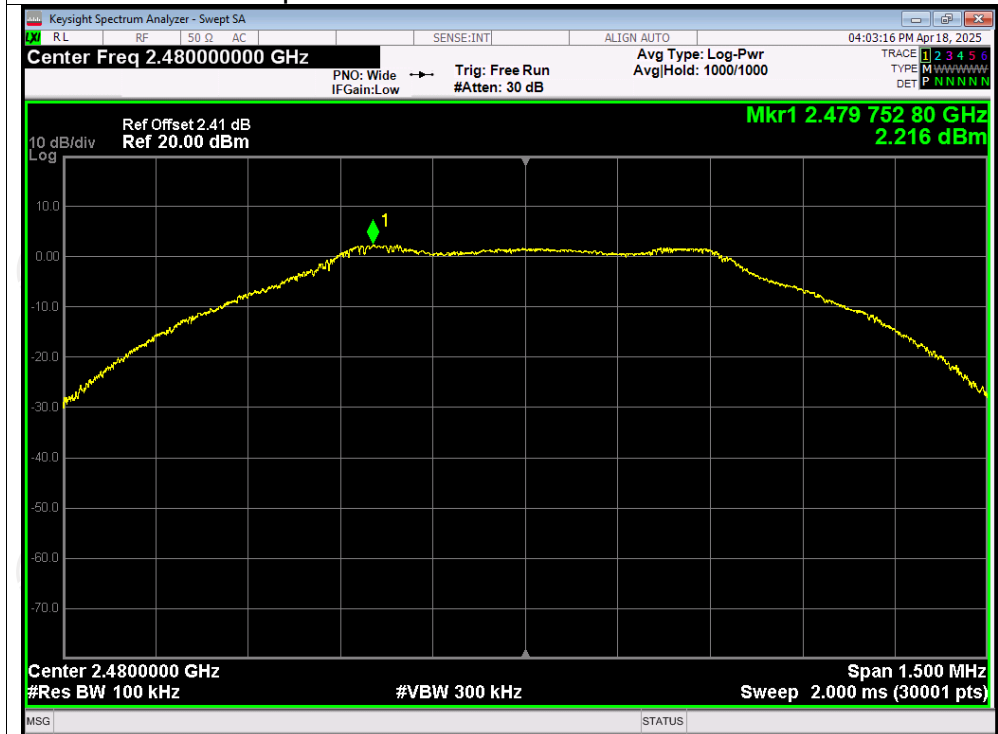


## Tx. Spurious NVNT BLE 1M 2480MHz Emission

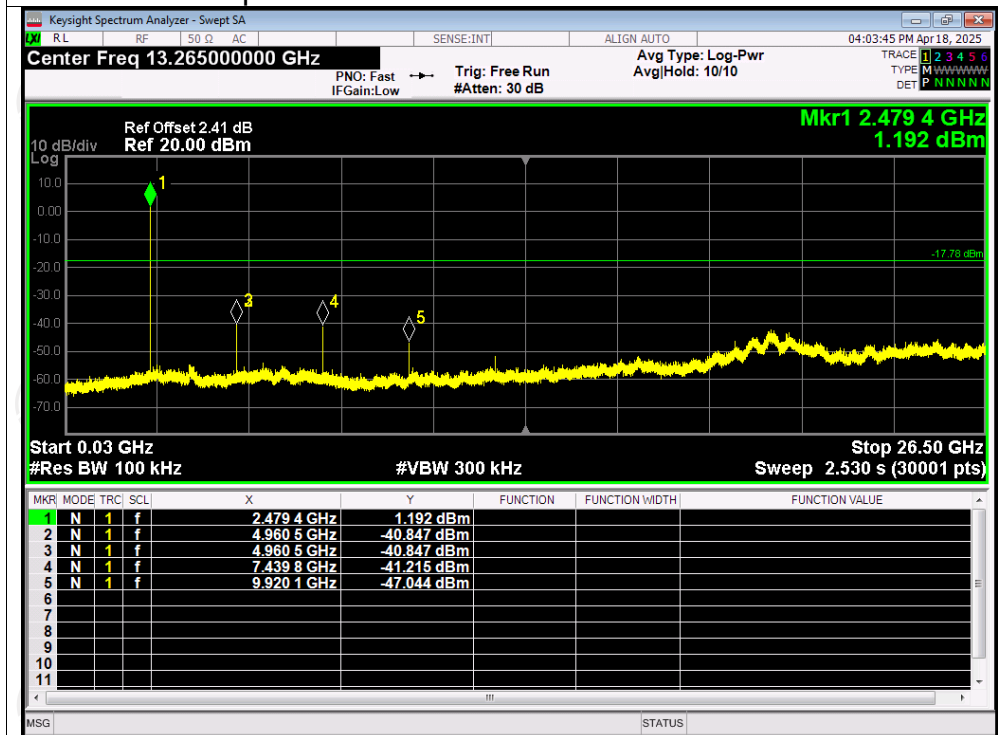


## Tx. Spurious NVNT BLE 2M 2404MHz Ref




## Tx. Spurious NVNT BLE 2M 2404MHz Emission

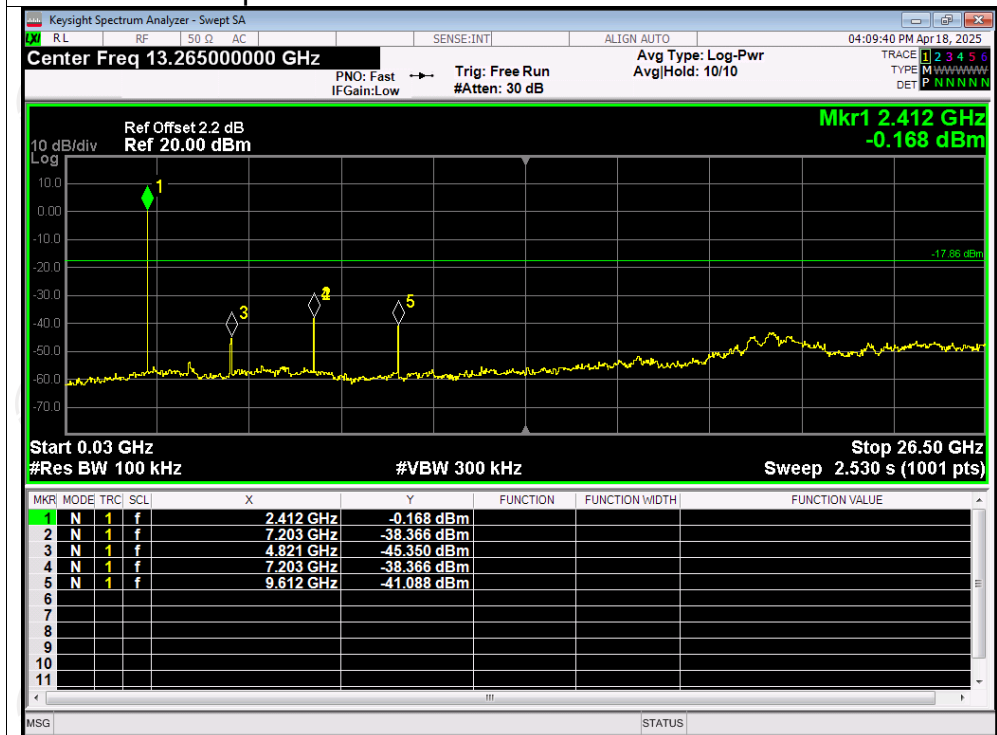


## Tx. Spurious NVNT BLE 2M 2440MHz Ref

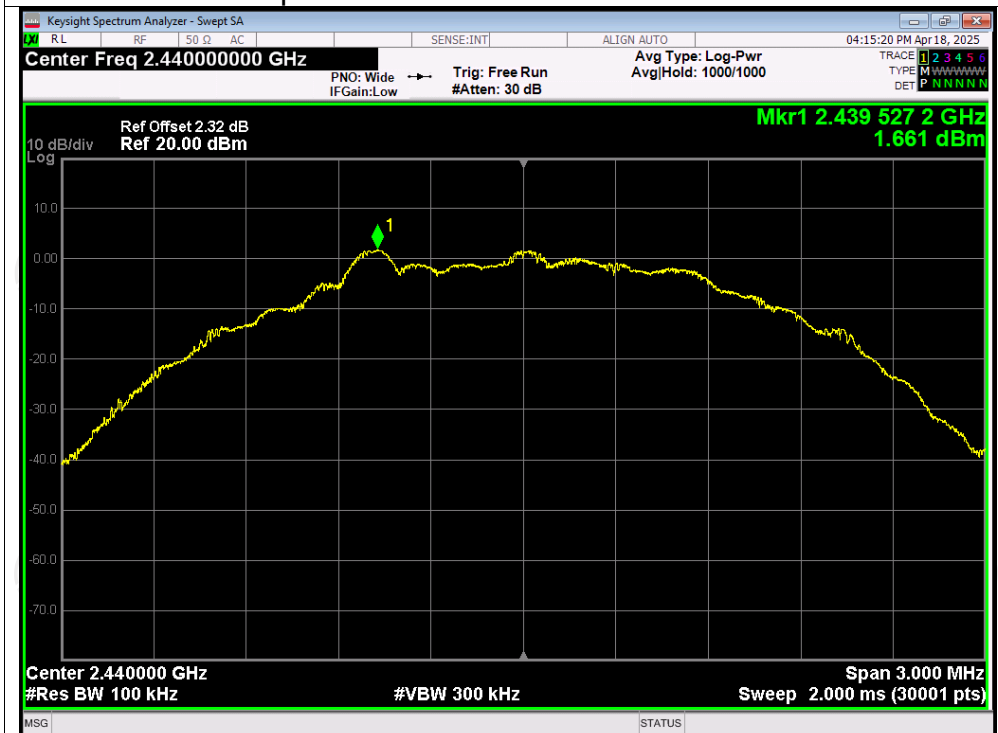


## Tx. Spurious NVNT BLE 2M 2440MHz Emission

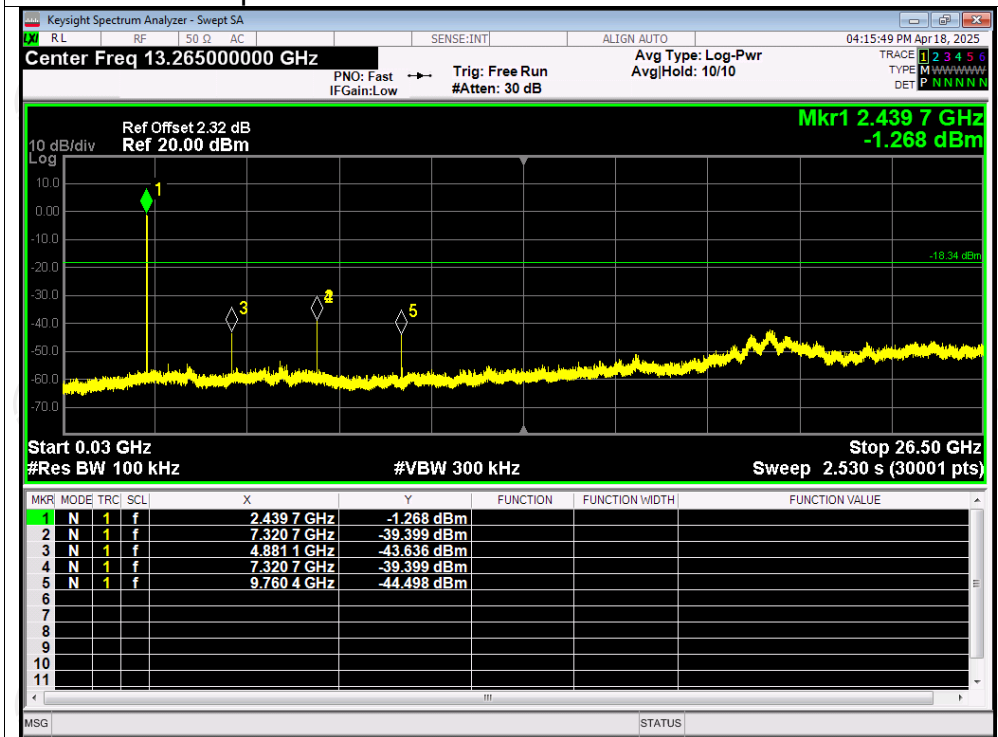

## Tx. Spurious NVNT BLE 2M 2478MHz Ref

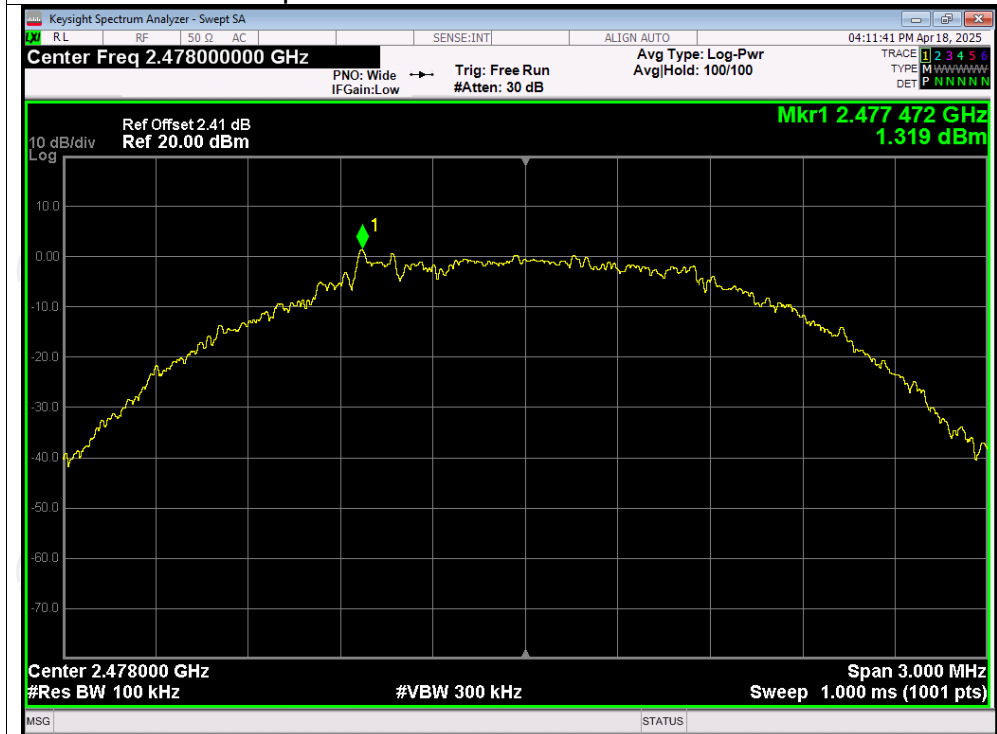

## Tx. Spurious NVNT BLE 2M 2478MHz Emission

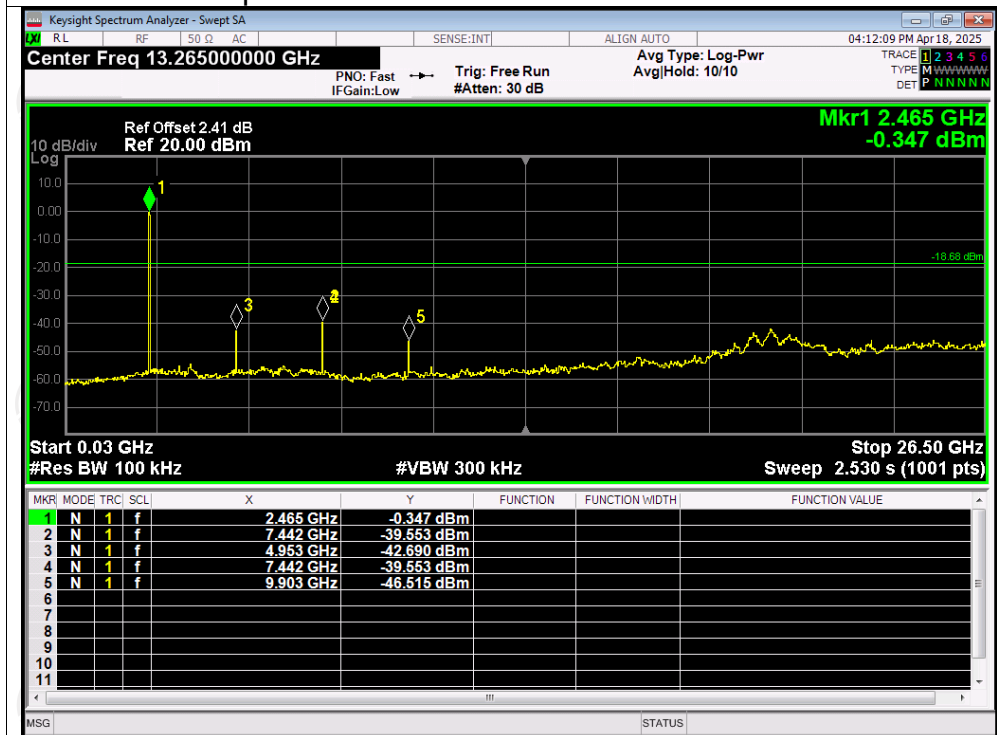

## Appendix B: Photographs of Test Setup

Please refer to document Appendix No.: TCT250410E053-A

## Appendix C: Photographs of EUT

Please refer to document Appendix No.: TCT250410E053-B & TCT250410E053-C

**\*\*\*\*\*END OF REPORT\*\*\*\*\***