



**FCC 47 CFR PART 15 SUBPART E &
INDUSTRY CANADA RSS-210**

TEST REPORT

For

Tablet Computer

Model: WT10PE-A

Trade Name: TOSHIBA

Issued to

**Pegatron Corporation
5F, NO. 76, LIGONG ST., BEITOU DISTRICT,
TAIPEI CITY 112, TAIWAN (R.O.C.)**

Issued by

**Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: September 9, 2014**



***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



Revision History

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		September 9, 2014		Initial Issue	ALL	Kelly Cheng



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 LABORATORY ACCREDITATIONS AND LISTING.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT	13
7. RSS 210 REQUIREMENTS	14
7.1 99%BANDWIDTH.....	14
7.2 6DB BANDWIDTH	20
7.3 PEAK POWER.....	26
7.4 AVERAGE POWER	28
7.6 PEAK POWER SPECTRAL DENSITY	30
7.7 SPURIOUS EMISSIONS.....	36
7.8 POWERLINE CONDUCTED EMISSIONS.....	49
APPENDIX I PHOTOGRAPHS OF TEST SETUP	52



1. TEST RESULT CERTIFICATION

Applicant: Pegatron Corporation
5F, NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI CITY
112, TAIWAN (R.O.C.)

Manufacturer: Toshiba Corporation
1-1, Shibaura 1-Chome, Minato-Ku, Tokyo, 105-8001, Japan

Equipment Under Test: Tablet Computer

Trade Name: TOSHIBA

Model: WT10PE-A

Date of Test: August 30 ~ September 2, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E & Industry Canada RSS-210 Issue 8 December, 2010	No non-compliance noted

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The test results of this report relate only to the tested sample identified in this report.

Approved by

Reviewed by

Miller Lee
Section Manager
Compliance Certification Services Inc.

Angel Cheng
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Tablet Computer		
Trade Name	TOSHIBA		
Model Number	WT10PE-A		
Model Discrepancy	N/A		
Received Date	August 14, 2014		
WLAN Manufacturer	AzureWave	Model	AW-AH640(BCM43340)
Power Supply	1. VDC from Power Adapter Chicony / W12-010N3C I/P: 100-240V~ 50/60Hz, 0.3A O/P: 5VDC, 2A 2. Powered from host device via USB Cable 3. Power from Battery LG (Trademark: Toshiba) / PA5204U-1BRS Rating: 3.75V, 5820mAh		
Frequency Range	IEEE 802.11a/ IEEE 802.11n HT 20 MHz: 5.725~5.850 GHz IEEE 802.11n HT 40 MHz mode: 5.755~5.795GHz		
Transmit Power	IEEE 802.11a mode: 20.38 dBm IEEE 802.11n HT 20 MHz mode: 19.96 dBm IEEE 802.11n HT 40 MHz mode: 20.17 dBm		
Modulation Technique & Transmit Data Rate	IEEE 802.11a: OFDM (54, 48, 36, 24, 18, 12, 9, 6 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)		
Number of Channels	IEEE 802.11a mode: 5 Channels IEEE 802.11n HT 20 MHz mode: 5 Channels IEEE 802.11n HT 40 MHz mode: 2 Channels		
Antenna Specification	YAGEO / ANT1003LL15R2455A Chip Antenna / Gain: -0.4dBi		
Accessory	TOSHIBA / WACOM AES stylus with 1 side switch		



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2009 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47 Part 15.207, 15.209 and 15.407, RSS-GEN Issue 2, and RSS-210 Issue 8.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WT10PE-A) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

IEEE 802.11a mode:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low(5745MHz), Channel Mid(5785MHz) and Channel High(5825MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode:

Channel Low(5755MHz) and Channel High(5795MHz) with 13.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z mode), lie-down position (X, Y mode). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/19/2015
Power Meter	Anritsu	ML2495A	1012009	06/03/2015
Power Sensor	Anritsu	MA2411B	0917072	06/03/2015

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	11/05/2014
EMI Test Receiver	R&S	ESCI	100064	02/27/2015
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/11/2015
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/18/2014
Bilog Antenna	Sunol Sciences	JB3	A030105	10/01/2014
Horn Antenna	EMCO	3117	00055165	02/12/2015
Horn Antenna	EMCO	3116	00026370	10/09/2014
Loop Antenna	EMCO	6502	8905/2356	06/08/2015
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/21/2014
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101203	09/12/2014
LISN	R&S	ESH3-Z5	848773/014	12/05/2014
LISN	SCHWARZBECK	NSLK 8127	8127-541	12/05/2014
Test S/W	CCS-3A1-CE			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2159
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 248, Taiwan (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.




All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, IC 2324G-2 for 3M Semi Anechoic Chamber B.



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method –47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

Remark:


1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7. RSS 210 REQUIREMENTS

7.1 99%BANDWIDTH

Test Configuration



TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11a mode

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5745	16.6406
Mid	5785	16.5829
High	5825	16.6802

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.6287
Mid	5785	17.6242
High	5825	17.6173

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	36.1535
High	5795	36.2847




Test Plot

IEEE 802.11a mode

99% Bandwidth (CH Low)

Agilent

R T

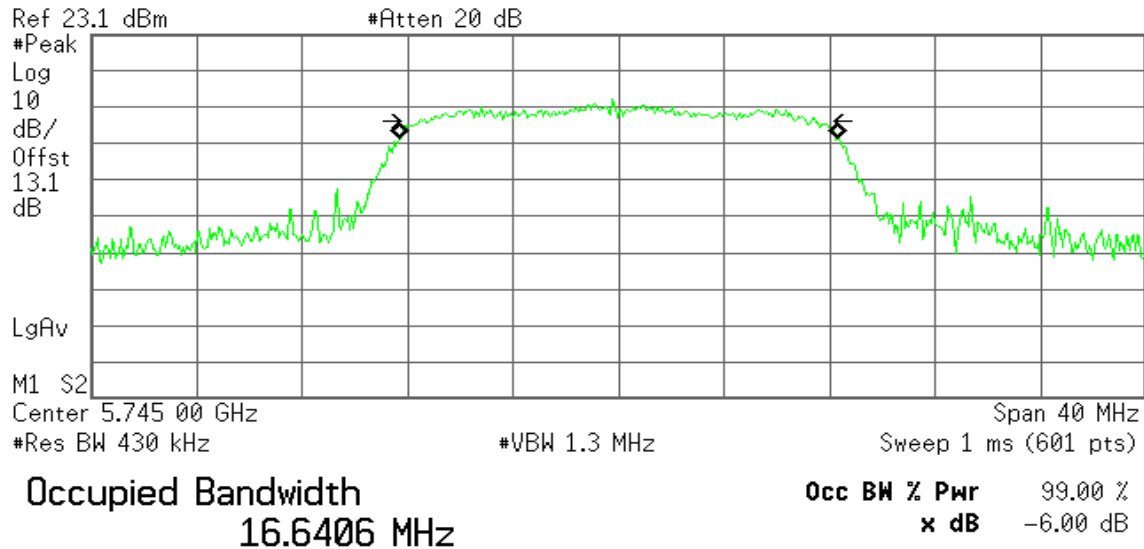


Transmit Freq Error -3.275 kHz
x dB Bandwidth 14.980 MHz

99% Bandwidth (CH Mid)

Agilent

R T

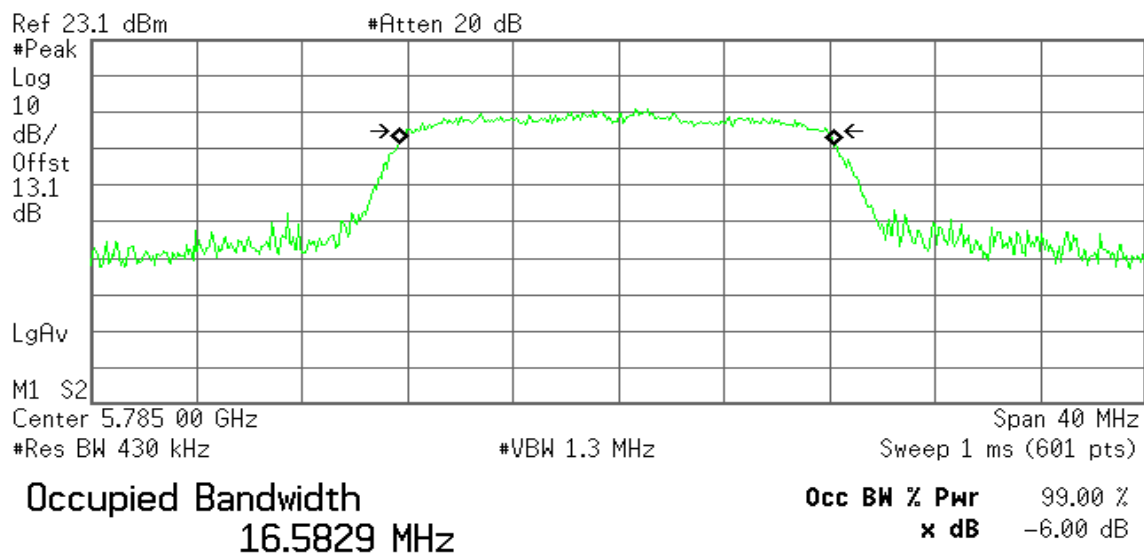


Transmit Freq Error -69.705 kHz
x dB Bandwidth 15.890 MHz



99% Bandwidth (CH High)

Agilent

R T

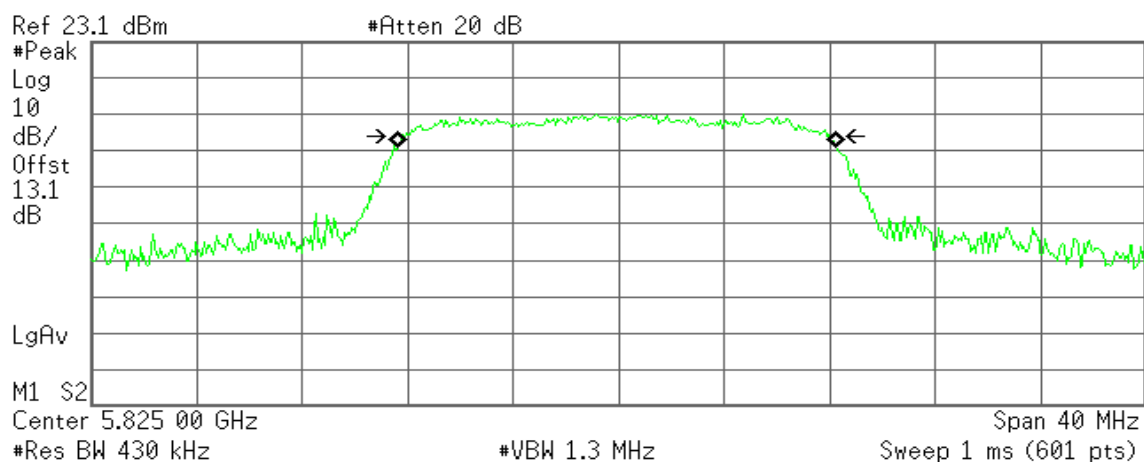

Occupied Bandwidth
16.6802 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -50.198 kHz
x dB Bandwidth 16.193 MHz

IEEE 802.11n HT 20 MHz mode

99% Bandwidth (CH Low)

Agilent

R T

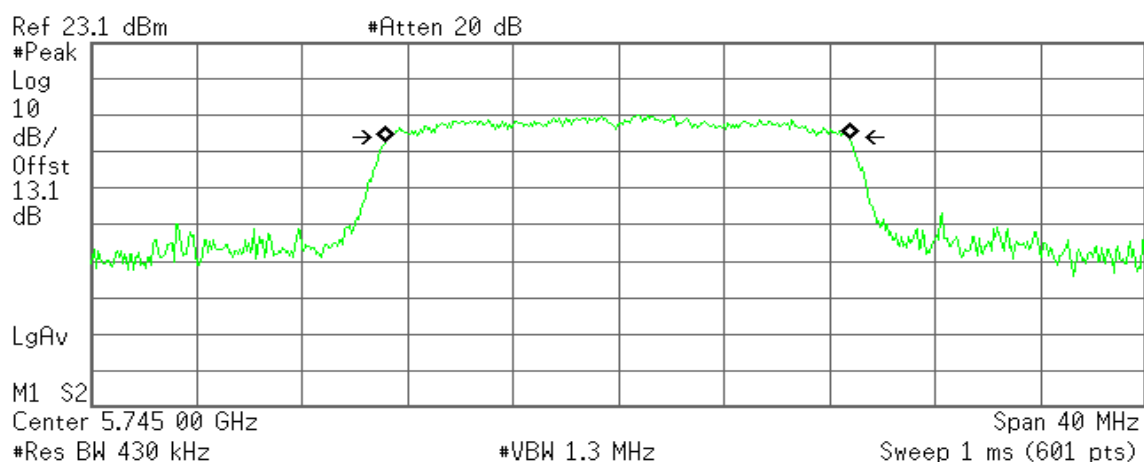

Occupied Bandwidth
17.6287 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -36.083 kHz
x dB Bandwidth 17.454 MHz



99% Bandwidth (CH Mid)

Agilent

R T

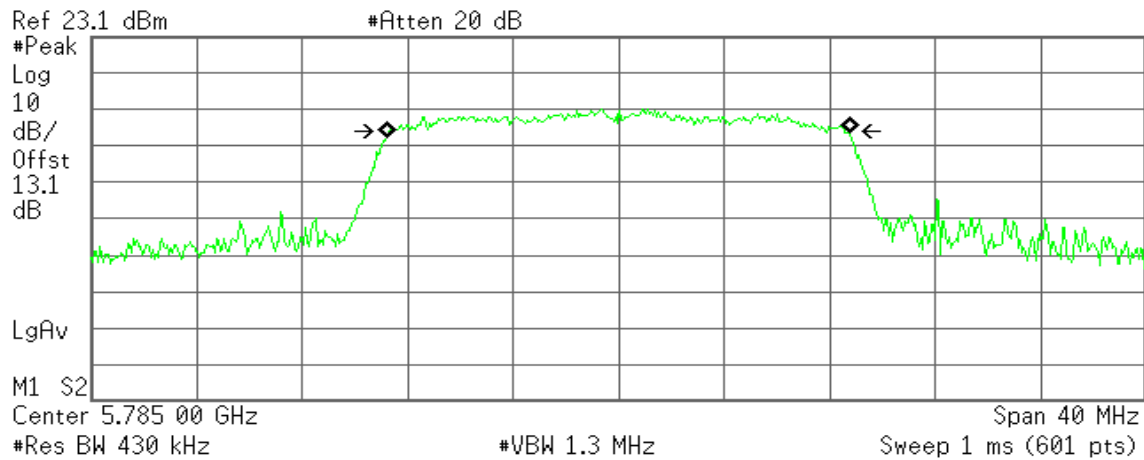

Occupied Bandwidth
17.6242 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -20.992 kHz
x dB Bandwidth 17.275 MHz

99% Bandwidth (CH High)

Agilent

R T

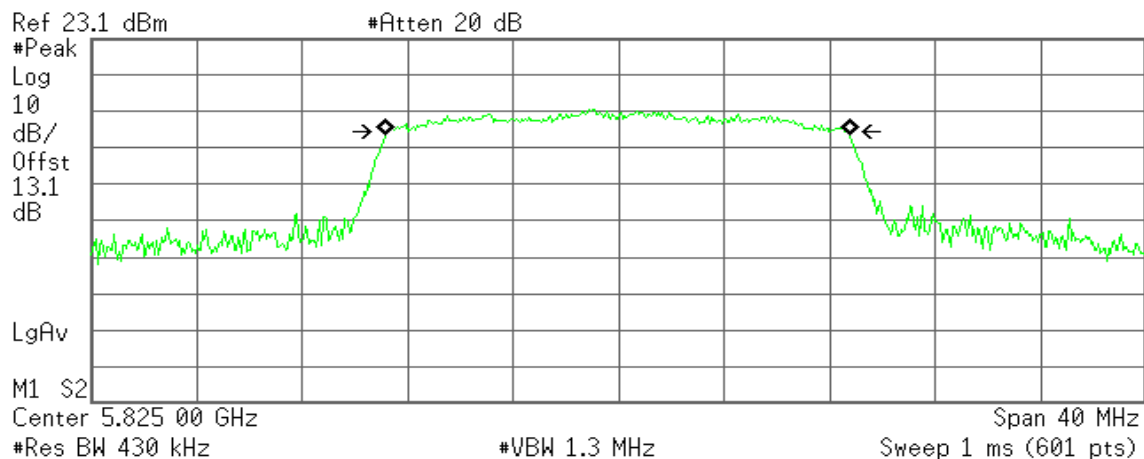

Occupied Bandwidth
17.6173 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -33.147 kHz
x dB Bandwidth 17.304 MHz




IEEE 802.11n HT 40 MHz mode

99% Bandwidth (CH Low)

Agilent

R T

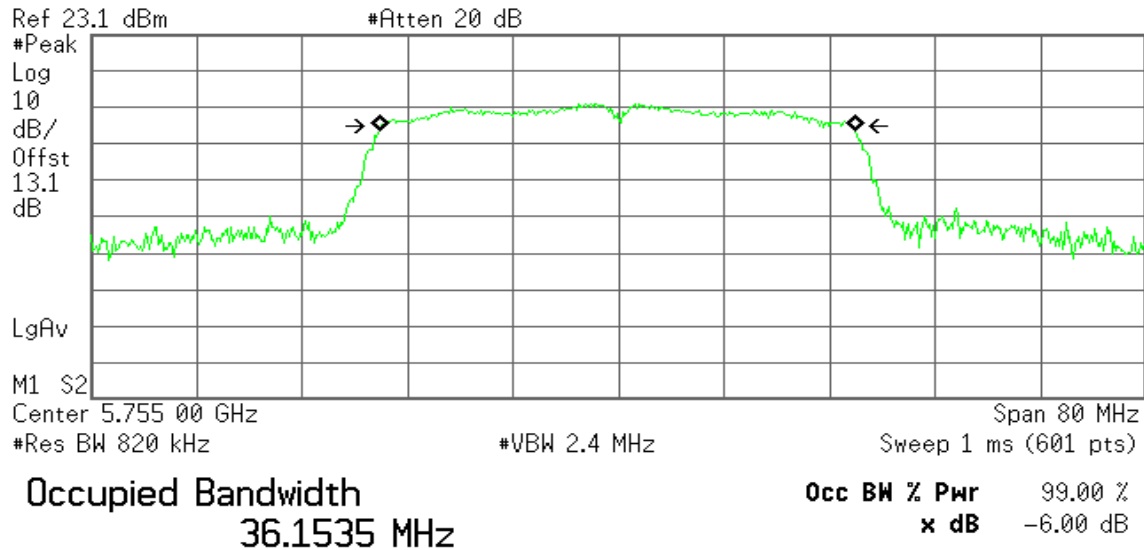


Transmit Freq Error -106.911 kHz
x dB Bandwidth 35.762 MHz

99% Bandwidth (CH High)

Agilent

R T

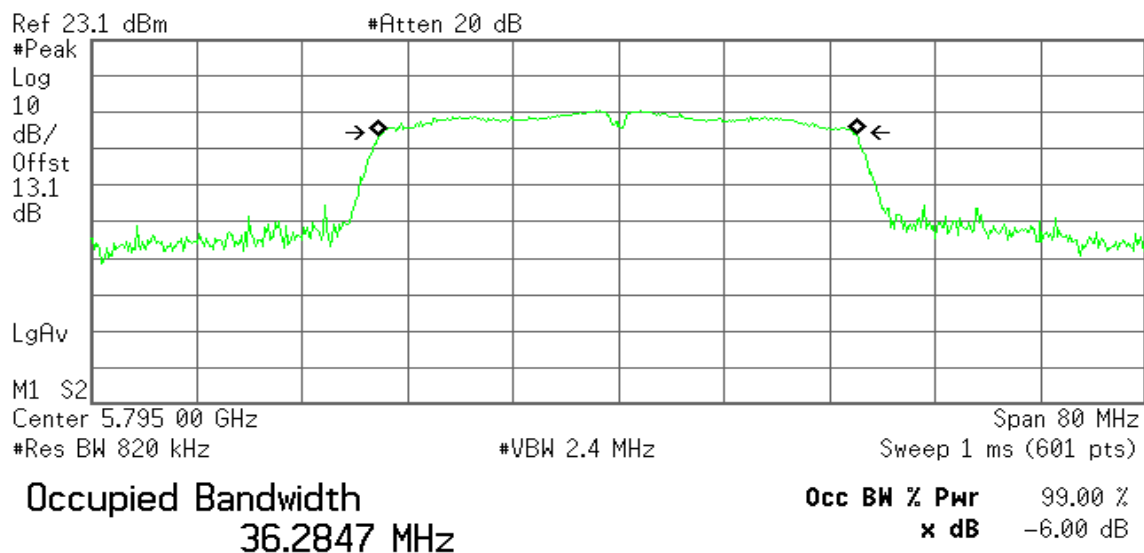

Transmit Freq Error -58.160 kHz
x dB Bandwidth 35.751 MHz




7.2 6DB BANDWIDTH

LIMIT

Systems using digital modulation techniques may operate in the 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = VBW = 100kHz, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	16.6406	>500	PASS
Mid	5785	16.5829		PASS
High	5825	16.6802		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	17.6287	>500	PASS
Mid	5785	17.6242		PASS
High	5825	17.6173		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	5755	36.1535	>500	PASS
High	5795	36.2847		PASS




Test Plot

IEEE 802.11a mode

6dB Bandwidth (CH Low)

Agilent

R T

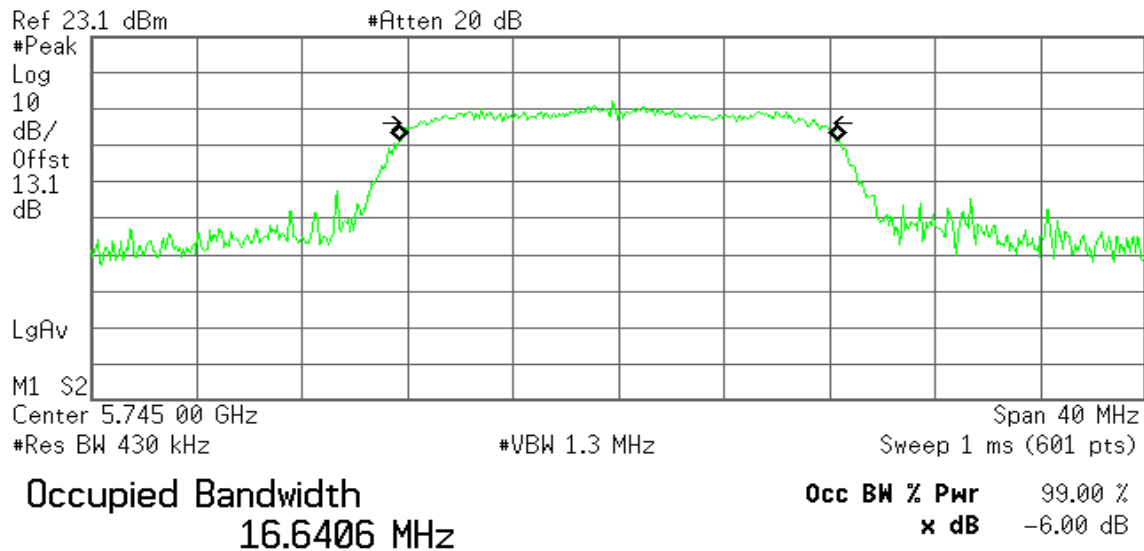


Transmit Freq Error -3.275 kHz
x dB Bandwidth 14.980 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

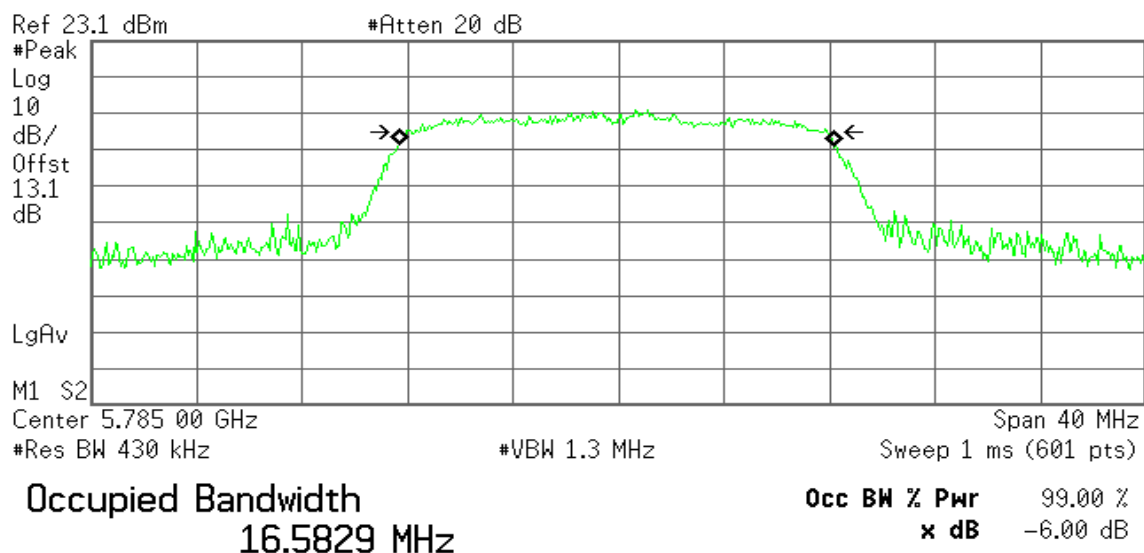


Transmit Freq Error -69.705 kHz
x dB Bandwidth 15.890 MHz

**6dB Bandwidth (CH High)**

* Agilent

R T

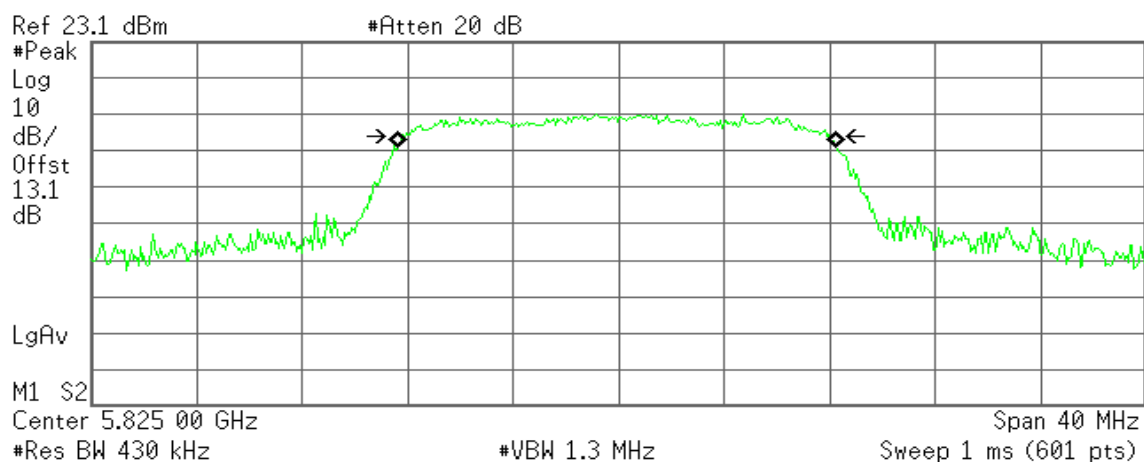

Occupied Bandwidth
16.6802 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -50.198 kHz
x dB Bandwidth 16.193 MHz

IEEE 802.11n HT 20 MHz mode**6dB Bandwidth (CH Low)**

* Agilent

R T

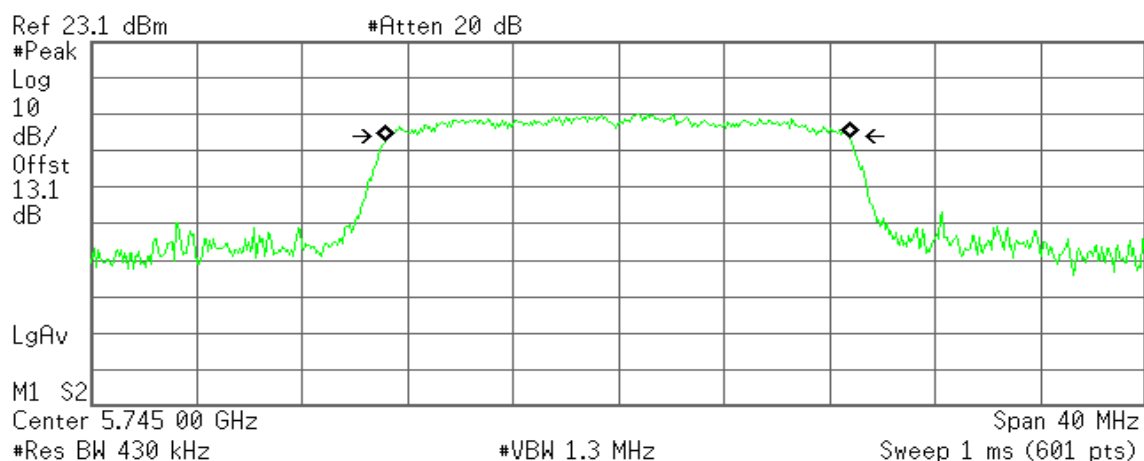

Occupied Bandwidth
17.6287 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -36.083 kHz
x dB Bandwidth 17.454 MHz



6dB Bandwidth (CH Mid)

Agilent

R T

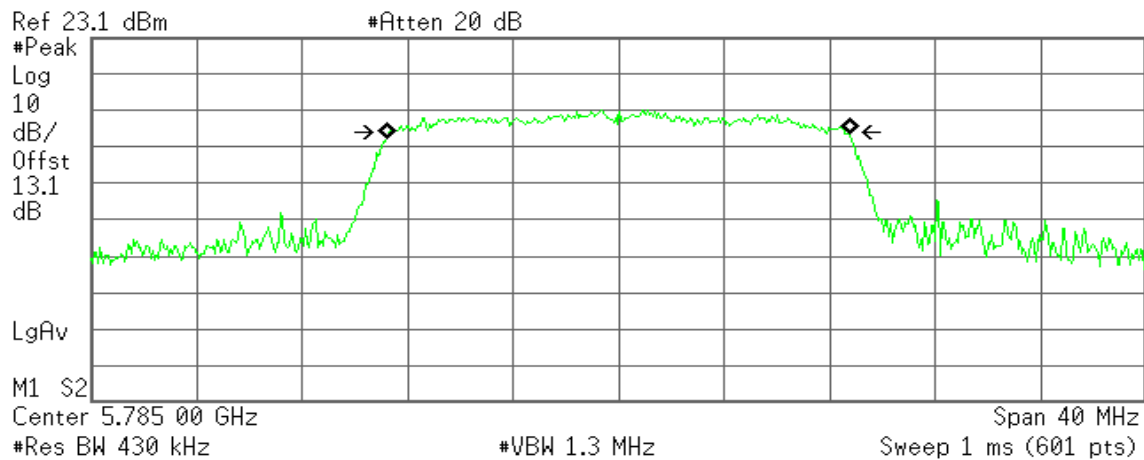

Occupied Bandwidth
17.6242 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -20.992 kHz
x dB Bandwidth 17.275 MHz

6dB Bandwidth (CH High)

Agilent

R T

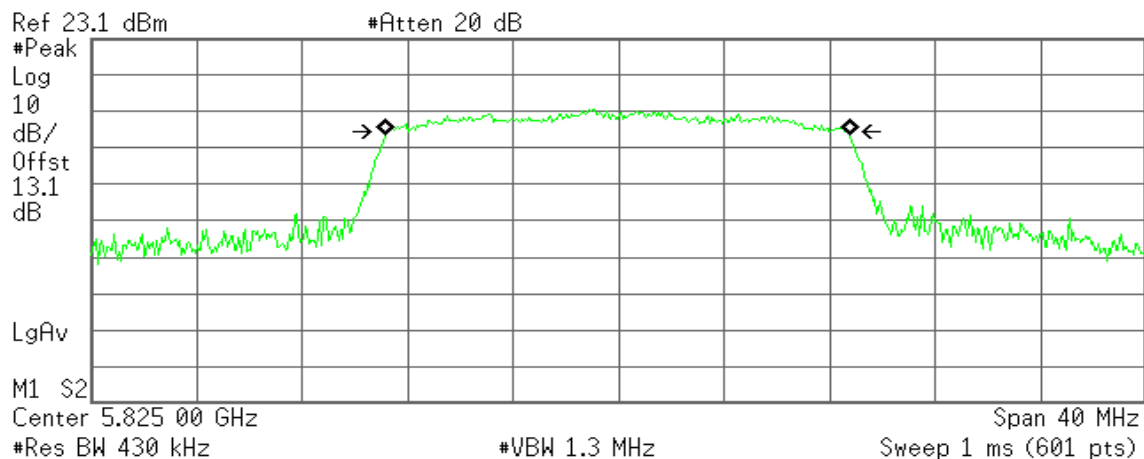

Occupied Bandwidth
17.6173 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -33.147 kHz
x dB Bandwidth 17.304 MHz




IEEE 802.11n HT 40 MHz mode

6dB Bandwidth (CH Low)

Agilent

R T

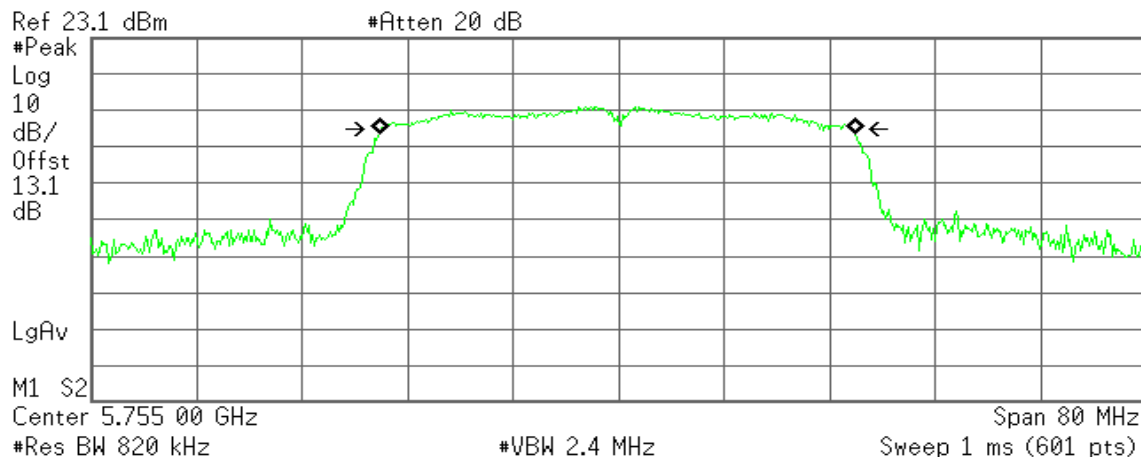

Occupied Bandwidth
36.1535 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -106.911 kHz
x dB Bandwidth 35.762 MHz

6dB Bandwidth (CH High)

Agilent

R T

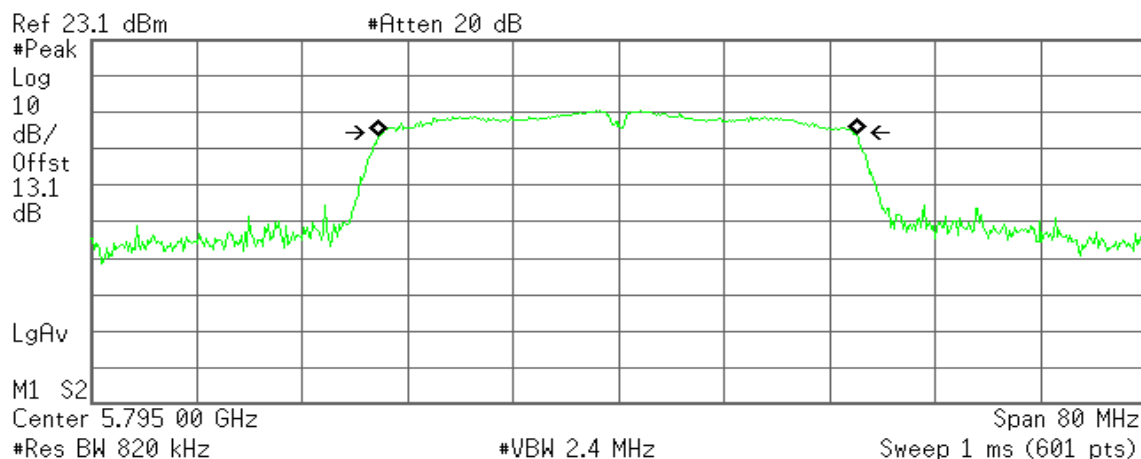

Occupied Bandwidth
36.2847 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -58.160 kHz
x dB Bandwidth 35.751 MHz




7.3 PEAK POWER

LIMIT

For the band 5.725–5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

**Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5745	*20.38	0.1091	1.00	PASS
Mid	5785	20.01	0.1002		PASS
High	5825	19.36	0.0863		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5745	*19.96	0.0991	1.00	PASS
Mid	5785	19.66	0.0925		PASS
High	5825	18.95	0.0785		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5755	*20.17	0.1040	1.00	PASS
High	5795	19.75	0.0944		PASS




7.4 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5745	10.96	0.0125
Mid	5785	10.64	0.0116
High	5825	10.07	0.0102

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5745	9.90	0.0098
Mid	5785	9.74	0.0094
High	5825	9.15	0.0082

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	5755	9.70	0.0093
High	5795	9.28	0.0085




7.6 PEAK POWER SPECTRAL DENSITY

LIMIT

The peak power spectral density shall not exceed 30 dBm in any 500kHz band.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11a mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-2.84	8.00	PASS
Mid	5785	-3.31		PASS
High	5825	-3.24		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-3.12	8.00	PASS
Mid	5785	-3.62		PASS
High	5825	-3.55		PASS

Test mode: IEEE 802.11n HT 40 MHz mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5755	-6.19	8.00	PASS
High	5795	-6.60		PASS




Test Plot

IEEE 802.11a mode

PPSD (CH Low)

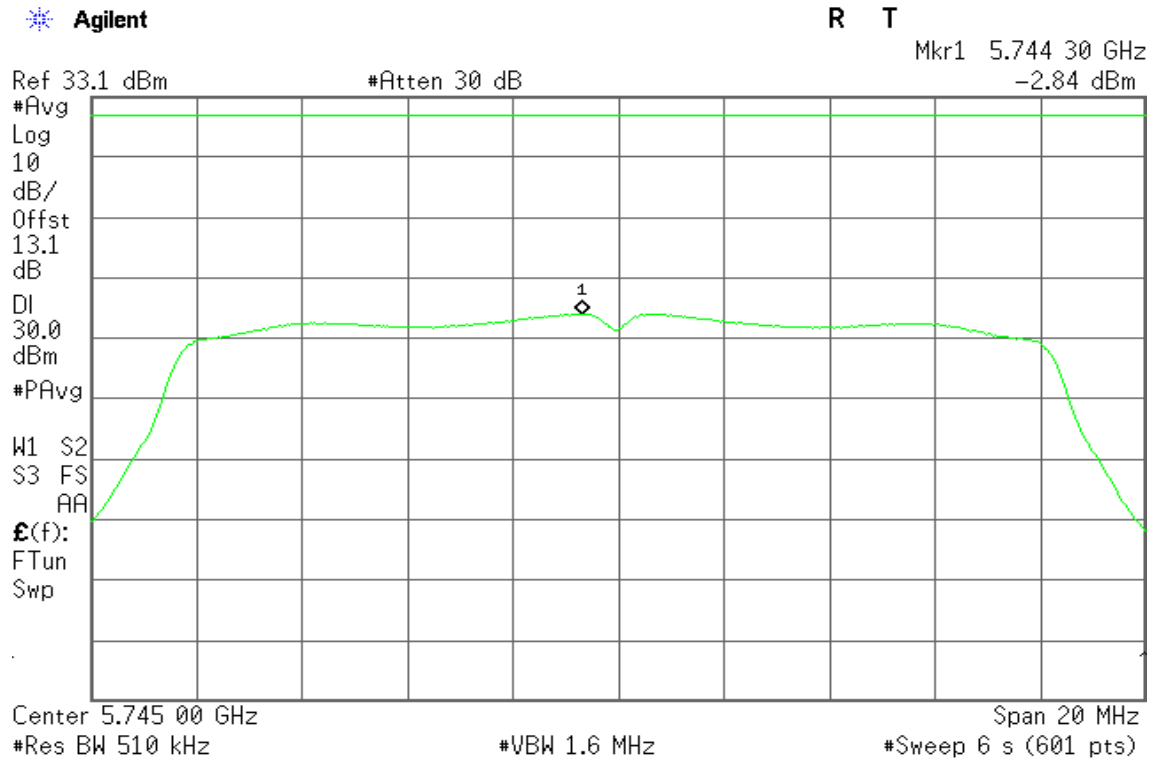


PPSD (CH Mid)

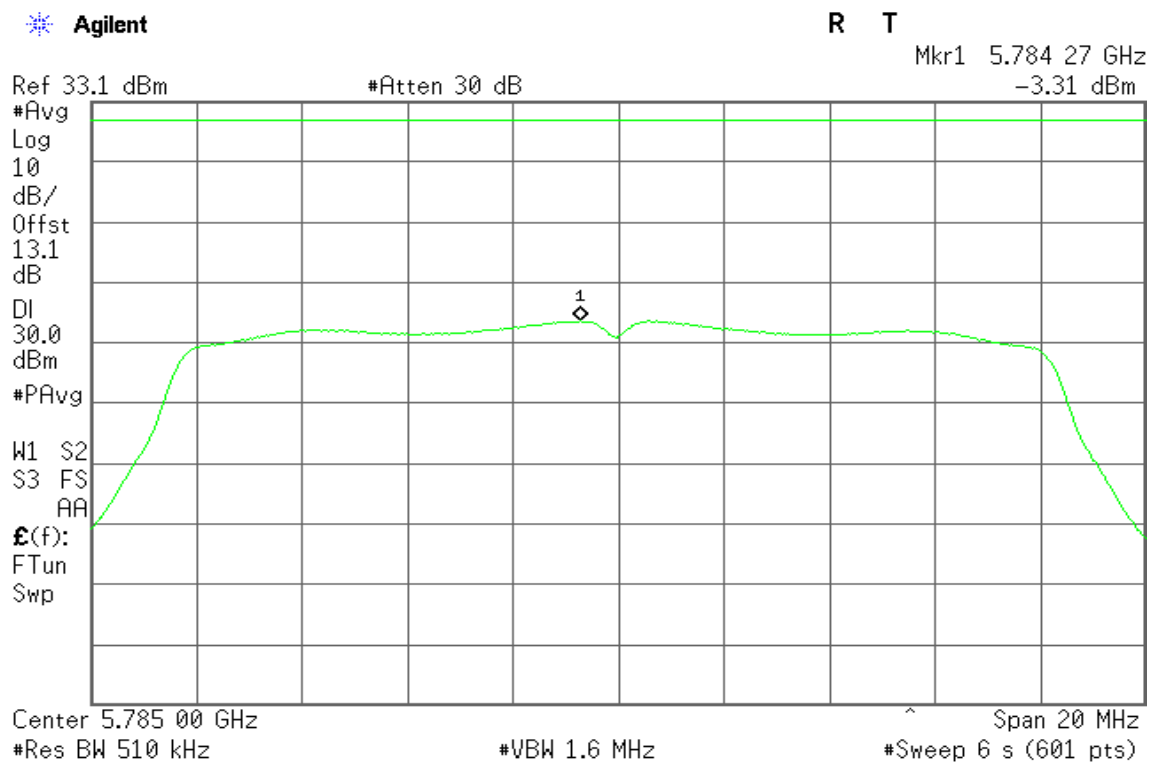




PPSD (CH High)

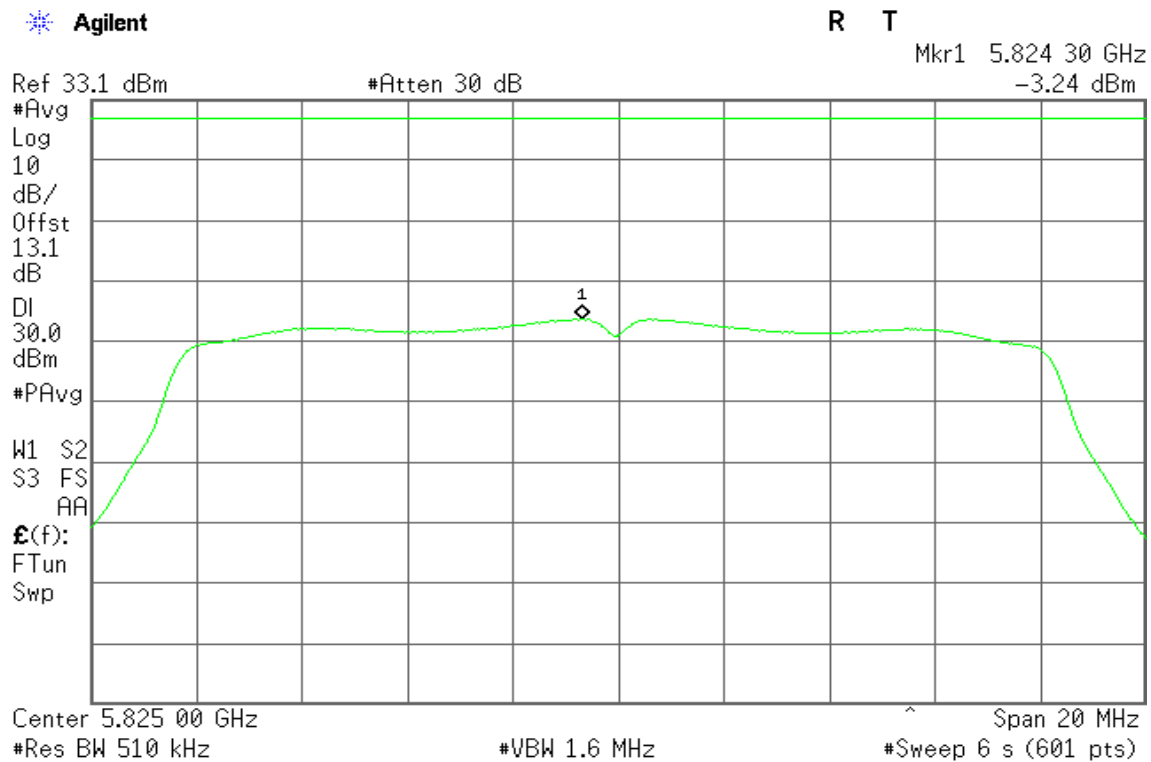

IEEE 802.11n HT 20 MHz mode

PPSD (CH Low)

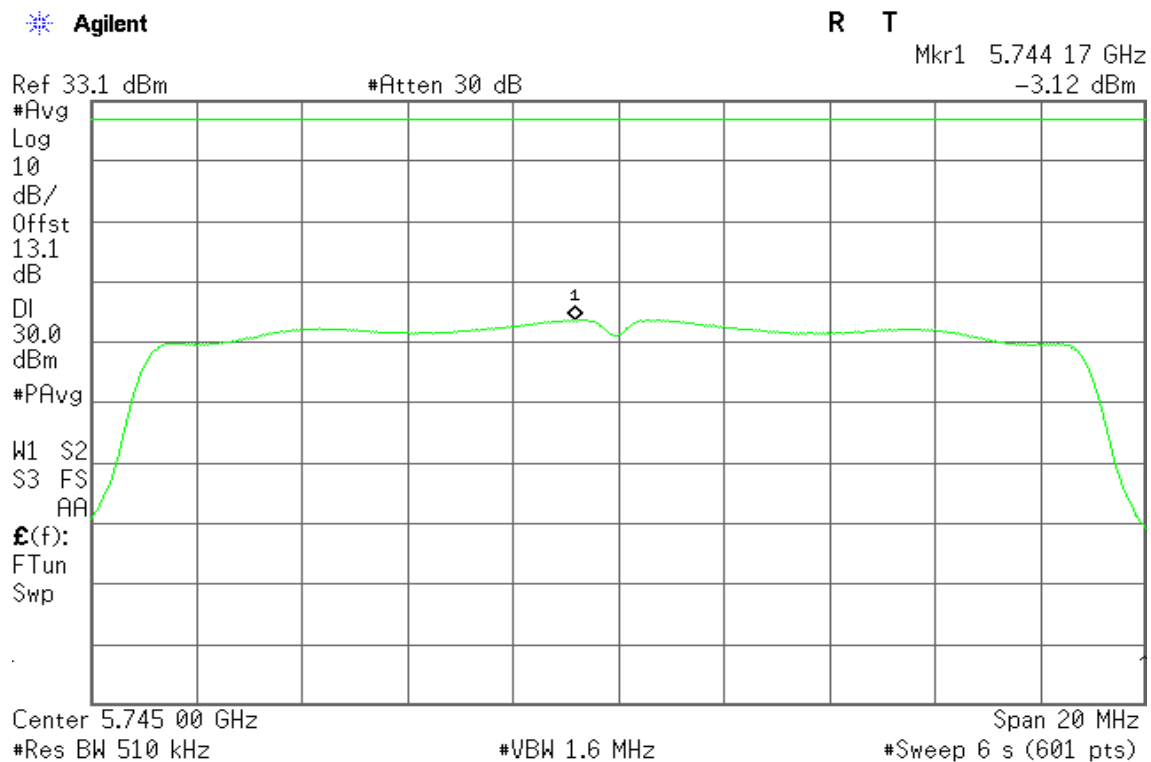



PPSD (CH Mid)

Agilent

R T

Mkr1 5.784 30 GHz
-3.62 dBm

Ref 33.1 dBm

#Atten 30 dB

#Avg

Log

10

dB/

Offst

13.1

dB

DI

30.0

dBm

#PAvg

W1 S2

S3 FS

AA

£(f):

FTun

Swp



Center 5.785 00 GHz

#Res BW 510 kHz

#VBW 1.6 MHz

Span 20 MHz

#Sweep 6 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 5.825 57 GHz
-3.55 dBm

Ref 33.1 dBm

#Atten 30 dB

#Avg

Log

10

dB/

Offst

13.1

dB

DI

30.0

dBm

#PAvg

W1 S2


S3 FS

AA

£(f):

FTun

Swp

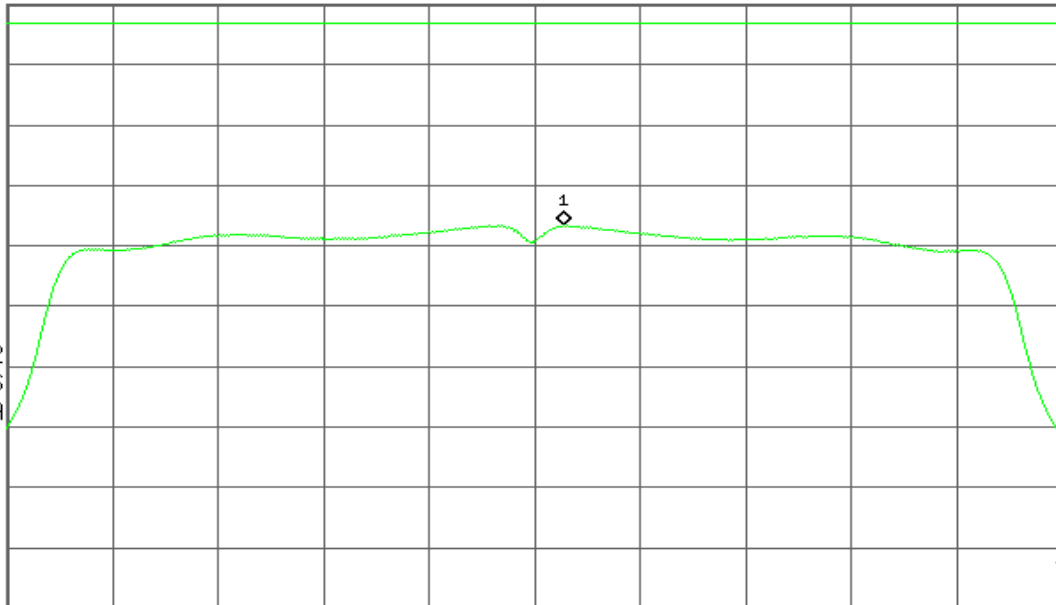

Center 5.825 00 GHz

#Res BW 510 kHz

#VBW 1.6 MHz


Span 20 MHz

#Sweep 6 s (601 pts)




IEEE 802.11n HT 40 MHz mode

PPSD (CH Low)

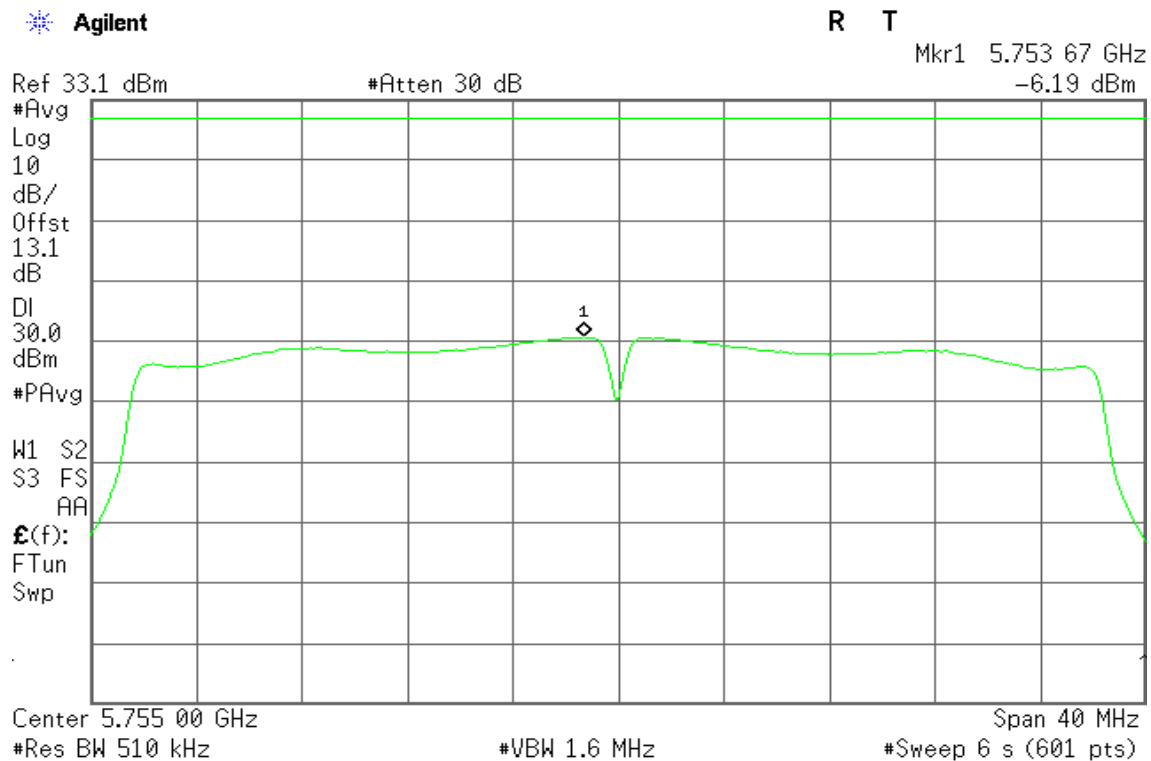

PPSD (CH High)

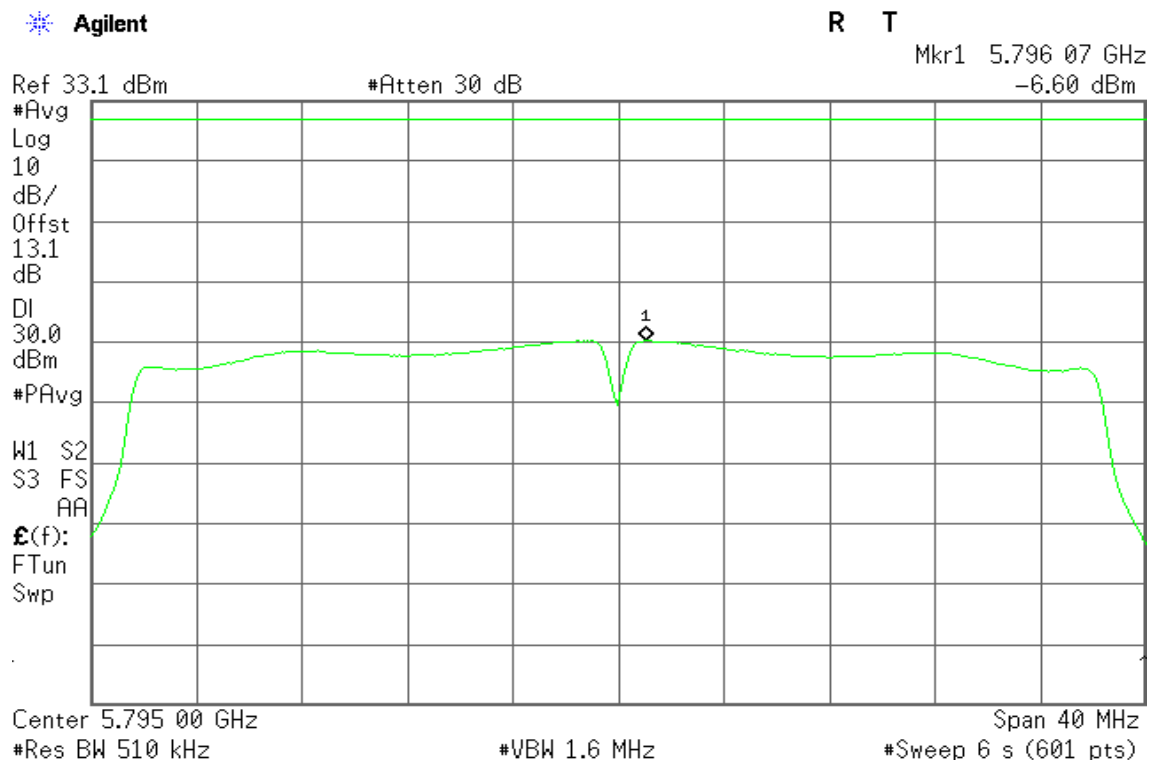



7.7 SPURIOUS EMISSIONS

7.7.1 Radiated Emissions

LIMIT

All spurious emissions shall comply with the limits of §15.209(a) and RSS-Gen Table 2 & Table 5.

RSS-Gen Table 2 & Table 5: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz ^(Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: *Measurements for compliance with limits in the above table may be performed at distances other than 3 metres, in accordance with Section 7.2.7.

Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).

RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)


Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	3000
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.




Test Configuration

9kHz ~ 30MHz

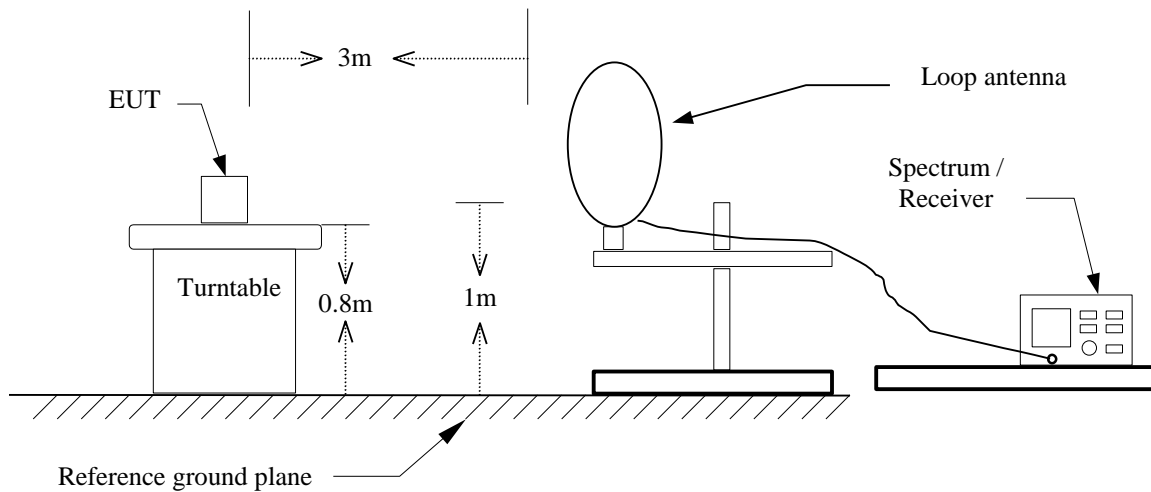


30MHz ~ 1GHz

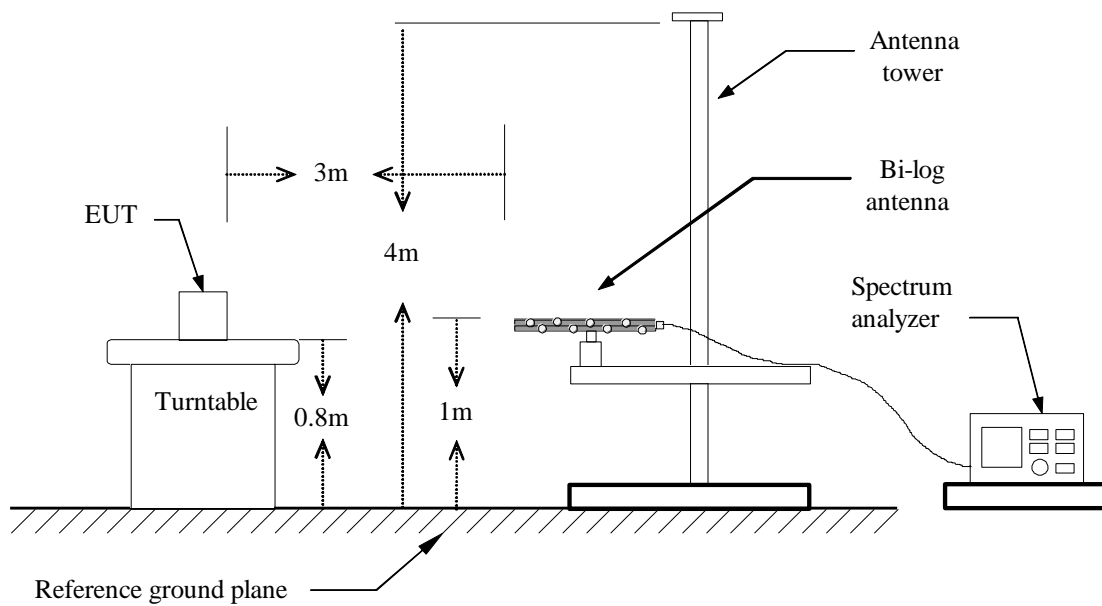



Above 1 GHz

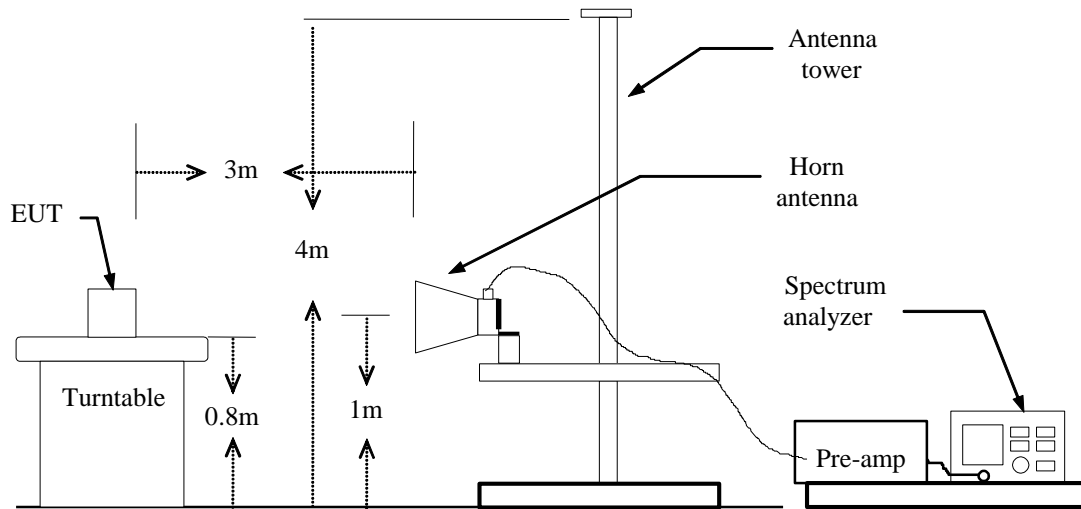



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal link**Test Date:** August 30, 2014**Temperature:** 27°C**Tested by:** Dennis Lee**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
50.3700	51.75	-22.94	28.81	40.00	-11.19	Peak	V
184.2300	47.91	-18.97	28.94	43.50	-14.56	Peak	V
280.2600	48.30	-16.76	31.54	46.00	-14.46	Peak	V
458.7400	39.98	-12.51	27.47	46.00	-18.53	Peak	V
666.3200	44.19	-9.14	35.05	46.00	-10.95	Peak	V
749.7400	36.70	-7.88	28.82	46.00	-17.18	Peak	V
51.3400	43.62	-23.04	20.58	40.00	-19.42	Peak	H
184.2300	40.74	-18.97	21.77	43.50	-21.73	Peak	H
280.2600	53.26	-16.76	36.50	46.00	-9.50	Peak	H
320.0300	49.41	-15.92	33.49	46.00	-12.51	Peak	H
666.3200	44.00	-9.14	34.86	46.00	-11.14	QP	H
749.7400	41.13	-7.88	33.25	46.00	-12.75	Peak	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Quasi-peak limit (dBuV/m)}$.

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11a mode / CH Low**Test Date:** September 2, 2014**Temperature:** 27°C**Tested by:** David Shu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3100.000	51.42	-1.87	49.55	74.00	-24.45	peak	V
N/A							
3387.000	51.98	-1.18	50.80	74.00	-23.20	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

**Operation Mode:** TX / IEEE 802.11a mode / CH Mid**Test Date:** September 2, 2014**Temperature:** 27°C**Tested by:** David Shu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3268.000	52.21	-1.47	50.74	74.00	-23.26	peak	V
N/A							
3807.000	49.32	0.40	49.72	74.00	-24.28	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11a mode / CH High**Test Date:** September 2, 2014**Temperature:** 27°C**Tested by:** David Shu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3303.000	53.00	-1.38	51.62	74.00	-22.38	peak	V
N/A							
3324.000	52.13	-1.33	50.80	74.00	-23.20	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** September 2, 2014**Temperature:** 27°C**Tested by:** David Shu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3380.000	51.26	-1.20	50.06	74.00	-23.94	peak	V
N/A							
3198.000	51.34	-1.63	49.71	74.00	-24.29	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** September 2, 2014**Temperature:** 27°C**Tested by:** David Shu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3142.000	51.73	-1.77	49.96	74.00	-24.04	peak	V
N/A							
3065.000	50.97	-1.95	49.02	74.00	-24.98	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH High **Test Date:** September 2, 2014**Temperature:** 27°C**Tested by:** David Shu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3296.000	51.40	-1.40	50.00	74.00	-24.00	peak	V
N/A							
3303.000	51.36	-1.38	49.98	74.00	-24.02	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Low

Test Date: September 2, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3268.000	51.92	-1.47	50.45	74.00	-23.55	peak	V
N/A							
3086.000	52.43	-1.90	50.53	74.00	-23.47	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH High

Test Date: September 2, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
3240.000	52.73	-1.53	51.20	74.00	-22.80	peak	V
N/A							
3163.000	52.08	-1.72	50.36	74.00	-23.64	peak	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a) & RSS-Gen §7.2.4, except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

The conducted emissions shall be measured with a 50 ohm/50 microhenry line impedance stabilization network.

RSS-Gen Table 2 – AC Power Lines Conducted Emission Limits

Frequency Range (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

**Decreases with the logarithm of the frequency*

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** September 1, 2014
Temperature: 26°C **Tested by:** Sehni Hu
Humidity: 60% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1620	44.81	31.21	0.19	45.00	31.40	65.36	55.36	-20.36	-23.96	L1
0.1820	41.35	27.44	0.19	41.54	27.63	64.39	54.39	-22.85	-26.76	L1
0.2060	37.97	24.27	0.19	38.16	24.46	63.37	53.37	-25.21	-28.91	L1
0.2380	35.40	23.31	0.19	35.59	23.50	62.17	52.17	-26.58	-28.67	L1
0.2900	33.62	23.60	0.19	33.81	23.79	60.52	50.52	-26.71	-26.73	L1
0.5180	39.89	32.36	0.20	40.09	32.56	56.00	46.00	-15.91	-13.44	L1
0.1500	43.98	30.53	0.10	44.08	30.63	66.00	56.00	-21.92	-25.37	L2
0.1700	42.62	29.45	0.10	42.72	29.55	64.96	54.96	-22.24	-25.41	L2
0.1986	37.76	23.97	0.10	37.86	24.07	63.67	53.67	-25.81	-29.60	L2
0.2260	34.94	24.27	0.10	35.04	24.37	62.60	52.60	-27.56	-28.23	L2
0.2500	32.74	20.03	0.10	32.84	20.13	61.76	51.76	-28.92	-31.63	L2
0.5260	43.58	37.21	0.10	43.68	37.31	56.00	46.00	-12.32	-8.69	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

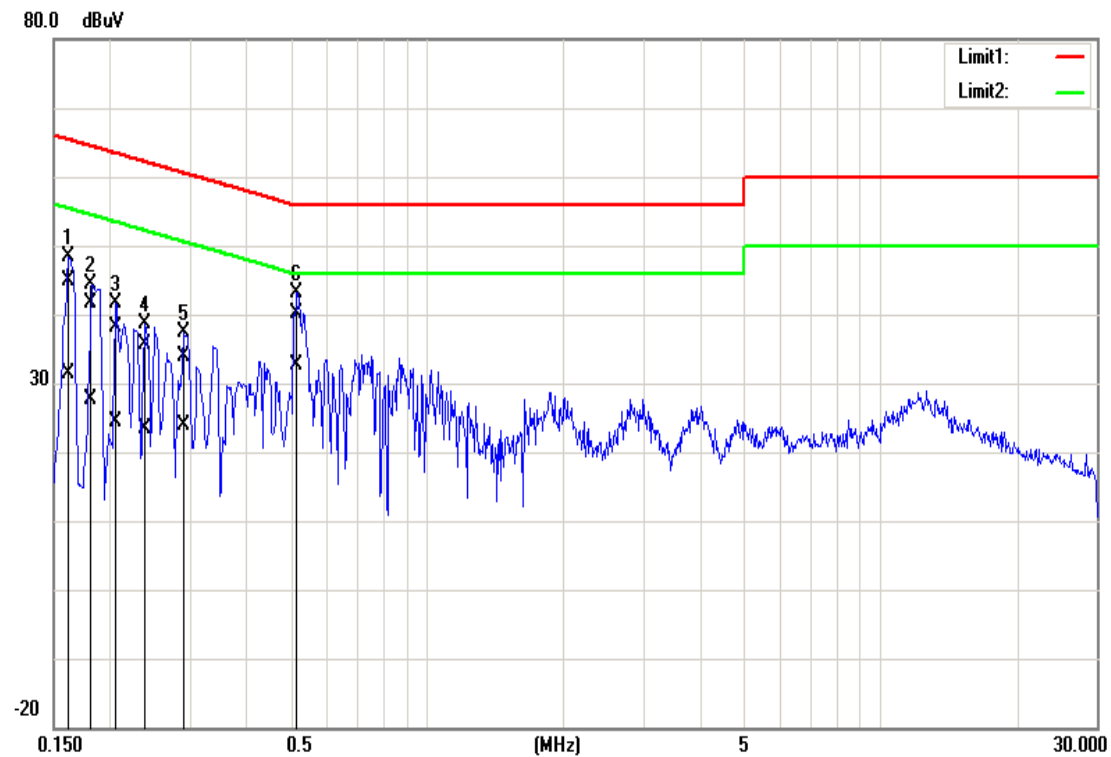


Conducted emissions (Line 2)

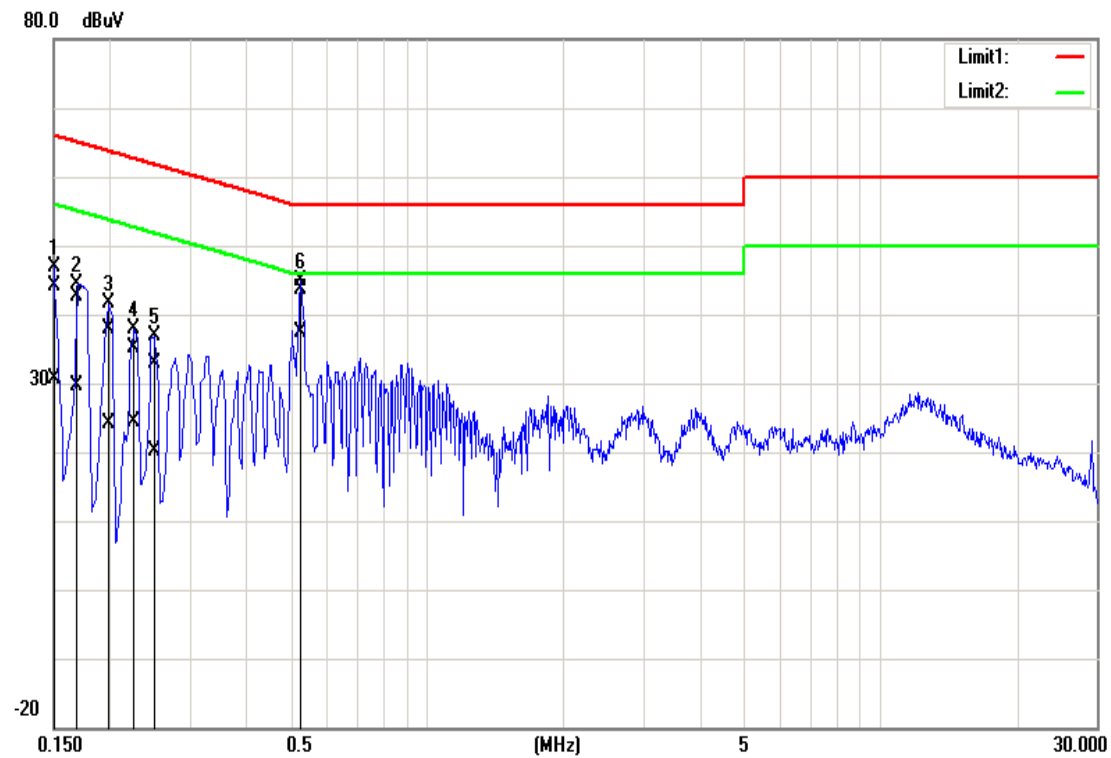



APPENDIX I PHOTOGRAPHS OF TEST SETUP

Conducted Emission Setup Photo

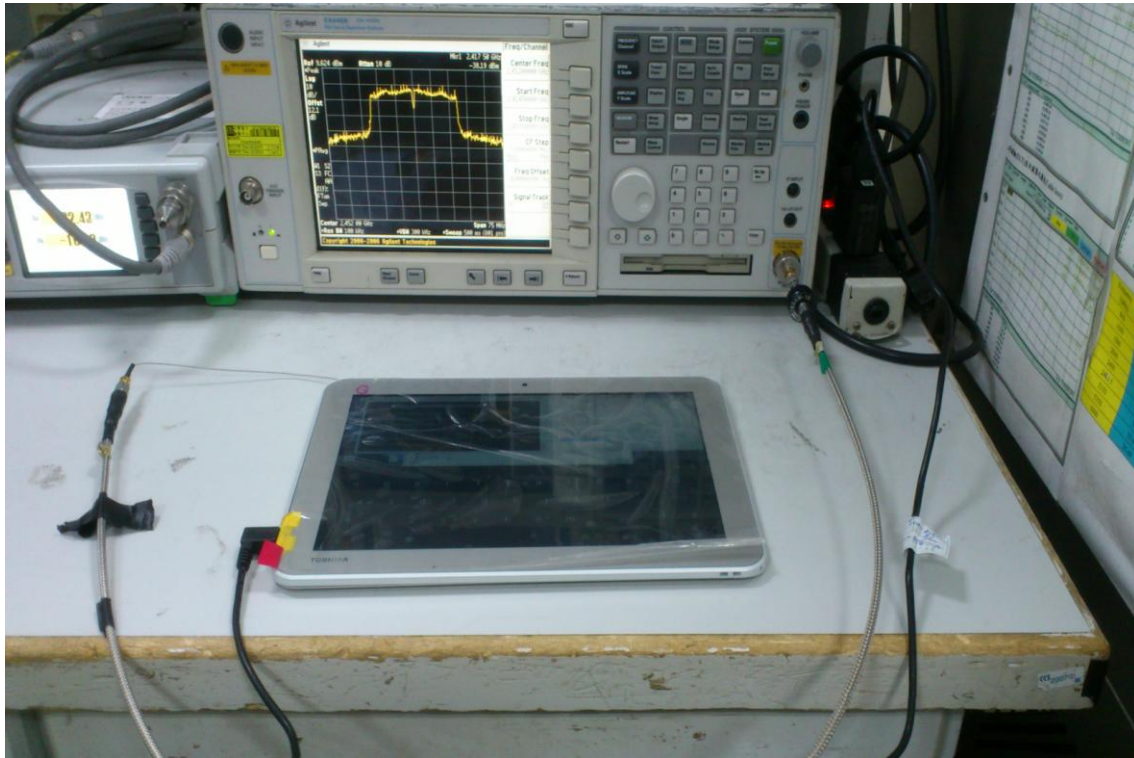



Radiated Emission Setup Photos





Powerline Conducted Emissions Setup Photos

