



FCC Part 15, Subpart C, Section 15.247

Test Report

On

IN'O LoRa State Report and Output Control Sensor

Customer Name: nke Watteco

Customer P.O.: C146509

Date of Report: April 5, 2016

Test Report No.: R-6046N-4

Test Start Date: February 29, 2016

Test Finish Date: March 4, 2016

Test Technician: M. Seamans

Approved By: T. Hannemann

Report Prepared By: J. Ramsey

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

Technical Information

Report Number:	R-6046N-4
Customer:	nke Watteco
Address:	6 Rue Gutenberg Z.I. Kerandre Hennebont, France 56700
Test Sample:	IN'O LoRa State Report and Output Control Sensor
Brand Name:	nke Watteco
Part Number:	50-70-024-000
Model Number:	IN'O
Serial Number:	2100547330002
Manufactured By:	nke Watteco
Power Requirements:	120 VAC, 60 Hz via AC Adapter AC Adapter Model: WHAF22073F001
FHSS Frequency Band of Operation:	902.3 MHz to 914.9 MHz
DTS Frequency Band of Operation:	903.0 MHz to 914.2 MHz
Antenna Type:	Rubberized Monopole Antenna, Gain - 2.15dBi
Antenna Connector Type:	SMA
Installation:	Professionally Installed
Equipment Use:	Industrial Process Control, Automation, Powerline Defect Detection
FCC ID:	2AGTV50-70-024

Test Specification:

FCC Rules and Regulations, Telecommunications, Part 15 Radio Frequency Devices, Subpart C, Intentional Radiators

Test Procedure:

ANSI C63.4:2009, Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

558074 D01, FCC Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247, v03 r04, January 7, 2016

DA 00-705, FCC Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems (FHSS) Operating Under 15.247, March 30, 2000



Retlif Testing Laboratories

Report No. R-6046N-4

EUT Description:

The IN'O Sensor is designed to operate inside an industrial environment. The sensor has 10 On/Off inputs and four (4) opto-isolated outputs that can be used as switches. These inputs and outputs allow the IN'O to have many different applications in Industrial process control, Automation, Power line defect detection, Process control, etc. The data that would be typically transmitted are the states of the On/Off inputs or the states of the opto-isolated outputs. These outputs can be controlled remotely through a LoRaWAN network.

FHSS:

In FHSS operation data is transmitted over a 125 KHz channel selected randomly from 64 possible channels in the frequency range of 902.3 to 914.9 MHz. The duration of the transmission is limited to a maximum of 400 milliseconds.

DTS:

In DTS operation data is transmitted over a 500 kHz channel selected randomly from 8 possible channels in the 903.0 to 914.2 MHz. The duration of the transmission is limited to a maximum of 400 milliseconds.

All equipment that was utilized to achieve the EUT operating state specified is listed below:

Table 1 - Support Equipment

Description	Manufacturer	Model Number	Serial Number
Laptop PC	ASUS	Eee PC	8BOAAQ486781
MSP-GANG Programmer	Texas Instruments Elprotronic	MSP-GANG	1110-1497
USB Dongle	nKe Watteco	Test FCC	70:83:D5:E7:5F:00:00:65



Retlif Testing Laboratories

Report No. R-6046N-4

Tests Performed

The test methods performed on the EUT are shown below. Testing was performed in accordance with the applicable FCC requirements for each of the two transmission modes (DTS & FHSS).

Table 2 - Radiated Emission Limits

FCC Part 15, Subpart C	Test Method
DTS Test Methods Performed	
15.247(a)(2)	6 dB Bandwidth
15.247(b)(3)	Power Output
15.247(d)	Antenna Terminal Out of Band/ Band Edge Conducted Emissions (25 MHz – 10 GHz)
15.247(d)	Out of Band/Band Edge Radiated Emissions (30 MHz to 10 GHz)
15.247(e)	Power Density
15.207(a)	Conducted Emissions, Power Leads, 150 kHz to 30 MHz
FHSS Test Methods Performed	
15.247(a)(1)	20 dB Bandwidth
15.247(a)(1) (iii)	Number of Hopping Channels and Time of Occupancy
15.247(a)(1)	Channel Separation
15.247(b)(3)	Power Output
15.247(d)	Antenna Terminal Out of Band/ Band Edge Conducted Emissions (25 MHz – 10 GHz)
15.247(d)	Out of Band/Band Edge Radiated Emissions (30 MHz to 10 GHz)
15.207(a)	Conducted Emissions, Power Leads, 150 kHz to 30 MHz



Retlif Testing Laboratories

Report No. R-6046N-4

General Test Requirements

The measurement procedures of ANSI C63.4:2009 were utilized as specified in FCC Part 15, Subpart C, Section 15.31(a)(3), FCC Guidance for Performing Compliance Measurements on Digital Transmission Systems, v 03 r04, January 7, 2016, DA 00-705 and FCC Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems (FHSS) Operating Under 15.247, March 30, 2000.

1. All radiated emissions measurements were performed on an Open Area Test Site (OATS), listed with the FCC, in accordance with FCC Section 15.31(d).
2. All measurements were performed at the specified 3 meter test distance as required by FCC Section 15.31(f).
3. The EUT was rotated throughout 360 degrees for all radiated emissions measurements as specified in FCC Section 15.31(f)(5).
4. All readily accessible EUT controls were adjusted in such a manner as to maximize the level of emissions in accordance with FCC Section 15.31(g).
5. Appropriate accessories were attached to all EUT ports during the performance of radiated emissions measurements as required by FCC Section 15.31(i).
6. The EUT operated over the frequency range of 902.3 MHz to 914.9 MHz for FHSS operation and 903.0 to 914.2 MHz for DTS operation. Testing was performed with the device operating at 3 frequencies, 1 at the top, 1 in the middle and 1 at the bottom of the range of operation in accordance with FCC Section 15.31(m).
7. The frequency spectrum was investigated from the lowest frequency generated in the device up to the 10th harmonic of the highest fundamental frequency in accordance with FCC Section 15.33(a)(1).
8. The EUT utilizes an SMA antenna connector for connection to a rubberized monopole antenna. The EUT will be professionally installed and is therefore in compliance with 15.203.



Retlif Testing Laboratories


Report No. R-6046N-4

Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



Scott Wentworth
Branch Manager
NVLAP Approved Signatory



Todd Hannemann
EMC Test Engineer
iNARTE Certified Technician ATL-0255-T

Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



Retlif Testing Laboratories

Report No. R-6046N-4

Revision History

Revisions to this document are listed below; the latest revised document supersedes all previous issues of this document.

Revision	Date	Pages Affected
-	April 5, 2016	Original Release



Retlif Testing Laboratories

Report No. R-6046N-4

Requirements and Test Results

FCC Section 15.247 (a)(2) - DTS Bandwidth

For systems using digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands the minimum 6 dB bandwidth shall be at least 500 kHz.

- **Results:** The minimum 6dB bandwidth measured was 865.73 kHz and the device was found to meet the requirement of 15.247 (a)(2).

FCC Section 15.247 (b)(3) - Power Output

For frequency hopping systems operating in the 902-928 MHz; 1 Watt for systems employing at least 50 hopping frequencies.

- **Results:** The maximum measured peak conducted output power was 17.38 mW. The maximum antenna gain of the monopole antenna is 2.15 dBi. The device was found to meet the power output requirements of 15.247 (b)(3) including de facto EIRP.

FCC Section 15.247 (b)(3) - Power Output

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g.: alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

- **Results:** The maximum measured peak conducted output power was 17.30 mW. The maximum antenna gain of the monopole antenna is 2.15 dBi. The device was found to meet the power output requirements of 15.247 (b)(3) including de facto EIRP.



Retlif Testing Laboratories

Report No. R-6046N-4

Requirements and Test Results (con't)

FCC Section 15.247(d) – Unwanted Emissions

Antenna Terminal Out of Band/Band Edge Conducted Emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Paragraph (b)(3) of Section 15.247, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

- **Results:** All measured out of band/band edge conducted emissions were below the specified limits and the device was found to meet the requirements of 15.247 (d).

FCC Section 15.247(d) – Unwanted Emissions

Radiated Spurious Emissions/Restricted Bands/Band Edge

Emissions which fall into restricted bands, as defined in 15.205(a) must comply with the radiated emissions limits specified in 15.209(a) and shown below in Table 3. Emissions emanating from the EUT cabinet and cables must also comply with the radiated emissions limits. Radiated emissions measurements were also performed at the band edges to ensure band edge compliance.

Table 3 - Radiated Emission Limits

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 to 88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960	500	3

- **Results:**
All spurious emissions were measured and found to be in compliance with the limits specified in 15.209(a). Band edge emissions were also found to be in compliance with the limits specified in 15.209(a).



Retlif Testing Laboratories

Report No. R-6046N-4

Requirements and Test Results (con't)

FCC Section 15.247(e) – Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

- **Results:** The measured power spectral density complied with the specified power density limit and the device was found to meet the requirements of 15.247(e).

Requirement:

FCC Section 15.247 (a)(1)

Channel Separation and 20 dB Bandwidth

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- **Results:**
The maximum 20 dB bandwidth of the hopping channel was 167.1 kHz. The carrier frequencies were separated by 202.47 kHz which exceeds the 20 dB bandwidth and complies with the requirements specified above.

FCC Section 15.247 (a)(1)

Number of Channels and Occupancy Time

Frequency hopping systems operating in the 902 – 928 MHz band: If the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

- **Results:**
The frequency hopping system uses 64 Channels. The average time of occupancy did not exceed 0.4 seconds in a 20 second period which meets the above requirements.



Retlif Testing Laboratories

Report No. R-6046N-4

Requirements and Test Results (con't)

FCC Section 15.247(i) – RF Exposure

Transmitters operating under 15.247 must be operated in a manner that ensures the public is not exposed to RF energy levels in excess of the commission's guidelines. Based on the transmitter power and maximum antenna gain the separation distance for acceptable MPE power density levels to meet both the Occupational/Controlled Exposure and the General Population/Uncontrolled Exposure requirements of 1.1310 was calculated. The calculation below uses the more stringent General Population MPE Limits.

$$S = \frac{PG}{4\pi D^2}$$

D = Minimum Separation Distance in cm

S = Max allowed Power Density in mW/cm²

Per 1.1310 For Frequency of 900 MHz = 0.6mW/cm²

DTS Transmission Mode:

Power = Max Power Input to Antenna = 17.30 mW

Gain = Max Power Gain of Antenna = 2.15dBi = 1.64 numeric

$$0.6\text{mW/cm}^2 = \frac{17.30 \times 1.64}{4 (3.14) \times D^2} = \frac{28.37}{12.56 \times D^2}$$

$$D^2 = \frac{28.37}{12.56 \times 0.6} = 3.76$$

D = sq. root 3.76 = 1.94 cm

The minimum separation distance will always be maintained in the installation.

FHSS Transmission Mode:

Power = Max Power Input to Antenna = 17.38 mW

Gain = Max Power Gain of Antenna = 2.15 dBi = 1.64 numeric

$$0.6\text{mW/cm}^2 = \frac{17.38 \times 1.64}{4 (3.14) \times D^2} = \frac{28.50}{12.56 \times D^2}$$



Retlif Testing Laboratories

Report No. R-6046N-4

Requirements and Test Results (con't)

FCC Section 15.247(i) – RF Exposure

$$D_{sq} = \frac{28.50}{12.56 \times 0.6} = 3.78$$

$$D = \text{sq. root } 3.78 = 1.94 \text{ cm}$$

The minimum separation distance will always be maintained in the installation.

Requirement:

FCC Section 15.207(a) - Conducted Limits

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits shown in Table 4, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of the paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Table 4 - Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
*Decreases due to logarithm of the frequency		

- **Results:**

The conducted emissions observed did not exceed the limits specified in Table 4.



Retlif Testing Laboratories

Report No. R-6046N-4

EQUIPMENT LISTS

FCC Section 15.247(a)(2) – DTS 6 dB Bandwidth

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	NARDA MICROWAVE	ATTENUATOR, COAXIAL	20 dB, DC - 18 GHz	757C-20DB	11/24/2015	11/30/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016

FCC Section 15.247(b)(3) – Power Output

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	NARDA MICROWAVE	ATTENUATOR, COAXIAL	20 dB, DC - 18 GHz	757C-20DB	11/24/2015	11/30/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016

FCC Section 15.247(d) – Antenna Terminal Out of Band/ Band Edge Conducted Emissions, 30 MHz to 25 GHz

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	NARDA MICROWAVE	ATTENUATOR, COAXIAL	20 dB, DC - 18 GHz	757C-20DB	11/24/2015	11/30/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016

FCC Section 15.247(d) – Out of Band/Band Edge Radiated Emissions

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
1232	AGILENT / HP	PRE-AMPLIFIER	1 - 26.5 GHz	8449B	6/17/2015	6/30/2016
3258	ETS / EMCO	ANTENNA, DOUBLE RIDGED GUIDE	1 - 18 GHz	3115	3/24/2015	9/30/2016
4029	RETLIF	OPEN AREA TEST SITE, FILING	3 / 10 Meters	RNH	5/15/2013	5/31/2016
5053	ETS / EMCO	ANTENNA, BICONILOG	26 MHz - 3 GHz	3142C	2/24/2015	8/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016
R469	AGILENT / HP	ANALYZER, SPECTRUM	100 Hz - 26.5 GHz	E7405A;A	11/17/2015	11/30/2016



Retlif Testing Laboratories

Report No. R-6046N-4

EQUIPMENT LISTS (continued)

FCC Section 15.247(e) – Power Density

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	NARDA MICROWAVE	ATTENUATOR, COAXIAL	20 dB, DC - 18 GHz	757C-20DB	11/24/2015	11/30/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016

FCC Section 15.247(a)(1) – 20 dB Bandwidth

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	NARDA MICROWAVE	ATTENUATOR, COAXIAL	20 dB, DC - 18 GHz	757C-20DB	11/24/2015	11/30/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016

FCC Section 15.247(a)(1) -- Channel Separation

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	NARDA MICROWAVE	ATTENUATOR, COAXIAL	20 dB, DC - 18 GHz	757C-20DB	11/24/2015	11/30/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016

FCC Section 15.247(a)(1)(iii) – Number of Hopping Channels and Time Occupancy

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	NARDA MICROWAVE	ATTENUATOR, COAXIAL	20 dB, DC - 18 GHz	757C-20DB	11/24/2015	11/30/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016

FCC Section 15.207– Conducted Emissions, Power Leads, 150 kHz to 30 MHz

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
4027	SOLAR ELECTRONICS	LISN	50 uH, 10 kHz - 50 MHz	9252-50-R-24-BNC	2/29/2016	2/28/2017
4028	ACME	TRANSFORMER, ISOLATION		120X240	No Calibration Required	
5030B	NARDA MICROWAVE	ATTENUATOR, COAXIAL	10 dB, DC - 12.4 GHz	757C-10	3/18/2015	3/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
DTS Bandwidth
6 dB Bandwidth
FCC Section 15.247(a)(2)



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
DTS Bandwidth
6 dB Bandwidth



Test Setup



Retlif Testing Laboratories

Report No. R-6046N-4

DTS Bandwidth
6 dB Bandwidth
Test Data




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES


Test Method:	6dB Bandwidth		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 903 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Occupied Bandwidth: 869.73 kHz		

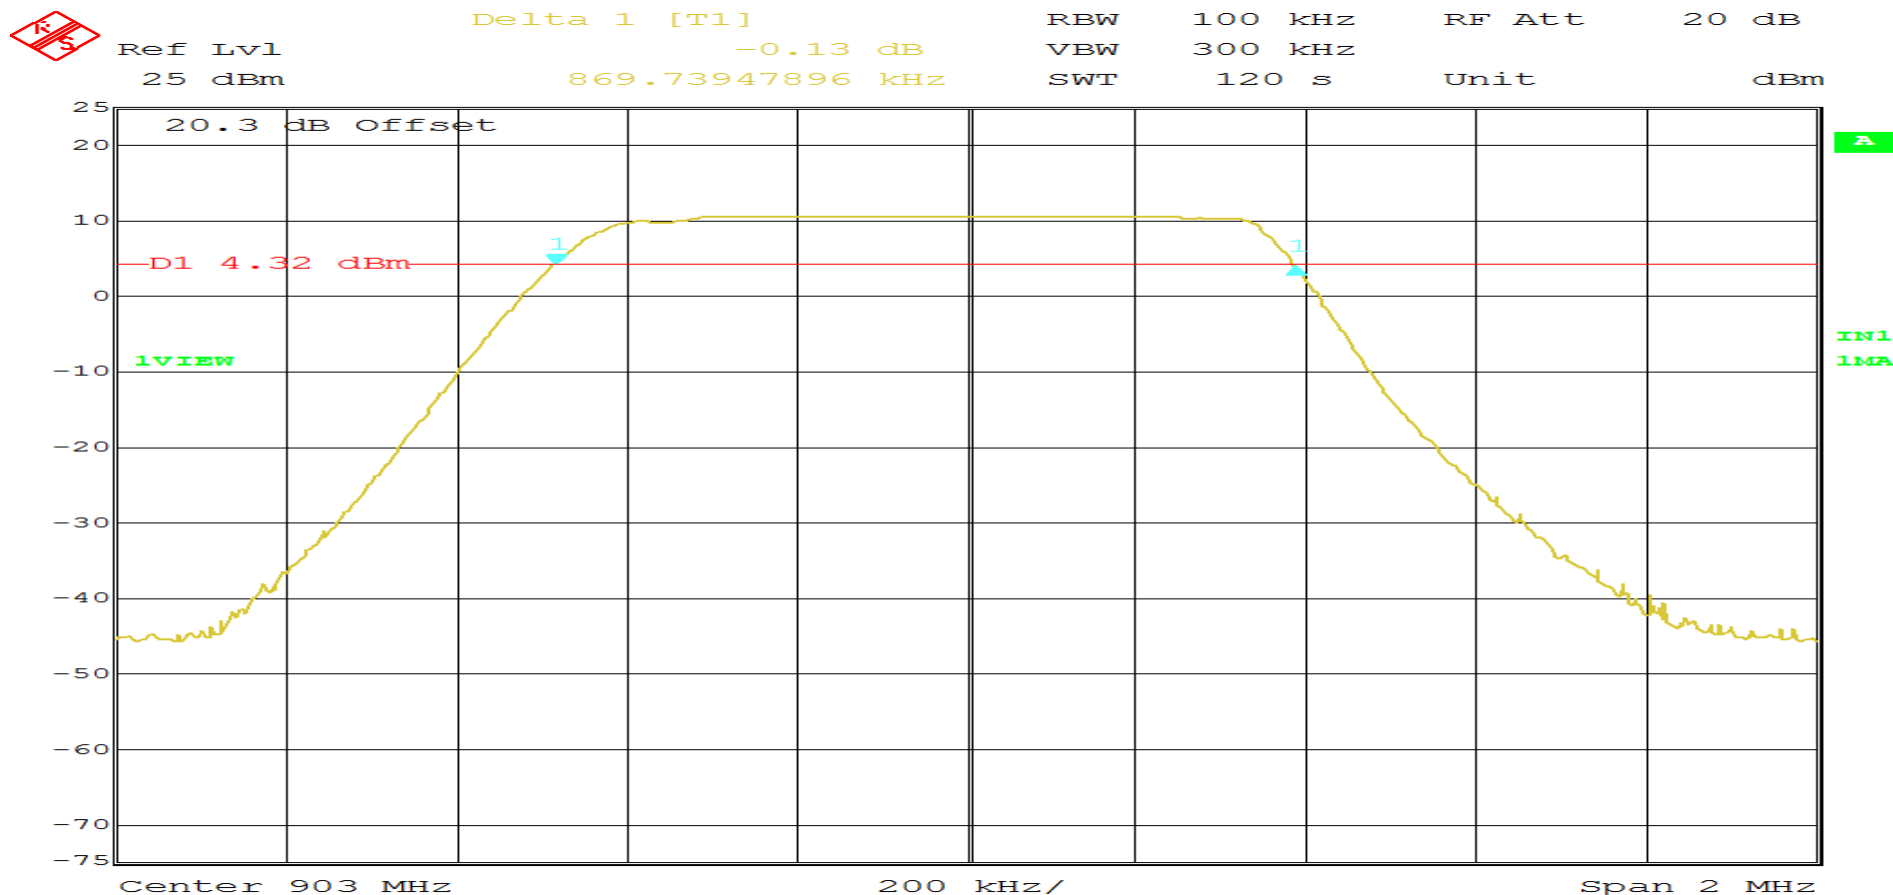

Date: 1.MAR.2016 10:59:21
 Page 1 of 3

RETLIF TESTING LABORATORIES


Test Method:	6dB Bandwidth		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 907.8 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Occupied Bandwidth: 865.73 kHz		

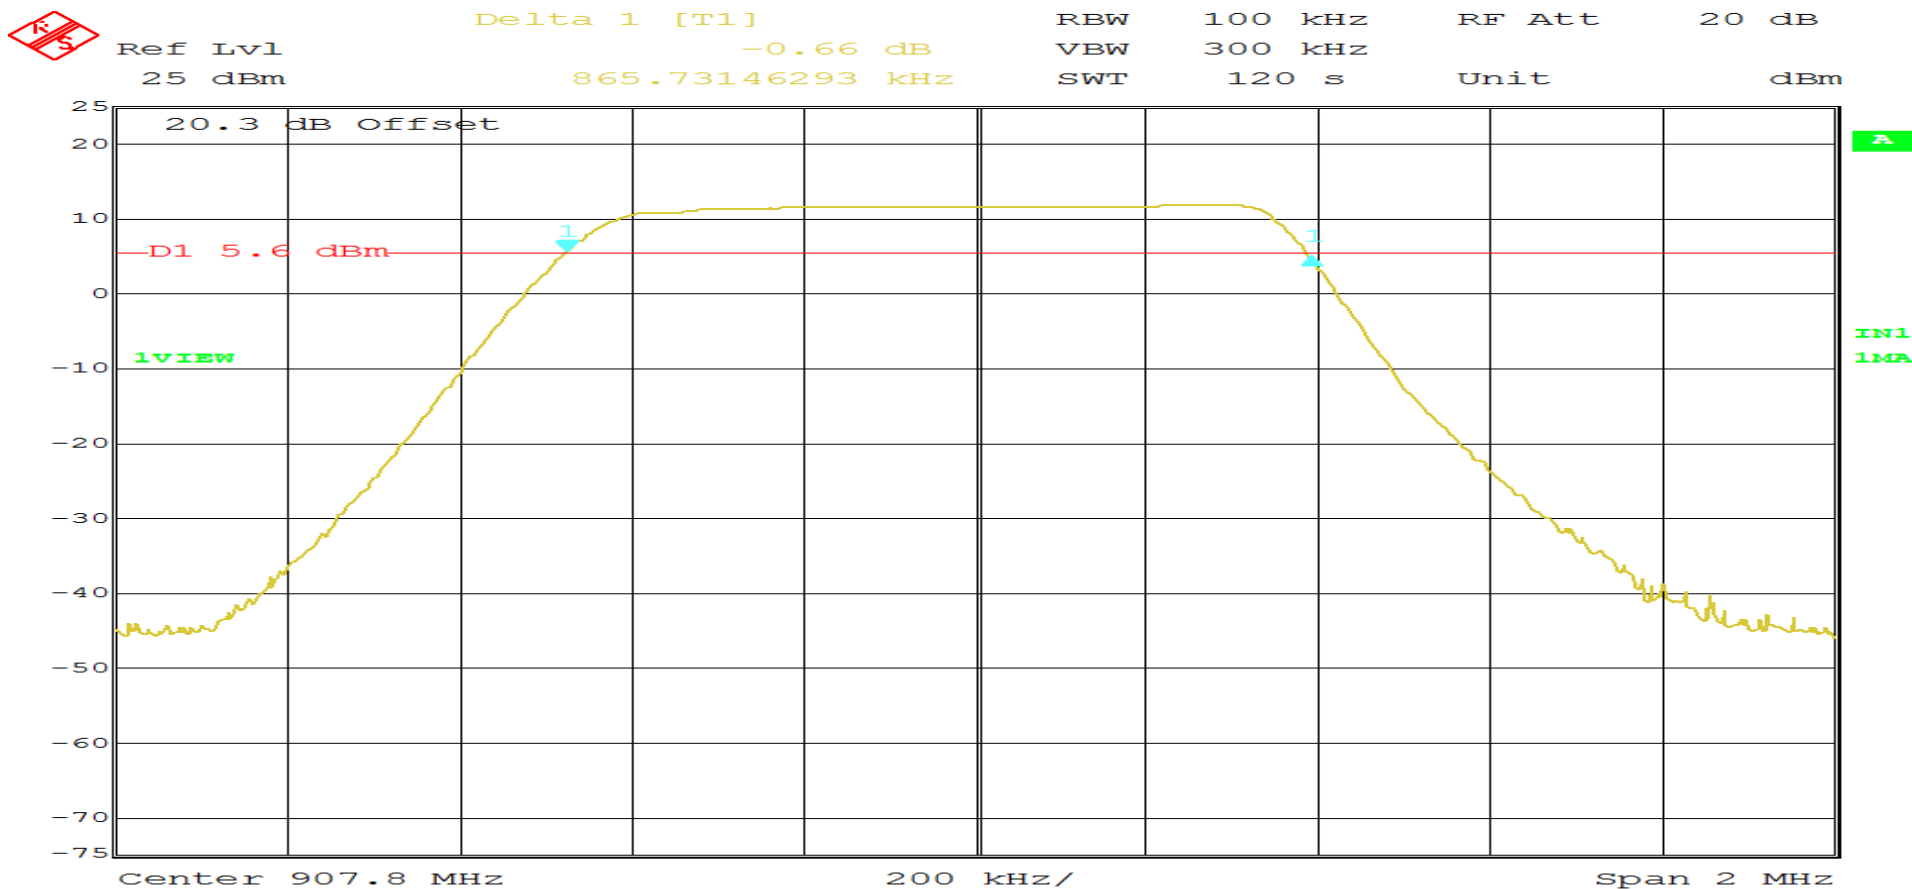

Date: 1.MAR.2016 11:05:21
Page 2 of 3

RETLIF TESTING LABORATORIES

Test Method:	6dB Bandwidth		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 914.2 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Occupied Bandwidth: 885.77 kHz		

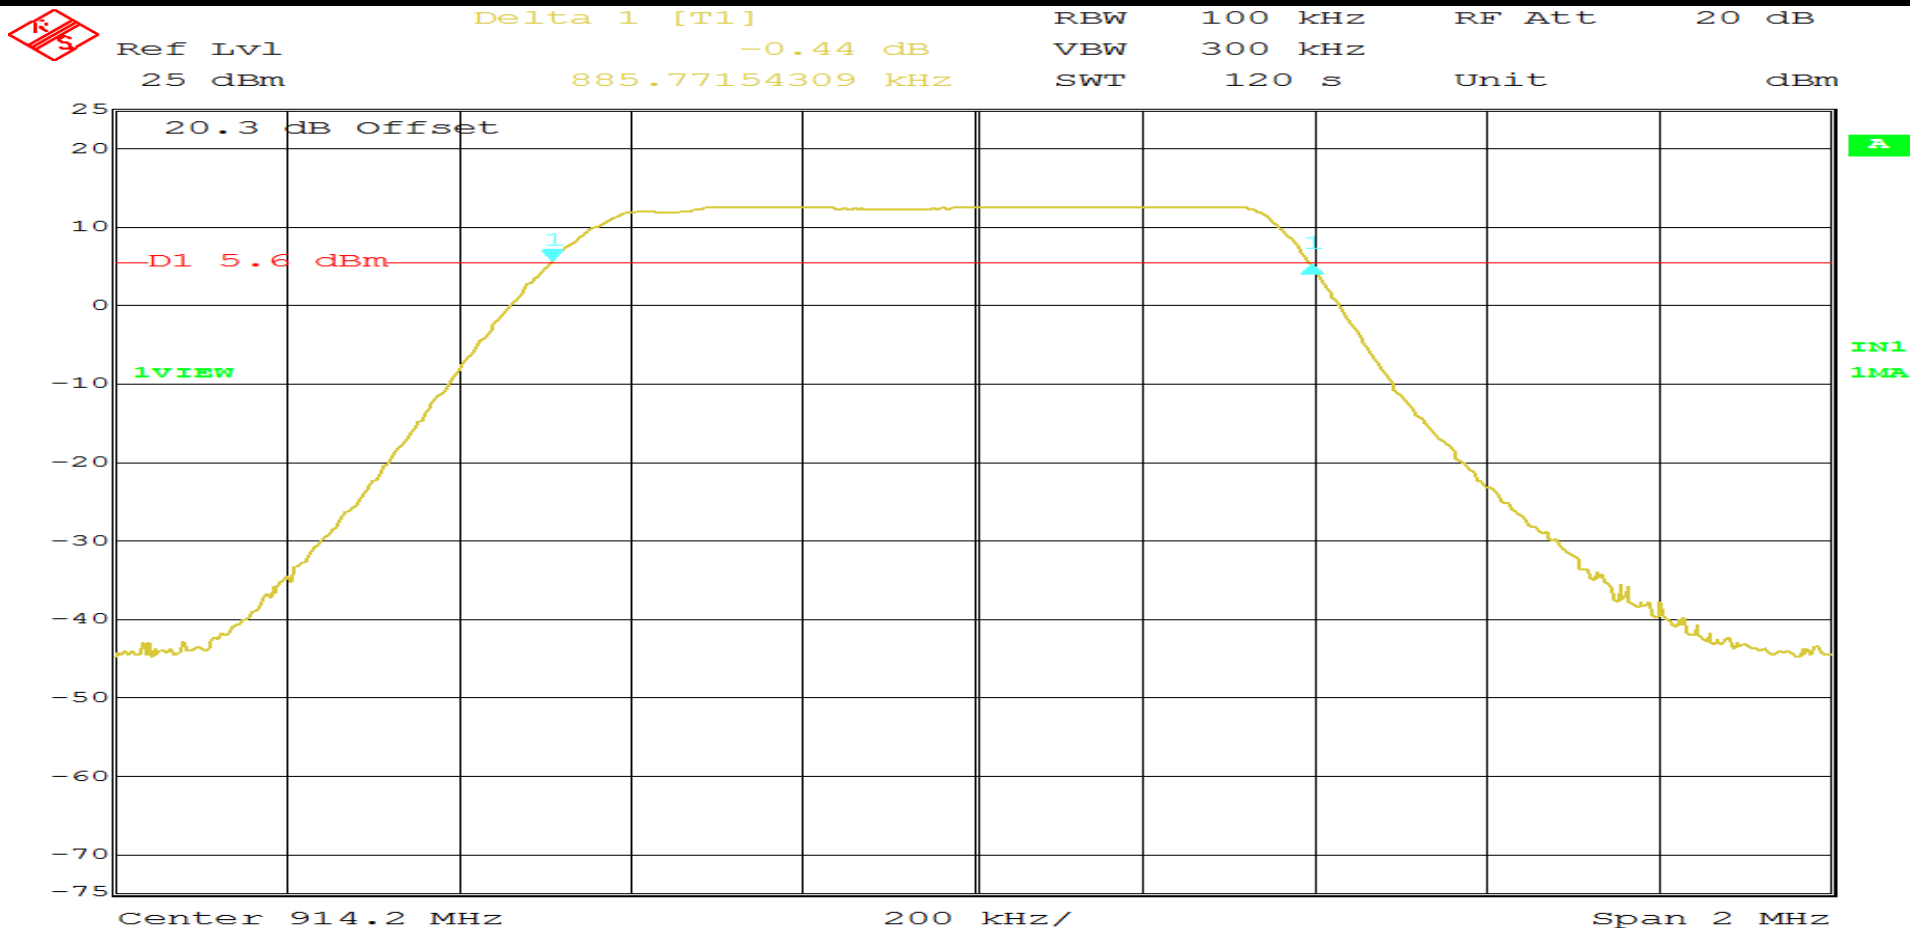

Date: 1.MAR.2016 11:11:39

Page 3 of 3

**Test Photograph(s)
Power Output
FCC Section 15.247(b)(3)**



Retlif Testing Laboratories

Report No. R-6046N-4

**Test Photograph(s)
Power Output**



Test Setup, DTS



Test Setup, FHSS



Retlif Testing Laboratories

Report No. R-6046N-4

**Power Output
DTS Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES


Test Method:	Conducted Peak Power Output		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 903 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Peak Power Output: 10.26 dBm		

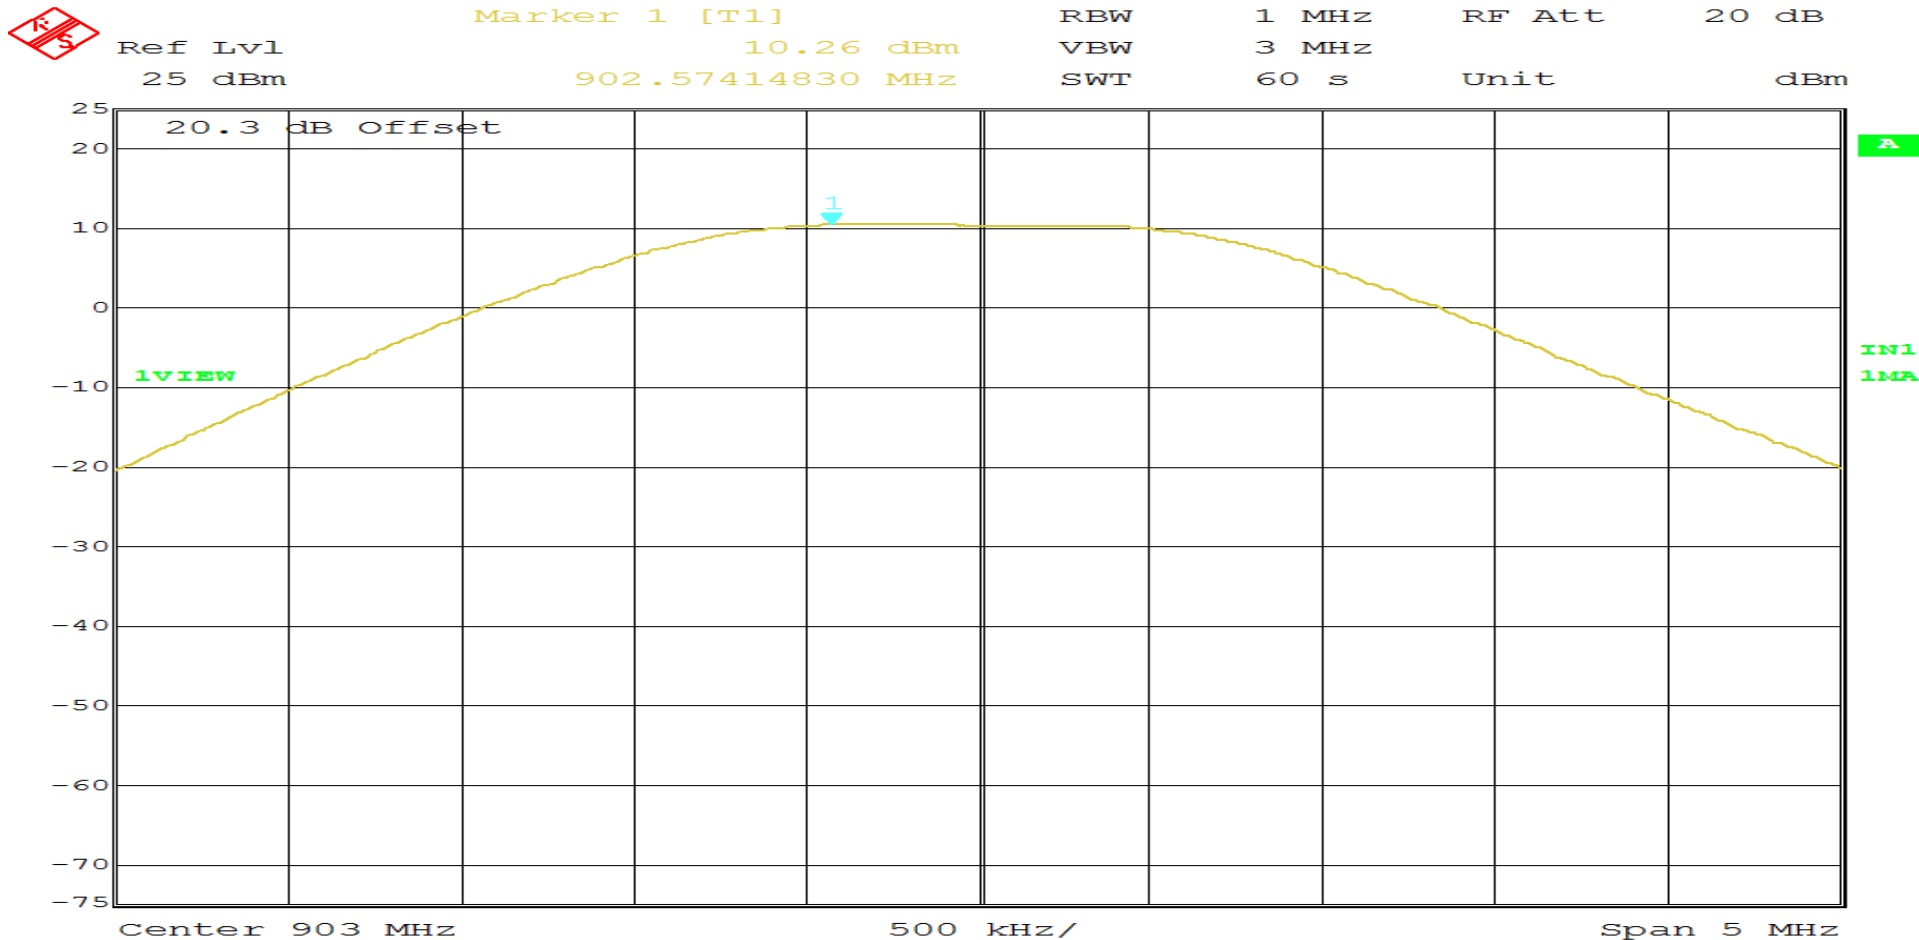

Date: 1.MAR.2016 11:31:07
Page 1 of 3

RETLIF TESTING LABORATORIES


Test Method:	Conducted Peak Power Output		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 907.8 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Peak Power Output: 11.53 dBm		

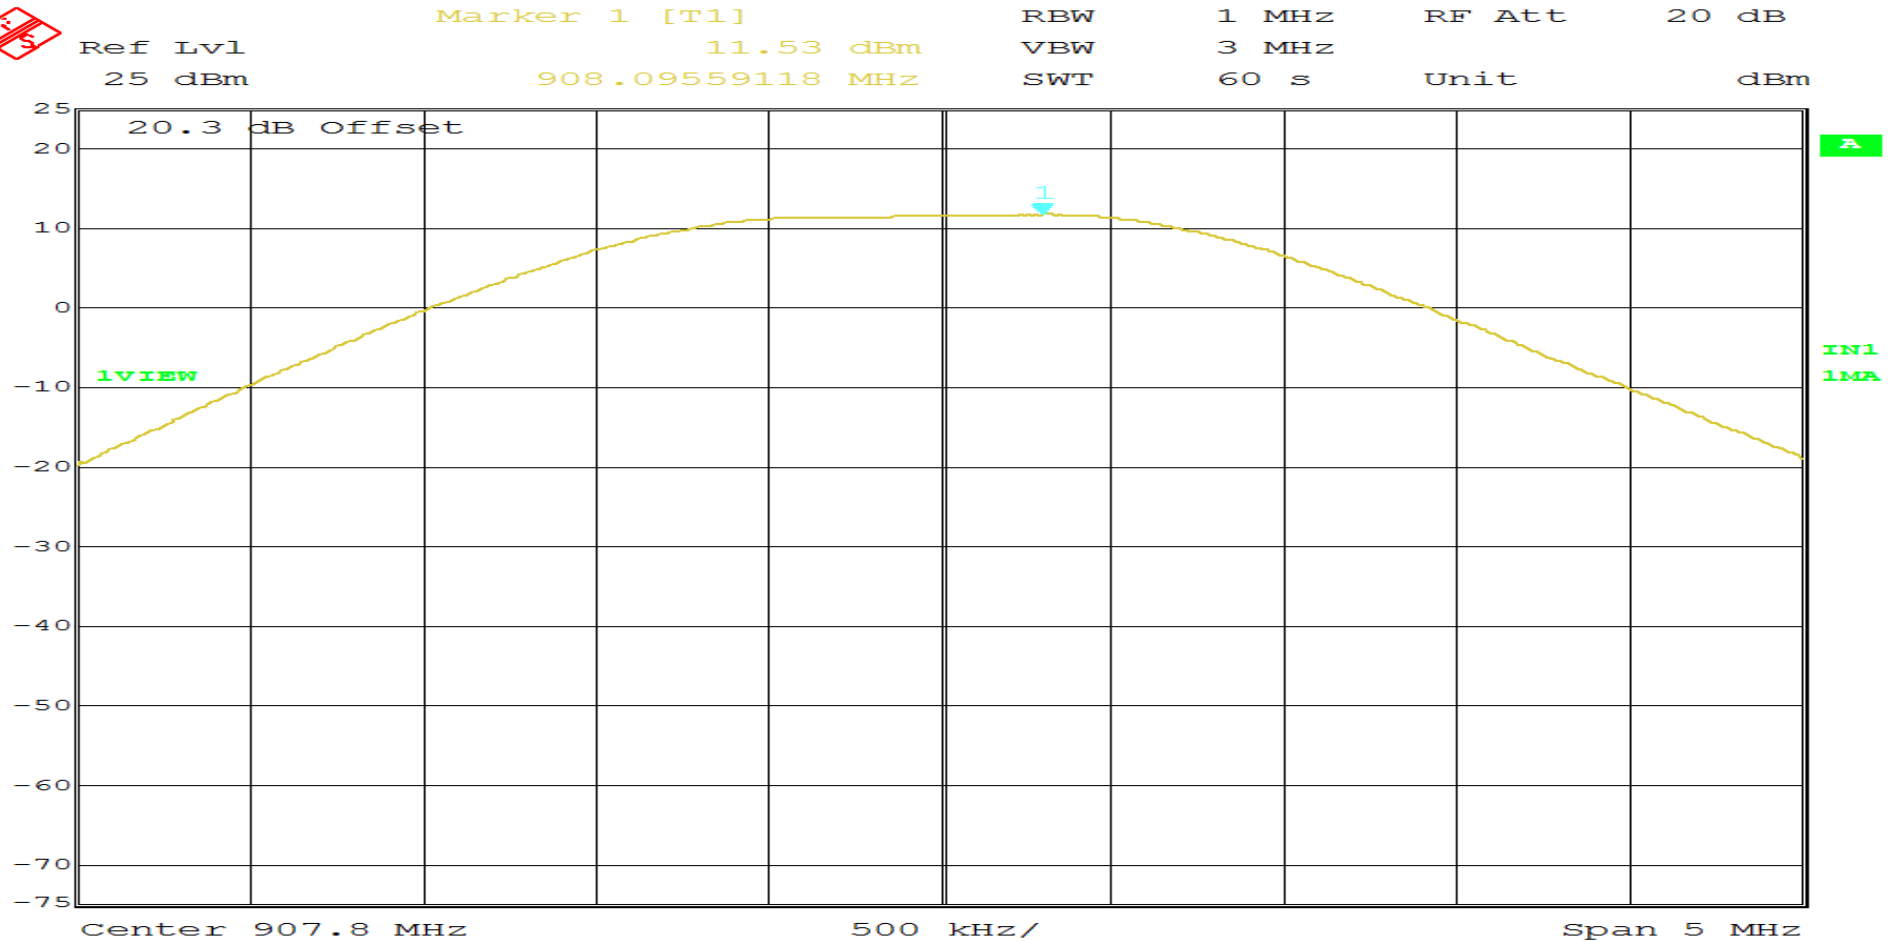

Date: 1.MAR.2016 11:26:20
 Page 2 of 3

RETLIF TESTING LABORATORIES

Test Method:	Conducted Peak Power Output		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 914.2 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Peak Power Output: 12.38 dBm		

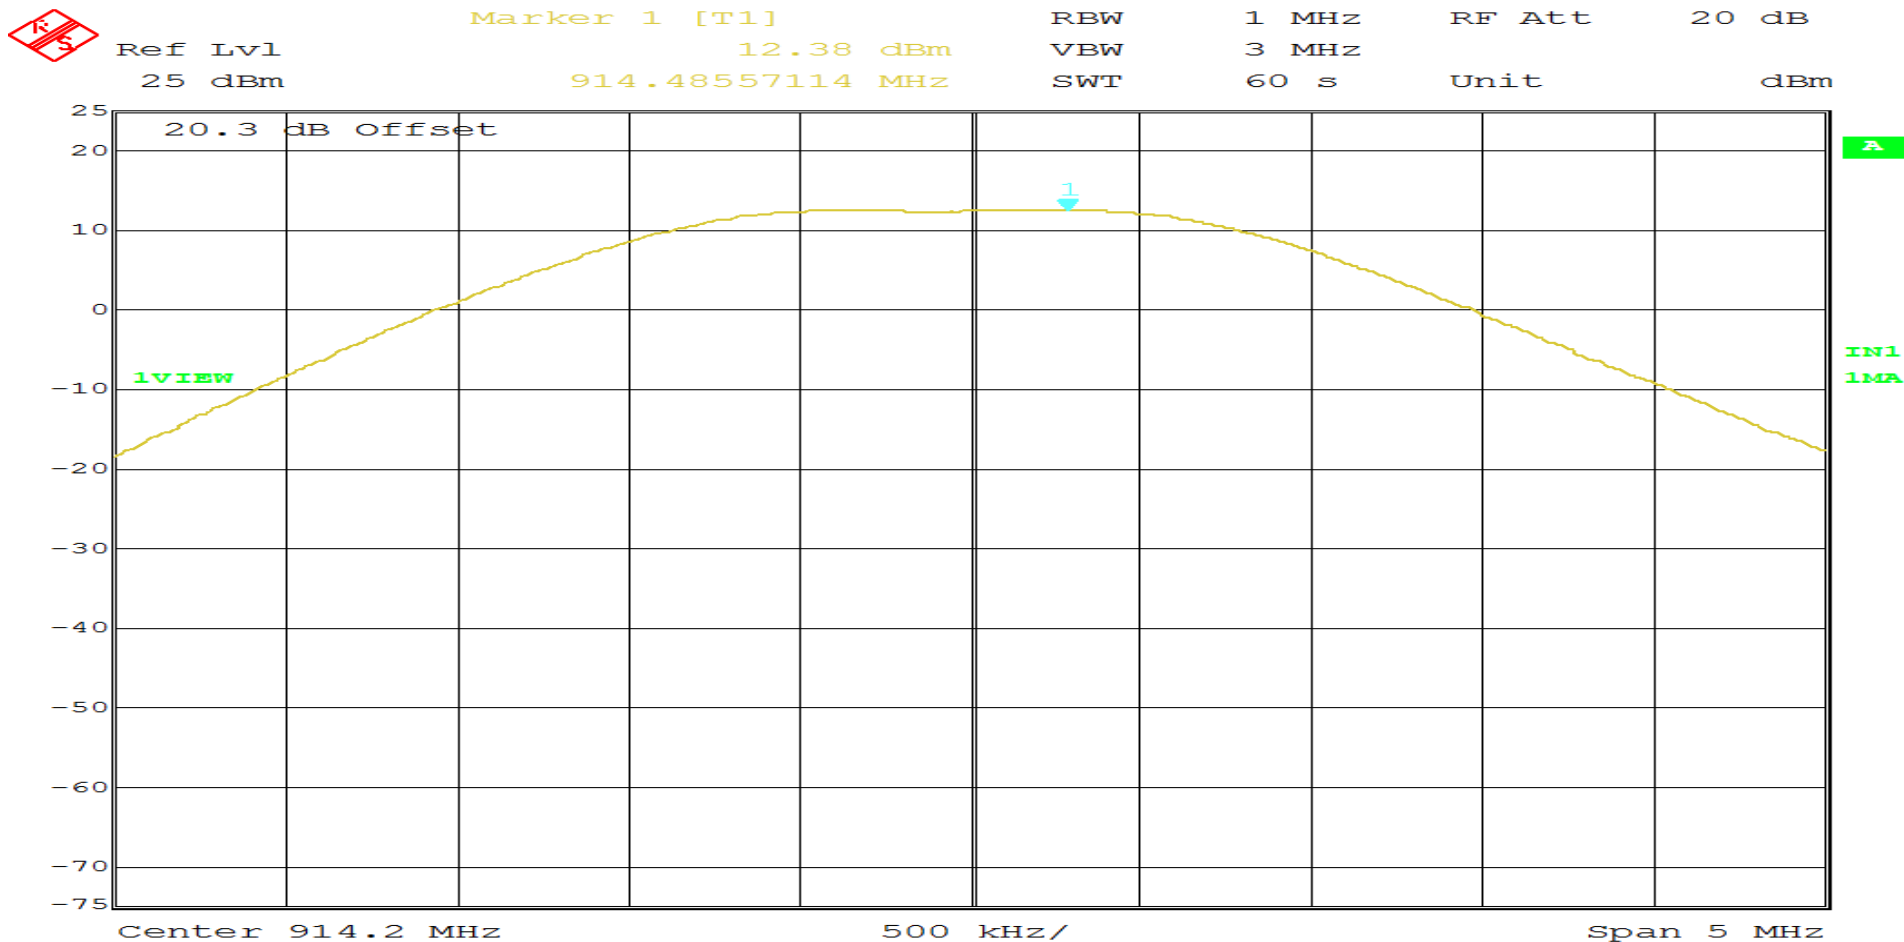

Date: 1.MAR.2016 11:20:20
Page 3 of 3

Power Output
FHSS Test Data




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

Test Method:	Conducted Peak Power Output		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 902.3 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(2)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Peak Power Output: 10.39 dBm		

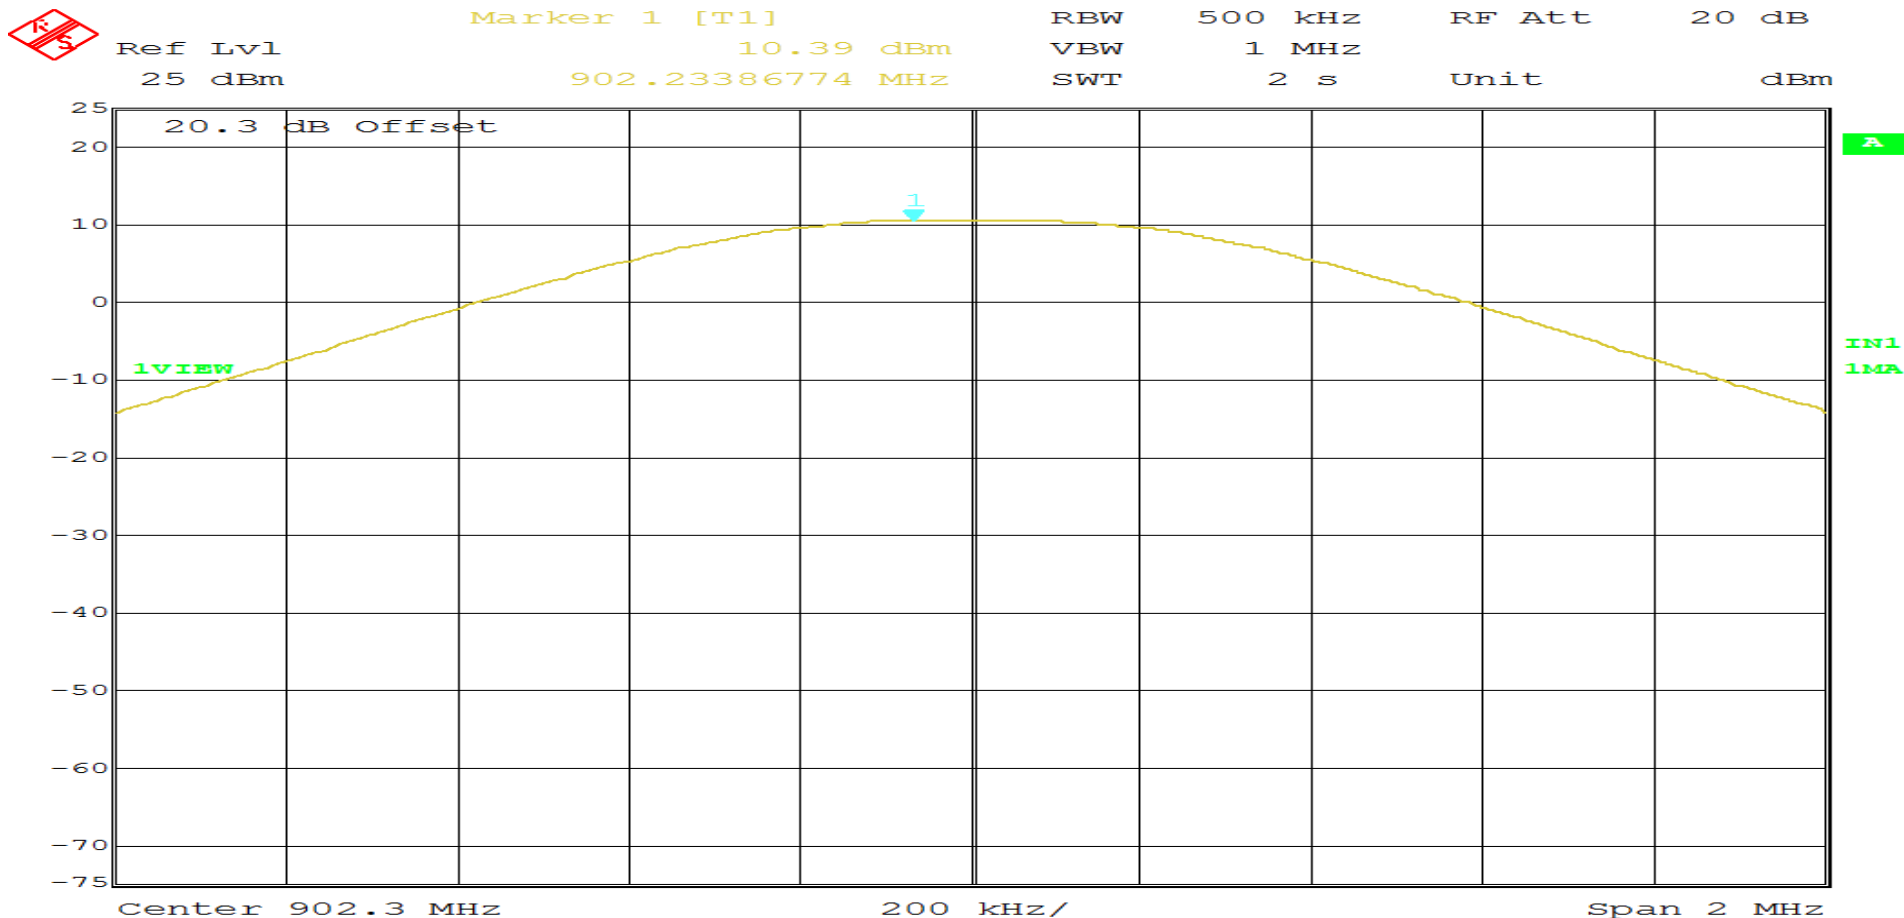


Date: 1.MAR.2016 10:20:59

Page 1 of 3

RETLIF TESTING LABORATORIES


Test Method:	Conducted Peak Power Output		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 908.5 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(2)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Peak Power Output: 11.75 dBm		

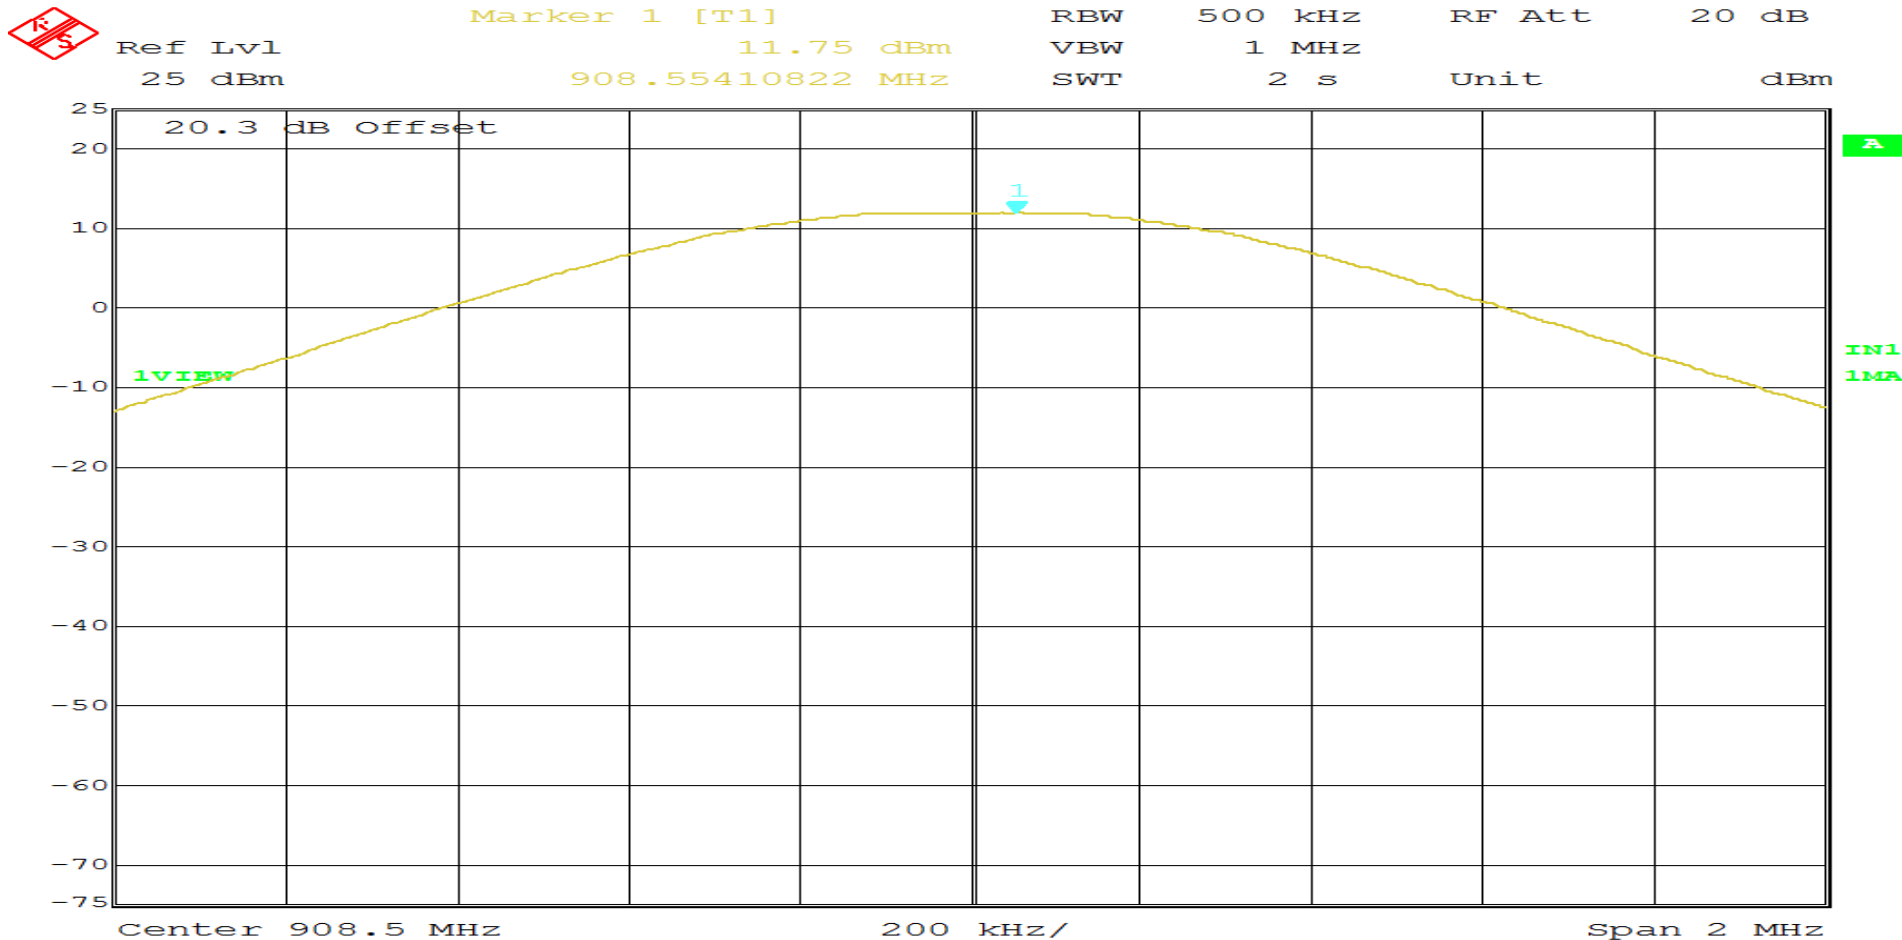

Date: 1.MAR.2016 10:24:52
Page 2 of 3

RETLIF TESTING LABORATORIES

Test Method:	Conducted Peak Power Output		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 914.9 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(2)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Peak Power Output: 12.40 dBm		

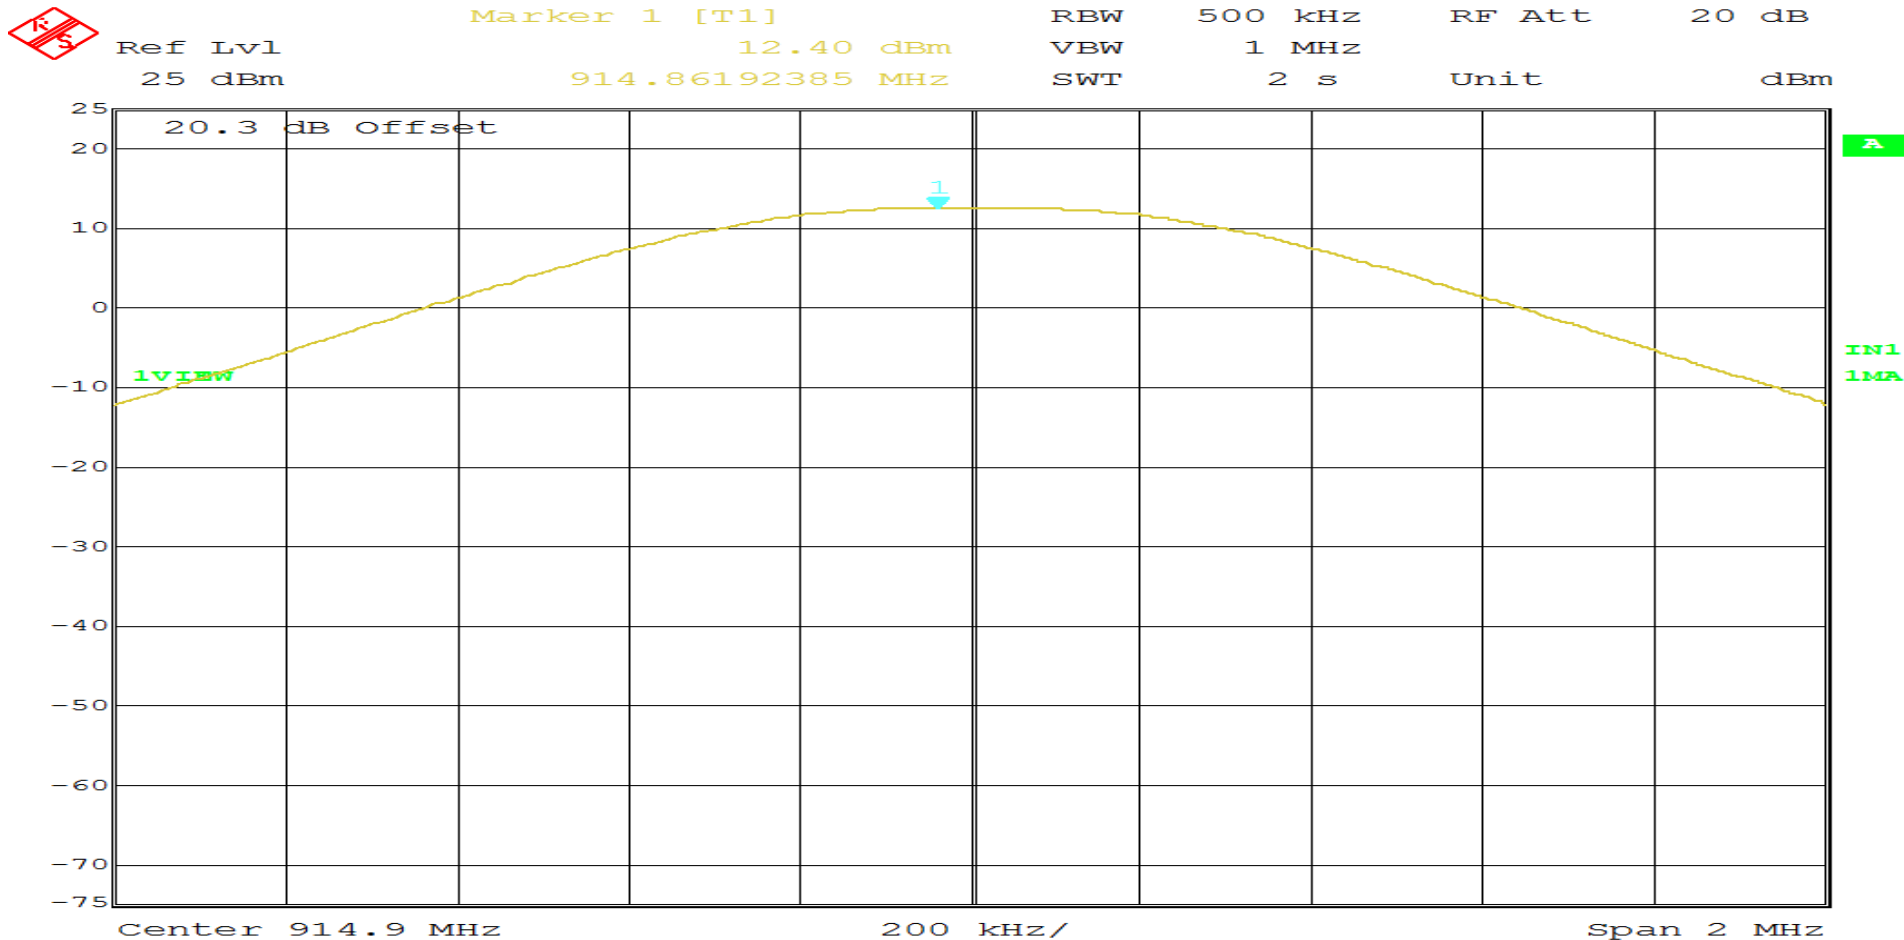

Date: 1.MAR.2016 10:29:38
Page 3 of 3

Test Photograph(s)
Antenna Terminal Out of Band/Band Edge Conducted Emissions, 25 MHz to 10 GHz
FCC Section 15.247(d)



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
Antenna Terminal Out of Band/Band Edge Conducted Emissions, 25 MHz to 10 GHz



Test Setup



Retlif Testing Laboratories

Report No. R-6046N-4

**Antenna Terminal Out of Band/Band Edge Conducted Emissions, 25 MHz to 10 GHz
Test Data**



Retlif Testing Laboratories

Report No. R-6046N-4

**Band Edge Conducted
DTS Test Data**

**Band Edge Conducted
Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

Test Method:	Band Edge Conducted		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 903 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Limit: -7.62 dBm		

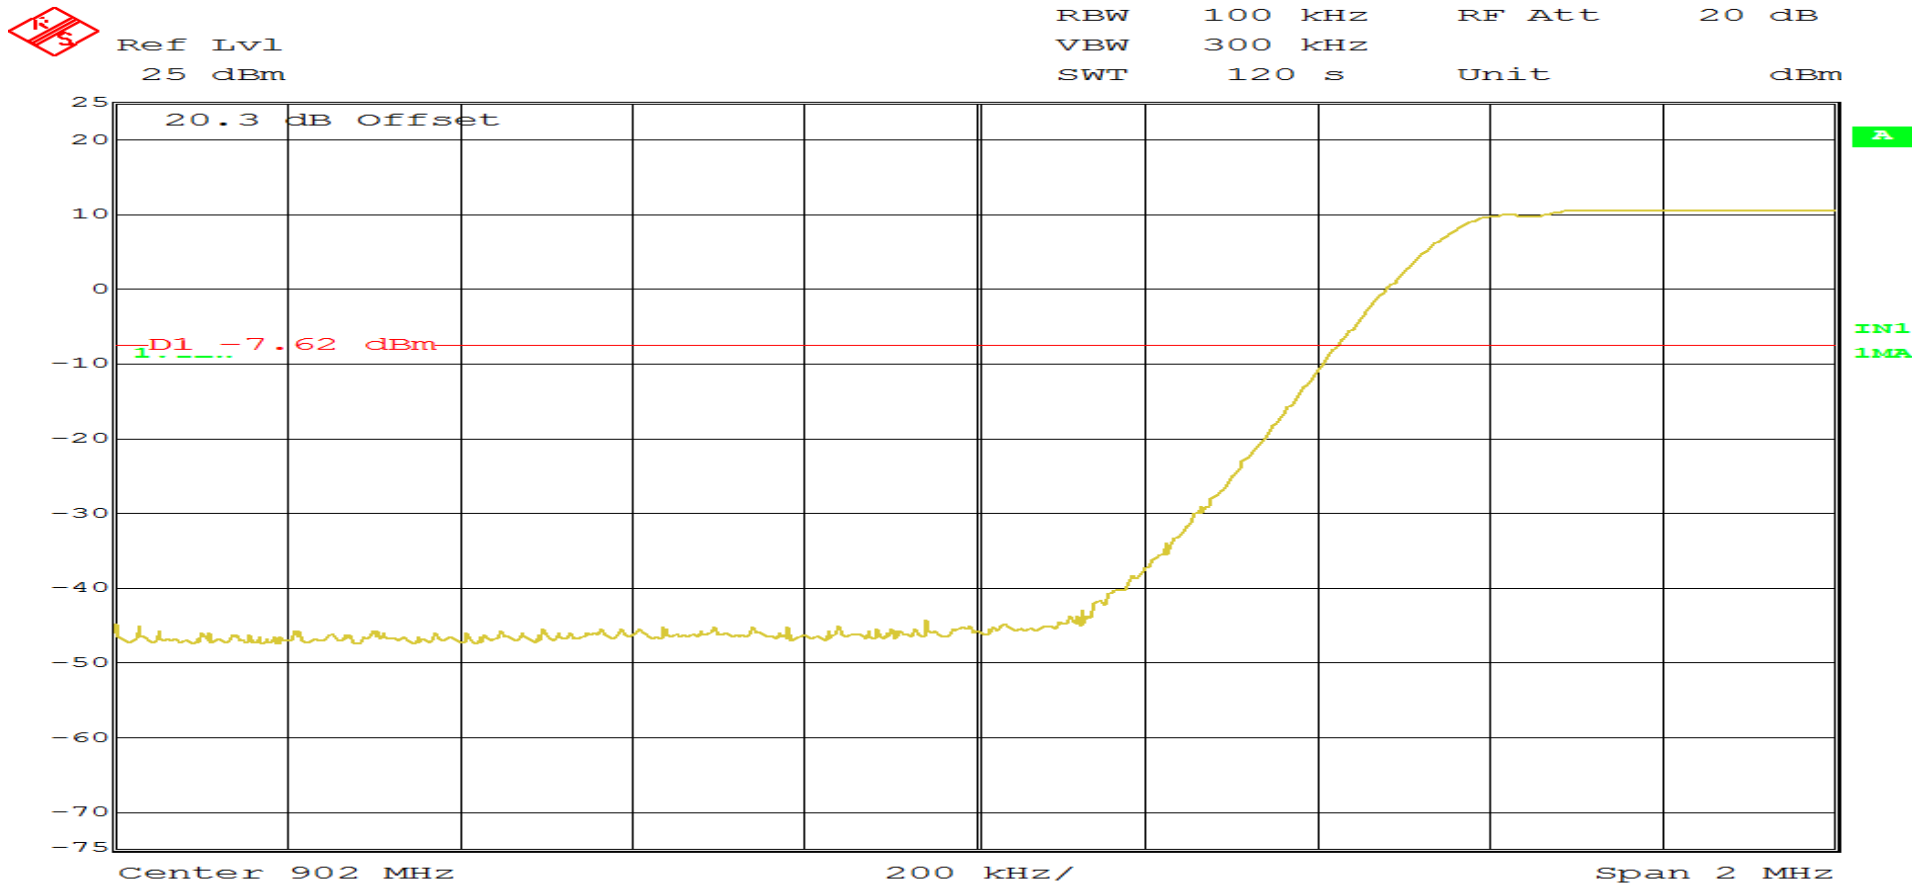

Date: 1.MAR.2016 11:41:22


Page 1 of 2

RETLIF TESTING LABORATORIES

Test Method:	Band Edge Conducted		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 914.2 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Limit: -7.62 dBm		



Ref Lvl 25 dBm RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 120 s Unit dBm

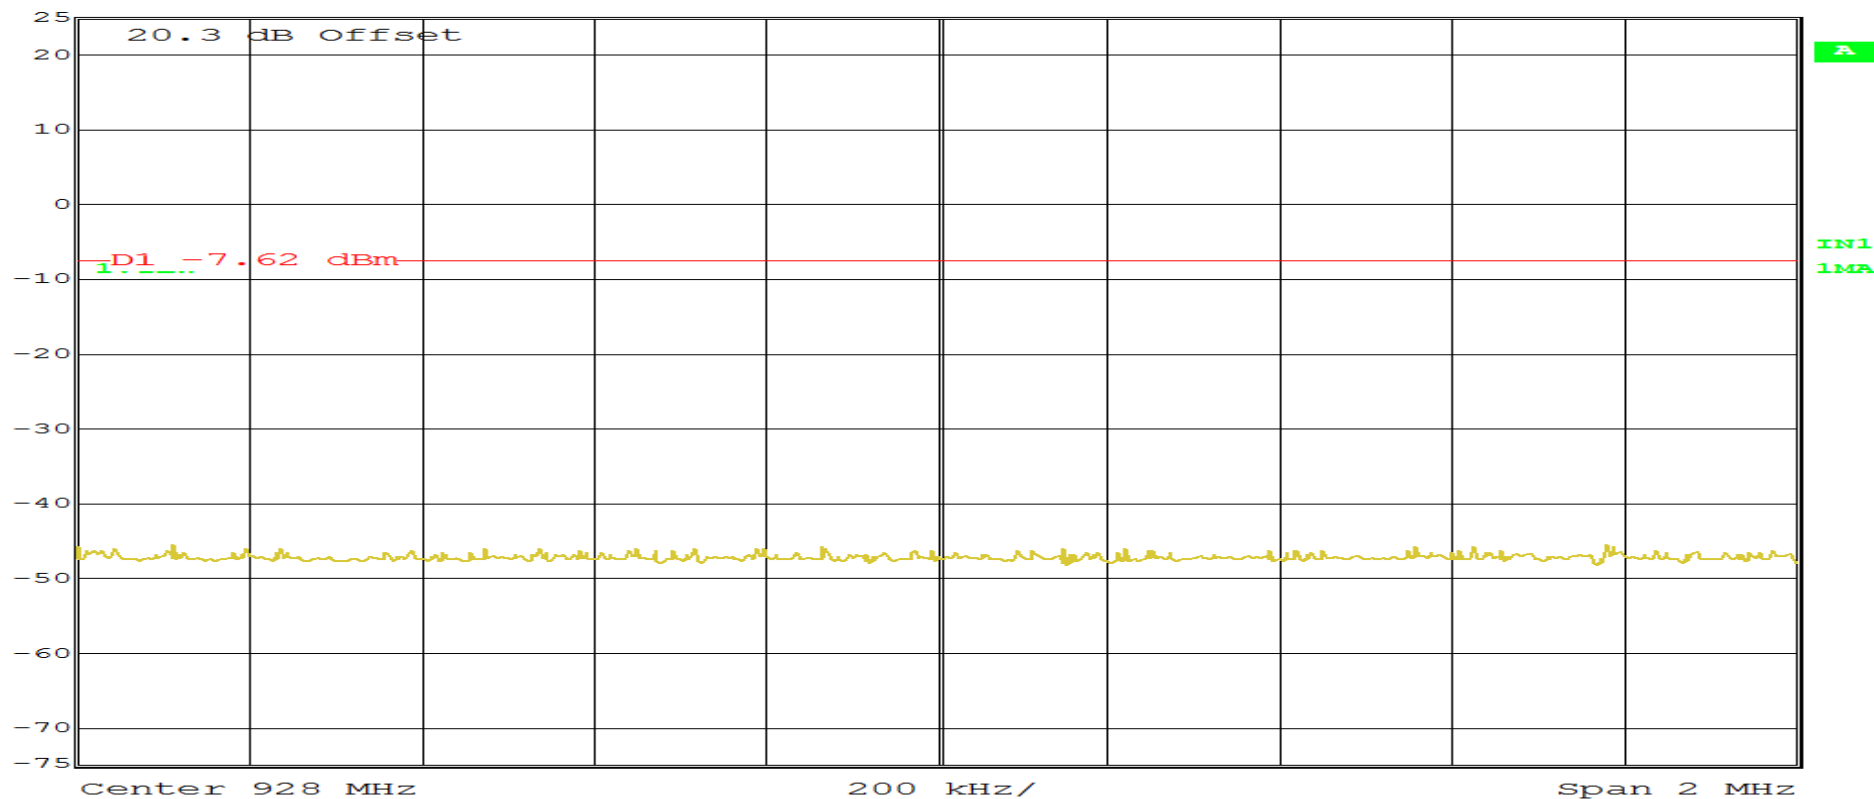

Date: 1.MAR.2016 11:45:29
 Page 2 of 2

**Out of Band Conducted Emissions
DTS Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 903 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Limit: -7.62 dBm		

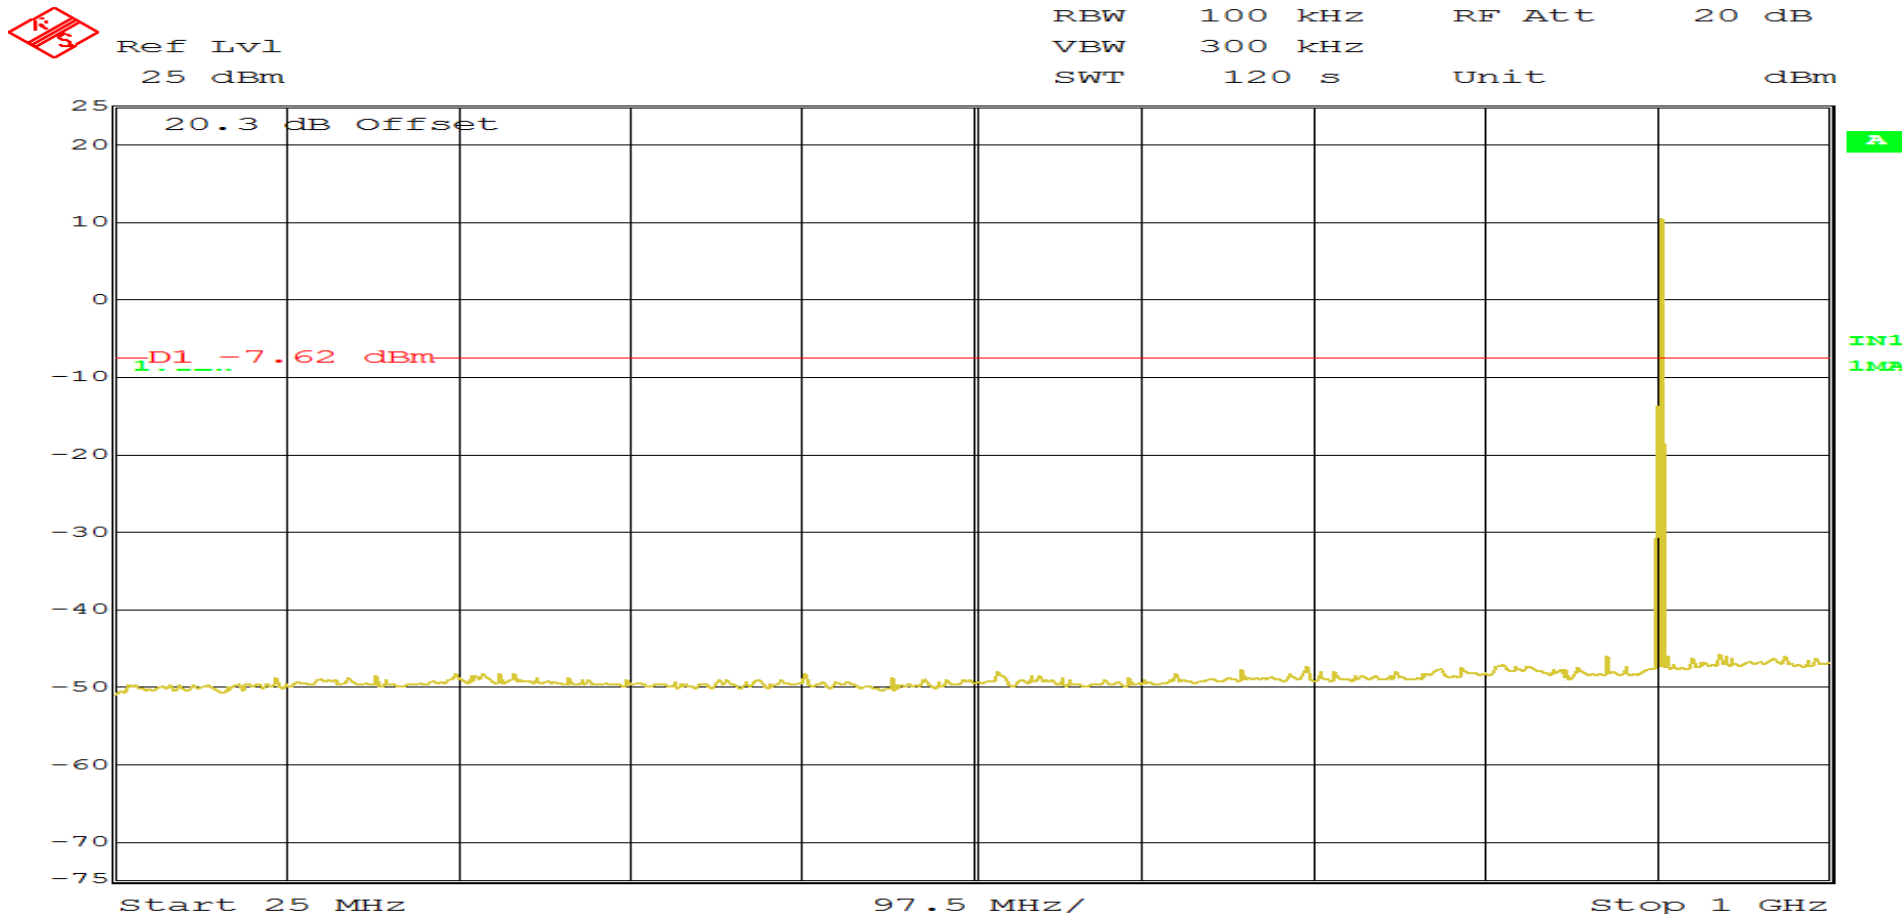

Date: 1.MAR.2016 11:49:13

Page 1 of 6


RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 903 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Limit: -7.62 dBm		



Ref Lvl
25 dBm

RBW 100 kHz RF Att 20 dB
VBW 300 kHz
SWT 120 s Unit dBm

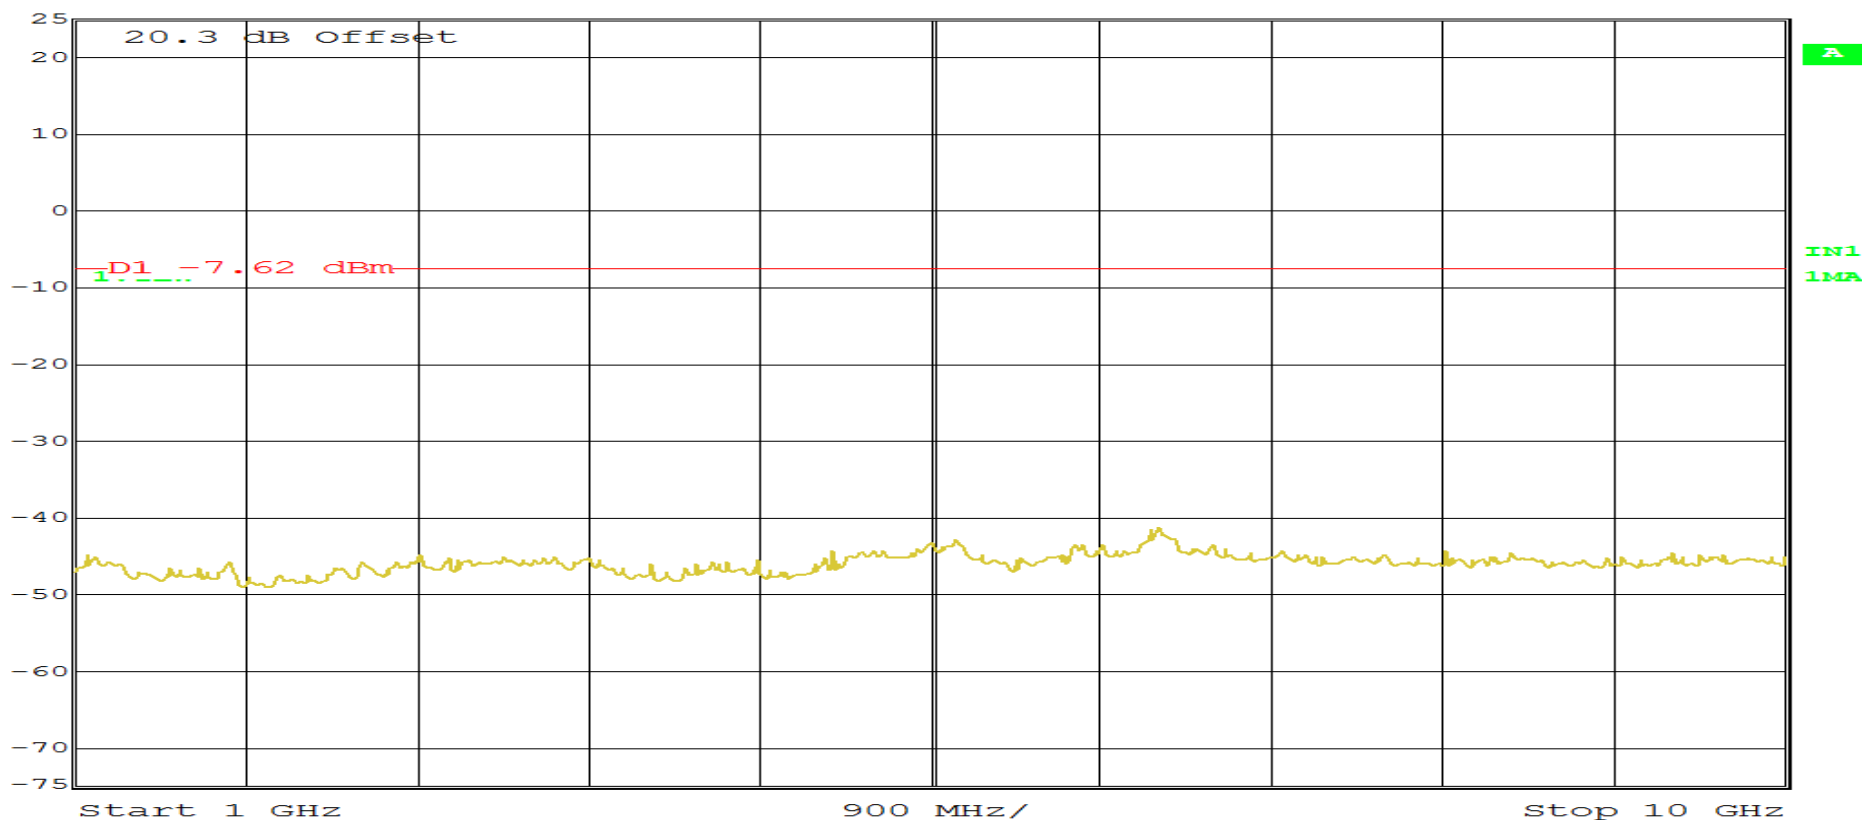

Date: 1.MAR.2016 11:52:39

Page 2 of 6


RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 907.8 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Limit: -7.62 dBm		



Ref Lvl
25 dBm

RBW 100 kHz RF Att 20 dB
VBW 300 kHz
SWT 120 s Unit dBm

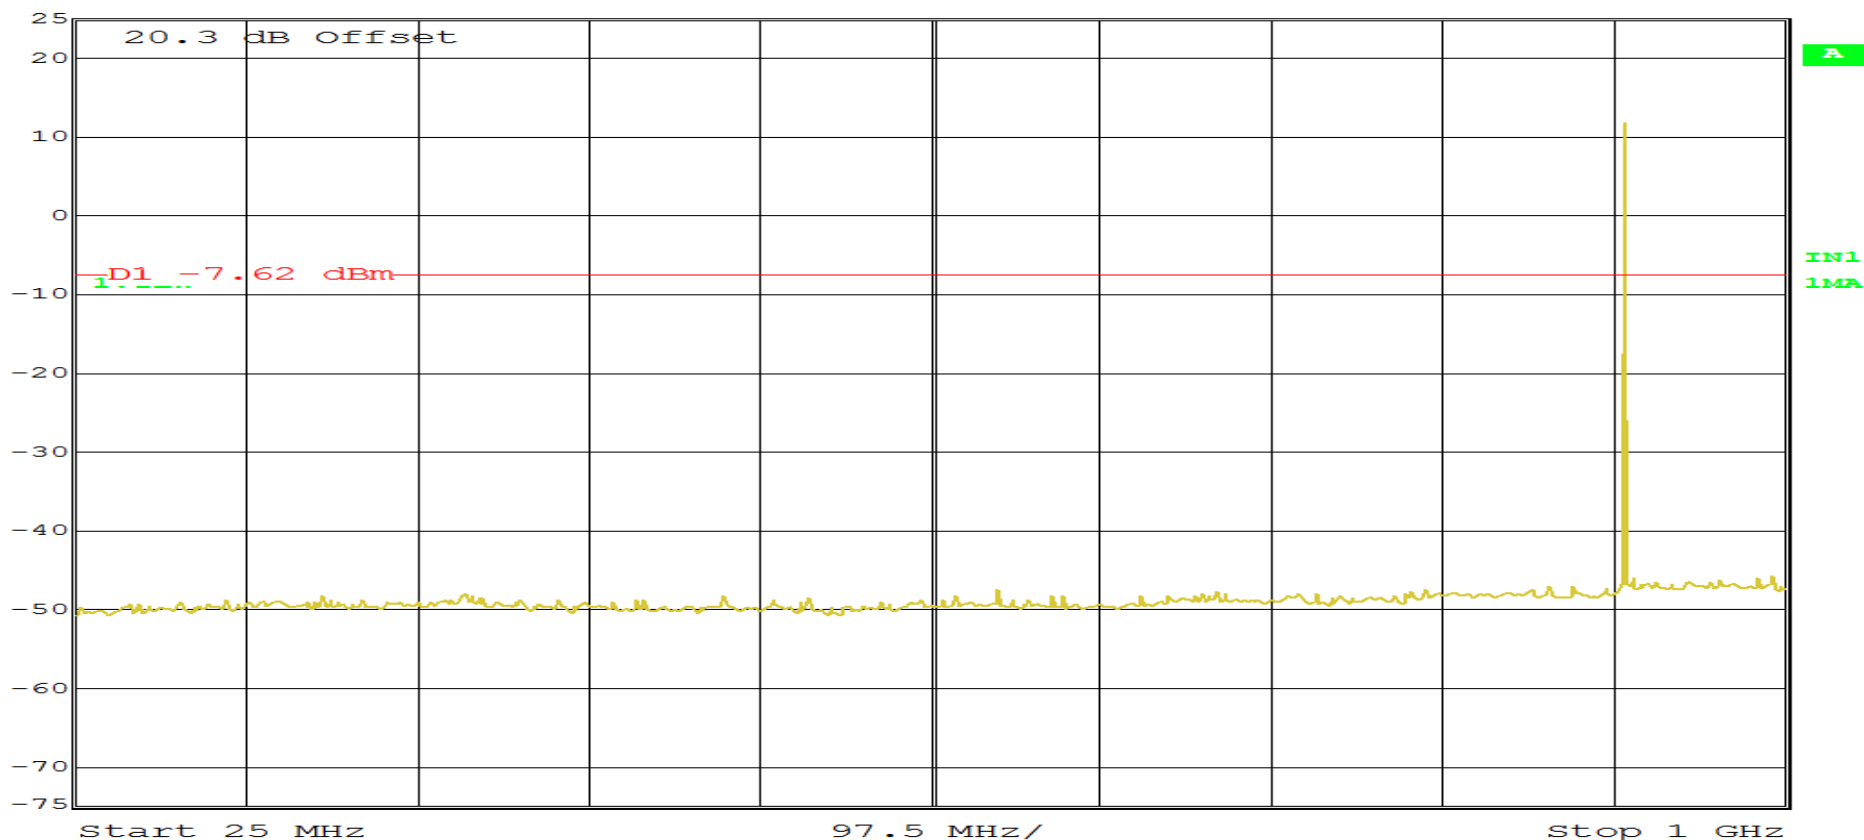

Date: 1.MAR.2016 12:00:12
Page 3 of 6


RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 907.8 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Limit: -7.62 dBm		



Ref Lvl
25 dBm

RBW 100 kHz RF Att 20 dB
VBW 300 kHz
SWT 120 s Unit dBm

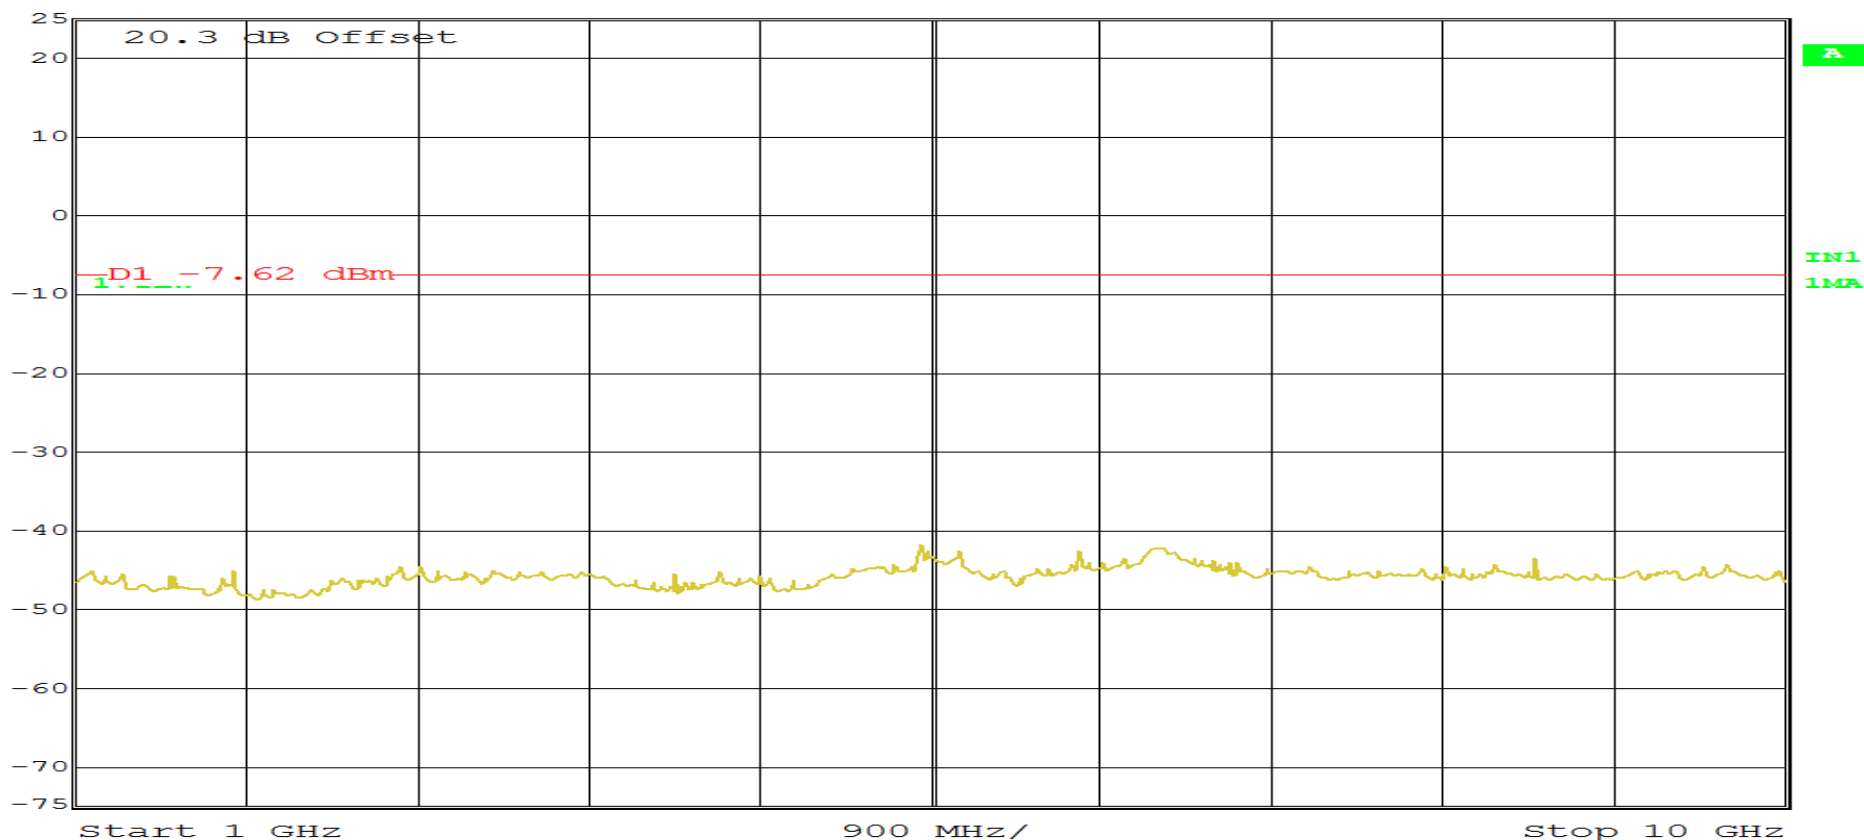

Date: 1.MAR.2016 11:57:01
Page 4 of 6


RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 914.2 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Limit: -7.62 dBm		



Ref Lvl
25 dBm

RBW 100 kHz RF Att 20 dB
VBW 300 kHz
SWT 120 s Unit dBm

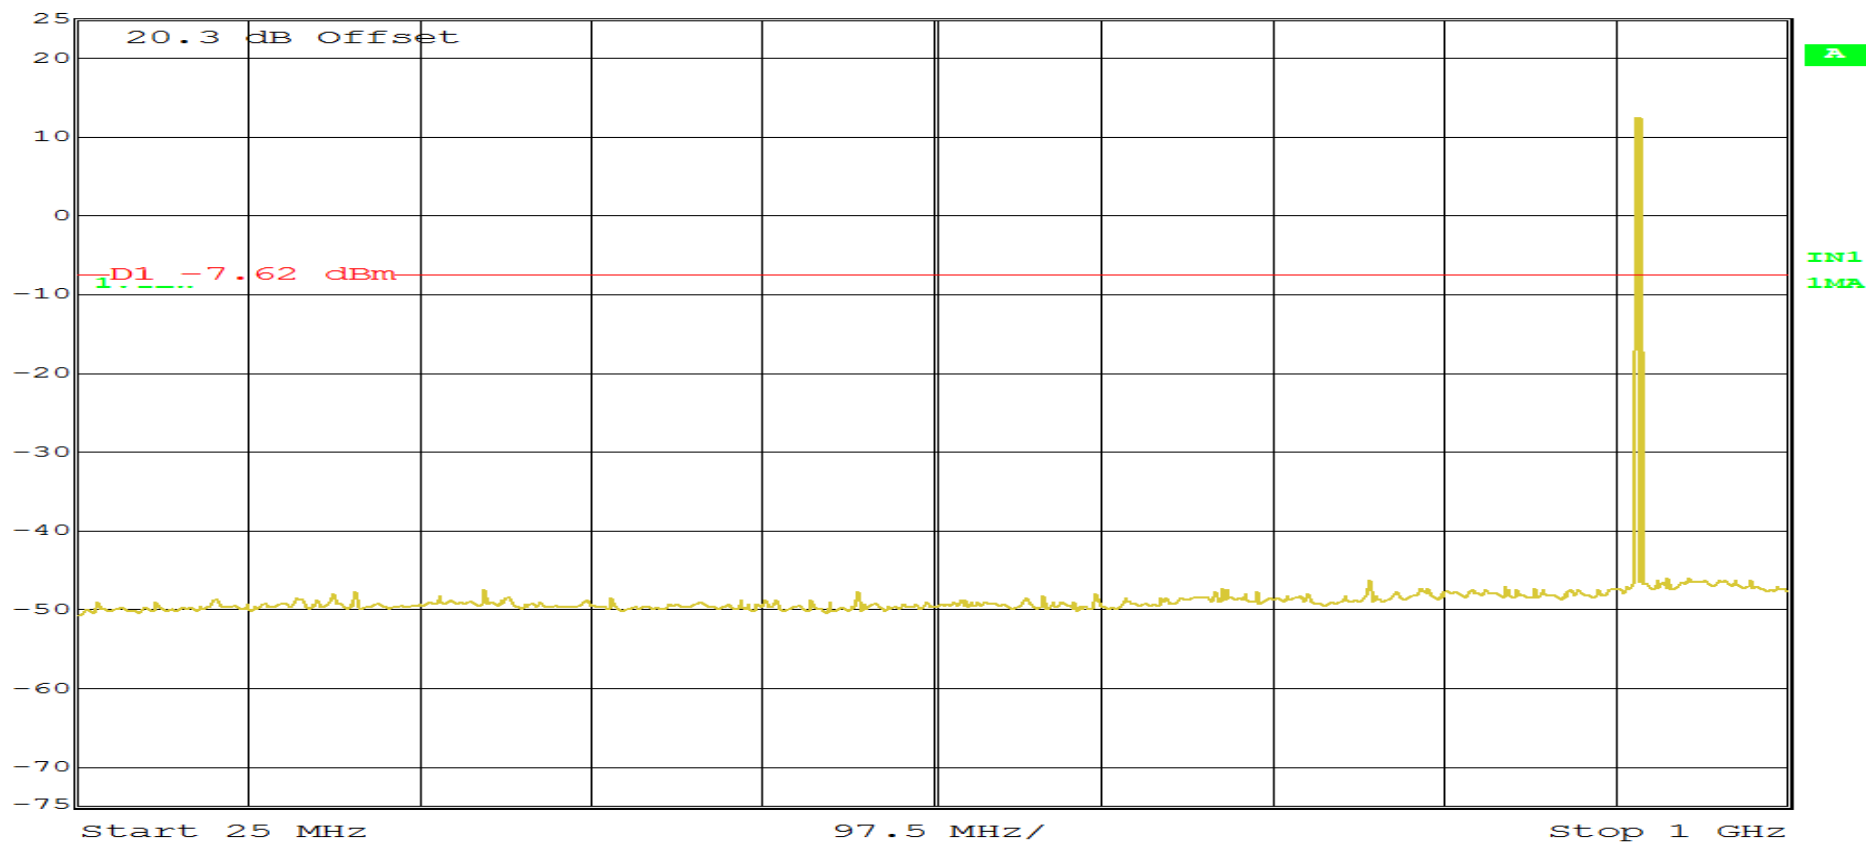

Date: 1.MAR.2016 12:03:57
Page 5 of 6


RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 914.2 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Limit: -7.62 dBm		



Ref Lvl
25 dBm

RBW 100 kHz RF Att 20 dB
VBW 300 kHz
SWT 120 s Unit dBm

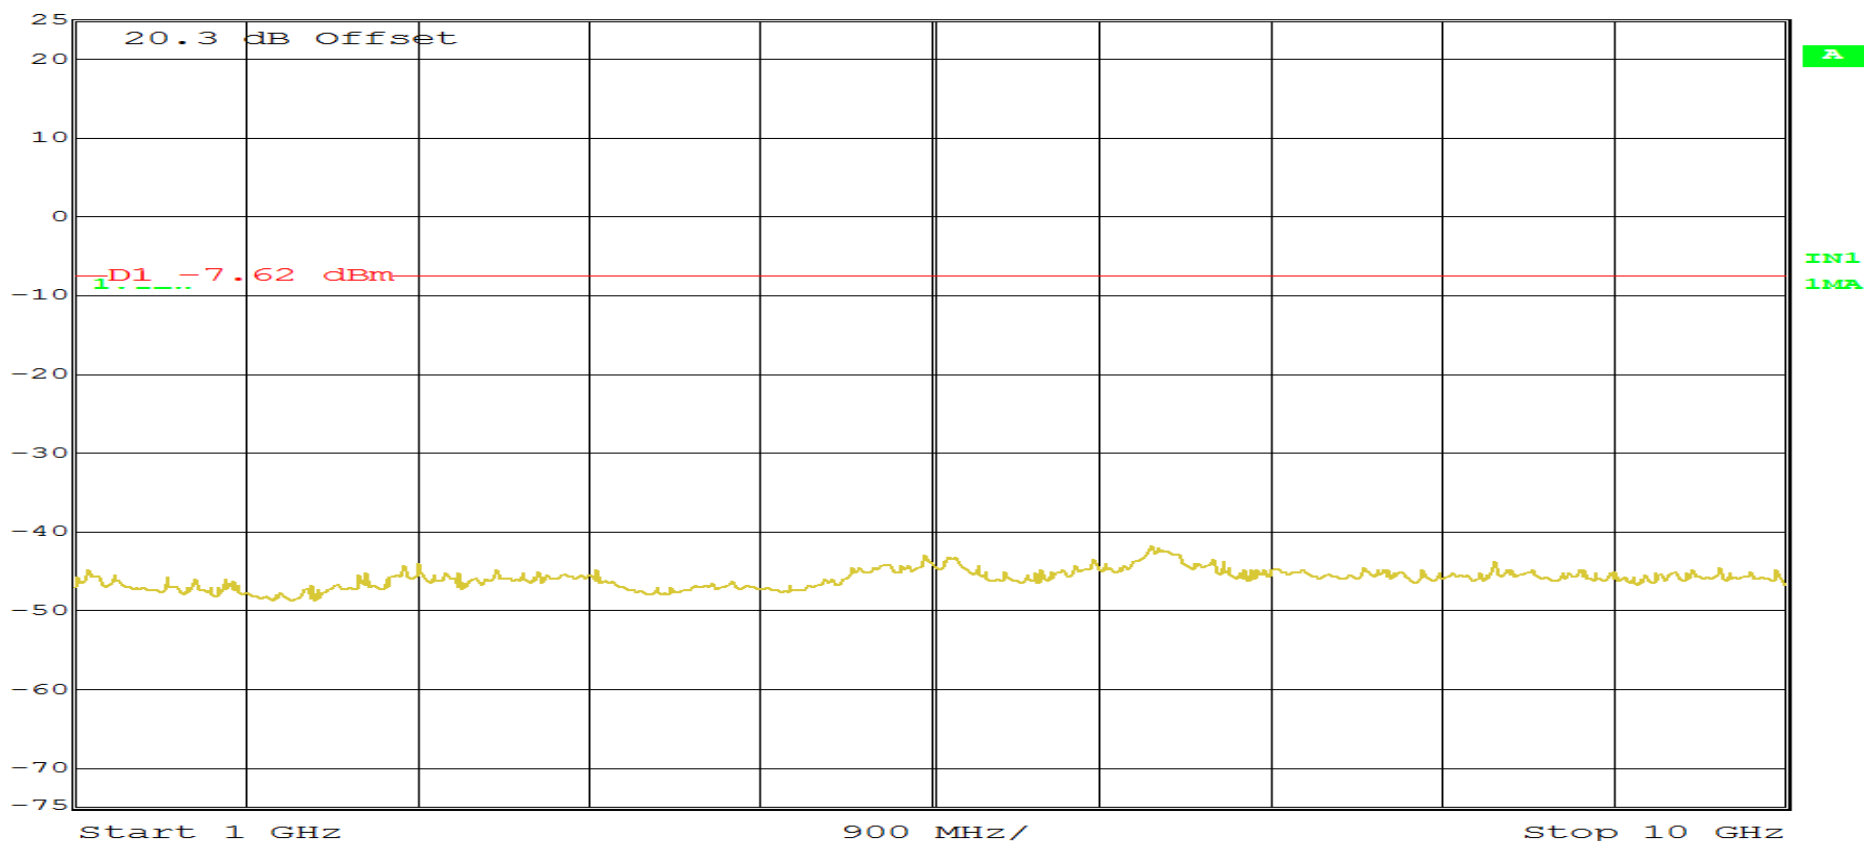

Date: 1.MAR.2016 12:07:24
Page 6 of 6

**Antenna Terminal Out of Band/Band Edge Conducted Emissions, 25 MHz to 10 GHz
Test Data**



Retlif Testing Laboratories

Report No. R-6046N-4

**Band Edge Conducted
FHSS Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

Test Method:	Band Edge Conducted		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 902.3 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Limit: -7.5 dBm		

Agilent 15:12:24 Feb 29, 2016

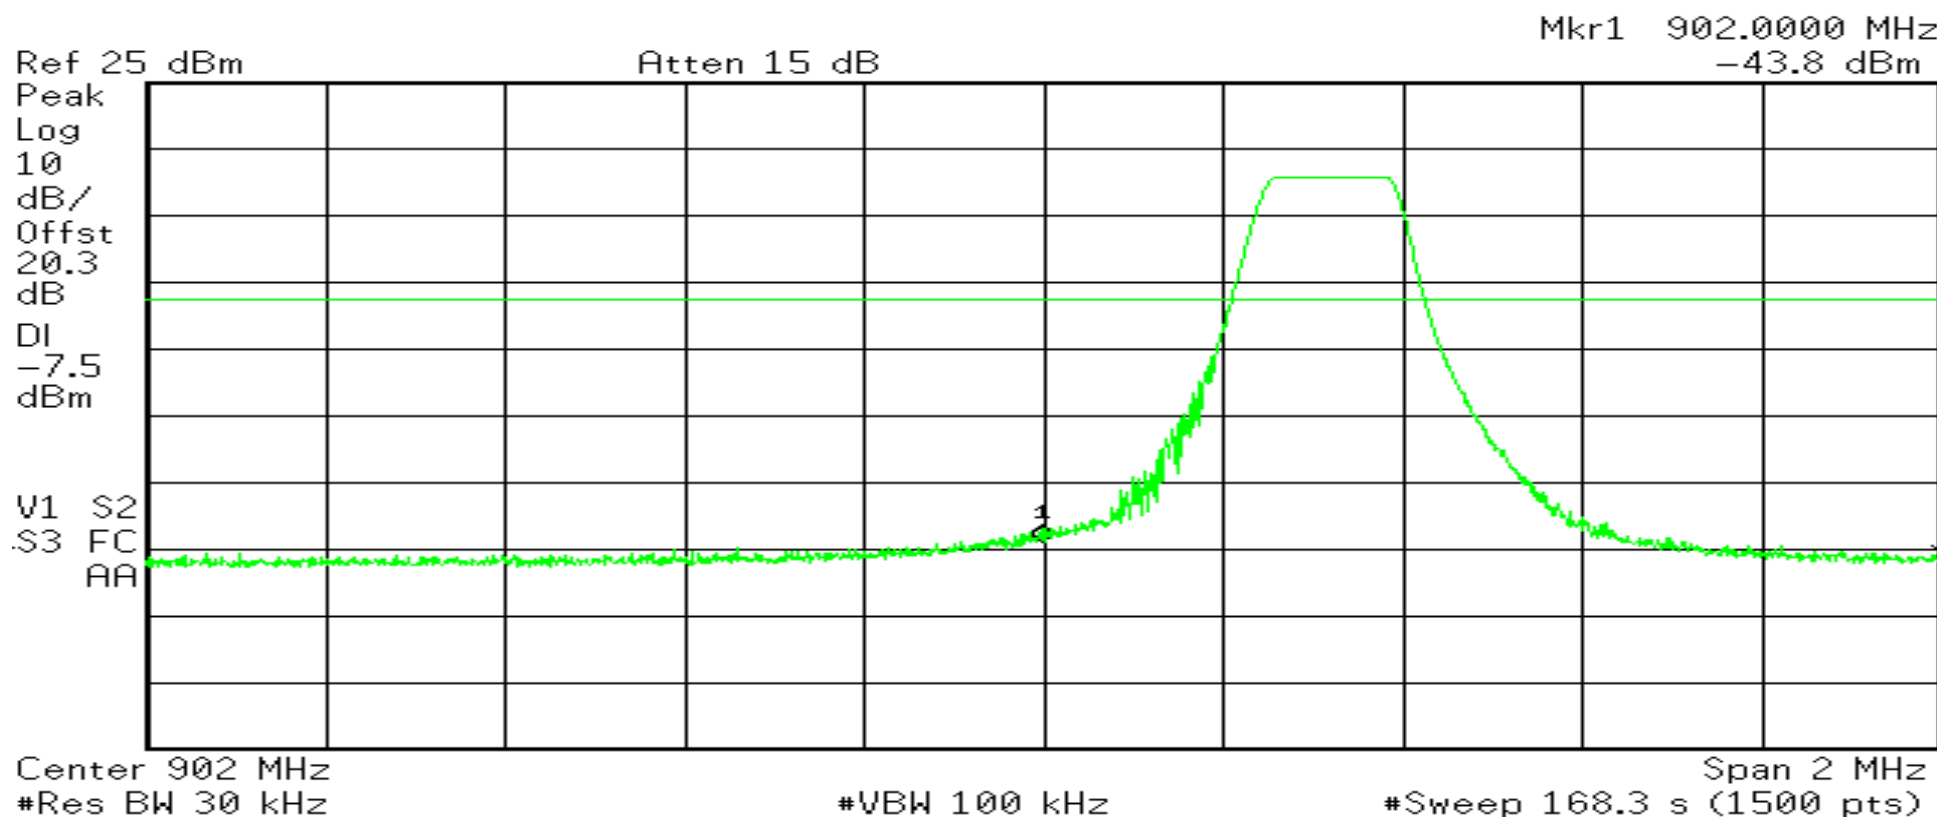


RETLIF TESTING LABORATORIES

Test Method:	Band Edge Conducted		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 914.9 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 C Relative Humidity: 18.5 %		
Notes	Limit: -7.5 dBm		

 **Agilent** 15:02:39 Feb 29, 2016

Ref 25 dBm

Atten 15 dB

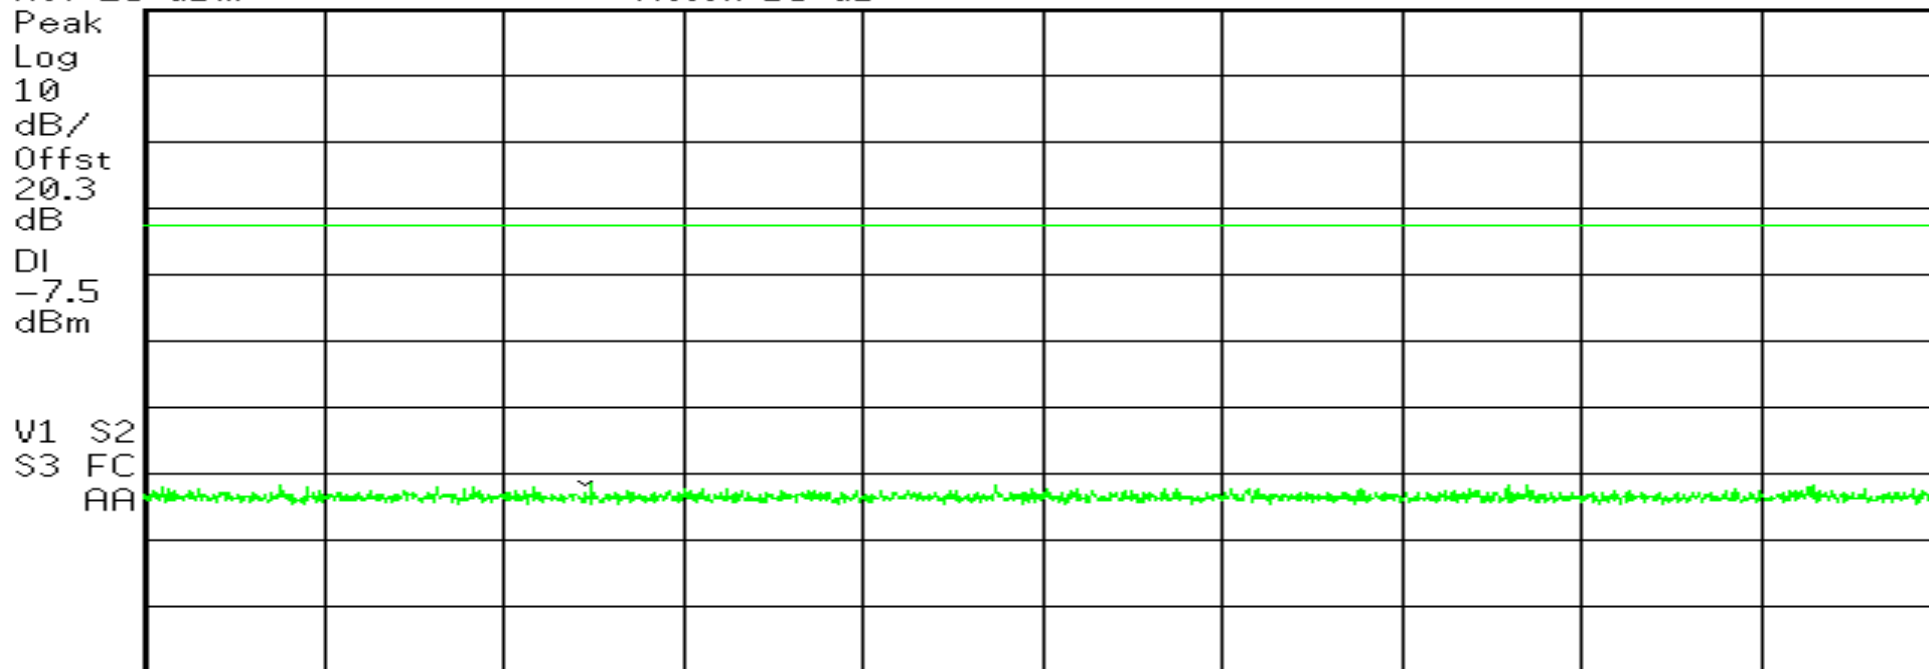

Center 928 MHz

#Res BW 30 kHz

#VBW 100 kHz

Span 2 MHz

#Sweep 20 s (1500 pts)

**Out of Band Conducted Emissions
FHSS Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 902.3 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Limit: -7.5 dBm		


Agilent 14:32:01 Feb 29, 2016

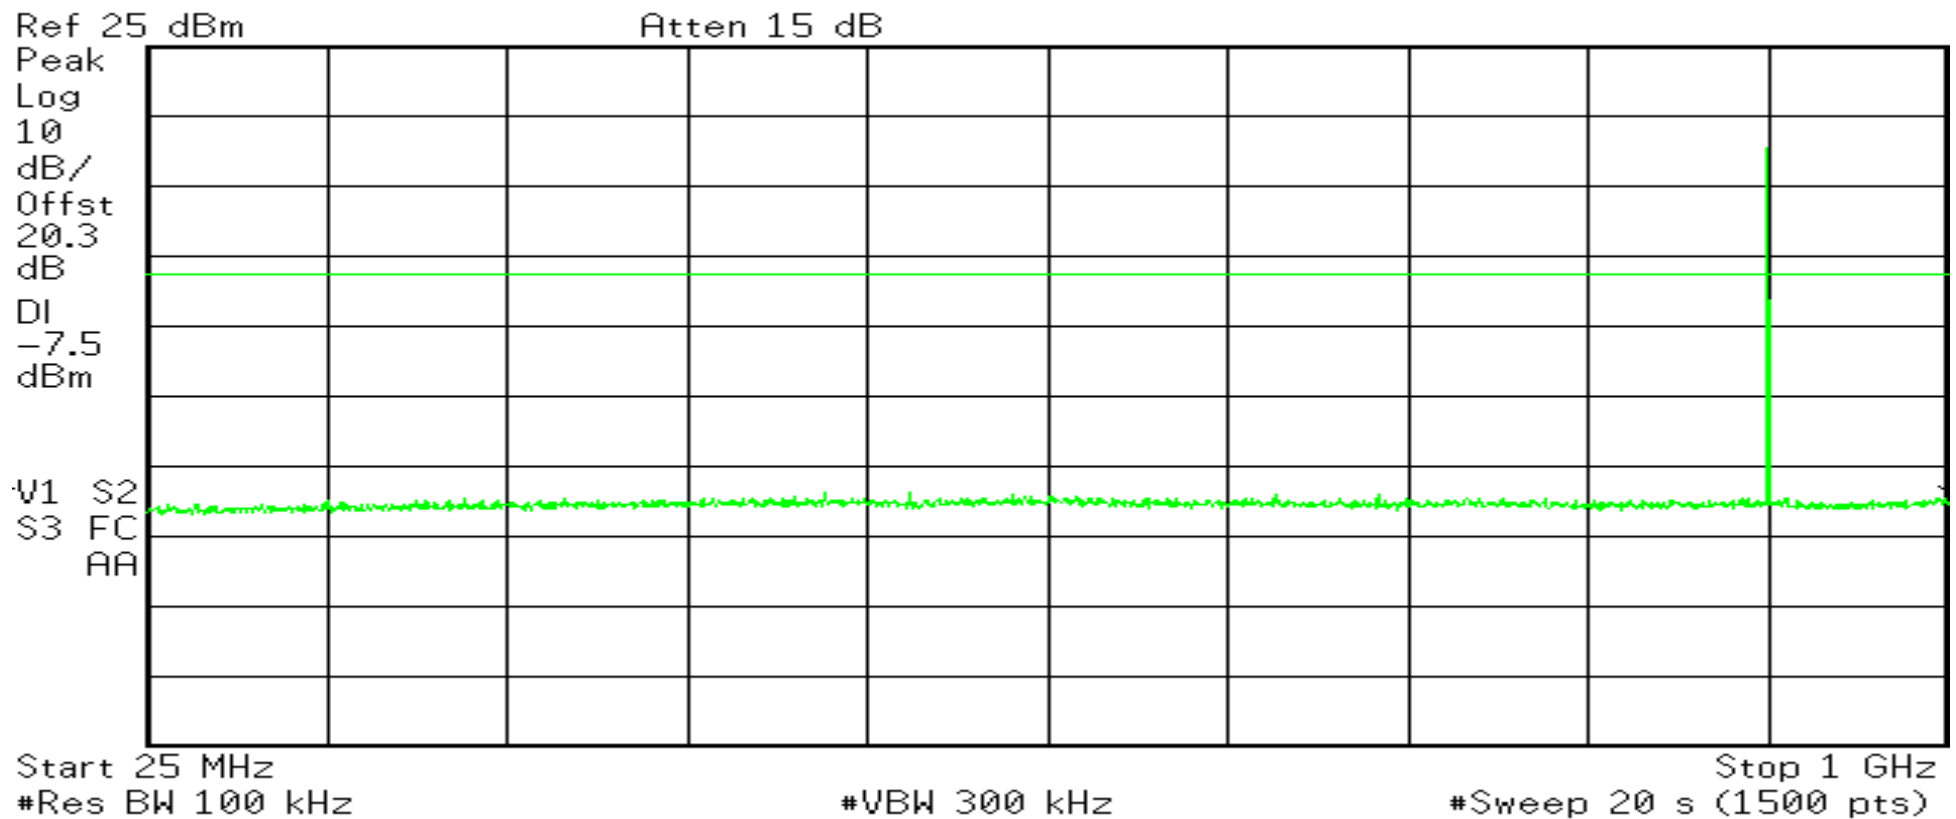

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 902.3 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Limit: -7.5 dBm		


Agilent 14:36:15 Feb 29, 2016

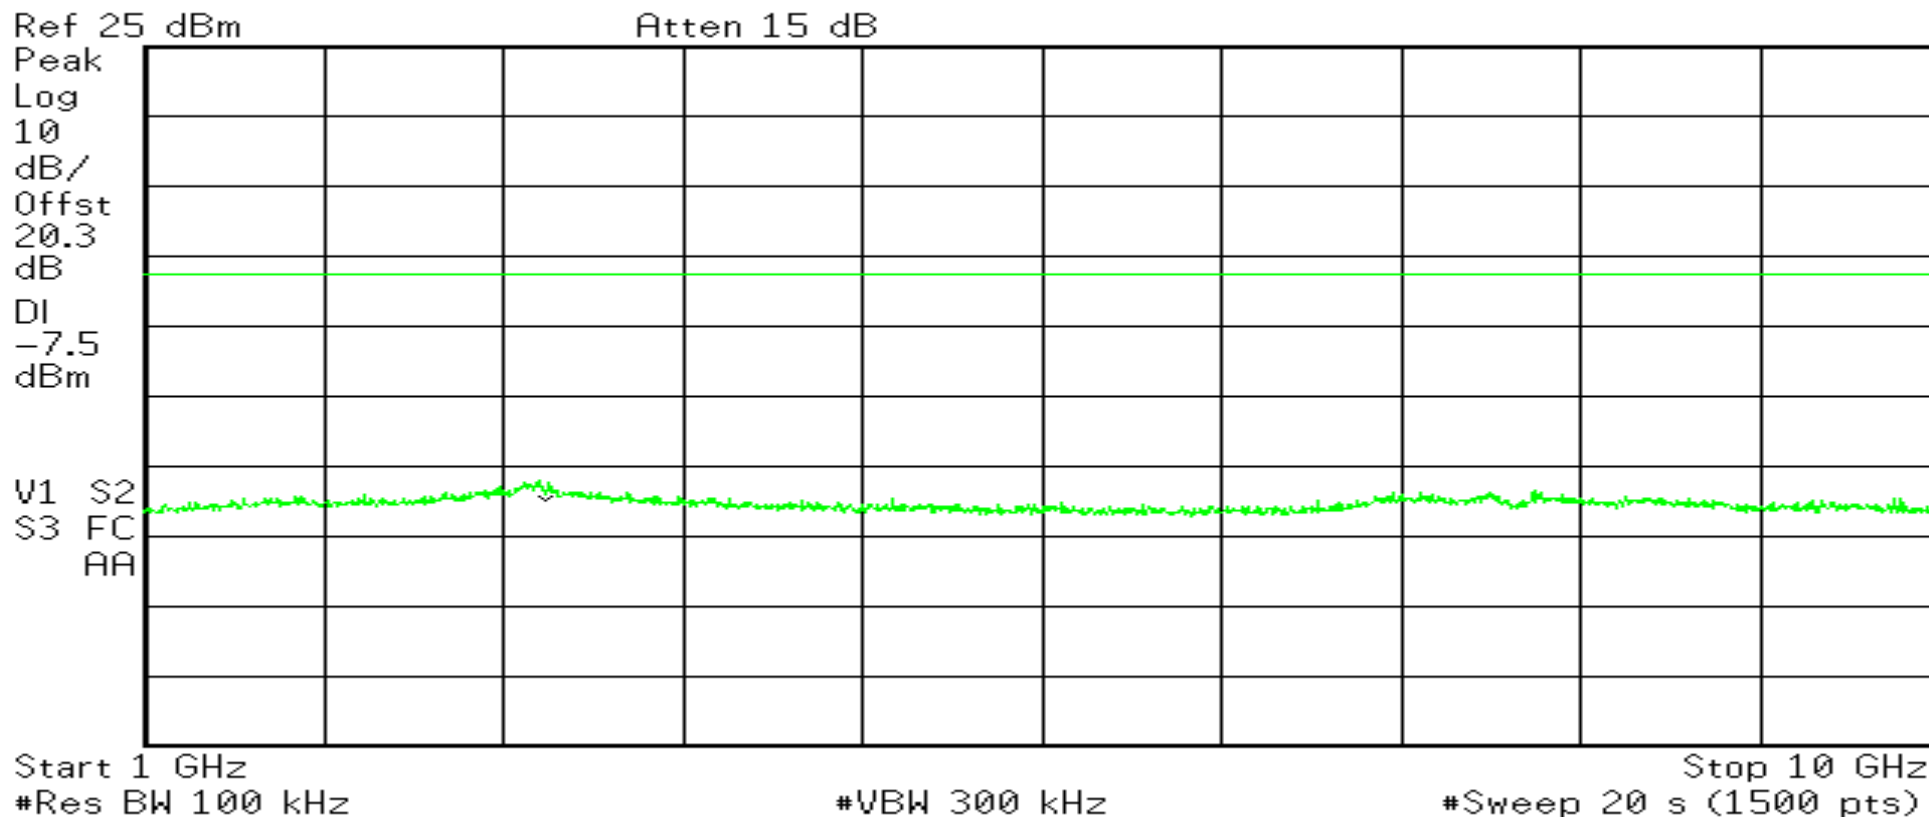

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 908.5 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Limit: -7.5 dBm		


Agilent 14:47:21 Feb 29, 2016

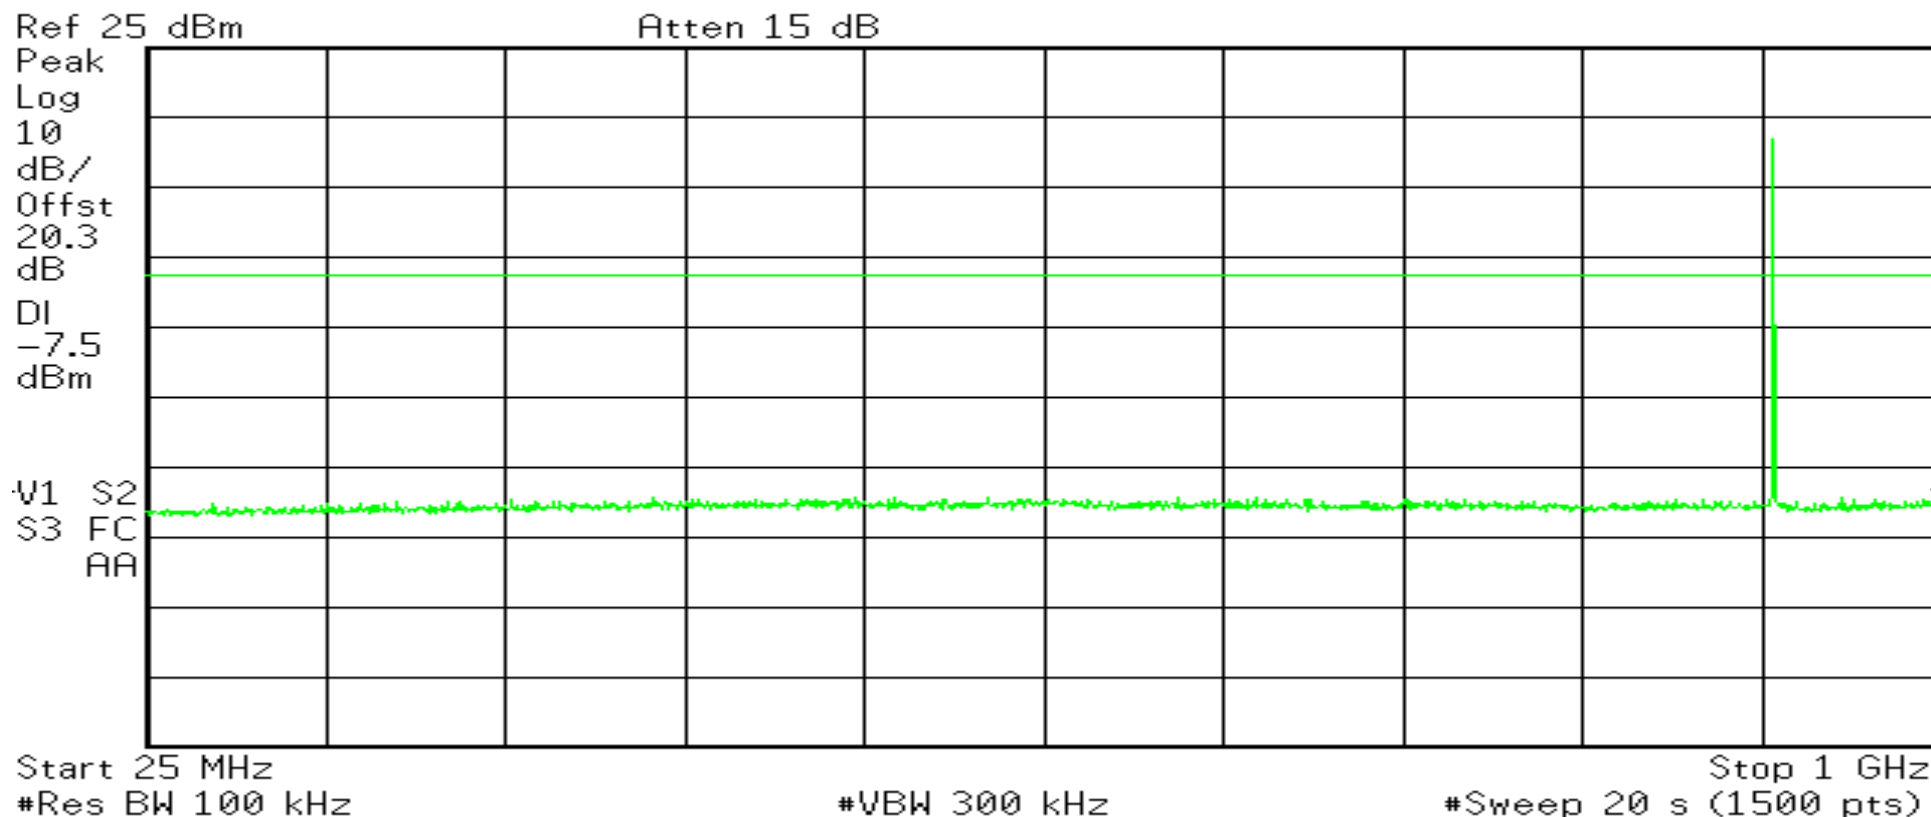

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 908.5 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Limit: -7.5 dBm		


Agilent 14:43:09 Feb 29, 2016

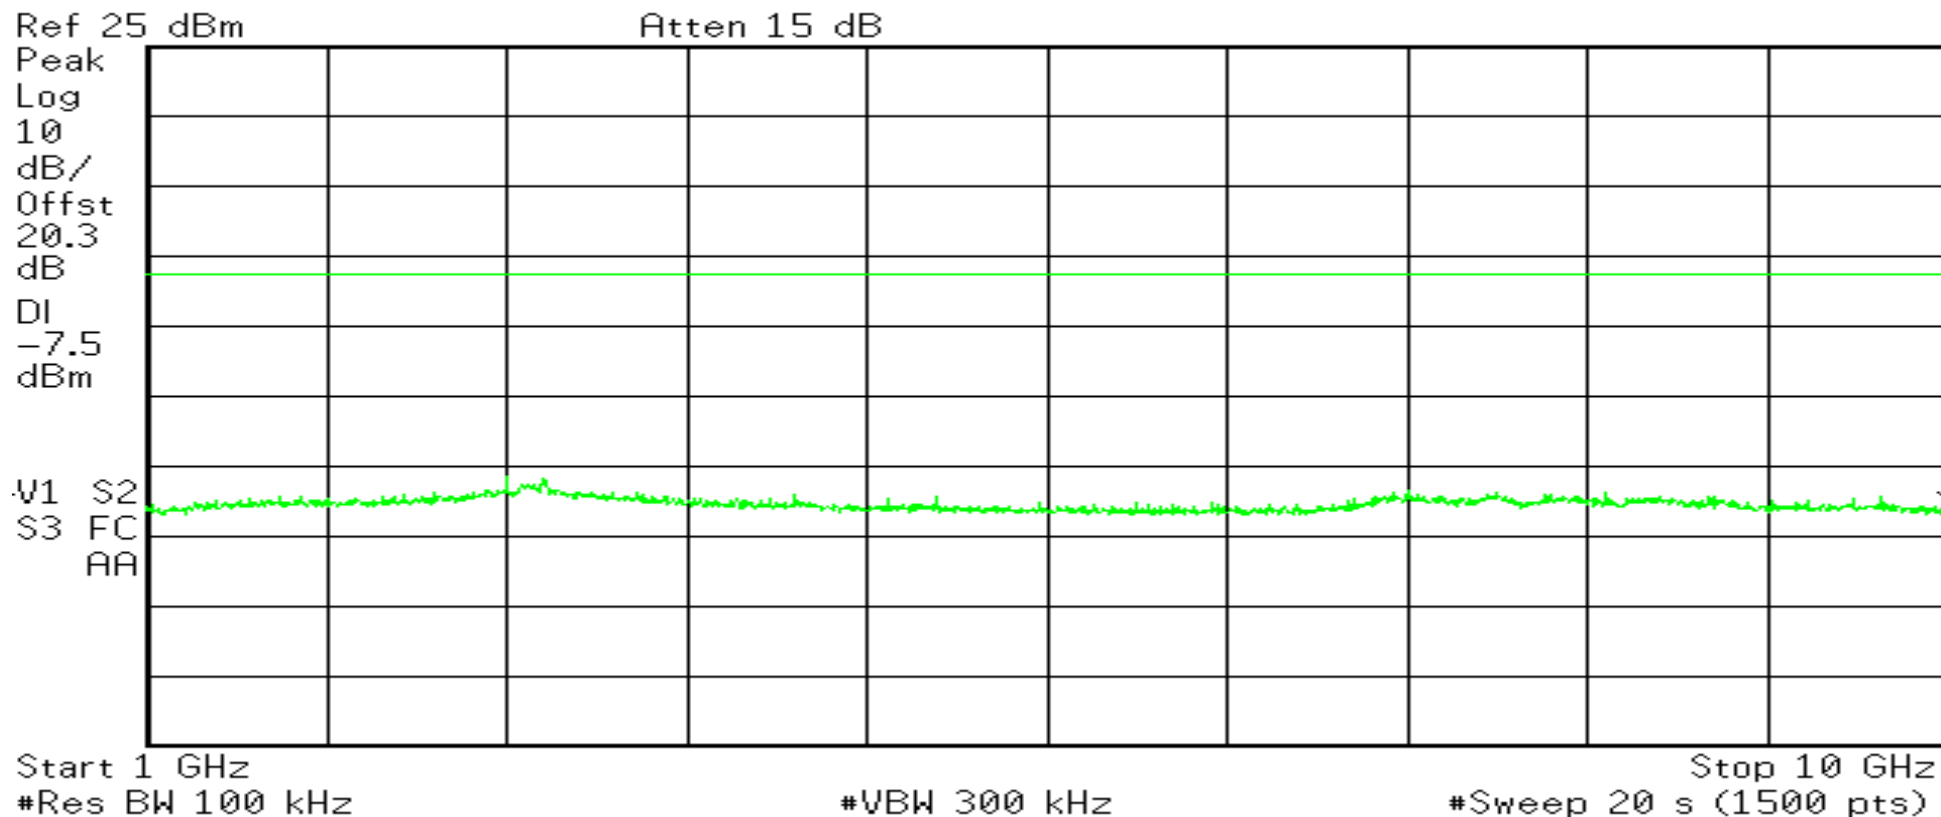

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 914.9 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Limit: -7.5 dBm		


Agilent 14:50:46 Feb 29, 2016

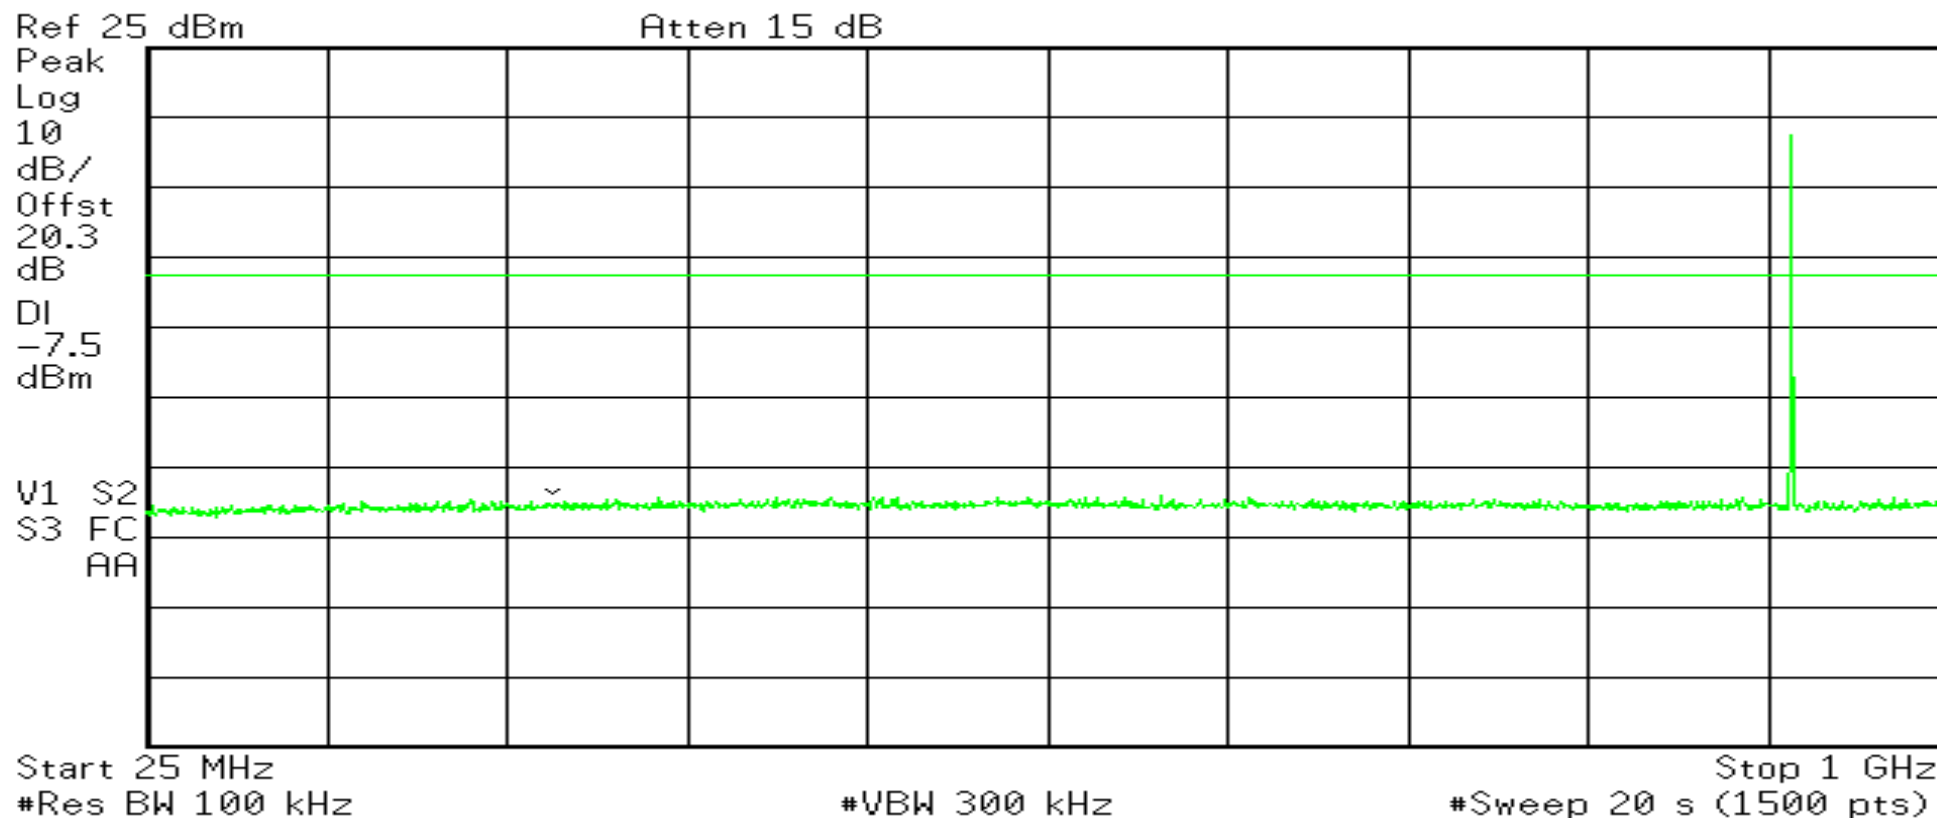

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 10 GHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 914.9 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Limit: -7.5 dBm		

Agilent 14:58:25 Feb 29, 2016

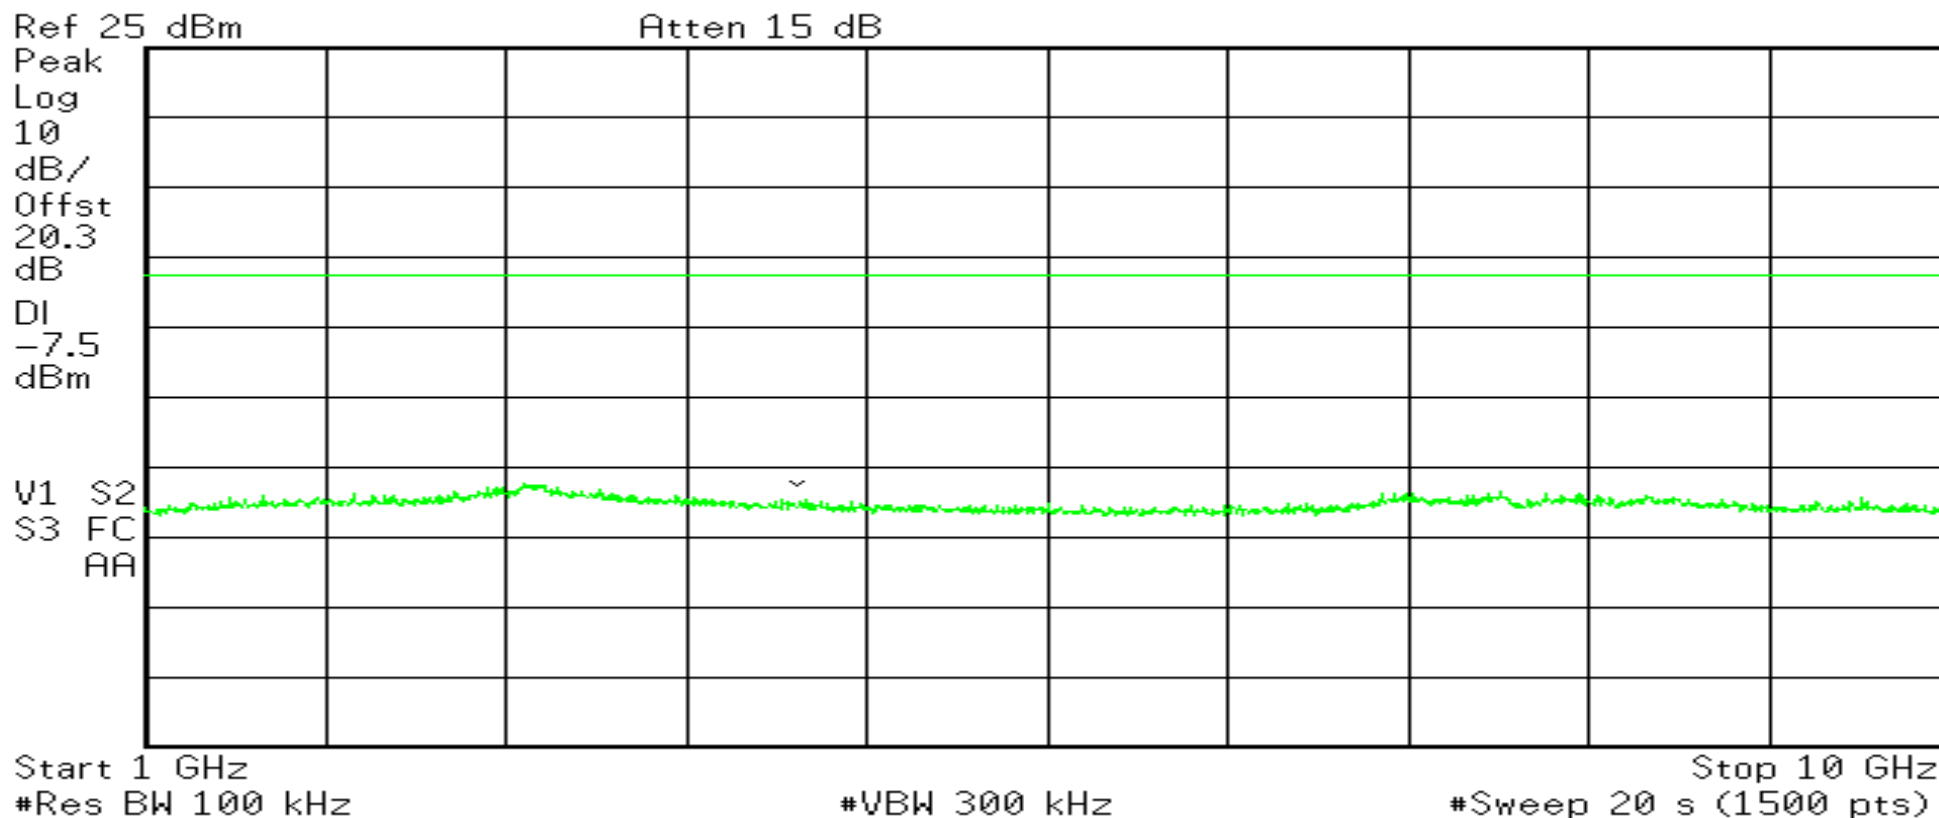


Test Photograph(s)
Out of Band/Band Edge Radiated Emissions, 30 MHz to 10 GHz
FCC Section 15.247(d)



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
Out of Band/Band Edge Radiated Emissions

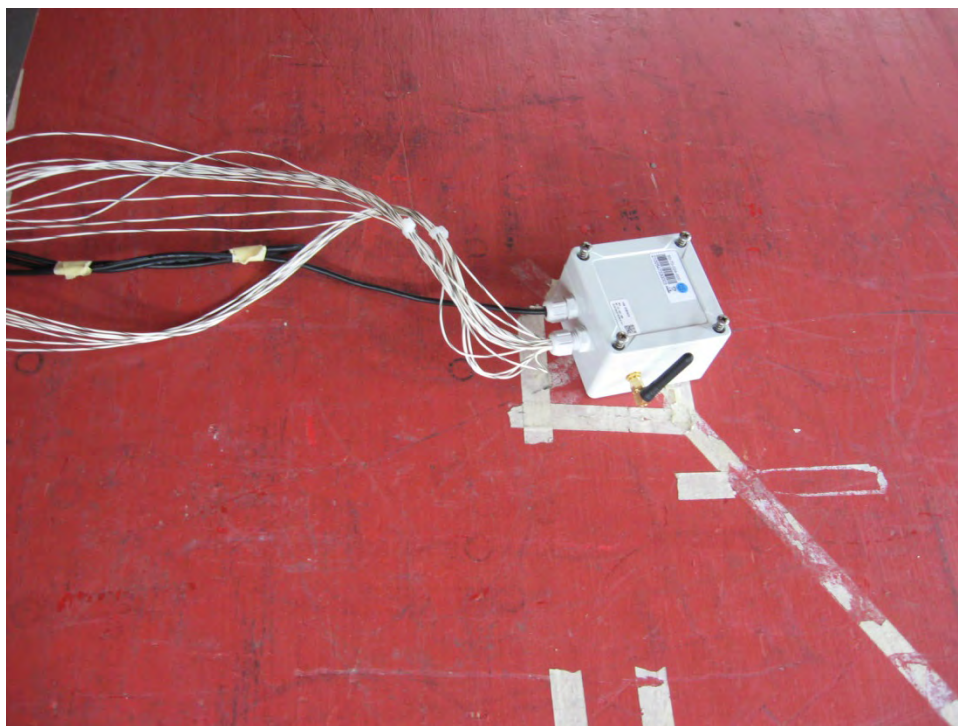

Test Setup



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
Out of Band/Band Edge Radiated Emissions



30 MHz – 1 GHz, Horizontal Polarization



30 MHz – 1 GHz, Vertical Polarization



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
Out of Band/Band Edge Radiated Emissions



1 GHz – 10 GHz, Horizontal Polarization



1 GHz – 10 GHz, Vertical Polarization



Retlif Testing Laboratories

Report No. R-6046N-4

**Unwanted Emissions into Restricted Frequency Bands
30 MHz to 10 GHz
DTS Test Data**



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated(DTS) signal	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
37.50	-	-	-	-			-	100.00
	38.00	9.00	14.20	23.20	*		14.45	I
38.25	-	-	-	-			-	100.00
73.00	-	-	-	-			-	100.00
	74.00	14.14	8.36	22.50	*		13.34	I
74.60	-	-	-	-			-	100.00
74.80	-	-	-	-			-	100.00
	75.00	14.14	8.36	22.50	*		13.24	
75.20	-	-	-	-			-	100.00
108.00	-	-	-	-			-	150.00
	115.00	4.68	10.02	14.70	*		5.43	
	-	-	-	-			-	
121.94	-	-	-	-			-	150.00
123.00	-	-	-	-			-	150.00
	132.00	3.06	9.44	12.50	*		4.22	
	-	-	-	-			-	
138.00	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 1 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated(DTS) signal	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
149.90	-	-	-	-			-	150.00
	150.00	9.53	11.17	20.70	*		10.84	
150.05	-	-	-	-			-	150.00
156.52	-	-	-	-			-	150.00
	156.52	2.02	12.08	14.10	*		5.07	
156.52	-	-	-	-			-	150.00
156.70	-	-	-	-			-	150.00
	156.80	1.88	12.12	14.00	*		5.01	
156.90	-	-	-	-			-	150.00
162.01	-	-	-	-			-	150.00
	165.00	1.62	12.68	14.30	*		5.19	
167.17	-	-	-	-			-	150.00
167.72	-	-	-	-			-	150.00
	170.00	2.30	12.80	15.10	*		5.69	
173.20	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 2 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated(DTS) signal	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
240.00	-	-	-	-			-	200.00
	260.00	-0.75	16.85	16.10	*		6.38	
285.00	-	-	-	-			-	200.00
322.80	-	-	-	-			-	200.00
	330.00	0.39	18.91	19.30	*		9.23	
335.40	-	-	-	-			-	200.00
399.90	-	-	-	-			-	200.00
	405.00	0.61	21.49	22.10	*		12.74	
410.00	-	-	-	-			-	200.00
608.00	-	-	-	-			-	200.00
	611.00	-0.64	27.34	26.70	*		21.63	
614.00	-	-	-	-			-	200.00
960.00	-	-	-	-			-	500.00
	975.00	1.00	32.10	33.10	*		45.19	
1240.00	-	-	-	-			-	500.00
1300.00	-	-	-	-			-	500.00
	1350.00	33.38	-9.50	23.88	*		15.63	
1427.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 3 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated(DTS) signal	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
1435.00	-	-	-	-			-	500.00
	1500.00	33.94	-7.65	26.29	*		20.63	
1646.50	-	-	-	-			-	500.00
1660.00	-	-	-	-			-	500.00
	1680.00	32.52	-6.71	25.81	*		19.52	
1710.00	-	-	-	-			-	500.00
1718.80	-	-	-	-			-	500.00
	1720.00	33.44	-6.51	26.93	*		22.21	
1722.20	-	-	-	-			-	500.00
2200.00	-	-	-	-			-	500.00
	2250.00	33.34	-4.20	29.14	*		28.64	
2300.00	-	-	-	-			-	500.00
2310.00	-	-	-	-			-	500.00
	2360.00	33.67	-3.78	29.89	*		31.22	
2390.00	-	-	-	-			-	500.00
2483.50	-	-	-	-			-	500.00
	2490.00	33.10	-3.30	29.80	*		30.90	
2500.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 4 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated(DTS) signal	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
2690.00	-	-	-	-			-	500.00
	2709.00	52.45	-2.55	49.90			312.61	
	2723.40	53.18	-2.50	50.68			341.98	
	2742.60	53.48	-2.44	51.04			356.45	
2900.00	-	-	-	-			-	500.00
3260.00	-	-	-	-			-	500.00
	3263.00	32.82	-0.89	31.93	*		39.49	
3267.00	-	-	-	-			-	500.00
3332.00	-	-	-	-			-	500.00
	3336.00	34.05	-0.70	33.35	*		46.51	
3339.00	-	-	-	-			-	500.00
3345.00	-	-	-	-			-	500.00
	3350.00	32.77	-0.66	32.11	*		40.32	
3358.00	-	-	-	-			-	500.00
3600.00	-	-	-	-			-	500.00
	3612.00	29.61	0.01	29.62	*		30.27	
	3631.20	29.59	0.06	29.65	*		30.37	
	3656.80	29.82	0.12	29.94	*		31.41	

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 5 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated(DTS) signal	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band MHz	Measured Frequency MHz	Meter Reading dBuV	Correction Factor dB	Corrected Reading dBuV/m			Converted Reading uV/m	Limit at 3M uV/m
	-	-	-	-			-	
4400.00	-	-	-	-			-	500.00
4500.00	-	-	-	-			-	500.00
	4515.00	28.54	1.67	30.21	*		32.40	
	4539.00	28.17	1.70	29.87	*		31.15	
	4571.00	28.59	1.74	30.33	*		32.85	
	-	-	-	-			-	
5150.00	-	-	-	-			-	500.00
5350.00	-	-	-	-			-	500.00
	5400.00	32.10	2.77	34.87	*		55.40	
5460.00	-	-	-	-			-	500.00
7250.00	-	-	-	-			-	500.00
	5400.00	32.10	2.77	34.87	*		55.40	
7750.00	-	-	-	-			-	500.00
8025.00	-	-	-	-			-	500.00
	8127.00	30.35	4.65	35.00	*		56.23	
	8170.20	30.65	5.30	35.95	*		62.73	
	8227.80	30.18	5.33	35.51	*		59.63	
	-	-	-	-			-	
8500.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 6 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated(DTS) signal	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10^{ Corrected Reading /20}

TEST PARAMETERS

[illegible]

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 7 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

**Unwanted Emissions into Restricted Frequency Bands
30 MHz to 10 GHz
FHSS Test Data**



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting hopping frequency data	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
37.50	-	-	-	-			-	100.00
	38.00	9.00	14.20	23.20	*		14.45	I
38.25	-	-	-	-			-	100.00
73.00	-	-	-	-			-	100.00
	74.00	14.14	8.36	22.50	*		13.34	I
74.60	-	-	-	-			-	100.00
74.80	-	-	-	-			-	100.00
	75.00	14.14	8.36	22.50	*		13.24	
75.20	-	-	-	-			-	100.00
108.00	-	-	-	-			-	150.00
	115.00	4.68	10.02	14.70	*		5.43	
	-	-	-	-			-	
121.94	-	-	-	-			-	150.00
123.00	-	-	-	-			-	150.00
	132.00	3.06	9.44	12.50	*		4.22	
	-	-	-	-			-	
138.00	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 1 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting hopping frequency data	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
149.90	-	-	-	-			-	150.00
	150.00	9.53	11.17	20.70	*		10.84	
150.05	-	-	-	-			-	150.00
156.52	-	-	-	-			-	150.00
	156.52	2.02	12.08	14.10	*		5.07	
156.52	-	-	-	-			-	150.00
156.70	-	-	-	-			-	150.00
	156.80	1.88	12.12	14.00	*		5.01	
156.90	-	-	-	-			-	150.00
162.01	-	-	-	-			-	150.00
	165.00	1.62	12.68	14.30	*		5.19	
167.17	-	-	-	-			-	150.00
167.72	-	-	-	-			-	150.00
	170.00	2.30	12.80	15.10	*		5.69	
173.20	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 2 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting hopping frequency data	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
240.00	-	-	-	-			-	200.00
	260.00	-0.75	16.85	16.10	*		6.38	
285.00	-	-	-	-			-	200.00
322.80	-	-	-	-			-	200.00
	330.00	0.39	18.91	19.30	*		9.23	
335.40	-	-	-	-			-	200.00
399.90	-	-	-	-			-	200.00
	405.00	0.61	21.49	22.10	*		12.74	
410.00	-	-	-	-			-	200.00
608.00	-	-	-	-			-	200.00
	611.00	-0.64	27.34	26.70	*		21.63	
614.00	-	-	-	-			-	200.00
960.00	-	-	-	-			-	500.00
	975.00	1.00	32.10	33.10	*		45.19	
1240.00	-	-	-	-			-	500.00
1300.00	-	-	-	-			-	500.00
	1350.00	33.38	-9.50	23.88	*		15.63	
1427.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 3 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting hopping frequency data	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
1435.00	-	-	-	-			-	500.00
	1500.00	33.94	-7.65	26.29	*		20.63	
1646.50	-	-	-	-			-	500.00
1660.00	-	-	-	-			-	500.00
	1680.00	32.52	-6.71	25.81	*		19.52	
1710.00	-	-	-	-			-	500.00
1718.80	-	-	-	-			-	500.00
	1720.00	33.44	-6.51	26.93	*		22.21	
1722.20	-	-	-	-			-	500.00
2200.00	-	-	-	-			-	500.00
	2250.00	33.34	-4.20	29.14	*		28.64	
2300.00	-	-	-	-			-	500.00
2310.00	-	-	-	-			-	500.00
	2360.00	33.67	-3.78	29.89	*		31.22	
2390.00	-	-	-	-			-	500.00
2483.50	-	-	-	-			-	500.00
	2490.00	33.10	-3.30	29.80	*		30.90	
2500.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 4 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting hopping frequency data	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
2690.00	-	-	-	-			-	500.00
	2706.90	30.17	-2.56	27.61	*		24.02	
	2725.50	30.26	-2.49	27.77	*		24.46	
	2744.70	30.40	-2.43	27.97	*		25.03	
2900.00	-	-	-	-			-	500.00
3260.00	-	-	-	-			-	500.00
	3263.00	32.82	-0.89	31.93	*		39.49	
3267.00	-	-	-	-			-	500.00
3332.00	-	-	-	-			-	500.00
	3336.00	34.05	-0.70	33.35	*		46.51	
3339.00	-	-	-	-			-	500.00
3345.00	-	-	-	-			-	500.00
	3350.00	32.77	-0.66	32.11	*		40.32	
3358.00	-	-	-	-			-	500.00
3600.00	-	-	-	-			-	500.00
	3609.20	29.42	0.00	29.42	*		29.58	
	3659.60	29.49	0.13	29.62	*		30.27	
	3634.00	29.37	0.07	29.44	*		29.65	

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 5 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting hopping frequency data	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10[^]{ Corrected Reading /20}

TEST PARAMETERS

Restricted Band MHz	Measured Frequency MHz	Meter Reading dBuV	Correction Factor dB	Corrected Reading dBuV/m			Converted Reading uV/m	Limit at 3M uV/m
	-	-	-	-			-	
4400.00	-	-	-	-			-	500.00
4500.00	-	-	-	-			-	500.00
	4511.50	28.04	1.66	29.70	*		30.55	
	4574.50	28.55	1.75	30.30	*		32.73	
	4542.50	27.89	1.71	29.60	*		30.20	
	-	-	-	-			-	
5150.00	-	-	-	-			-	500.00
5350.00	-	-	-	-			-	500.00
	5400.00	32.10	2.77	34.87	*		55.40	
5460.00	-	-	-	-			-	500.00
7250.00	-	-	-	-			-	500.00
	7500.00	32.67	3.60	36.27	*		65.09	
7750.00	-	-	-	-			-	500.00
8025.00	-	-	-	-			-	500.00
	8120.70	30.22	5.29	35.51	*		59.63	
	8176.50	30.50	5.34	35.84	*		61.94	
	8234.10	29.72	5.38	35.10	*		56.89	
	-	-	-	-			-	
8500.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 6 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Nke Watteco	
Job Number	R-6046N-4	
Test Sample	IN'O LoRa™ State Report and Output Control Sensor	
Model Number	IN'O	
Serial Number	2100547330002	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting hopping frequency data	
Technician	M. Seamans	
Date	March 4 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz
Corrected Reading(dBuV/M) = Meter Reading (dBuV)+Correction Factor (dB) Converted Reading (uV/M) = 10^{ Corrected Reading /20}

TEST PARAMETERS

[illegible]

* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 7 of 7



Retlif Testing Laboratories

Report No. R-6046N-4

**Test Photograph(s)
Power Density
FCC Section 15.247(e)**



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
Power Density



Test Configuration



Retlif Testing Laboratories

Report No. R-6046N-4

**Power Spectral Density
Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES


Test Method:	Power Spectral Density		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 903 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (e)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Power Spectral Density: 1.81 dBm Limit: 8 dBm		

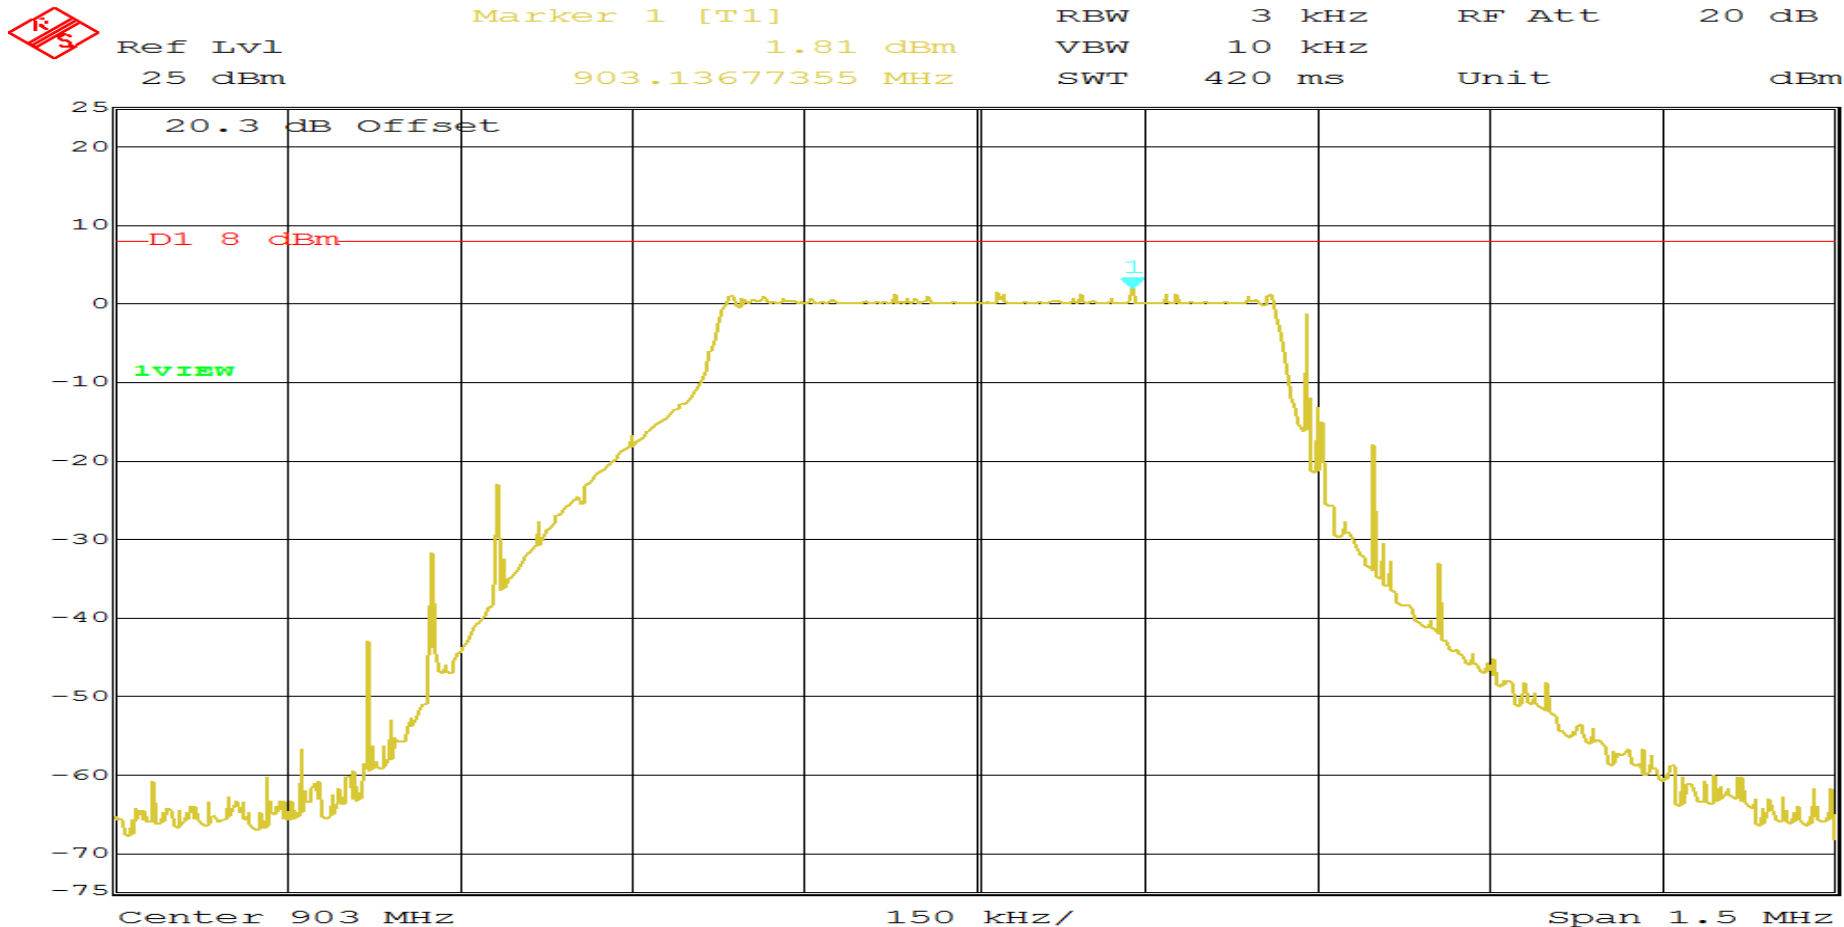

Date: 1.MAR.2016 13:08:38
Page 1 of 3

RETLIF TESTING LABORATORIES


Test Method:	Power Spectral Density		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 907.8 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (e)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Power Spectral Density: 3.30 dBm Limit: 8 dBm		

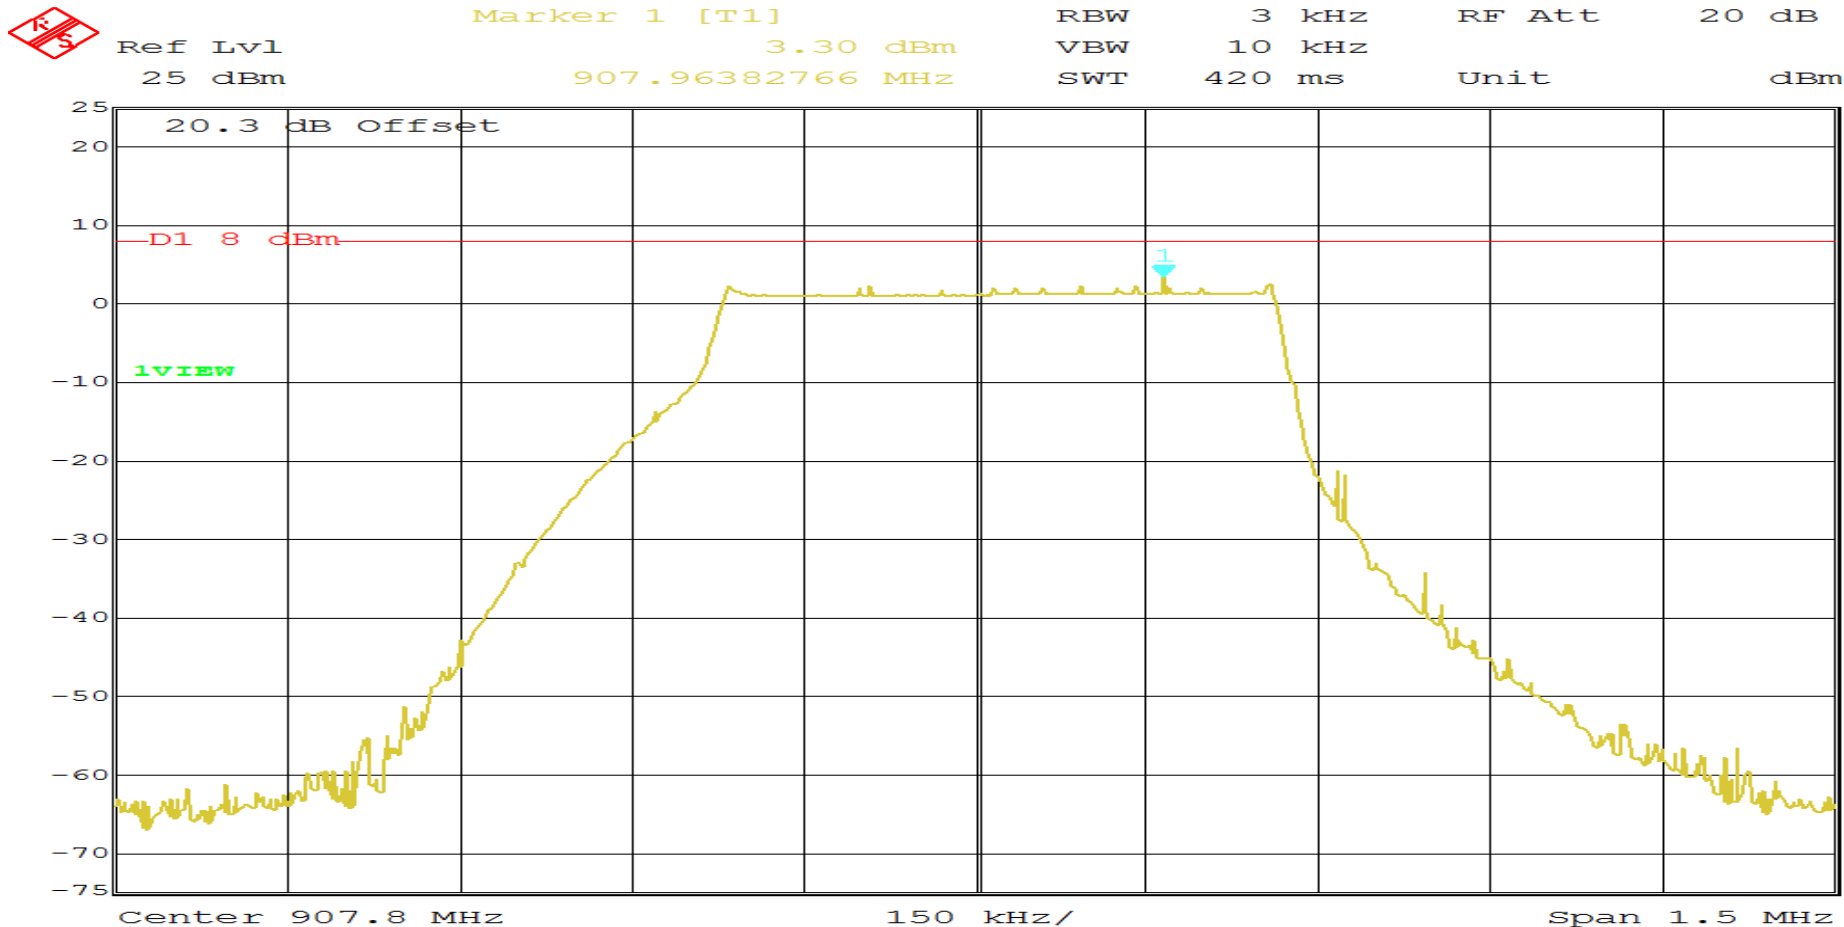

Date: 1.MAR.2016 13:11:33
Page 2 of 3

RETLIF TESTING LABORATORIES

Test Method:	Power Spectral Density		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(DTS) signal at 914.2 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (e)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Power Spectral Density: 4.33 dBm Limit: 8 dBm		

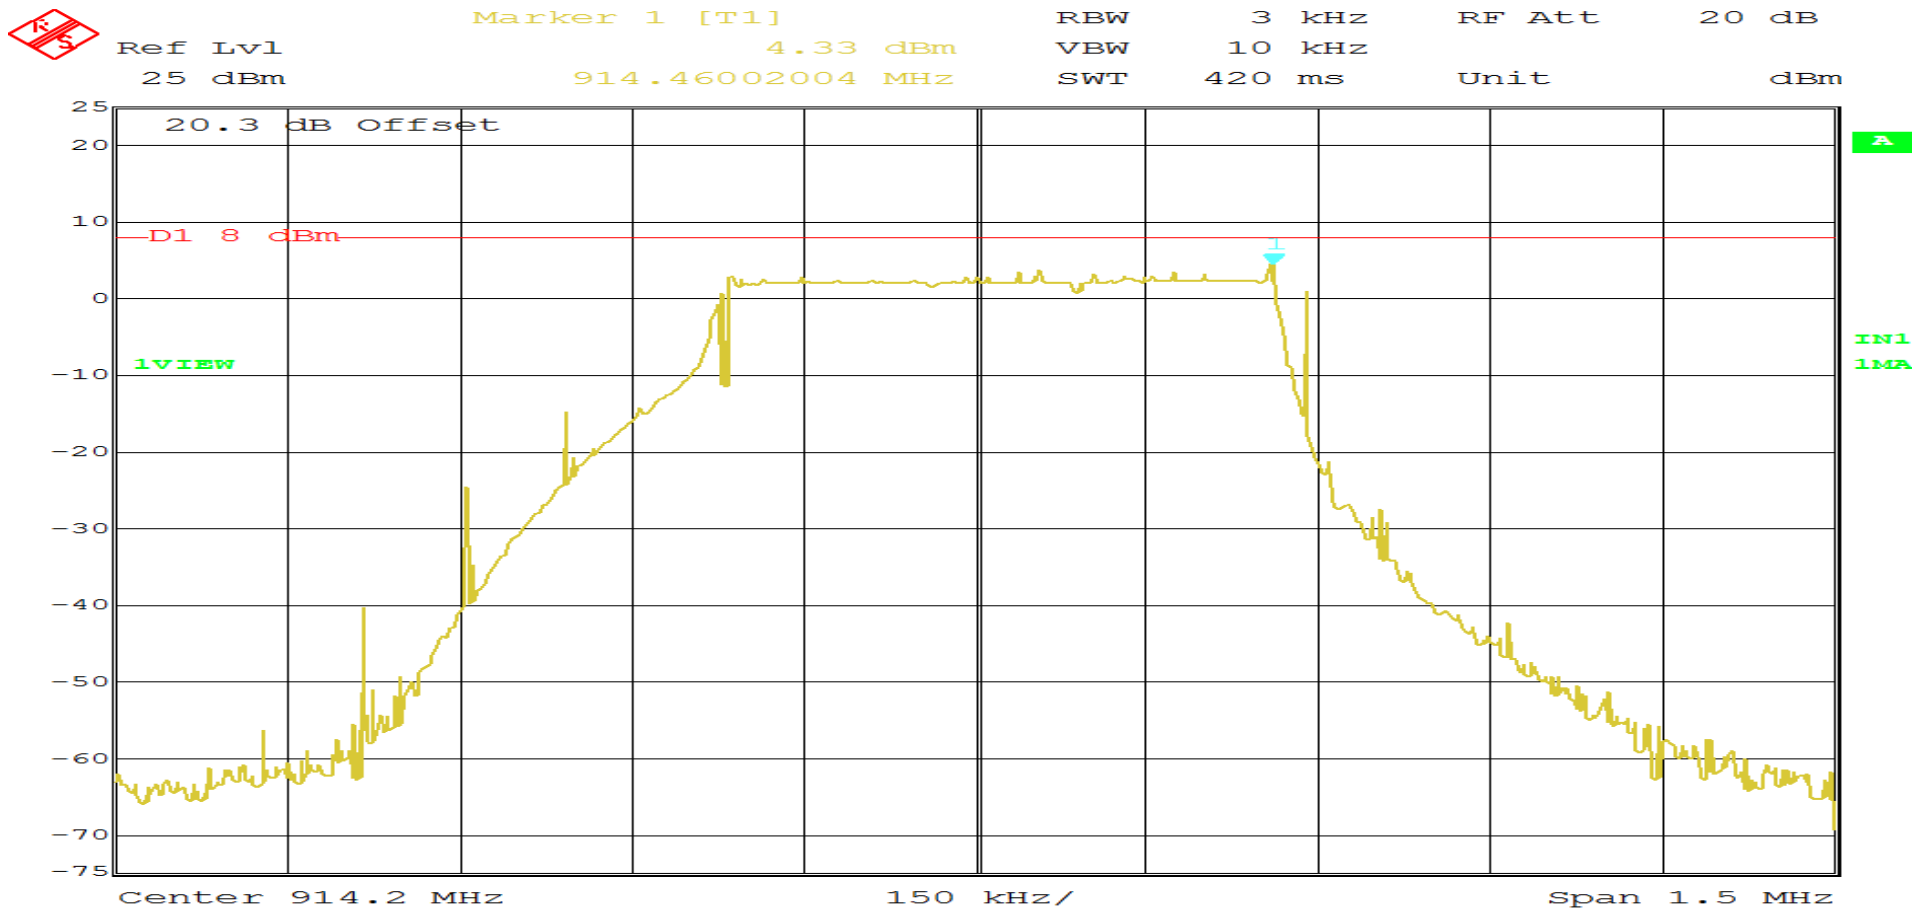

Date: 1.MAR.2016 13:14:31
Page 3 of 3


**Test Photograph(s)
FHSS Bandwidth
20 dB Bandwidth
FCC Section 15.247(a)(1)**



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
FHSS Bandwidth
20 dB Bandwidth

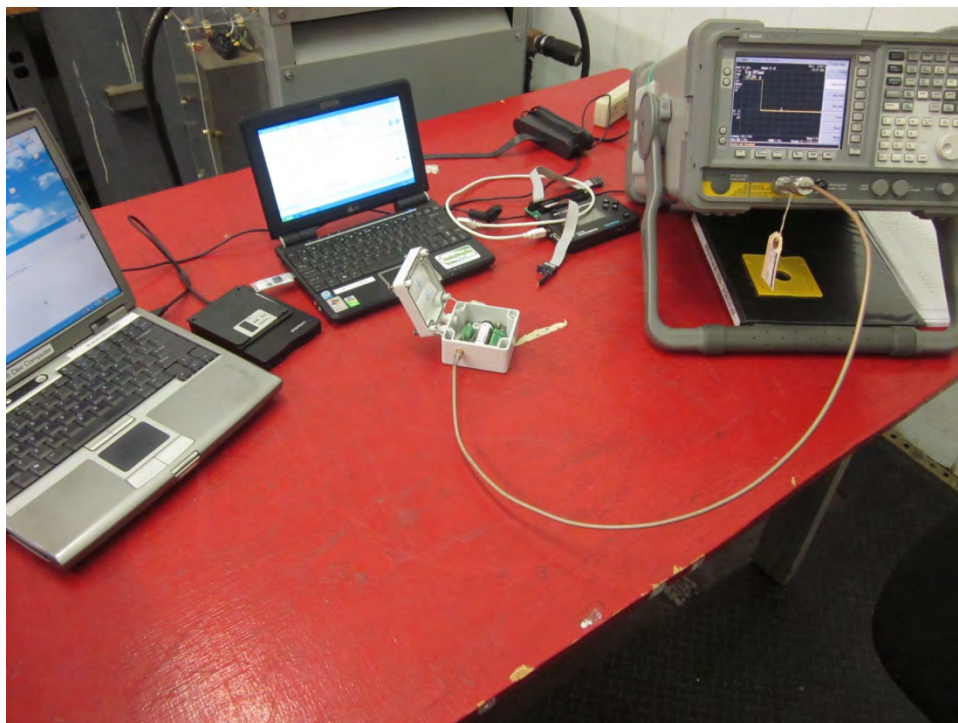

Test Setup



Retlif Testing Laboratories

Report No. R-6046N-4

**FHSS Bandwidth
20 dB Bandwidth
Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

Test Method:	20dB Bandwidth		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 902.3 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Occupied Bandwidth: 167.11 kHz		


Agilent 12:56:41 Feb 29, 2016

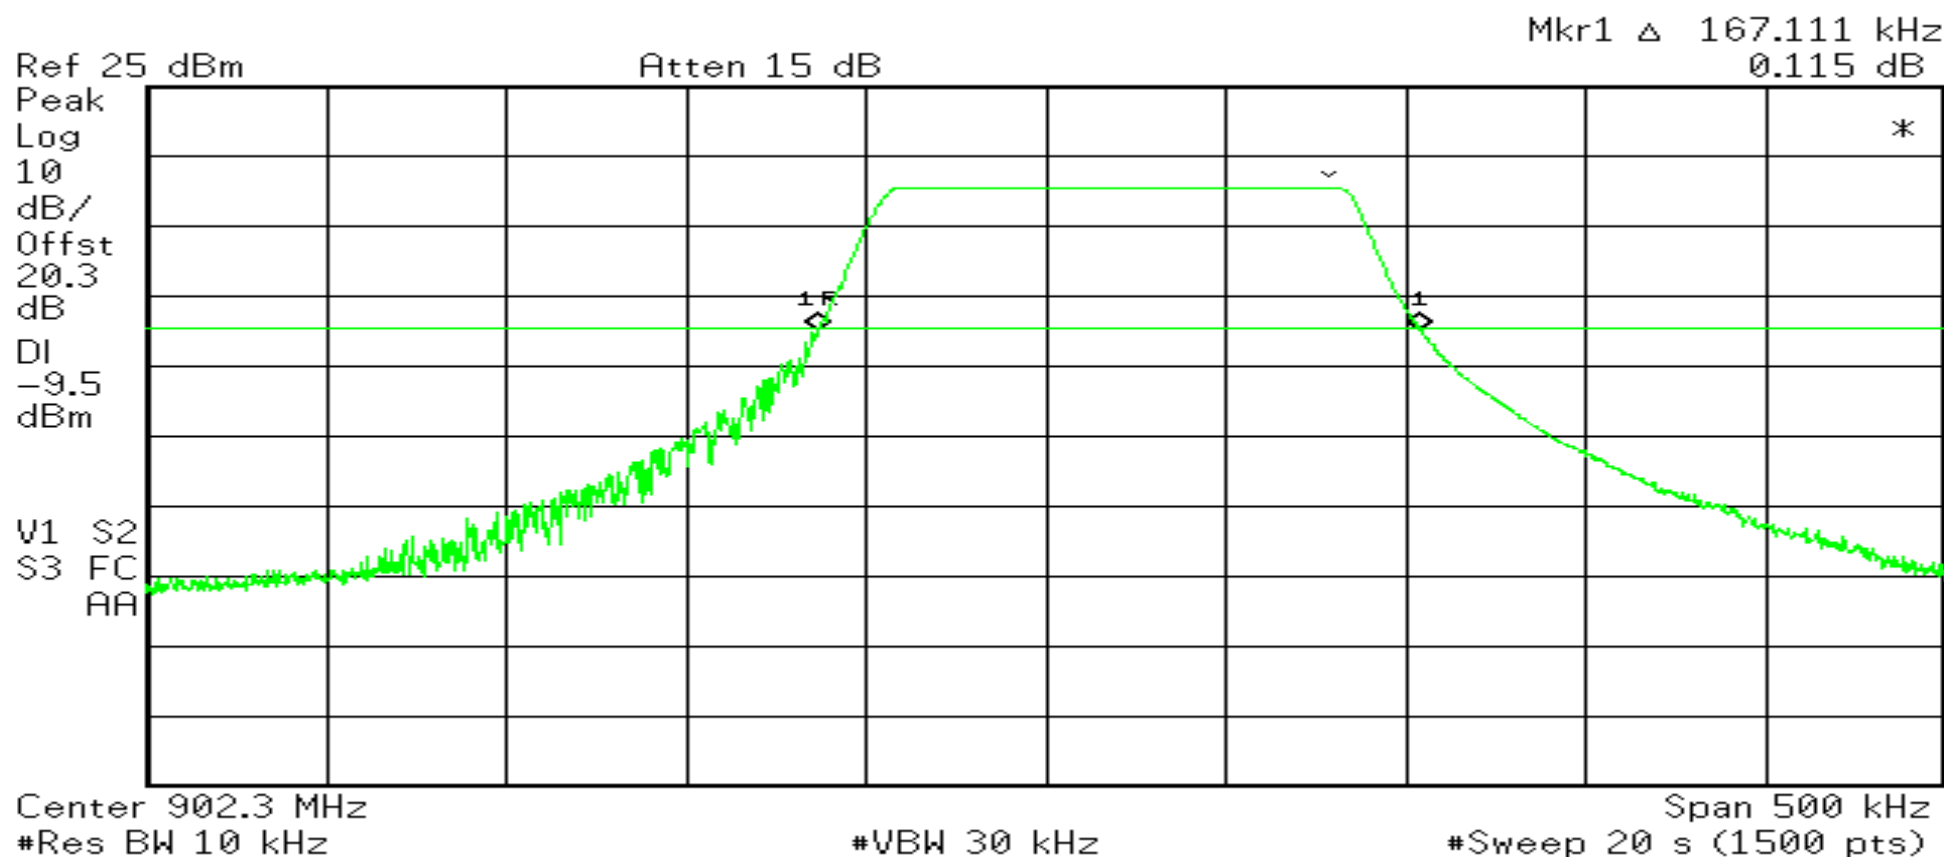

RETLIF TESTING LABORATORIES

Test Method:	20dB Bandwidth		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 908.5 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Occupied Bandwidth: 166.11 kHz		


Agilent 13:07:45 Feb 29, 2016

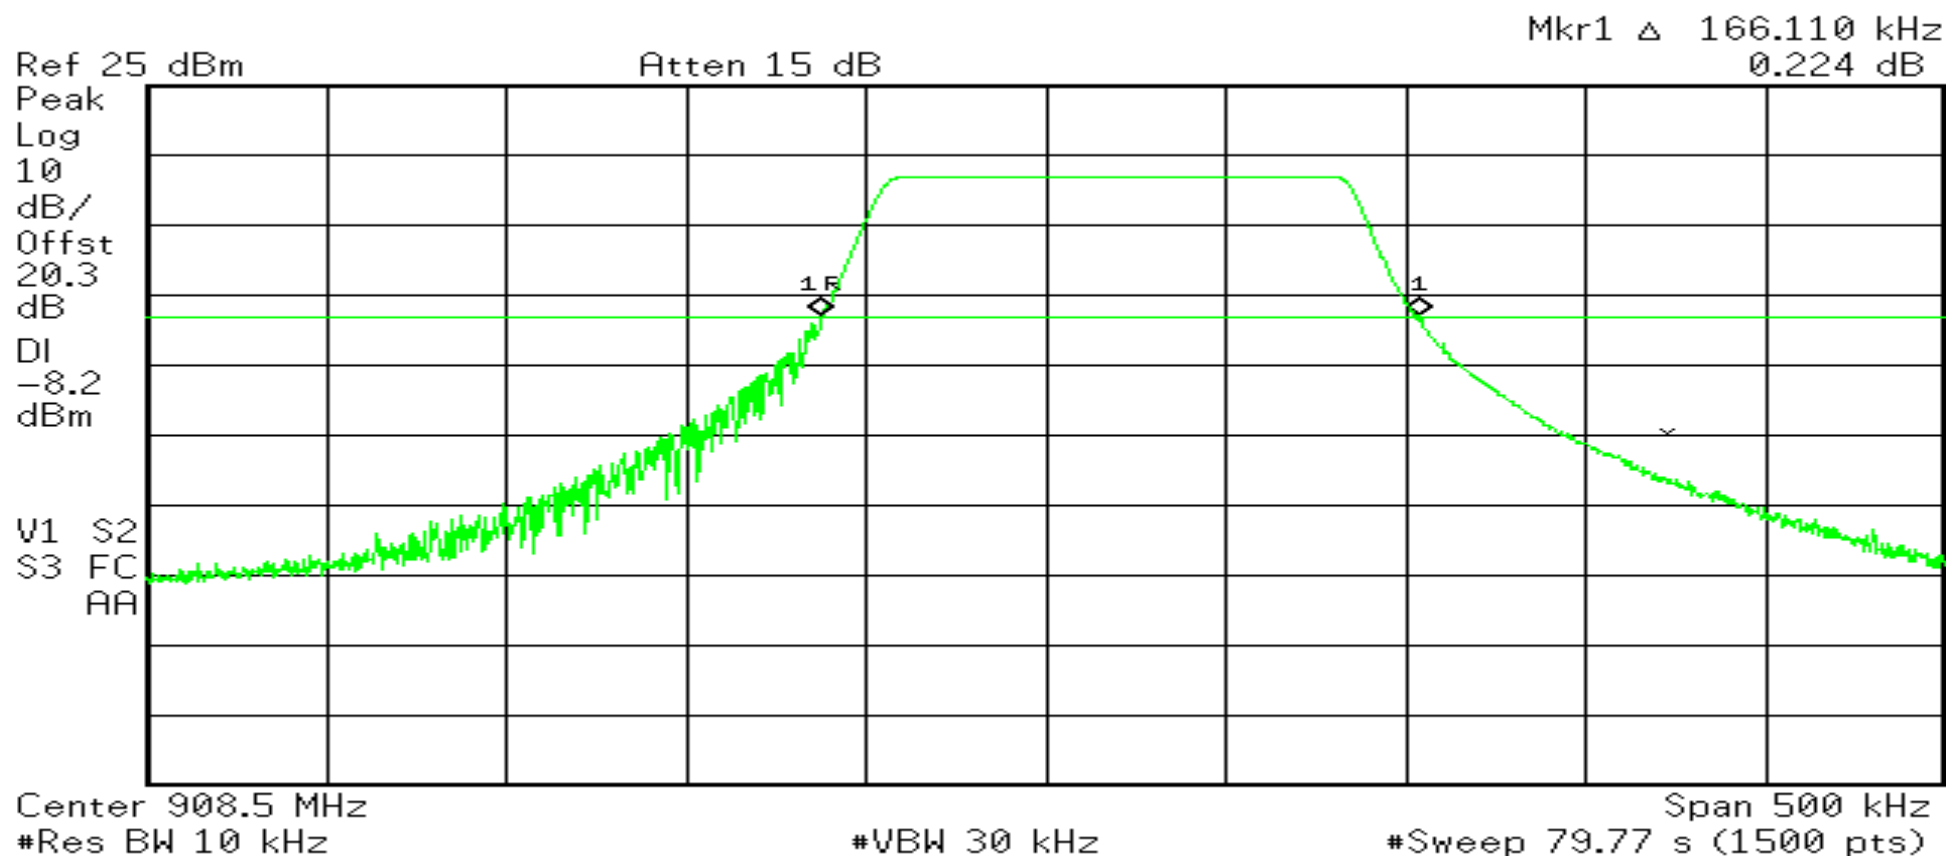

RETLIF TESTING LABORATORIES

Test Method:	20dB Bandwidth		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated(FHSS) signal at 914.9 MHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Occupied Bandwidth: 166.44 kHz		

Agilent 13:15:08 Feb 29, 2016

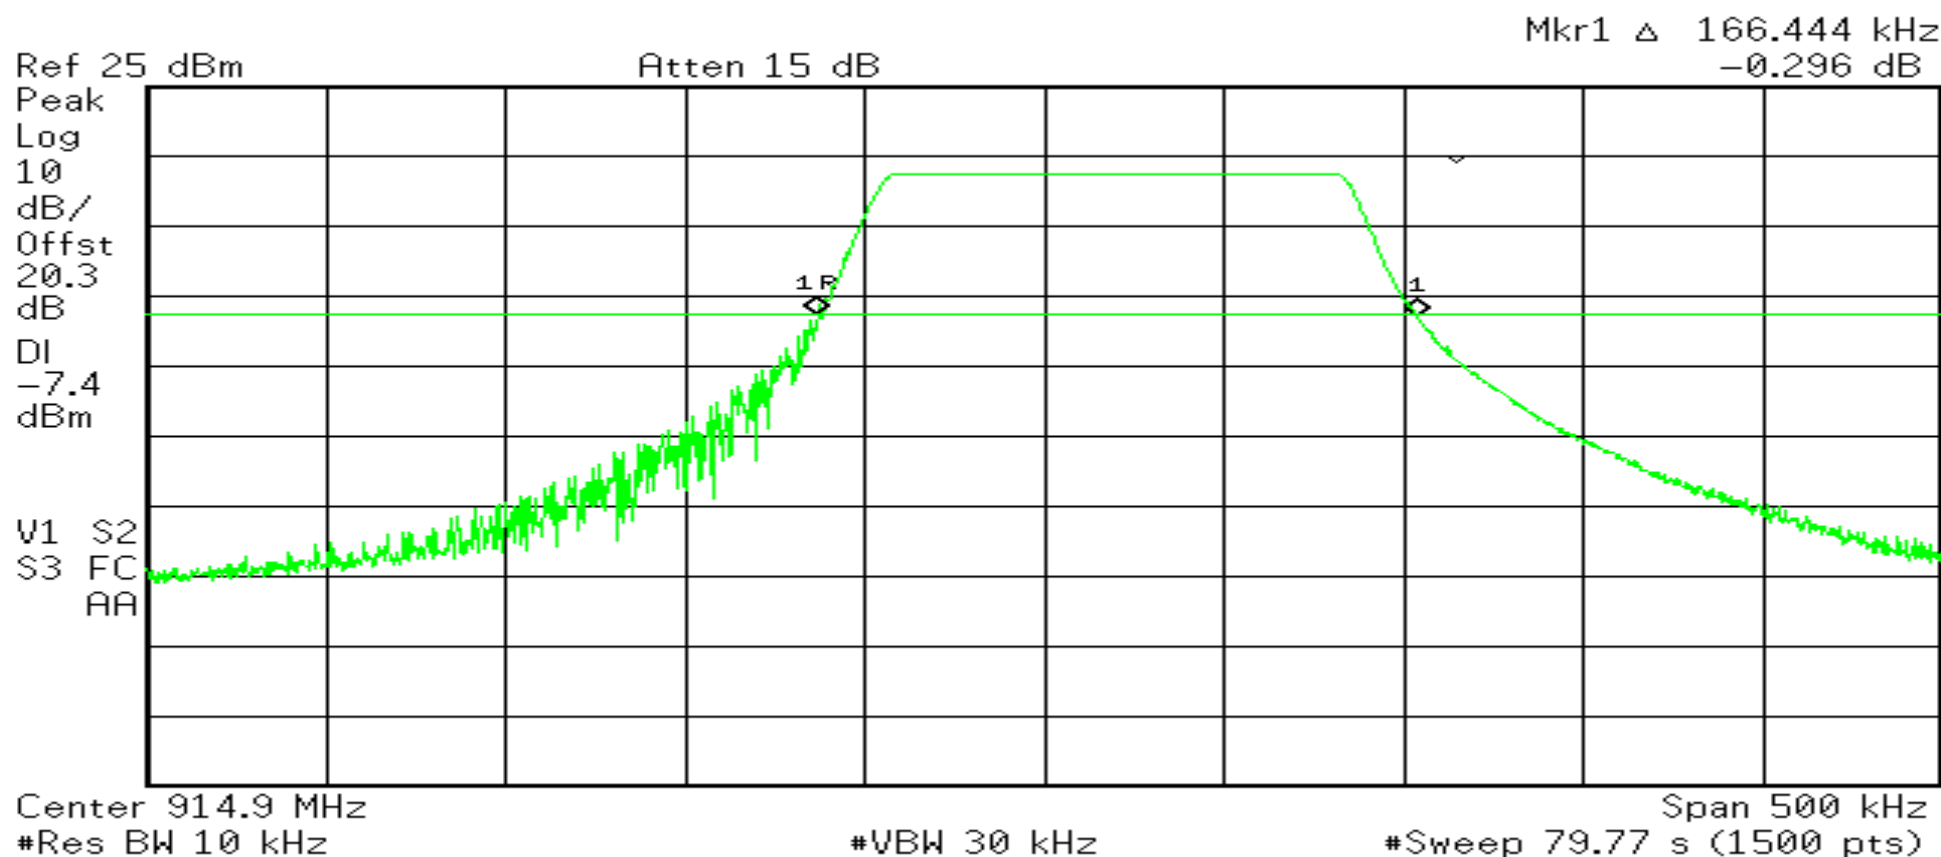


Test Photograph(s)
Number of Hopping Channels and Time of Occupancy
FCC Section 15.247(a)(1)(iii)



Retlif Testing Laboratories

Report No. R-6046N-4

Test Photograph(s)
Number of Hopping Channels and Time of Occupancy

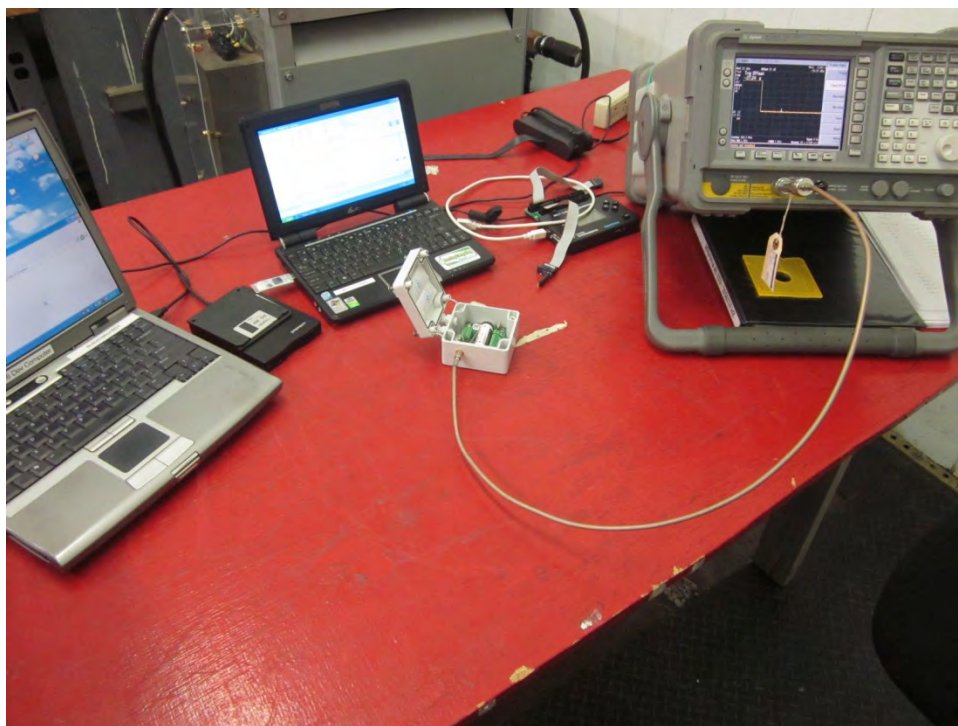

Test Setup



Retlif Testing Laboratories

Report No. R-6046N-4

**Number of Hopping Channels and Time of Occupancy
Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

Test Method:	Number of Hopping Frequencies		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting hopping frequency data		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Total Number of Hopping Frequencies: 64		


Agilent 13:52:58 Feb 29, 2016

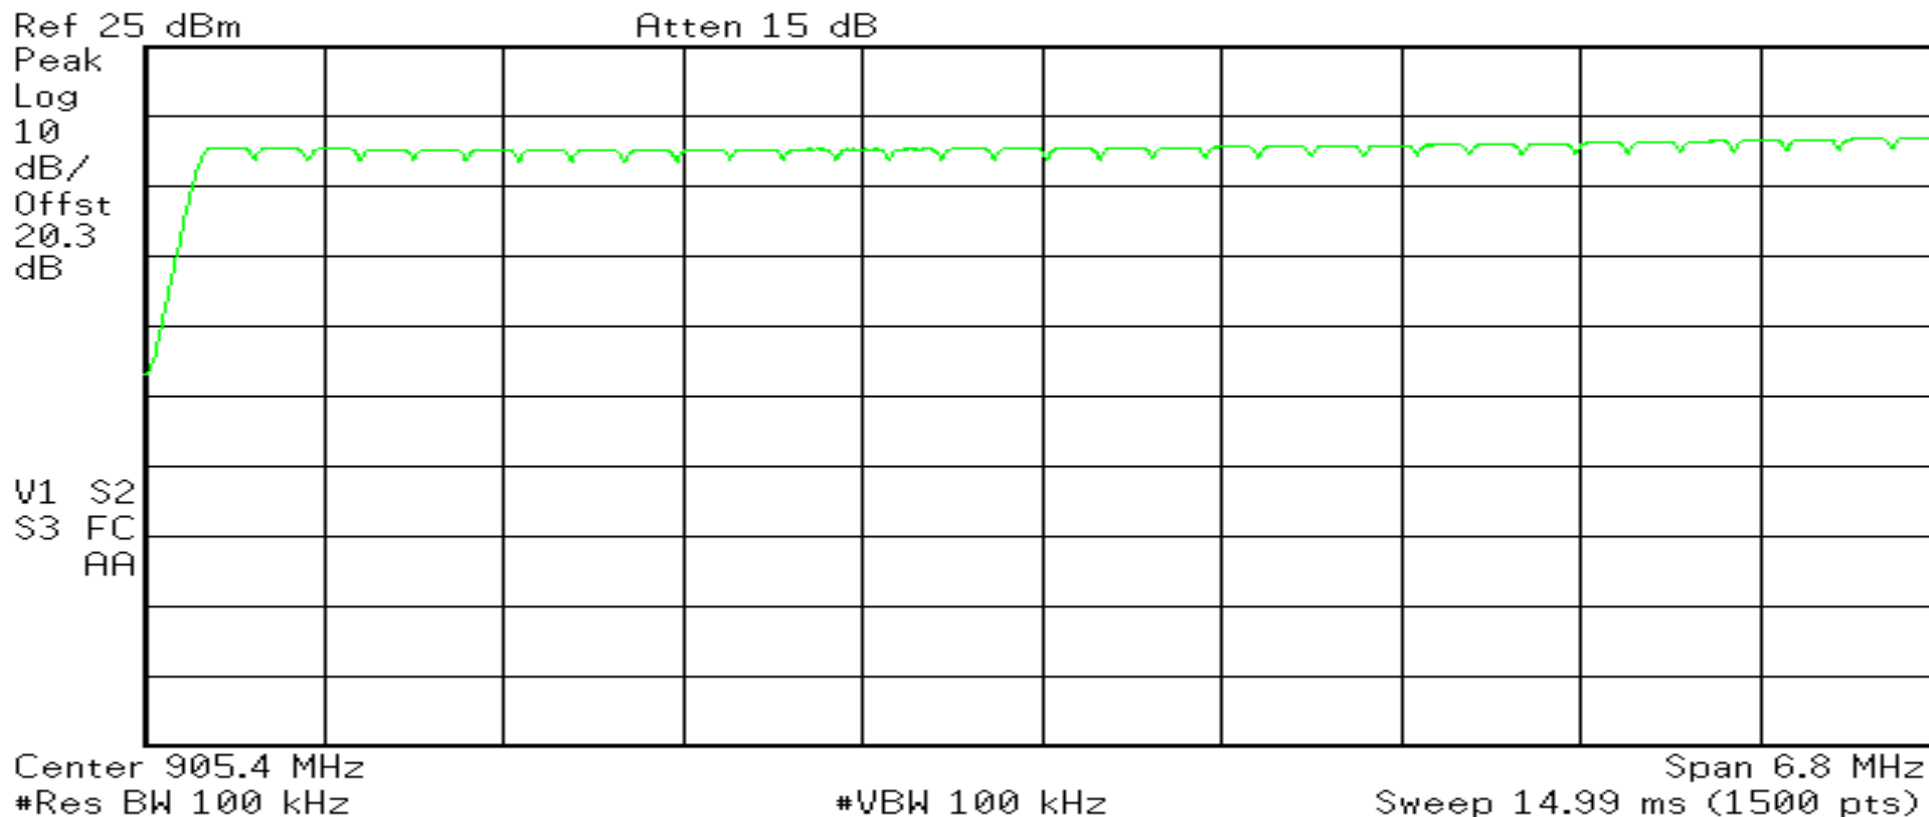

RETLIF TESTING LABORATORIES

Test Method:	Number of Hopping Frequencies		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting hopping frequency data		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Total Number of Hopping Frequencies: 64		

Agilent 14:15:27 Feb 29, 2016

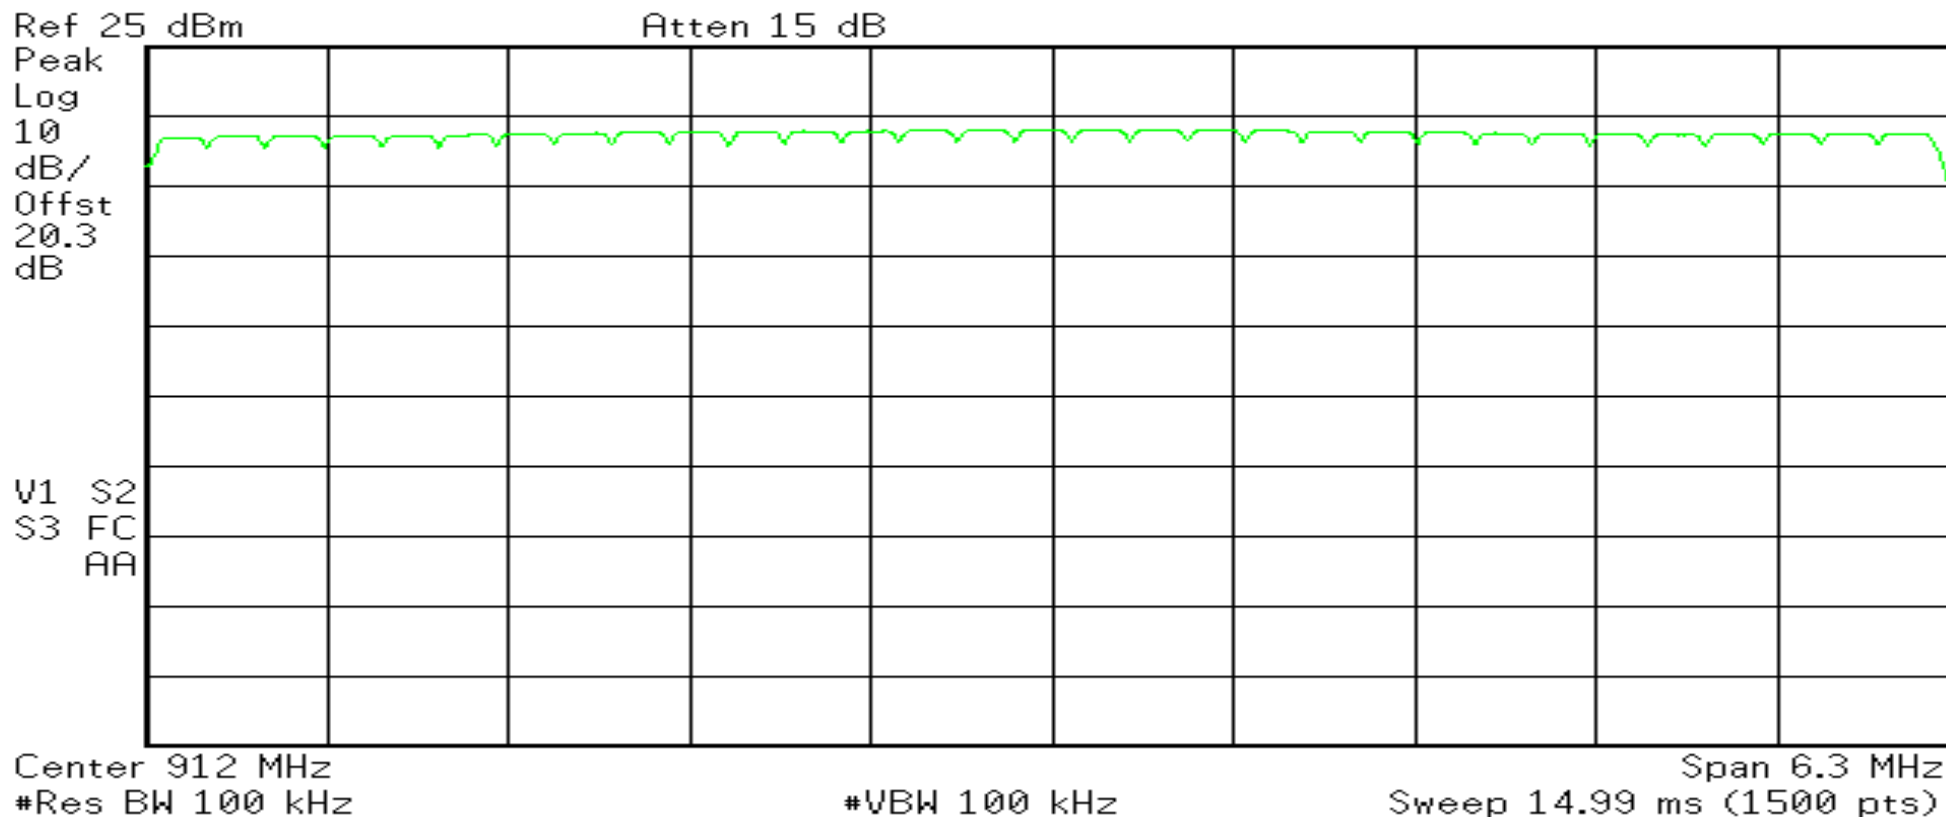

**Time of Occupancy
Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES


Test Method:	Time of Occupancy		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting hopping frequency data		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Test Frequency: 908.5 MHz Pulse Width: 82.56 ms		

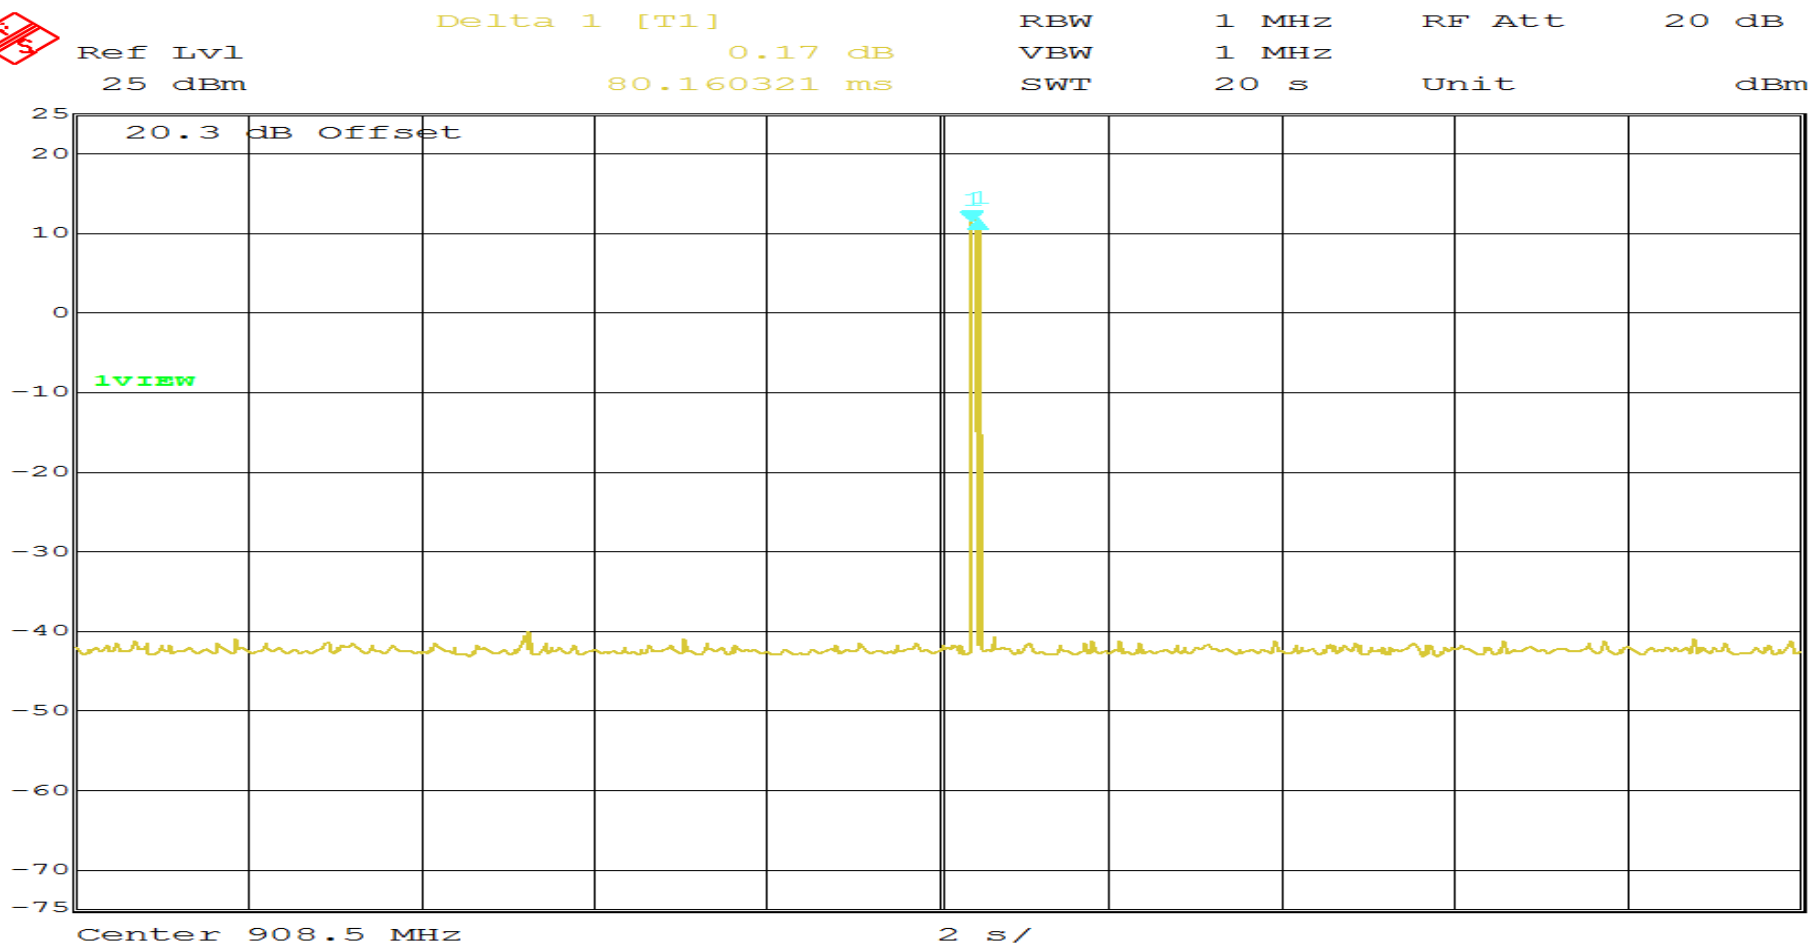

Date: 1.MAR.2016 10:11:08
 Page 1 of 2

RETLIF TESTING LABORATORIES

Test Method:	Time of Occupancy		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting hopping frequency data		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
Technician	M. Seamans	Date	March 1 st , 2016
Climatic Conditions	Temp: 22.7 °C Relative Humidity: 22.0 %		
Notes	Test Frequency: 908.5 MHz Pulse Width: 82.56 ms		

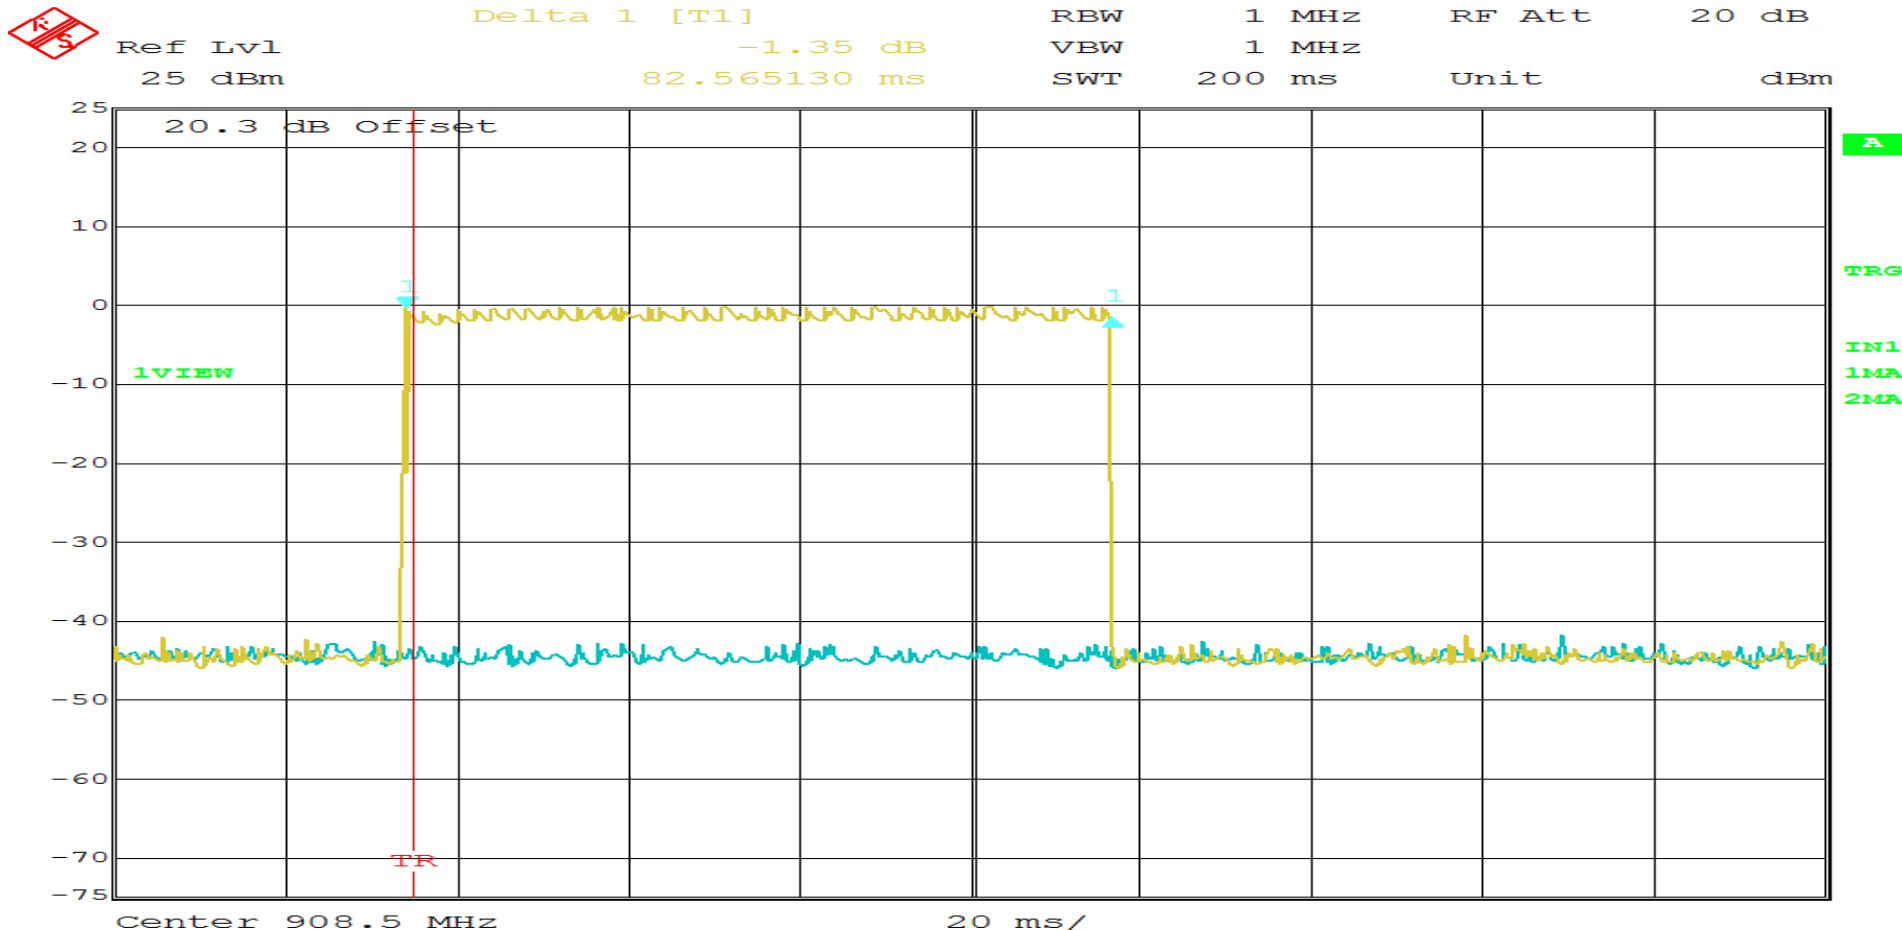

Date: 2.MAR.2016 10:26:40
 Page 2 of 2


**Test Photograph(s)
Channel Separation
FCC Section 15.247(a)(1)**



Retlif Testing Laboratories

Report No. R-6046N-4

**Test Photograph(s)
Channel Separation**

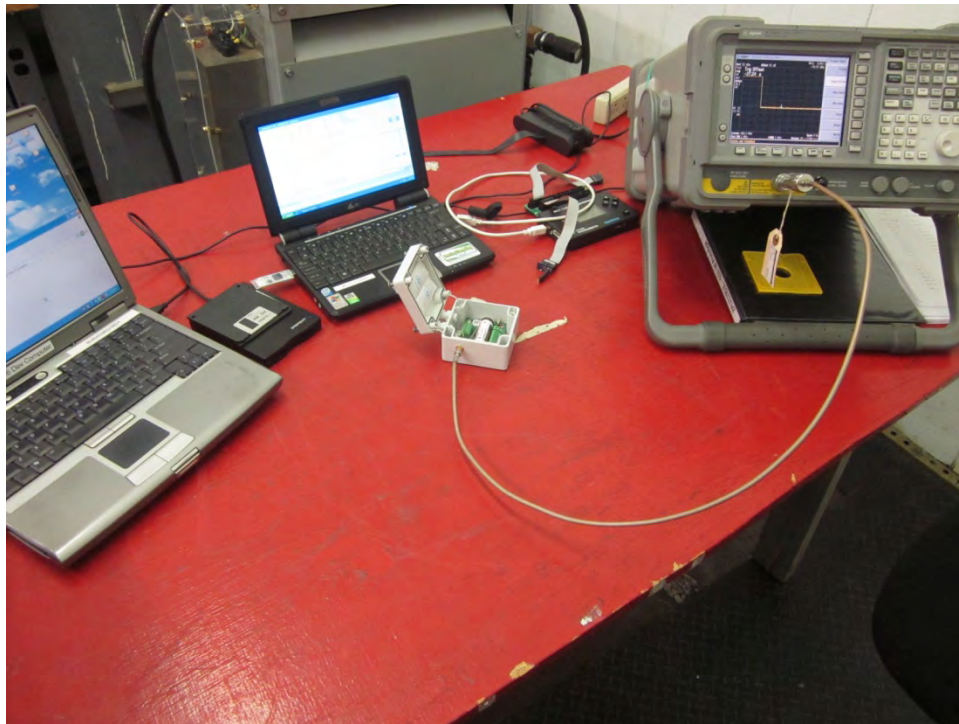

Test Setup



Retlif Testing Laboratories

Report No. R-6046N-4

**Channel Separation
Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4

RETLIF TESTING LABORATORIES

Test Method:	Channel Carrier Frequency Separation		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model Number	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting hopping frequency data		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)		
Technician	M. Seamans	Date	February 29 th , 2016
Climatic Conditions	Temp: 20.6 °C Relative Humidity: 18.5 %		
Notes	Channel Carrier Frequency Separation: 202.468 kHz		

Agilent 13:28:05 Feb 29, 2016

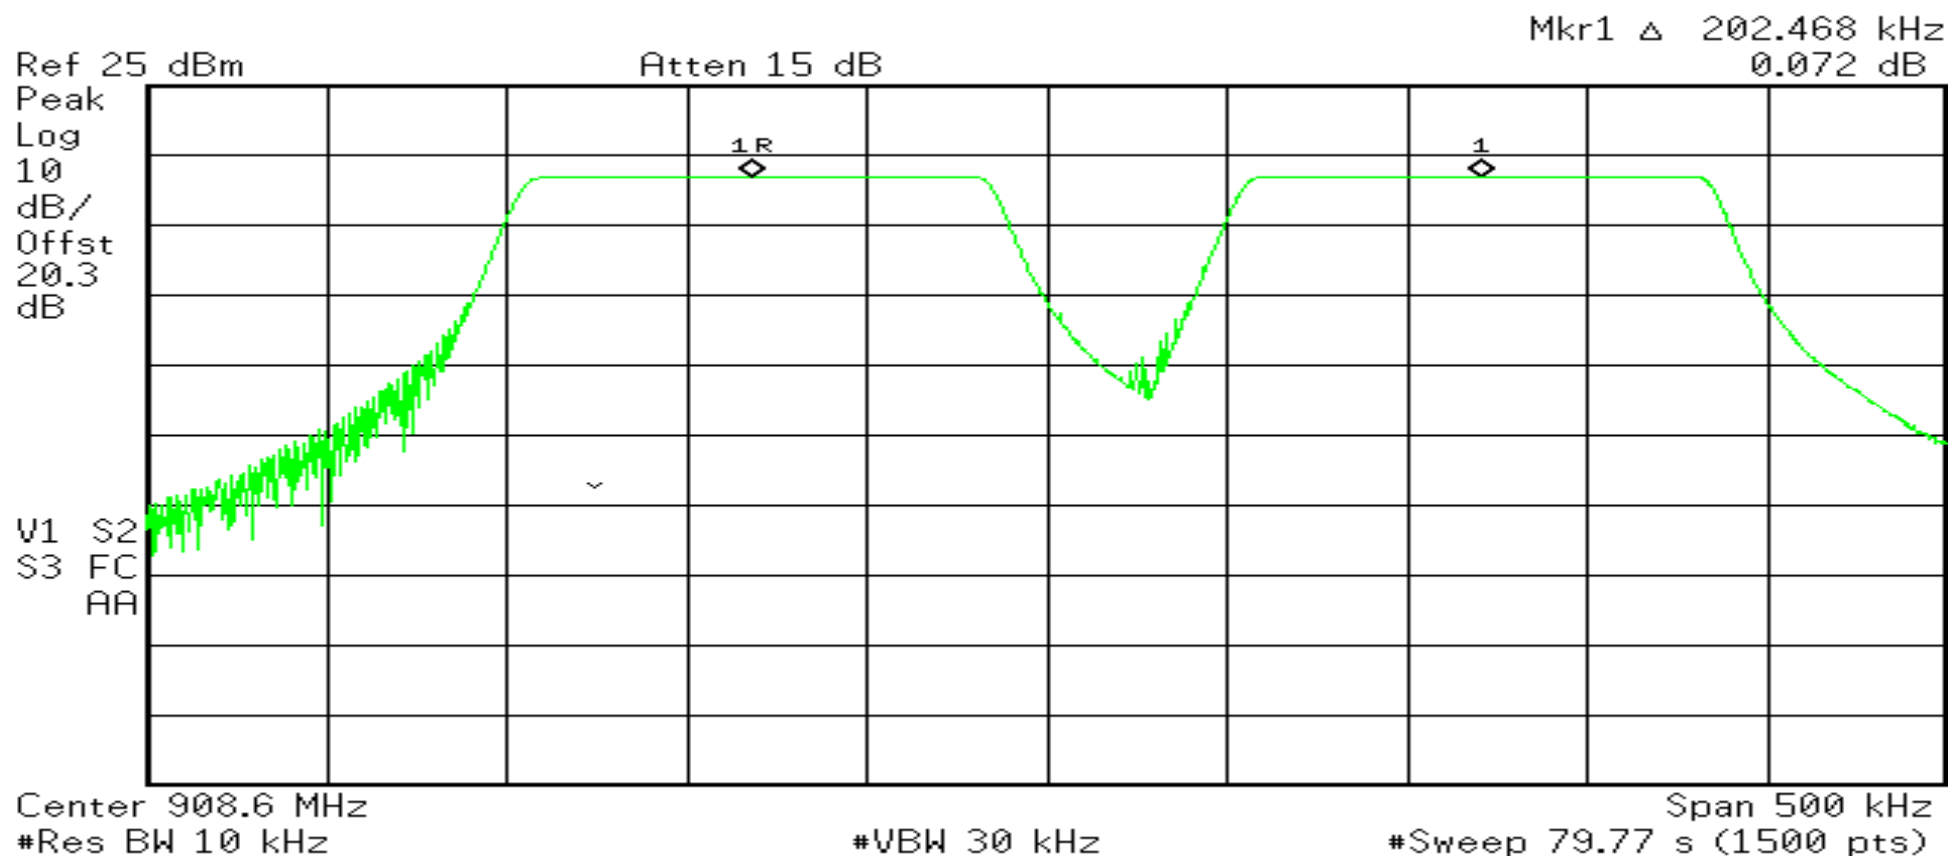

Test Photograph(s)
Conducted Emissions, Power Leads, 150 kHz to 30 MHz
FCC Section 15.207(a)




Retlif Testing Laboratories

Report No. R-6046N-4

**Test Photograph(s)
Conducted Emissions**



Test Setup

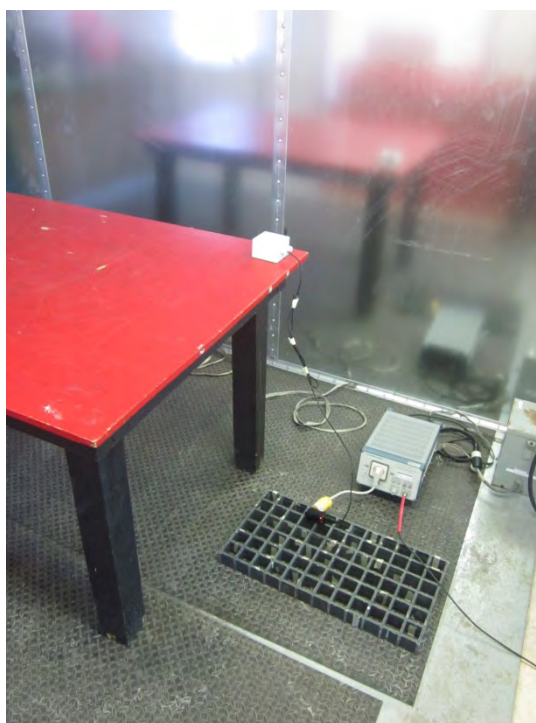

Test Setup



Retlif Testing Laboratories

Report No. R-6046N-4

**Conducted Emissions
Test Data**




Retlif Testing Laboratories

Report No. R-6046N-4


RETLIF TESTING LABORATORIES

Test Method	Conducted Emissions 150 kHz to 30 MHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model No.	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated signal		
Test Specification	FCC Part 15. 207(a)		
Technician	M. Seamans	Date	March 3 rd , 2016
Climatic Conditions	Temp: 24.0 °C Relative Humidity: 14.0 %		
Lead Tested	120 VAC 60 Hz Hot Quasi-Peak Readings to Quasi-Peak Limits.		

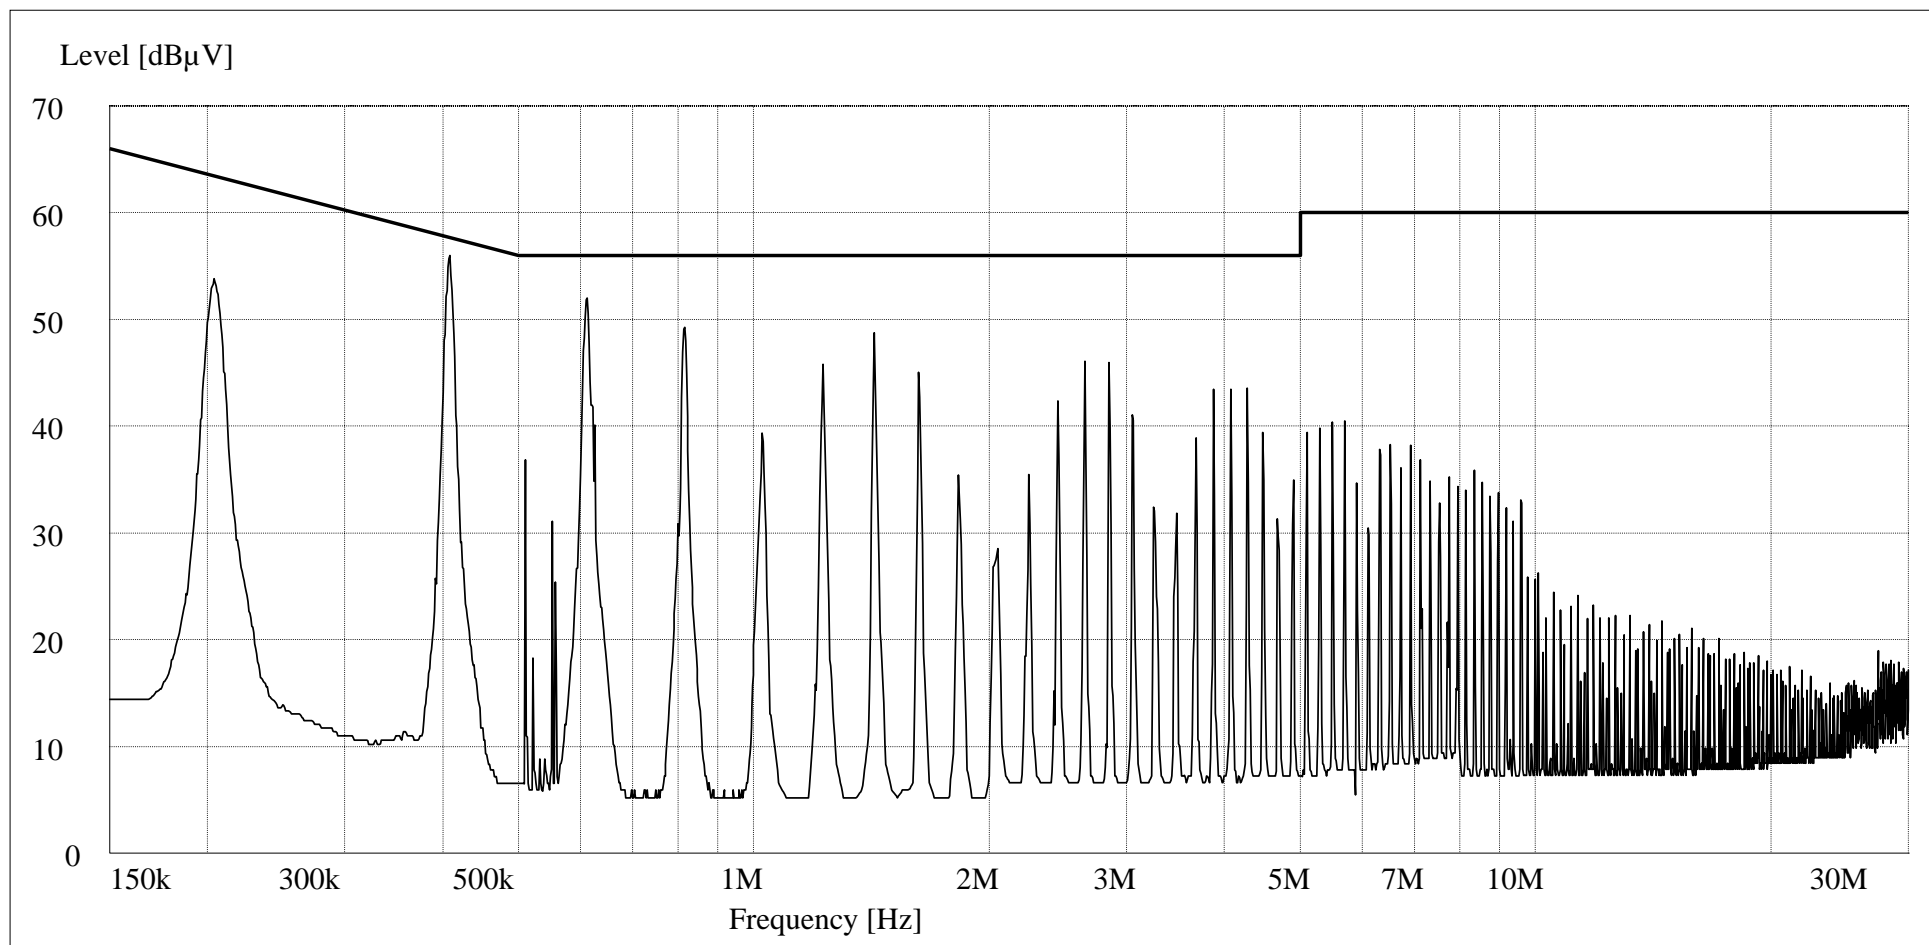


RETLIF TESTING LABORATORIES

Test Method	Conducted Emissions 150 kHz to 30 MHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model No.	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated signal		
Test Specification	FCC Part 15. 207(a)		
Technician	M. Seamans	Date	March 3 rd , 2016
Climatic Conditions	Temp: 24.0 °C Relative Humidity: 14.0 %		
Lead Tested	120 VAC 60 Hz Neutral Quasi-Peak Readings to Quasi-Peak Limits.		

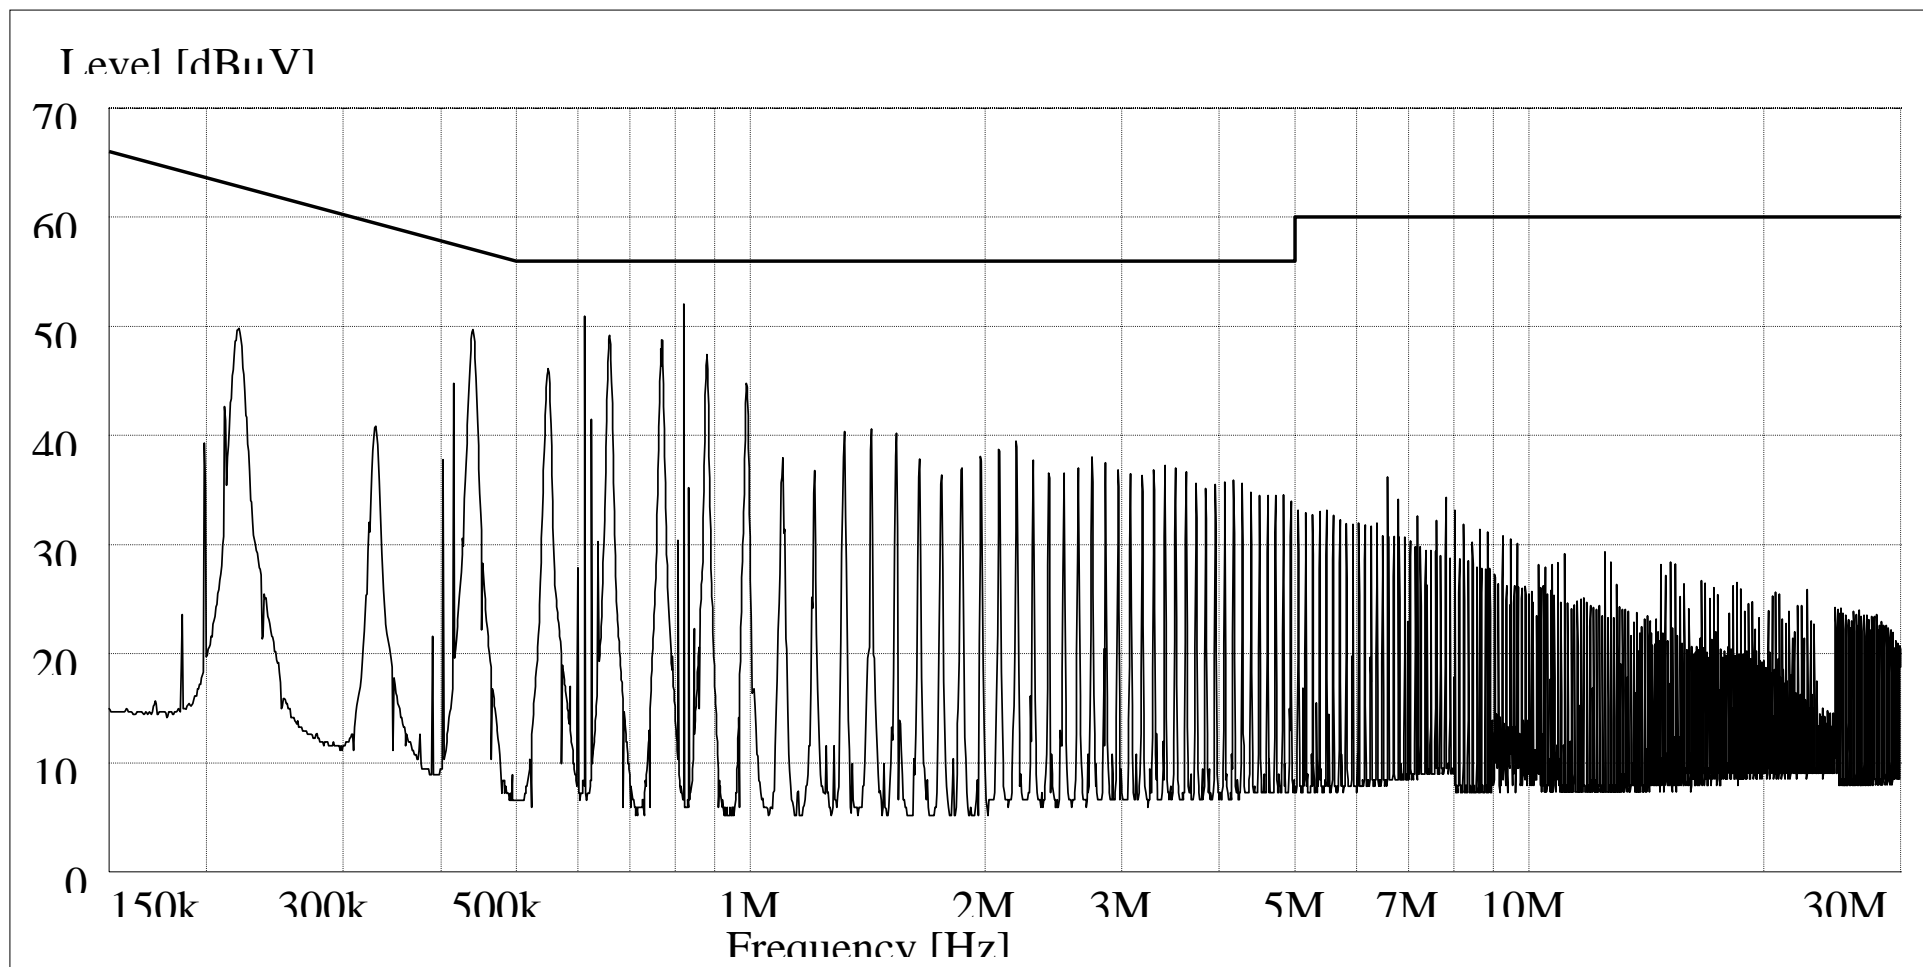

RETLIF TESTING LABORATORIES

Test Method	Conducted Emissions 150 kHz to 30 MHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model No.	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated signal		
Test Specification	FCC Part 15. 207(a)		
Technician	M. Seamans	Date	March 3 rd , 2016
Climatic Conditions	Temp: 24.0 °C Relative Humidity: 14.0 %		
Lead Tested	120 VAC 60 Hz Hot Average Readings to Average Limits.		

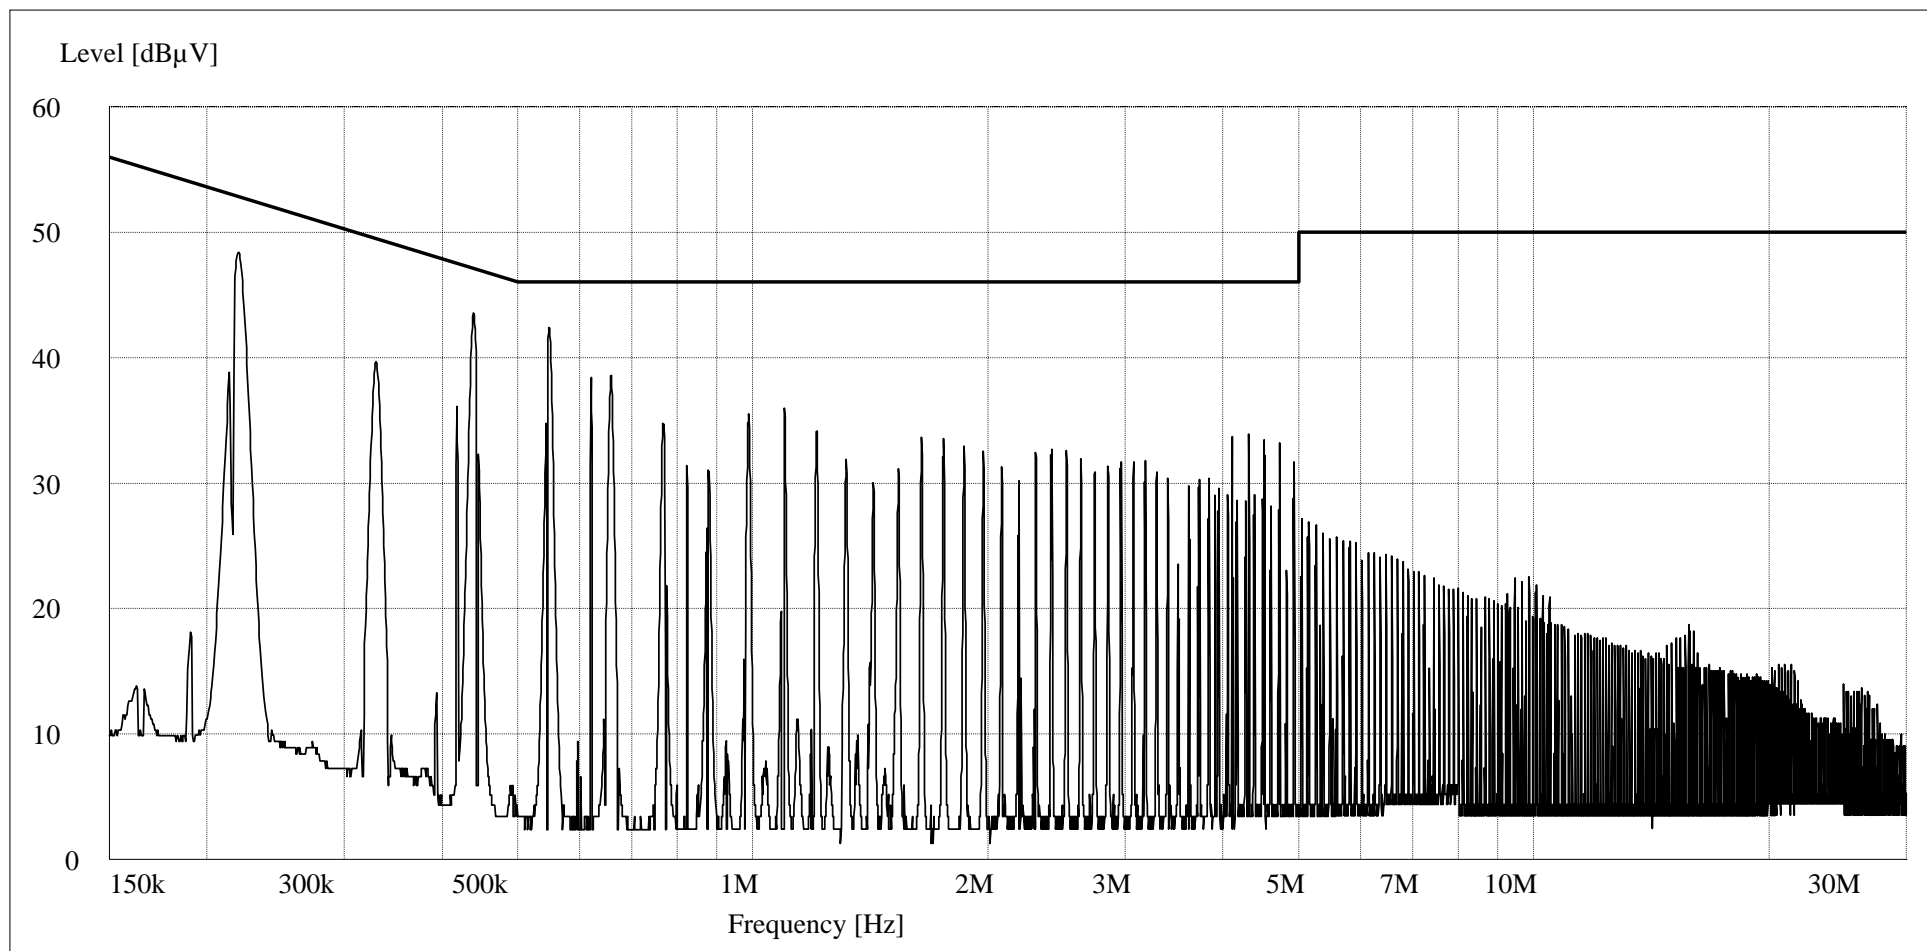

RETLIF TESTING LABORATORIES

Test Method	Conducted Emissions 150 kHz to 30 MHz		
Customer	Nke Watteco	Job No.	R-6046N-4
Test Sample	IN'O LoRa™ State Report and Output Control Sensor		
Model No.	IN'O	Serial No.	2100547330002
Operating Mode	Transmitting modulated signal		
Test Specification	FCC Part 15. 207(a)		
Technician	M. Seamans	Date	March 3 rd , 2016
Climatic Conditions	Temp: 24.0 °C Relative Humidity: 14.0 %		
Lead Tested	120 VAC 60 Hz Neutral Average Readings to Average Limits.		

