



Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11n ht20 Mode High Channel 5240MHz Band1

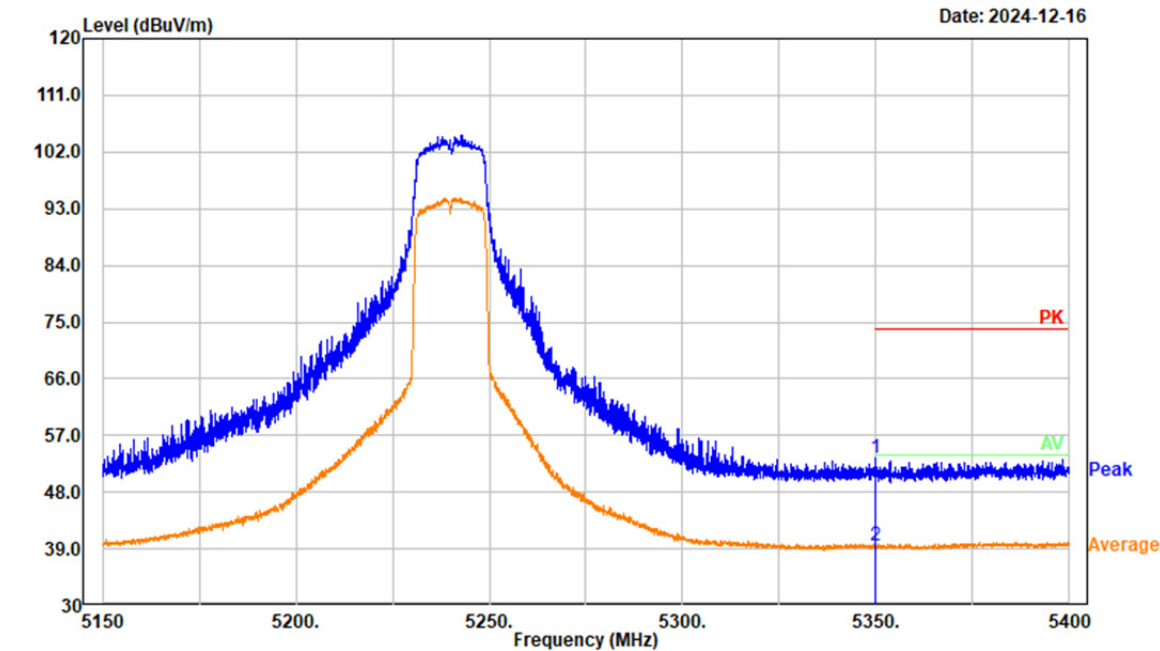


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5350.000	44.06	9.34	53.40	74.00	20.60	Peak
2	5350.000	30.18	9.34	39.52	54.00	14.48	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11n ht20 Mode High Channel 5240MHz Band1

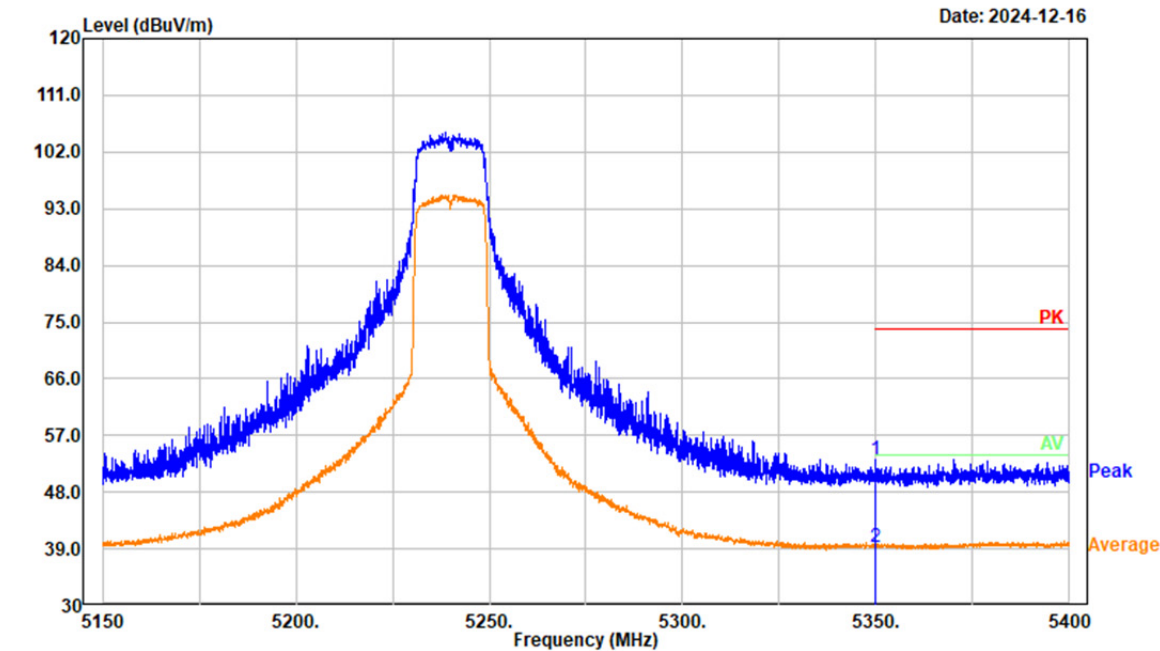


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5350.000	43.80	9.34	53.14	74.00	20.86	Peak
2	5350.000	30.01	9.34	39.35	54.00	14.65	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11n ht40 Mode Low Channel 5190MHz Band1

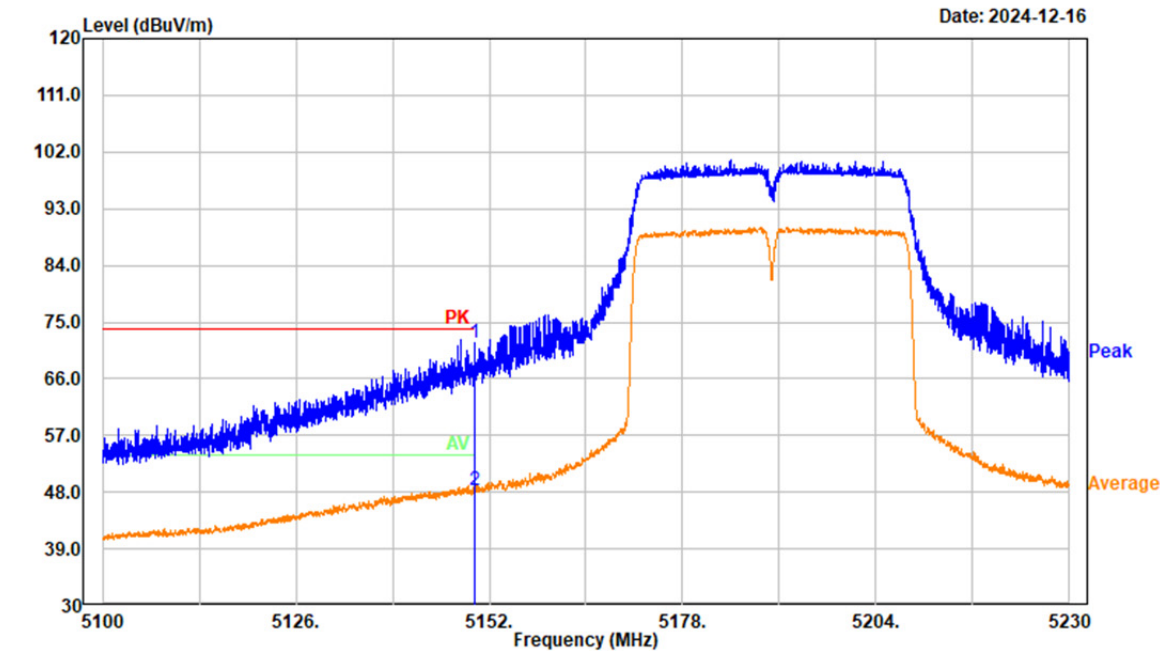


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	62.29	9.49	71.78	74.00	2.22	Peak
2	5150.000	38.91	9.49	48.40	54.00	5.60	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11n ht40 Mode Low Channel 5190MHz Band1

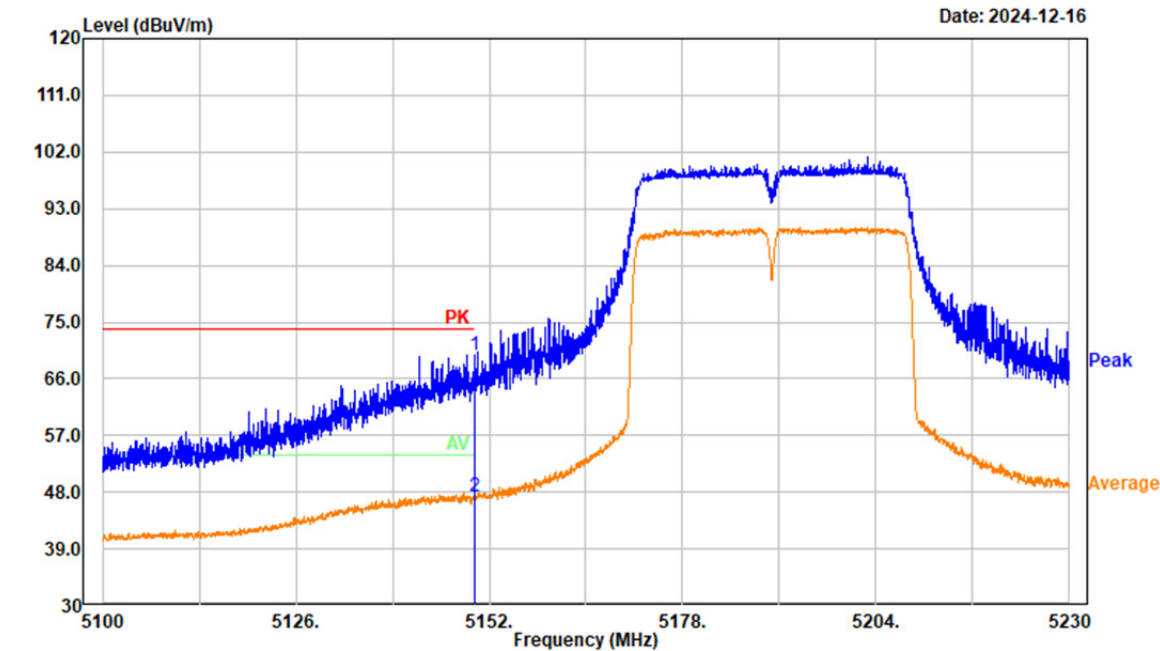


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	60.27	9.49	69.76	74.00	4.24	Peak
2	5150.000	37.84	9.49	47.33	54.00	6.67	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11n ht40 Mode High Channel 5230MHz Band1

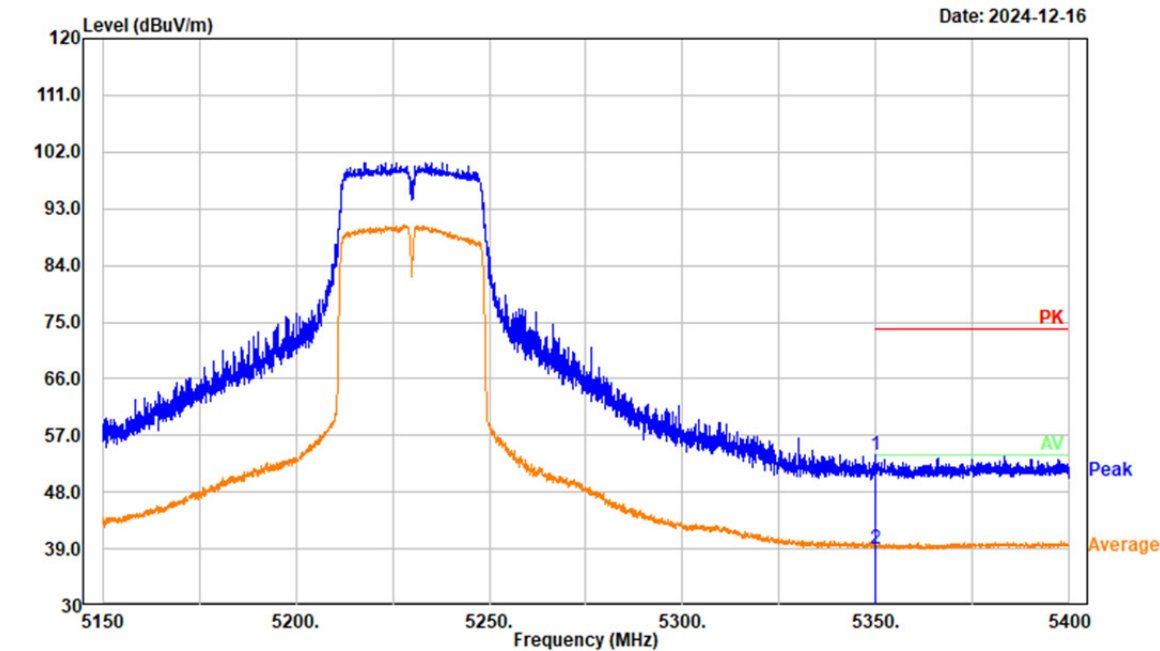


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5350.000	44.51	9.34	53.85	74.00	20.15	Peak
2	5350.000	29.76	9.34	39.10	54.00	14.90	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11n ht40 Mode High Channel 5230MHz Band1

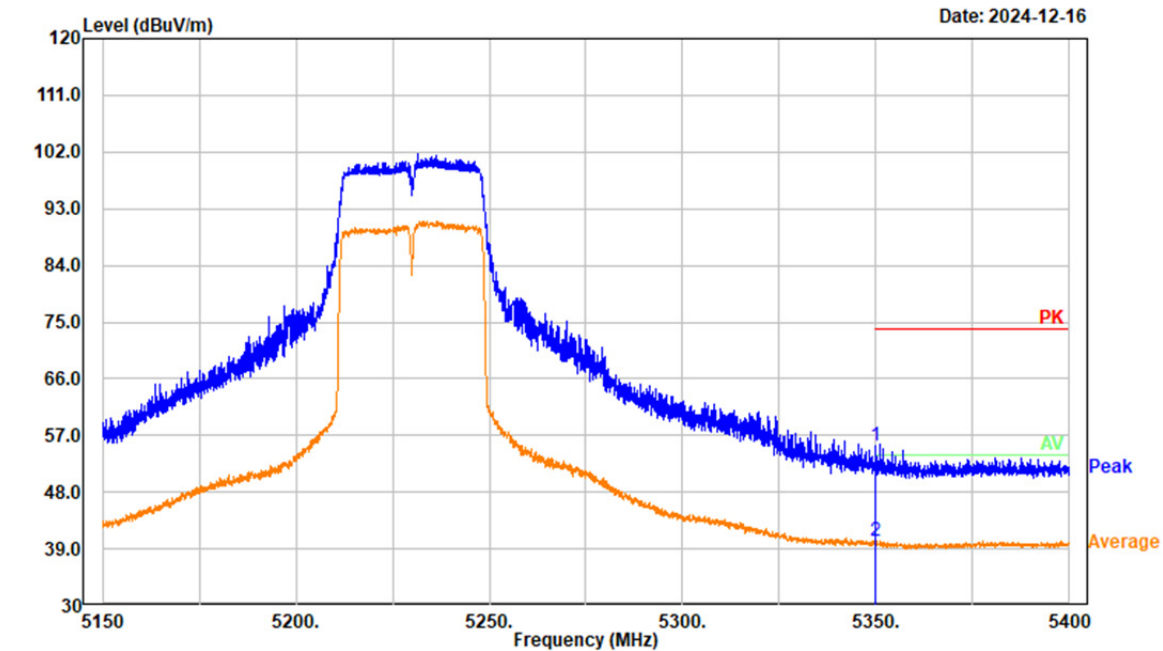


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5350.000	45.93	9.34	55.27	74.00	18.73	Peak
2	5350.000	30.84	9.34	40.18	54.00	13.82	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11ac80 Mode Middle Channel 5210MHz Band1

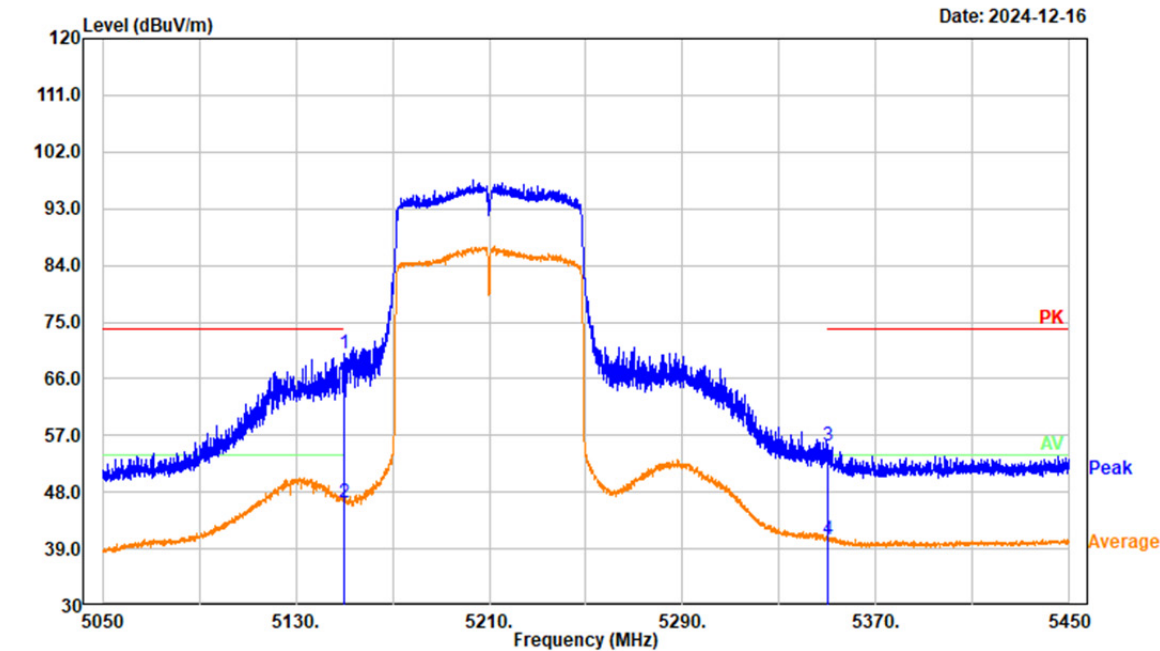


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	60.61	9.49	70.10	74.00	3.90	Peak
2	5150.000	36.81	9.49	46.30	54.00	7.70	Average
3	5350.000	46.10	9.34	55.44	74.00	18.56	Peak
4	5350.000	31.16	9.34	40.50	54.00	13.50	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11ac80 Mode Middle Channel 5210MHz Band1

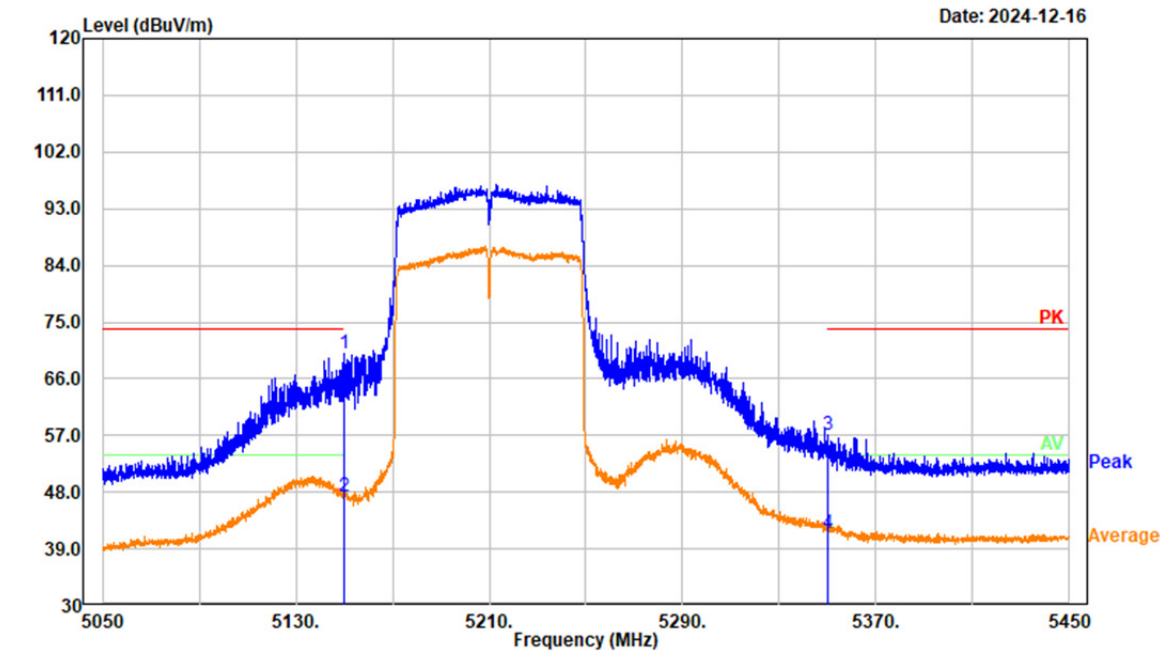


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	60.48	9.49	69.97	74.00	4.03	Peak
2	5150.000	37.91	9.49	47.40	54.00	6.60	Average
3	5350.000	47.65	9.34	56.99	74.00	17.01	Peak
4	5350.000	32.16	9.34	41.50	54.00	12.50	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11ax ht20 Mode Low Channel 5180MHz Band1

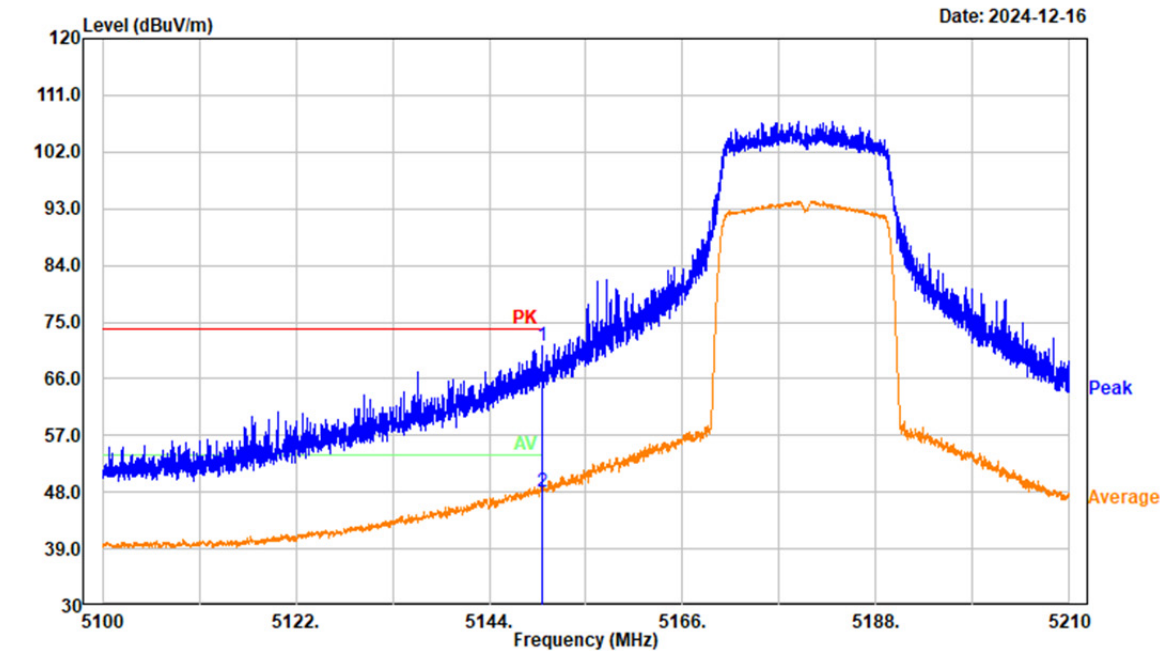


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	61.72	9.49	71.21	74.00	2.79	Peak
2	5150.000	38.51	9.49	48.00	54.00	6.00	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11ax ht20 Mode Low Channel 5180MHz Band1

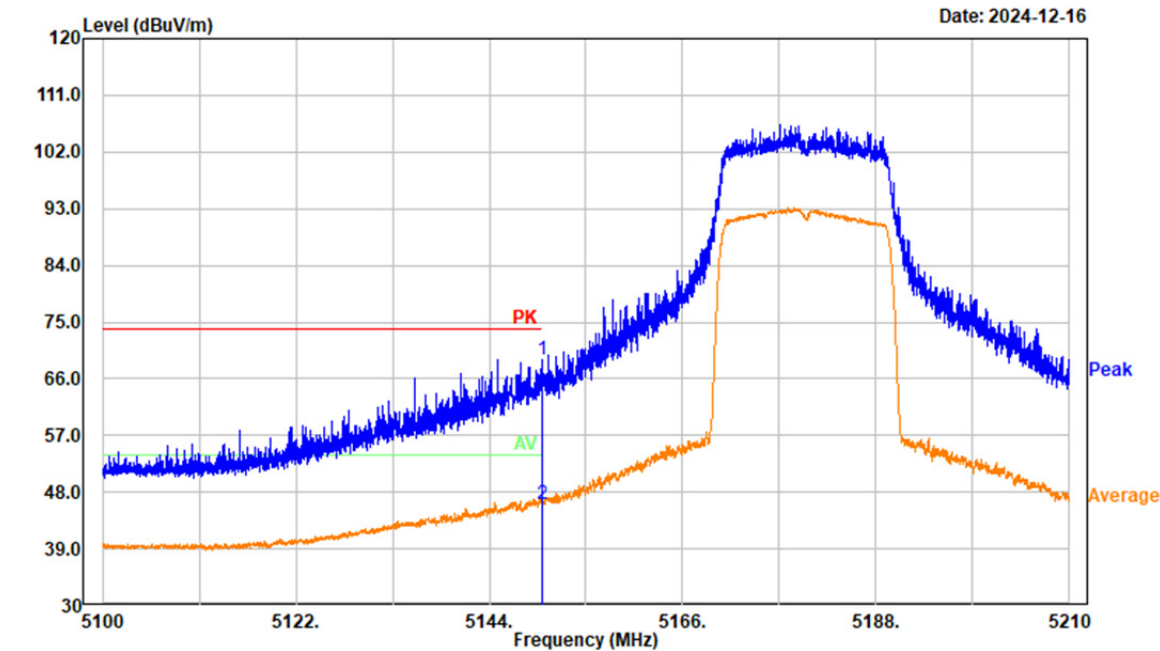


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	59.47	9.49	68.96	74.00	5.04	Peak
2	5150.000	36.51	9.49	46.00	54.00	8.00	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11ax ht20 Mode High Channel 5240MHz Band1

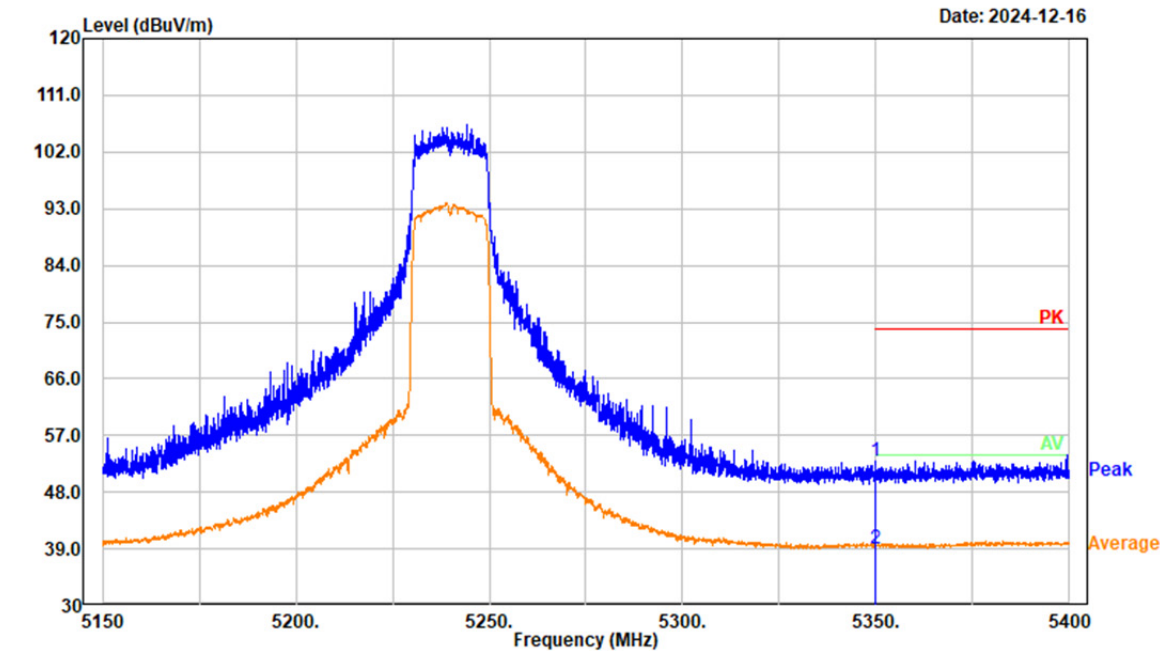


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5350.000	43.55	9.34	52.89	74.00	21.11	Peak
2	5350.000	29.76	9.34	39.10	54.00	14.90	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11ax ht20 Mode High Channel 5240MHz Band1

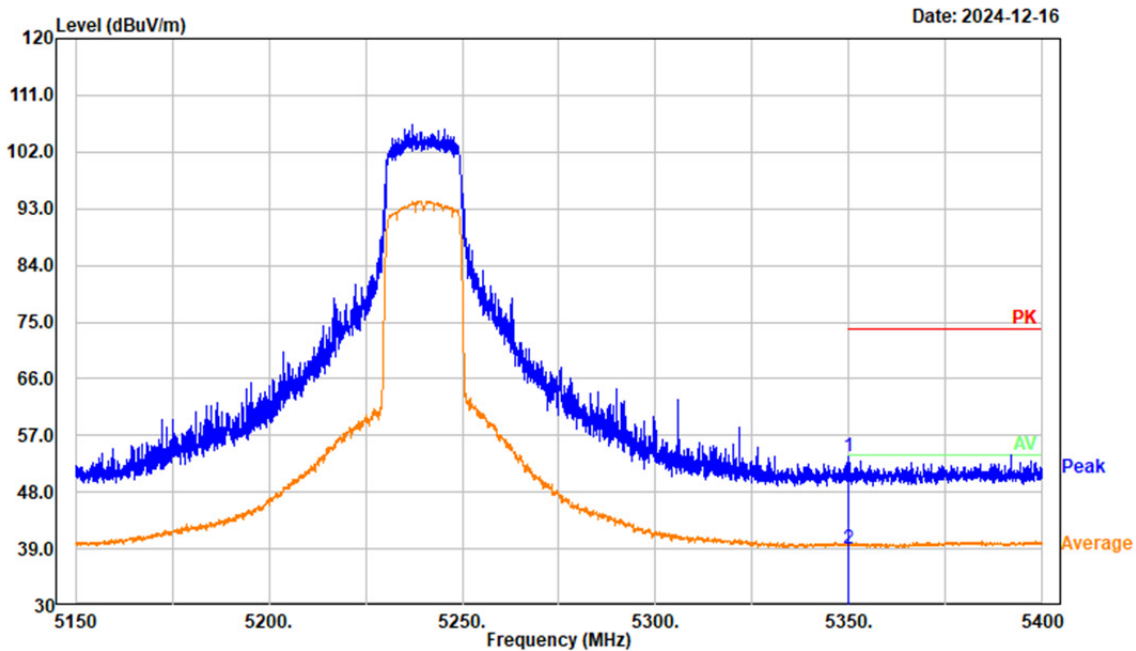


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5350.000	44.40	9.34	53.74	74.00	20.26	Peak
2	5350.000	29.76	9.34	39.10	54.00	14.90	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11ax ht40 Mode Low Channel 5190MHz Band1

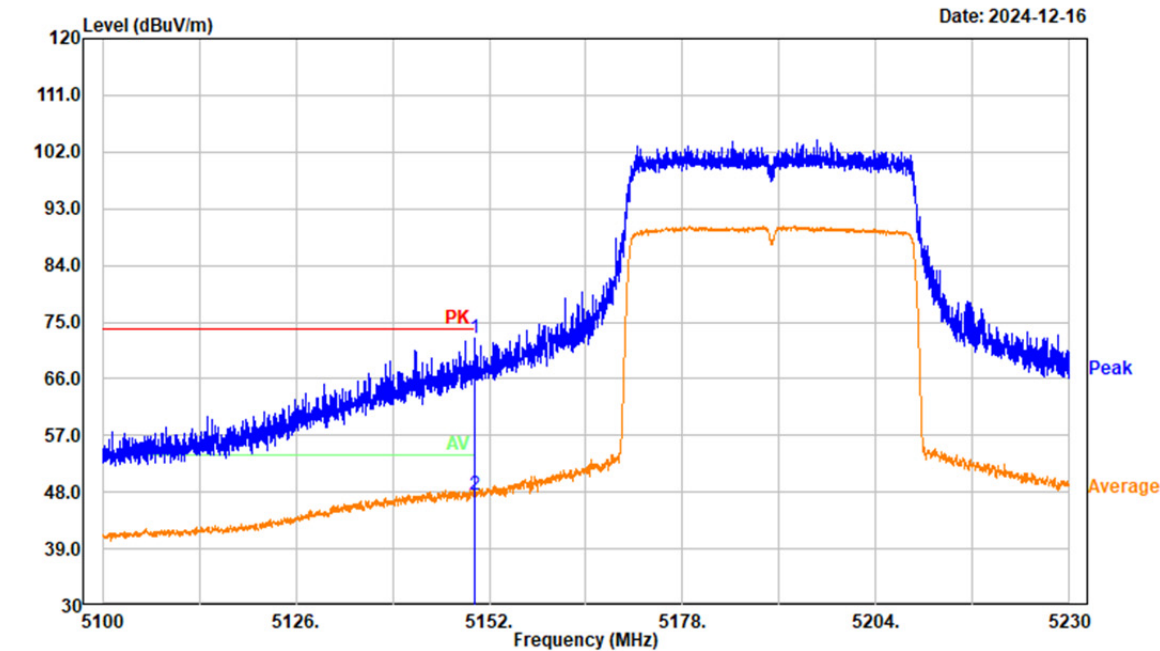


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	62.85	9.49	72.34	74.00	1.66	Peak
2	5150.000	38.01	9.49	47.50	54.00	6.50	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11ax ht40 Mode Low Channel 5190MHz Band1

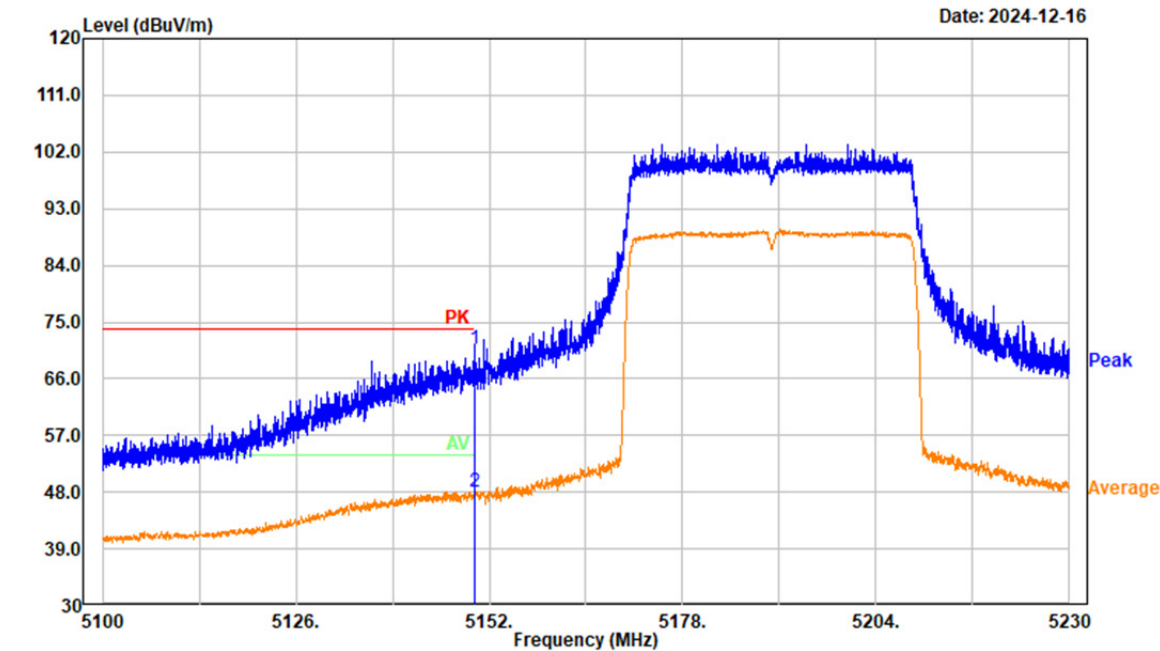


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	61.25	9.49	70.74	74.00	3.26	Peak
2	5150.000	38.51	9.49	48.00	54.00	6.00	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11ax ht40 Mode High Channel 5230MHz Band1

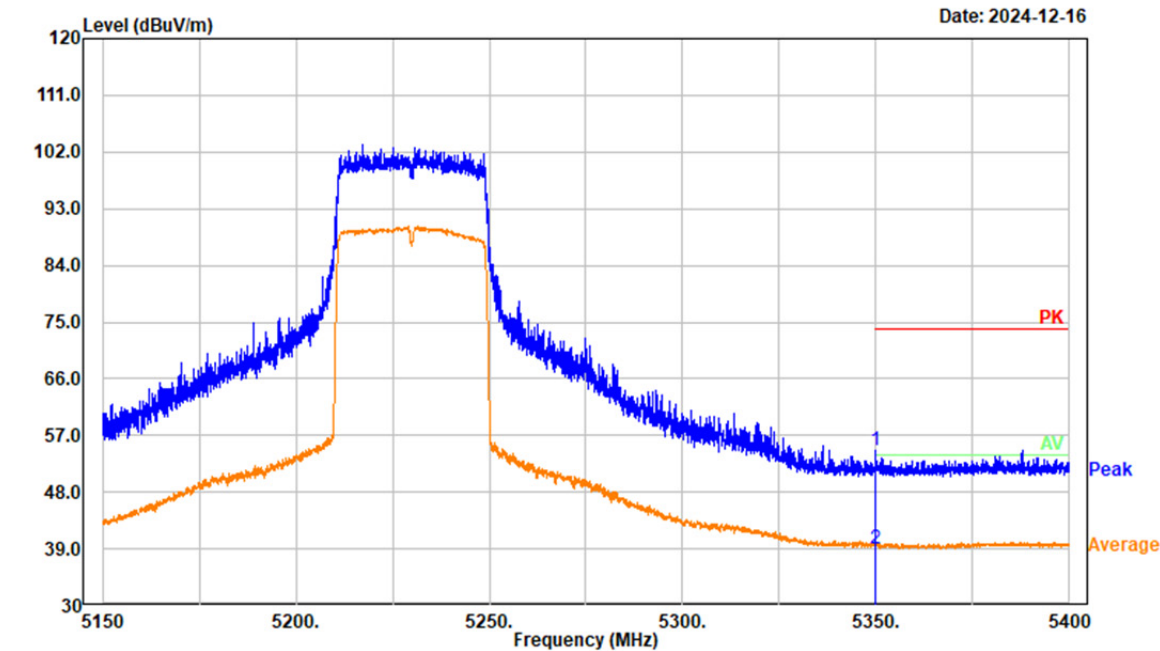


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5350.000	45.27	9.34	54.61	74.00	19.39	Peak
2	5350.000	29.66	9.34	39.00	54.00	15.00	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11ax ht40 Mode High Channel 5230MHz Band1

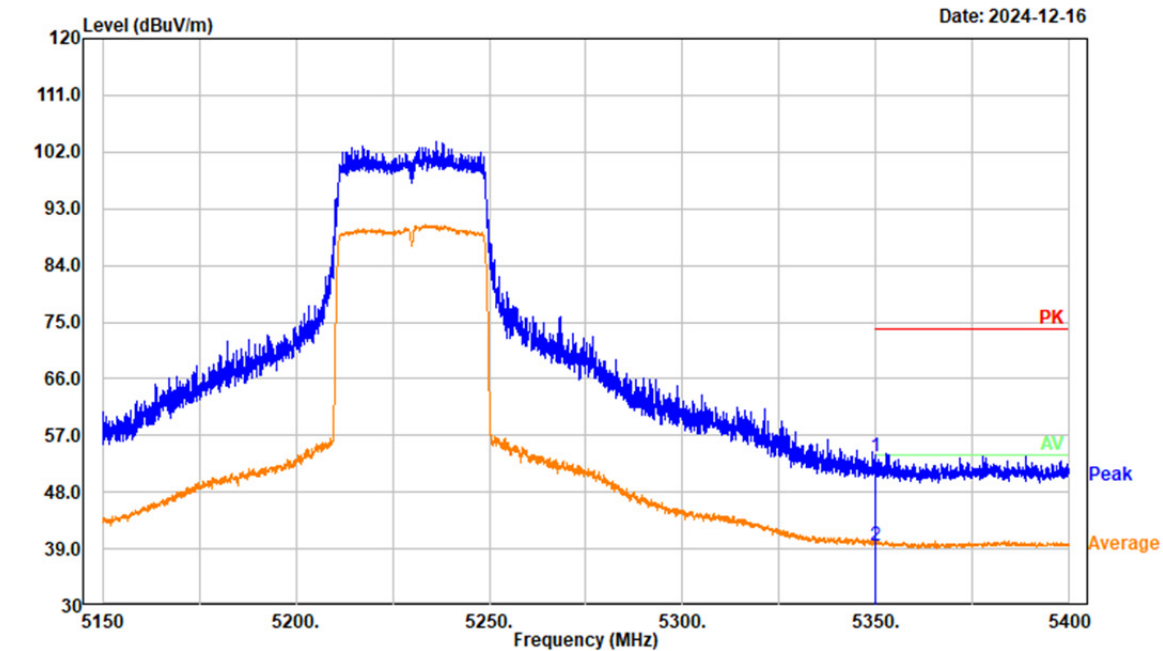


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5350.000	44.44	9.34	53.78	74.00	20.22	Peak
2	5350.000	30.16	9.34	39.50	54.00	14.50	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11ax80 Mode Middle Channel 5210MHz Band1

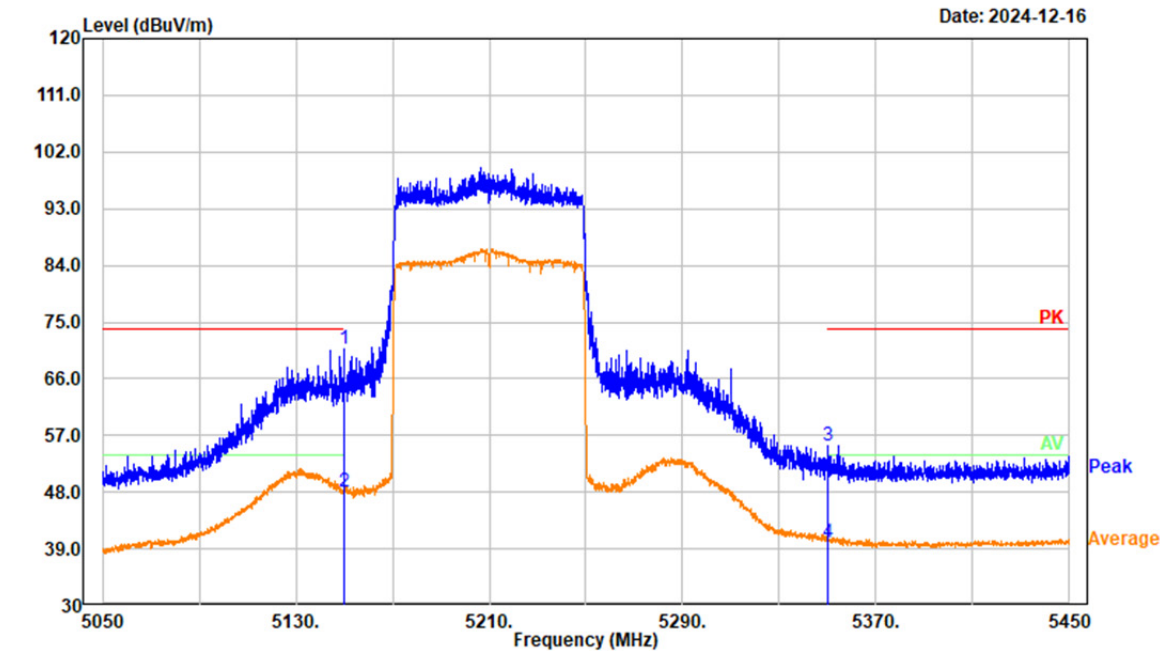


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	61.24	9.49	70.73	74.00	3.27	Peak
2	5150.000	38.61	9.49	48.10	54.00	5.90	Average
3	5350.000	45.96	9.34	55.30	74.00	18.70	Peak
4	5350.000	30.66	9.34	40.00	54.00	14.00	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: 802.11ax80 Mode Middle Channel 5210MHz Band1

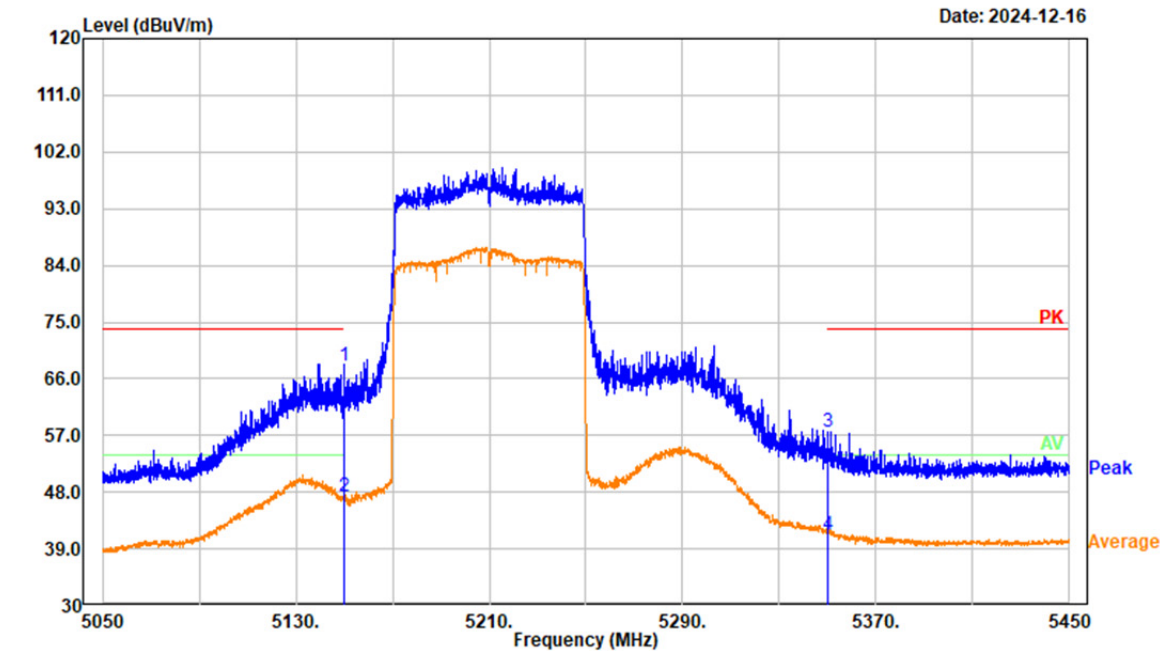


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	58.68	9.49	68.17	74.00	5.83	Peak
2	5150.000	37.71	9.49	47.20	54.00	6.80	Average
3	5350.000	48.13	9.34	57.47	74.00	16.53	Peak
4	5350.000	31.96	9.34	41.30	54.00	12.70	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: 802.11a Mode Low Channel 5745MHz Band4

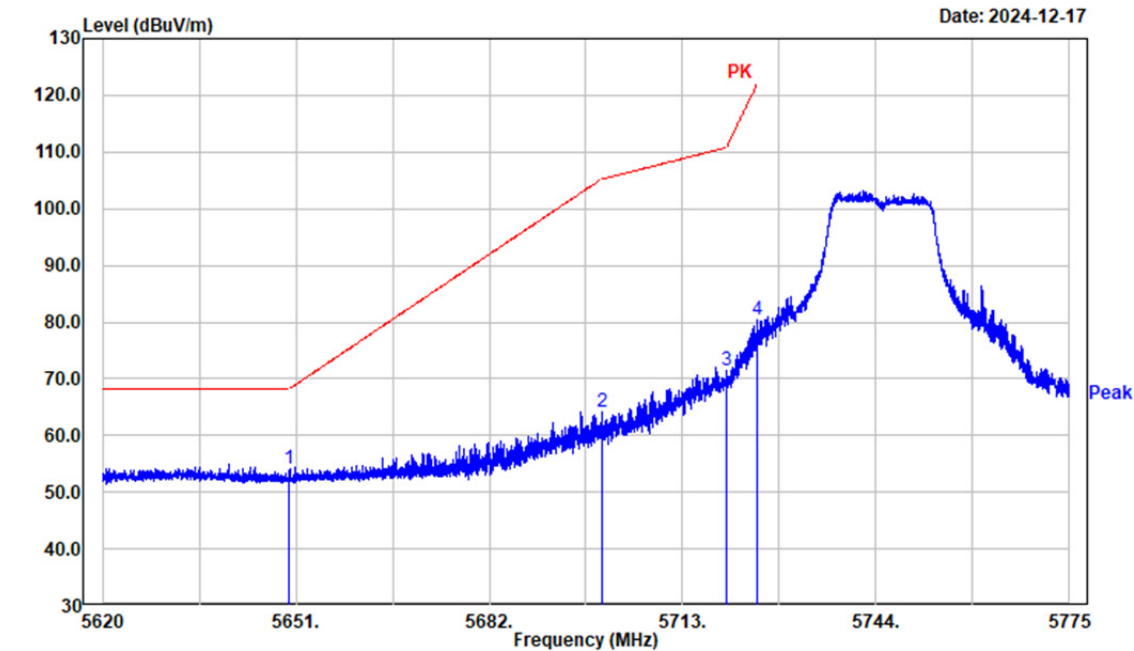


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.000	44.54	9.61	54.15	68.20	14.05	Peak
2	5700.000	54.80	9.42	64.22	105.20	40.98	Peak
3	5720.000	62.11	9.41	71.52	110.80	39.28	Peak
4	5725.000	70.93	9.40	80.33	122.20	41.87	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: 802.11a Mode Low Channel 5745MHz Band4

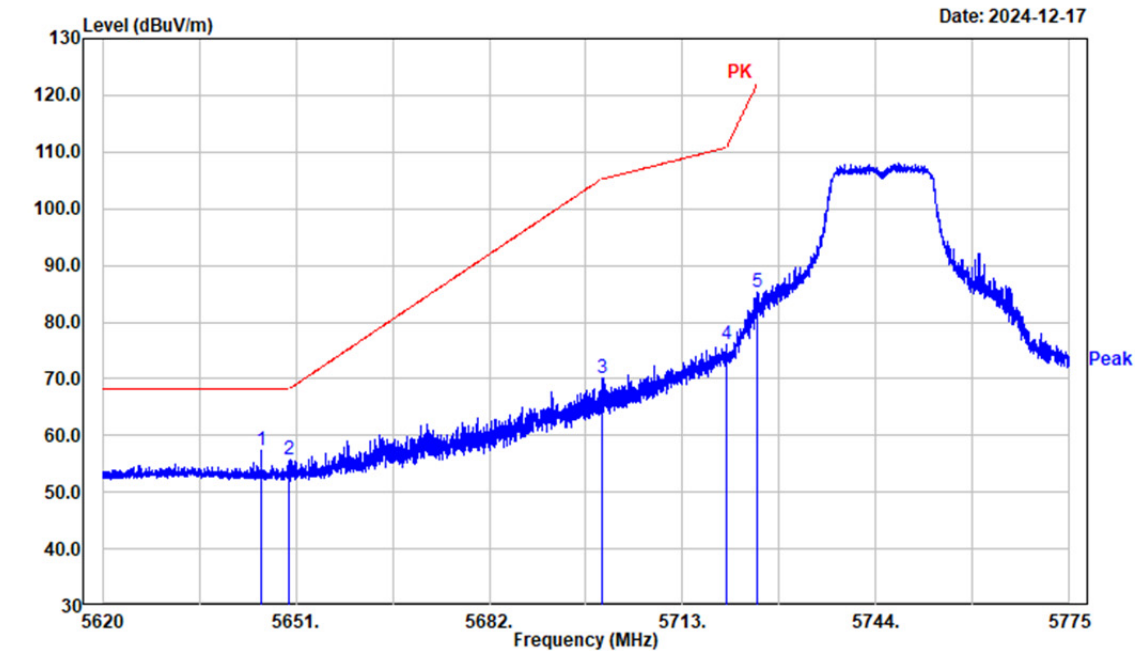


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5645.518	47.86	9.62	57.48	68.20	10.72	Peak
2	5650.000	46.06	9.61	55.67	68.20	12.53	Peak
3	5700.000	60.77	9.42	70.19	105.20	35.01	Peak
4	5720.000	66.76	9.41	76.17	110.80	34.63	Peak
5	5725.000	75.80	9.40	85.20	122.20	37.00	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: 802.11a Mode High Channel 5825MHz Band4

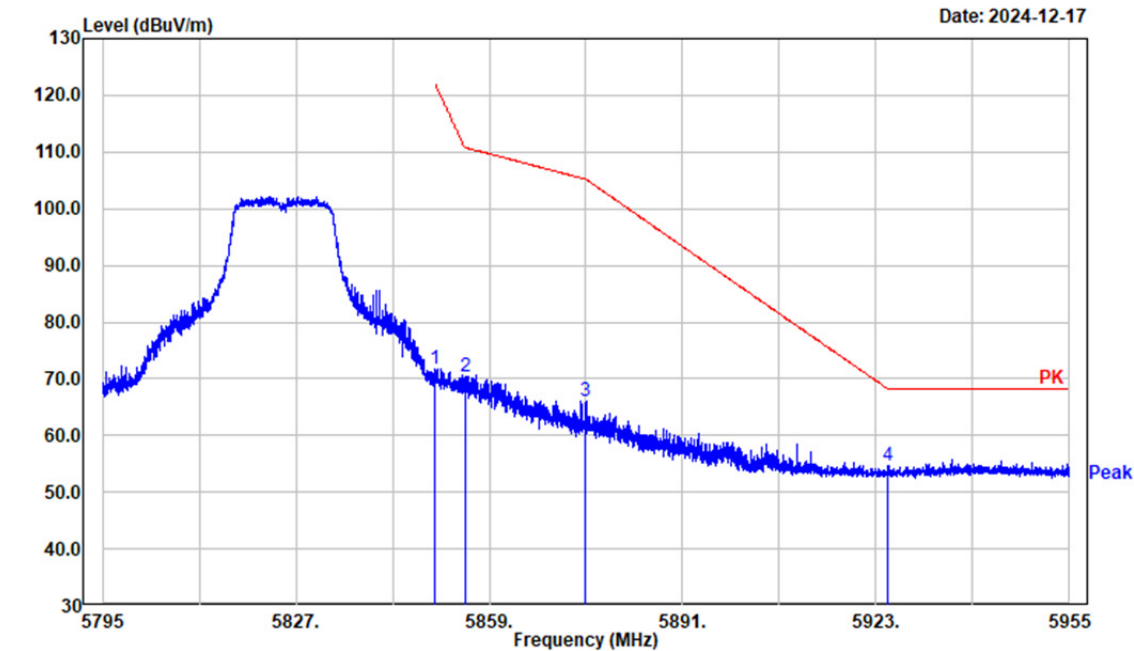

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.000	62.54	9.27	71.81	122.20	50.39	Peak
2	5855.000	61.19	9.31	70.50	110.80	40.30	Peak
3	5875.000	56.51	9.43	65.94	105.20	39.26	Peak
4	5925.000	44.84	9.83	54.67	68.20	13.53	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: 802.11a Mode High Channel 5825MHz Band4

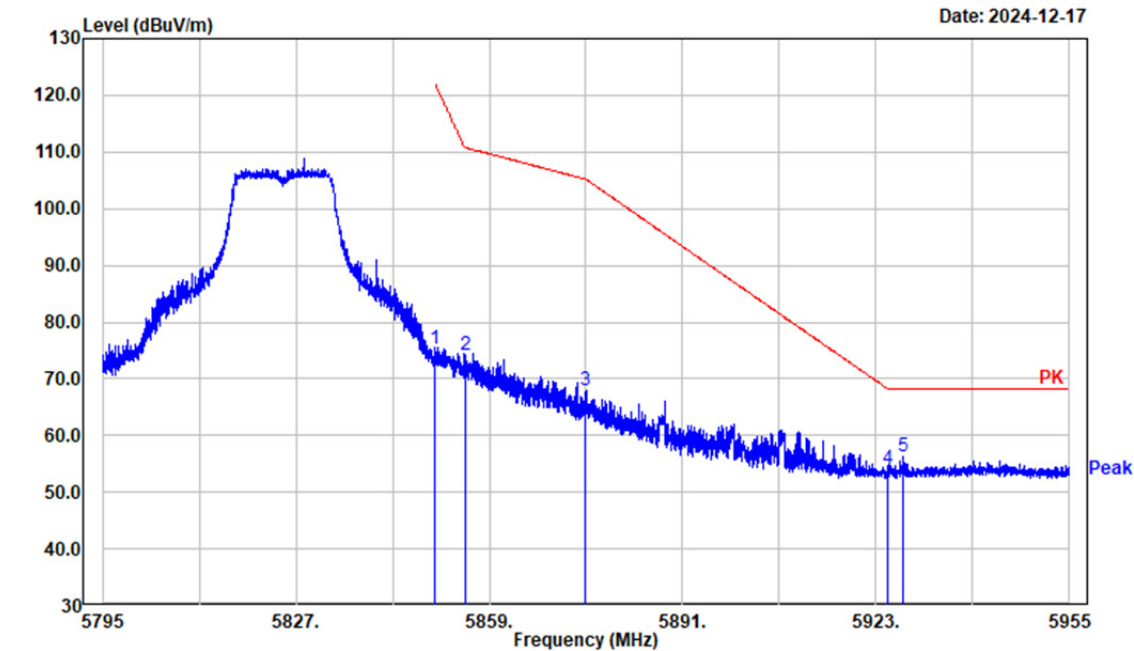

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.000	65.87	9.27	75.14	122.20	47.06	Peak
2	5855.000	64.81	9.31	74.12	110.80	36.68	Peak
3	5875.000	58.40	9.43	67.83	105.20	37.37	Peak
4	5925.000	44.40	9.83	54.23	68.20	13.97	Peak
5	5927.378	46.57	9.85	56.42	68.20	11.78	Peak