




REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVAL 審核

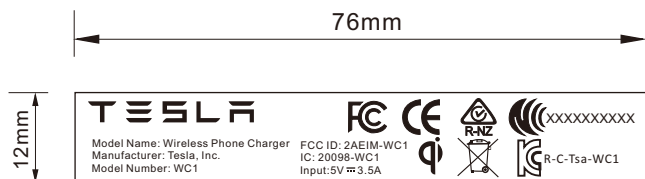

產品後蓋上2pcs label(1:1)



二維碼掃出來的信息是:P1546873-00-A: SAOV19295000001

NOTE :

- 1.All fonts is 4pt
- 2.MATERIAL : White PET 50g
- 3.PRINT COLOR: BLACK CODE QR CODE
- 4.THE BARCODE ARRANGEMENT IS FOLLOWING THE STANDARD ASII CODES.
- 5.BARCODE ARRANGEMENT :

Fixed code	Part Number	Fixed code	Build Site Code	Build Date	Unique ID
P	1546873-00-A	S	AOV	19295	000001

* AOV=SSS:Build Site Code

19295=YYJJJ=>Build Date

YY=(18=2018,19=2019...)

JJJ=Refer to TABLE A1&TABLE A2

000001=CCCCC =>Unique ID (DIGITS 0~9 AND CAPITAL LETTERS A~Z)

- 6.TO BE PRINTED IN PRODUCTION USING DMX300 RIBBON ;
- 7.THE DIMENSIONS (2) ARE INCOMING INSPECTION AND CRITICAL.
8. ALL TOLERANCE ARE +/-0.01MM .
- 9.Requirement of PRIMAX Part:
 - 1).Comply with PRIMAX QW-5Q002 Green Product Chemical Substances Specification .
 - 2).Follow customer's specification as required.
 - 3).Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required. "Product must be halogen free"

DO NOT SCALE DRAWING		PRIMAX [®] 致伸科技股份有限公司 PRIMAX ELECTRONICS LTD.	
THESE DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.		USED WCI_T75	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: 1.0		APPD. Zhibing.Wu 審核 2019/12/2	
DIMENSIONS TOLERANCE		FINISH	
6.00 TO 30.00mm ± 0.10mm		處理	
30.01 TO 80.00mm ± 0.13mm		SCALE /	
80.01 TO 150.00mm ± 0.15mm		UNIT mm	
150.01 TO 150.00mm ± 0.20mm		DR. Becky.Liu 製圖 2019/12/2	
TITLE		PRODUCT LABEL	
MATERIAL 材質		DWG NO. A910000000920	
圖號		SIZE 圖紙 A4	
FILE NAME A910000000920V7.PDF		SHEET 1/3	
檔案名稱		REV. 1	

THIS DRAWING MAY BE USED IN WHOLE OR PART

T-RR024 REVISED JAN. 95 BY T.TOMAS HSU

REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVAL 審核

TABLE A1: Julian Date Calendar

b Åò	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
1	1	32	60	91	121	152	182	213	244	274	305	335
2	2	33	61	92	122	153	183	214	245	275	306	336
3	3	34	62	93	123	154	184	215	246	276	307	337
4	4	35	63	94	124	155	185	216	247	277	308	338
5	5	36	64	95	125	156	186	217	248	278	309	339
6	6	37	65	96	126	157	187	218	249	279	310	340
7	7	38	66	97	127	158	188	219	250	280	311	341
8	8	39	67	98	128	159	189	220	251	281	312	342
9	9	40	68	99	129	160	190	221	252	282	313	343
10	10	41	69	100	130	161	191	222	253	283	314	344
11	11	42	70	101	131	162	192	223	254	284	315	345
12	12	43	71	102	132	163	193	224	255	285	316	346
13	13	44	72	103	133	164	194	225	256	286	317	347
14	14	45	73	104	134	165	195	226	257	287	318	348
15	15	46	74	105	135	166	196	227	258	288	319	349
16	16	47	75	106	136	167	197	228	259	289	320	350
17	17	48	76	107	137	168	198	229	260	290	321	351
18	18	49	77	108	138	169	199	230	261	291	322	352
19	19	50	78	109	139	170	200	231	262	292	323	353
20	20	51	79	110	140	171	201	232	263	293	324	354
21	21	52	80	111	141	172	202	233	264	294	325	355
22	22	53	81	112	142	173	203	234	265	295	326	356
23	23	54	82	113	143	174	204	235	266	296	327	357
24	24	55	83	114	144	175	205	236	267	297	328	358
25	25	56	84	115	145	176	206	237	268	298	329	359
26	26	57	85	116	146	177	207	238	269	299	330	360
27	27	58	86	117	147	178	208	239	270	300	331	361
28	28	59	87	118	148	179	209	240	271	301	332	362
29	29		88	119	149	180	210	241	272	302	333	363
30	30		89	120	150	181	211	242	273	303	334	364
31	31		90		151		212	243		304		365

Requirement of PRIMAX Part:

- 1).Comply with PRIMAX QW-5Q002 Green Product Chemical Substances Specifcatiön .
- 2).Follow customer's specification as required.
- 3). Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
"Product must be halogen free"

DO NOT SCALE DRAWING THESE DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.		PRIMAX® 致伸科技股份有限公司 PRIMAX ELECTRONICS LTD.	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: 1.0		USED 用途 WCI_T75	APPD. Zhibing.Wu 審核 2019/12/2
DIMENSIONS	TOLERANCE	FINISH 處理	CHKD. 校對
6.00 TO 30.00mm	± 0.10mm	SCALE /	UNIT mm
30.01 TO 80.00mm	± 0.13mm		
80.01 TO 150.00mm	± 0.15mm		
150.01 TO 300.00mm	± 0.20mm	TITLE 名稱	DR. Becky.Liu 製圖 2019/12/2
MATERIAL 材質		PRODUCT LABEL	
DWG NO. 圖號		A910000000920	
FILE NAME 檔案名稱		A910000000920V7.PDF	
SHEET 張		2/3	
REV. 更改		1	

TABLE A2: Julian Date Calendar Leap Year

b Åò	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
1	1	32	61	92	122	153	183	214	245	275	306	336
2	2	33	62	93	123	154	184	215	246	276	307	337
3	3	34	63	94	124	155	185	216	247	277	308	338
4	4	35	64	95	125	156	186	217	248	278	309	339
5	5	36	65	96	126	157	187	218	249	279	310	340
6	6	37	66	97	127	158	188	219	250	280	311	341
7	7	38	67	98	128	159	189	220	251	281	312	342
8	8	39	68	99	129	160	190	221	252	282	313	343
9	9	40	69	100	130	161	191	222	253	283	314	344
10	10	41	70	101	131	162	192	223	254	284	315	345
11	11	42	71	102	132	163	193	224	255	285	316	346
12	12	43	72	103	133	164	194	225	256	286	317	347
13	13	44	73	104	134	165	195	226	257	287	318	348
14	14	45	74	105	135	166	196	227	258	288	319	349
15	15	46	75	106	136	167	197	228	259	289	320	350
16	16	47	76	107	137	168	198	229	260	290	321	351
17	17	48	77	108	138	169	199	230	261	291	322	352
18	18	49	78	109	139	170	200	231	262	292	323	353
19	19	50	79	110	140	171	201	232	263	293	324	354
20	20	51	80	111	141	172	202	233	264	294	325	355
21	21	52	81	112	142	173	203	234	265	295	326	356
22	22	53	82	113	143	174	204	235	266	296	327	357
23	23	54	83	114	144	175	205	236	267	297	328	358
24	24	55	84	115	145	176	206	237	268	298	329	359
25	25	56	85	116	146	177	207	238	269	299	330	360
26	26	57	86	117	147	178	208	239	270	300	331	361
27	27	58	87	118	148	179	209	240	271	301	332	362
28	28	59	88	119	149	180	210	241	272	302	333	363
29	29	60	89	120	150	181	211	242	273	303	334	364
30	30		90	121	151	182	212	243	274	304	335	365
31	31		91		152		213	244		305		366

Requirement of PRIMAX Part:

- 1).Comply with PRIMAX QW-5Q002 Green Product Chemical Substances Specification .
- 2).Follow customer's specification as required.
- 3). Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
"Product must be halogen free"

REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVAL 審核

DO NOT SCALE DRAWING THESE DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.		PRIMAX® 致伸科技股份有限公司 PRIMAX ELECTRONICS LTD.	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: 1.0		USED 用途 WCI_T75	APPD. Zhibing.Wu 審核 2019/12/2
DIMENSIONS 6.00 TO 30.00mm ± 0.10mm 30.01 TO 80.00mm ± 0.13mm 80.01 TO 150.00mm ± 0.15mm 150.01 TO 200.00mm ± 0.20mm	TOLERANCE ± 0.10mm ± 0.13mm ± 0.15mm ± 0.20mm	FINISH 處理	CHKD. 校對
MATERIAL 材質		SCALE / 比例	UNIT mm 單位
TITLE 名稱 PRODUCT LABEL		DR. Becky.Liu 製圖 2019/12/2	
DWG NO. 圖號 A910000000920		SIZE A4 圖紙	
FILE NAME 檔案名稱 A910000000920V7.PDF		SHEET 3/3 張	REV. 1 更改