



FCC RF Test Report

APPLICANT : Getac Technology Corporation.
EQUIPMENT : WWAN module
BRAND NAME : Getac
MODEL NAME : EM7455
FCC ID : QYLEM7455RC
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

This is a partial report. The product was received on Jun. 06, 2017 and testing was completed on Jan. 26, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : QYLEM7455RC

Page Number : 1 of 14

Report Issued Date : Feb. 06, 2018

Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 2.0



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Product Feature of Equipment Under Test	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	7
2.3 Support Unit used in test configuration	8
2.4 Frequency List of Low/Middle/High Channels.....	8
3 CONDUCTED TEST RESULT.....	9
3.1 Measuring Instruments.....	9
3.2 Test Setup	9
3.3 Test Result of Conducted Test.....	9
3.4 Conducted Output Power	10
4 RADIATED TEST ITEMS	11
4.1 Measuring Instruments.....	11
4.2 Test Setup	11
4.3 Test Result of Radiated Test.....	11
4.4 Field Strength of Spurious Radiation Measurement	12
5 LIST OF MEASURING EQUIPMENT	13
6 UNCERTAINTY OF EVALUATION	14
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG391803-39A	Rev. 01	Initial issue of report	Feb. 06, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
	§2.1046	Conducted Output Power	Reporting Only	PASS
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS
Remark: Except radiated spurious emission is carrying out, FG391803-39A report reuses conducted output power test data from the FG391803-20A report. For other test data please refer to Sierra Report No.: B15W50341-FCC-RF_Rev1 for WWAN module (Model: EM7455).				

1 General Description

1.1 Applicant

Getac Technology Corporation.

5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei City 11568, Taiwan, R.O.C.

1.2 Product Feature of Equipment Under Test

WCDMA/LTE

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna

The product was installed into Tablet (Brand Name: Getac, Model Name: RC11) during test, and all tests were performed with Sample 2.

Sample 1	Tablet with SKU A
Sample 2	Tablet with SKU B

SKU Table		
RC11 SKU		
	SKU A	SKU B
CPU	i3-7100U	i3-7100U
DDR	8G	8G
SSD	64GB	256GB
Panel	AUO HD B116XAN05.0	AUO HD B116XAN05.0
Digitizer	Getac	Not Support
Option Bay	BCR	NA(MSR)
Expansion Bay	RFID	NA
WLAN/BT	Support	Support
WWAN	Support	Support
GPS	Support	Support
Webcam FHD	Support	Support
IR Webcam	Support	Support
RFID	Support	Not Support

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH11-HY

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA-603-E
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	-	■ RMC 12.2Kbps Link
WCDMA Band IV	-	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

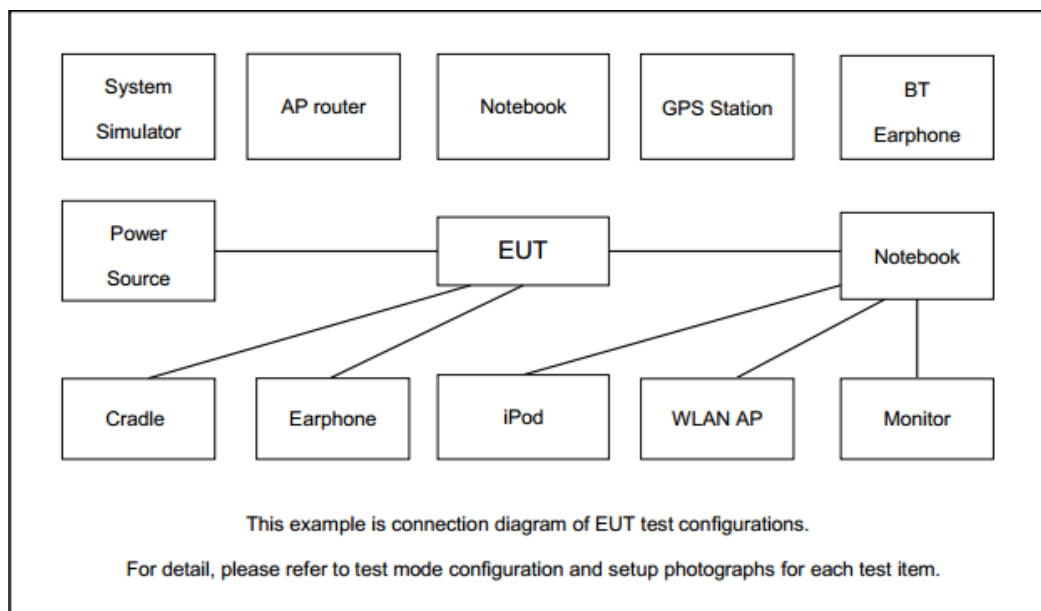



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	N/A	N/A

2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6


3 Conducted Test Result

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

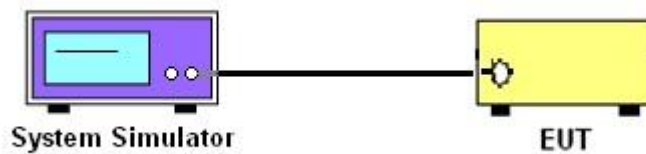

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

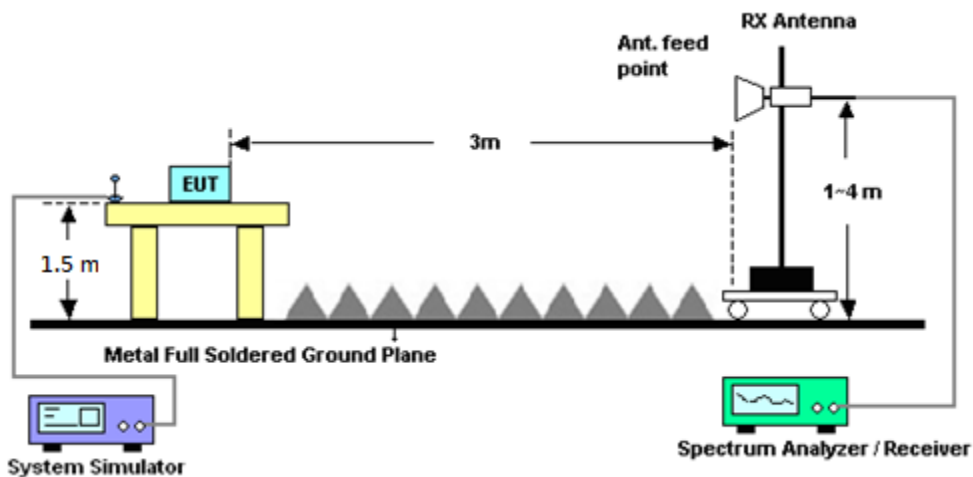

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows ANSI C63.26 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station	Anritsu	MT8820C	6201381760	-	May 17, 2017	Jun. 06, 2017	May 16, 2018	Conducted (TH03-HY)
Base Station	Anritsu	E5515C	MY50266977	-	May 30, 2017	Jun. 06, 2017	May 29, 2018	Conducted (TH03-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jan. 25, 2018~ Jan. 26, 2018	Jul. 17, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Jan. 25, 2018~ Jan. 26, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N0602	30MHz~1GHz	Oct. 14, 2017	Jan. 25, 2018~ Jan. 26, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 16, 2017	Jan. 25, 2018~ Jan. 26, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1GHz ~ 18GHz	Mar. 17, 2017	Jan. 25, 2018~ Jan. 26, 2018	Mar. 16, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Jan. 25, 2018~ Jan. 26, 2018	Nov. 22, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Jan. 25, 2018~ Jan. 26, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 19, 2017	Jan. 25, 2018~ Jan. 26, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-1080-1200-1500-60SS	SN2	1.2G High Pass	Sep. 18, 2017	Jan. 25, 2018~ Jan. 26, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jan. 25, 2018~ Jan. 26, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 25, 2018~ Jan. 26, 2018	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY57290111	3Hz~26.5GHz	Nov. 02, 2017	Jan. 25, 2018~ Jan. 26, 2018	Nov. 01, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz- 40GHz	Apr. 27, 2017	Jan. 25, 2018~ Jan. 26, 2018	Apr. 26, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Jan. 25, 2018~ Jan. 26, 2018	Nov. 26, 2018	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 22, 2017	Jan. 25, 2018~ Jan. 26, 2018	May 21, 2018	Radiation (03CH11-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.37
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.67
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.03
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	22.38	22.25	22.28	22.75	22.86	22.57
HSDPA Subtest-1	22.06	22.14	22.33	22.22	22.23	22.14
HSDPA Subtest-2	22.10	22.18	22.14	22.01	22.04	22.09
HSDPA Subtest-3	21.43	21.72	21.66	21.71	21.55	21.62
HSDPA Subtest-4	21.52	21.54	21.76	21.63	21.59	21.52
HSUPA Subtest-1	22.03	22.18	22.23	22.17	22.33	22.21
HSUPA Subtest-2	20.41	20.54	20.66	20.68	20.87	20.70
HSUPA Subtest-3	21.06	21.01	21.16	21.14	21.19	21.11
HSUPA Subtest-4	21.36	21.30	21.35	21.71	21.53	21.73
HSUPA Subtest-5	22.00	22.10	22.19	22.16	22.24	22.05



Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	22.60	22.73	22.69
HSDPA Subtest-1	22.15	22.12	22.20
HSDPA Subtest-2	22.07	22.11	22.31
HSDPA Subtest-3	21.60	21.59	21.72
HSDPA Subtest-4	21.71	22.09	21.66
HSUPA Subtest-1	22.04	22.07	22.17
HSUPA Subtest-2	20.68	20.70	20.83
HSUPA Subtest-3	21.16	21.01	21.25
HSUPA Subtest-4	21.41	21.56	21.66
HSUPA Subtest-5	22.05	22.11	22.22



Appendix B. Test Results of Radiated Test

WCDMA 850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-58.83	-13	-45.83	-68.27	-65.8	0.53	9.64	H
	2479	-61.02	-13	-48.02	-73.65	-69	0.65	10.78	H
	3305	-58.99	-13	-45.99	-74.57	-68.1	0.76	12.02	H
									H
									H
									H
									H
	1656	-60.83	-13	-47.83	-70.08	-67.8	0.53	9.64	V
	2479	-60.22	-13	-47.22	-73.68	-68.2	0.65	10.78	V
	3305	-58.79	-13	-45.79	-74.5	-67.9	0.76	12.02	V
									V
									V
									V
									V



WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-59.10	-13	-46.10	-68.71	-66.1	0.53	9.68	H
	2510	-60.50	-13	-47.50	-73.61	-68.5	0.66	10.81	H
	3345	-58.38	-13	-45.38	-74.28	-67.6	0.76	12.14	H
									H
									H
									H
									H
	1672	-61.60	-13	-48.60	-69.12	-68.6	0.53	9.68	V
	2510	-59.60	-13	-46.60	-73.36	-67.6	0.66	10.81	V
	3345	-59.38	-13	-46.38	-74.64	-68.6	0.76	12.14	V
									V
									V
									V
									V
Highest	1696	-59.55	-13	-46.55	-69.5	-66.6	0.53	9.73	H
	2540	-60.29	-13	-47.29	-73.51	-68.3	0.67	10.82	H
	3387	-58.26	-13	-45.26	-74.69	-67.6	0.77	12.26	H
									H
									H
									H
									H
	1696	-60.05	-13	-47.05	-69.62	-67.1	0.53	9.73	V
	2540	-60.19	-13	-47.19	-73.52	-68.2	0.67	10.82	V
	3387	-59.26	-13	-46.26	-74.99	-68.6	0.77	12.26	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.