

EMC Test Report

regarding

USA: CFR Title 47, Part 15.247 (Emissions)
Canada: IC RSS-247v2/GENv5 (Emissions)

for



SLA 3P8S

Category: DTS Transceiver

Judgments:

Aligns with FCC Part 15.247, ISSED RSS-247v2

Testing Completed: July 14, 2023



Prepared for:

Vitesco Technologies GmbH

Siemensstrasse 12, Regensburg 93055 Germany

Phone: +49-9412031-3244, Fax: -

Contact: Stefan Lehmann, stefan.lehmann@vitesco.com

Data Rec./Rev. by:

John Nantz
John Nantz

Rpt. Auth. by:

Dr. Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Rpt. Prep./Rev. by:

Dr. Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Date of Issue:

July 18, 2023

Revision History

Rev. No.	Date	Details	Revised By
r0	July 18, 2023	Initial Release.	J. Brunett
r1	August 4, 2023	Channel typo corr.	J. Brunett

Contents

Revision History	2
Table of Contents	2
1 Test Report Scope and Limitations	5
1.1 Laboratory Authorization	5
1.2 Report Retention	5
1.3 Subcontracted Testing	5
1.4 Test Data	5
1.5 Limitation of Results	5
1.6 Copyright	5
1.7 Endorsements	5
1.8 Test Location	6
1.9 Traceability and Equipment Used	6
2 Test Specifications and Procedures	7
2.1 Test Specification and General Procedures	7
3 Configuration and Identification of the Equipment Under Test	8
3.1 Description and Declarations	8
3.1.1 EUT Configuration	9
3.1.2 Modes of Operation	9
3.1.3 Variants	9
3.1.4 Test Samples	9
3.1.5 Functional Exerciser	9
3.1.6 Modifications Made	9
3.1.7 Production Intent	9
3.1.8 Declared Exemptions and Additional Product Notes	9
4 Emissions	10
4.1 General Test Procedures	10
4.1.1 Radiated Test Setup and Procedures	10
4.1.2 Conducted Emissions Test Setup and Procedures	12
4.1.3 Power Supply Variation	12
4.2 Intentional Emissions	13
4.2.1 Duty and Transmission Cycle, Pulsed Operation	13
4.2.2 Fundamental Emission Bandwidth	14
4.2.3 Effective Isotropic Radiated Power	16
4.2.4 Power Spectral Density	17
4.3 Unintentional Emissions	19
4.3.1 Restricted Band Transmit Chain Spurious Emissions	19
4.3.2 OOB Transmit Chain Spurious Emissions	20
4.3.3 General Radiated Spurious	21

5 Measurement Uncertainty and Accreditation Documents

22

List of Tables

1	Test Site List.	6
2	Equipment List.	6
3	EUT Declarations.	8
4	Pulsed Emission Characteristics (Duty Cycle).	13
5	Intentional Emission Bandwidth.	14
6	Radiated Power Results.	16
6	Radiated Power Results.	16
7	Power Spectral Density Results.	17
8	Transmit Chain Spurious Emissions.	19
9	Radiated Spurious Emissions.	21
10	Measurement Uncertainty.	22

List of Figures

1	Photos of EUT.	8
2	EUT Test Configuration Diagram.	9
3	Radiated Emissions Diagram of the EUT.	10
4	Radiated Emissions Test Setup Photograph(s).	11
5	Conducted RF Test Setup Photograph(s).	12
6	Example Pulsed Emission Characteristics (Duty Cycle).	13
7	Example Intentional Emission Bandwidth Plots.	15
8	Power Spectral Density Plots.	18
9	Worst Case Transmitter OOB Emissions Measured.	20
10	Accreditation Documents	22

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249). Amber Helm Development L.C. holds accreditation under NVLAP Lab Code 200129-0.

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until August 2033.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Test Data

This test report contains data included within the laboratory's scope of accreditation. Any data in this report that is not covered under the laboratory's scope is clearly identified.

1.5 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.6 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

1.7 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.8 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1: Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	3615 E Grand River Rd., Williamston, Michigan 48895	OATSC

1.9 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Cal/Ver By / Date Due
Spectrum Analyzer	R & S / FSV30	101660	RSFSV30001	RS / Apr-2024
EMI Receiver	R & S / ESW26	101313	RSESW2601	RS / October-2023
Quad Ridge Horn	Singer / A6100	C35200	HQR1TO18S01	Keysight / Aug-2024
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Keysight / Aug-2023
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Keysight / Aug-2023
K-Band Horn	JEF / NRL Std.	001	HRNK01	AHD / Jul-2024
BNC-BNC Coax	WRTL / RG58/U	001	CAB001-BLACK	AHD / Sept-2023
3.5-3.5MM Coax	PhaseFlex / PhaseFlex	001	CAB015-PURP	AHD / Sept-2023

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The goal of Vitesco Technologies GmbH is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Vitesco Technologies GmbH SLA 3P8S for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.247
Canada	ISED Canada	IC RSS-247v2/GENv5

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
ANSI C63.10:2013	"American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
KDB 558074 D01 v05r02	"GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES "
KDB 662911 D01v02r01	"Emissions Testing of Transmitters with Multiple Outputs in the Same Band"
KDB 662911 D02 v01	"MIMO with Cross-Polarized Antenna"
TP0102RA	"AHD Internal Document TP0102 - Radiated Emissions Test Procedure"
ICES-003; Issue 7 (2020)	"Information Technology Equipment (ITE) - Limits and methods of measurement"

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The EUT is a proprietary 802.15.4 based transceiver used as a battery monitor. The EUT is approximately 61 x 26 x 10 cm in dimension, and is depicted in Figure 1. It is powered by 11-38 VDC 8S3P LiIon Power Pack. This product is used as a wireless battery cell monitor used in a motor vehicle battery pack. Table 3 outlines provider declared EUT specifications.

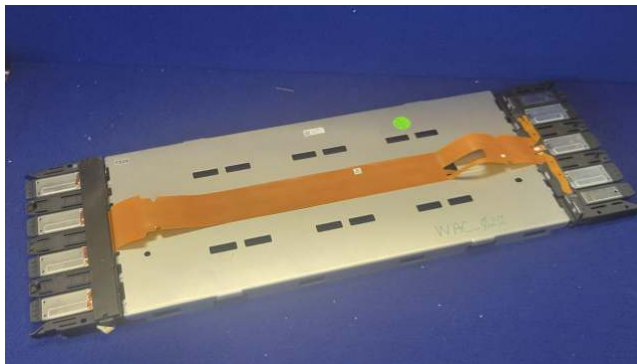


Figure 1: Photos of EUT.

Table 3: EUT Declarations.

General Declarations	
Equipment Type:	DTS Transceiver
Country of Origin:	USA
Nominal Supply:	11-38 VDC
Oper. Temp Range:	Not Declared
Frequency Range:	2405 - 2480 MHz
Antenna Dimension:	2.5 x 0.75 cm
Antenna Type:	Chip Antenna
Antenna Gain:	2.6 dBi
Number of Channels:	16
Channel Spacing:	5 MHz
Alignment Range:	Not Declared
Type of Modulation:	GFSK
United States	
FCC ID Number:	2A6TC-SLA3P8S
Classification:	DTS
Canada	
IC Number:	28616-SLA3P8S
Classification:	Other

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.




Figure 2: EUT Test Configuration Diagram.

3.1.2 Modes of Operation

The EUT can employ both 1Mbps and 2Mbps data rates over 16 operating channels. The manufacturer provided PC software for radio configuration and for monitoring the device performance during testing.

3.1.3 Variants

There is only a single variant of the EUT.

3.1.4 Test Samples

Three samples of the EUT were provided for testing. Two programmed with a radio test firmware configurable by laptop and UART for radio testing (SN: 1854, 1918) and one normal operating sample (SN:1848), all of which were tested herein.

3.1.5 Functional Exerciser

EUT transmissions were monitored to confirm product functionality.

3.1.6 Modifications Made

Pretesting indicated the radio power level had to be reduced to a setting of 8. Final testing was performed on samples with this power level implemented by the manufacturer.

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

None.

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.8 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

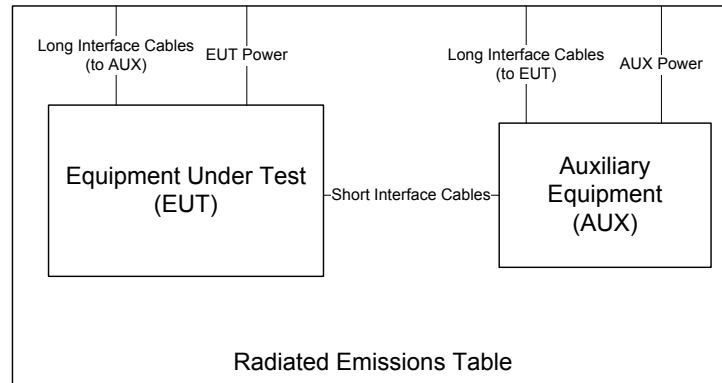


Figure 3: Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulation. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, 10cm diameter single-axis broadband probes meeting the requirements of ISSED SPR-002 section 5.2 are employed. Measurements are repeated and summed over three axes, and the entire frequency range is measured with and without the EUT transmitting.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4×5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to $\text{dB}\mu\text{V}/\text{m}$ at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$\text{EIRP}(\text{dBm}) = E_{3m}(\text{dB}\mu\text{V}/\text{m}) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.



Figure 4: Radiated Emissions Test Setup Photograph(s).

4.1.2 Conducted Emissions Test Setup and Procedures

Transmit Antenna Port Conducted Emissions At least one sample EUT supplied for testing was provided with a 50Ω antenna port. Conducted transmit chain emissions measurements (where applicable) are made by connecting the EUT antenna port directly to the test receiver port. Photographs of the test setup employed are depicted in Figure 5.

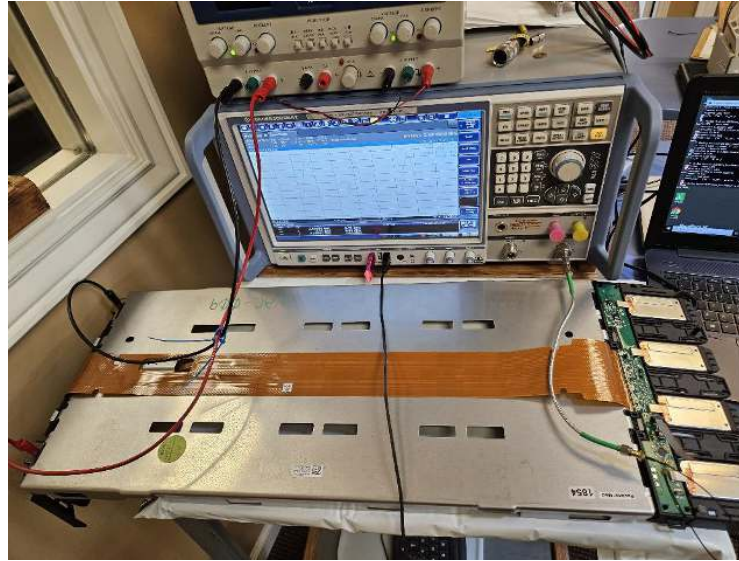


Figure 5: Conducted RF Test Setup Photograph(s).

The EUT is not subject to measurement of power line conducted emissions as it is powered solely by its internal battery.

4.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than $\pm 10\%$ of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

4.2 Intentional Emissions

4.2.1 Duty and Transmission Cycle, Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 4. Plots showing the measurements made to obtain these values are provided in Figure 6.

Table 4: Pulsed Emission Characteristics (Duty Cycle).

Test Date: 13-Jul-23
 Test Engineer: John Nantz
 EUT Vitesco SLA 3P8S
 Meas. Distance: Conducted

Test Mode Pulsed Operation / Average Measurement Duty Cycle								
R0	Mode	Data Rate Mbps	Voltage V	Oper. Freq MHz	Pulse Length	Pulse Period	Duty Cycle %	Power Duty Correction dB
R1	1 Mbps	1.0	36.0	2440.0	1.0	1.0	100.0	
R2	2 Mbps	2.0	36.0	2440.0	1.0	1.0	100.0	
#	C1	C3	C4	C5	C6	C7	C8	C9

ROW COLUMN NOTE

All C8 Duty Cycle measured in line with DTS guidance 558074 D01 v5 r02 sec 6(b) for averaging only over full-power transmission pulses.

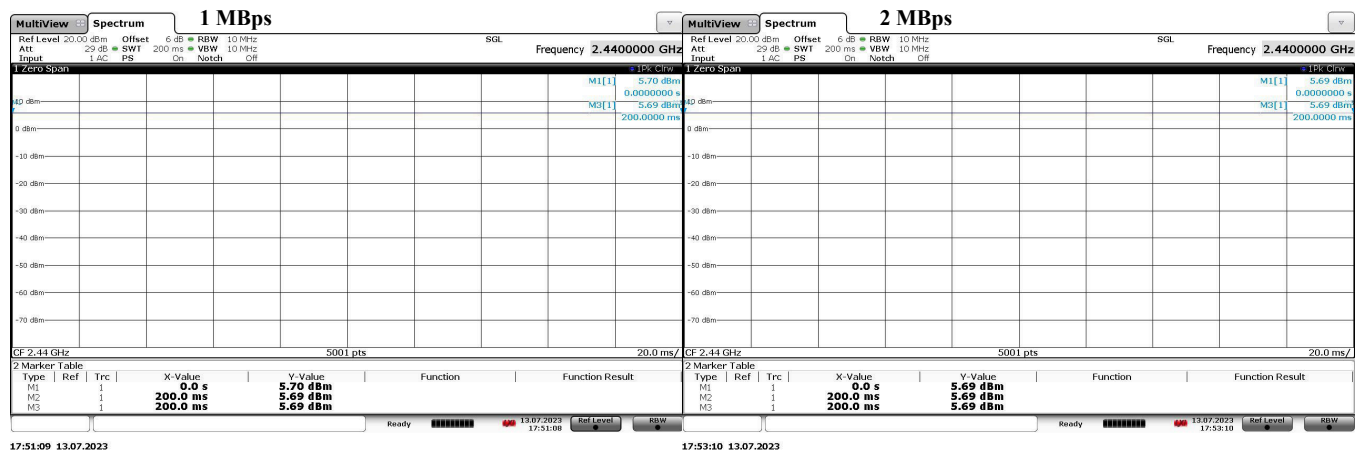


Figure 6: Example Pulsed Emission Characteristics (Duty Cycle).

4.2.2 Fundamental Emission Bandwidth

Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available packet length and minimum packet spacing. Radiated emissions are recorded following the test procedures listed in Section 2.1. The 6 dB bandwidth is measured for the lowest, middle, and highest channels available. The 99% emission bandwidth per IC test procedures is also reported. The results of this testing are summarized in Table 5. Plots showing measurements employed obtain the emission bandwidths reported are provided in Figure 7.

Table 5: Intentional Emission Bandwidth.

Test Date: 13-Jul-23
Test Engineer: John Nantz
EUT: Vitesco SLA 3P8S
Meas. Distance: Conducted

R0	Transmit Mode	Data Rate (Mbps)	Voltage (V)	Oper. Freq (MHz)	Occupied Bandwidth				Pass/Fail
					6 dB BW (MHz)	6 dB BW Limit (MHz)	99% OBW (MHz)	20 dB BW (MHz)	
R1	1 Mbps	1.0	36.0	2405.0	1.414	0.50	2.041	2.383	Pass
R2				2440.0	1.394	0.50	2.044	2.378	Pass
R3				2480.0	1.354	0.50	2.040	2.353	Pass
R4	2 Mbps	2.0	36.0	2405.0	1.374	0.50	2.042	2.383	Pass
R5				2440.0	1.359	0.50	2.042	2.368	Pass
R6				2480.0	1.354	0.50	2.043	2.368	Pass
#	C1	C2	C3	C4	C5	C6	C7	C8	C9

ROW

COLUMN

NOTE

R0

C5

DTS Bandwidth measured with RBW = 100 kHz per ANSI C63.10 11.8.1

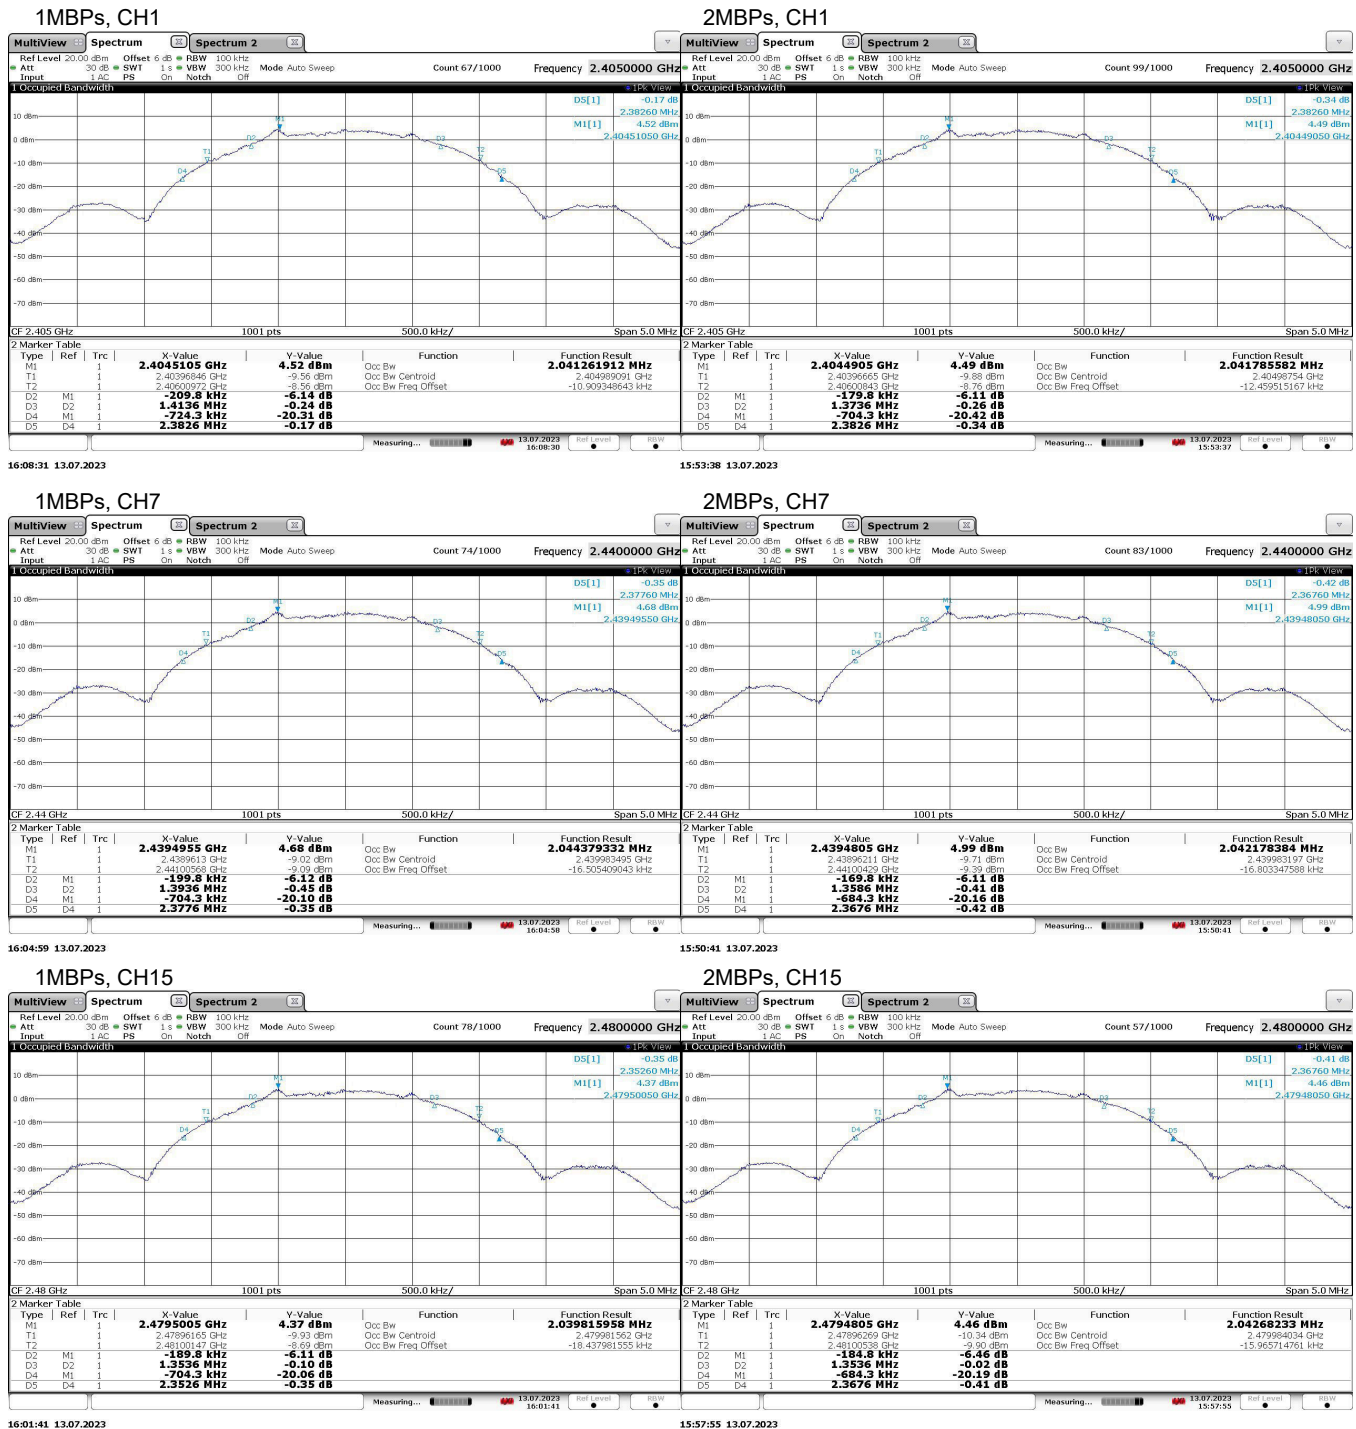


Figure 7: Example Intentional Emission Bandwidth Plots.

4.2.3 Effective Isotropic Radiated Power

The EUT's radiated power is computed from antenna port conducted power measurements and the gain of the EUT antenna(s). Where the EUT is not sold with an antenna connector, a modified product has been provided including such. The results of this testing are summarized in Table 6.


Table 6(a): Radiated Power Results.

Test Date: 13-Jul-23
 Test Engineer: John Nantz
 EUT: Vitesco SLA 3P8S
 Meas. Distance: Conducted

R0	Fundamental Power										
	Mode	Channel	Freq. MHz	Pout (Pk) dBm	Duty dB	Pout + Duty dBm	Ant Gain dBi	EIRP (Avg) dBm	EIRP (Avg) Limit dBm	Pass dB	Comments
R1	1 Mbps	L	2405.0	5.5	0.0	5.5	2.60	8.1	36.0	27.9	
R2		M	2440.0	5.8	0.0	5.8	2.60	8.4	36.0	27.7	
R3		H	2480.0	5.2	0.0	5.2	2.60	7.8	36.0	28.2	
R4	2 Mbps	L	2405.0	5.5	0.0	5.5	2.60	8.1	36.0	27.9	
R5		M	2440.0	5.8	0.0	5.8	2.60	8.4	36.0	27.7	
R6		H	2480.0	5.2	0.0	5.2	2.60	7.8	36.0	28.2	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11

(ROW) (COLUMN) NOTE:
 R0 C5 Measured maximum peak conducted power from the radio using conducted test sample following DTS Guidance 558074 D01 v5 r02 Section 8.3.1.1
 R0 C7 Worst Case Antenna Gain from Antenna Datasheet – 2.6 dBi.

Table 6(b): Radiated Power Results.

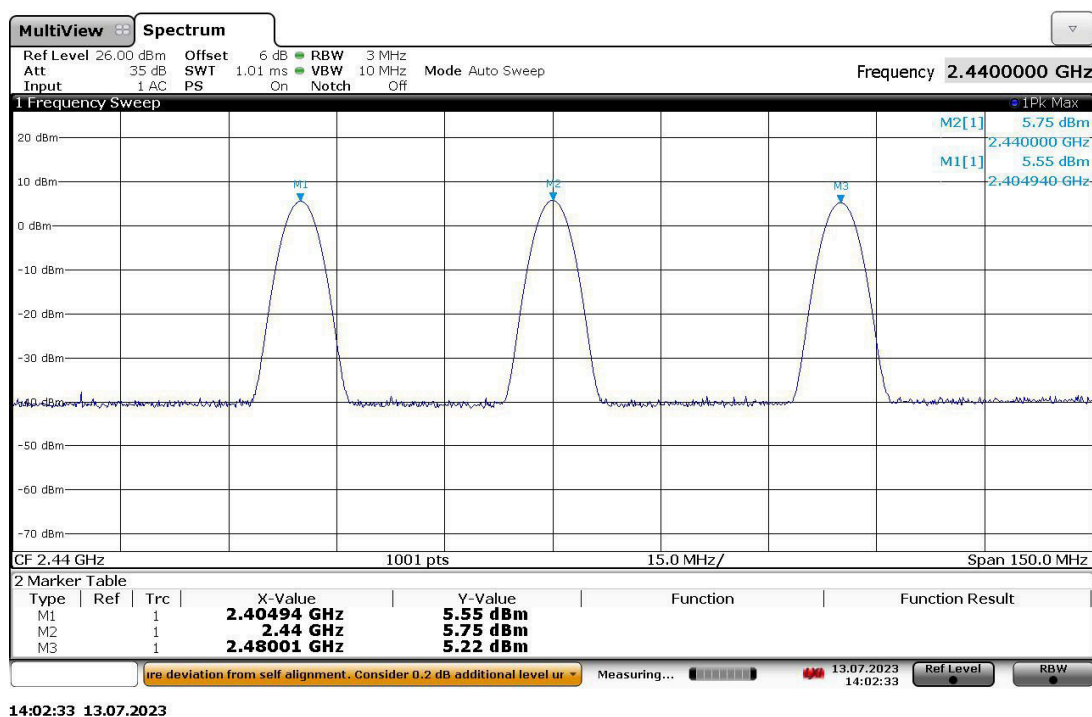

4.2.4 Power Spectral Density

For this test, the EUT was attached directly to the test receiver. Following FCC DTS measurement procedures, the emission spectrum is first scanned for maximum spectral peaks, the span and receiver bandwidth are then reduced until the power spectral density is measured in the prescribed receiver bandwidth. The results of this testing are summarized in Table 7. Plots showing how these measurements were made are depicted in Figure 8.

Table 7: Power Spectral Density Results.

Frequency Range		Detector	IF Bandwidth		Video Bandwidth		Test Date:	13-Jul-23
2400-2483.5		Pk	3 kHz		10 kHz		Test Engineer:	John Nantz
							EUT:	Vitesco SLA 3P8S
							Meas. Distance:	Conducted
Power Spectral Density								
R0	Mode	Channel	Frequency (MHz)	Ant. Used	PSDcond (meas) (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass By (dB)	
R1	1 Mbps	L	2405.0	Cond.	-9.6	8.00	17.6	
R2		M	2440.0	Cond.	-8.1	8.00	16.1	
R3		H	2480.0	Cond.	-9.7	8.00	17.7	
R4	2 Mbps	L	2405.0	Cond.	-9.6	8.00	17.6	
R5		M	2440.0	Cond.	-8.1	8.00	16.1	
R6		H	2480.0	Cond.	-9.7	8.00	17.7	
#	C1	C2	C3	C4	C5	C6	C7	
(ROW) R0	(COLUMN) C5	NOTE: PSD measured conducted out the EUT antenna port following ANSI C63.10, section: 11.10.2						

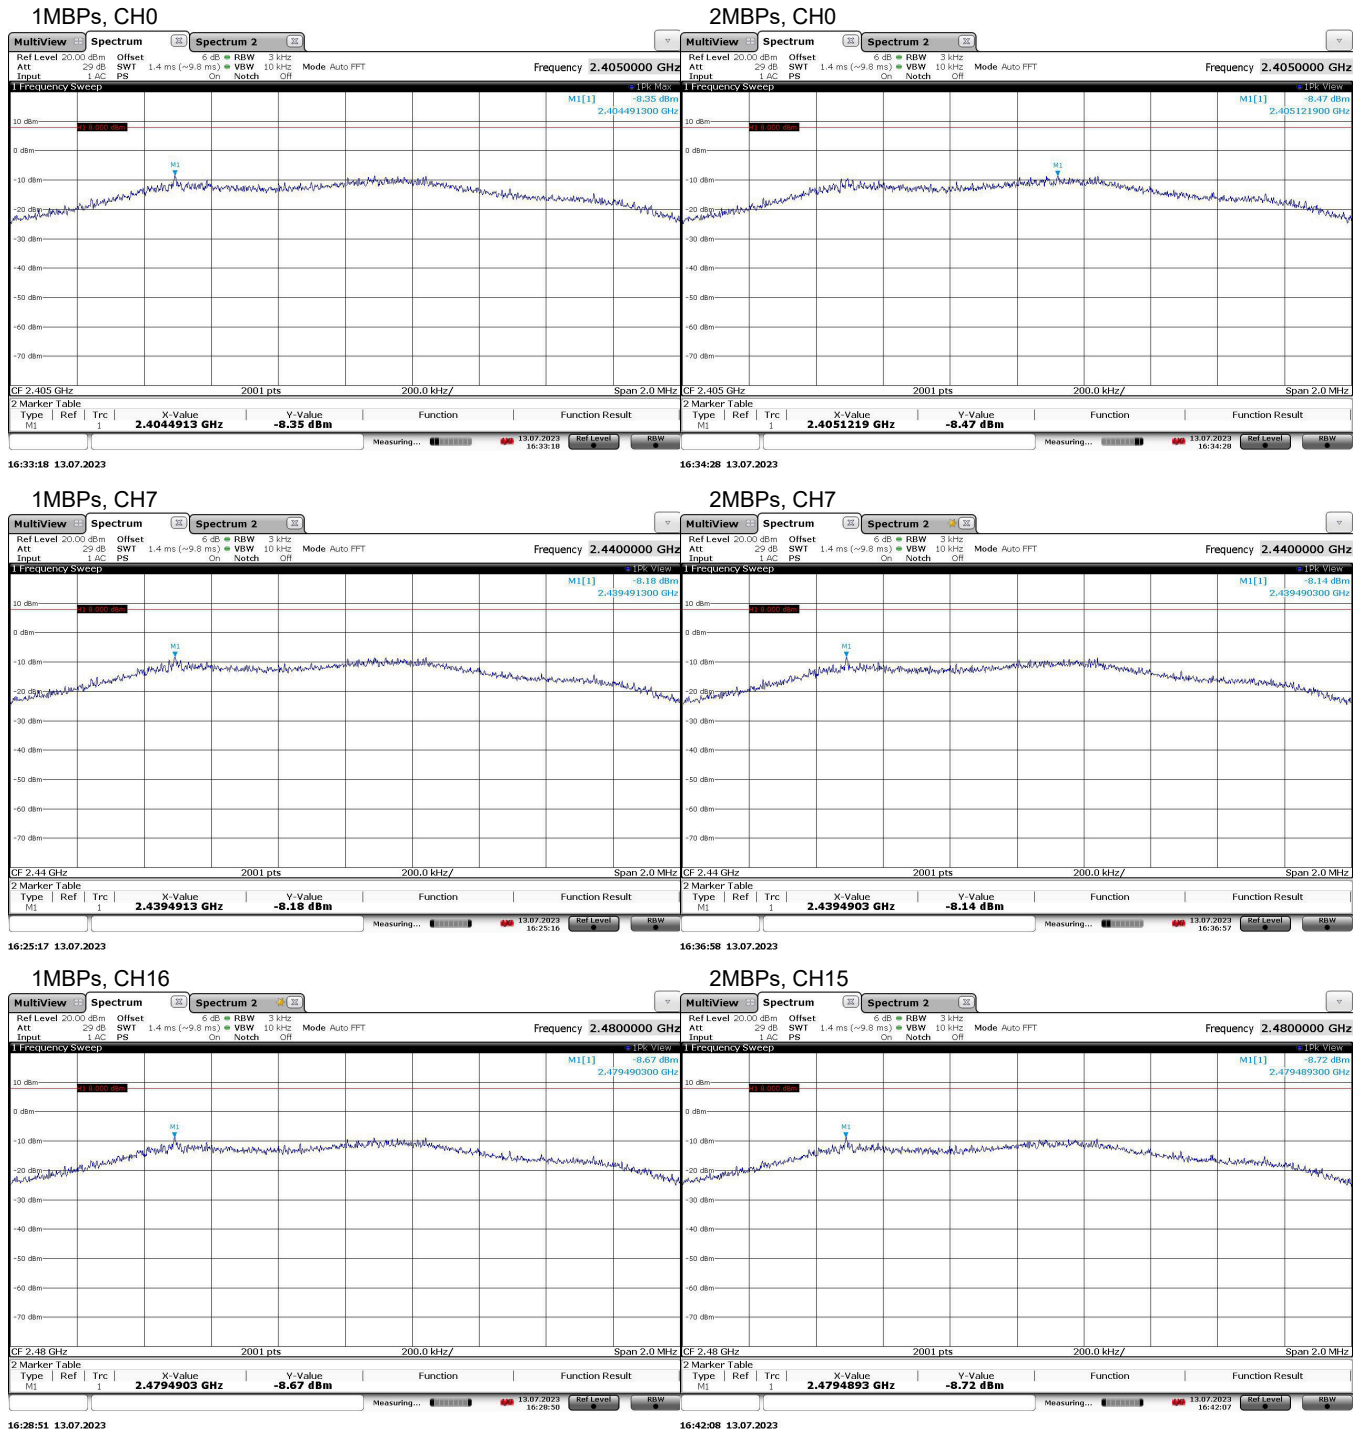



Figure 8: Power Spectral Density Plots.

4.3 Unintentional Emissions

4.3.1 Restricted Band Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 8. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 8: Transmit Chain Spurious Emissions.

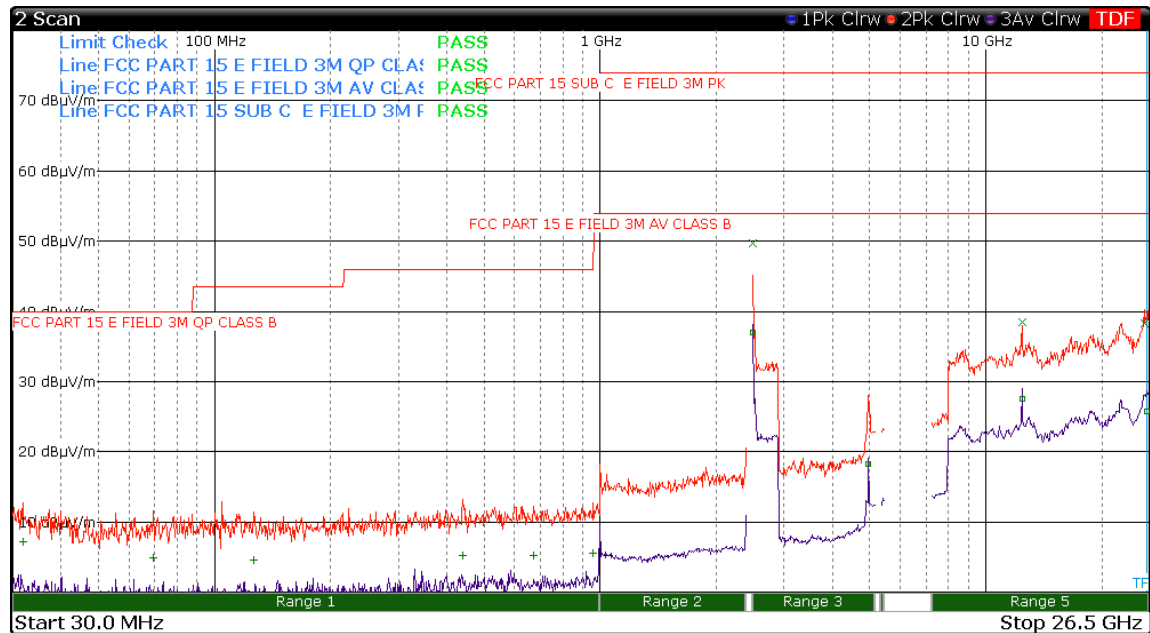

Frequency Range	Det	IF Bandwidth	Video Bandwidth	Test Date:	13-Jul-23
30 MHz < f < 1 000 MHz	Pk/Qpk	100 kHz	300 kHz	Test Engineer:	John Nantz
f > 1 000 MHz	Pk/Avg	1 MHz	3 MHz	EUT:	Vitesco SLA 3P8S
				Meas. Distance:	Conducted

Transmitter Spurious - RADIO 1													FCC/IC
R0	Mode	Start MHz	Stop MHz	Pk dBm	Avg dBm	Ant Gain dBi	GR Factor	Avg Duty Factor	Meas. Pk dBuV/m	Limit Pk dBuV/m	Meas. Avg dBuV/m	Limit Avg dBuV/m	Pass
R1	Fundamental Restricted Band Edge (Low Side)												
R2	1M/2M	2390.0	2390.0	-77.5	-78.4	2.6			20.3	74.0	19.4	54.0	34.6
R3	Fundamental Restricted Band Edge (High Side)												
R4	1M/2M	2483.5	2483.5	-48.1	-60.9	2.6			49.7	74.0	36.9	54.0	17.1
R5	Restricted Bands Emissions												
R6	1M/2M	30	88	-87.5		2.6	4.7		15.0			40	25.0
R7	1M/2M	88	216	-83.2		2.6	4.7		19.3			43	23.7
R8	1M/2M	216	1000	-81.2		2.6	4.7		21.3			46	24.7
R9	1M/2M	1000.0	2400.0	-77.5	-78.4	2.6			20.3	74.0	19.4	54.0	34.6
R10	1M/2M	2483.5	4000.0	-48.1	-60.9	2.6			49.7	74.0	36.9	54.0	17.1
R11	1M/2M	4810.0	4810.0	-78.7	-83.2	2.6			19.1	74.0	14.6	54.0	39.4
R12	1M/2M	4870.0	4870.0	-77.5	-81.0	2.6			20.3	74.0	16.8	54.0	37.2
R13	1M/2M	4950.0	4950.0	-75.3	-79.6	2.6			22.5	74.0	18.2	54.0	35.8
R14	1M/2M	4000.0	6000.0	-75.0	-78.8	2.6			22.8	74.0	19.0	54.0	35.0
R15	1M/2M	6000.0	8400.0	-72.0	-76.5	2.6			25.8	74.0	21.3	54.0	32.7
R16	1M/2M	8400.0	12500.0	-56.8	-66.9	2.6			41.0	74.0	30.9	54.0	23.1
R17	1M/2M	12500.0	25000.0	-59.7	-72.8	2.6			38.1	74.0	25.0	54.0	29.0
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13
													C14

(ROW) (COLUMN) NOTE:

- R0 C4/C5 Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6 and 8.7 respectively.
- R2/R4 C4/C5 Measured using the mode with widest bandwidth and max. output power/PSD according to ANSI C63-10-2013 sections 5.6.2.2 and 6.10.5.2 respectively
- R0 C6 Worst Case Antenna Gain per Datasheet is 2.6 dBi > 2 dBi - used for calculation in alignment with ANSI C63.10, section 11.12.2.6
- R0 C7 Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 c
- R0 C9 Computed according to ANSI C63.10-2013 section 11.12.2.2 e

4.3.2 OOB Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions relative to the fundamental in a 100 kHz receiver bandwidth (at the nominal voltage and temperature) in the worst cases are provided in Figure 9 below.

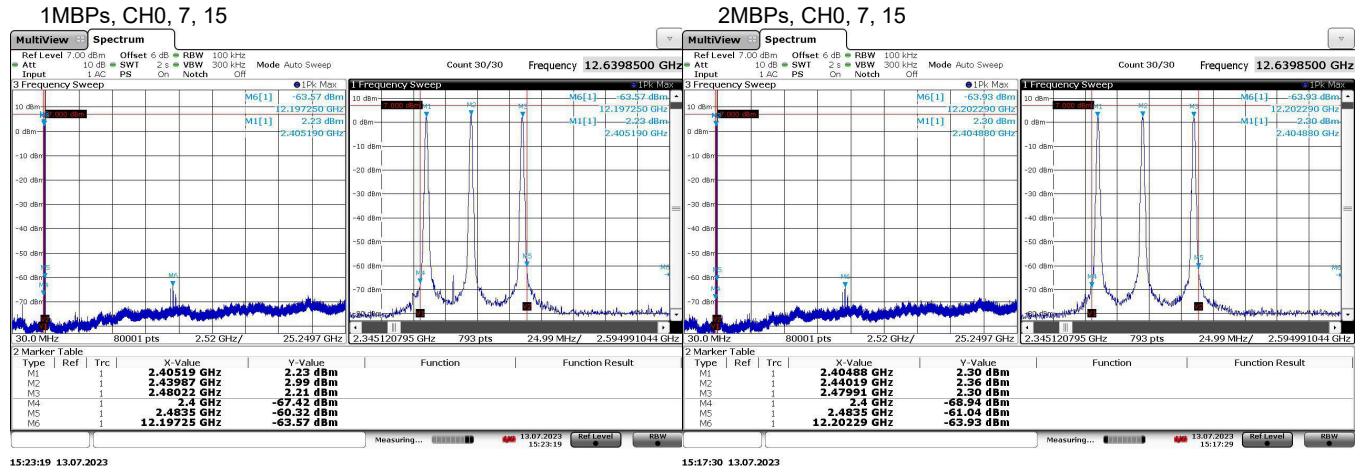


Figure 9: Worst Case Transmitter OOB Emissions Measured.

4.3.3 General Radiated Spurious

The results for the measurement of general spurious emissions (emissions arising from digital circuitry) at the nominal voltage and temperature are provided in Table 9. Radiation from digital components are measured up to 1000 MHz or to the highest frequency required by the applied standards, whichever is greater.

Table 9: Radiated Spurious Emissions.

Frequency Range		Det	IF Bandwidth	Video Bandwidth		Test Date:				21-Jul-23	
25 MHz ≤ f ≤ 1 000 MHz		Pk/QPk	120 kHz	300 kHz		Test Engineer:				J. Brunett	
f > 1 000 MHz		Pk	1 MHz	3 MHz		EUT:				Vitesco SLA	
f > 1 000 MHz		Avg/RMS	1 MHz	3 MHz		EUT Mode:				Active	
						Meas. Distance:				3 m	
						Temperature:				23C	
						Rel. Humidity:				65%	

Digital Spurious Emissions																FCC/ISED/EU
R0	Test Freq. MHz	Antenna QN	Test Pol.	Ka dB/m	Kg dB	E-Field @ 3m** Pk	QPk/Avg dBμV/m	FCC CLB (QPk/Avg) E3lim dBμV/m	Pass dB	CE CLB (QPk/Avg) E3lim dBμV/m	Pass dB	FCC CLA (QPk/Avg) E3lim dBμV/m	Pass dB	CE CLA (QPk/Avg) E3lim dBμV/m	Pass dB	Comments
R1	41.4	BICEMCO01	V	10.5	-4	30.5	26.7	40.0	13.3	40.5	13.8	49.5	22.8	50.5	23.8	background
R2	42.5	BICEMCO01	H	10.3	-4	30.2	25.9	40.0	14.1	40.5	14.6	49.5	23.6	50.5	24.6	background
R3	63.4	BICEMCO01	H	7.9	-4	30.9	25.9	40.0	14.1	40.5	14.6	49.5	23.6	50.5	24.6	background
R4	71.8	BICEMCO01	V	7.6	-4	31.0	25.4	40.0	14.6	40.5	15.1	49.5	24.1	50.5	25.1	background
R5	118.2	BICEMCO01	V	9.8	-6	32.7	25.2	43.5	18.3	40.5	15.3	54.0	28.8	50.5	25.3	background
R6	145.2	BICEMCO01	H	12.1	-7	29.7	22.2	43.5	21.3	40.5	18.3	54.0	31.8	50.5	28.3	background
R7	375.0	LOGEMCO01	H	15.3	-1.4	29.8	28.0	46.0	18.0	47.5	19.5	56.9	28.9	57.0	29.0	background
R8	375.0	LOGEMCO01	V	15.3	-1.4	27.7	25.9	46.0	20.1	47.5	21.6	56.9	31.0	57.0	31.1	background
R9	400.0	LOGEMCO01	H	15.7	-1.4	34.8	33.1	46.0	12.9	47.5	14.4	56.9	23.8	57.0	23.9	background
R10	400.0	LOGEMCO01	V	15.7	-1.4	28.4	26.2	46.0	19.8	47.5	21.3	56.9	30.7	57.0	30.8	background
R11	437.5	LOGEMCO01	H	16.4	-1.5	39.5	27.3	46.0	18.7	47.5	20.2	56.9	29.6	57.0	29.7	background
R12	437.5	LOGEMCO01	V	16.4	-1.5	31.3	28.0	46.0	18.0	47.5	19.5	56.9	28.9	57.0	29.0	background
R13	562.5	LOGEMCO01	H	18.4	-1.9	30.6	29.0	46.0	17.0	47.5	18.5	56.9	27.9	57.0	28.0	background
R14	562.5	LOGEMCO01	V	18.4	-1.9	33.6	25.4	46.0	20.6	47.5	22.1	56.9	31.5	57.0	31.6	background
R15	687.5	LOGEMCO01	H	20.2	-2.3	30.9	21.9	46.0	24.1	47.5	25.6	56.9	35.0	57.0	35.1	background
R16	687.5	LOGEMCO01	V	20.2	-2.3	27.4	17.0	46.0	29.0	47.5	30.5	56.9	39.9	57.0	40.0	background
R17	812.5	LOGEMCO01	H	21.6	-2.6	35.9	30.7	46.0	15.3	47.5	16.8	56.9	26.2	57.0	26.3	background
R18	812.5	LOGEMCO01	V	21.6	-2.6	37.8	35.2	46.0	10.8	47.5	12.3	56.9	21.7	57.0	21.8	background
R19																
R20																
R21																
R22																
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
(ROW)	(COLUMN)	(NOTE)														
R0	C7	Pk+Avg detection (narrowband), Pk + QPk detection (wideband) emissions														
R0	C7	When E-field is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings.														
R0	C7	Emissions > 20dB below the limit may not be reported.														

5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 10: Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty [†]
Radio Frequency	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$
Conducted Emm. Amplitude	$\pm 1.9 \text{ dB}$
Radiated Emm. Amplitude ($f < 30 \text{ MHz}$)	$\pm 3.1 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm 4.0 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm 5.2 \text{ dB}$
Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$)	$\pm 3.7 \text{ dB}$

[†]Ref: CISPR 16-4-2:2011+A1:2014




Figure 10: Accreditation Documents