





# Test Report

Report No	EE0179-1
Client	YDI Wireless, Inc. 20 Industrial Drive East South Deerfield, MA 01373
Phone	(413) 665-8551
Fax	(413) 665-7090
FRN	0006891675
Model	MB-EXT-HP, MB-INT-HP
FCC ID	NM5-MB-HP
Equipment Type	Digitally Modulated Transmitter
Equipment Code	DTS
Results	As detailed within this report
Prepared by	 Evan Gould – Test Engineer
Authorized by	 Michael Buchholz – EMC Manager
Issue Date	5/13/04
Conditions of issue	This Test Report is issued subject to the conditions stated in ‘terms and conditions’ section of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.

## Table Of Contents

<i>Summary</i> .....	3
<i>Test Methodology</i> .....	3
<i>Statement of Conformity</i> .....	3
<i>EUT Configuration</i> .....	3
<i>6dB Bandwidth</i> .....	3
<i>Peak Output Power</i> .....	3
<i>Peak Power Spectral Density</i> .....	3
<i>Conducted Spurious Emissions</i> .....	3
<i>Conducted Band Edges</i> .....	3
<i>Antenna Gains</i> .....	3
<i>Radiated Spurious Emissions</i> .....	3
<i>AC Line Conducted Emission Measurements</i> .....	3
<i>Voltage Variation</i> .....	3
<i>Test Equipment Used</i> .....	3
<i>Terms And Conditions</i> .....	3
<i>A2LA Accreditation</i> .....	3

## Summary

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 15.247. The product is the YDI Wireless Marquee Bridge (Models MB-EXT-HP and MB-INT-HP). It is a spread spectrum transmitter that operates in the range 5725-5850MHz.

## Test Methodology

Radiated emissions testing is performed according to the procedures specified in ANSI C63.4 (2002). FCC's "Guidance on Measurements for Digital Transmission Systems Section 15.247" was followed for testing as well. The EUT was mounted vertically on a PVC pipe and maximized by rotating around its vertical axis, as well as varying the test antenna's height and polarity. The EUT antennas were oriented the way they would be in normal operation. The antennas included in this application are as follows:

RadioWaves 34.6dBi Parabolic	Model SP4-5.2
MTI 28dBi Flat Panel	Model MT-486001
MTI 23dBi Flat Panel	Model MT-485002
RadioWaves 16dBi Sector	Model SEC-5V-120-16
MTI 12dBi Omnidirectional	Model MT-483003/N

Frequency range investigated: 0.15MHz – 60GHz

Measurement distance:	0.15 - 30MHz	Conducted
	30 - 1000MHz	3m
	1 – 26.5GHz	3m or 1m (as noted)
	26.5 - 60GHz	0.1m

AC Line conducted emissions testing was performed with a 50Ω/50μH LISN.

The difference in the two models is that the INT version uses the integrated MTI 23dBi flat panel antenna whereas the ETX version uses the remain 4 external antennas. The radios are otherwise identical.

## ***Statement of Conformity***

The Marquee Bridge has been found to conform to the following parts of 47 CFR as detailed below:

Part 2	Part 15	Comments
	15.15(b)	The controls that adjust the power level on this device are not accessible to the user. The professional installer of the device will adjust the power level at the time of installation.
2.925	15.19	The label is shown in the label exhibit.
	15.21	Information to the user is shown in the instruction manual exhibit.
	15.27	No special accessories are required for compliance.
	15.203	This product is professionally installed.
	15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209.
	15.207	The unit meets the AC conducted emissions requirements of 15.207.
	15.247	The unit complies with the digitally modulated device requirements of 15.247
	15.247(b)(5)	See attached MPE Calculation exhibit

**EUT Configuration**

<b>EUT Configuration</b>				
<b>Work Order:</b> E0179				
<b>Company:</b> YDI Wireless				
<b>Company Address:</b> 20 Industrial Drive East South Deerfield, MA 01373				
<b>Contact:</b> Chris Koh				
<b>Person Present:</b> Audra Page				
<b>MN</b>	<b>SN</b>	<b>FCC ID</b>		
<b>EUT:</b> MB-HP-EXT	0302-2314	NM5-MB-HP		
<b>EUT Max Frequency:</b> 5825MHz				
<b>Support Equipment:</b>	<b>MN</b>	<b>SN</b>	<b>FCC ID</b>	
Toshiba laptop	PAS259U-B	69811725A		
DC Power injector	304-800620-002	-	-	
CINCON AC adaptor	TR25240	25240-0009702	-	
<b>EUT Cables:</b>	<b>Qty</b>	<b>Shielded?</b>	<b>Length</b>	<b>Ferrites</b>
Cat.5 (plus DC)	1	No	100m	No
RF cable	1	No	1m	No
DC power	1	No	6ft	No
ethernet	1	No	6ft	No
<b>Unpopulated EUT Ports:</b>	<b>Qty</b>	<b>Reason</b>		
none				
<b>Software / Operating Mode Description:</b>				
Transmitting pseudorandom data at full power.				

**6dB Bandwidth****LIMIT**


*"Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5MHz, and 5725 – 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz." [15.247(a)(2)]*

**MEASUREMENT**

The 6dB bandwidths were measured for Channels 149, 157, and 165 at both 6Mbps and 54Mbps. The minimum 6dB bandwidth measured was **16.34MHz** at Channel 157 and a data rate of 6Mbps.

**SAMPLE ANALYZER PLOT**

\* Agilent 09:56:16 Apr 2, 2004

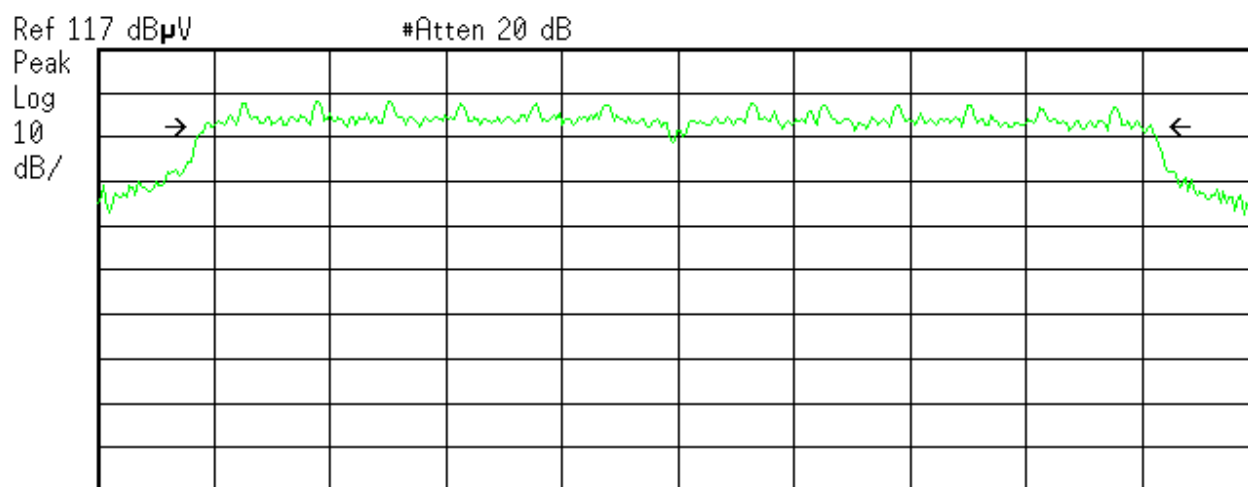

Center 5.785 GHz Span 20 MHz  
#Res BW 100 kHz #VBW 1 MHz Sweep 4.348 ms (401 pts)

Emission Bandwidth Results (paused)

Emission Bandwidth  
16.34 MHz

Emiss BW X dB -6.0 dB

## ***Peak Output Power***

### **LIMIT**

*“The maximum peak output power of...systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.” [15.247(b)(3)]*

*“...if transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below...[30dBm]...by the amount in dB that the directional gain of the antenna exceeds 6 dBi.” [15.247(b)(4)]*

*“Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.” [15.247 (b)(4)(ii)]*

The limit shown in the table below (24dBm) is derived from the 30dBm limit specified in 15.247(b)(3) reduced by 6dB, which is the required reduction for the 12dBi omnidirectional antenna used in non-point-to-point applications.

### **METHOD**

A conducted substitution method was used in taking the peak output power measurements that follow. Using the HP 8473D broadband power detector in line with the output of the EUT, a peak-to-peak voltage was measured with the oscilloscope, which was then reproduced using the sweep generator as a substitution for the EUT. The output power of the sweep generator, including the attenuation factor, is the peak output power measurement.

**MEASUREMENTS**

Peak Output Power								
Dates: 2-Apr-04 3-May-04				Company: YDI		Engineer: Evan Gould		
Test Site: EMI 3				EUT: Marquee Bridge				
Transmitter Setup: <i>Attenuator:</i> 10dB <i>Cable:</i> 142LL #6 <i>Detector:</i> HP 8473D <i>Oscilloscope:</i> Tektronix TDS 340				Substitution Setup: <i>Signal Generator:</i> HP 83752A <i>Detector:</i> HP 8473D <i>Oscilloscope:</i> Tektronix TDS 340				
Channel	Data Rate (Mbps)	Frequency (MHz)	O-Scope Reading (Vpp)	Signal Generator Output Level (dBm)	Attenuation Factor (dB)	Adjusted Reading (dBm)	Limit (dBm)	Result (Pass/Fail)
Power level set to 100%								
149	6	5745	532	7.4	14.6	22.00	24.00	Pass
157	6	5785	488	6.6	14.6	21.20	24.00	Pass
165	6	5825	434	5.4	14.6	20.00	24.00	Pass
149	54	5745	628	9.2	14.6	23.80	24.00	Pass
157	54	5785	576	8.4	14.6	23.00	24.00	Pass
165	54	5825	512	7.1	14.6	21.70	24.00	Pass
Power level set to 50%								
149	6	5745	296	3.3	13.5	16.80	20.00	Pass
157	6	5785	225	1.3	13.5	14.80	20.00	Pass
165	6	5825	161	-1.3	13.5	12.20	20.00	Pass
149	54	5745	326	4.1	13.5	17.60	20.00	Pass
157	54	5785	259	2.3	13.5	15.80	20.00	Pass
165	54	5825	171	-0.8	13.5	12.70	20.00	Pass

\*Note: For point-to-multipoint applications in which the 16dBi sector antenna will be used, the professional installer will be instructed in the manual to reduce the power to 50% in order to meet the 20dBm limit.



## Peak Power Spectral Density

### LIMIT

"For digitally modulated systems, the peak power spectral density...shall not be greater than 8dBm in any 3 kHz band..." [15.247(d)]


Measurements were taken with the EUT set to channel 149, which produced the highest Peak Output Power in the previous section.

### MEASUREMENTS

Peak Power Spectral Density					Curtis-Straus LLC		
Date: 2-Apr-04		Company: YDI					
Engineer: Evan Gould		EUT: Marquee Bridge			Work Order: E0179		
Analyzer: Orange		Span: 1MHz					
Cable: 142LL#6		Resolution BW: 3kHz					
Sweep: 333s		Video BW: 10kHz					
Ch. / Data Rate (Mbps)	Center Frequency (GHz)	Measured Peak Power Spectral Density(dBm)	Cable Factor (dB)	Adjusted Peak Power Spectral Density (dBm)	Limit (dBm)	Margin (dB)	Result (Pass/Fail)
149 / 6	5.745	-15.8	3.2	-12.60	8.00	-20.60	Pass
149 / 54	5.745	-17.5	3.2	-14.30	8.00	-22.30	Pass

### SAMPLE ANALYZER PLOT

Agilent 11:36:41 Apr 2, 2004

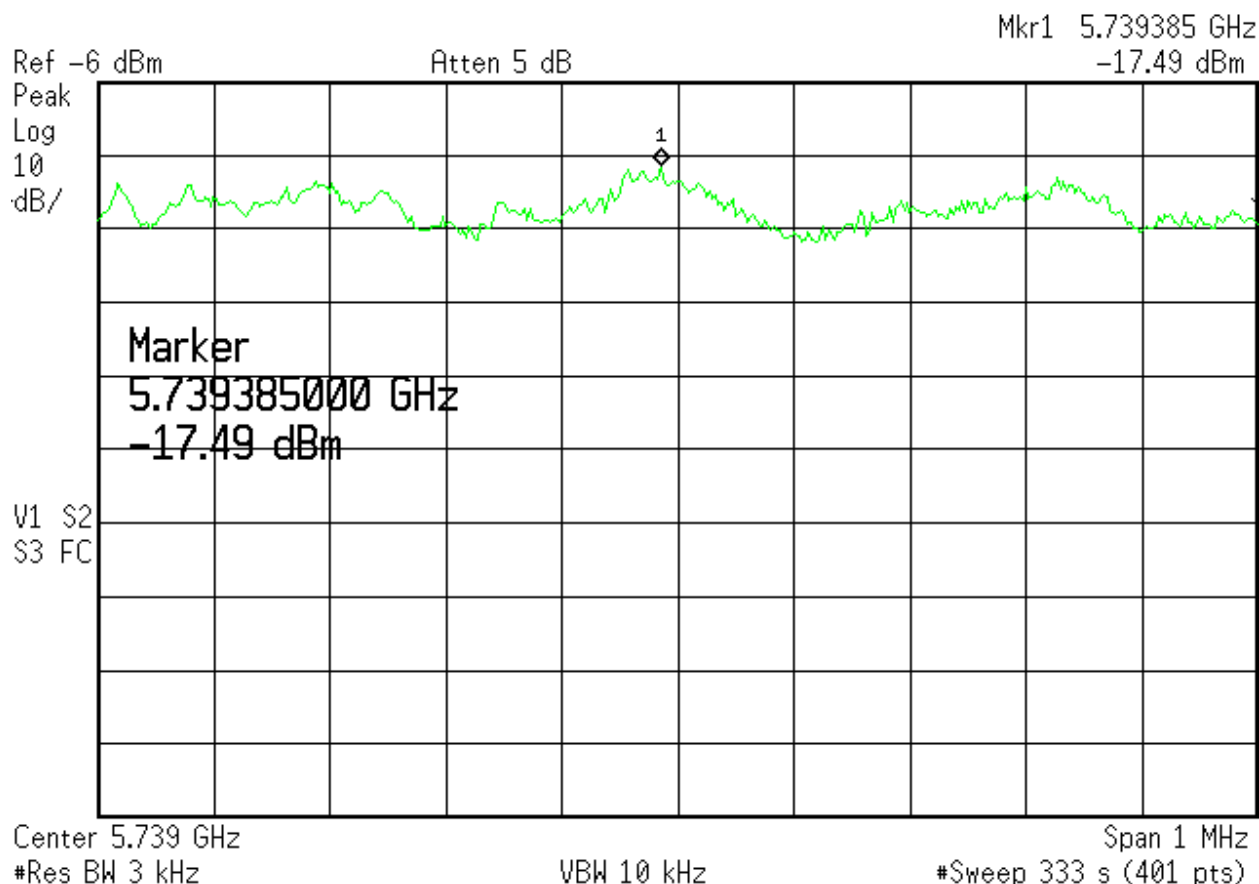

## Conducted Spurious Emissions

### LIMIT

Peak: 20dB down from fundamental [15.247(c)]


### MEASUREMENTS

No conducted spurious emissions were detected. See the plots below.

### ANALYZER PLOTS

#### 30MHz to 6GHz

Agilent 13:51:18 Mar 3, 2004

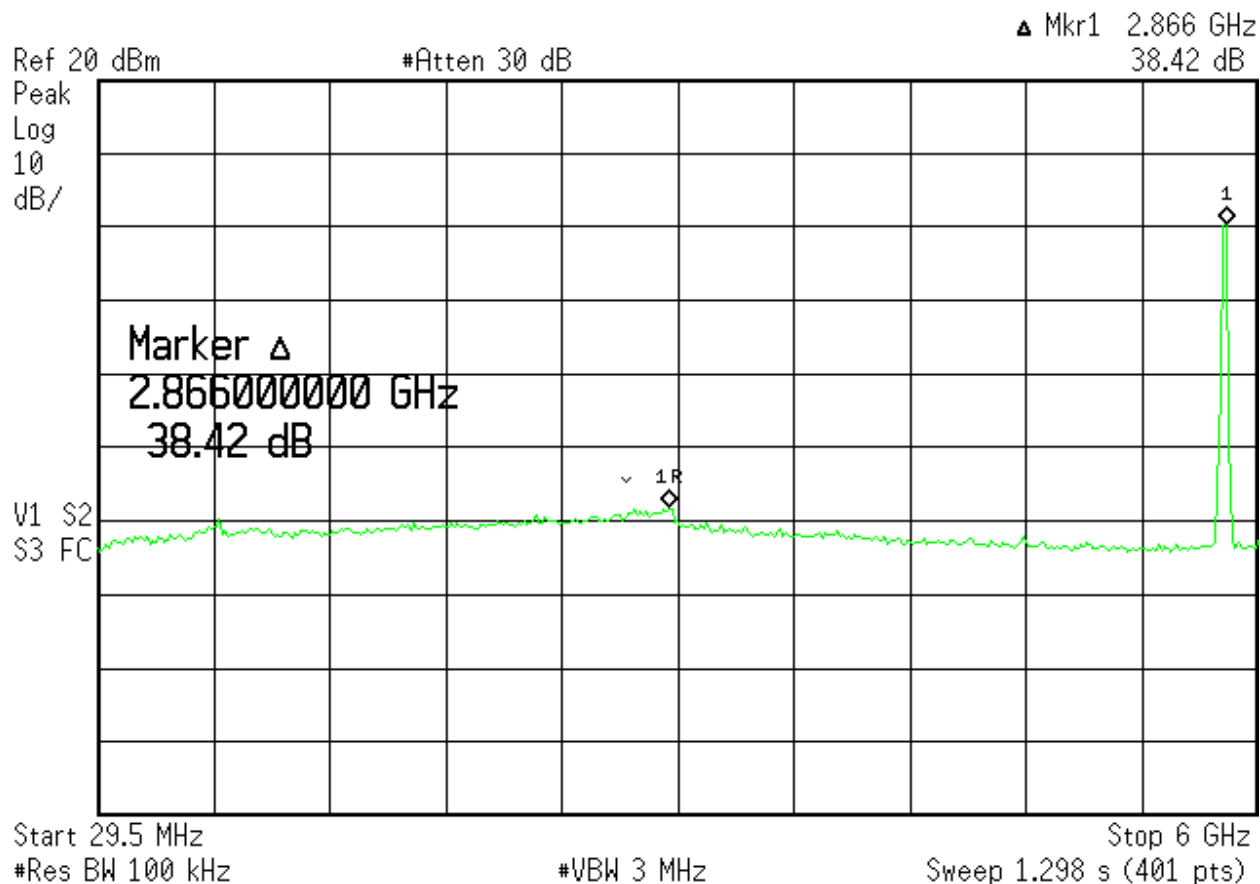

**6GHz to 26.5GHz**

\* Agilent 13:53:10 Mar 3, 2004

▲ Mkr1 -20.18 GHz  
38.12 dB

Ref 20 dBm

#Atten 30 dB

Peak  
Log  
10  
dB/Marker ▲  
-20.180000000 GHz  
38.12 dBV1 S2  
S3 FC

v 1R

Start 5.75 GHz  
#Res BW 100 kHz

#VBW 3 MHz

Stop 26.5 GHz  
Sweep 4.511 s (401 pts)

## Conducted Band Edges

### LIMITS

Peak: 20dB down from fundamental [15.247(c)]


### RESULTS

It can easily be seen in the plots shown below that the conducted band edges are at least 20dB down from the peak of the fundamental.

### ANALYZER PLOTS


#### Ch.149 54Mbps Low Band Edge

Agilent 13:46:17 Apr 2, 2004

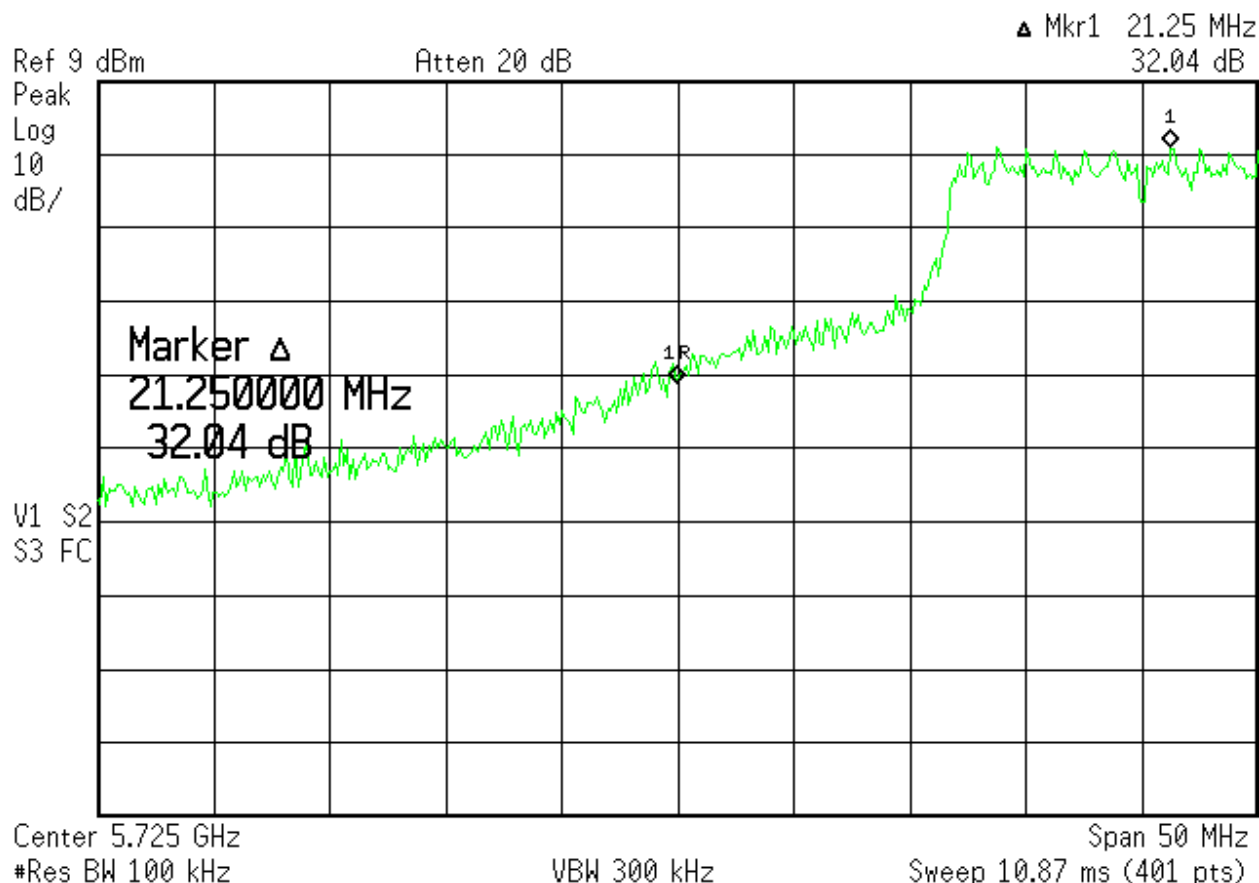

## Ch.149 6Mbps Low Band Edge

\* Agilent 13:49:25 Apr 2, 2004

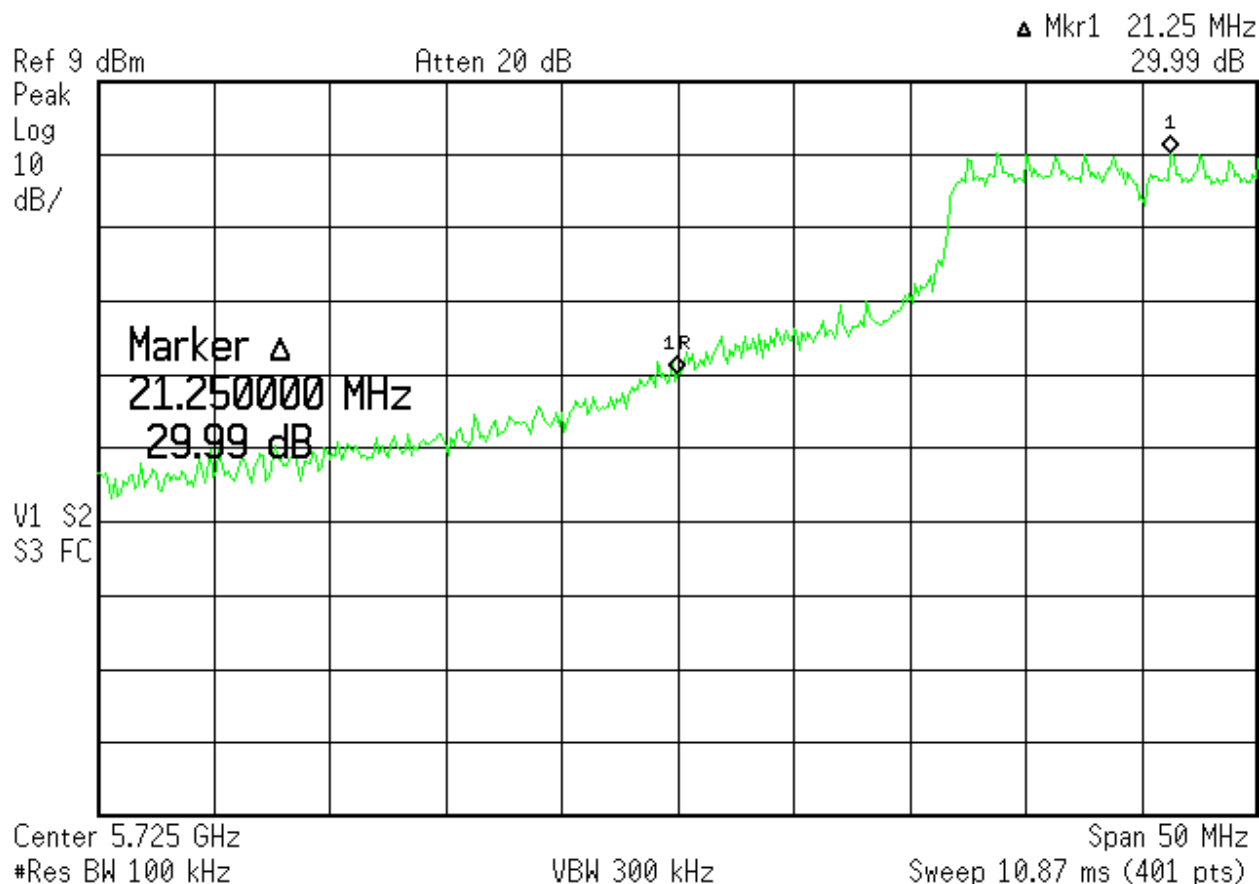


**Ch.165 6Mbps High Band Edge**

\* Agilent 13:54:44 Apr 2, 2004

▲ Mkr1 -23.75 MHz  
37.01 dB

Ref 9 dBm

Atten 20 dB

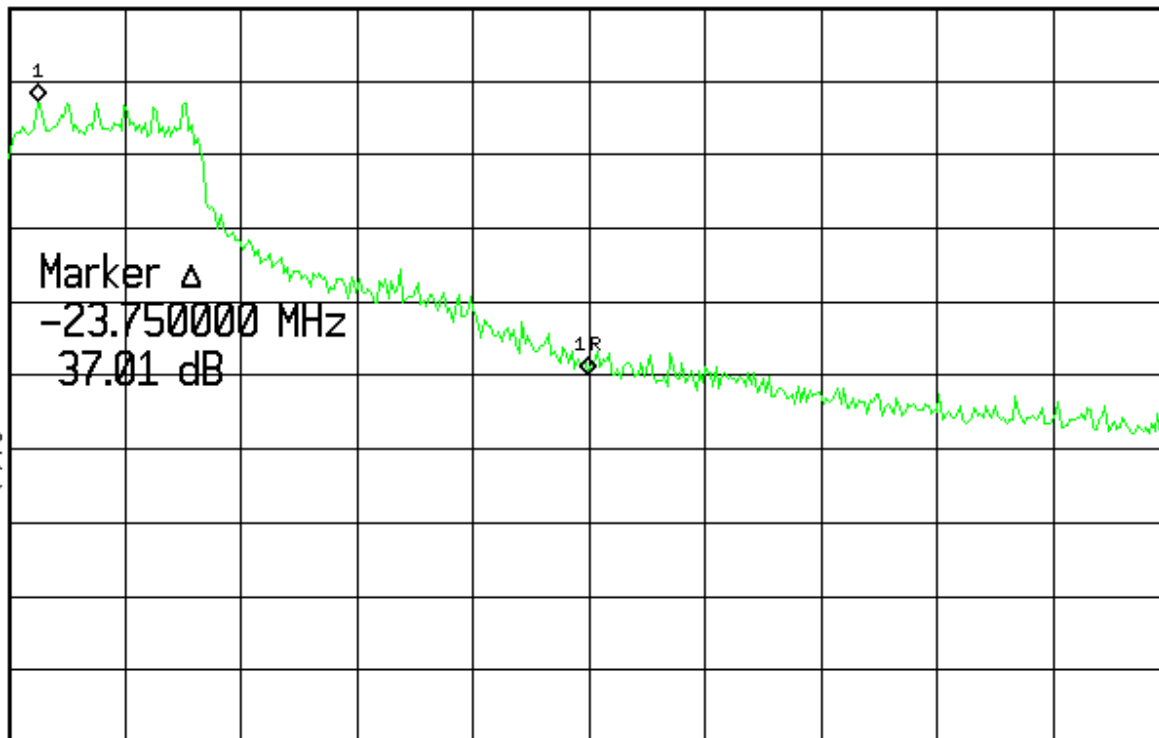Peak  
Log  
10  
dB/V1 S2  
S3 FCCenter 5.85 GHz  
#Res BW 100 kHz

VBW 300 kHz

Span 50 MHz  
Sweep 10.87 ms (401 pts)


**Ch.165 54Mbps High Band Edge**

\* Agilent 13:57:01 Apr 2, 2004

▲ Mkr1 -23.75 MHz  
37.56 dB

Ref 9 dBm

Atten 20 dB

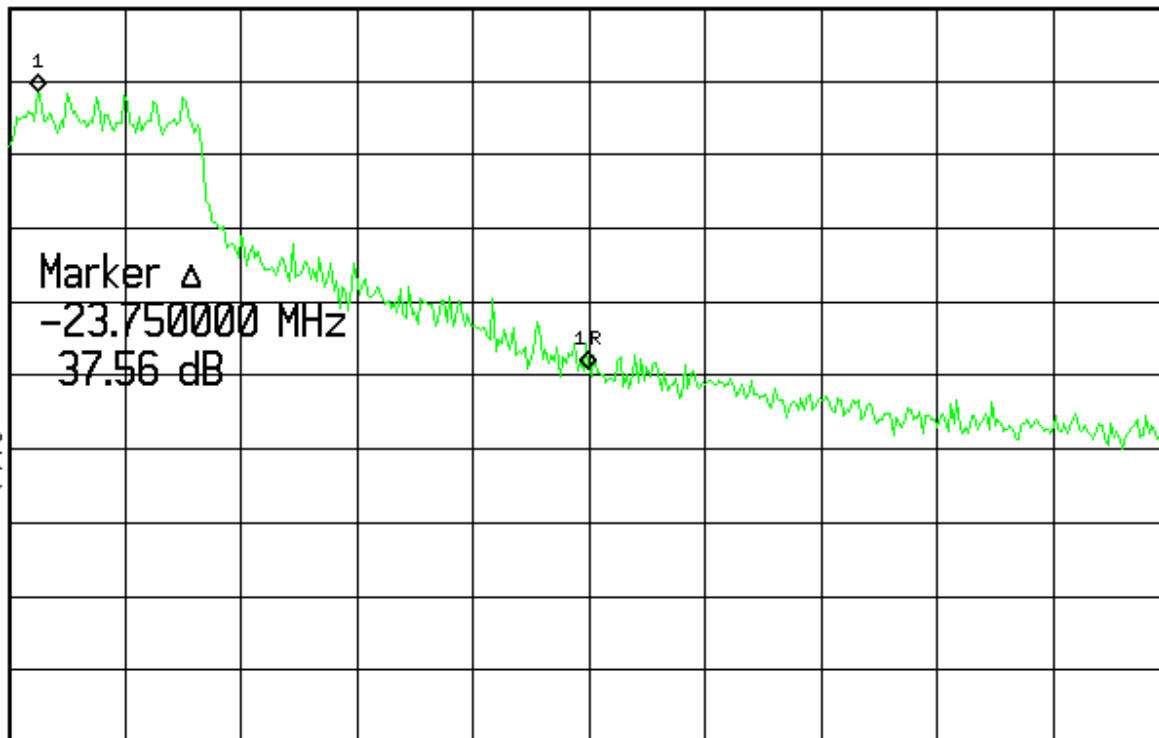Peak  
Log  
10  
dB/V1 S2  
S3 FCCenter 5.85 GHz  
#Res BW 100 kHz

VBW 300 kHz

Span 50 MHz  
Sweep 10.87 ms (401 pts)

## ***Antenna Gains***

### **REQUIREMENT**

This purpose of this section is to demonstrate the measured directional gains of the antennas.

### **MEASUREMENTS**

<b>Antenna Gains</b>		
<b>Date:</b> 4-Mar-04		
<b>Company:</b> YDI		
<b>EUT:</b> Marquee Bridge		
<b>Engineer:</b> Evan Gould		
<b>Analyzer:</b> Orange		
<b>Cable:</b> 142LL #6		
<b>Notes:</b>		
<b>Antenna Model</b>	<b>Specified Gain (dBi)</b>	<b>Measured Gain (dBi)</b>
MT-483003/N	12.0	14.0
MT-485002	23.0	27.3
MT-486001	28.0	28.4
SEC-5V-120-16	16.0	18.9
SP4-5.2	34.6	23.4



## Radiated Spurious Emissions

### LIMITS

"...radiated emissions which fall in the restricted bands, as defined in §15.209(a), must also comply with the radiated emission limits specified in §15.209(a)" [15.247(c)]

### MEASUREMENTS

Radiated Emissions Table							Curtis-Straus LLC		
Date: 09-Mar-04			Company: YDI			Work Order: E0179			
Engineer: Evan Gould			EUT Desc: Super BAiB						
Frequency Range: 30-1000MHz (restricted bands)					Measurement Distance: 3 m				
Notes:					EUT Max Freq:				
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	47 CFR 15.209		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Vbb	38.1	40.6	22.3	15.4	0.8	34.5	40.0	-5.5	Pass
Vbb	73.2	50.7	22.3	6.9	1.1	36.4	40.0	-3.6	Pass
Vbb	75.1	47.8	22.3	7.1	1.1	33.7	40.0	-6.3	Pass
V	112.8	47.2	22.2	12.3	1.4	38.7	43.5	-4.8	Pass
H	133.3	44.9	22.2	12.6	1.5	36.8	43.5	-6.7	Pass
Hbb	150.0	40.8	22.3	11.2	1.6	31.3	43.5	-12.2	Pass
H	172.0	41.8	22.2	10.3	1.7	31.6	43.5	-11.9	Pass
H	280.6	48.8	22.0	13.6	2.3	42.7	46.0	-3.3	Pass
H	400.9	46.8	21.9	16.6	2.9	44.4	46.0	-1.6	Pass
Table Result:		Pass	by		-1.6 dB		Worst Freq:		400.9 MHz
Test Site: "M"		Pre-Amp: Black		Cable: 65 ft RG8A/U		Analyzer: Black		Antenna: Grn-Blk	

Radiated Emissions Table								Curtis-Straus LLC		
Date: 19-Mar-04				Company: YDI				Work Order: E0179		
Engineer: Mairaj Hussain				EUT Desc: Super BAiB						
Frequency Range: 11.5GHz						Measurement Distance: 1 m				
Notes: Power set to: Max SPA-F-55204 high pass filter at input to preamp						EUT Max Freq:				
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Filter Factor (dB)	Adjusted Reading (dBµV/m)	FCC Class B		
								Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Vpk	11489.1	54.7	20.4	39.6	2.7	1.4	78.0	83.5	-5.5	Pass
Vav(10HzVBW)	11489.0	30.5	20.4	39.6	2.7	1.4	53.8	63.5	-9.7	Pass
Table Result:		Fail		by 21.4 dB		Worst Freq:		11493.3 MHz		
Test Site: ---		Pre-Amp: Or-Blk		Cable: 9 Microflex		Analyzer: White		Antenna: Black Horn		

Radiated Emissions Table							Curtis-Straus LLC		
Date: 22-Mar-04			Company: YDI			Work Order: E0179			
Engineer: Evan Gould			EUT Desc: Super BAiB						
Frequency Range: 23GHz				Measurement Distance: 1 m					
Notes: Max power				EUT Max Freq:					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	FCC Class B		
							Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
Power set to: Max									
Vpk	22976.0	56.8	21.6	40.4	4.8	80.4	83.5	-3.1	Pass
Vav (30HzVBW)	22981.0	26.8	21.6	40.4	4.8	50.4	63.5	-13.1	Pass
Table Result:		Pass	by		-3.1 dB		Worst Freq:		22976.0 MHz
Test Site: "M"		Pre-Amp: 18-26.5GHz		Cable: 9 Microflex		Analyzer: Orange		Antenna: 18-26.5GHz Horn	

No spurious emissions detected in the range 26.5-60GHz

## AC Line Conducted Emission Measurements

### LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dBμV)	Average limit (dBμV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

### MEASUREMENTS

AC Mains Conducted Emissions										Curtis-Straus LLC
Date: 13-Apr-04		Company: YDI		Table No:						
Engineer: Evan Gould		EUT Desc: Marquee Bridge		Work Order: E0179						
Notes:				Test Site: EMI 1						
LISN(s): Red Orange										
Range: 0.15-30Mhz		Other Equipment:		Spectrum Analyzer: Red						
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor (dB)	FCC/CISPR B		FCC/CISPR B		Overall Result (Pass/Fail)
	QP1 (dBμV)	QP2 (dBμV)	AV1 (dBμV)	AV2 (dBμV)		qp Limit (dBμV)	qp Margin dB	AVE Limit (dBμV)	AVE Margin dB	
0.17	35.0	31.2	26.7	22.5	20.0	65.0	-10.0	55.0	-8.3	Pass
1.10	23.8	22.8	20.5	20.6	20.0	56.0	-12.2	46.0	-5.4	Pass
3.70	20.1	14.5			20.0	56.0	-15.9	46.0	-5.9	Pass
5.90	17.1	17.8			20.0	60.0	-22.2	50.0	-12.2	Pass
8.70	10.3	11.4			20.0	60.0	-28.6	50.0	-18.6	Pass
22.50	12.1	10.6			20.0	60.0	-27.9	50.0	-17.9	Pass
<b>Table Result:</b> Pass by -5.40 dB <b>Worst Freq:</b> 1.10 MHz										

## Voltage Variation

### REQUIREMENT

*"For intentional radiators, measurements of the variation of the...radiated signal level of the fundamental frequency component of the emission...shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage."*  
[15.31(e)]

### MEASUREMENTS

Voltage Variation		
Date: 3-Mar-04		
Company: YDI		
EUT: Marquee Bridge		
Engineer: Evan Gould		
Analyzer: Orange		
Cable: 142LL #6		
Notes:		
Supply Voltage	Frequency (MHz)	Reading (dBm)
(85%) 27.6VDC	5785.0	-7.5
(nominal) 24VDC	5785.0	-7.4
(115%) 20.4VDC	5785.0	-7.6

## Test Equipment Used

REV. 4/5/04

Rev: 4/3/04

SPECTRUM ANALYZERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	9kHz-1.8GHz	8591E	HP	3441A03559	00024	21-MAY-2004
WHITE	9kHz-22GHz	8593E	HP	3547U01252	00022	04-MAR-2005
BLACK	9kHz-12.8GHz	8596E	HP	3710A00944	00337	15-JUL-2004
ORANGE	9kHz-26.5GHz	E4407B	HP	US39440975	00394	27-JUN-2004
LISNS/MEASUREMENT PROBES	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956348	00753	02-APR-2005
ORANGE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	903707	00754	02-APR-2005
OPEN AREA TEST SITE (OATS)		FCC CODE	IC CODE	VCCI CODE		CALIBRATION DUE
SITE M		93448	IC 2762-M	R-904		25-MAR-2005
LINE CONDUCTED TEST SITES		FCC CODE	IC CODE	VCCI CODE		CALIBRATION DUE
EMI 1		93448	N/A	C-1801		01-MAY-2006
ANTENNAS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN-BLACK BILOG	30MHz-2GHz	CBL6112B	CHASE	2412	00127	06-JAN-2006
BLACK HORN	1-18GHz	3115	EMCO	9703-5148	00056	12-JUN-2005
HF (WHITE) HORN	18-26.5GHz	801-WLM	WAVELINE	00758	00758	15-JUL-2005
MIXERS/DIPLEXERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
MIXER / HORN	26.5-40 GHz	11970A/28-442-6	HP/ATM	2332A00900/A046903-01	00369	09-JUL-2004
MIXER / HORN	40-60 GHz	M19HW/A	OML	U30110-1	00821	03-JAN-2005
PREAMPS / FILTERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
BLACK	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00799	27-FEB-2005
ORANGE-BLACK	1-20GHz	SMC-12A	C-S	637367	00761	29-JUL-2004
HF (YELLOW)	18-26.5GHz	AFS4-18002650-60-8P-4	C-S	467559	00758	15-JUL-2004
HIGH PASS FILTER	1-18 GHz	SPA-F-55204	K&L	36	00817	06-JAN-2006
SIGNAL GENERATORS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
SWEEPER	0.01-20.0GHz	HP83752A	HP	3610A01133	00087	04-APR-2005
OSCILLOSCOPE		MN	MFR	SN	ASSET	CALIBRATION DUE
OSCILLOSCOPE 100MHZ (SAFETY)	TDS 340	TEKTRONIX		B012357	00737	16-OCT-2004

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

## Terms And Conditions

### Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- 1.2 Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- 1.3 Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

### Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- 2.1 Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.
- 2.2 Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- 2.3 Designate a person who is authorized to receive copies of LABORATORY's reports.
- 2.4 Undertake the following:
  - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the equipment proposed to require technical services, together with any relevant data.
  - (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

### Paragraph 3. GENERAL CONDITIONS:

- 3.1 LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- 3.2 LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- 3.3 LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.
- 3.4 THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- 3.5 Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.
- 3.6 The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.
- 3.7 The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- 3.8 The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.
- 3.9 The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of test data.
- 3.10 It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other clients from said employees.
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes, including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

### Paragraph 4. INSURANCE:

- 4.1 LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- 4.2 The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.
- 4.3 No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any other party's responsibility for damages resulting from their operations or for furnishing work and materials.

### Paragraph 5. PAYMENT:

- 5.1 CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentment of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.

- 5.2 CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT.
- 5.3 Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

**Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:**

- 6.1 CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY.
- 6.2 CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.
- 6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.

## A2LA Accreditation

<p align="center"><u>SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999</u></p> <p align="center">CURTIS-STRAUS<sup>1</sup> 527 Great Road Littleton, MA 01460 Barry Quinlan Phone: 978-486-8880</p> <p align="center">ELECTRICAL</p> <p>Valid until: July 31, 2005 Certificate Number: 1627-01</p> <p>In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>Electromagnetic Compatibility (EMC), Telecommunications, and Product Safety tests:</u></p> <p><b>Electromagnetic Compatibility (EMC)</b> Radiated emissions testing (electric and magnetic fields); Conducted emissions testing (voltage and current); Electrostatic Discharge testing; Electrical Fast Transient testing; Radiated Immunity testing; Conducted Immunity testing; Lightning Immunity testing; Voltage Dips, Interrupts and Voltage Variations testing; Magnetic Immunity testing; RF Power measurements; Frequency Stability measurements; Longitudinal Induction measurements; Harmonic emissions testing; Light flicker testing; Low frequency disturbance voltage testing; Disturbance Power measurements</p> <table><tr><th>EMC Standards</th><th>Title</th></tr><tr><td><b>Emissions</b> CISPR 22 1997 with amendments 1 and 2</td><td>Limits and methods of measurement of radio disturbance characteristics of information technology equipment.</td></tr><tr><td>CNS13438 1994</td><td>Limits and methods of measurement of radio interference characteristics of information technology equipment.</td></tr><tr><td>EN55022:1994 and 1998</td><td>Limits and methods of measurement of radio disturbance characteristics of information technology equipment.</td></tr><tr><td>SABS CISPR 22:1997</td><td>Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement</td></tr><tr><td>Canada ICES-003 1997 AS/NZS 3548 1995</td><td>Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment</td></tr><tr><td>CISPR 11 1990, 1997, 1999</td><td>Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.</td></tr></table> <p><sup>1</sup> Note: This accreditation covers testing performed at the laboratory listed above and the satellite facility located at 168 Ayer Rd, Littleton, MA 01460</p> <p>(A2LA Cert. No. 1627-01) 10/31/03 Page 1 of 11</p>		EMC Standards	Title	<b>Emissions</b> CISPR 22 1997 with amendments 1 and 2	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.	CNS13438 1994	Limits and methods of measurement of radio interference characteristics of information technology equipment.	EN55022:1994 and 1998	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.	SABS CISPR 22:1997	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement	Canada ICES-003 1997 AS/NZS 3548 1995	Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment	CISPR 11 1990, 1997, 1999	Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.	<p>EN 55011 1991, 1998 characteristics of SABS CISPR 11:1997</p> <p>Canada ICES-001 1998 CNS13803 AS/NZS 2064: 1997</p> <p>CSA C108.8 – M1983</p> <p>CISPR 13:1996, 1998, 2001</p> <p>EN 55013: 1990, 2001</p> <p>EN 55013 Amend 12 1994</p> <p>SABS CISPR 13: 1996</p> <p>CNS 13439 AS/NZS 1053: 1999</p> <p>CISPR 14 1993 (except discontinuous disturbances)</p> <p>EN 55014 1993, 1997 (discontinuous disturbances)</p> <p>AS/NZS 1044: 1995 (discontinuous disturbances)</p> <p><b>Immunity</b> CNS13783-1 SABS CISPR 14-1 1993</p> <p>SABS CISPR 14-2 1997 + A1:2001</p> <p>Limits and methods of measurement of radio disturbance industrial, scientific and medical (ISM) radio-frequency equipment – Electromagnetic disturbance characteristics Limits and methods of measurement</p> <p>Industrial, scientific and medical radio frequency generators</p> <p>Industrial, Scientific and Medical Instrument</p> <p>Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.</p> <p>Electromagnetic Emission from Data Processing Equipment and Electronic Office Machines</p> <p>Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Sound and television broadcast receivers and associated equipment: Electromagnetic compatibility. Part 1: Specification for limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment.</p> <p>Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Amendment 12</p> <p>Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Broadcast receiver and associated equipment Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Limits and methods of measurement of radio disturbance characteristics of electrical motor-operated and thermal appliances for household and similar purposes, electric tools and electric apparatus.</p> <p>Limits and methods of measurement of radio disturbance (except characteristics of electrical motor-operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus).</p> <p>Limits and methods of measurement of radio disturbance (except characteristics of electrical motor-operated and thermal appliances for household and similar purposes, electric tools and similar electric apparatus).</p> <p>Household Electrical Appliances</p> <p>Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 1: Emission – Product family standard</p> <p>Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity – Product family standard</p> <p>(A2LA Cert. No. 1627-01) 10/31/03 Page 2 of 11</p>
EMC Standards	Title															
<b>Emissions</b> CISPR 22 1997 with amendments 1 and 2	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.															
CNS13438 1994	Limits and methods of measurement of radio interference characteristics of information technology equipment.															
EN55022:1994 and 1998	Limits and methods of measurement of radio disturbance characteristics of information technology equipment.															
SABS CISPR 22:1997	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement															
Canada ICES-003 1997 AS/NZS 3548 1995	Digital apparatus Australian/New Zealand Standard Limits and methods of measurement of radio disturbance characteristics of information technology equipment															
CISPR 11 1990, 1997, 1999	Limits and methods of measurement of electromagnetic disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.															
<p>CISPR 14-2 1996, 1997 + A1:2001</p> <p>CISPR 20: 1995, 2002 with amendment 3 (associated group only)</p> <p>EN 55020: 1995, 2002 (associated group only)</p> <p>CISPR 24</p> <p>SABS CISPR 24 1997</p> <p>AS/NZS 3200.1.2: 1995</p> <p><b>European Union Basic EMC Standards</b> EN 61000-4-2: 1995, 1999, 2001</p> <p>EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999</p> <p>EN 61000-4-4 1995</p> <p>EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999</p> <p>EN 61000-4-8 1994</p> <p>EN 61000-4-11 1994</p> <p>ENV 61000-2-2 1993</p> <p><b>EU Product Family Standards</b> EN 50081-1 1992</p> <p>EN 50081-2 1993</p> <p>EN 50082-1 1992, 1998</p> <p>EN 50082-2 1995</p> <p>Immunity requirements for household appliances, tools and similar apparatus.</p> <p>Limits and methods of measurement of immunity characteristics of sound and television broadcast receivers and associated equipment.</p> <p>Electromagnetic immunity of broadcast receivers and Associated equipment.</p> <p>Information technology equipment – Immunity characteristics – Limits and methods of measurement</p> <p>Information technology equipment – Immunity characteristics – Limits and methods of measurement</p> <p>Approval and test specification – Medical electrical Equipment – General requirements for safety – Collateral Standard: Electromagnetic compatibility – Requirements and tests.</p> <p>Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 2: Electrostatic discharge immunity test – Basic EMC Publication</p> <p>Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 3: Radiated, radio-frequency, electromagnetic field immunity test</p> <p>Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 4: Electrical fast transient/burst immunity test – Basic EMC publication</p> <p>(EMC) Part 4: Testing and measurement techniques. Section 5: Surge immunity test.</p> <p>Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 6: Immunity to conducted disturbances, induced by radio-frequency fields.</p> <p>Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 8: Power frequency magnetic field immunity test.</p> <p>(EMC) Part 4: Testing and measurement techniques. Section 11: Voltage dips, short interruptions and voltage Variations immunity tests.</p> <p>Electromagnetic compatibility (EMC). Part 2: Environment, Section 2: Compatibility levels for low-frequency conducted disturbances and signaling in public low-voltage power supply systems (IEC 1000-2-2:1990)</p> <p>Electromagnetic capability – Generic emission standard. Part 1: Residential, commercial and light industry. (I.S.)</p> <p>Electromagnetic compatibility – Generic emission standard. Part 2: Industrial environment</p> <p>Electromagnetic compatibility – Generic emission standard. Part 1: Residential, commercial and light industry</p> <p>Electromagnetic compatibility – Generic immunity Standard. Part 2: Industrial environment</p> <p>(A2LA Cert. No. 1627-01) 10/31/03 Page 3 of 11</p>	<p>EN 61000-6-1: 1997, 2001</p> <p>EN 61000-6-2: 1998, 2001</p> <p>EN 50091-2 1996</p> <p>EN 55024 1998</p> <p>EN 55103-1 1997</p> <p>EN 55103-2 1997 (excluding Annex A3)</p> <p>EN 61326 1998</p> <p>EN 61547 1996</p> <p>EN 50130-4 1996</p> <p>EN 55104 1995</p> <p>EN 50083-2 1995</p> <p>EN 60601-1-2: 1993, 2002</p> <p>IEC 1800-3 1995</p> <p>EN 60555 Part 2 1987</p> <p>EN 60555 Part 3 1987</p> <p>EN 61000-3-2: 1995, 2000 AS/NZS 61000.3.2 1998 EN 61000-3-3 1995 AS/NZS 61000.3.3 1999</p> <p>ETS 300 386-1 1994</p> <p>Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 1: Immunity for residential, commercial and light-industrial environments</p> <p>Electromagnetic Compatibility (EMC)- Part 6: Generic standards- Section 2: Immunity for industrial environments</p> <p>Specification for Uninterruptible Power Systems (UPS). Part 2: EMC requirements</p> <p>Information technology equipment – Immunity Characteristics – Limits and methods of measurement.</p> <p>Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control apparatus for professional use. Part 1: Emission</p> <p>Electromagnetic Compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control professional use. Part 2: Immunity</p> <p>Electrical equipment for measurement, control and laboratory use – EMC requirements</p> <p>Equipment for general lighting purposes – EMC immunity requirements</p> <p>Alarm Systems. Part 4: Electromagnetic compatibility. Product family standard: Immunity requirements for components of fire, intruder and social alarm systems.</p> <p>Electromagnetic compatibility immunity – requirements for household appliances, tools and similar apparatus. Product family standard.</p> <p>Cabled distribution systems for television and sound signals. Part 2: Electromagnetic compatibility for equipment.</p> <p>Medical electrical equipment Part 1: general requirements for safety</p> <p>Section 2: Collateral standard: Electromagnetic compatibility – requirements and tests</p> <p>Adjustable speed electrical power drive systems. Part 3: EMC product standard including specific test methods.</p> <p>Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 2: Harmonics</p> <p>Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 3: Voltage fluctuations.</p> <p>Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limits for harmonic current emissions</p> <p>Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limitation of voltage fluctuations and flicker in low-voltage supply systems.</p> <p>Equipment Engineering (EE); Public telecommunication network equipment electro-magnetic compatibility (EMC) requirements Part 1: Product family overview, compliance criteria and test levels</p> <p>(A2LA Cert. No. 1627-01) 10/31/03 Page 4 of 11</p>															



<p>ETS EN 300 386-2 1997, 1998,</p> <p>ETS EN 300 386 2000 v1.2.1, 2001 v1.3.1</p> <p>ETS 300 132-1 1996</p> <p>ETS 300 132-2 1996</p> <p>ETR 283 1997</p> <p><i>EU radio standards</i> (ETS) EN 300 385 v1.2.1: 1998, 1999</p> <p>EN 300 330 v1.2.1: 1998, 1999</p> <p>ETS 300 328 1996</p> <p>ETS EN 300 440 v1.2.1 1999</p> <p>EN 301 893:2002 v1.2.1</p> <p>ETS 300 836-1:1998</p> <p>EN301 489-17:2002 v1.2.1</p>	<p>Electromagnetic compatibility and radio spectrum matters (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements; Part 2: Product family standard. Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc) Equipment Engineering (EE): Transient voltages at Interface A on telecommunications direct current (DC) power distributions.</p> <p>Electromagnetic compatibility and Radio spectrum matters (ERM); Electromagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment (ETS) Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices (SRD); Technical characteristics and test methods for radio equipment in the range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 1 GHz to 40 GHz frequency range Broadband Radio Access Networks (BRAN); 5 GHz (draft) high performance RLAN; Harmonized EN covering Essential requirements of article 3.2 of the R&amp;TTE Directive Broadband Radio Access Networks (BRAN); High Performance Radio Local Area Network (HIPERLAN) Type 1; Conformance testing specification; Part 1: Radio Type approval and Radio Frequency (RF) conformance test specification Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2.4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment</p>	<p>EN 300 328-2:2001 v1.2.1</p> <p>EN 301 489-1:2002</p> <p>EN 60669-2-1:2002</p> <p><i>Canada Radio Standards</i> Canadian GL-36 1995</p> <p>Canadian RSS-119 1999, 2000 Issue 6</p> <p>Canadian RSS-134 1996 &amp; 2000, Issue 1 Rev 1</p> <p>Canadian RSS-210 2000 Issue 3,</p> <p>RFS29 1998      Specification for Restricted Radiation Radio Apparatus (New Zealand)</p> <p><i>FCC Standards</i> 47 CFR FCC low power transmitters operating on frequencies below 1 GHz, emergency alert systems, unintentional radiators and ISM devices. 47 CFR FCC low power transmitters operating on frequencies above 1 GHz, with the exception of spread spectrum devices. 47 CFR FCC Unlicensed Personal Scope Communications System (PCS) devices 47 CFR FCC Unlicensed National Scope Information Infrastructure devices and low power transmitters using spread spectrum techniques. 47 CFR FCC Personal mobile Scope Radio Services in the following FCC Rule Parts 22, 24, 25, 27. 47 CFR FCC General Mobile Radio Scope Services in the following FCC Rule Parts 22, 74, 90, 95, 97. 47 CFR FCC Maritime and Aviation Scope Radio Services in 47 CFR Parts 80 and 87 47 CFR FCC Microwave Radio Services Scope in 47 CFR Parts 21, 74 and 101.</p>	<p>Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2.4 GHz ISM band and using spread spectrum modulation techniques; Part 2: Harmonized EN covering essential requirements under article 3.2 of the R&amp;TTE Directive Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements Switches for household and similar fixed electrical installations -- Part 2-1: Particular requirements -- Electronic switches</p> <p>Industry Canada -- technical requirements for low power Devices in the 2400 -- 2483.5 MHz band. Industry Canada -- Land mobile and fixed radio Transmitters and receivers, 27.41 to 960.0 MHz Industry Canada -- 900 MHz narrowband personal communications services Industry Canada -- Low power license-exempt radio 2001 Issue 5 communication devices</p> <p>Scope A1</p> <p>Scope A2</p> <p>A3</p> <p>A4</p> <p>B1</p> <p>B2</p> <p>B3</p> <p>B4</p>
(A2LA Cert. No. 1627-01) 10/31/03	Page 5 of 11	(A2LA Cert. No. 1627-01) 10/31/03	Page 6 of 11

<p>FCC/OST MP-5 1986</p> <p>GR-1089-CORE: 1997, 1999 issue 2/ 2002 Issue 3</p> <p><i>ANSI EMC Standards</i> ANSI C63.4: 1992, 1999, 2001</p> <p>ANSI C63.5 1988</p> <p><i>IEEE EMC Standards</i> IEEE C62.41: 1980, 1991</p> <p><i>Swedish EMC Standards</i> BAKOM 3336.3 1995</p> <p><i>South African EMC standards other than CISPR equivalents</i> SABS 1718-1: 1996</p> <p><i>Japanese VCCI Standards</i> VCCI V-3/99.05 1999 VCCI V-4/99.05 1999</p> <p><b>Telecommunications</b> Telecommunications Registration; General test methods; Lightning surge; Drop testing; Balance testing; Signal power (metallic and longitudinal); Frequency measurements; Pulse templates; Leakage testing; Impedance testing; Hearing Aid Compatibility testing (<i>excluding volume control</i>); Protocol analysis and Jitter testing.</p> <p><b>Telecom Standards</b></p>	<p>FCC (Federal Communications Commission) methods Of measurement of radio noise emissions from industrial, scientific and medical equipment. Bellcore electromagnetic compatibility and electrical safety -- Generic criteria for network telecommunications equipment.</p> <p>American National Standard for methods of measurement of radio-noise emissions for low-voltage electrical and electronic equipment in the range of 9 kHz to 40GHz. American National Standard for electromagnetic compatibility -- radiated emissions measurements in electromagnetic interference (EMI) control -- calibration of antennas.</p> <p>IEEE recommended practice on surge voltages in low-voltage AC power circuits</p> <p>Electromagnetic compatibility and electrical safety (EMC &amp; S) for wired terminal equipment. Harmonization document information over the OFCOM requirements.</p> <p>South African Bureau of Standards: Specification for Gaming equipment. Part 1: Casino equipment.</p> <p>Technical Requirements Instruction for Test Conditions for Requirement under Test</p>	<p>TIA/EIA-IS-968</p> <p>TIA/EIA-IS-883</p> <p>TIA-968-A</p> <p>T1.TRQ 6-2001</p> <p>Canada VDSL Issue 1 January 2003</p> <p>AS/ACIF S002-2001</p> <p>AS/ACIF S016-2001</p> <p>AS/ACIF S031-2001 AS/ACIF S038-2001 AS/ACIF S043-2001</p> <p>ITU-T G.703 HKTA 2028</p> <p>HKTA 2029</p> <p>TBR 1 : 1995</p> <p>TBR 2 : 1997</p> <p>Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network Telecommunications Telephone Terminal Equipment Supplemental Technical Requirements for Connection of Stutter Dial Tone Detection Devices and ADSL Modems to the Telephone Network Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network Technical Requirements for SHDSL, HDSL2, HDSL4 Digital Subscriber Line Terminal Equipment to Prevent Harm to the Telephone Network Industry Terminal Attachment Program Requirements and Test Methods for Very-High-Bit-Rate Digital Subscriber Line (VDSL) Terminal Equipment Analogue interworking and non-interference requirements for Customer Equipment for connection to the Public Switched Telephone Network Requirements for Customer Equipment for connection to hierarchical digital interfaces Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for Connection to a Metallic Local Loop Interface of a Telecommunications Network -- Part 1: General Part 2: Broadband Part 3: DC, Low Frequency AC and Voiceband Physical/electrical characteristics of hierarchical Digital interfaces Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 1544 kbit/s Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 2048 kbit/s Attachment requirements for terminal equipment to be connected to circuit switched data networks and leased circuits using a CCITT Recommendation X.21 interface, or at an interface physically, functionally and electrically compatible with CCITT Recommendation X.21 but operating at any data signaling rate up to, and including, 1 984 kbit/s Attachment requirements for Data Terminal Equipment (DTE) to connect to Packet Switched Public Data Networks (PSPDNs) for CCITT Recommendation X.25 interfaces at data signaling rates up to 1 920 kbit/s utilizing interfaces derived from CCITT Recommendations X.21 and X.21 bit</p>	
(A2LA Cert. No. 1627-01) 10/31/03	Page 7 of 11	(A2LA Cert. No. 1627-01)	10/31/03 Page 8 of 11

<p>TBR 3 : 1995 + Amdt : 1997</p> <p>TBR 4 : 1995 + Amdt : 1997</p> <p>TBR 012 : 1993 + Amdt : 1996</p> <p>TBR 013 : 1996</p> <p>TBR 21 : 1998</p> <p>TBR 24 : 1997</p> <p><i>Australia</i> TS 002 : 1997</p> <p>TS 016 : 1997</p> <p>TS 031 : 1997</p> <p>TS 038 : 1997</p> <p>AS/ACIF S043.2:2001</p> <p><b>Product Safety</b> General test methods; Input tests; Electric strength tests; Impulse tests; Permanency of marking tests; Accessibility tests; Energy Hazard measurements; Capacitor discharge tests; Humidity conditioning; Earthing tests; Limited power source measurements; Stability tests; Steel ball tests; Lithium Battery Reverse Current measurements; Leakage current tests; Transformer abnormal tests; Telecom leakage tests; Over voltage/power cross tests (<i>excluding x-ray tests</i>).</p> <p><u>Product Safety Standards</u></p> <p>Specific Product Safety Standards IEC 950 1991</p> <p>UL 1950 1998</p> <p>CSA C22.2 No.950-95 UL 60950 2000</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p>	<p>Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access</p> <p>Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN primary rate access</p> <p>Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal equipment</p> <p>Business Telecommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for terminal equipment interface</p> <p>Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signaling</p> <p>Business Telecommunications (BTC); 34 Mbit/s digital Unstructured and structured leased lines (D34U and D34S); Attachment requirements for terminal equipment interface</p> <p>Analogue Interworking and Non interference Requirements for Customer Equipment Connected to the Public Switched Telephone Network</p> <p>General Requirements for Customer Equipment Connected to Hierarchical Digital Interfaces</p> <p>Requirements for ISDN Basic Access Interface</p> <p>Requirements for ISDN Primary Rate Access Interface</p> <p>Requirements for Customer Equipment for connection to a metallic loop interface of a Telecommunications Network – Part 2 Broadband</p> <p><b>Title</b></p> <p>Safety of information technology equipment including Amendments 1, 2, 3, and 4 electrical business equipment.</p> <p>Safety of information technology equipment, including electrical business equipment.</p> <p>Safety of Information Technology Equipment (UL 1950)</p> <p>Safety of information technology equipment</p> <p>Page 9 of 11</p>	<p>IEC 60950 2000 EN 60950 1997, 1998, 2000 IEC 60950-1 2001 UL 60950-1 2003 CSA C22.2 No. 60950-00 CSA C22.2 No. 60950-1 03 AS/NZS 3260 1993</p> <p>AS/NZS 3260 Supp 1 1996</p> <p>ACA TS 001 1997</p> <p>UL 1459 1995 IEC 1010-1 1990 IEC 61010-1 1993 EN 61010-1 1993, 2001 IEC 61010-1 2001 UL 61010B-1 2003 UL 3101-1 1993 CAN/CSA 1010-1 1999 (<i>Including AM 2</i>) UL 3111-1 1996 UL 3121-1 1995 IEC 60601-1 1995 EN 60601-1 1995 (<i>Including AM 2</i>) UL 2601-1 1997 IEC 60065 1998, 2000 ANSI/UL 6500: 1998 CAN/CSA 60065-00 AS/NZS 3250 1995 AS/NZS 60065 2000</p> <p>Canadian C22.2 No. 1-94 (1-98) 1998 EN 60065 1994</p> <p>IEC 60825 1990</p> <p>EN 60825-1 1994 IEC 60825-1 2001 IEC 60825-2 2000-5 systems IEC 60825-4 1997-11 IEC 60335-1 1995 (<i>Including AM2 – 1997 &amp; AM 12 – 1997</i>) Part 1: General requirements EN 60335-1 2001 UL 60335-1 1998 CAN/CSA E335-1 1994</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p>	<p>Safety of information technology equipment Safety of information technology equipment, including Electrical business equipment.</p> <p>Approval and test specification – Safety of information technology equipment including electrical business Equipment.</p> <p>Approval and test specification – Safety of information technology equipment including electrical business equipment – Alphabetical reference index to IEC 950 (Supplement to AS/NZS 3260:1993)</p> <p>Australian Communications Authority – Safety requirements for customer equipment.</p> <p>Telephone Equipment</p> <p>Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements.</p> <p>Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements.</p> <p>Electrical equipment for laboratory use Part 1: General requirements.</p> <p>Electrical measuring and test equipment. Part 1: General requirements.</p> <p>Medical electrical equipment. Part 1: General requirements for safety.</p> <p>Medical electrical equipment</p> <p>Medical electrical equipment. Part 1: General Requirements for safety.</p> <p>Audio, video and similar electronic apparatus – Safety requirements</p> <p>Audio/video and musical instrument apparatus for Household, commercial and similar general use</p> <p>Australian/New Zealand Standard – Approval and test Specification – Mains operated electronic and related Equipment for household and similar general use</p> <p>Audio, video and similar electronic equipment. Consumer and 1994, commercial products</p> <p>Safety requirements for main operated electronic and related apparatus for household and similar general use.</p> <p>Radiation safety of laser products, equipment Classification, requirements and user's guide</p> <p>Safety of laser products Part 1: equipment Classification, requirements and user's guide.</p> <p>Safety of laser products – Part 2: Safety of optical communication</p> <p>Safety of laser products – Part 4: Laser guards</p> <p>Safety of household and similar electrical appliances Part 1: General requirements</p> <p>Page 10 of 11</p>
<p>UL 61010A-1 : 2002</p> <p>EN 61010-1 : 2001</p> <p>AS/NZS 60950 : 2000</p> <p><b>Environmental<sup>2</sup></b></p> <p><u>Environmental Standards</u></p> <p>GR-63-CORE ETS 300 019 (vibration up to 1000Hz)</p> <p>(A2LA Cert. No. 1627-01) 10/31/03</p>	<p>Electrical equipment for laboratory use; part 1: General requirements</p> <p>Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements</p> <p>Safety information technology equipment</p> <p><b>Title</b></p> <p>NEBS Requirements: Physical Protection</p> <p>Environmental conditions and environmental tests For telecommunications equipment</p> <p>Page 11 of 11</p>		

<sup>2</sup> Environmental testing is performed at the satellite facility located at 168 Ayer Rd, Littleton, MA 01460