

TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China
Report Number: 2401S35623-RFA
FCC ID: T2C-A40
IC: 10741A-A40

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;
RSS-247 ISSUE 3, AUGUST 2023

Sample Description

Product Type: Video Conferencing Endpoint
Model No.: MeetingBar A40
Multiple Model(s) No.: N/A
Trade Mark: **Yealink**
Date Received: 2024/04/03
Issue Date: 2024/07/24

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Gala Liu

Gala Liu
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- RF EXPOSURE	11
APPLICABLE STANDARD	11
RESULT	12
RSS-102 § 4 –EXPOSURE LIMITS.....	13
APPLICABLE STANDARD	13
RESULT	13
§15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	16
§15.207 (A) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
FACTOR & OVER LIMIT CALCULATION.....	19
TEST DATA	19
§15.205, §15.209, §15.247(D) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS.....	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	26
TEST PROCEDURE	26
FACTOR & OVER LIMIT/MARGIN CALCULATION	27
TEST DATA	27
EUT PHOTOGRAPHS	57
TEST SETUP PHOTOGRAPHS	58

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401S35623-RFA	Original Report	2024/07/24

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	A40
FVIN	A40
Product	Video Conferencing Endpoint
Tested Model	MeetingBar A40
Multiple Model(s)	N/A
Frequency Range	2412-2462MHz
Maximum Conducted Peak Output Power	Module YL43752: 18.17dBm Module YL43456: 20.71dBm
Modulation Technique	DSSS, OFDM
Antenna Specification [#]	Module YL43752 ANT1: 3.08dBi; ANT2: 0.71dBi Module YL43456 ANT: 3.22dBi (It is provided by the applicant)
Voltage Range	DC 48V from adapter
Sample serial number	2JJ1-1 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: YLPS482000C Input: AC 100-240V~50/60Hz 1.5A Output: DC 48.0V, 2.0A 96.0W

Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Frequency		213.55 Hz(k=2, 95% level of confidence)
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.75 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9 kHz~150 KHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

EUT was tested with Channel 1, 6 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“Authentic Tool _1.2.24.0”[#] software was used to test and power level as below:

Module YL43752

Mode	Data rate	Power Level [#]		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	8	8	8
802.11g	6Mbps	8	8	8
802.11n-HT20	MCS0	8	8	8
802.11ax20	MCS0	8	8	8

Note: For this Wi-Fi mode, EUT has two antennas and support SISO/MIMO transmit except for 802.11b/g mode which only support SISO. The MIMO mode was the worst case which select to test. All the antenna ports have the same power level.

Module YL43456

Mode	Data rate	Power Level [#]		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	16	16	16
802.11g	6Mbps	16	16	16
802.11n-HT20	MCS0	16	16	16

The software and power level was provided by the applicant.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	PC	Latitude E5430	JG3NLV1
Unknown	Earphone	Unknown	Unknown
Yealink	Microphone	VCM35	803144F060100283
Redmi	Monitor1	24B1	QVGP3HA038953
Redmi	Monitor2	202TE6QB/93	UHBA1414013624
Kingston	USB Flash Disk 1	Unknown	Unknown
Kingston	USB Flash Disk 2	DT100G3(32G)	0622631

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielded Un-Detachable AC Cable	1.5	AC Mains	Socket
Un-shielded Detachable AC Cable	1.5	Adapter	LISN1/Socket
Shielded Un-Detachable DC Cable	1.5	EUT_DC Port	Adapter
Un-shielded Detachable AC Cable*2	1.5	Monitor1/2	LISN2/Socket
Shielded Detachable HDMI Cable*2	1.5	EUT_HDMI1/2 Port	Monitor1/2
Unshielded Detachable USB Cable	2.5	EUT_USB Port	PC
Unshielded Detachable RJ45 Cable	2.5	EUT_Internet Port	PC
Unshielded Detachable Audio Cable	1.0	EUT_VCH Port	Microphone
Unshielded Detachable Audio Cable	1.2	EUT_Line In/Out Port	Earphone

Block Diagram of Test Setup

For conducted emission

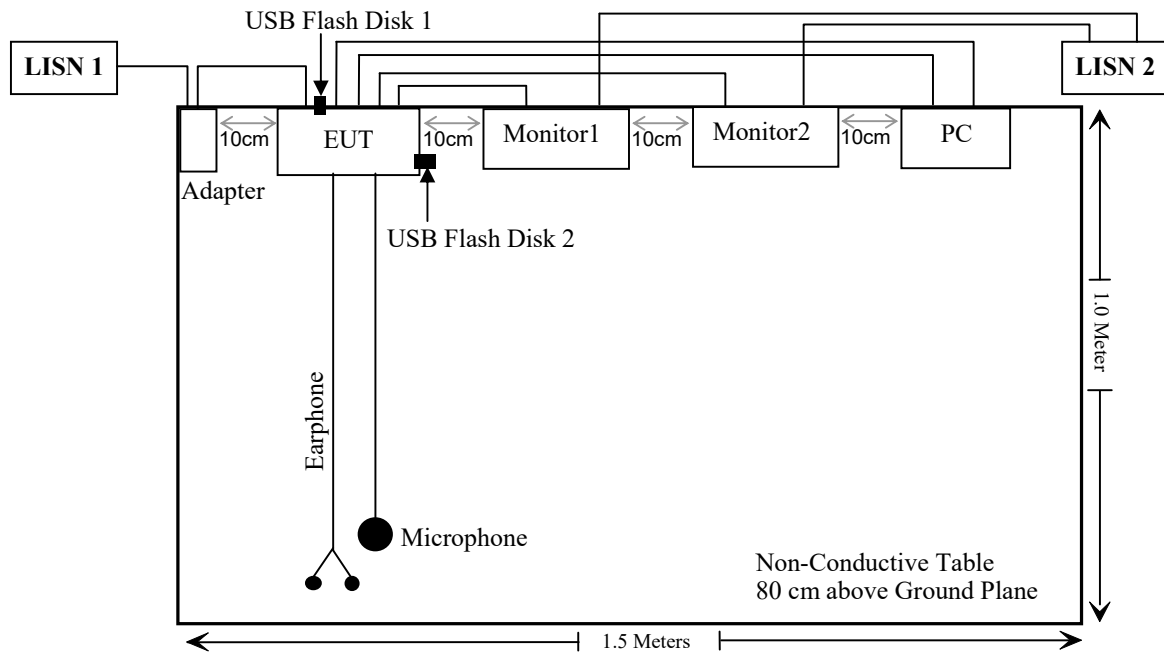

For radiated emission:

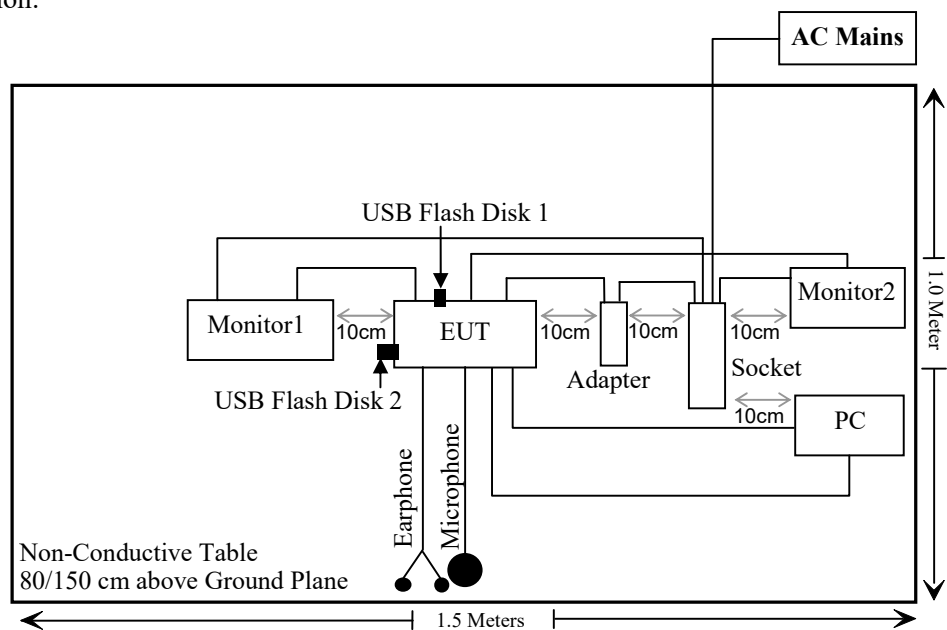

SUMMARY OF TEST RESULTS

FCC Rules	RSS-247 & RSS-Gen Rules	Description of Test	Result	Remark
§15.247 (i), §1.1307 (b) (3) & §2.1091	RSS-102 §4	RF Exposure & Exposure Limits	Compliant	-
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant	-
§15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant	-
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 § 5.5	Spurious Emissions	Compliant	-
§15.247 (a)(2)	RSS- Gen§6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	-	See Note
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	-	See Note
§15.247(d)	RSS-247 § 5.5	100 kHz Bandwidth of Frequency Band Edge	-	See Note
§15.247(e)	RSS-247 § 5.2 (b)	Power Spectral Density	-	See Note
-	-	Duty Cycle	-	See Note

Note:

1: The manufacturer declared two certified WLAN module installed in EUT, model YL43752 (FCC ID: T2C-YL43752, IC: 10741A-YL43752) and model YL43456 (FCC ID: T2C-YL43456, IC: 10741A-YL43456)

2: The test data are referred to the module report SZNS220511-19727E-RFB, FCC022022-06244RF1 and IC022022-06245RF1, the cross-reference of each test item and the data of reference module report as below:

Test item	Reference data of module report		
	SZNS220511-19727E-RFB	FCC022022-06244RF1	IC022022-06245RF1
99% Occupied Bandwidth & 6 dB Emission Bandwidth	Page 58~67	Page 66~76	Page 66~76
Maximum Conducted Output Power	Page 68	Page 77~78	Page 77~78
100 kHz Bandwidth of Frequency Band Edge	Page 78~83	Page 79~96	Page 79~96
Power Spectral Density	Page 69~77	Page 97~102	Page 97~102
Duty Cycle	Page 84~86	Page 11~12	Page 11~12

3: The BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218	NCR	NCR
Radiated Emissions Test					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2024/07/19
ETS	Passive Loop Antenna	6512	29604	2023/07/07	2024/07/06
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2024/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
SNSD	2.4G Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2023/08/03	2024/08/02
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/03	2024/08/02
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- RF EXPOSURE

Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

For worst case:

For Module YL43752:

Mode	Frequency (MHz)	Tune up conducted power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	8.5	3.08	0.93	9.43	8.77	0.2	768
BLE	2402-2480	8.0	3.08	0.93	8.93	7.82	0.2	768
2.4G Wi-Fi	2412-2462	18.5	3.08	0.93	19.43	87.70	0.2	768
5G Wi-Fi	5180-5240	12.0	4.17	2.02	14.02	25.23	0.2	768
	5260-5280	13.0	4.17	2.02	15.02	31.77	0.2	768
	5500-5700	12.0	4.17	2.02	14.02	25.23	0.2	768
	5745-5825	14.5	4.17	2.02	16.52	44.87	0.2	768

For Module YL43456:

Mode	Frequency (MHz)	Maximum power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
2.4G Wi-Fi	2412-2462	20.71	3.22	1.07	21.78	150.66	0.2	768
5G Wi-Fi	5150-5850	16.28	4.17	2.02	18.30	67.61	0.2	768

Note 1: The tune-up power was refer the module report

Note 2: The antenna gain was declared by the applicant.

Note 3: 0dBd=2.15dBi.

Simultaneous transmitting consideration:

According to applicant, the BT can transmit at the same time with the Wi-Fi, the 2.4G Wi-Fi and 5G Wi-Fi cannot transmit at same time, the two Wi-Fi module cannot transmit as same time.

For worst case:

The ratio= $ERP_{BT}/limit + ERP_{Wi-Fi}/limit = 8.77/768 + 87.70/768 = 0.126 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

RSS-102 § 4 –EXPOSURE LIMITS

Applicable Standard

According to RSS-102 §4:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous [*]
0.1-10	-	0.73/ <i>f</i>	-	6 ^{**}
1.1-10	87/ <i>f</i> ^{0.5}	-	-	6 ^{**}
10-20	27.46	0.0728	-2	6
20-48	58.07/ <i>f</i> ^{0.25}	0.1540/ <i>f</i> ^{0.25}	8.944/ <i>f</i> ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 <i>f</i> ^{0.3417}	0.008335 <i>f</i> ^{0.3417}	0.02619 <i>f</i> ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ <i>f</i> ^{1.2}
150000-300000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616000/ <i>f</i>

Note: *f* is frequency in MHz.

^{*} Based on nerve stimulation (NS).

^{**} Based on specific absorption rate (SAR).

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. W/m²)

P = power input to the antenna (in appropriate units, e.g., W).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., m)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

For worst case:

For Module YL43752:

Mode	Frequency (MHz)	Antenna Gain [#]		Max Tune-up Power [#]		Evaluation Distance (m)	Power Density (W/m ²)	MPE Limit (W/m ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BT	2402-2480	3.08	2.03	8.5	7.08	0.2	0.029	5.35
BLE	2402-2480	3.08	2.03	8.0	6.31	0.2	0.025	5.35
2.4G Wi-Fi	2412-2462	3.08	2.03	18.5	70.79	0.2	0.286	5.37
5G Wi-Fi	5150-5250	4.17	2.61	12.0	15.85	0.2	0.082	9.01
	5250-5350	4.17	2.61	13.0	19.95	0.2	0.104	9.13
	5470-5725	4.17	2.61	12.0	15.85	0.2	0.082	9.39
	5725-5850	4.17	2.61	14.5	28.18	0.2	0.146	9.69

For Module YL43456:

Mode	Frequency (MHz)	Antenna Gain [#]		Max Tune-up Power [#]		Evaluation Distance (m)	Power Density (W/m ²)	MPE Limit (W/m ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wi-Fi	2412-2462	3.22	2.10	20.71	117.76	0.2	0.492	5.37
5G Wi-Fi	5150-5850	4.17	2.61	16.28	42.46	0.2	0.220	9.01

Note: The tune up conducted power and antenna gain was declared by the applicant.

Simultaneous transmitting consideration:

According to applicant, the BT can transmit at the same time with the Wi-Fi, the 2.4G Wi-Fi and 5G Wi-Fi cannot transmit at same time, the two Wi-Fi module cannot transmit as same time.

For worst case:

The ratio= MPE_{BT}/limit+ MPE_{Wi-Fi}/limit= 0.029/5.35+0.286/5.37= 0.059<1.0

Result: Compliant.

Note: To maintain compliance with the RF exposure guidelines, place the equipment at least 0.2 m from nearby persons.

§15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the Compliant of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has three internal antennas arrangement which was permanently attached for Wi-Fi, fulfill the requirement of this section. Please refer to the EUT photos.

ANT	Type	Antenna Gain [#]	Impedance
Module YL43752 ANT1	PCB	3.08dBi	50Ω
Module YL43752 ANT2	PCB	0.71dBi	50Ω
Module YL43456 ANT	FPC	3.22dBi	50Ω

Result: Compliant

§15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS**Applicable Standard**

FCC § 15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for Compliant with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- Perform the AC power-line conducted emissions test with the antenna connected to determine Compliant with the limits of table 4 outside the transmitter's fundamental emission band.
- Retest with a dummy load instead of the antenna to determine Compliant with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

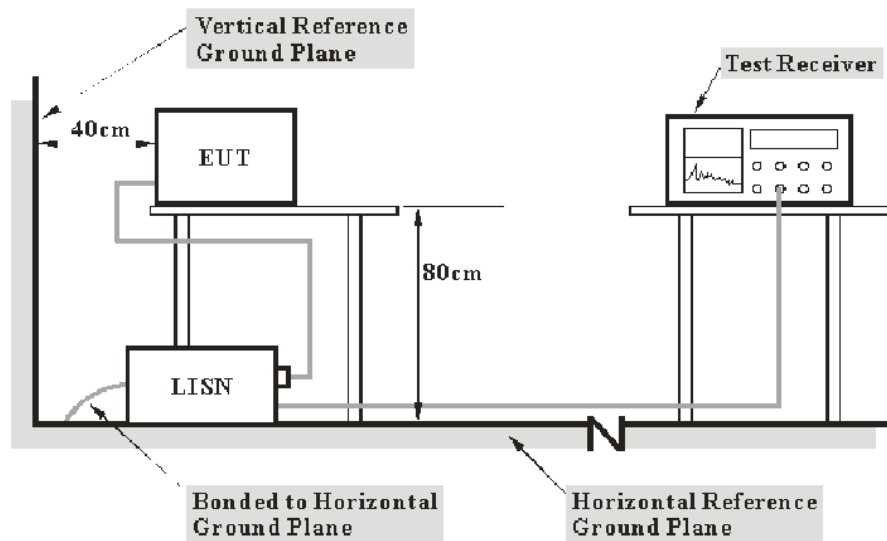

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	66 %
ATM Pressure:	101.0 kPa

The testing was performed by Macy Shi on 2024-04-16.

EUT operation mode: Transmitting (maximum output power mode)

For Module YL43752


AC 120V/60 Hz, Line

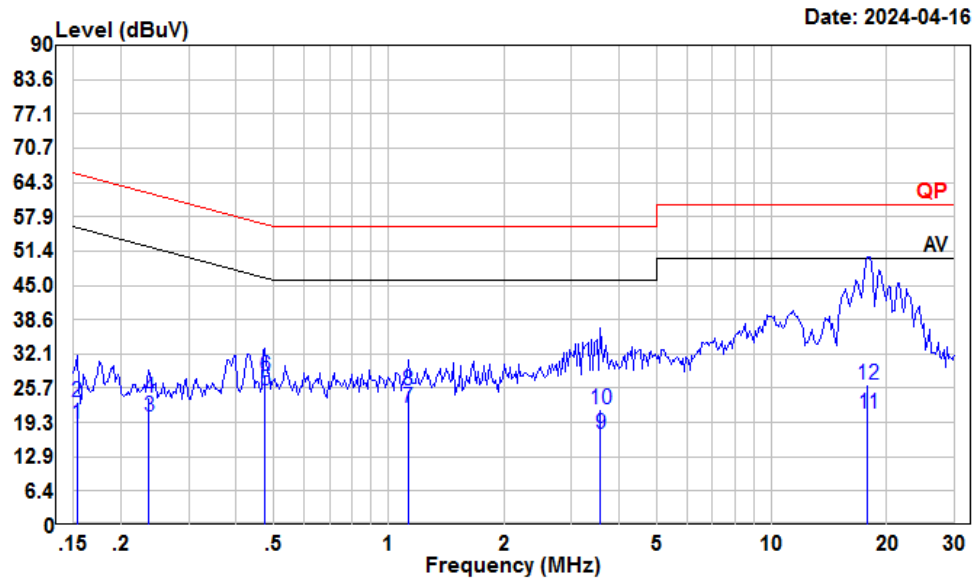

Condition: Line
Project : 2401S35623-RF
Tester : Macy shi
Note : 2.4G WIFI

	Freq	Read Level	Level	Cable Loss	LISN Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	-1.53	19.02	10.15	10.40	55.82	-36.80	Average
2	0.15	2.71	23.26	10.15	10.40	65.82	-42.56	QP
3	0.24	-0.26	20.28	10.18	10.36	52.22	-31.94	Average
4	0.24	3.53	24.07	10.18	10.36	62.22	-38.15	QP
5	0.48	4.97	25.35	10.17	10.21	46.41	-21.06	Average
6	0.48	7.51	27.89	10.17	10.21	56.41	-28.52	QP
7	1.12	1.40	22.06	10.11	10.55	46.00	-23.94	Average
8	1.12	4.50	25.16	10.11	10.55	56.00	-30.84	QP
9	3.57	-3.61	17.03	10.26	10.38	46.00	-28.97	Average
10	3.57	1.09	21.73	10.26	10.38	56.00	-34.27	QP
11	17.85	0.34	20.99	10.11	10.54	50.00	-29.01	Average
12	17.85	5.79	26.44	10.11	10.54	60.00	-33.56	QP

AC 120V/60 Hz, Neutral

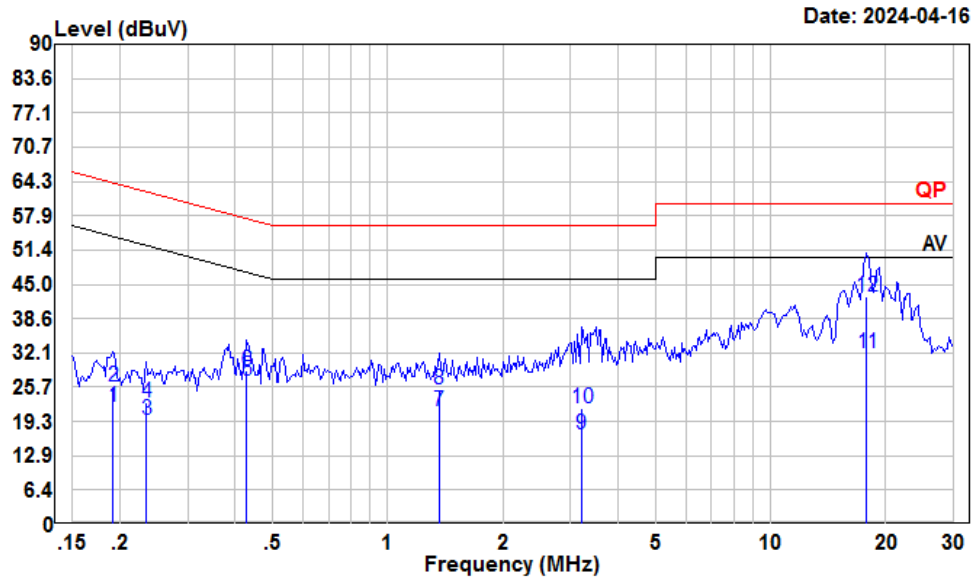

Condition: Neutral

Project : 2401S35623-RF


Tester : Macy shi

Note : 2.4G WIFI

	Freq	Read Level	Level	Cable Loss	LISN Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.19	1.26	21.91	10.11	10.54	53.98	-32.07	Average
2	0.19	5.21	25.86	10.11	10.54	63.98	-38.12	QP
3	0.23	-1.30	19.50	10.17	10.63	52.30	-32.80	Average
4	0.23	1.98	22.78	10.17	10.63	62.30	-39.52	QP
5	0.43	6.08	27.05	10.20	10.77	47.29	-20.24	Average
6	0.43	7.90	28.87	10.20	10.77	57.29	-28.42	QP
7	1.36	0.91	21.18	10.06	10.21	46.00	-24.82	Average
8	1.36	4.93	25.20	10.06	10.21	56.00	-30.80	QP
9	3.21	-3.57	17.00	10.27	10.30	46.00	-29.00	Average
10	3.21	1.16	21.73	10.27	10.30	56.00	-34.27	QP
11	17.85	11.59	31.98	10.11	10.28	50.00	-18.02	Average
12	17.85	22.39	42.78	10.11	10.28	60.00	-17.22	QP

For Module YL43456

AC 120V/60 Hz, Line

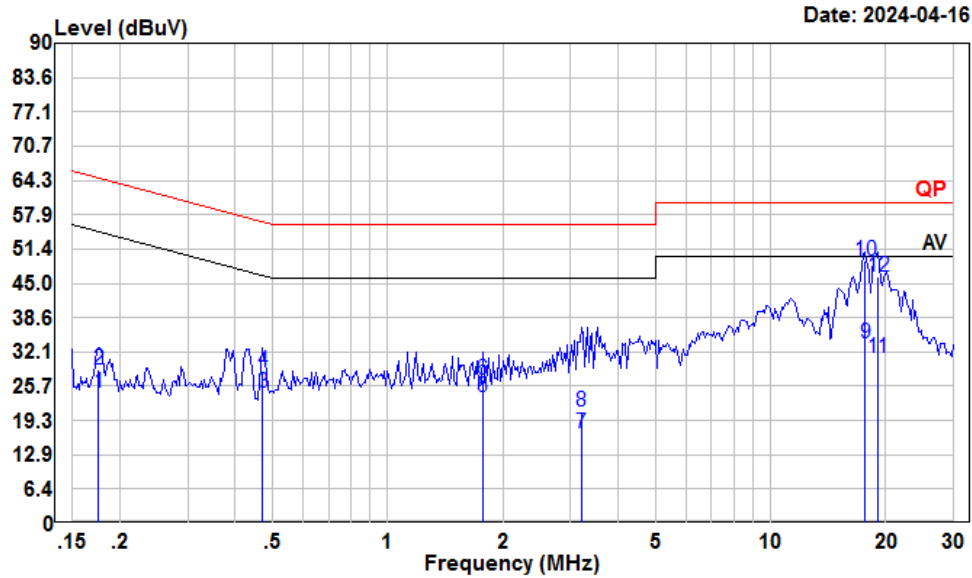

Condition: Line


Project : 2401S35623-RF

Tester : Macy shi

Note : 2.4G WIFI

	Freq	Read Level	Level	Cable Loss	LISN Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.18	3.94	24.48	10.14	10.40	54.68	-30.20	Average
2	0.18	8.31	28.85	10.14	10.40	64.68	-35.83	QP
3	0.47	4.12	24.50	10.17	10.21	46.49	-21.99	Average
4	0.47	8.26	28.64	10.17	10.21	56.49	-27.85	QP
5	1.77	3.22	23.70	10.13	10.35	46.00	-22.30	Average
6	1.77	6.50	26.98	10.13	10.35	56.00	-29.02	QP
7	3.21	-3.81	16.83	10.27	10.37	46.00	-29.17	Average
8	3.21	0.44	21.08	10.27	10.37	56.00	-34.92	QP
9	17.66	13.19	33.83	10.11	10.53	50.00	-16.17	Average
10	17.66	28.59	49.23	10.11	10.53	60.00	-10.77	QP
11	19.02	10.17	30.91	10.11	10.63	50.00	-19.09	Average
12	19.02	25.49	46.23	10.11	10.63	60.00	-13.77	QP

AC 120V/60 Hz, Neutral

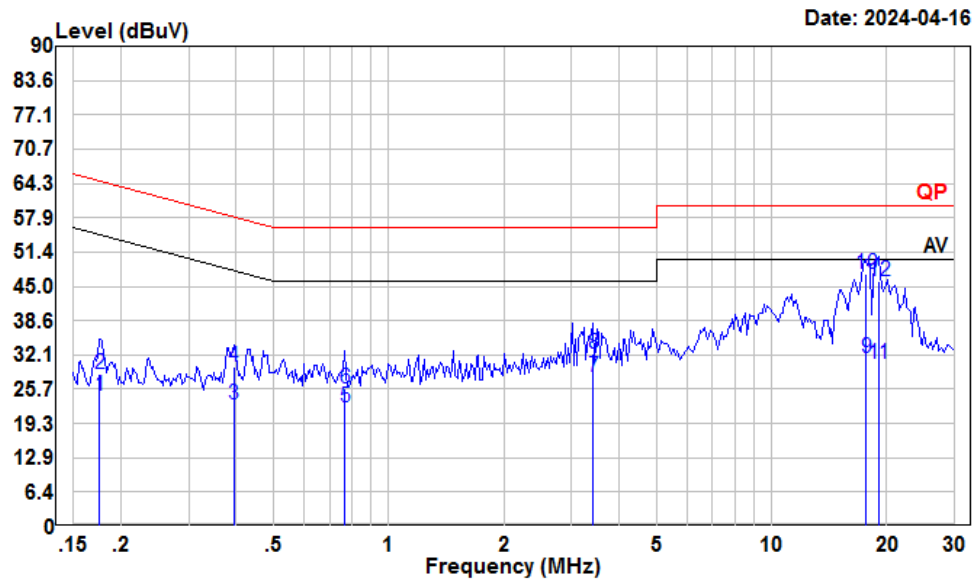

Condition: Neutral
Project : 2401S35623-RF
Tester : Macy shi
Note : 2.4G WIFI

	Freq	Read Level	Level	Cable Loss	LISN Factor	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.18	3.80	24.36	10.14	10.42	54.68	-30.32	Average
2	0.18	8.11	28.67	10.14	10.42	64.68	-36.01	QP
3	0.39	1.86	22.82	10.21	10.75	47.99	-25.17	Average
4	0.39	8.83	29.79	10.21	10.75	57.99	-28.20	QP
5	0.77	1.69	22.32	10.18	10.45	46.00	-23.68	Average
6	0.77	5.30	25.93	10.18	10.45	56.00	-30.07	QP
7	3.42	7.47	28.07	10.27	10.33	46.00	-17.93	Average
8	3.42	11.75	32.35	10.27	10.33	56.00	-23.65	QP
9	17.66	11.09	31.49	10.11	10.29	50.00	-18.51	Average
10	17.66	26.79	47.19	10.11	10.29	60.00	-12.81	QP
11	19.02	10.20	30.54	10.11	10.23	50.00	-19.46	Average
12	19.02	25.50	45.84	10.11	10.23	60.00	-14.16	QP

§15.205, §15.209, §15.247(d) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


According to RSS-GEN § 8.10 & RSS-247 § 5.5



Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply: (a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD). (b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6. (c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

EUT Setup

9 kHz-30MHz:

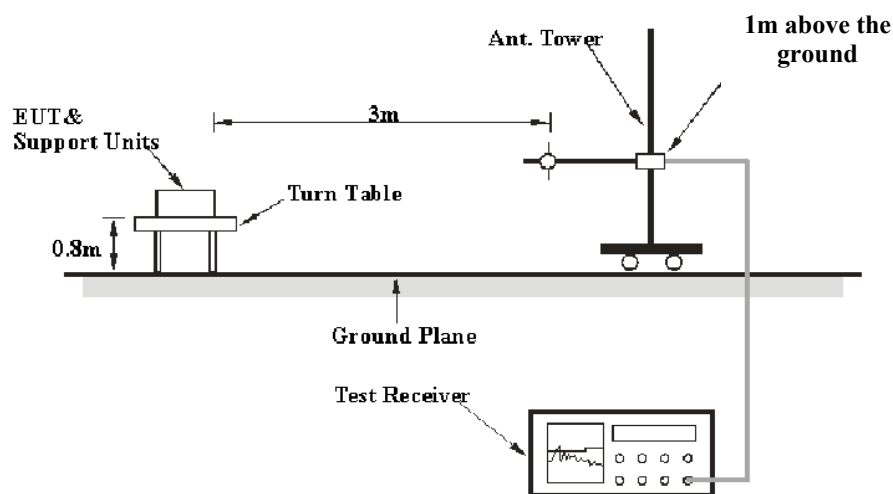

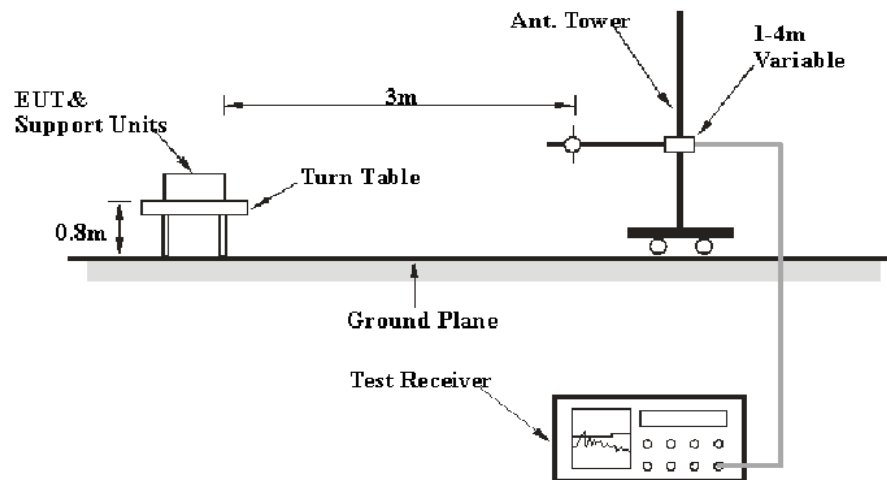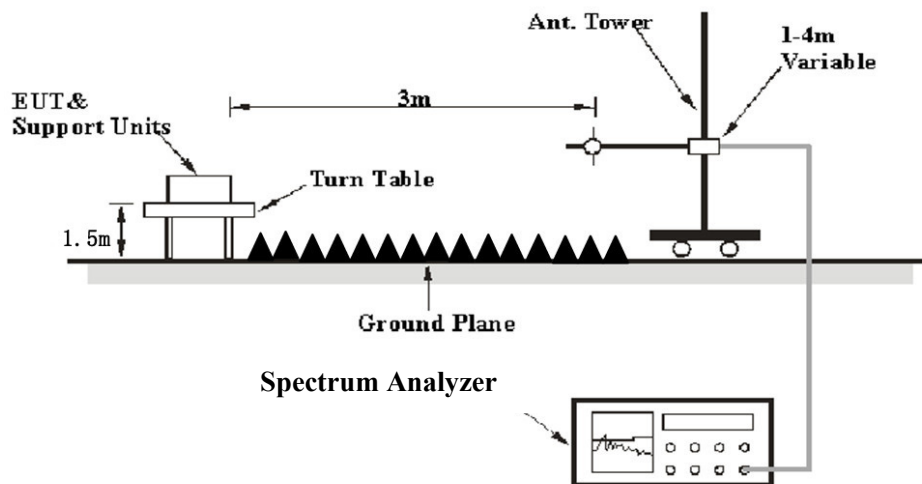30MHz-1GHz:**Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	25~25.5 °C
Relative Humidity:	50~54 %
ATM Pressure:	101.0 kPa

The testing was performed by Warren Huang on 2024-04-18 and 2024-04-19 for below 1GHz and Zenos Qiao on 2024-04-19 and 2024-04-23 for above 1GHz.

EUT operation mode: Transmitting


For Module YL43752

9 kHz-30MHz: (maximum output power mode)

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

30 MHz~1 GHz: (maximum output power mode)


Horizontal

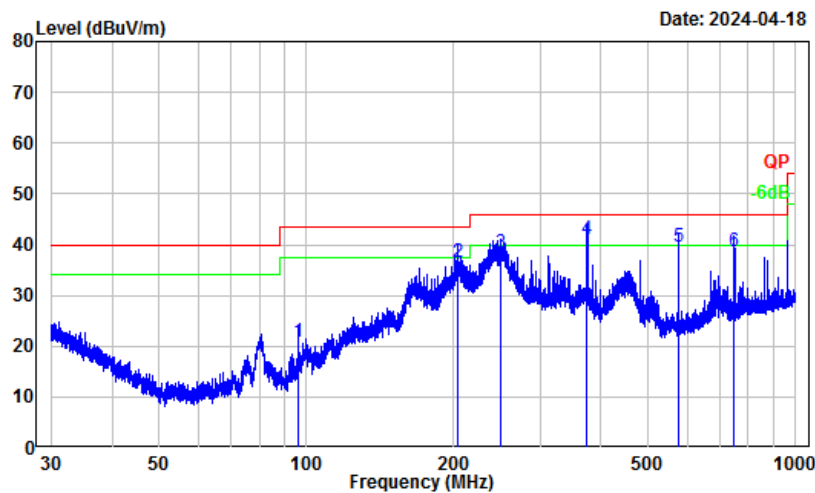

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401S35623-RF
Note : 2.4G WIFI
Tester : Warren Huang

	Freq Factor		Read Level		Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	96.01	-14.86	35.55	20.69	43.50	-22.81	QP
2	204.33	-11.10	47.74	36.64	43.50	-6.86	QP
3	249.97	-11.85	50.20	38.35	46.00	-7.65	QP
4	374.95	-8.61	49.74	41.13	46.00	-4.87	QP
5	576.14	-4.51	43.99	39.48	46.00	-6.52	QP
6	750.11	-1.67	40.20	38.53	46.00	-7.47	QP

Vertical

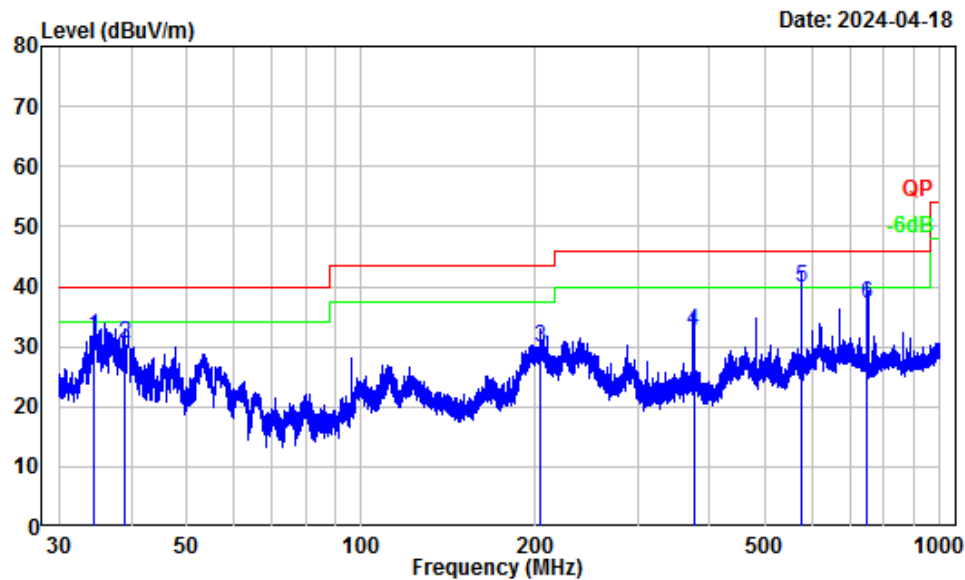

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401S35623-RF
Note : 2.4G WIFI
Tester : Warren Huang

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.59	-8.52	40.20	31.68	40.00	-8.32 QP
2	38.92	-11.22	41.60	30.38	40.00	-9.62 QP
3	203.97	-12.24	41.98	29.74	43.50	-13.76 QP
4	375.12	-8.85	41.41	32.56	46.00	-13.44 QP
5	576.14	-4.66	44.47	39.81	46.00	-6.19 QP
6	750.11	-2.17	39.43	37.26	46.00	-8.74 QP


For Module YL43456

9 kHz-30MHz: (maximum output power mode)

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

30 MHz~1 GHz: (maximum output power mode)


Horizontal

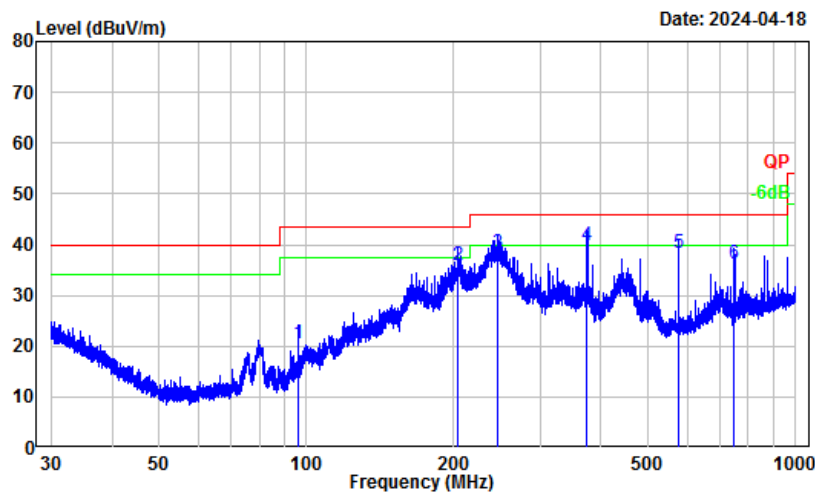

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401S35623-RF
Note : 2.4G WIFI
Tester : Warren Huang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	95.97	-14.87	35.37	20.50	43.50	-23.00	QP
2	204.33	-11.10	47.07	35.97	43.50	-7.53	QP
3	245.63	-11.78	50.10	38.32	46.00	-7.68	QP
4	374.95	-8.61	48.53	39.92	46.00	-6.08	QP
5	576.14	-4.51	42.77	38.26	46.00	-7.74	QP
6	750.11	-1.67	37.85	36.18	46.00	-9.82	QP

Vertical

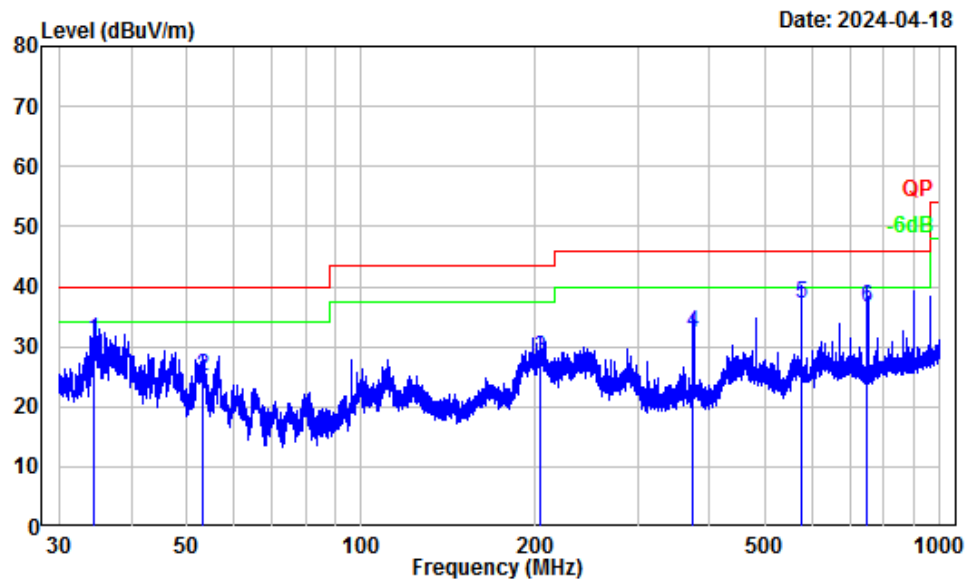

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401S35623-RF
Note : 2.4G WIFI
Tester : Warren Huang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.61	-8.53	39.68	31.15	40.00	-8.85	QP
2	53.13	-17.50	42.60	25.10	40.00	-14.90	QP
3	204.24	-12.23	40.46	28.23	43.50	-15.27	QP
4	374.95	-8.86	41.06	32.20	46.00	-13.80	QP
5	576.14	-4.66	41.84	37.18	46.00	-8.82	QP
6	750.11	-2.17	38.81	36.64	46.00	-9.36	QP

1 GHz-25 GHz:**For Module YL43752**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11b							
ANT1							
Low Channel 2412MHz							
2389.48	63.64	PK	H	-2.93	60.71	74	-13.29
2389.48	40.53	AV	H	-2.93	37.60	54	-16.40
2388.87	62.99	PK	V	-2.93	60.06	74	-13.94
2388.87	40.38	AV	V	-2.93	37.45	54	-16.55
4824.00	48.32	PK	H	2.45	50.77	74	-23.23
4824.00	31.91	AV	H	2.45	34.36	54	-19.64
4824.00	48.56	PK	V	2.45	51.01	74	-22.99
4824.00	32.15	AV	V	2.45	34.60	54	-19.40
Middle Channel 2437MHz							
4874.00	48.05	PK	H	2.56	50.61	74	-23.39
4874.00	31.47	AV	H	2.56	34.03	54	-19.97
4874.00	48.28	PK	V	2.56	50.84	74	-23.16
4874.00	31.69	AV	V	2.56	34.25	54	-19.75
High Channel 2462MHz							
2483.70	64.85	PK	H	-3.17	61.68	74	-12.32
2483.70	41.24	AV	H	-3.17	38.07	54	-15.93
2487.05	64.31	PK	V	-3.17	61.14	74	-12.86
2487.05	41.08	AV	V	-3.17	37.91	54	-16.09
4924.00	47.73	PK	H	2.63	50.36	74	-23.64
4924.00	31.08	AV	H	2.63	33.71	54	-20.29
4924.00	47.94	PK	V	2.63	50.57	74	-23.43
4924.00	31.32	AV	V	2.63	33.95	54	-20.05

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11b							
ANT2							
Low Channel 2412MHz							
2388.21	64.41	PK	H	-2.93	61.48	74	-12.52
2388.21	40.35	AV	H	-2.93	37.42	54	-16.58
2386.34	66.02	PK	V	-2.93	63.09	74	-10.91
2386.34	40.64	AV	V	-2.93	37.71	54	-16.29
4824.00	48.64	PK	H	2.45	51.09	74	-22.91
4824.00	33.02	AV	H	2.45	35.47	54	-18.53
4824.00	48.87	PK	V	2.45	51.32	74	-22.68
4824.00	33.29	AV	V	2.45	35.74	54	-18.26
Middle Channel 2437MHz							
4874.00	48.19	PK	H	2.56	50.75	74	-23.25
4874.00	32.24	AV	H	2.56	34.80	54	-19.20
4874.00	48.38	PK	V	2.56	50.94	74	-23.06
4874.00	32.45	AV	V	2.56	35.01	54	-18.99
High Channel 2462MHz							
2483.96	71.09	PK	H	-3.17	67.92	74	-6.08
2483.96	42.16	AV	H	-3.17	38.99	54	-15.01
2483.75	72.57	PK	V	-3.17	69.40	74	-4.60
2483.75	42.32	AV	V	-3.17	39.15	54	-14.85
4924.00	47.52	PK	H	2.63	50.15	74	-23.85
4924.00	31.48	AV	H	2.63	34.11	54	-19.89
4924.00	47.71	PK	V	2.63	50.34	74	-23.66
4924.00	31.69	AV	V	2.63	34.32	54	-19.68

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11g							
ANT1							
Low Channel 2412MHz							
2389.63	55.54	PK	H	-2.93	52.61	74	-21.39
2389.63	41.48	AV	H	-2.93	38.55	54	-15.45
2389.25	55.31	PK	V	-2.93	52.38	74	-21.62
2389.25	41.29	AV	V	-2.93	38.36	54	-15.64
4824.00	47.39	PK	H	2.45	49.84	74	-24.16
4824.00	32.58	AV	H	2.45	35.03	54	-18.97
4824.00	47.62	PK	V	2.45	50.07	74	-23.93
4824.00	32.74	AV	V	2.45	35.19	54	-18.81
Middle Channel 2437MHz							
4874.00	47.04	PK	H	2.56	49.60	74	-24.40
4874.00	32.45	AV	H	2.56	35.01	54	-18.99
4874.00	47.26	PK	V	2.56	49.82	74	-24.18
4874.00	32.59	AV	V	2.56	35.15	54	-18.85
High Channel 2462MHz							
2483.69	57.37	PK	H	-3.17	54.20	74	-19.80
2483.69	42.13	AV	H	-3.17	38.96	54	-15.04
2483.84	57.08	PK	V	-3.17	53.91	74	-20.09
2483.84	41.96	AV	V	-3.17	38.79	54	-15.21
4924.00	46.67	PK	H	2.63	49.30	74	-24.70
4924.00	32.31	AV	H	2.63	34.94	54	-19.06
4924.00	46.88	PK	V	2.63	49.51	74	-24.49
4924.00	32.43	AV	V	2.63	35.06	54	-18.94

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11g							
ANT2							
Low Channel 2412MHz							
2389.71	55.42	PK	H	-2.93	52.49	74	-21.51
2389.71	41.57	AV	H	-2.93	38.64	54	-15.36
2389.24	55.68	PK	V	-2.93	52.75	74	-21.25
2389.24	41.76	AV	V	-2.93	38.83	54	-15.17
4824.00	47.45	PK	H	2.45	49.90	74	-24.10
4824.00	32.59	AV	H	2.45	35.04	54	-18.96
4824.00	47.68	PK	V	2.45	50.13	74	-23.87
4824.00	32.77	AV	V	2.45	35.22	54	-18.78
Middle Channel 2437MHz							
4874.00	47.15	PK	H	2.56	49.71	74	-24.29
4874.00	32.38	AV	H	2.56	34.94	54	-19.06
4874.00	47.34	PK	V	2.56	49.90	74	-24.10
4874.00	32.56	AV	V	2.56	35.12	54	-18.88
High Channel 2462MHz							
2483.80	57.74	PK	H	-3.17	54.57	74	-19.43
2483.80	43.91	AV	H	-3.17	40.74	54	-13.26
2483.65	57.45	PK	V	-3.17	54.28	74	-19.72
2483.65	43.69	AV	V	-3.17	40.52	54	-13.48
4924.00	46.76	PK	H	2.63	49.39	74	-24.61
4924.00	32.24	AV	H	2.63	34.87	54	-19.13
4924.00	46.92	PK	V	2.63	49.55	74	-24.45
4924.00	32.39	AV	V	2.63	35.02	54	-18.98

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11n20 MIMO							
Low Channel 2412MHz							
2389.94	55.87	PK	H	-2.93	52.94	74	-21.06
2389.94	41.75	AV	H	-2.93	38.82	54	-15.18
2389.83	55.64	PK	V	-2.93	52.71	74	-21.29
2389.83	41.56	AV	V	-2.93	38.63	54	-15.37
4824.00	47.31	PK	H	2.45	49.76	74	-24.24
4824.00	32.62	AV	H	2.45	35.07	54	-18.93
4824.00	47.53	PK	V	2.45	49.98	74	-24.02
4824.00	32.79	AV	V	2.45	35.24	54	-18.76
Middle Channel 2437MHz							
4874.00	47.09	PK	H	2.56	49.65	74	-24.35
4874.00	32.38	AV	H	2.56	34.94	54	-19.06
4874.00	47.27	PK	V	2.56	49.83	74	-24.17
4874.00	32.55	AV	V	2.56	35.11	54	-18.89
High Channel 2462MHz							
2483.54	57.61	PK	H	-3.17	54.44	74	-19.56
2483.54	43.47	AV	H	-3.17	40.30	54	-13.70
2483.69	57.36	PK	V	-3.17	54.19	74	-19.81
2483.69	43.24	AV	V	-3.17	40.07	54	-13.93
4924.00	46.78	PK	H	2.63	49.41	74	-24.59
4924.00	32.25	AV	H	2.63	34.88	54	-19.12
4924.00	46.97	PK	V	2.63	49.60	74	-24.40
4924.00	32.42	AV	V	2.63	35.05	54	-18.95

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax20 MIMO							
Low Channel 2412MHz							
2389.08	56.26	PK	H	-2.93	53.33	74	-20.67
2389.08	42.37	AV	H	-2.93	39.44	54	-14.56
2389.55	56.01	PK	V	-2.93	53.08	74	-20.92
2389.55	42.14	AV	V	-2.93	39.21	54	-14.79
4824.00	47.52	PK	H	2.45	49.97	74	-24.03
4824.00	32.71	AV	H	2.45	35.16	54	-18.84
4824.00	47.68	PK	V	2.45	50.13	74	-23.87
4824.00	32.89	AV	V	2.45	35.34	54	-18.66
Middle Channel 2437MHz							
4874.00	47.21	PK	H	2.56	49.77	74	-24.23
4874.00	32.52	AV	H	2.56	35.08	54	-18.92
4874.00	47.40	PK	V	2.56	49.96	74	-24.04
4874.00	32.68	AV	V	2.56	35.24	54	-18.76
High Channel 2462MHz							
2483.51	63.56	PK	H	-3.17	60.39	74	-13.61
2483.51	46.64	AV	H	-3.17	43.47	54	-10.53
2483.64	62.29	PK	V	-3.17	59.12	74	-14.88
2483.64	46.07	AV	V	-3.17	42.90	54	-11.10
4924.00	46.93	PK	H	2.63	49.56	74	-24.44
4924.00	32.27	AV	H	2.63	34.90	54	-19.10
4924.00	47.14	PK	V	2.63	49.77	74	-24.23
4924.00	32.45	AV	V	2.63	35.08	54	-18.92

For Module YL43456

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11b							
Low Channel 2412MHz							
2389.68	54.84	PK	H	-2.93	51.91	74	-22.09
2389.68	42.15	AV	H	-2.93	39.22	54	-14.78
2389.25	54.63	PK	V	-2.93	51.70	74	-22.30
2389.25	41.91	AV	V	-2.93	38.98	54	-15.02
4824.00	53.12	PK	H	2.45	55.57	74	-18.43
4824.00	46.39	AV	H	2.45	48.84	54	-5.16
4824.00	52.65	PK	V	2.45	55.10	74	-18.90
4824.00	45.98	AV	V	2.45	48.43	54	-5.57
Middle Channel 2437MHz							
4874.00	52.25	PK	H	2.56	54.81	74	-19.19
4874.00	44.53	AV	H	2.56	47.09	54	-6.91
4874.00	51.72	PK	V	2.56	54.28	74	-19.72
4874.00	44.04	AV	V	2.56	46.60	54	-7.40
High Channel 2462MHz							
2483.83	55.39	PK	H	-3.17	52.22	74	-21.78
2483.83	43.02	AV	H	-3.17	39.85	54	-14.15
2483.71	55.18	PK	V	-3.17	52.01	74	-21.99
2483.71	42.77	AV	V	-3.17	39.60	54	-14.40
4924.00	51.34	PK	H	2.63	53.97	74	-20.03
4924.00	42.76	AV	H	2.63	45.39	54	-8.61
4924.00	50.87	PK	V	2.63	53.50	74	-20.50
4924.00	42.45	AV	V	2.63	45.08	54	-8.92

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11g							
Low Channel 2412MHz							
2389.83	68.44	PK	H	-2.93	65.51	74	-8.49
2389.83	51.26	AV	H	-2.93	48.33	54	-5.67
2389.56	67.07	PK	V	-2.93	64.14	74	-9.86
2389.56	50.89	AV	V	-2.93	47.96	54	-6.04
4824.00	53.28	PK	H	2.45	55.73	74	-18.27
4824.00	37.89	AV	H	2.45	40.34	54	-13.66
4824.00	52.67	PK	V	2.45	55.12	74	-18.88
4824.00	37.36	AV	V	2.45	39.81	54	-14.19
Middle Channel 2437MHz							
4874.00	51.96	PK	H	2.56	54.52	74	-19.48
4874.00	37.17	AV	H	2.56	39.73	54	-14.27
4874.00	51.32	PK	V	2.56	53.88	74	-20.12
4874.00	36.45	AV	V	2.56	39.01	54	-14.99
High Channel 2462MHz							
2483.54	65.16	PK	H	-3.17	61.99	74	-12.01
2483.54	46.72	AV	H	-3.17	43.55	54	-10.45
2483.77	64.04	PK	V	-3.17	60.87	74	-13.13
2483.77	46.25	AV	V	-3.17	43.08	54	-10.92
4924.00	50.75	PK	H	2.63	53.38	74	-20.62
4924.00	36.51	AV	H	2.63	39.14	54	-14.86
4924.00	50.13	PK	V	2.63	52.76	74	-21.24
4924.00	36.04	AV	V	2.63	38.67	54	-15.33

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11n20							
Low Channel 2412MHz							
2389.94	68.91	PK	H	-2.93	65.98	74	-8.02
2389.94	49.78	AV	H	-2.93	46.85	54	-7.15
2389.83	67.52	PK	V	-2.93	64.59	74	-9.41
2389.83	49.27	AV	V	-2.93	46.34	54	-7.66
4824.00	53.86	PK	H	2.45	56.31	74	-17.69
4824.00	38.45	AV	H	2.45	40.90	54	-13.10
4824.00	53.23	PK	V	2.45	55.68	74	-18.32
4824.00	37.92	AV	V	2.45	40.37	54	-13.63
Middle Channel 2437MHz							
4874.00	52.22	PK	H	2.56	54.78	74	-19.22
4874.00	37.35	AV	H	2.56	39.91	54	-14.09
4874.00	51.76	PK	V	2.56	54.32	74	-19.68
4874.00	36.83	AV	V	2.56	39.39	54	-14.61
High Channel 2462MHz							
2483.91	69.01	PK	H	-3.17	65.84	74	-8.16
2483.91	47.68	AV	H	-3.17	44.51	54	-9.49
2483.68	67.96	PK	V	-3.17	64.79	74	-9.21
2483.68	47.12	AV	V	-3.17	43.95	54	-10.05
4924.00	50.64	PK	H	2.63	53.27	74	-20.73
4924.00	36.09	AV	H	2.63	38.72	54	-15.28
4924.00	50.11	PK	V	2.63	52.74	74	-21.26
4924.00	35.48	AV	V	2.63	38.11	54	-15.89

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


For module YL43752


Test plots for Band Edge Measurements (Radiated):

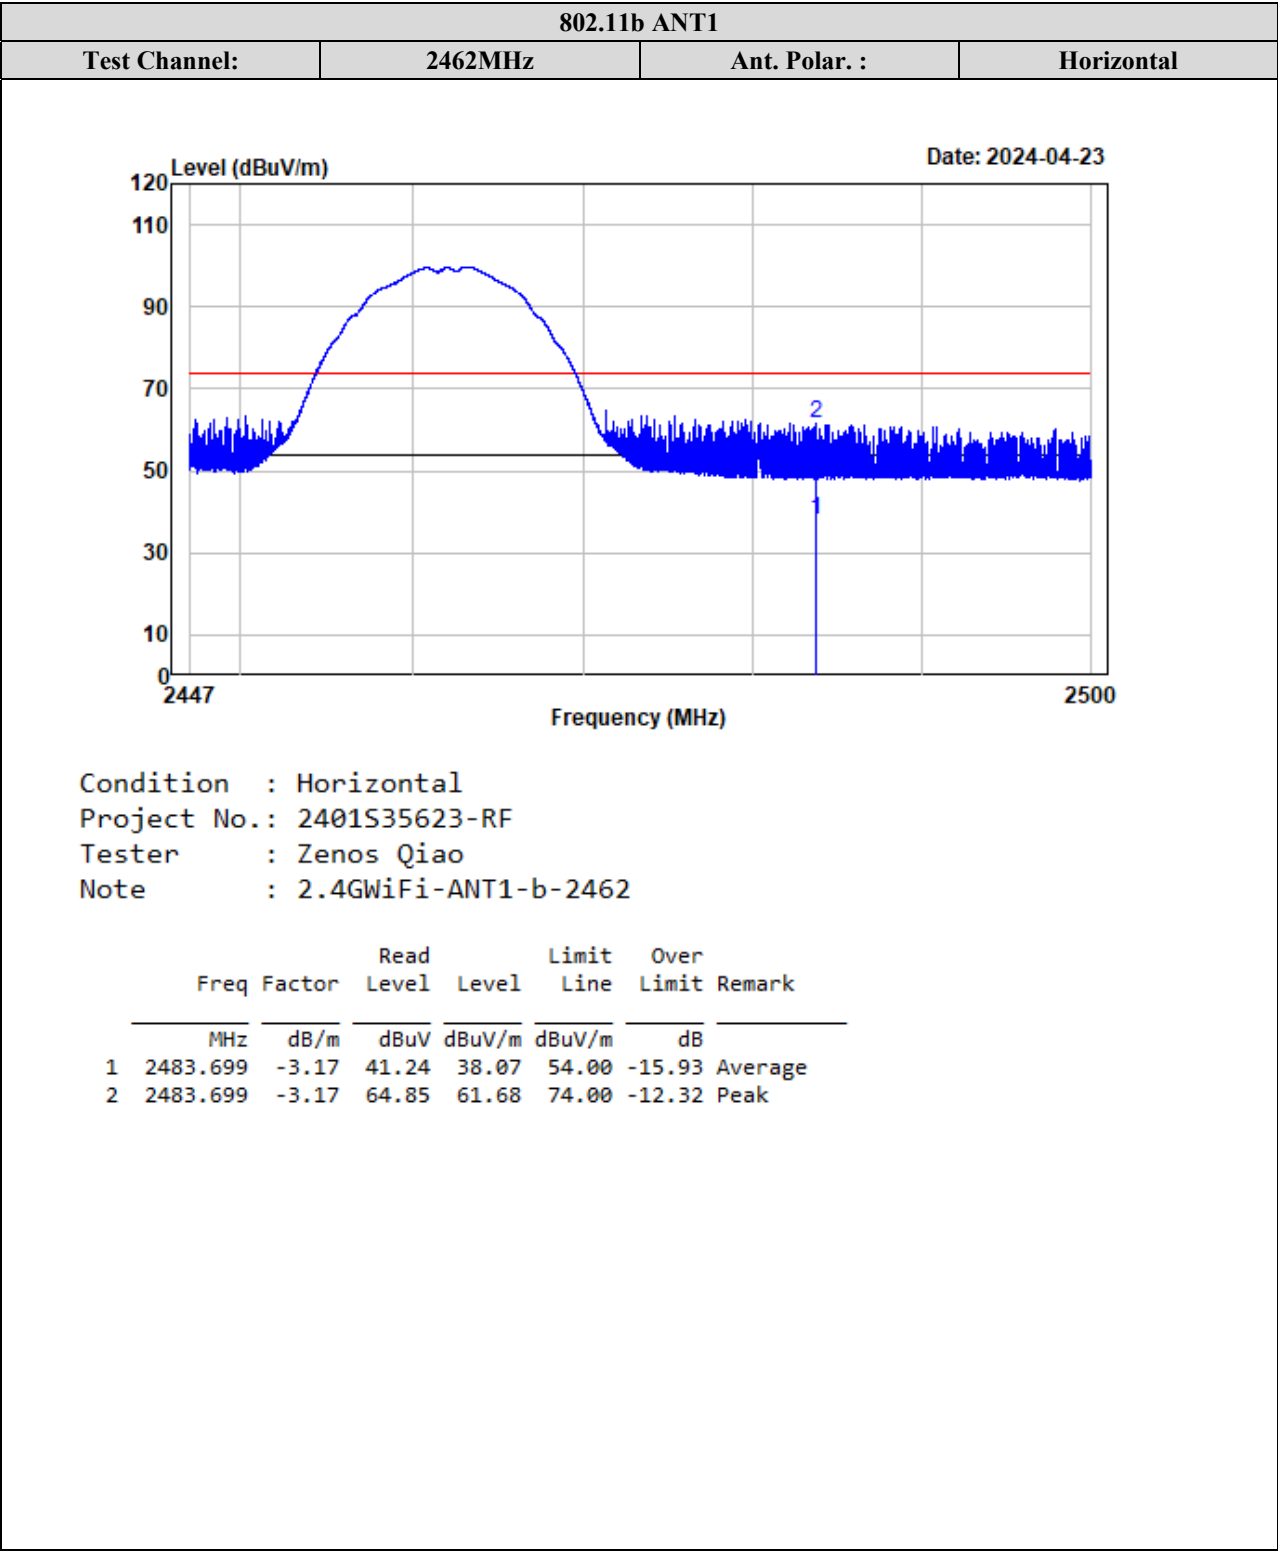


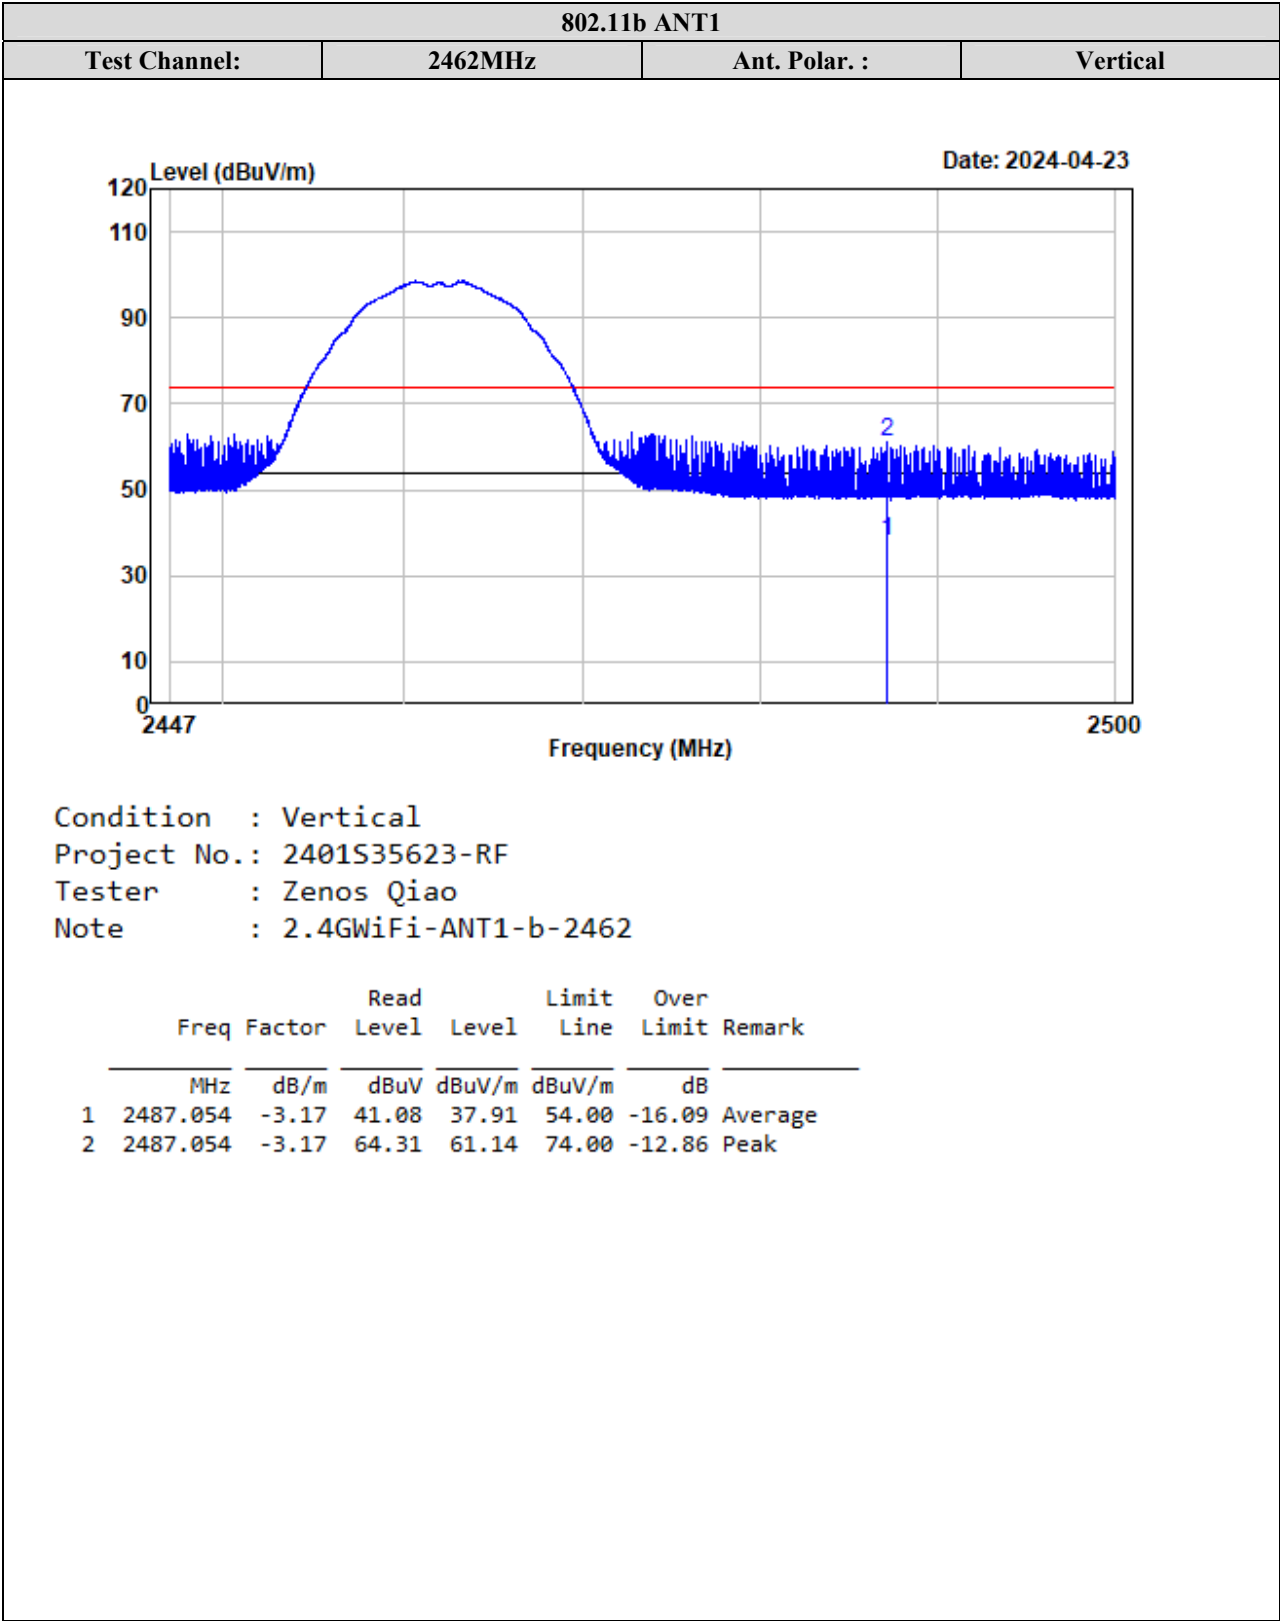



Test plots for Harmonic Measurements (Radiated):

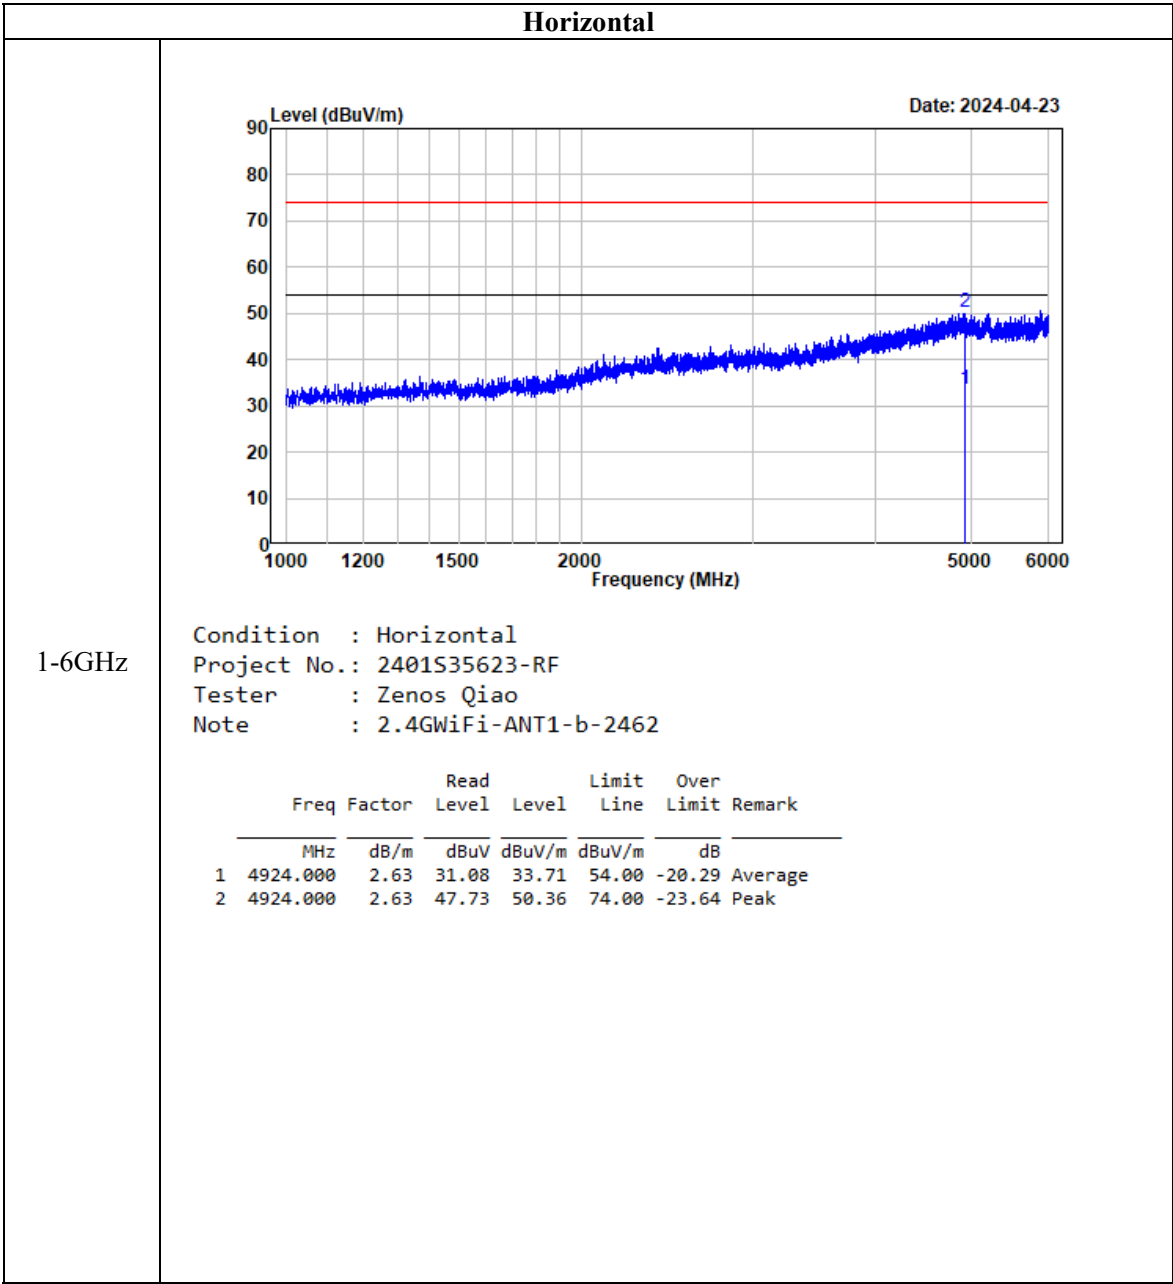


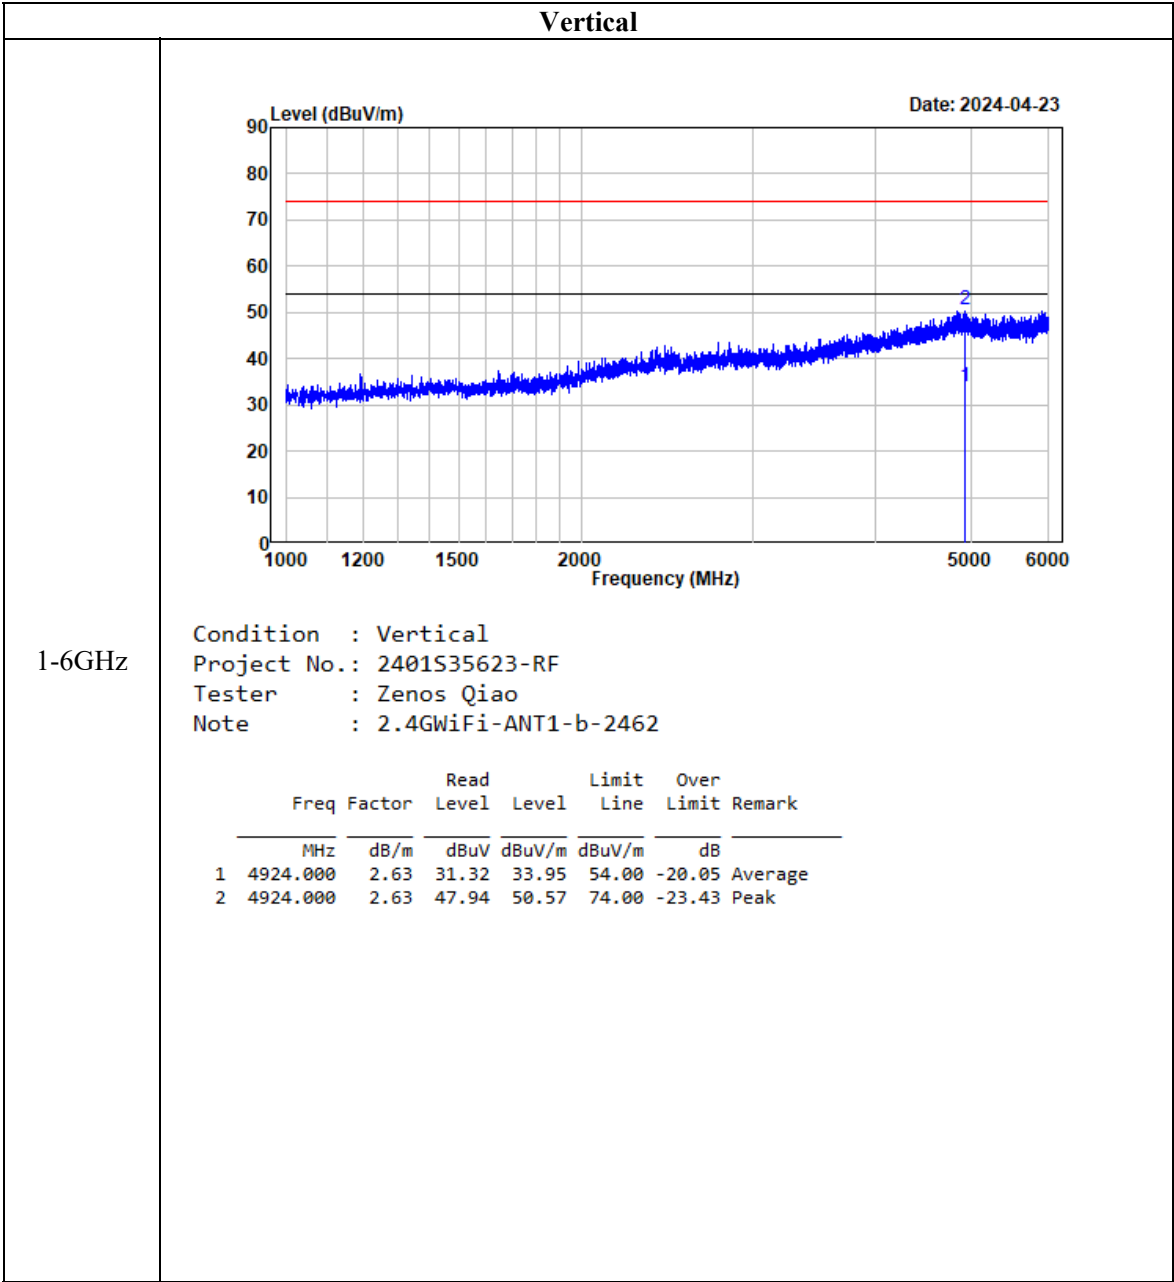

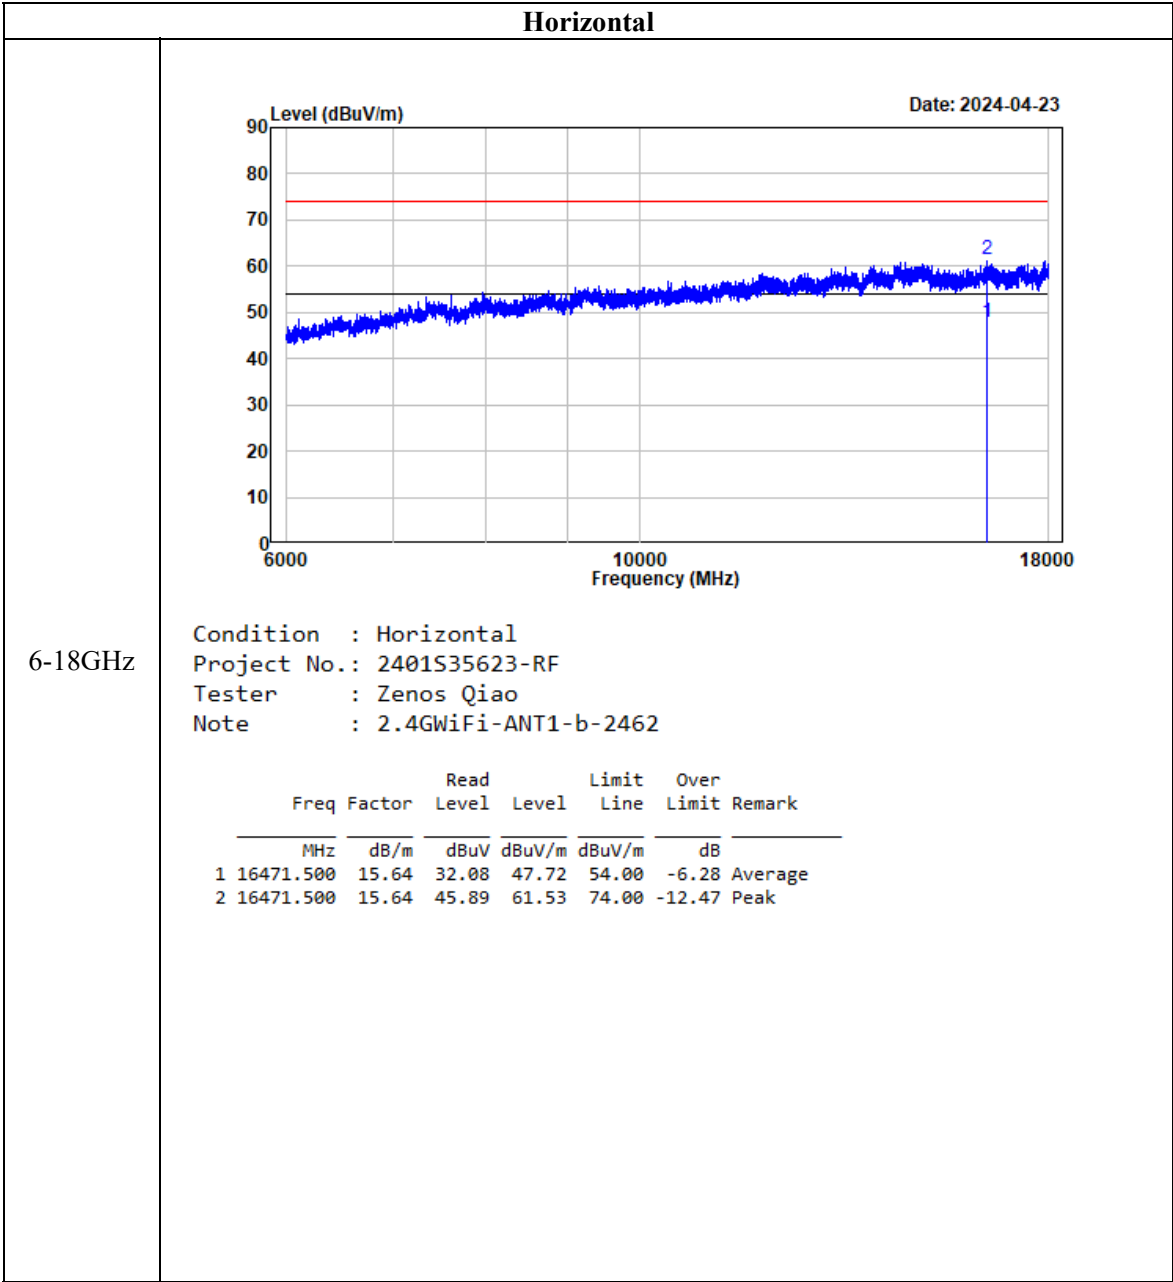

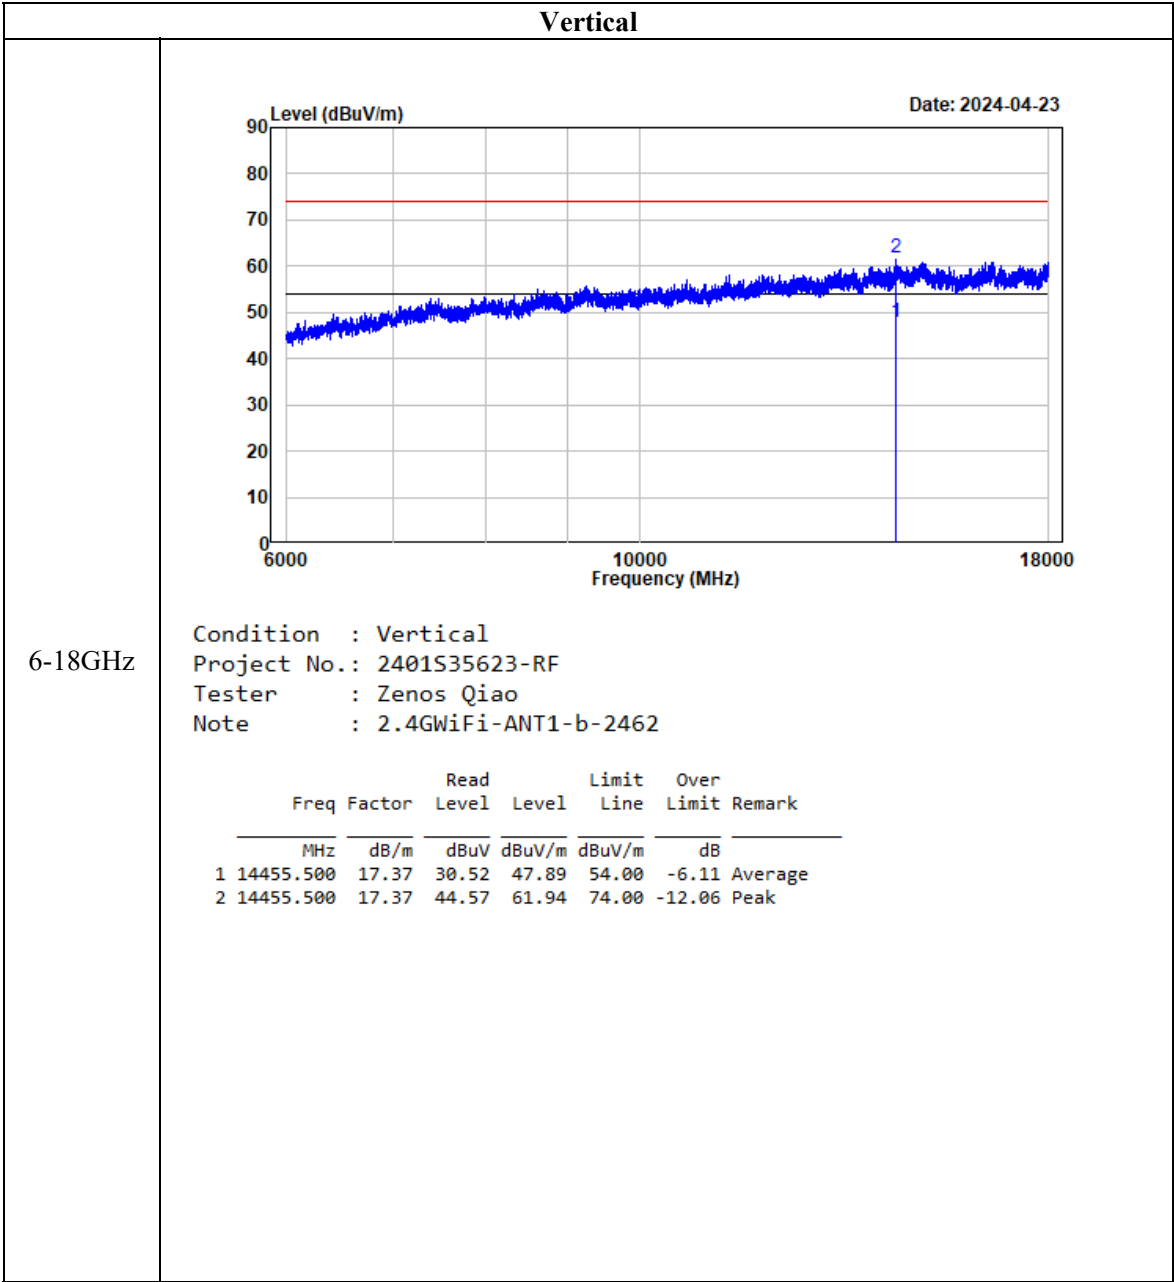


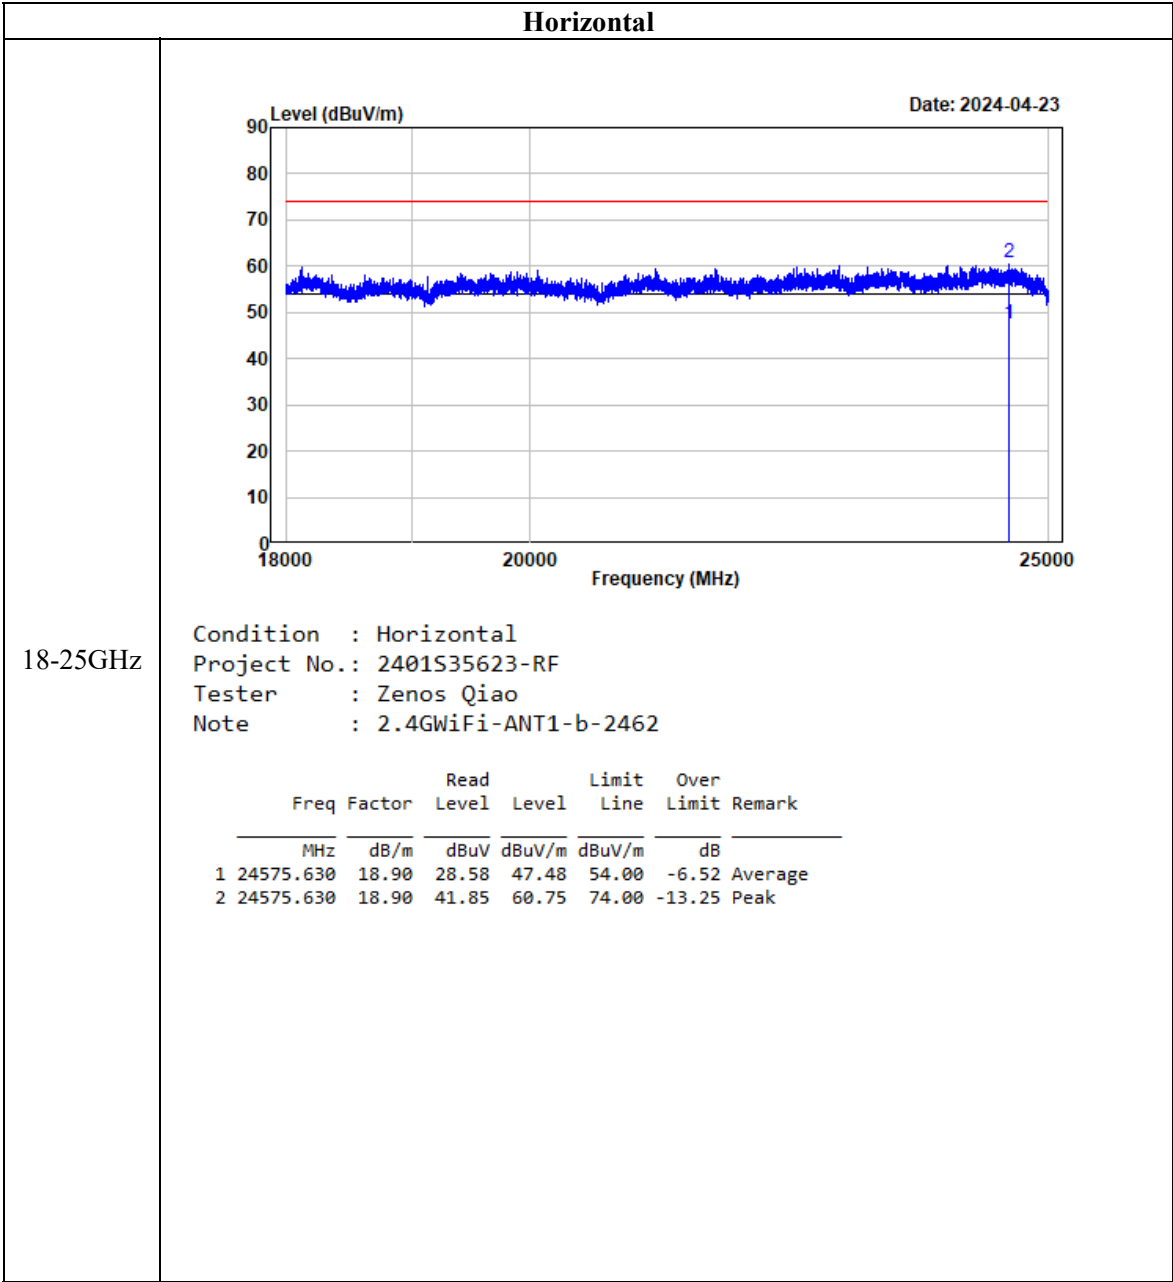


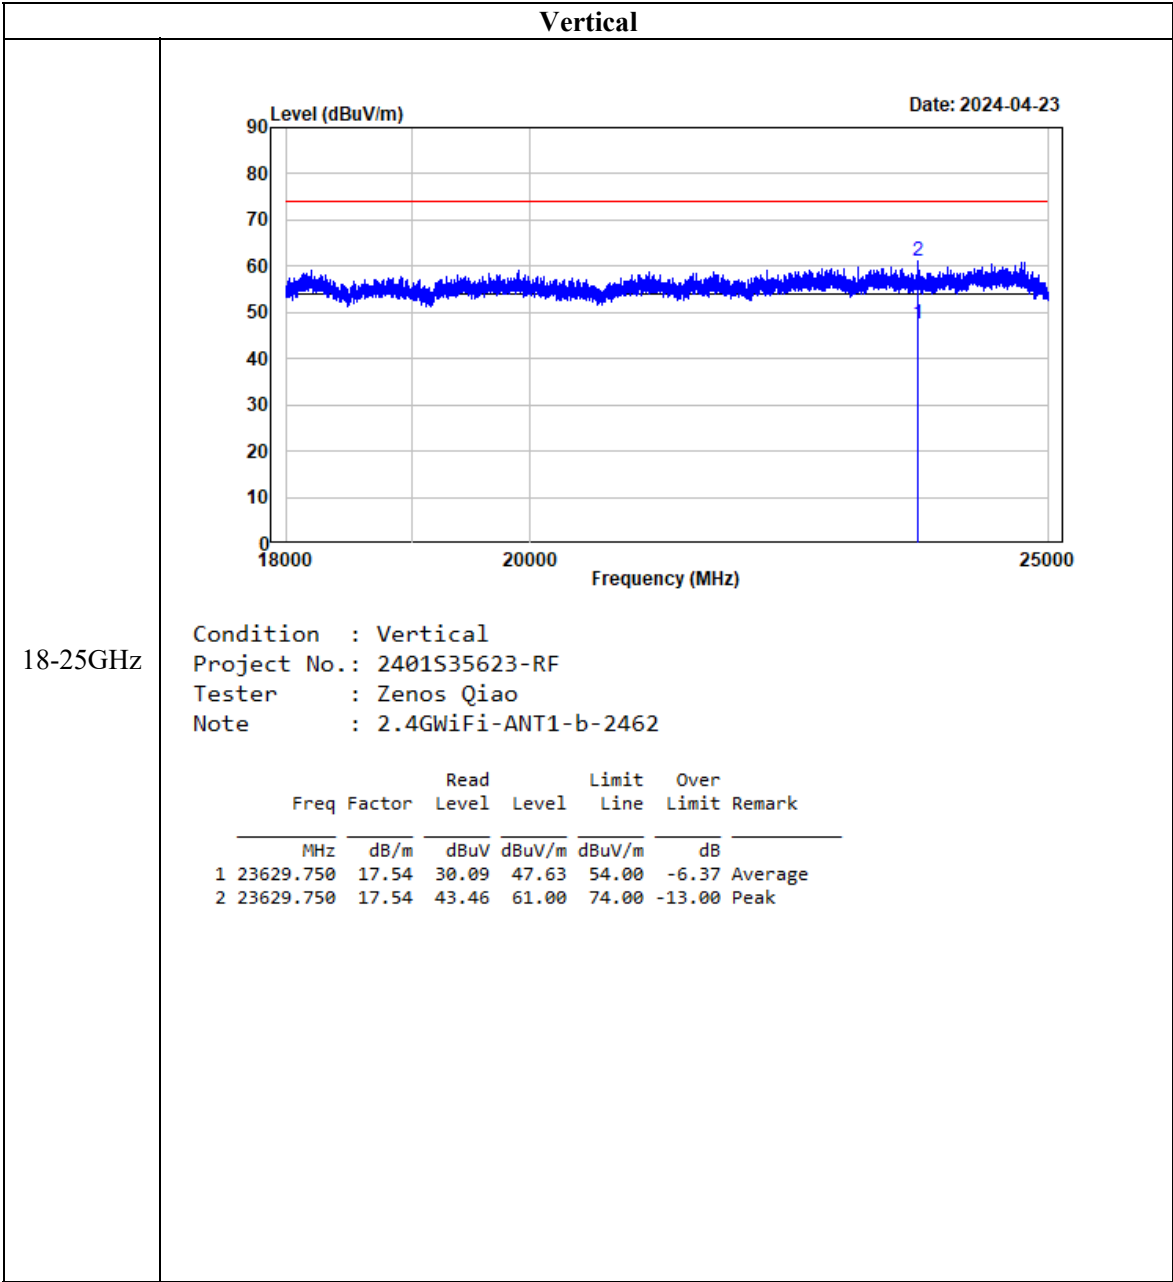


For module YL43456


Test plots for Band Edge Measurements (Radiated):

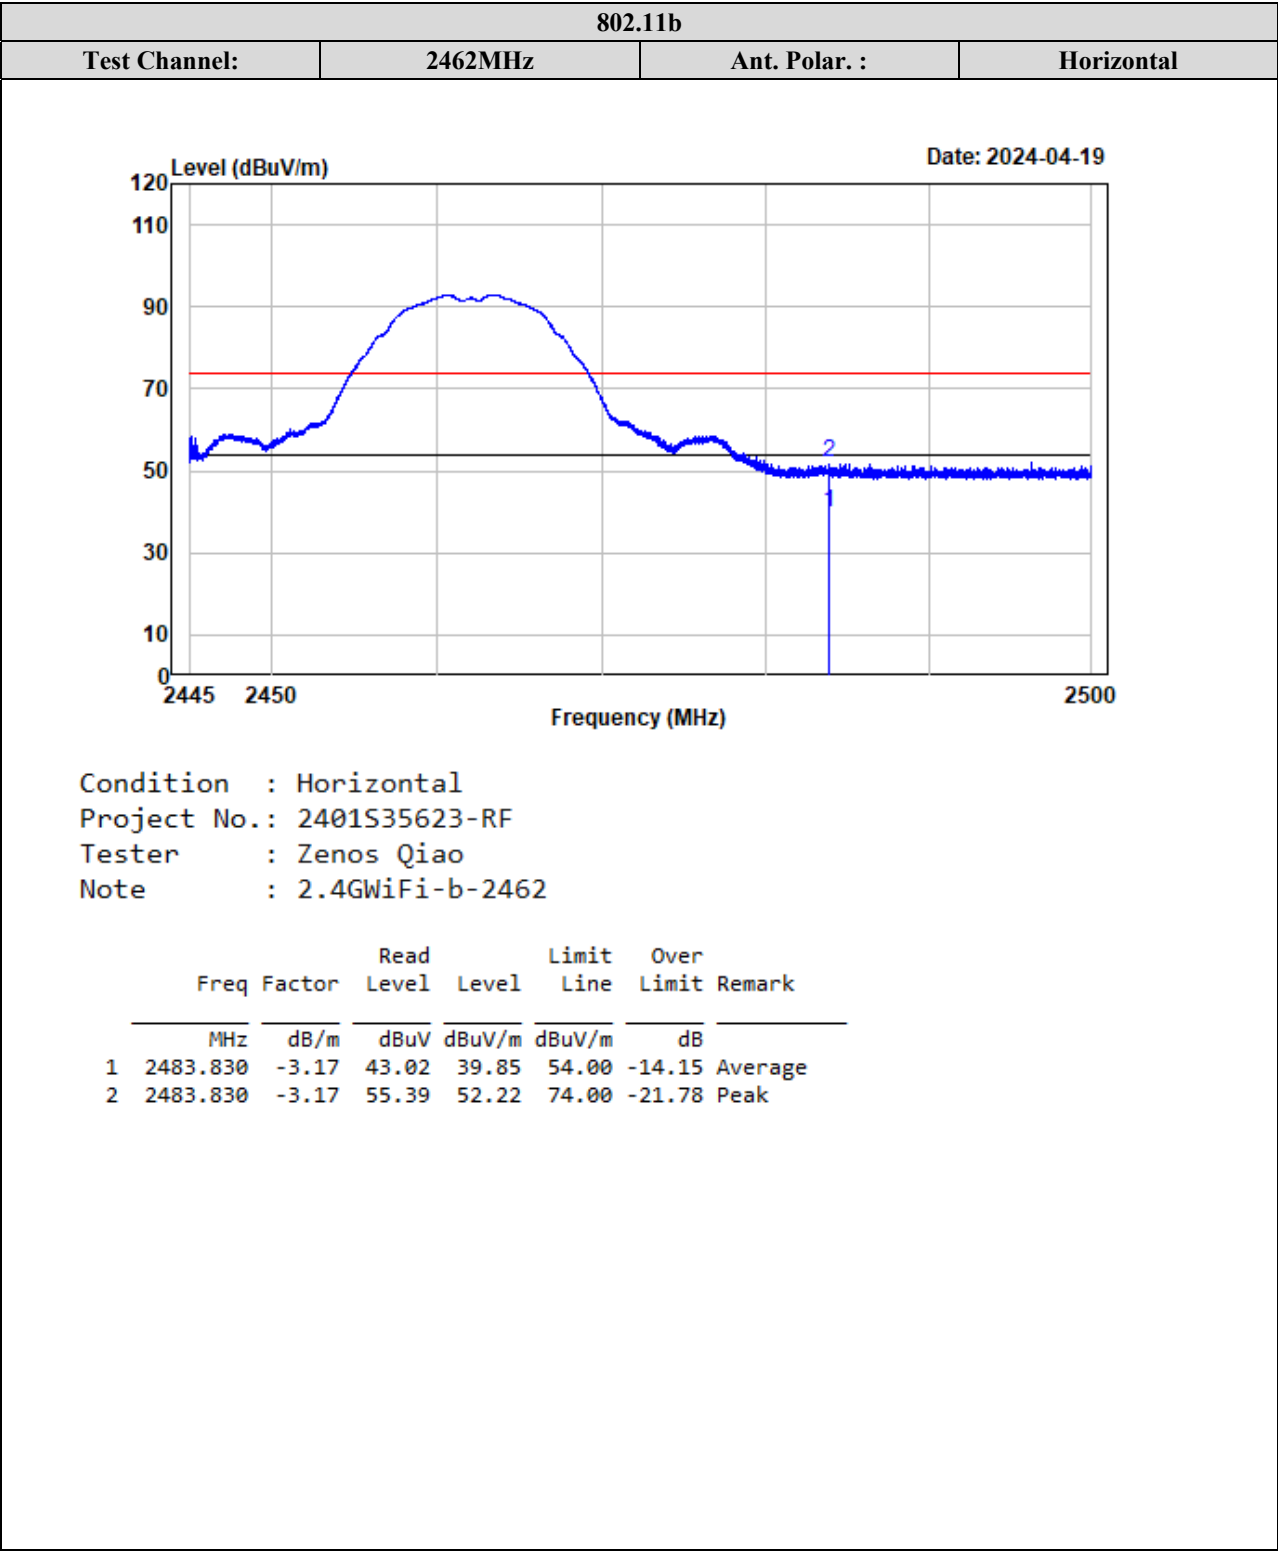


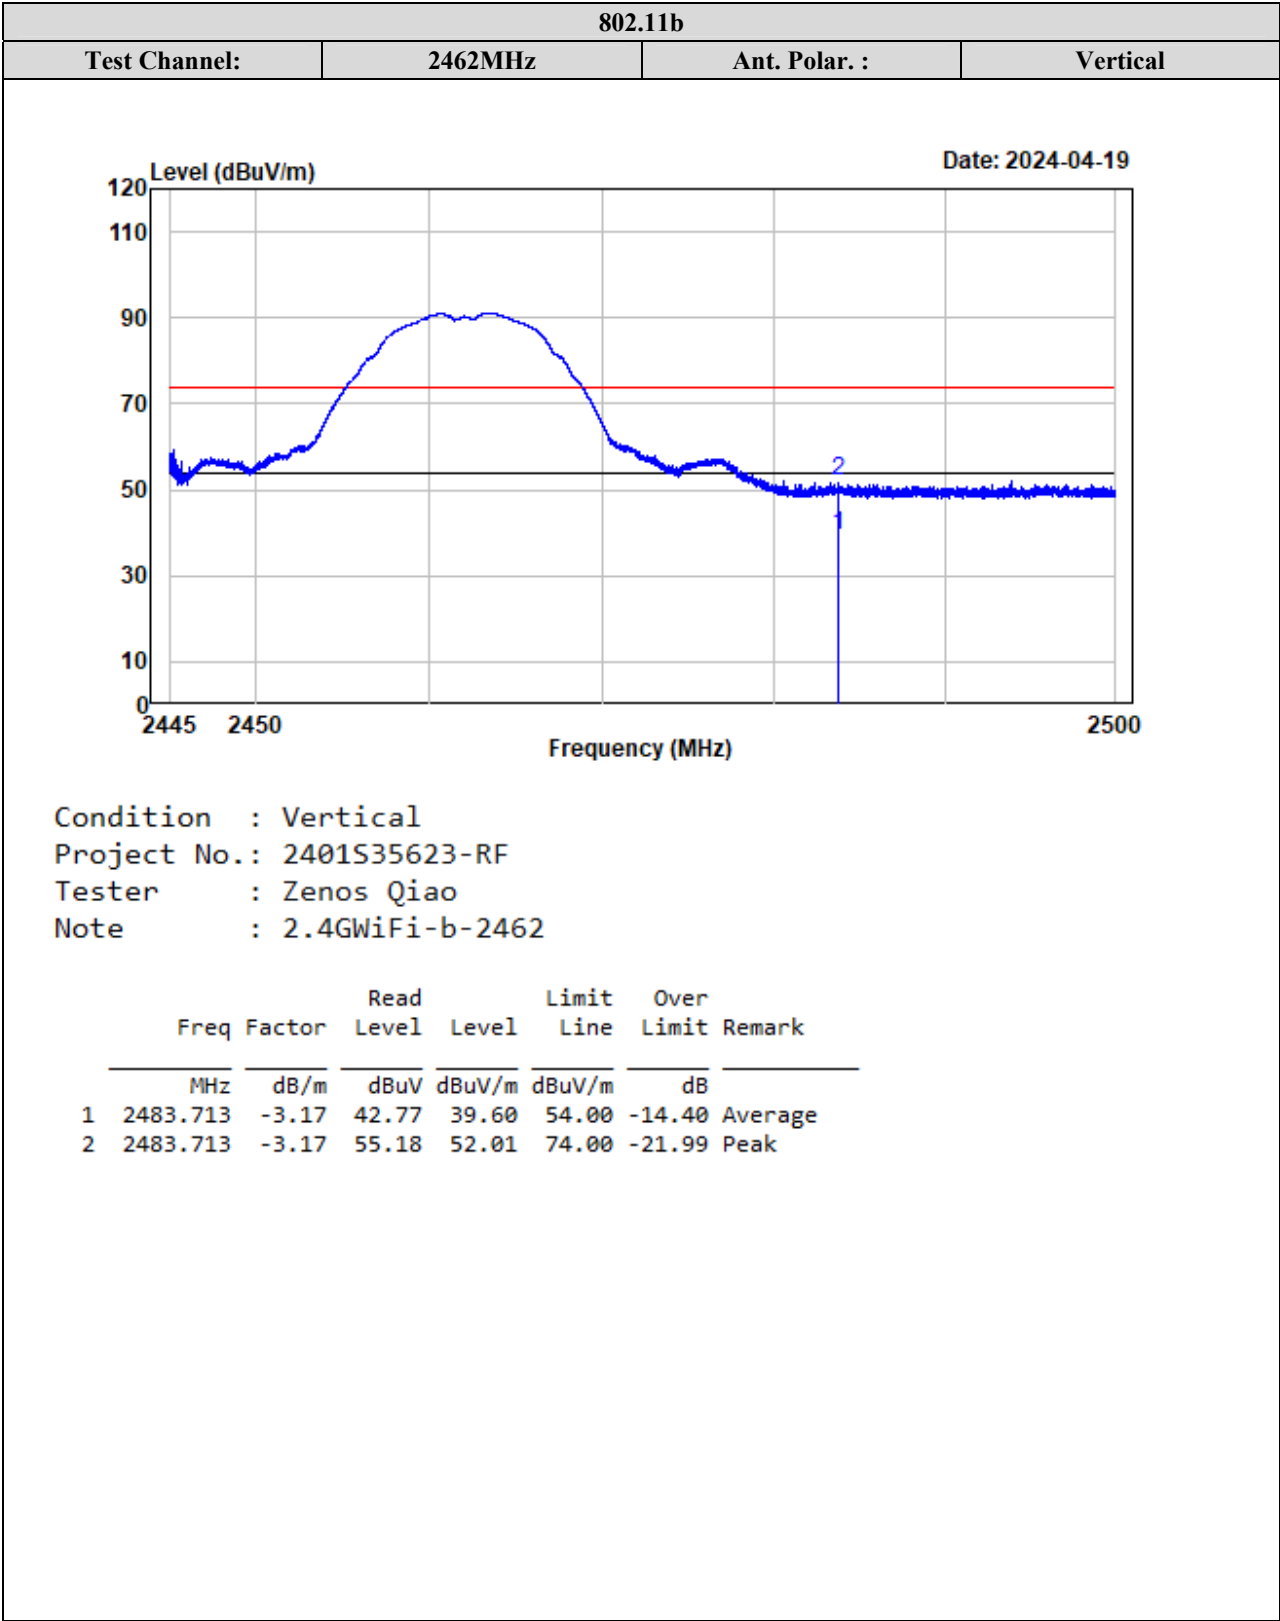



Test plots for Harmonic Measurements (Radiated):

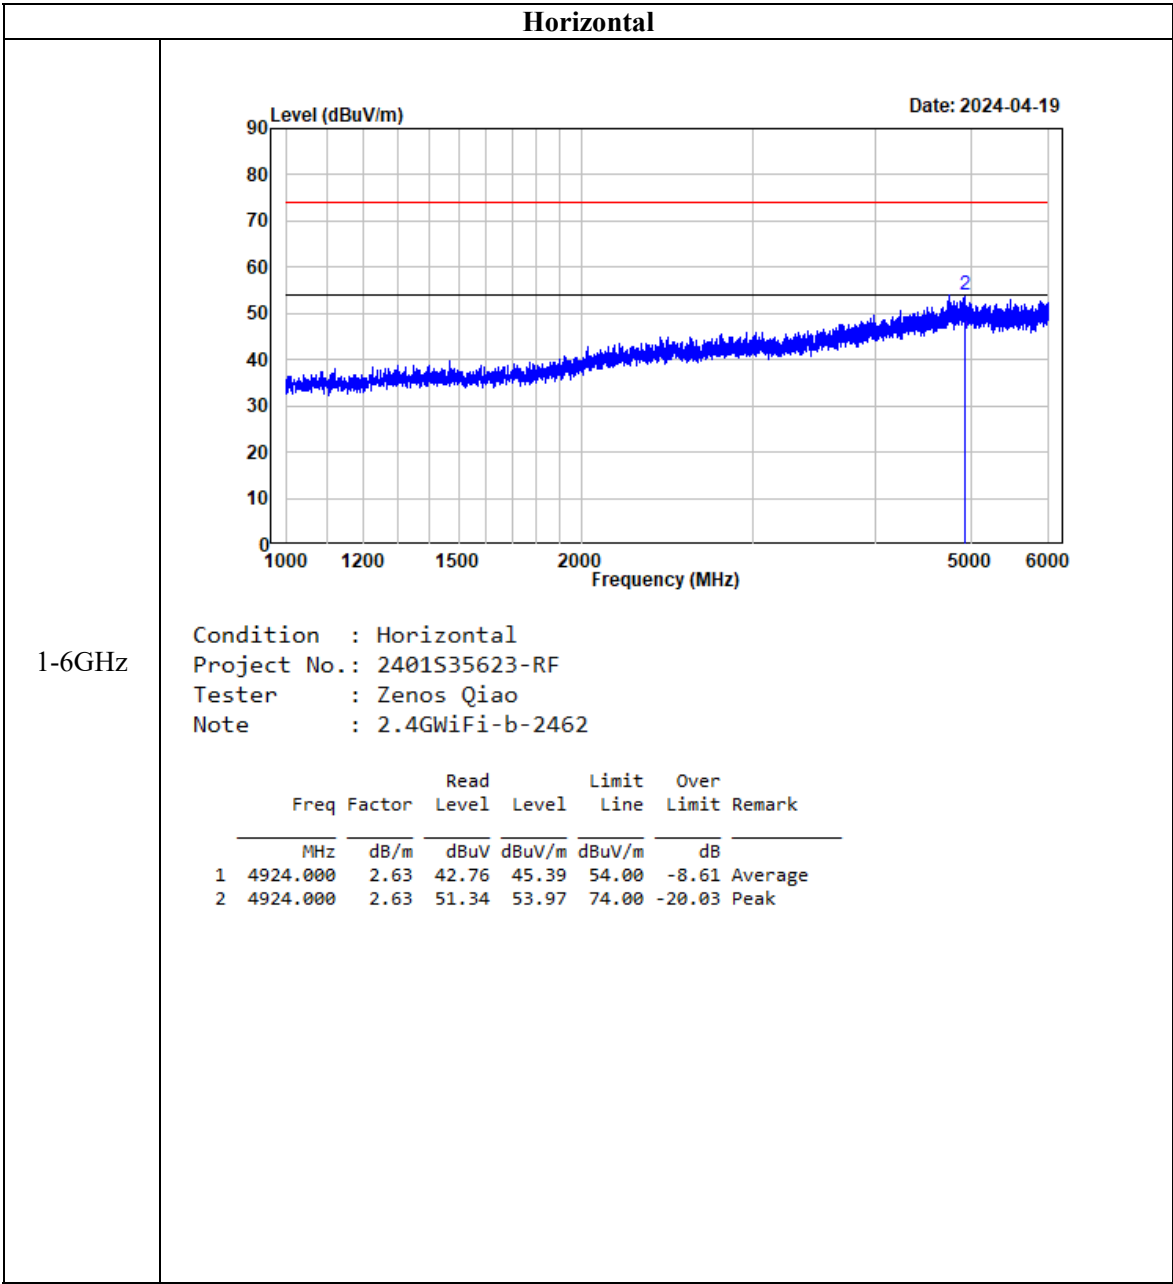


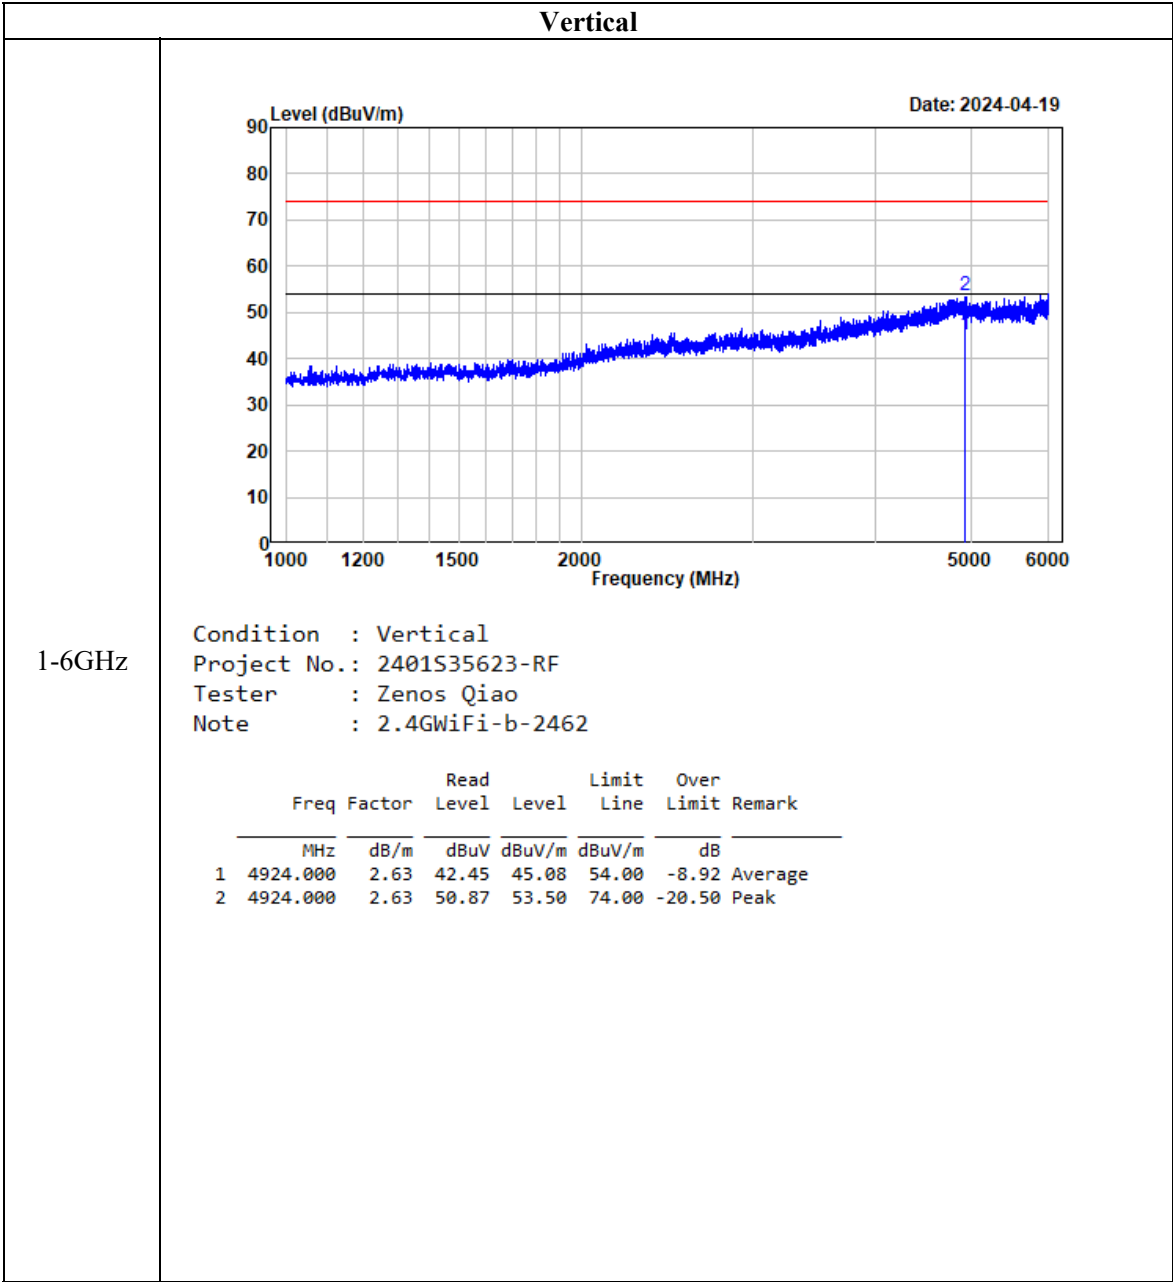

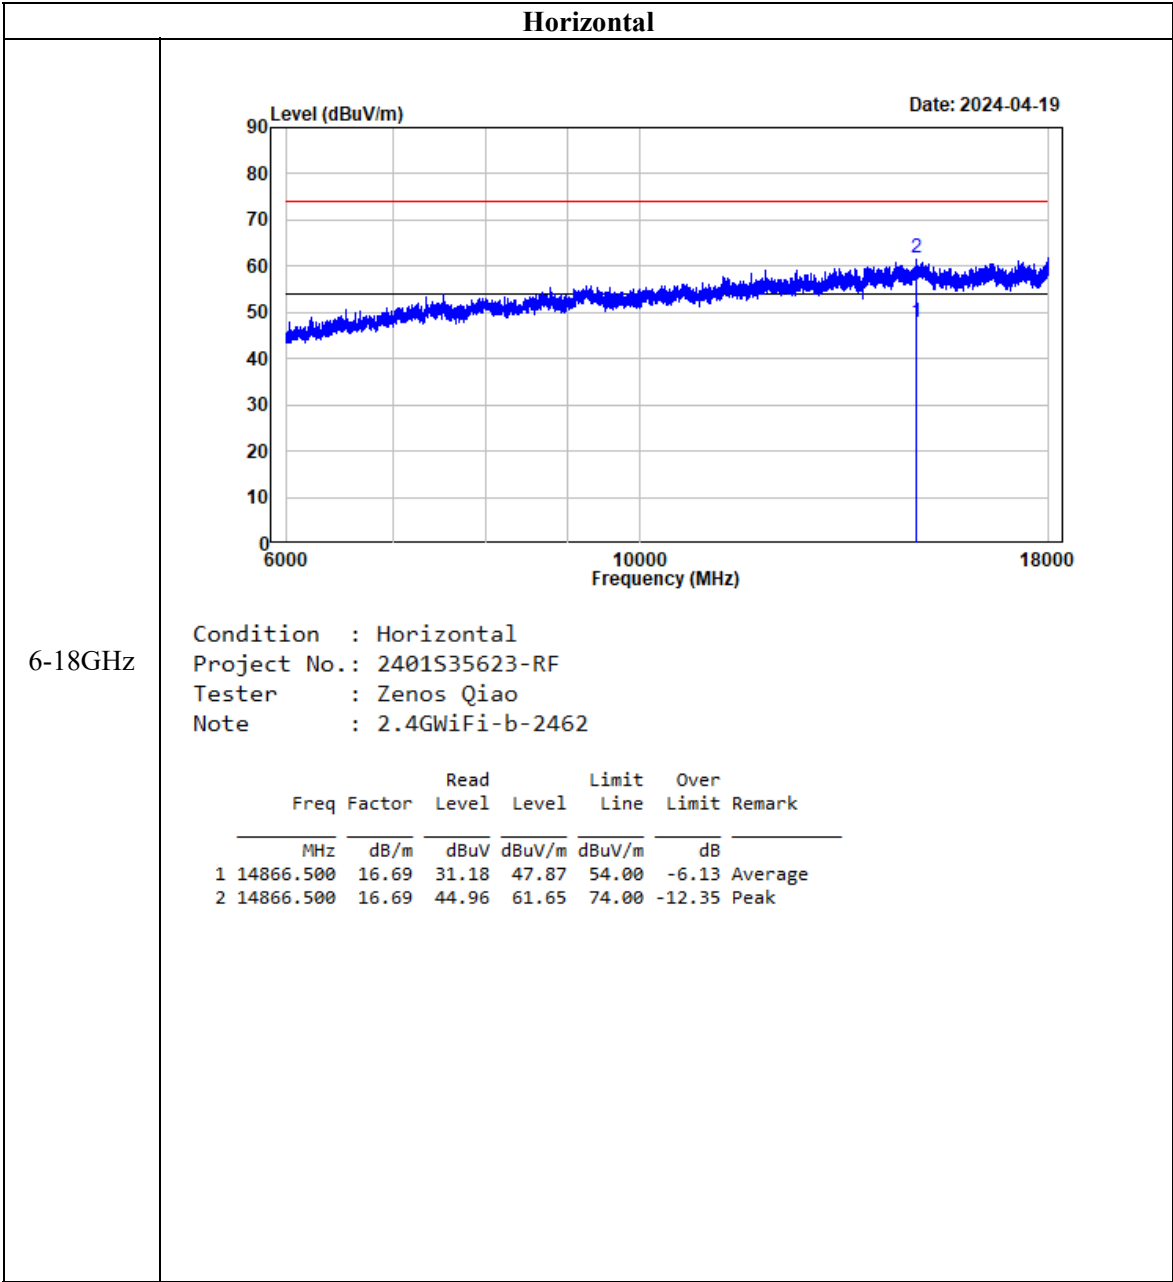

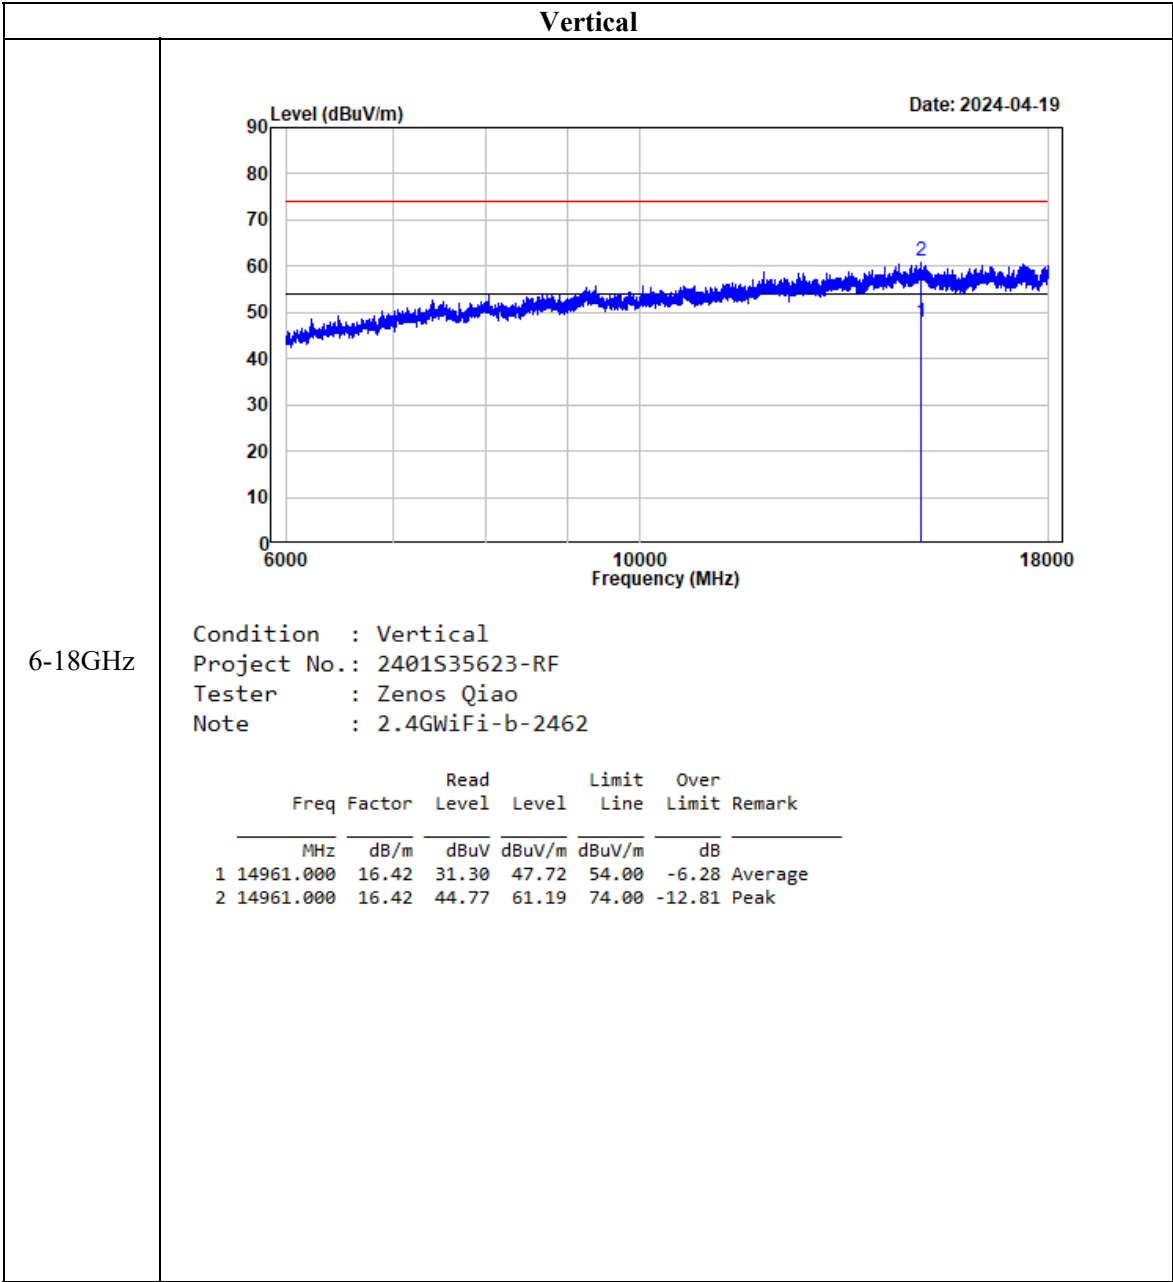

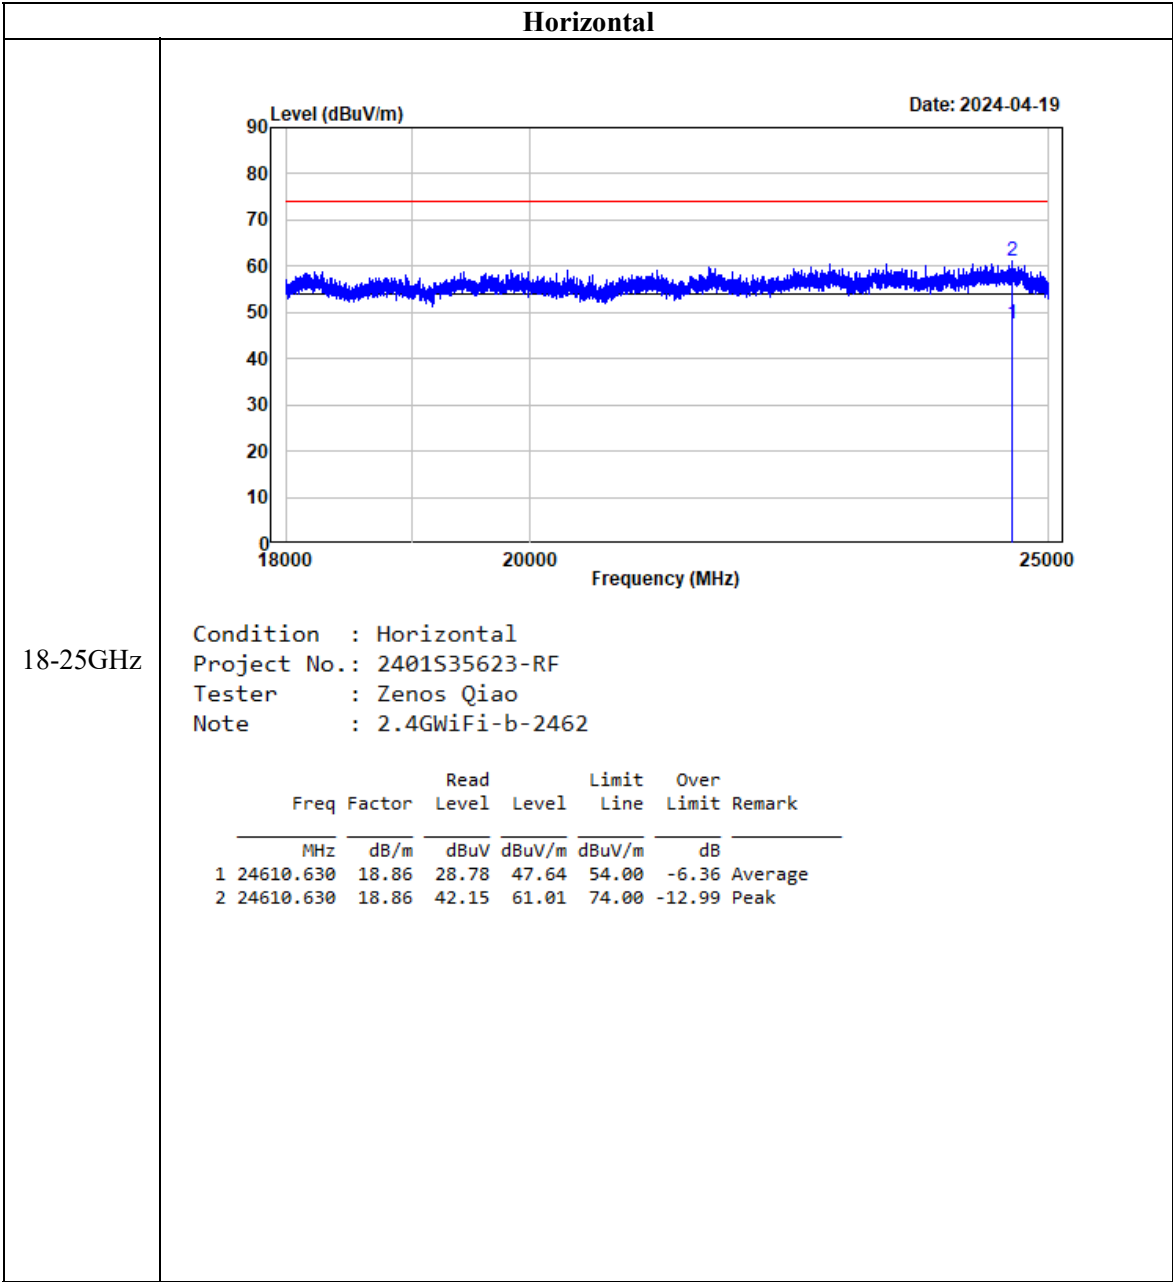

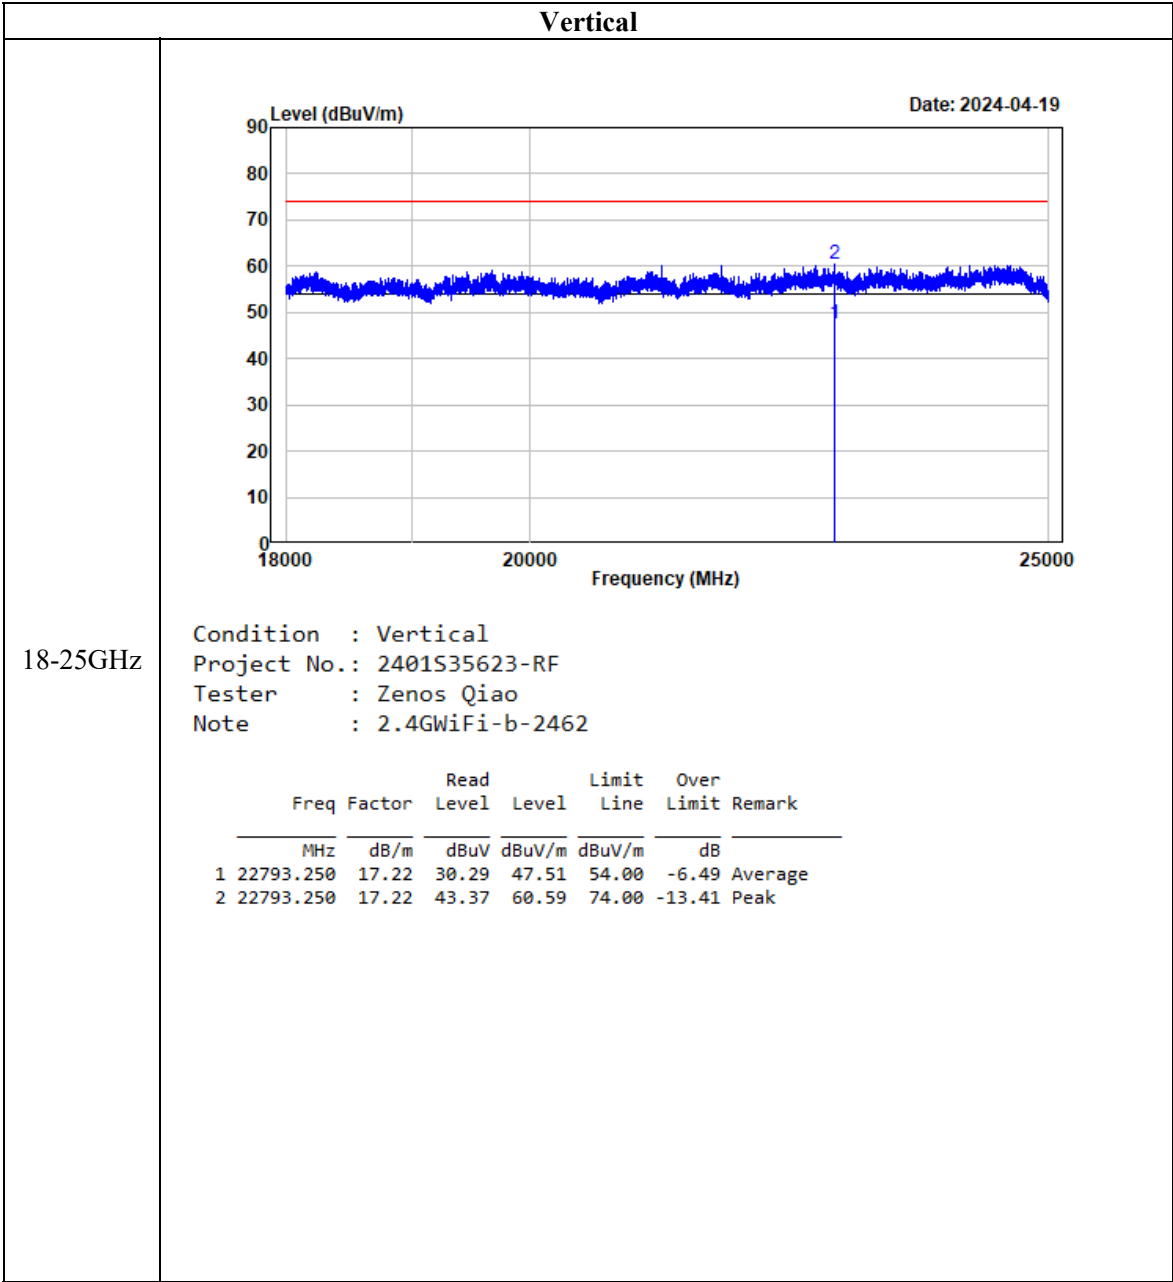

EUT PHOTOGRAPHS

Please refer to the attachment 2401S35623-RF External photo and 2401S35623-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401S35623-RFA Test Setup photo.

******* END OF REPORT *******