


Antenna Gain & Efficiency


Passive Test For D6										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)	Directivity (dBi)	Beamwidth (3dB)
2400	41.87	-3.78	1.71	-0.44	18.656	23.211	1.71	-14.45	5.49	0
2405	43.75	-3.59	1.79	-0.36	19.898	23.848	1.79	-14.25	5.38	0
2410	44.79	-3.49	1.77	-0.38	20.797	23.991	1.77	-13.9	5.26	0
2415	44.88	-3.48	1.67	-0.48	21.273	23.612	1.67	-13.67	5.15	0
2420	46.09	-3.36	1.71	-0.44	22.194	23.896	1.71	-13.25	5.08	0
2425	47.81	-3.21	1.81	-0.34	23.313	24.495	1.81	-12.74	5.02	0
2430	49.25	-3.08	1.93	-0.22	24.349	24.9	1.93	-12.13	5	0
2435	49.43	-3.06	1.91	-0.24	24.7	24.732	1.91	-11.81	4.97	0
2440	49.82	-3.03	1.95	-0.2	25.064	24.754	1.95	-11.61	4.98	0
2445	49.19	-3.08	1.9	-0.25	24.992	24.199	1.9	-11.45	4.98	0
2450	47.99	-3.19	1.76	-0.39	24.592	23.394	1.76	-11.37	4.95	0
2455	48.6	-3.13	1.79	-0.36	25.08	23.521	1.79	-11.28	4.92	0
2460	49.24	-3.08	1.82	-0.33	25.533	23.705	1.82	-11.09	4.9	0
2465	47.34	-3.25	1.63	-0.52	24.633	22.703	1.63	-11.13	4.88	0
2470	45.73	-3.4	1.44	-0.71	23.983	21.743	1.44	-11.25	4.84	0
2475	46.32	-3.34	1.45	-0.7	24.585	21.738	1.45	-10.95	4.79	0
2480	45.73	-3.4	1.38	-0.77	24.543	21.185	1.38	-10.9	4.78	0
2485	45.94	-3.38	1.42	-0.73	24.885	21.06	1.42	-10.73	4.8	0
2490	45.72	-3.4	1.32	-0.83	25.094	20.622	1.32	-10.64	4.72	0
2495	43.94	-3.57	1.08	-1.07	24.394	19.55	1.08	-11.01	4.65	90
2500	45.86	-3.39	1.15	-1	25.764	20.099	1.15	-10.86	4.53	90

Application Information	
Antenna model	V1.0
TotalTime	4m 18s 135ms
AdditionalInfor	NULL


2350.00MHz - 2550.00MHz Gain

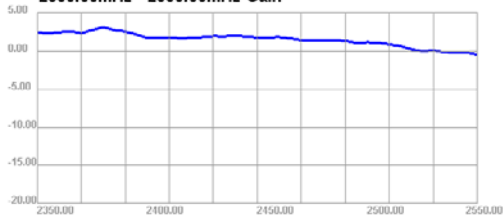


2350.00MHz - 2550.00MHz Efficiency

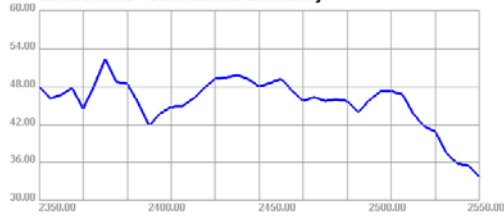

Dimension of Antenna

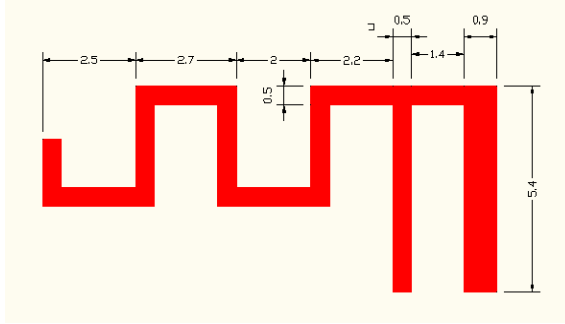

2D Test Pattern

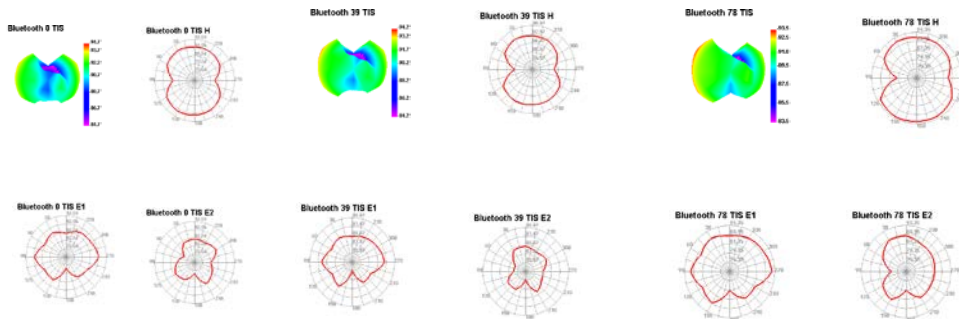

Antenna Manufacturer

Applicant:Qiaolian Electronics DongGuan co.,LTD
Address:Dongxing Industrial park, Qi shi Town, Dongguan City, Guangdong Prov. China