


FCC PART 15.247 TEST REPORT

For

Shenzhen Jingwah Information Technology Co., Ltd.

4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Shenzhen, China

FCC ID: RBD-M11550

Report Type: Original Report	Product Type: Tablet PC
Report Number: <u>RGMA181211001-00A</u>	
Report Date: <u>2019-01-22</u>	
Rocky Kang 	
Reviewed By:	<u>RF Engineer</u>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	11
TEST RESULT	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST RESULTS SUMMARY	20
TEST DATA	21
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	61
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST DATA	61
FCC §15.247(d) - BAND EDGES TESTING	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST DATA	62

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Tablet PC
Tested Model	M11550
Multiple Model [#]	ST11550
Frequency Range	2402-2480MHz
Transmit Power	7.81dBm
Modulation Technique	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification	1.55dBi
Voltage Range	DC 3.7 V battery or DC5.0V from Adapter
Date of Test	2018-12-14 to 2019-01-16
Sample serial number	181211001
Received date	2018-12-11
Sample/EUT Status	Good condition
Adapter Information	Model:TPA-46050200UU Input:100-240V,50/60Hz,0.3A Output:5.0V,2.0A

Notes: This series products model: ST11550 and M11550 are electrically identical, the differences between them is the model number. Model M11550 was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

Objective

This test report is prepared on behalf of *Shenzhen Jingwah Information Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part 15.247 DTS and Part 15.407 NII submissions with FCC ID: RBD-M11550.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3°C
Humidity		±6%
Supply voltages		±0.4%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

The system was configured for testing in an engineering mode.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/


External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter


Block Diagram of Test Setup

For conducted emission:

For Keyboard:

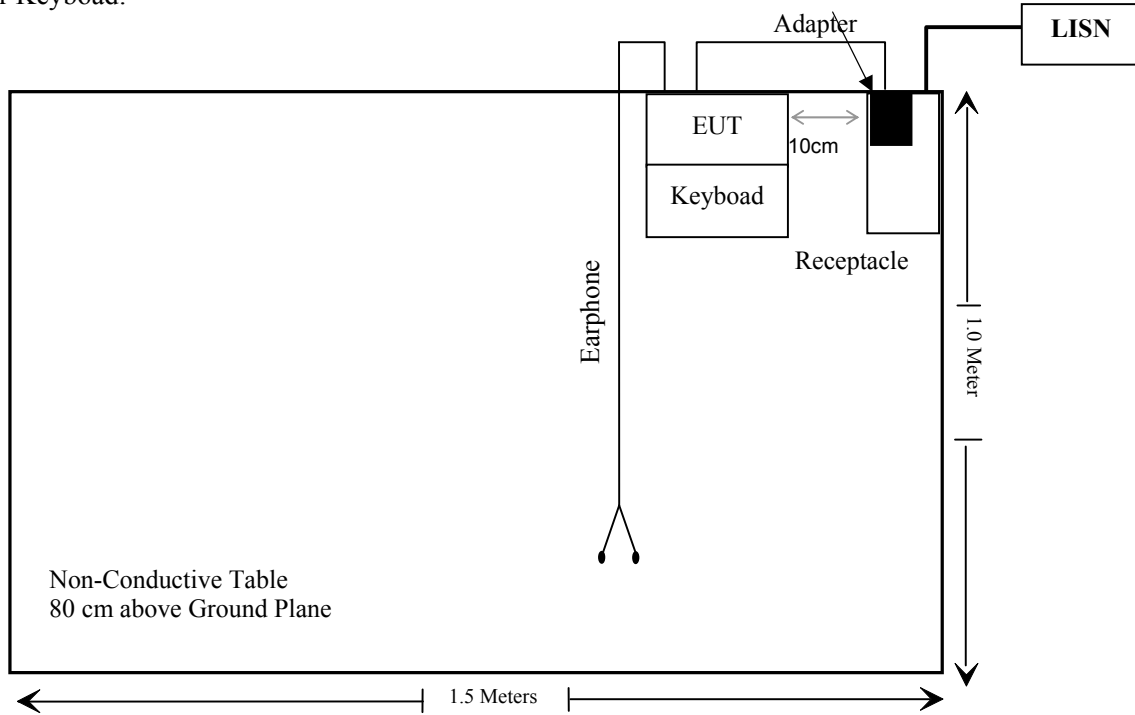

For Charger:

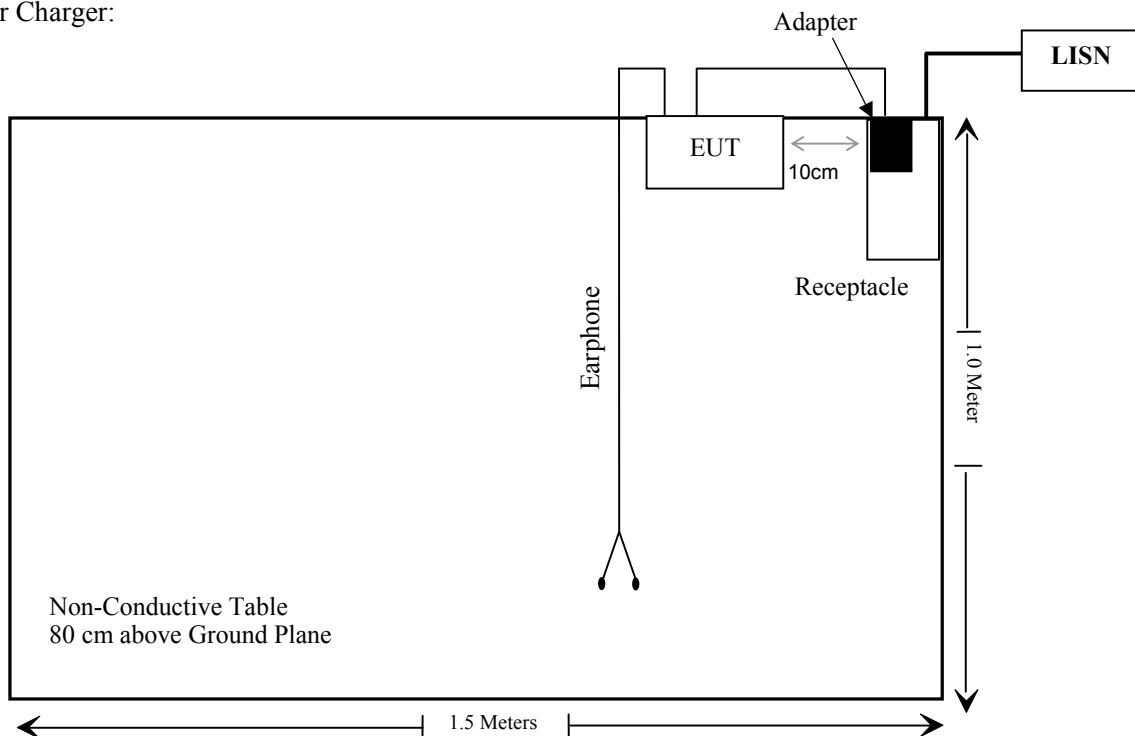

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2018-07-11	2019-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2017-12-21	2018-12-21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2018-11-21	2019-05-12
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Un-known	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-05-12
Radiated Emission Test					
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-06-23	2019-06-23
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-22	2019-05-22
Sonoma instrument	Amplifier	310N	186238	2018-11-12	2019-05-12
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
Ducommun technologies	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-08-01	2019-02-01
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-21	2019-05-21
Ducommun technologies	RF Cable	RG-214	1	2018-11-19	2019-05-21
Ducommun technologies	RF Cable	RG-214	2	2018-11-22	2019-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-08-01	2019-02-01
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	99632	2018-11-21	2019-05-21
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Agilent	USB wideband power meter	U2021XA	MY54250003	2018-06-23	2019-06-23
WEINSCHL	10dB Attenuator	5324	AU 3842	Each Time	
WEINSCHL	3dB Attenuator	N/A	2018004	Each Time	
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2017-12-24	2018-12-24
Ducommun technologies	RF Cable	RG-214	3	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RGMA190225001-20A

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 1.55 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2018-12-14.


EUT operation mode: Transmitting & charging (the worst case is 8DPSK Mode, High channel)

For keyboard:

AC 120V/60 Hz, Line

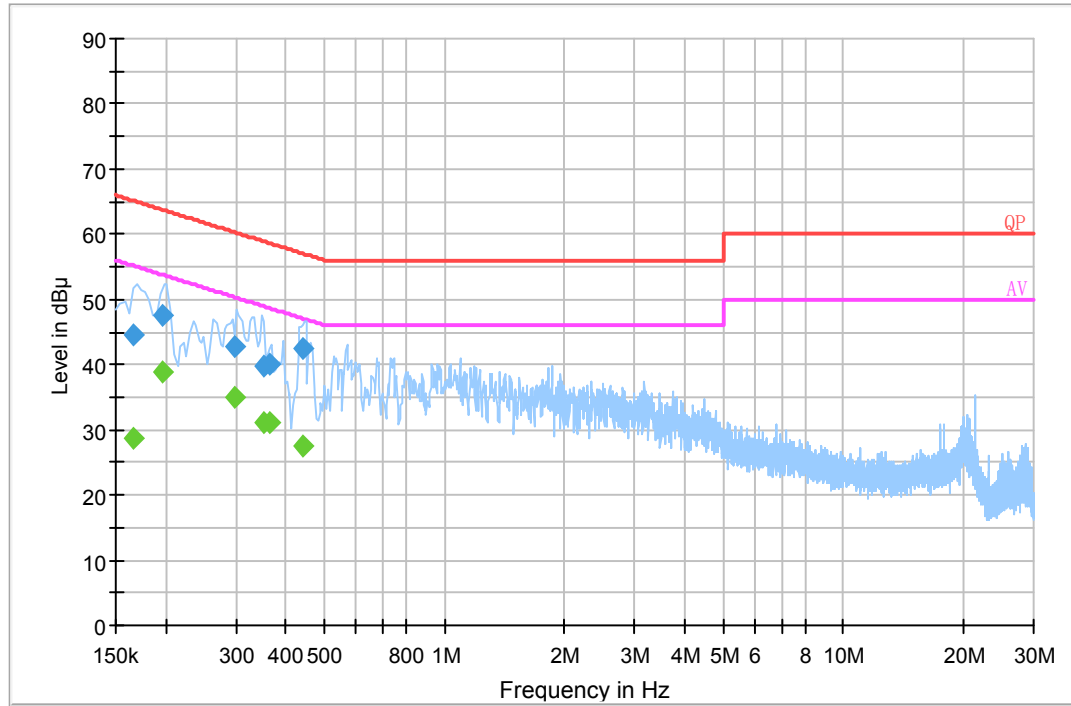


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.165500	44.5	19.8	65.2	20.7	QP
0.197500	47.6	19.8	63.7	16.1	QP
0.297470	42.6	19.8	60.3	17.7	QP
0.352690	39.9	19.7	58.9	19	QP
0.362750	40.0	19.7	58.9	18.9	QP
0.443250	42.3	19.7	57.0	14.7	QP
0.165500	28.8	19.8	55.2	26.4	Ave.
0.197500	39.0	19.8	53.7	14.7	Ave.
0.297470	35.1	19.8	50.3	15.2	Ave.
0.352690	31.2	19.7	48.9	17.7	Ave.
0.362750	31.1	19.7	48.9	17.8	Ave.
0.443250	27.4	19.7	47.0	19.6	Ave.

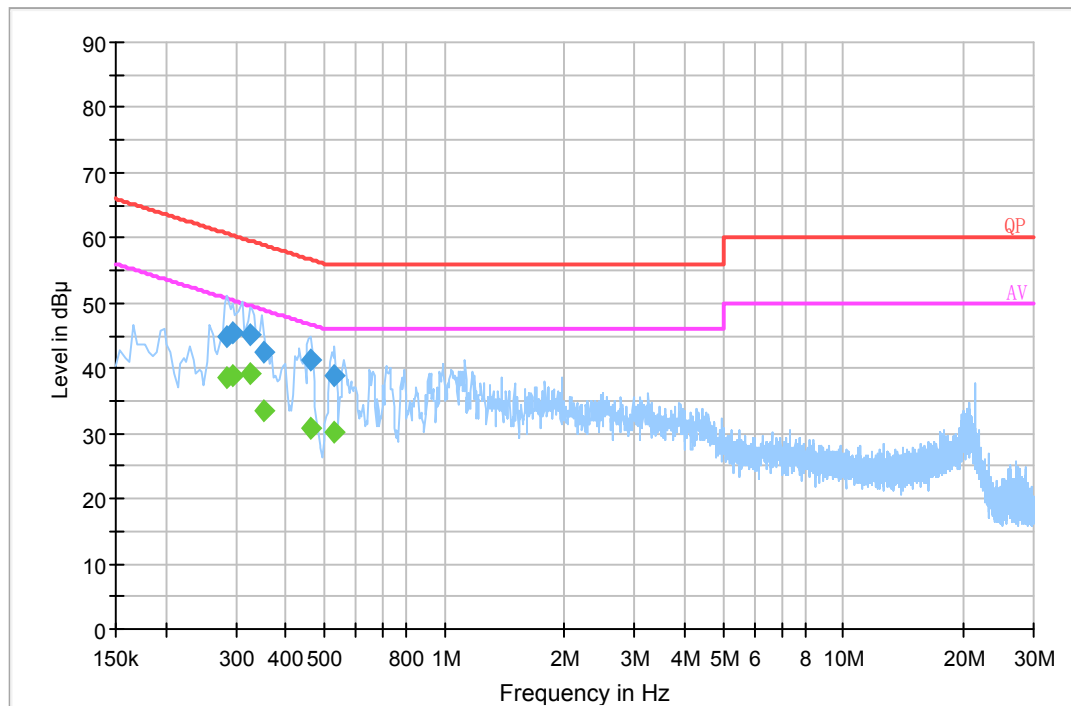AC 120V/60 Hz, Neutral


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.285500	44.8	19.8	60.7	15.9	QP
0.295500	45.3	19.8	60.7	15.4	QP
0.325050	45.3	19.7	59.6	14.3	QP
0.352690	42.6	19.7	58.9	16.3	QP
0.463070	41.3	19.8	56.6	15.3	QP
0.526050	38.8	19.8	56.0	17.2	QP
0.285500	38.7	19.8	50.7	12	Ave.
0.295500	39.0	19.8	50.7	11.7	Ave.
0.325050	39.2	19.7	49.6	10.4	Ave.
0.352690	33.5	19.7	48.9	15.4	Ave.
0.463070	30.9	19.8	46.6	15.7	Ave.
0.526050	30.3	19.8	46.0	15.7	Ave.

For charger:

AC 120V/60 Hz, Line

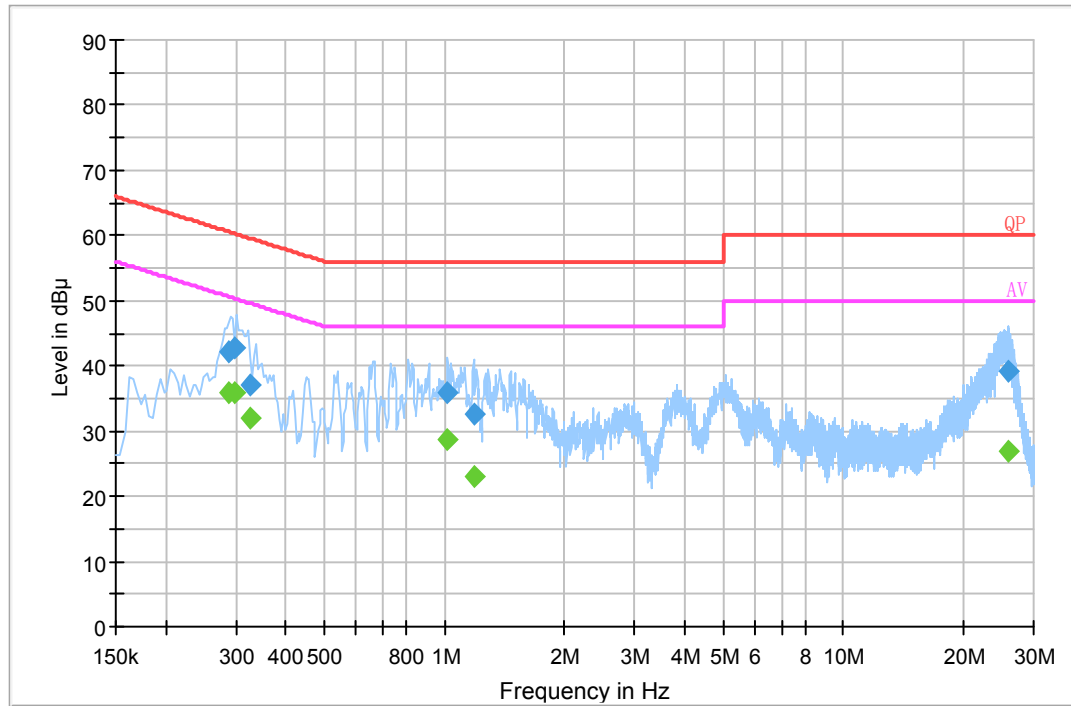

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.286500	42.3	19.8	60.6	18.3	QP
0.297470	42.7	19.8	60.3	17.6	QP
0.326830	37.1	19.8	59.5	22.4	QP
1.018730	35.8	19.8	56.0	20.2	QP
1.192270	32.6	19.7	56.0	23.4	QP
25.872510	39.1	20.4	60.0	20.9	QP
0.286500	35.8	19.8	50.6	14.8	Ave.
0.297470	36.0	19.8	50.3	14.3	Ave.
0.326830	31.9	19.8	49.5	17.6	Ave.
1.018730	28.8	19.8	46.0	17.2	Ave.
1.192270	23.2	19.7	46.0	22.8	Ave.
25.872510	26.9	20.4	50.0	23.1	Ave.

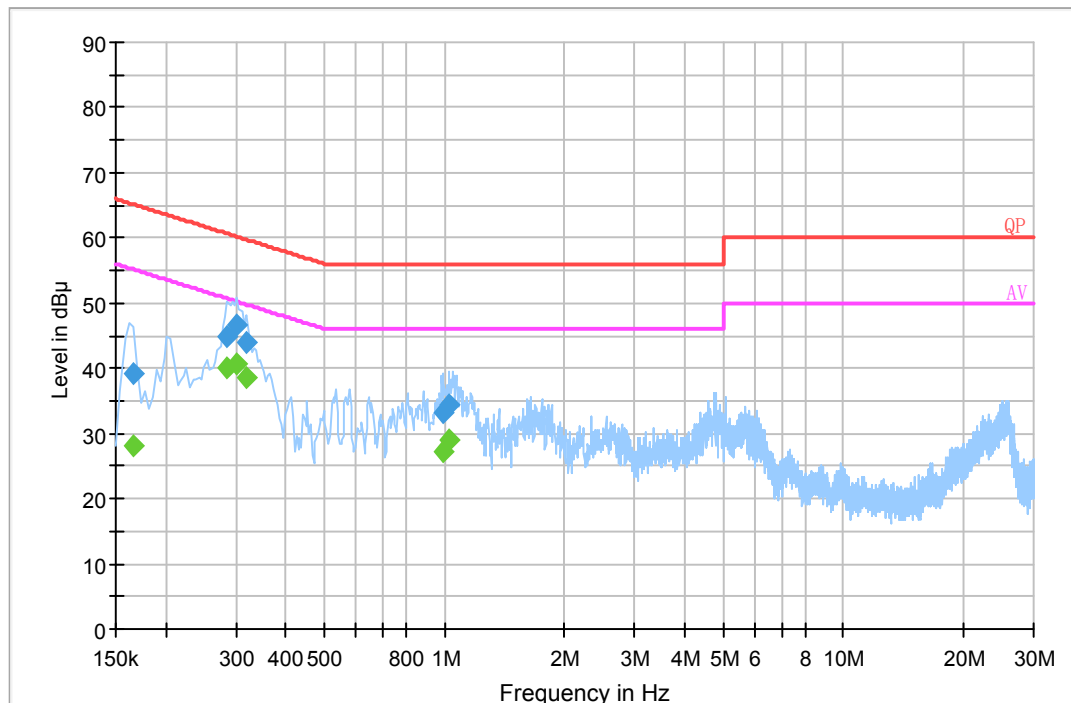AC 120V/60 Hz, Neutral



Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.165500	39.3	19.7	65.2	25.9	QP
0.285500	44.8	19.8	60.7	15.9	QP
0.301470	46.8	19.8	60.2	13.4	QP
0.317230	43.8	19.8	59.8	16	QP
0.991090	33.1	19.8	56.0	22.9	QP
1.022610	34.5	19.8	56.0	21.5	QP
0.165500	28.2	19.7	55.2	27	Ave.
0.285500	39.9	19.8	50.7	10.8	Ave.
0.301470	40.6	19.8	50.2	9.6	Ave.
0.317230	38.5	19.8	49.8	11.3	Ave.
0.991090	27.1	19.8	46.0	18.9	Ave.
1.022610	28.9	19.8	46.0	17.1	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

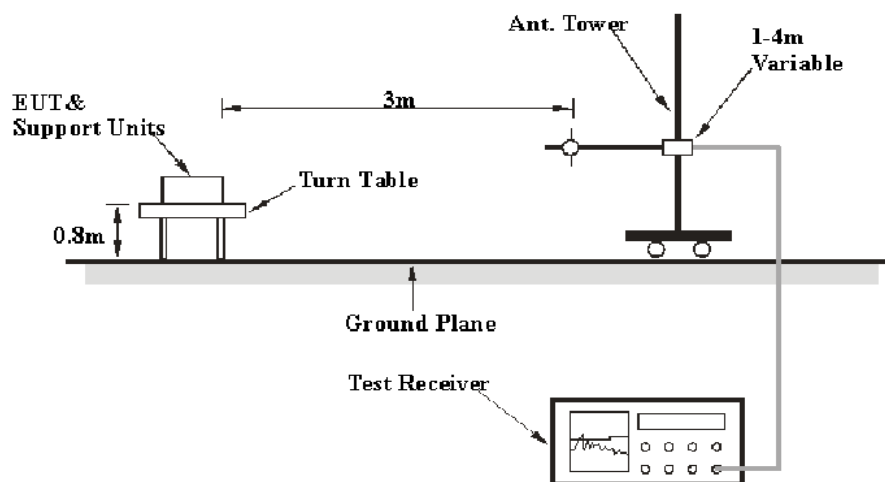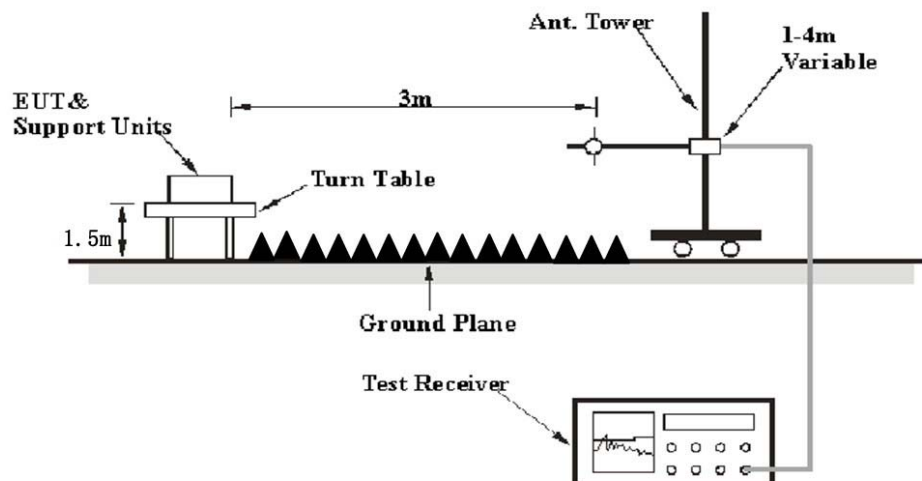EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

S

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BAEL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2019-01-16.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is 8DPSK Mode)

For keyboard:


30 MHz~1 GHz: (the worst case is 8DPSK Mode, High channel)

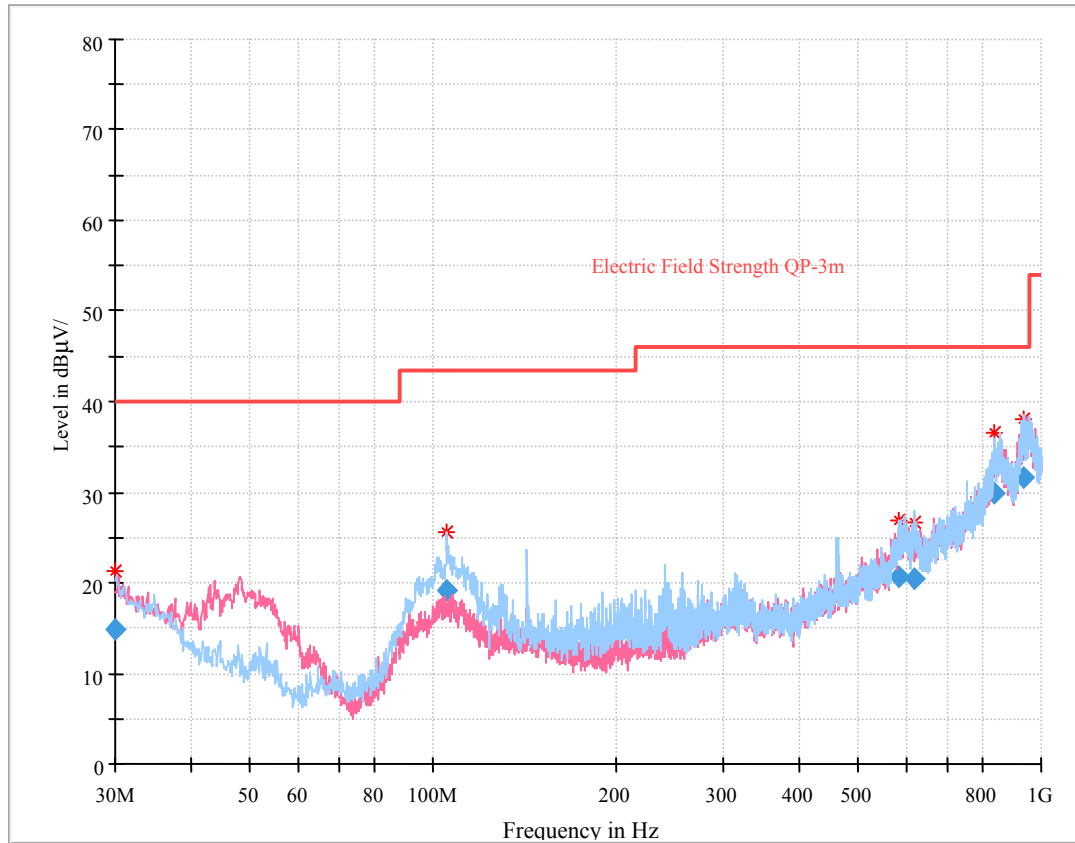

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
30.051098	14.74	219.0	H	337.0	-7.7	40.00	25.26
104.941750	19.12	286.0	H	249.0	-16.3	43.50	24.38
584.733750	20.64	132.0	H	249.0	-2.8	46.00	25.36
619.261875	20.45	294.0	H	32.0	-2.3	46.00	25.55
838.736500	29.86	374.0	H	261.0	5.8	46.00	16.14
937.609125	31.62	168.0	H	291.0	8.5	46.00	14.38

For charger:

30 MHz~1 GHz: (the worst case is 8DPSK Mode, High channel)

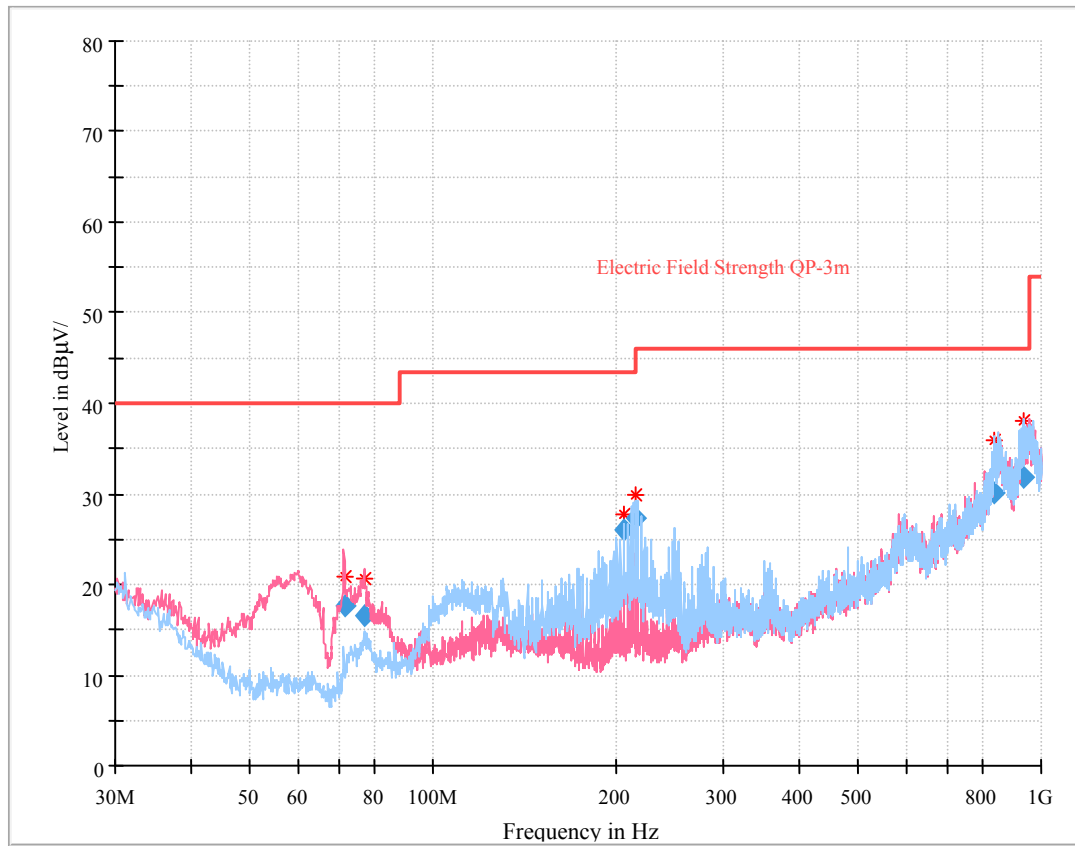

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
71.575125	17.56	109.0	V	81.0	-20.5	40.00	22.44
76.977500	16.55	208.0	V	85.0	-20.2	40.00	23.45
206.477625	26.01	142.0	H	252.0	-13.9	43.50	17.49
214.654500	27.29	185.0	H	231.0	-13.9	43.50	16.21
838.487250	30.16	295.0	H	94.0	5.8	46.00	15.84
935.267875	31.74	147.0	H	327.0	8.2	46.00	14.26

1 GHz - 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2390.00	27.95	PK	234	1.9	V	33.00	60.95	74	13.05
2390.00	13.84	Ave.	234	1.9	V	33.00	46.84	54	7.16
2483.50	27.40	PK	155	2.4	V	33.20	60.60	74	13.40
2483.50	13.62	Ave.	155	2.4	V	33.20	46.82	54	7.18
4804.00	43.25	PK	265	2.2	V	7.88	51.13	74	22.87
4804.00	29.40	Ave.	265	2.2	V	7.88	37.28	54	16.72
Middle Channel (2441 MHz)									
4882.00	42.61	PK	173	1.3	V	9.21	51.82	74	22.18
4882.00	28.90	Ave.	173	1.3	V	9.21	38.11	54	15.89
High Channel (2480 MHz)									
2390.00	27.84	PK	39	1.6	V	33.00	60.84	74	13.16
2390.00	13.60	Ave.	39	1.6	V	33.00	46.60	54	7.40
2483.50	32.32	PK	217	1.3	V	33.20	65.52	74	8.48
2483.50	20.40	PK	217	1.6	V	33.20	53.60	54	0.40
4960.00	42.90	PK	250	1.7	V	9.07	51.97	74	22.03
4960.00	29.35	Ave.	250	1.7	V	9.07	38.42	54	15.58

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude



The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.



Pre-scan with High channel Peak Horizontal

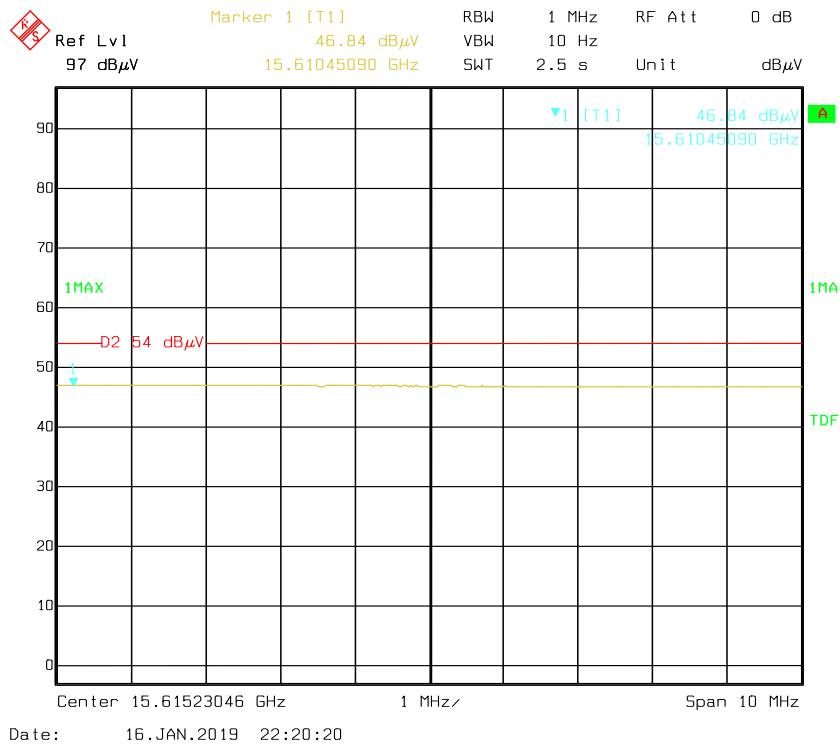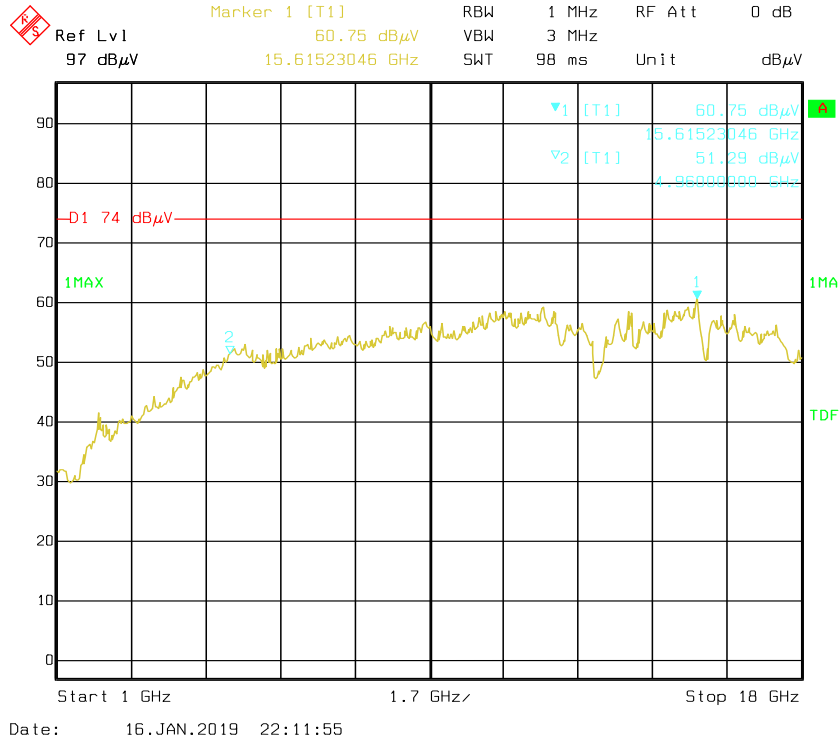



Vertical

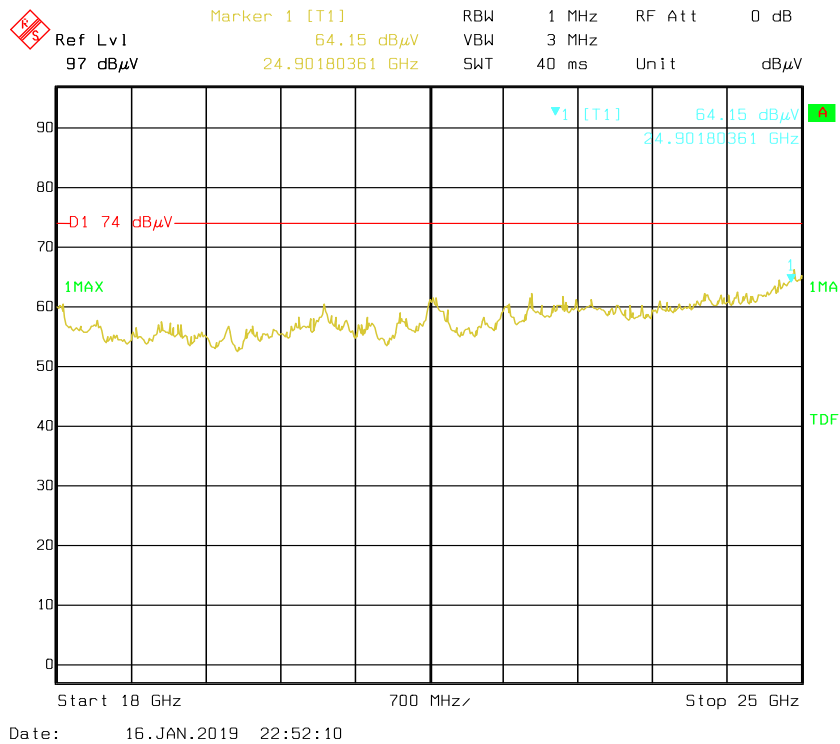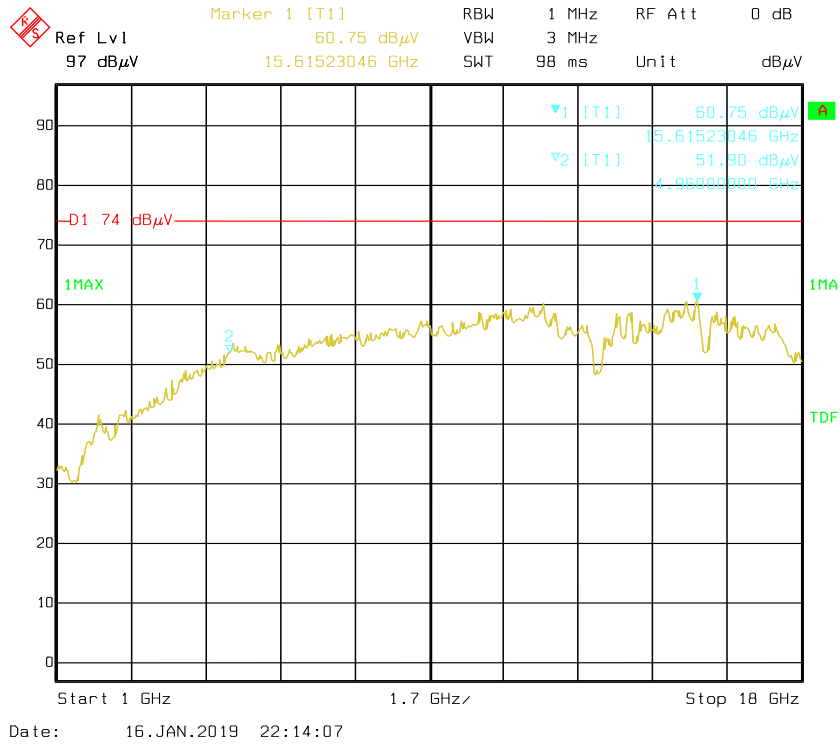

Pre-scan for Average
Horizontal

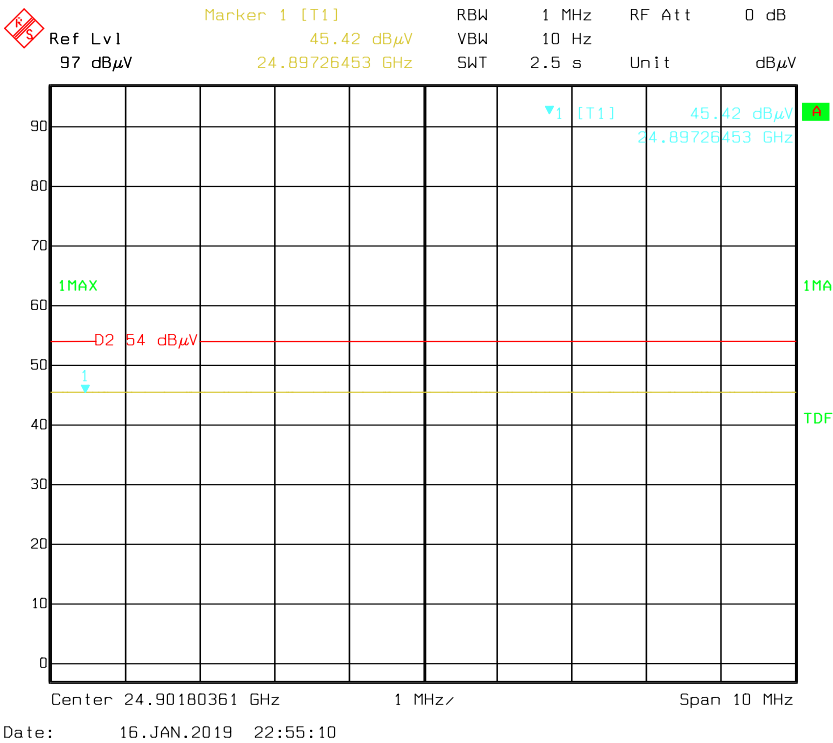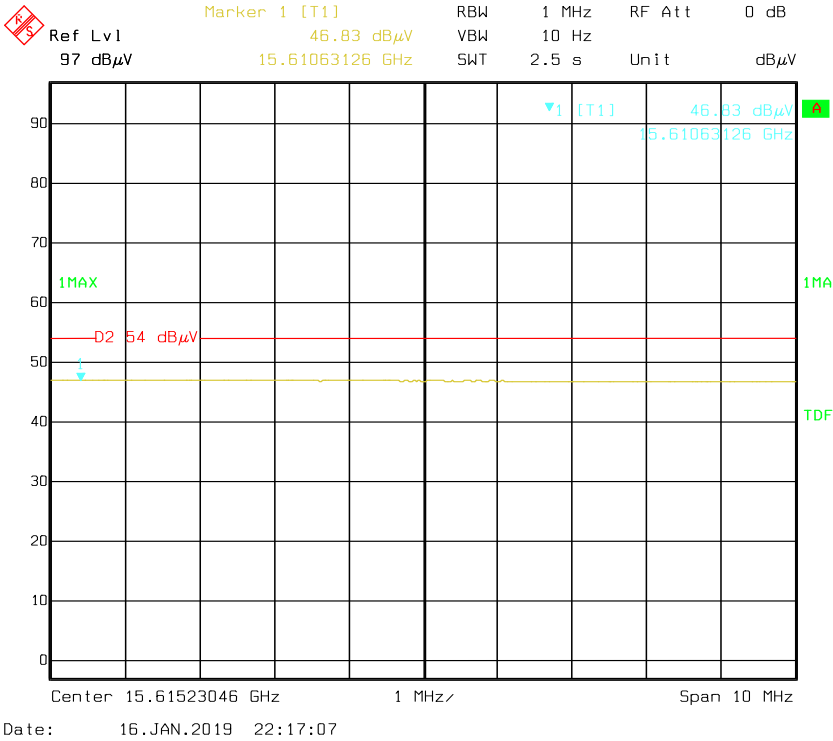

Vertical

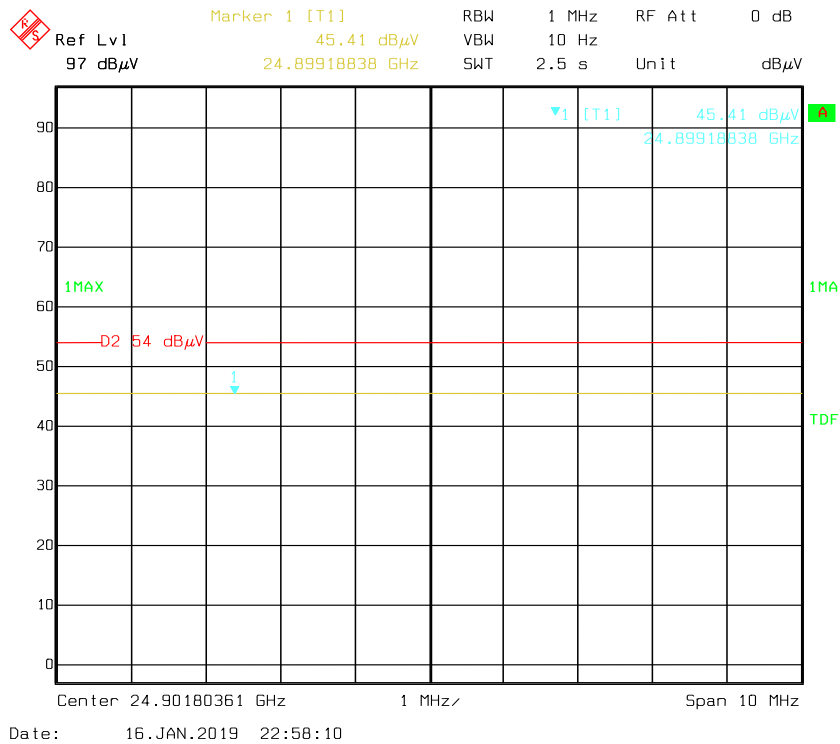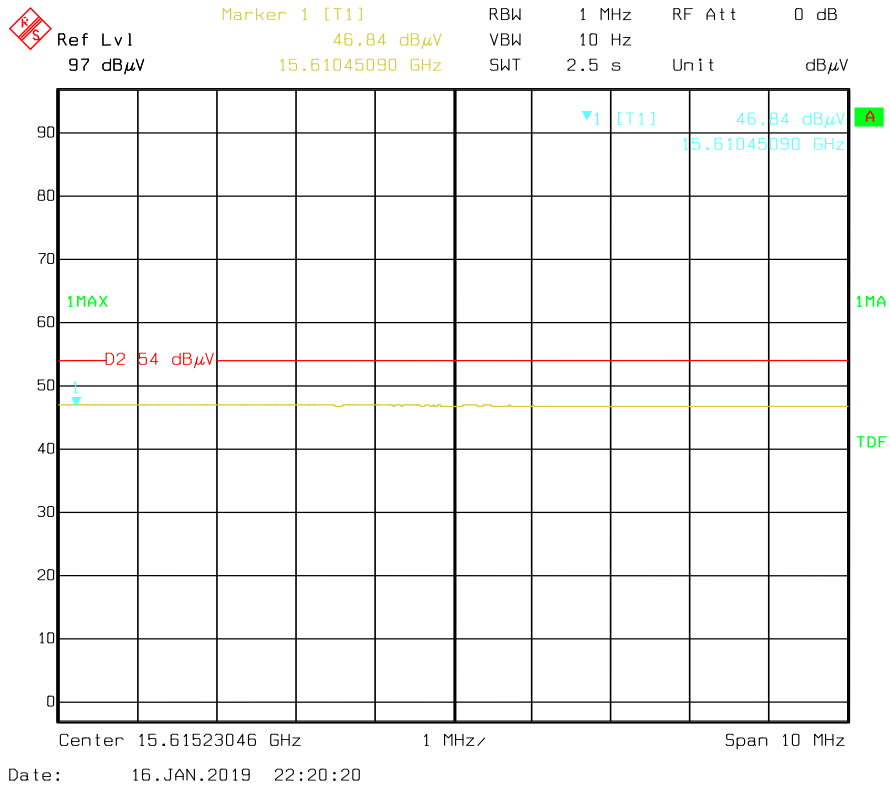

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-12-14.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
BDR(GFSK)					
Low	1.008	0.933	0.621	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.003	0.942	0.628	> two-thirds of the 20 dB bandwidth	Compliance
High	1.002	0.936	0.624	> two-thirds of the 20 dB bandwidth	Compliance
EDR($\pi/4$-DQPSK)					
Low	1.000	1.256	0.837	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.006	1.250	0.833	> two-thirds of the 20 dB bandwidth	Compliance
High	1.000	1.260	0.840	> two-thirds of the 20 dB bandwidth	Compliance
EDR(8DPSK)					
Low	1.001	1.263	0.842	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.007	1.272	0.848	> two-thirds of the 20 dB bandwidth	Compliance
High	1.022	1.263	0.842	> two-thirds of the 20 dB bandwidth	Compliance


Please refer to the following plots.

BDR (GFSK): Low Channel

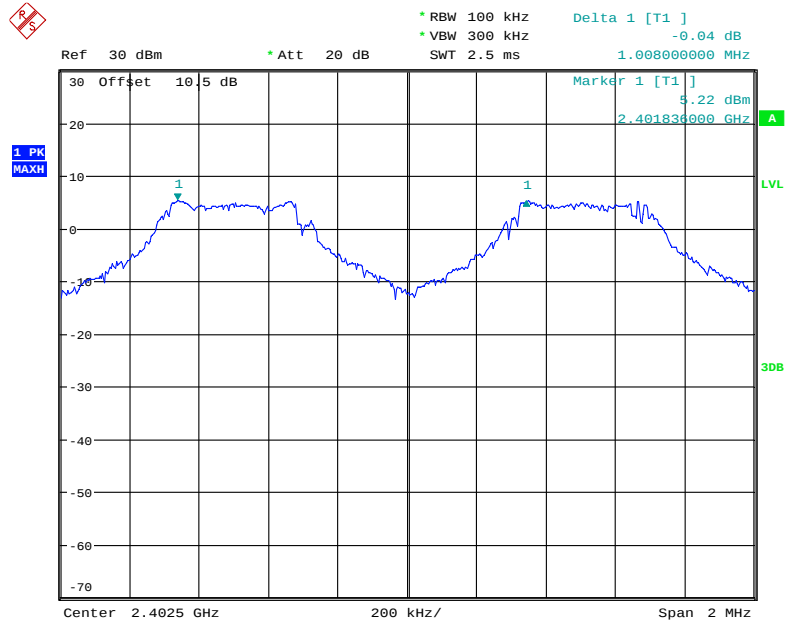


Date: 14.DEC.2018 21:15:05


BDR (GFSK): Middle Channel

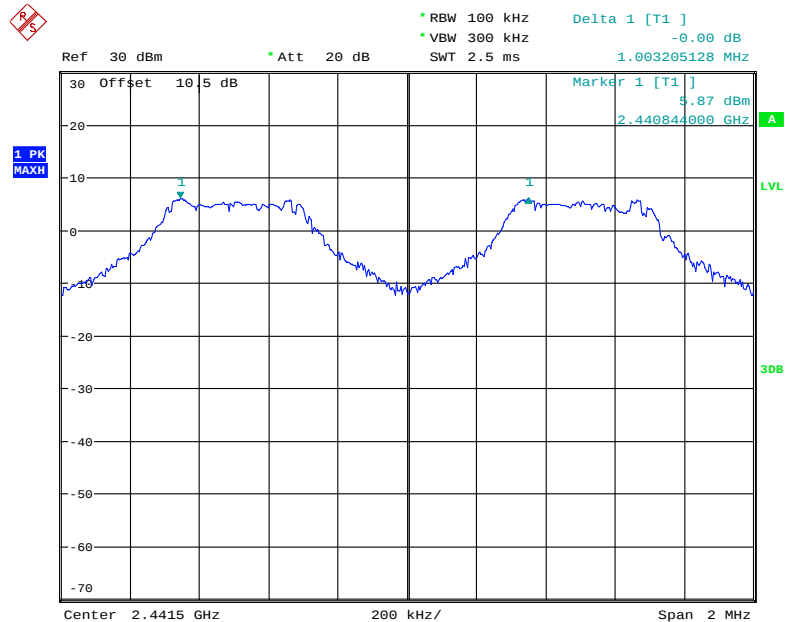

Date: 14.DEC.2018 21:12:34

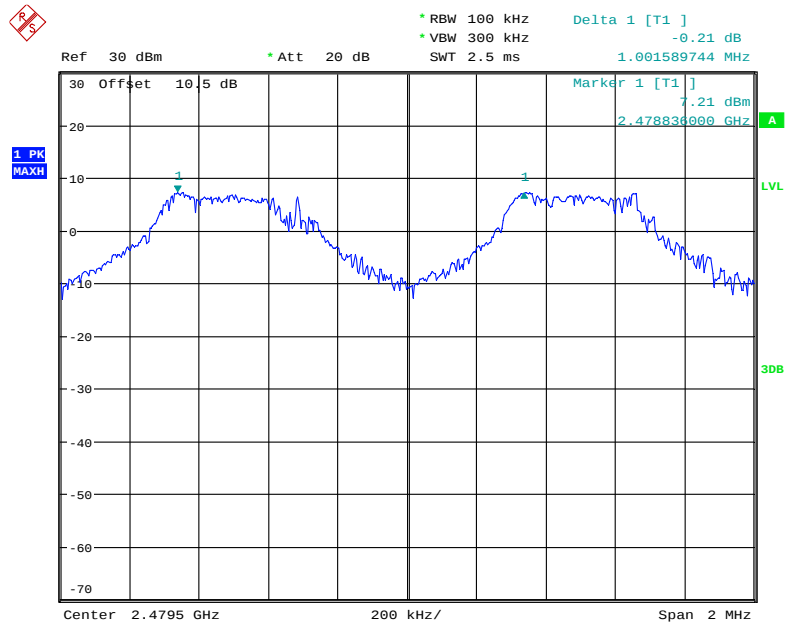
BDR (GFSK): High Channel

Date: 14.DEC.2018 21:10:23

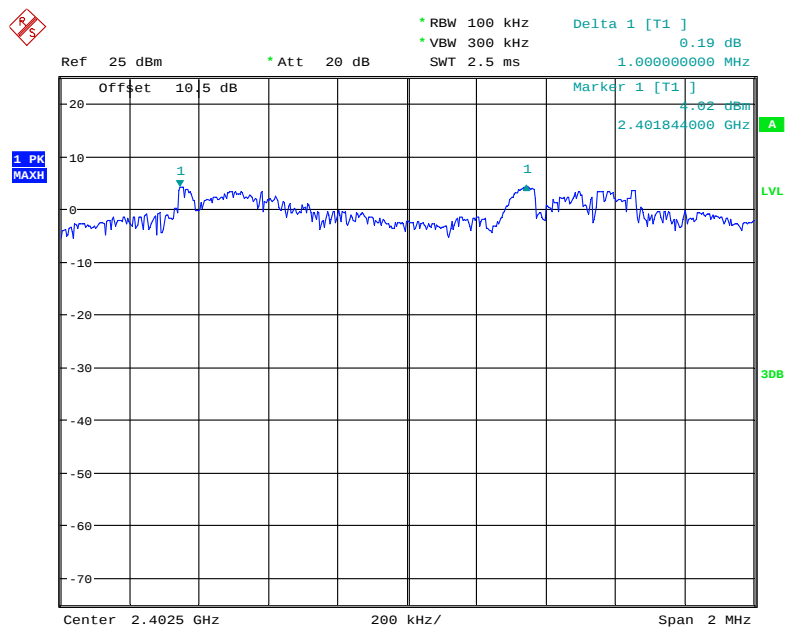EDR ($\pi/4$ -DQPSK): Low Channel


Date: 14.DEC.2018 21:19:14

EDR ($\pi/4$ -DQPSK): Middle Channel

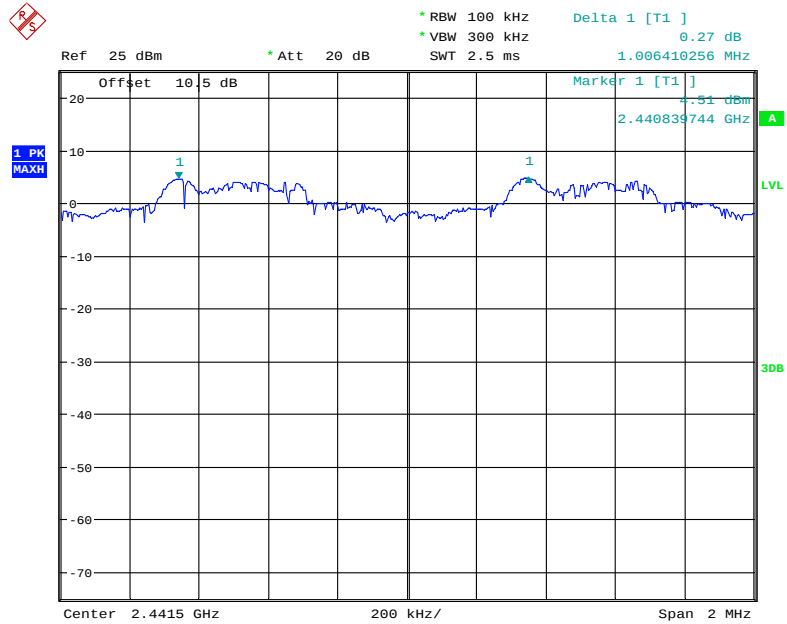


Date: 14.DEC.2018 21:23:49

EDR ($\pi/4$ -DQPSK): High Channel

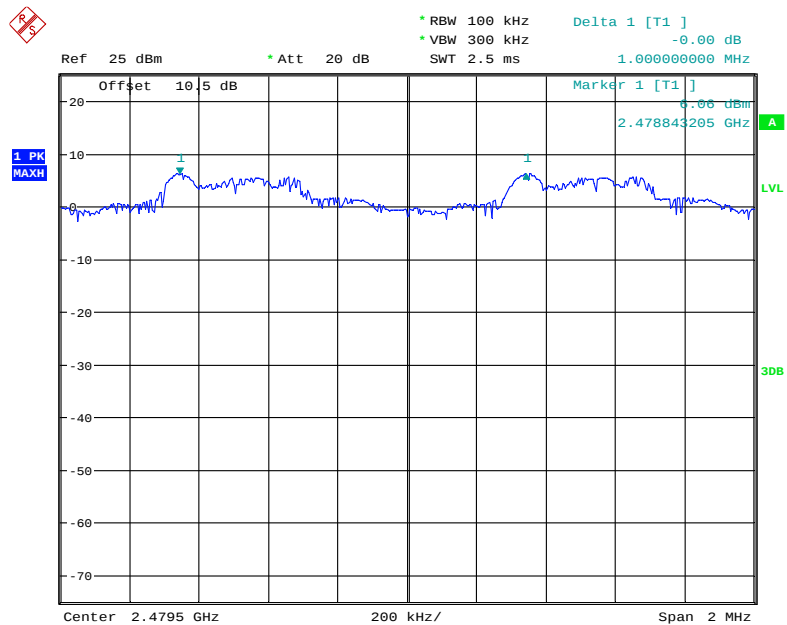


Date: 14.DEC.2018 21:27:05

EDR (8DPSK): Low Channel

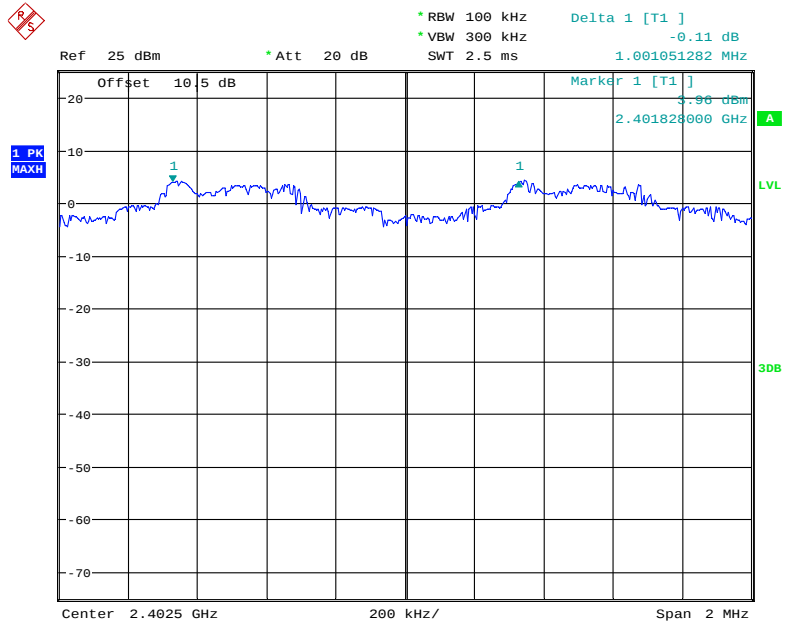


Date: 14.DEC.2018 21:37:27

EDR (8DPSK): Middle Channel

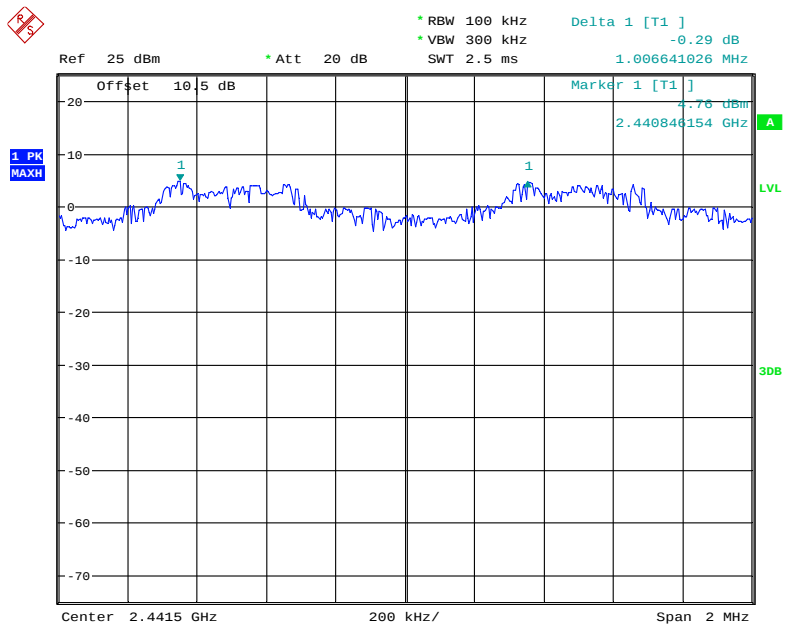

Date: 14.DEC.2018 21:31:56

EDR (8DPSK): High Channel

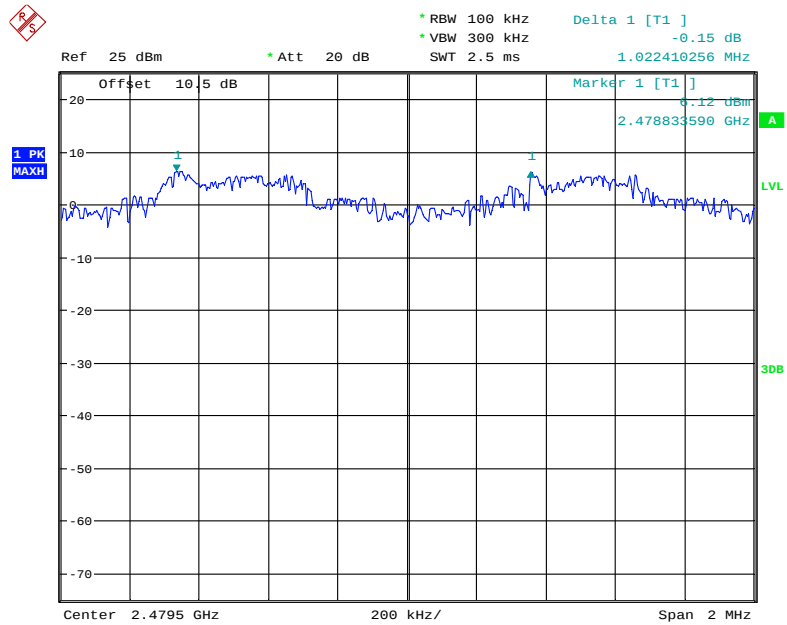

Date: 14.DEC.2018 21:29:19

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-12-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.933
	Middle	2441	0.942
	High	2480	0.936
EDR ($\pi/4$ -DQPSK)	Low	2402	1.256
	Middle	2441	1.250
	High	2480	1.260
EDR (8DPSK)	Low	2402	1.263
	Middle	2441	1.272
	High	2480	1.263

The screenshot displays a spectrum analyzer interface. The main plot shows a signal spectrum with a blue trace. Two red horizontal lines are drawn across the plot, labeled D1 and D2. Marker 1 is placed on the signal trace at 2.401551282 GHz. The y-axis represents power in dBm, ranging from -80 to 20. The x-axis represents frequency in kHz, ranging from 20 to 2 MHz. The signal is centered at 2.402 GHz. The plot shows a signal with a peak at 2.401551282 GHz, which is marked with a green '1'. The signal level at this peak is -16.3 dBm. The signal level at the reference frequency is -0.45 dB. The signal level at the marker frequency is -15.96 dBm. The signal level at the marker frequency is -15.96 dBm. The signal level at the marker frequency is -15.96 dBm.

Ref 20 dBm Att 20 dB RBW 30 kHz VBW 100 kHz SWT 10 ms Delta 1 [T1] -0.45 dB 932.692307694 kHz


20 Offset 10 5 dB Marker 1 [T1] -15.96 dBm 2.401551282 GHz

1 PK MAXH D1 3.7 dBm D2 -16.3 dBm 1 1 3dB

Center 2.402 GHz 200 kHz/ Span 2 MHz


Date: 14.DEC.2018 20:27:53

BDR (GFSK): Middle Channel

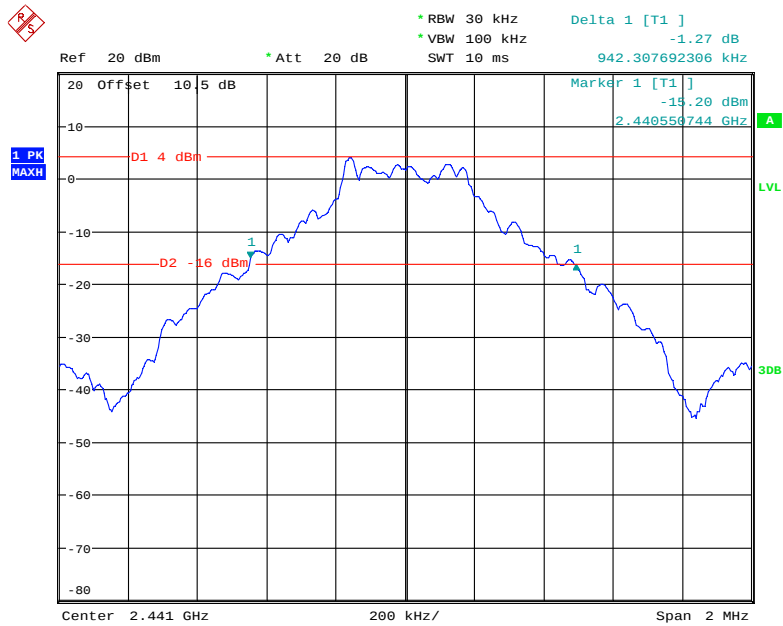


Date: 14.DEC.2018 20:26:11

BDR (GFSK): High Channel

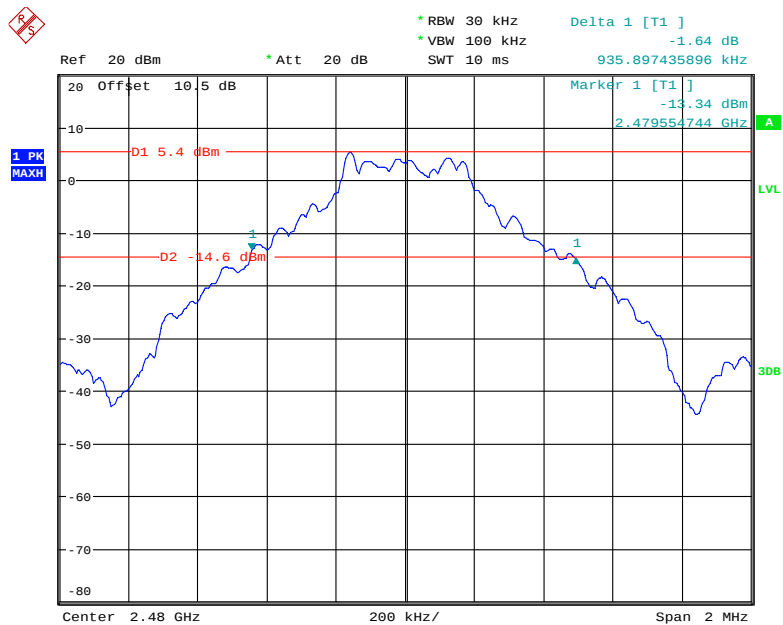


Date: 14.DEC.2018 20:23:41

EDR ($\pi/4$ -DQPSK): Low Channel

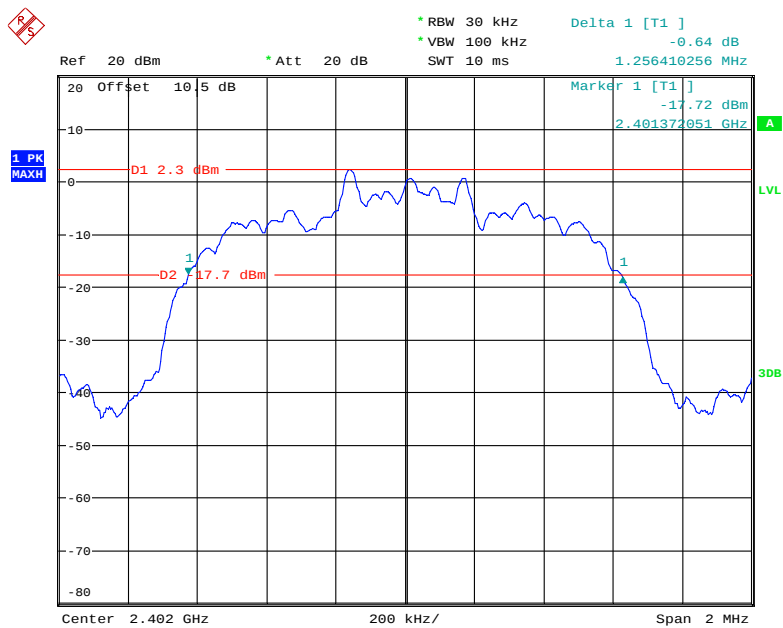


Date: 14.DEC.2018 20:30:25

EDR ($\pi/4$ -DQPSK): Middle Channel

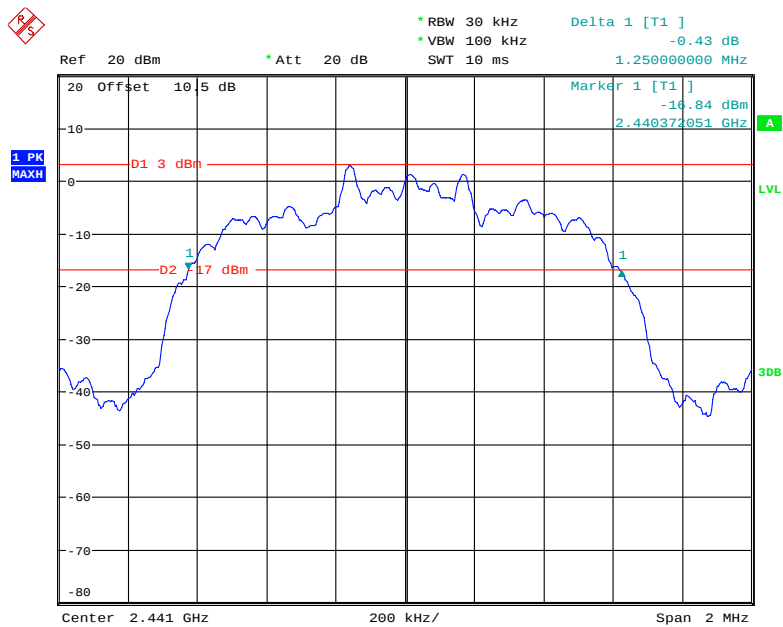


Date: 14.DEC.2018 20:31:41

EDR ($\pi/4$ -DQPSK): High Channel

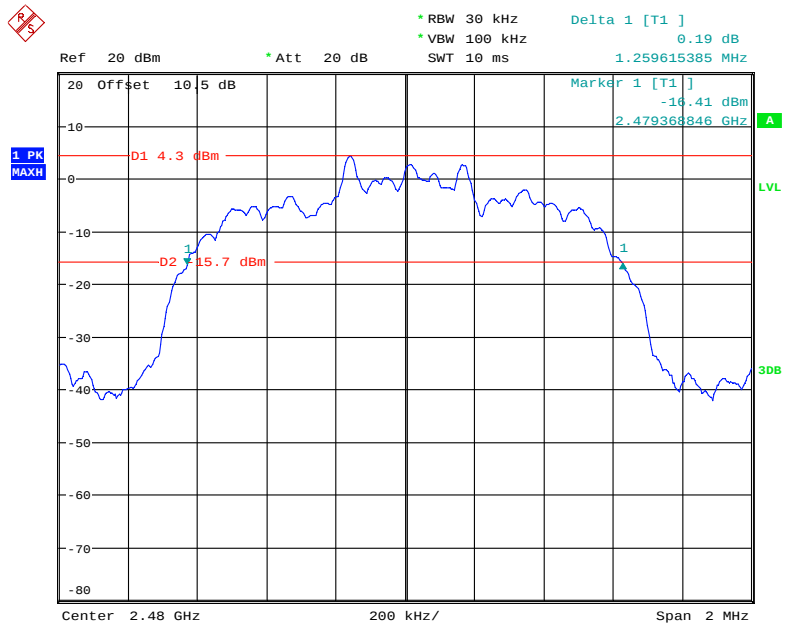


Date: 14.DEC.2018 20:34:45

EDR (8DPSK): Low Channel

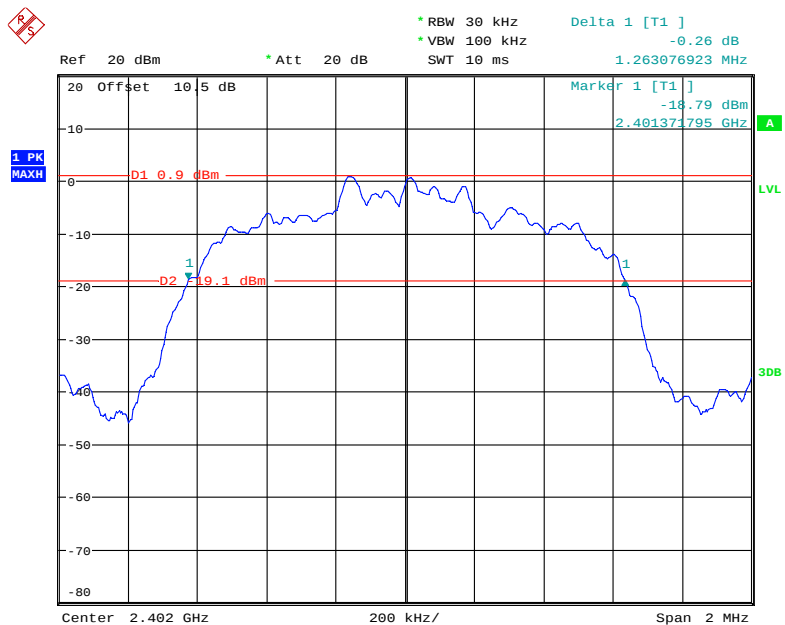


Date: 14.DEC.2018 20:39:52

EDR (8DPSK): Middle Channel

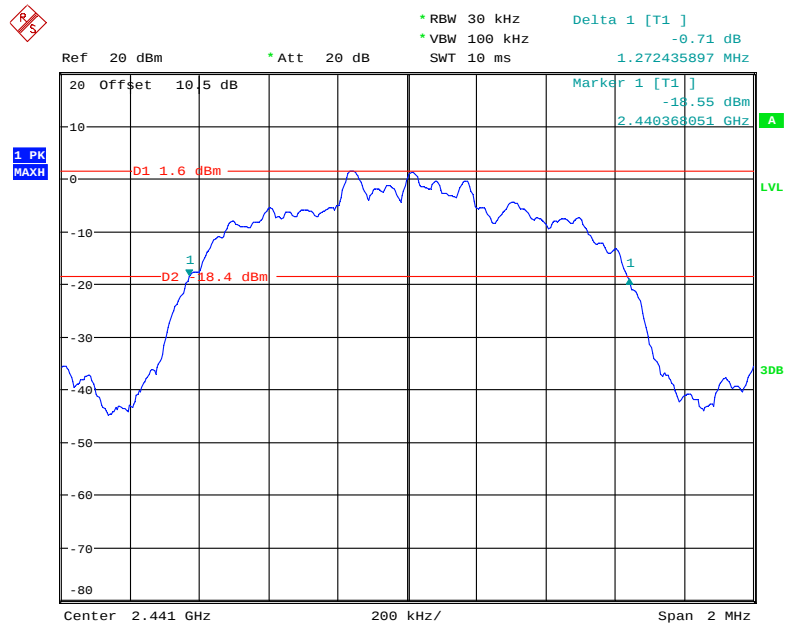

Date: 14.DEC.2018 20:38:47

EDR (8DPSK): High Channel

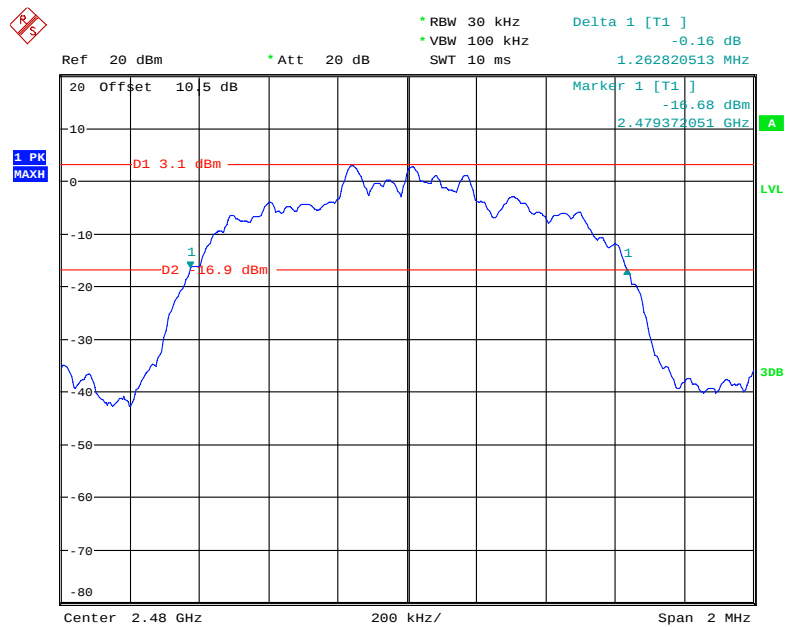

Date: 14.DEC.2018 20:36:28

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Tracy Hu on 2018-12-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15

BDR (GFSK): Number of Hopping Channels

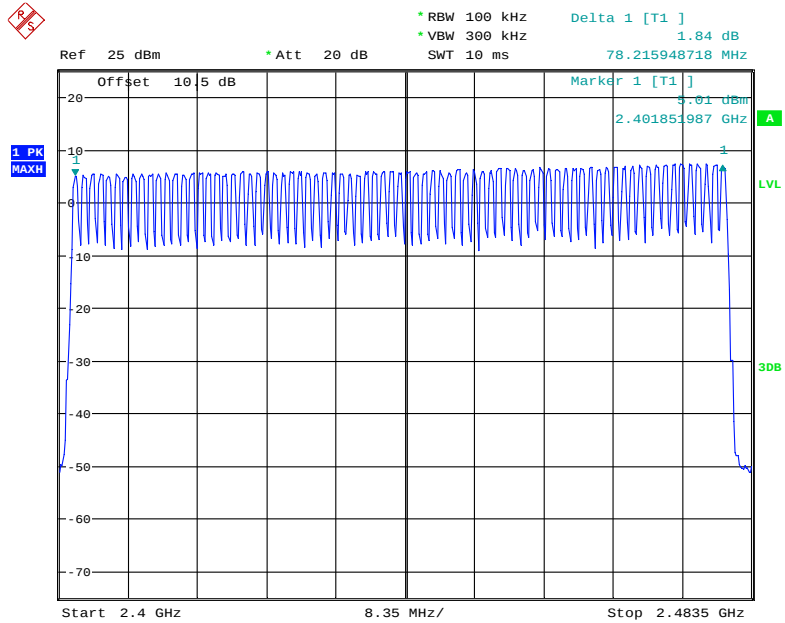


Date: 14.DEC.2018 22:14:21

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

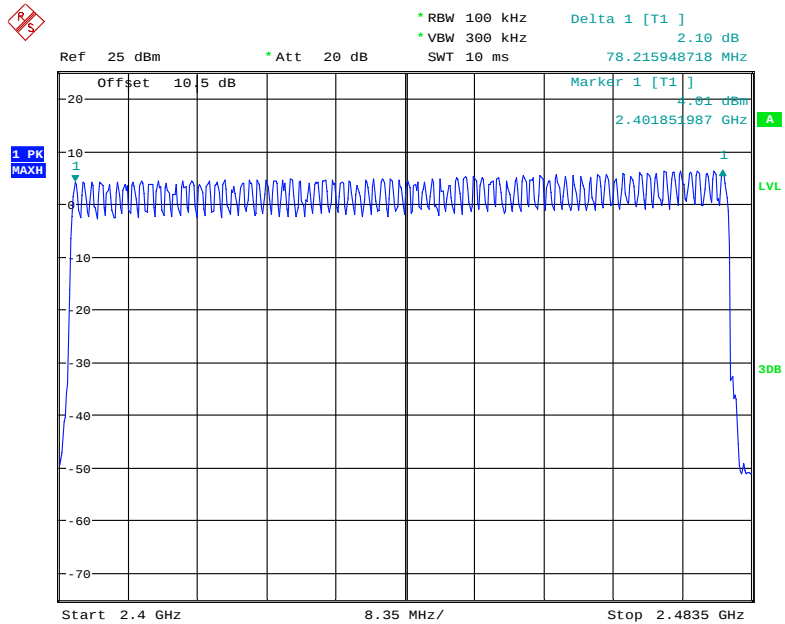

Date: 14.DEC.2018 22:20:26

EDR (8DPSK): Number of Hopping Channels

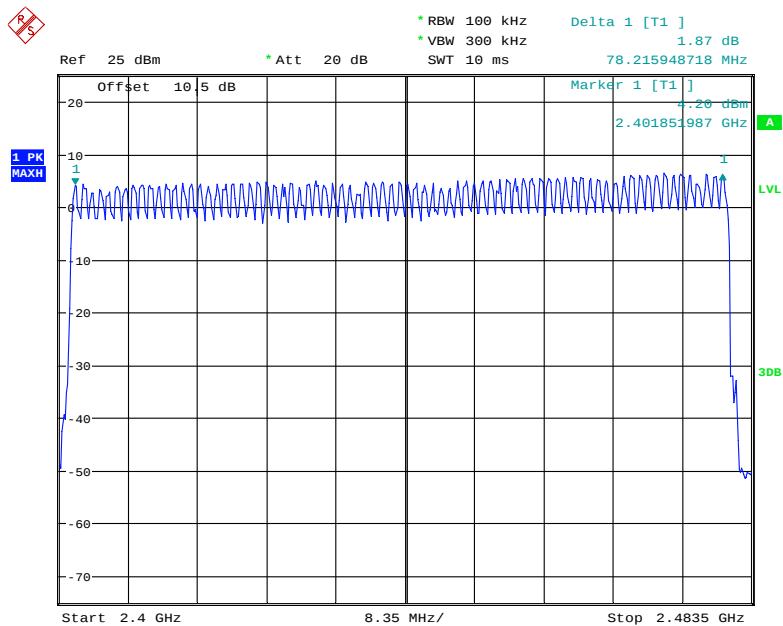

Date: 14.DEC.2018 22:27:24

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test or each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) =

(number of hops on spectrum analyzer) $\times$ (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of ops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-12-14.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.390	0.125	0.4	Pass
		Middle	0.390	0.125	0.4	Pass
		High	0.390	0.125	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.657	0.265	0.4	Pass
		Middle	1.662	0.266	0.4	Pass
		High	1.662	0.266	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.928	0.312	0.4	Pass
		Middle	2.928	0.312	0.4	Pass
		High	2.928	0.312	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.395	0.126	0.4	Pass
		Middle	0.395	0.126	0.4	Pass
		High	0.395	0.126	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.662	0.266	0.4	Pass
		Middle	1.662	0.266	0.4	Pass
		High	1.662	0.266	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.928	0.312	0.4	Pass
		Middle	2.928	0.312	0.4	Pass
		High	2.928	0.312	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.398	0.127	0.4	Pass
		Middle	0.398	0.127	0.4	Pass
		High	0.398	0.127	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.662	0.266	0.4	Pass
		Middle	1.662	0.266	0.4	Pass
		High	1.662	0.266	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.928	0.312	0.4	Pass
		Middle	2.928	0.312	0.4	Pass
		High	2.928	0.312	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK):

Pulse time, Low Channel, DH1

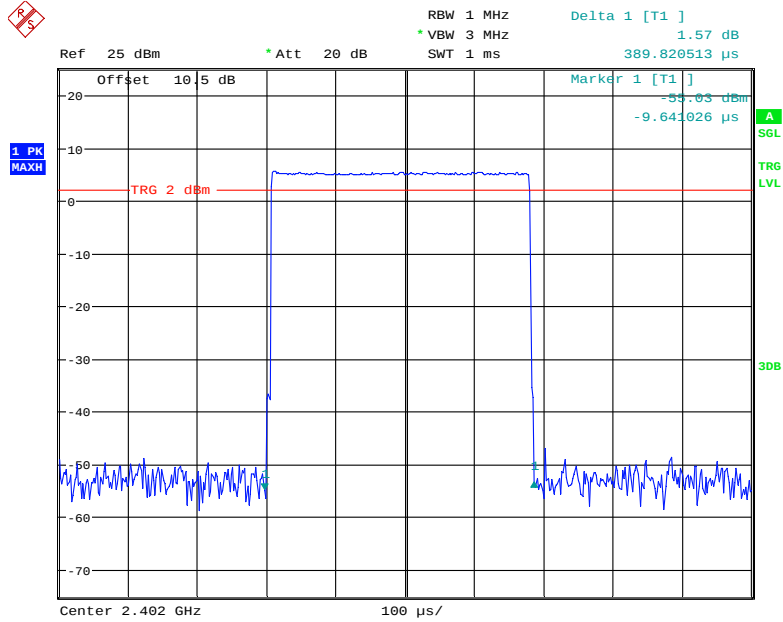


Date: 14.DEC.2018 21:47:26

Pulse time, Middle Channel, DH1

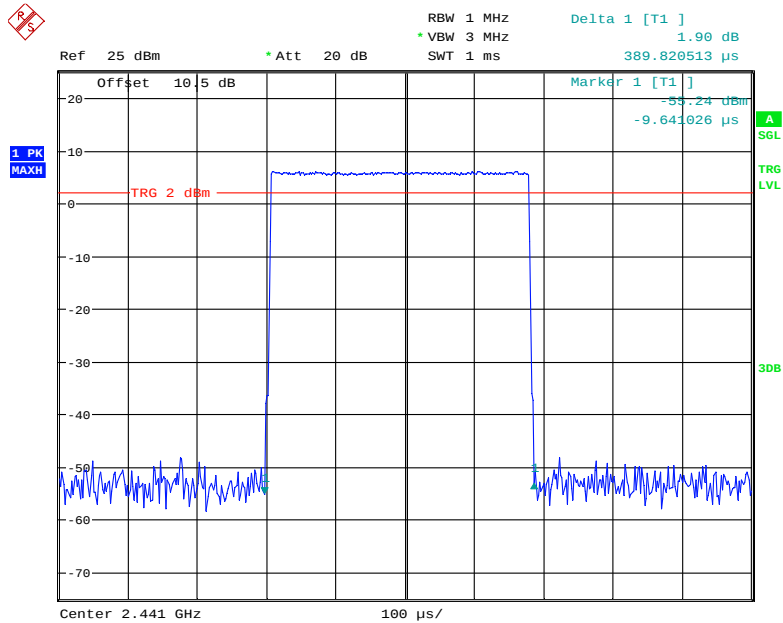


Date: 14.DEC.2018 21:47:47

Pulse time, High Channel, DH1

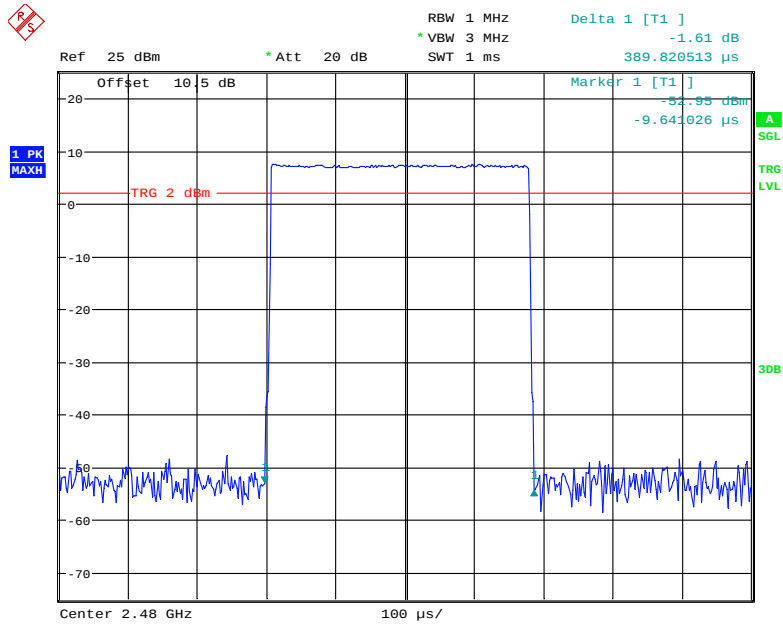


Date: 14.DEC.2018 21:48:07

Pulse time, Low Channel, DH3

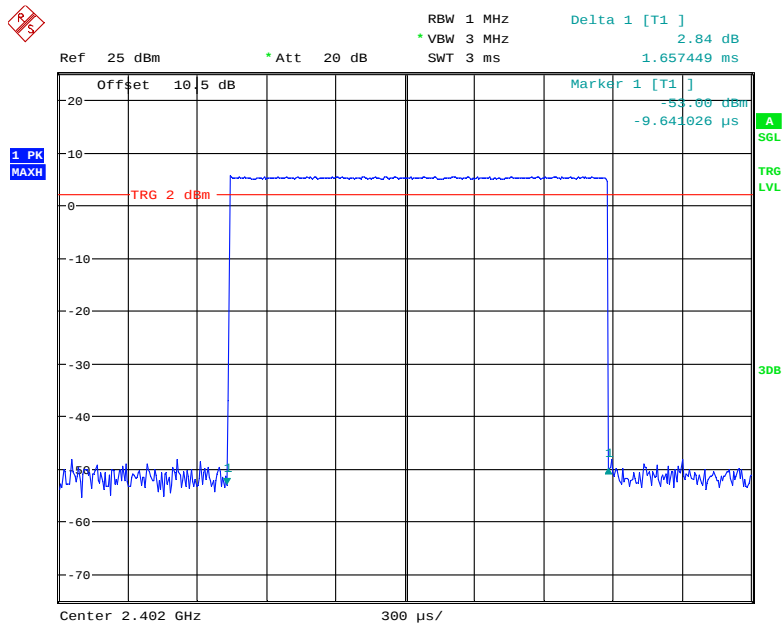


Date: 14.DEC.2018 21:57:47

Pulse time, Middle Channel, DH3

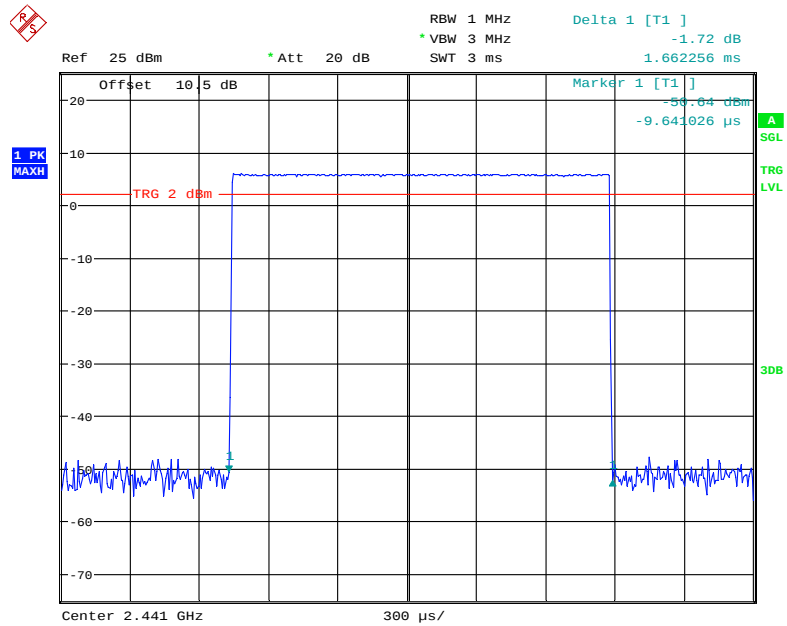


Date: 14.DEC.2018 21:58:16

Pulse time, High Channel, DH3

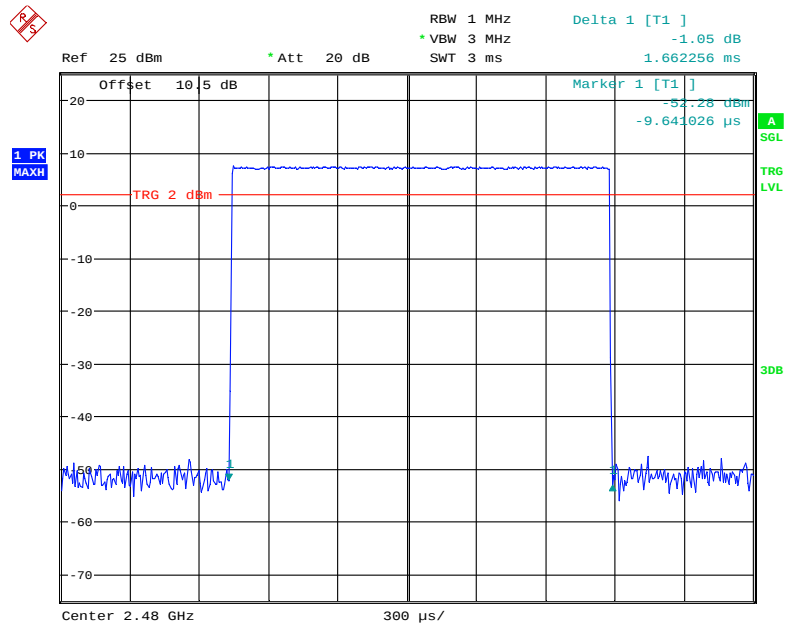


Date: 14.DEC.2018 21:58:30

Pulse time, Low Channel, DH5

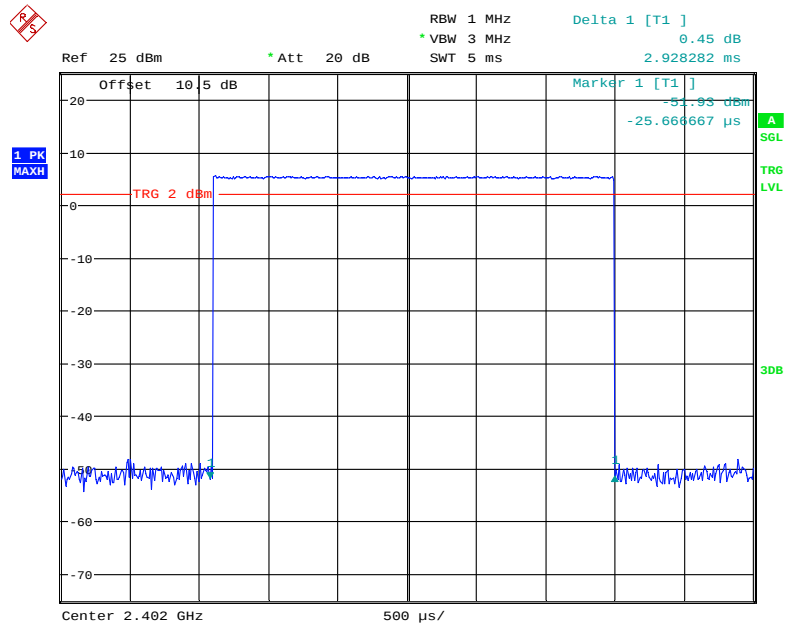


Date: 14.DEC.2018 22:01:28

Pulse time, Middle Channel, DH5

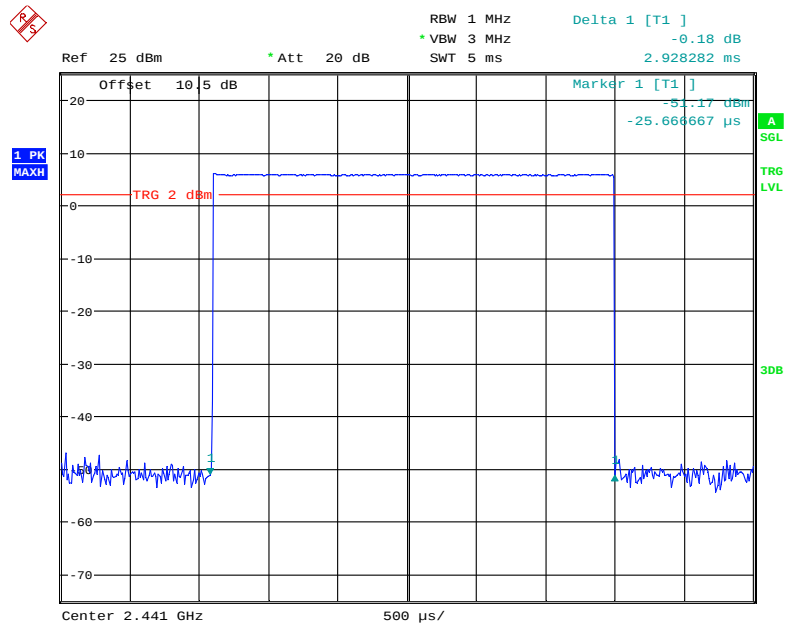

Date: 14.DEC.2018 22:01:12


Pulse time, High Channel, DH5

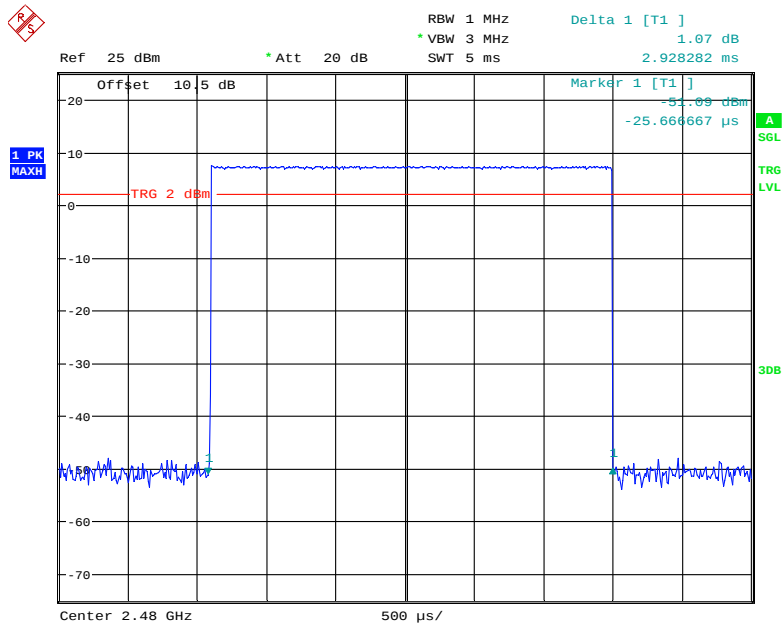

Date: 14.DEC.2018 21:59:42


EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, 2DH1

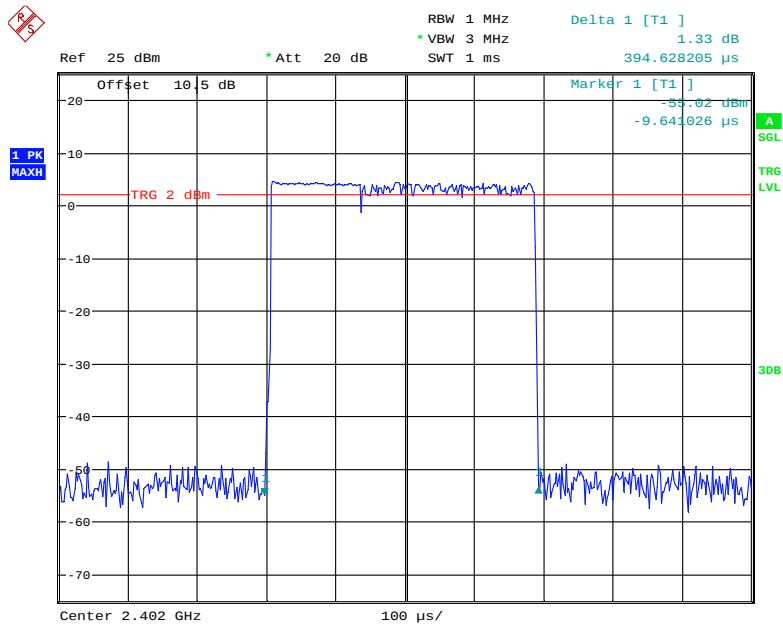


Date: 14.DEC.2018 21:46:40

Pulse time, Middle Channel, 2DH1

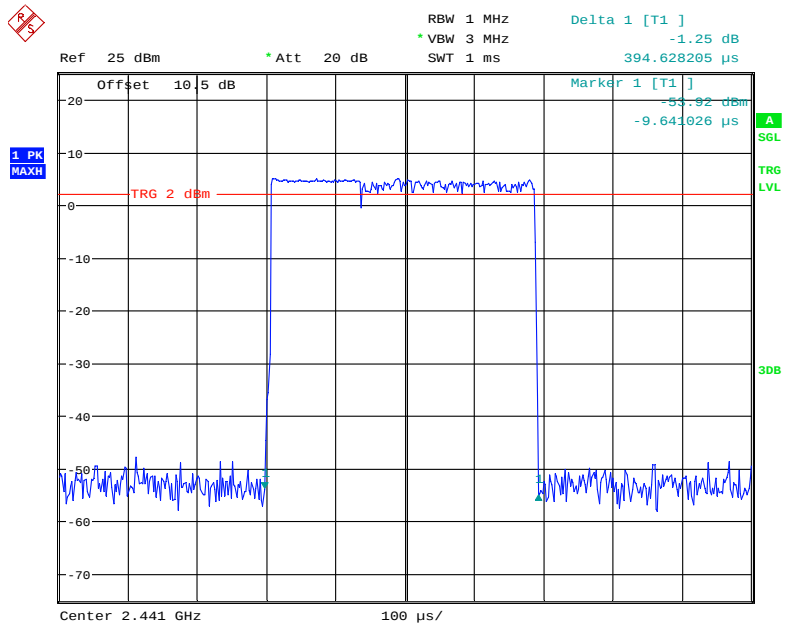


Date: 14.DEC.2018 21:46:25

Pulse time, High Channel, 2DH1

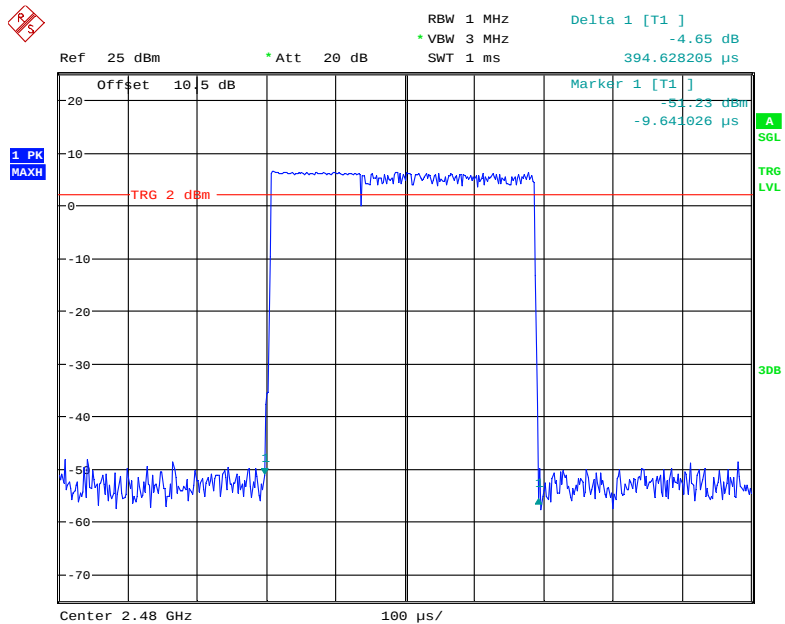


Date: 14.DEC.2018 21:46:08

Pulse time, Low Channel, 2DH3

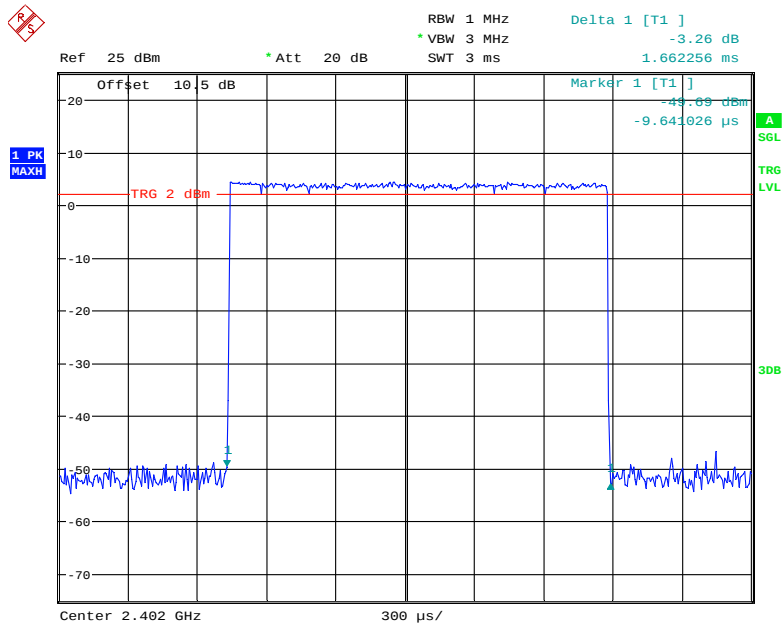


Date: 14.DEC.2018 21:55:08

Pulse time, Middle Channel, 2DH3

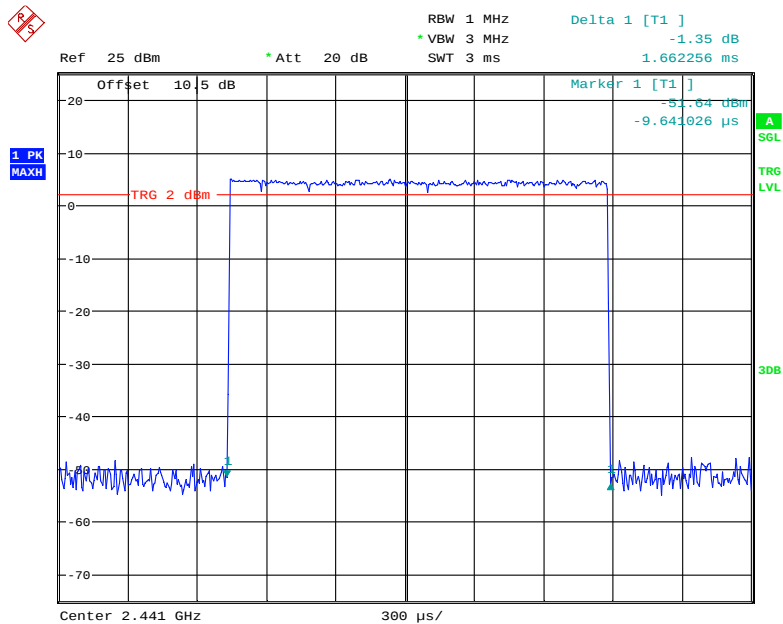


Date: 14.DEC.2018 21:54:48

Pulse time, High Channel, 2DH3

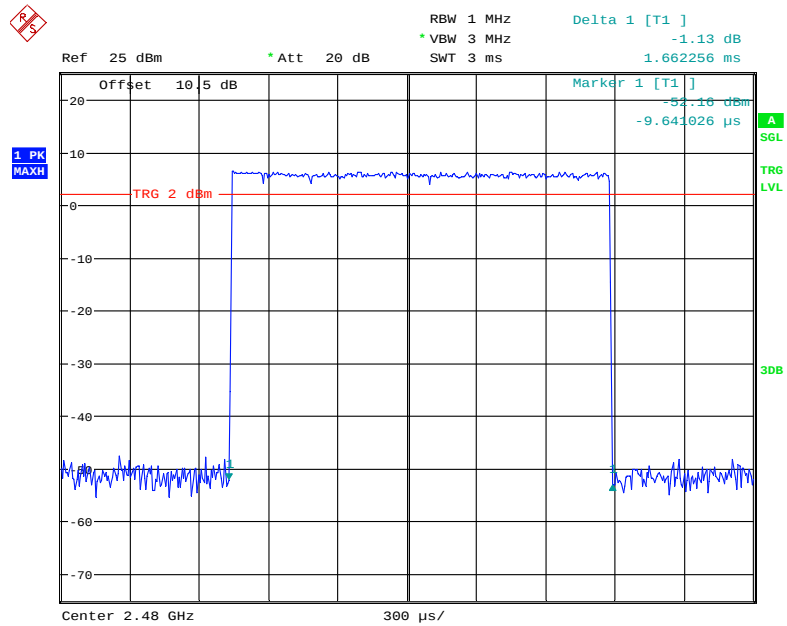


Date: 14.DEC.2018 21:51:59

Pulse time, Low Channel, 2DH5

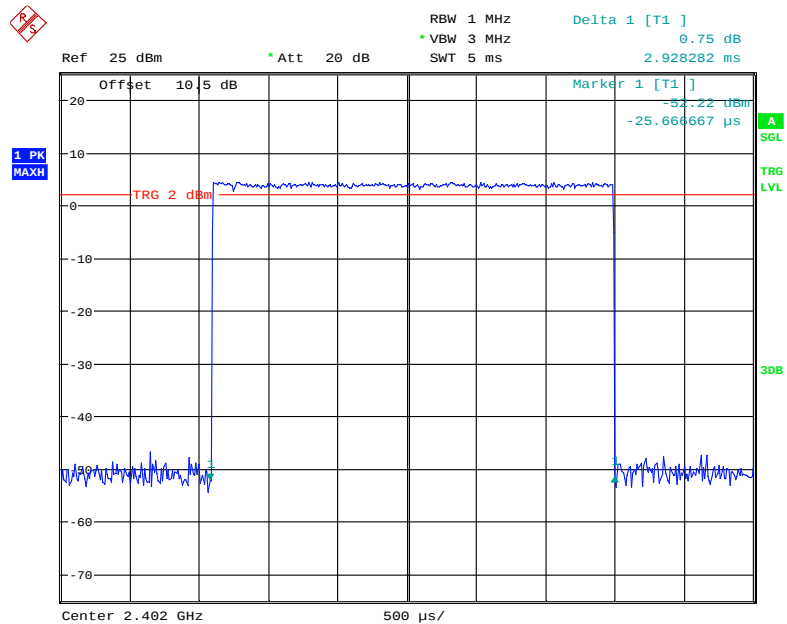


Date: 14.DEC.2018 22:02:02

Pulse time, Middle Channel, 2DH5

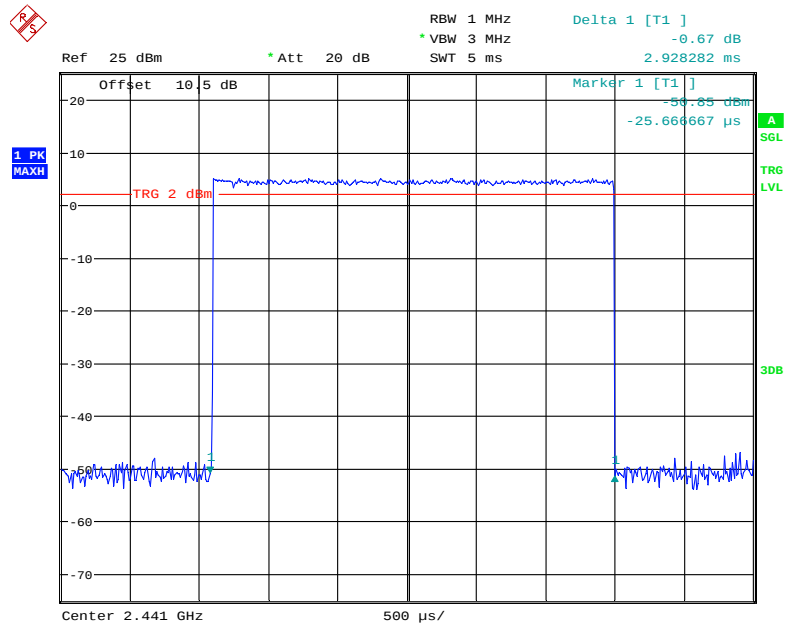


Date: 14.DEC.2018 22:02:17

Pulse time, High Channel, 2DH5

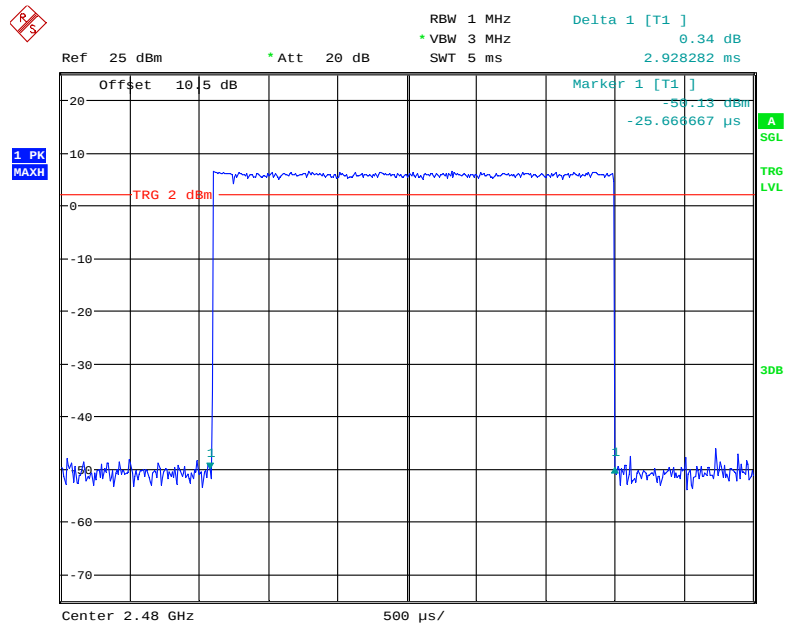


Date: 14.DEC.2018 22:02:29

EDR (8DPSK): Pulse time, Low Channel, 3DH1

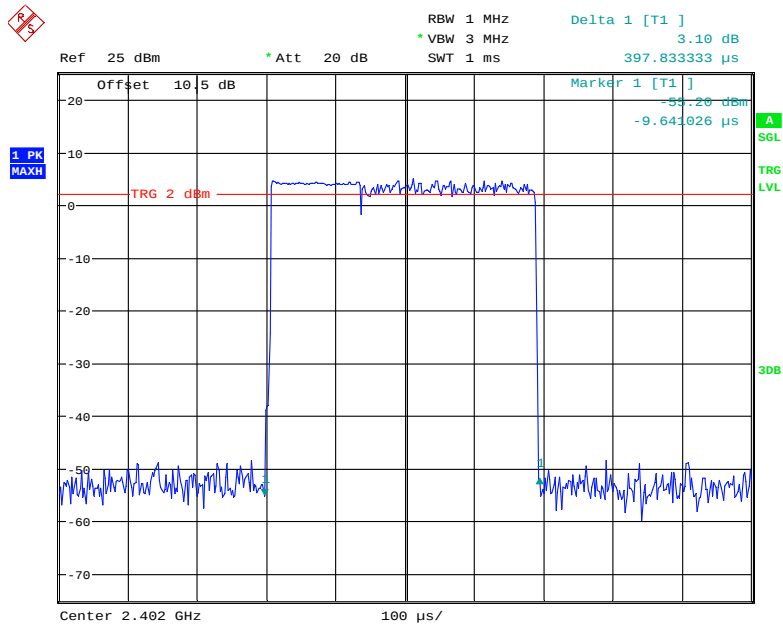


Date: 14.DEC.2018 21:49:19

Pulse time, Middle Channel, 3DH1

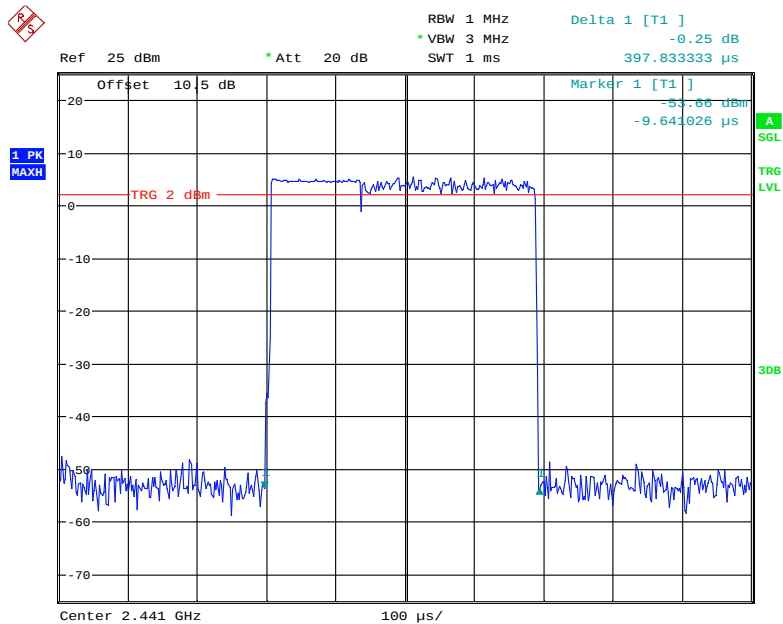


Date: 14.DEC.2018 21:49:03

Pulse time, High Channel, 3DH1

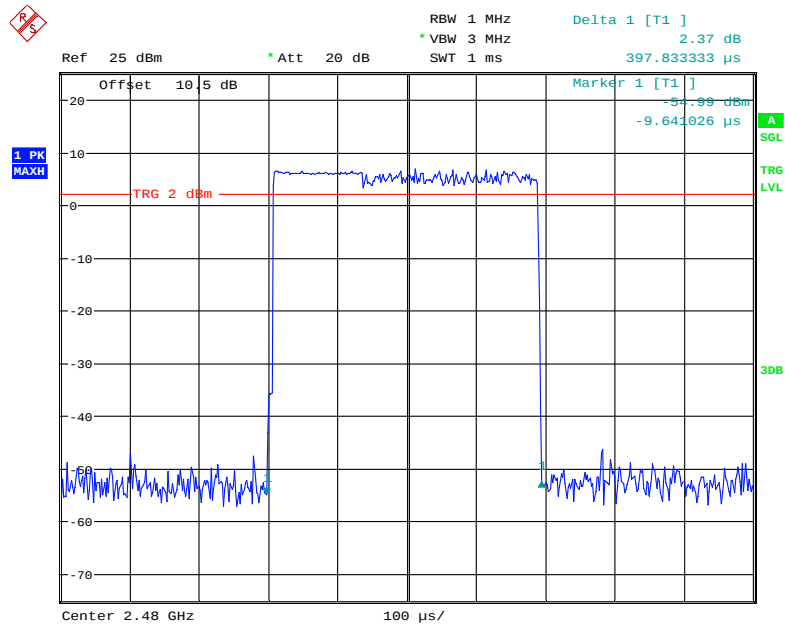


Date: 14.DEC.2018 21:48:47

Pulse time, Low Channel, 3DH3

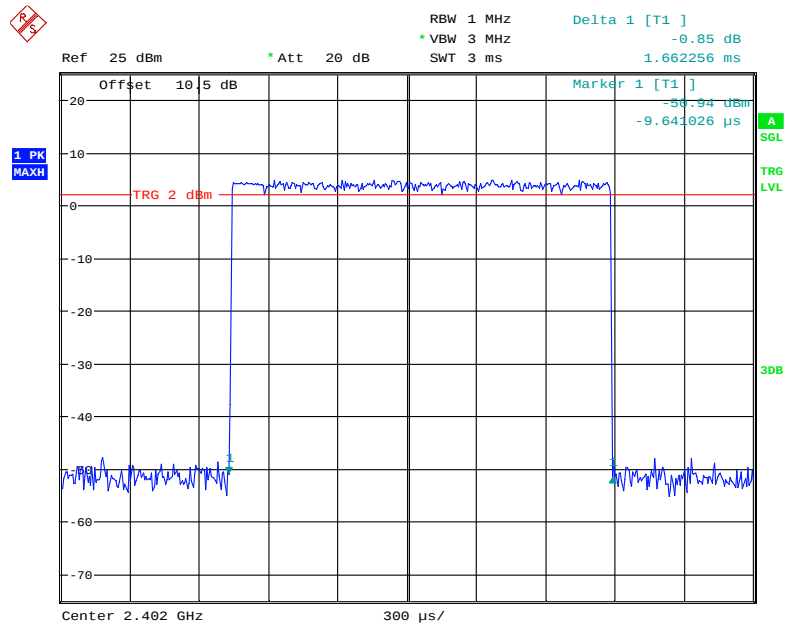


Date: 14.DEC.2018 21:50:42

Pulse time, Middle Channel, 3DH3

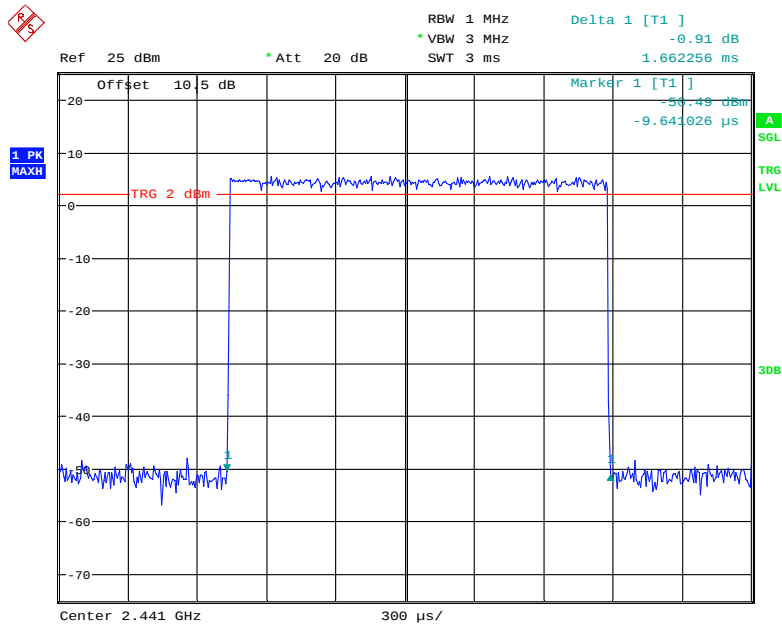


Date: 14.DEC.2018 21:51:04

Pulse time, High Channel, 3DH3

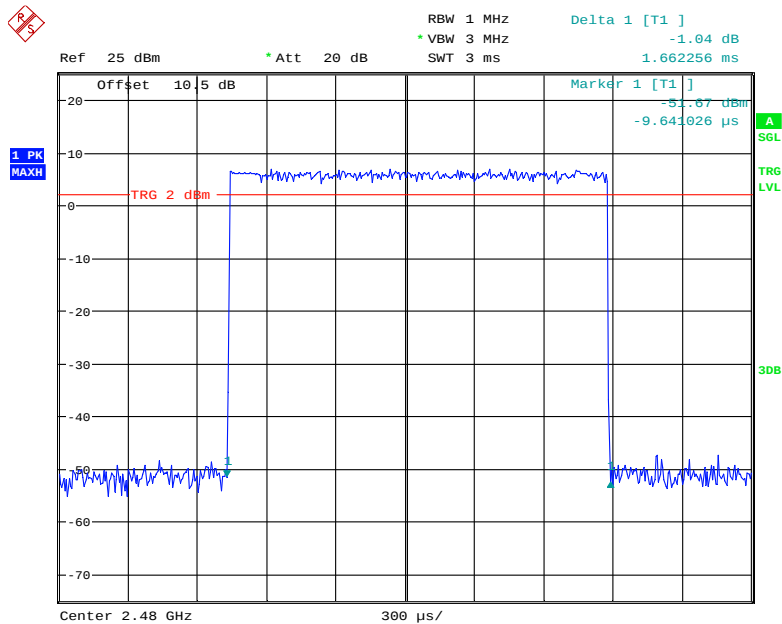


Date: 14.DEC.2018 21:51:20

Pulse time, Low Channel, 3DH5

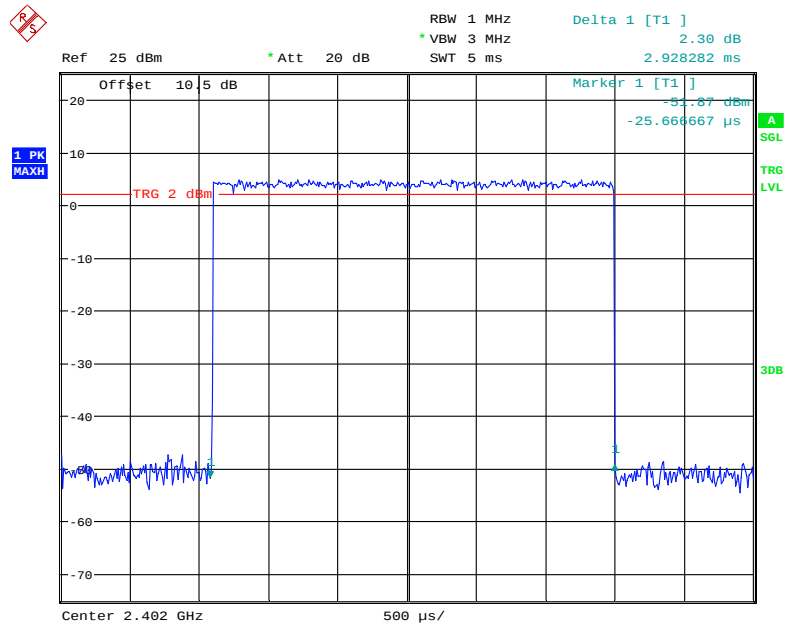


Date: 14.DEC.2018 22:05:29

Pulse time, Middle Channel, 3DH5

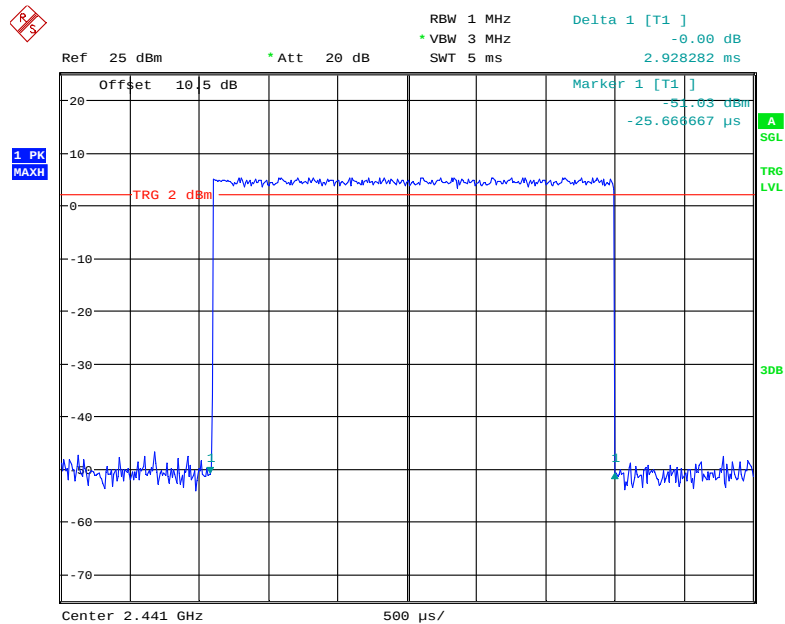

Date: 14.DEC.2018 22:05:13

Pulse time, High Channel, 3DH5

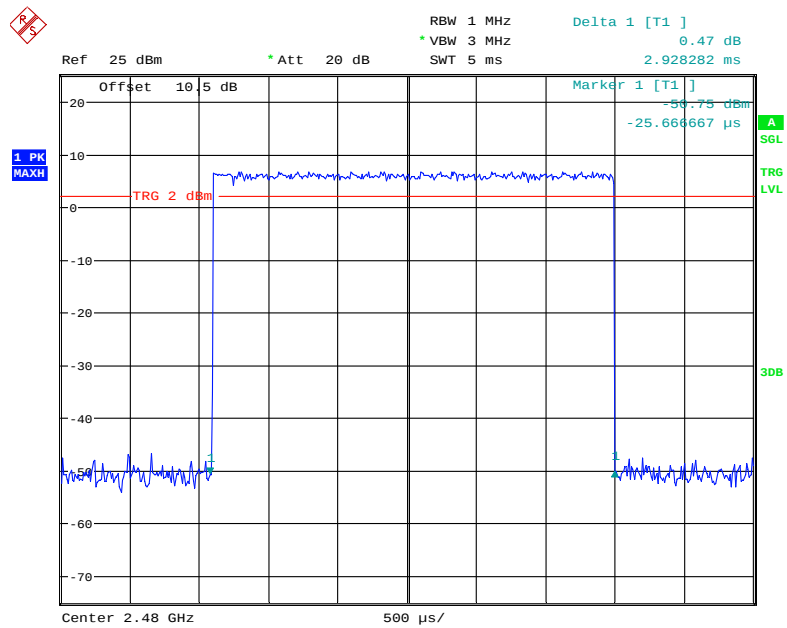

Date: 14.DEC.2018 22:04:52

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-12-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	5.66	3.68	125
	Middle	2441	6.29	4.26	125
	High	2480	7.81	6.04	125
EDR ($\pi/4$-DQPSK)	Low	2402	5.07	3.21	125
	Middle	2441	5.72	3.73	125
	High	2480	7.21	5.26	125
EDR (8DPSK)	Low	2402	5.60	3.63	125
	Middle	2441	6.17	4.14	125
	High	2480	7.65	5.82	125

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-12-14.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following plots.

BDR (GFSK): Band Edge-Left Side Hopping

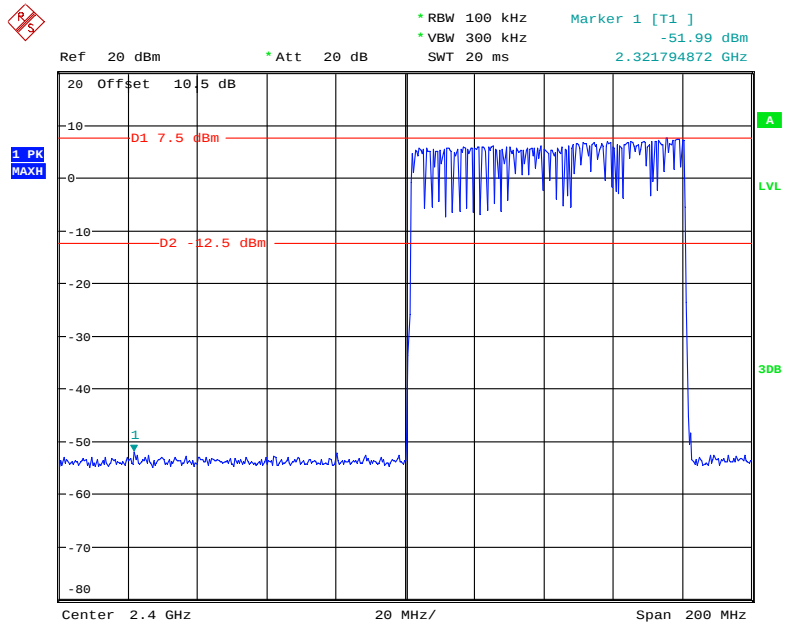


Date: 14.DEC.2018 21:06:15

Single

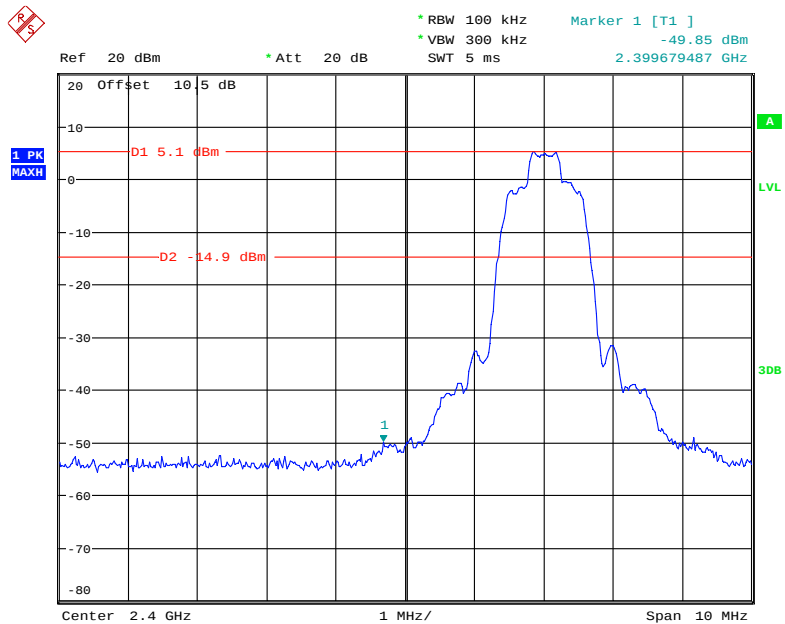


Date: 14.DEC.2018 20:58:34

BDR (GFSK): Band Edge-Right Side Hopping

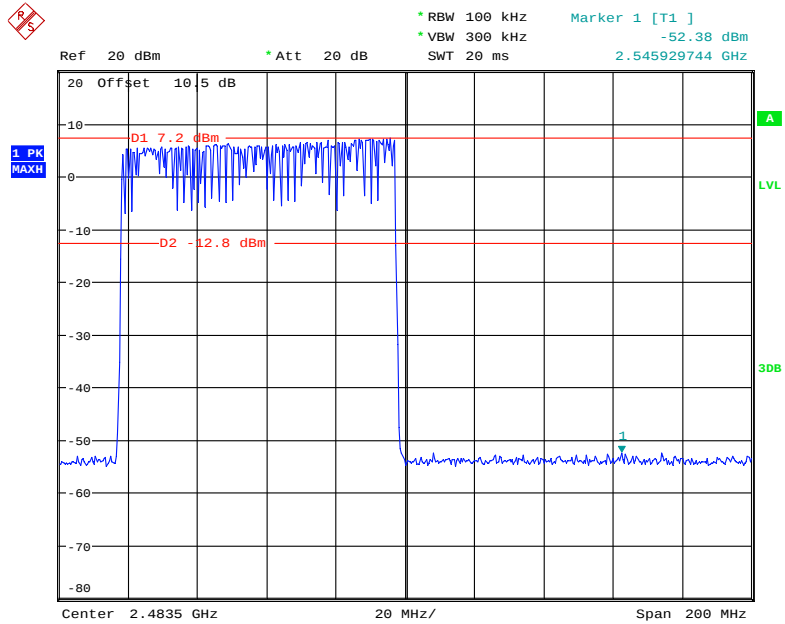


Date: 14.DEC.2018 21:02:32

Single

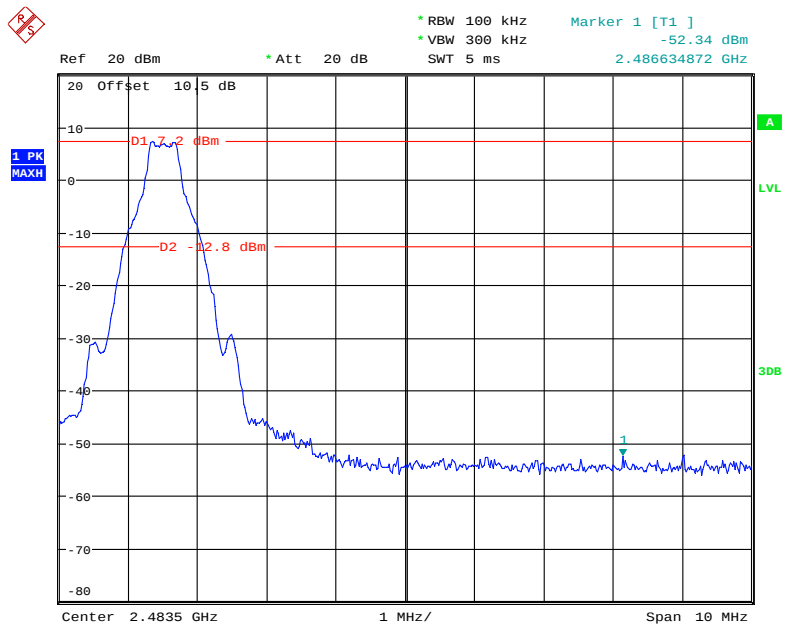


Date: 14.DEC.2018 21:00:04

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side Hopping

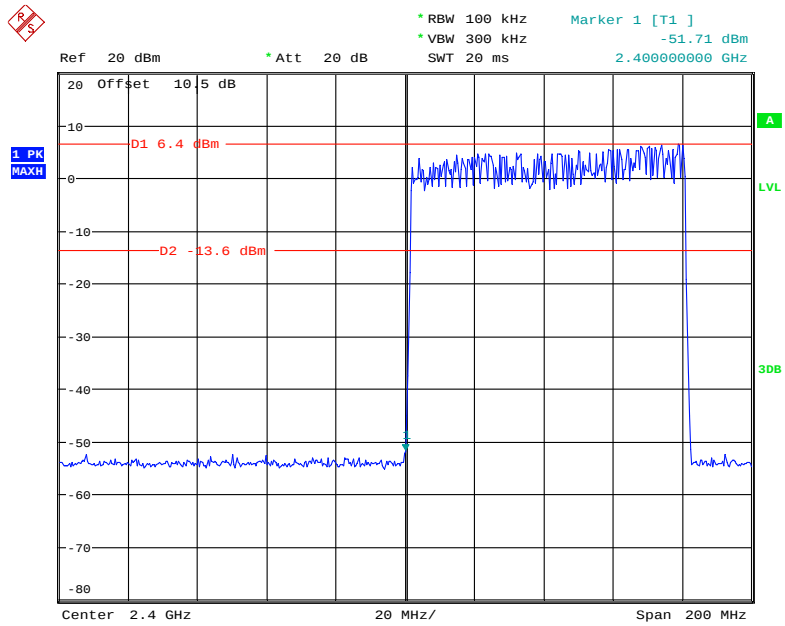


Date: 14.DEC.2018 20:52:11

Single

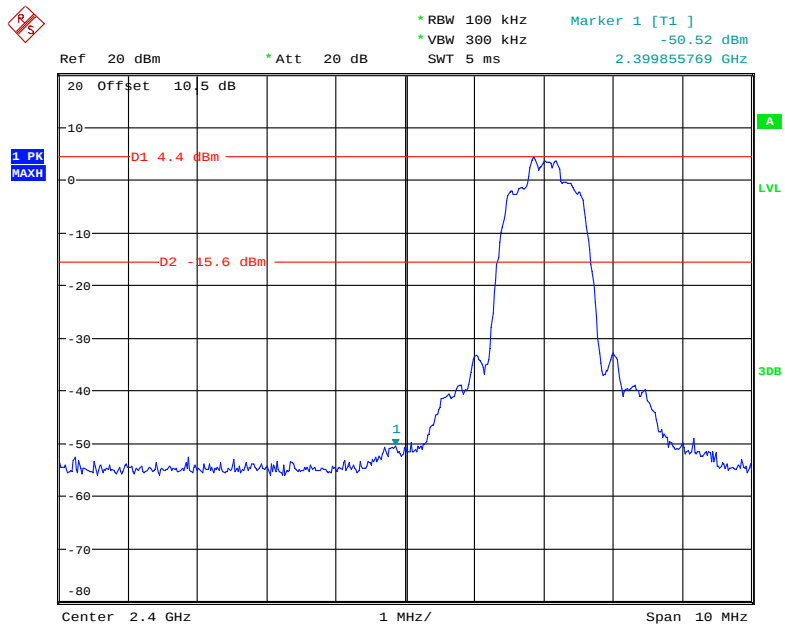


Date: 14.DEC.2018 20:56:23

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side Hopping

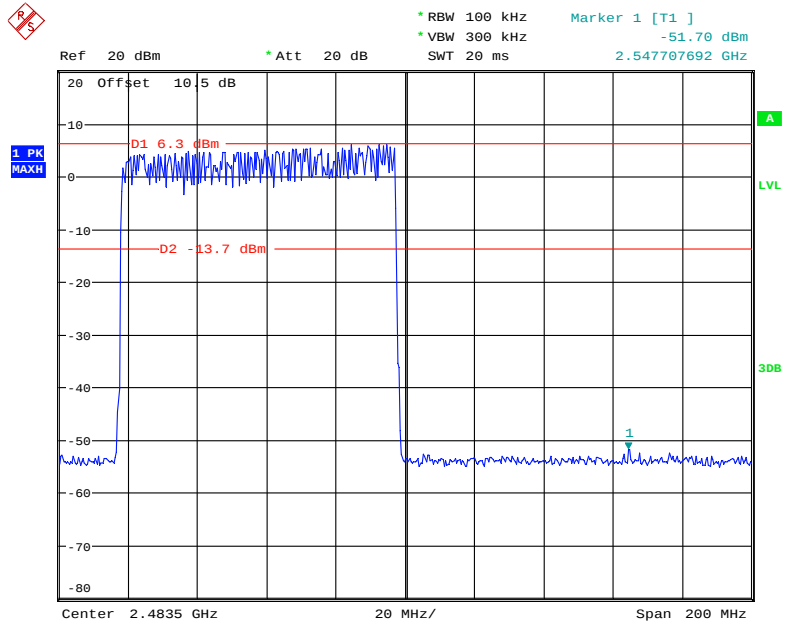


Date: 14.DEC.2018 20:54:28

Single

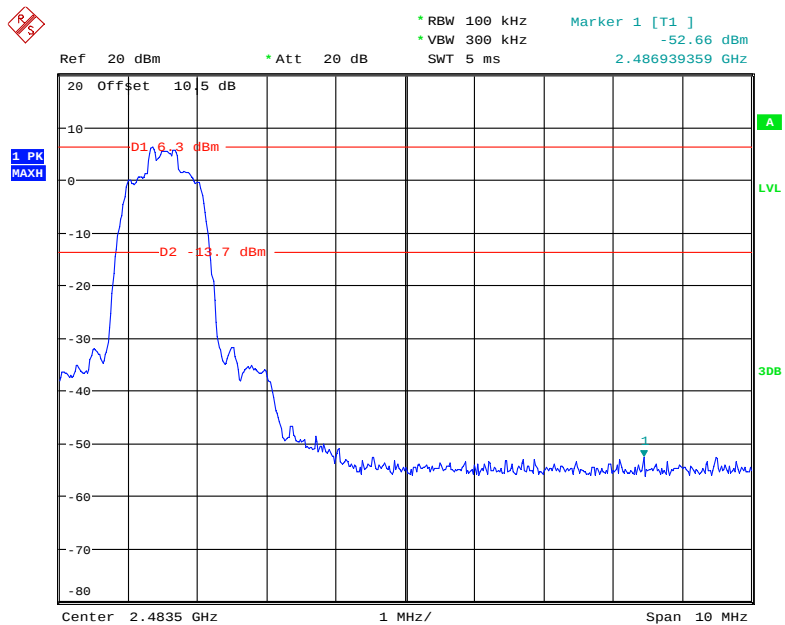


Date: 14.DEC.2018 20:55:08

EDR (8DPSK): Band Edge-Left Side Hopping

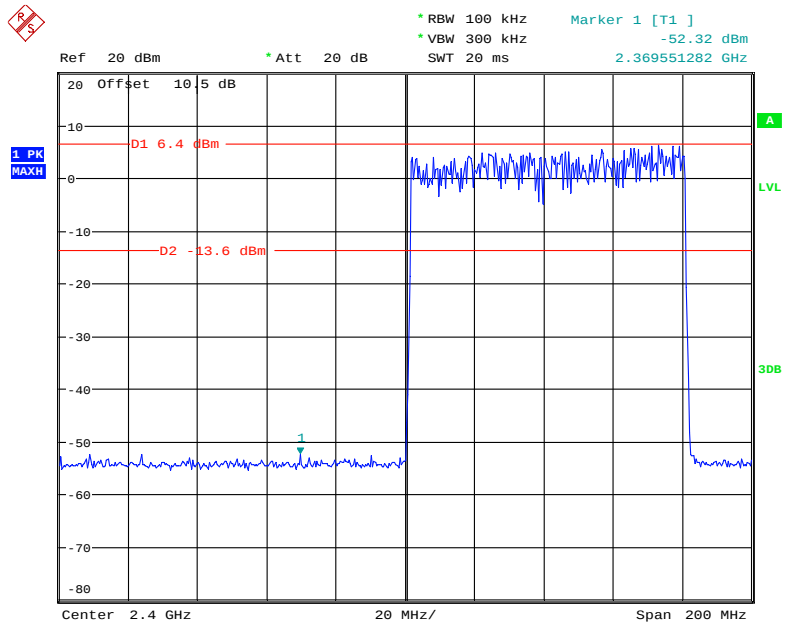


Date: 14.DEC.2018 20:49:33

Single

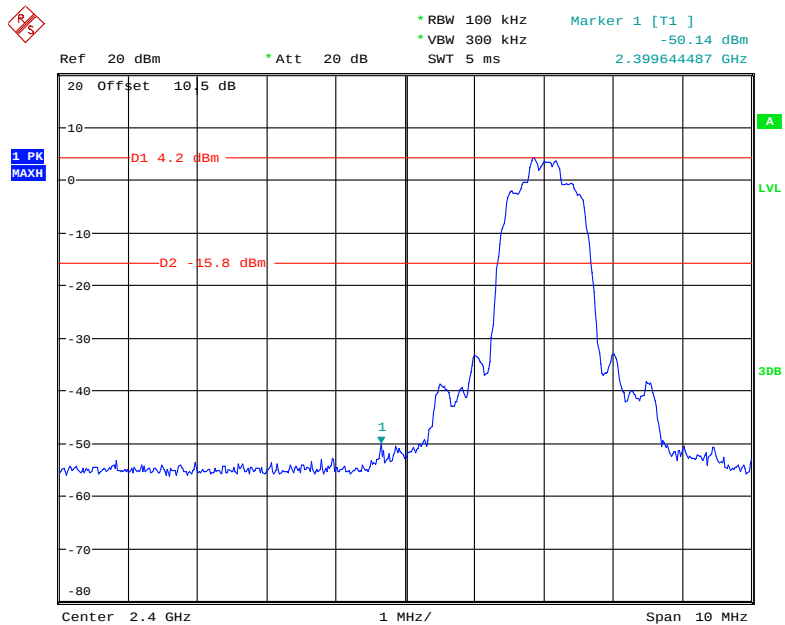


Date: 14.DEC.2018 20:43:12

EDR (8DPSK): Band Edge-Right Side Hopping

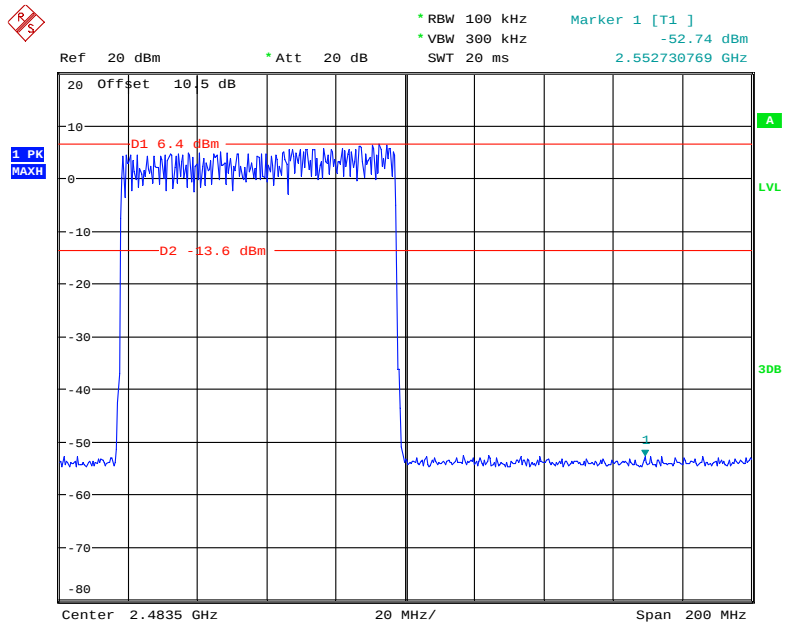

Date: 14.DEC.2018 20:47:58

Single

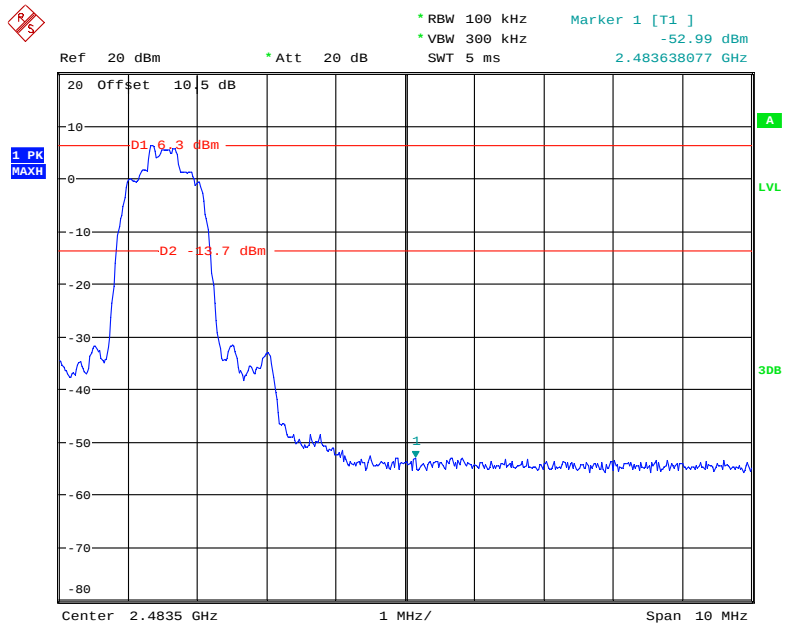

Date: 14.DEC.2018 20:44:26

***** END OF REPORT *****