



Willow Run (WR) Test Labs, Inc.  
7117 Fieldcrest Dr.  
Brighton, Michigan 48116 USA  
Tel: (734) 252-9785  
Fax: (734) 926-9785  
e-mail: info@wrtest.com

Testing of

## Electromagnetic Emissions

per

USA:	CFR Title 47, Part 15.519	(Emissions)
USA:	CFR Title 47, Part 2.1091;2.1093	(Exposure)
Canada:	ISED RSS-220	(Emissions)
Canada:	ISED RSS-102	(Exposure)

are herein reported for

### Lear Corporation

### KOBJXF18A

Test Report No.: 20170616-RPTWAC0100054Br0

Copyright © 2017

Applicant/Provider:

Lear Corporation

21557 Telegraph Road Building 100, Southfield Michigan 48033 USA

Phone: +1 (248) 447-1357, Fax: +1 (248) 447-1683

Contact Person: Jason Summerford; jsummerford@lear.com

Data Recorded by:

Dr. Joseph Brunett, EMC-002790-NE

Reviewed by:

Dr. Joseph Brunett, EMC-002790-NE

Prepared by:

Dr. Joseph Brunett, EMC-002790-NE

Date of Issue: June 16, 2017

**Results of testing completed on (or before) April 10, 2017 are as follows.**

**Emissions:** The transmitter intentional emissions **COMPLY** with the regulatory limit(s) by no less than 1.5 dB. Transmit chain spurious or harmonic emissions **COMPLY** by no less than 4.7 dB. Unintentional spurious emissions from digital circuitry **COMPLY** with radiated emission limit(s) by at least 20 dB.

## Revision History

Rev. No.	Date	Details	Revised By
r0	June 16, 2017	Split from A report + updates.	J. Brunett

## Contents

<b>Revision History</b>	<b>2</b>
<b>Table of Contents</b>	<b>2</b>
<b>1 Test Report Scope and Limitations</b>	<b>4</b>
1.1 Laboratory Authorization . . . . .	4
1.2 Report Retention . . . . .	4
1.3 Subcontracted Testing . . . . .	4
1.4 Limitation of Results . . . . .	4
1.5 Copyright . . . . .	4
1.6 Endorsements . . . . .	4
1.7 Test Location . . . . .	5
1.8 Traceability and Equipment Used . . . . .	5
<b>2 Test Specifications and Procedures</b>	<b>6</b>
2.1 Test Specification and General Procedures . . . . .	6
<b>3 Configuration and Identification of the Equipment Under Test</b>	<b>7</b>
3.1 Description and Declarations . . . . .	7
3.1.1 EUT Configuration . . . . .	7
3.1.2 Modes of Operation . . . . .	7
3.1.3 Variants . . . . .	8
3.1.4 Test Samples . . . . .	8
3.1.5 Functional Exerciser . . . . .	8
3.1.6 Modifications Made . . . . .	8
3.1.7 Production Intent . . . . .	8
3.1.8 Declared Exemptions and Additional Product Notes . . . . .	8
<b>4 Emissions</b>	<b>9</b>
4.1 General Test Procedures . . . . .	9
4.1.1 Radiated Test Setup and Procedures . . . . .	9
4.1.2 Conducted Emissions Test Setup and Procedures . . . . .	11
4.1.3 Power Supply Variation . . . . .	11
4.1.4 Thermal Variation . . . . .	11
4.2 Intentional Emissions . . . . .	12
4.2.1 Fundamental Emission Pulsed Operation . . . . .	12
4.2.2 Fundamental Emission Bandwidth . . . . .	15
4.2.3 Fundamental Emission Field Strength . . . . .	16
4.2.4 Exposure and Potential Health Hazard . . . . .	17
4.3 Unintentional Emissions . . . . .	18
4.3.1 Transmit Chain Spurious Emissions . . . . .	18
4.3.2 Radiated Digital Spurious . . . . .	22
<b>5 Measurement Uncertainty</b>	<b>23</b>

## List of Tables

1	Test Site List. . . . .	5
2	Equipment List. . . . .	5
3	EUT Declarations. . . . .	7
4	Fundamental Emission Pulsed Operation. . . . .	12
5	Fundamental Emission Bandwidth. . . . .	15
6	Fundamental Emission Field Strength. . . . .	16
7	Electromagnetic Field Exposure. . . . .	17
8	Transmit Chain Spurious Emissions. . . . .	18
8	Transmit Chain Spurious Emissions. . . . .	19
8	Transmit Chain Spurious Emissions. . . . .	19
8	Transmit Chain Spurious Emissions. . . . .	20
8	Transmit Chain Spurious Emissions. . . . .	21
9	Measurement Uncertainty. . . . .	23

## List of Figures

1	Photos of EUT. . . . .	7
2	EUT Test Configuration Diagram. . . . .	8
3	Radiated Emissions Diagram of the EUT. . . . .	9
4	Radiated Emissions Test Setup Photograph(s). . . . .	10
5	Fundamental Emission Pulsed Operation. . . . .	13
5	Fundamental Emission Pulsed Operation. . . . .	14
6	Fundamental Emission Bandwidth. . . . .	15

## **1 Test Report Scope and Limitations**

### **1.1 Laboratory Authorization**

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: 688478) and with ISED Canada, Ottawa, ON (File Ref. No: IC8719A-1 and IC22227-1).

### **1.2 Report Retention**

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until June 2027.

### **1.3 Subcontracted Testing**

This report does not contain data produced under subcontract.

### **1.4 Limitation of Results**

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

### **1.5 Copyright**

This report shall not be reproduced, except in full, without the written approval of Willow Run (WR) Test Labs, Inc..

### **1.6 Endorsements**

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

## 1.7 Test Location

The EUT was fully tested by **Willow Run (WR) Test Labs, Inc.**, 7117 Fieldcrest Dr., Brighton, Michigan 48116 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report.

Table 1: Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	8501 Beck Rd. Bldg 2227, Belleville MI 48111	OATSA

## 1.8 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Willow Run (WR) Test Labs, Inc. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Last Cal By / Date Due
Spectrum Analyzer	Rohde & Schwarz / FSV30	101660	RSFSV30001	RS / May-2018
Spectrum Analyzer	Rohde & Schwarz / FSV4	101222	RSFSV4001	RS / Mar-2018
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Lib. Labs / Aug-2017
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Lib. Labs / Aug-2017
Quad Ridge Horn	ETS Lind. / 3164-04	00066988	HRNQR316401	Lib. Labs / Aug-2017
Quad Ridge Horn	Singer / A6100	C35200	HQR2TO18S01	Lib. Labs / Aug-2017
K-Band Horn	JEF / NRL Std.	001	HRNK01	WRTL / Jul-2017
Ka-Band Horn	JEF / NRL Std.	001	HRNKA001	WRTL / Jul-2017

## 2 Test Specifications and Procedures

### 2.1 Test Specification and General Procedures

The ultimate goal of Lear Corporation is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Lear Corporation KOB-JXF18A for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.519
Canada	ISED Canada	ISED RSS-220

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
ANSI C63.10:2013 (USA)	"American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
CFR 47 2.1091/1093	"447498 D01 General RF Exposure Guidance v06: RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices"
ISED Canada	"The Measurement of Occupied Bandwidth"
ICES-003; Issue 6 (2016)	"Information Technology Equipment (ITE) Limits and methods of measurement"
ISED Canada RSS-102	"Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)"
ISED Canada SPR-002	"Supplementary Procedure for Assessing Compliance with RSS-102 Nerve Stimulation Exposure Limits."

### 3 Configuration and Identification of the Equipment Under Test

#### 3.1 Description and Declarations

The equipment under test is an automotive UWB Transceiver. The EUT is approximately 5 x 3 x 1 cm in dimension, and is depicted in Figure 1. It is powered by 3 VDC Lithium coin-cell battery. In use, this device is hand held. Table 3 outlines provider declared EUT specifications.



Figure 1: Photos of EUT.

Table 3: EUT Declarations.

General Declarations			
<b>Equipment Type:</b>	UWB Transceiver	<b>Country of Origin:</b>	Spain
<b>Nominal Supply:</b>	3 VDC	<b>Oper. Temp Range:</b>	-40°C to +85°C
<b>Frequency Range:</b>	3615 – 4337 MHz	<b>Antenna Dimension:</b>	3 cm
<b>Antenna Type:</b>	Integral	<b>Antenna Gain:</b>	Chip (UWB)
<b>Number of Channels:</b>	1(UWB)	<b>Channel Spacing:</b>	None
<b>Alignment Range:</b>	Not Declared	<b>Type of Modulation:</b>	PPM(UWB)
United States			
<b>FCC ID Number:</b>	KOBJXF18A	<b>Classification:</b>	DSC, UWB
Canada			
<b>IC Number:</b>	3521A-JXF18A	<b>Classification:</b>	Remote Control Device, UWB Device

##### 3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

##### 3.1.2 Modes of Operation

There are two principle modes of operation for this device. The first mode (UHF-MODE) is addressed in WRTL report 20170411-RPTWAC0100054Ar4.

The second principle mode addressed herein is that of a UWB transceiver (UWB-MODE) which is automatically activated upon detection of an encoded 125 kHz LF signal from a paired RFA module within the vehicle. The UWB-MODE then sends inquiry frames to paired in-vehicle UWB transceivers (SATs) which triangulate the position of the keyfob for passive entry and passive start operations. In normal operation the EUT sends a single PPM UWB frame as an inquiry to and then as a response to a paired SAT. If no SAT is present, the EUT will continue to inquire for no more than 1 second.

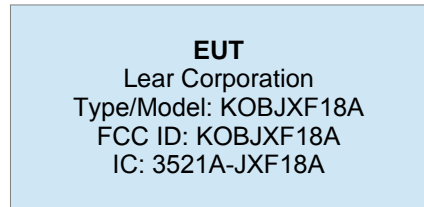


Figure 2: EUT Test Configuration Diagram.

### 3.1.3 Variants

There is only a single variant of the EUT, as tested.

### 3.1.4 Test Samples

Four samples of the EUT were provided for testing. One normal operating sample paired with a corresponding SAT UWB transceiver and RFA UHF receiver for encoding and timing tests, one software modified sample capable of transmitting UWB frames repeatedly at a higher than normal rate (once every 10 ms), a third sample with custom UHF CW and continuously modulated UHF transmitter modes (see WRTL report 20170411-RPTWAC0100054Ar4 for details), and a fourth sample apart for photographs.

### 3.1.5 Functional Exerciser

EUT functionality was verified by observation of transmitted signal.

### 3.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory.

### 3.1.7 Production Intent

The EUT appears to be a production ready sample.

### 3.1.8 Declared Exemptions and Additional Product Notes

None.



## 4 Emissions

### 4.1 General Test Procedures

#### 4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our shielded anechoic chamber or GTEM test cell. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.7 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded.

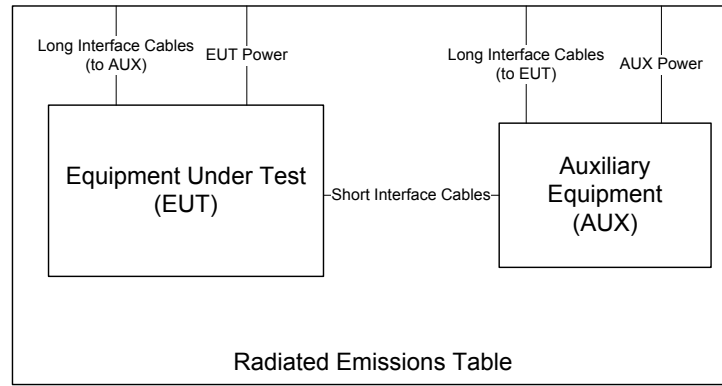


Figure 3: Radiated Emissions Diagram of the EUT.

If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, a shielded loop antenna is used. It is placed at a 1 meter receive height. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain horn or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of H-4 absorber placed over the ground screen covering the OATS ground screen. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dBμV/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where  $P_R$  is the power recorded on spectrum analyzer, in dBm,  $K_A$  is the test antenna factor in dB/m,  $K_G$  is the combined pre-amplifier gain and cable loss in dB,  $K_E$  is duty correction factor (when applicable) in dB, and  $C_F$  is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

When microwave measurements are made at a range different than the regulatory distance or made at close-range to improve receiver sensitivity, the reading is corrected back to the regulatory distance. This is done using a 20 dB/decade field behavior as dictated by the test procedures. When measurements are made in the near-field, the near-field/far-field boundary ( $N/F$ ) is reported. It is computed as

$$N/F = 2D^2/\lambda$$

where  $D$  is the maximum dimension of the transmitter or receive antenna, and  $\lambda$  is the wavelength at the measurement frequency. Typically for high frequency measurements the receive antenna is connected to test receiver / analyzer through an external mixer. In this case, cable loss, IF amplifier gain, and mixer conversion losses are corrected for in the data table, or directly in the spectrum analyzer.



Figure 4: Radiated Emissions Test Setup Photograph(s).

#### 4.1.2 Conducted Emissions Test Setup and Procedures

**Battery Power Conducted Spurious** The EUT is not subject to measurement of power line conducted emissions as it is powered solely by its internal battery.

#### 4.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than  $\pm 10\%$  of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

#### 4.1.4 Thermal Variation

Tests at extreme temperatures are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report. The provider has declared that the EUT is designed for operation over the temperature range  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . Before any temperature measurements are made, the equipment is allowed to reach a thermal balance in the test chamber, temperature and humidity are recorded, and thermal balance is verified via a thermocouple-based probe.

## 4.2 Intentional Emissions

### 4.2.1 Fundamental Emission Pulsed Operation

**Test Setup & Procedure** The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Duty cycle is measured using the maximum possible receiver IFBW for the purpose of computing RF exposure compliance and documenting the encoding employed by the EUT. The test equipment employed includes RSFSV30001, HRNQR316401.

**Measurement Results** The details and results of testing the EUT are summarized in Table 4. Plots showing the measurements made to obtain these values are provided in Figure 5.

Table 4: Fundamental Emission Pulsed Operation.

**Frequency Range**  
f > 1 000 MHz

**Det**  
Pk

**IFBW**  
28 MHz

**VBW**  
28 MHz

**Test Date:** 23-Mar-17  
**Test Engineer:** Joseph Brunett  
**EUT** Normal Operating  
**Meas. Distance:** 60 cm

Pulsed Operation / Duty Cycle									
Transmit Mode	Voltage	Oper. Freq	Min. Cycle Time	Total Off-Time/s*	EN 302-065-3 Total Off-Time/s Limit	Mean Off-Time Limit	On-Time**	EN 302-065-3 On-Time LDC Limit	Exposure Duty Correction***
	(V)	(MHz)	(ms)	(ms)	(ms)	(ms)	(ms)	(ms)	(dB)
UWB PPM (Paired) subfigure (c)	3.0	3993.6	21.10	998.77	950.00	38.00	1.23	5.00	12.3
UWB PPM (Unpaired) subfigure (d)	3.0	3993.6	10.40	999.69	950.00	38.00	0.31	5.00	15.3

\* Total Off-time/sec is equal to 1000ms – duration of the four frames observed due to a single manual activation per second (maximum possible repetition rate of system unlock response time observed by test laboratory > 1 sec).

\*\* Maximum two-frame on-time measured.

\*\*\* Worst-case Exposure duty cycle correction (due to burst-modulated carrier) computed as  $10 \cdot \log(\text{On-Time} / \text{Min Cycle-Time})$ . Overestimate due to finite transmission length of only four frames in the actual paired use system.

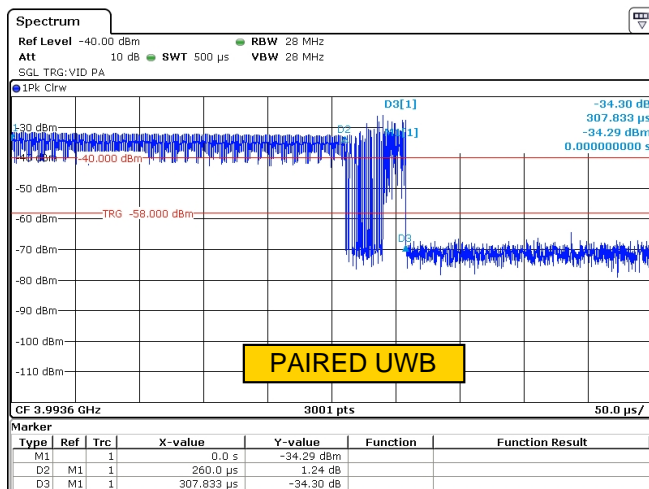
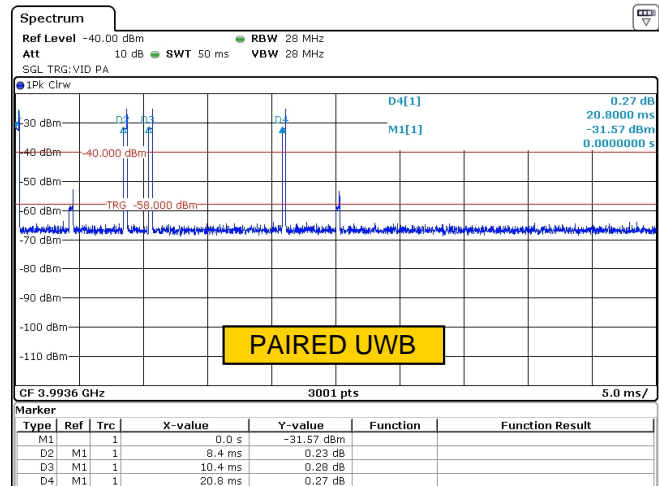
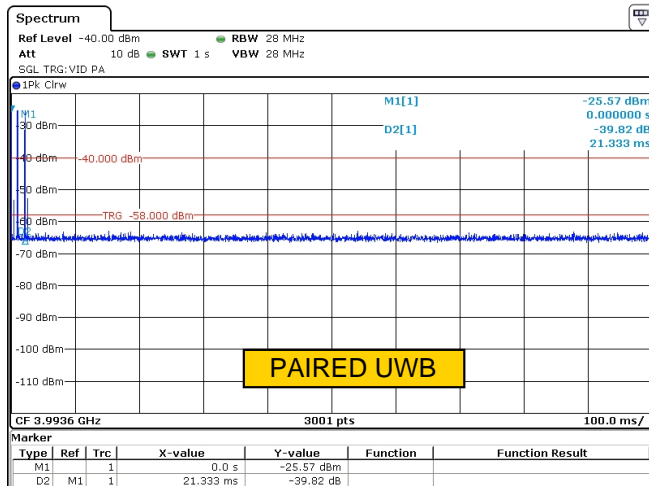


Figure 5(a): Fundamental Emission Pulsed Operation.

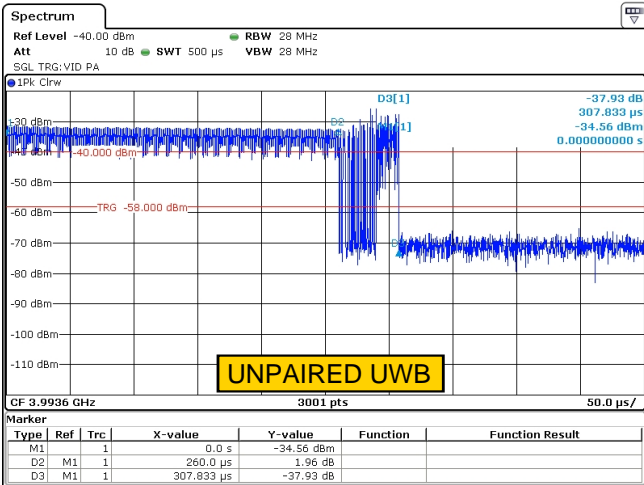
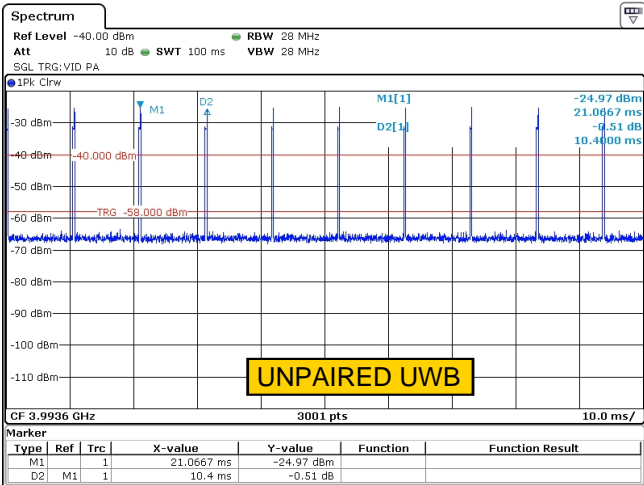
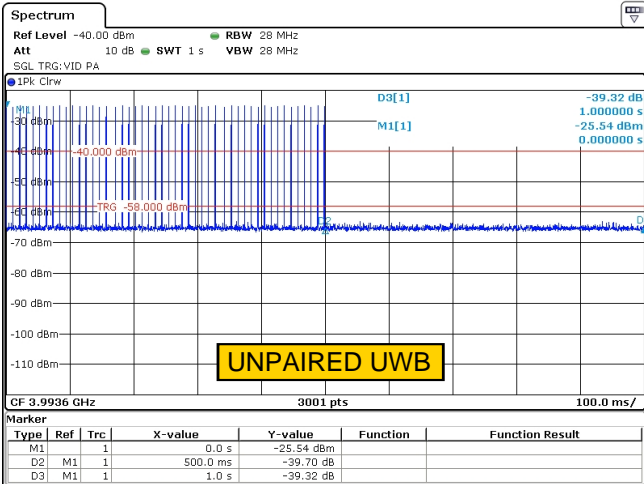
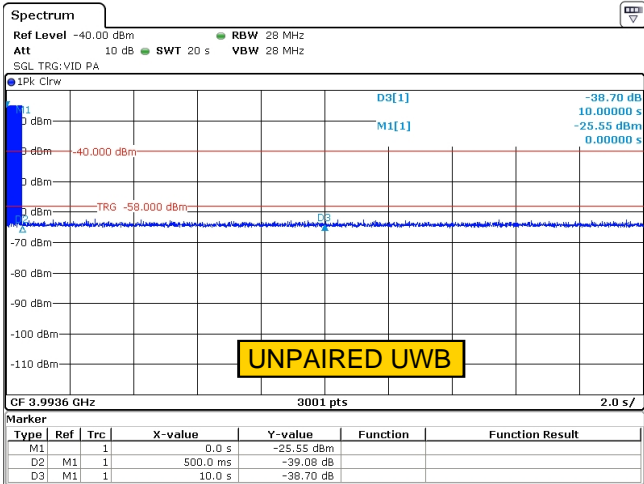


Figure 5(b): Fundamental Emission Pulsed Operation.

## 4.2.2 Fundamental Emission Bandwidth

**Test Setup & Procedure** The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Emission bandwidth (EBW) of the EUT is measured following the UWB measurement procedures in ANSI C63.10:2013/RSS-220. The test equipment employed includes RSFSV30001, HRNQR316401.

**Measurement Results** The details and results of testing the EUT are summarized in Table 5. Plots showing the measurements made to obtain these values are provided in Figure 6.

Table 5: Fundamental Emission Bandwidth.

<b>Frequency Range</b>		<b>Det</b>	<b>IFBW</b>	<b>VBW</b>	<b>Span</b>	<b>Test Date:</b>		23-Mar-17	
f < 1 000 MHz		Pk	30 kHz	100 kHz	3 MHz	<b>Test Engineer:</b>		Joseph Brunett	
f > 1 000 MHz		Pk	1 MHz	3 MHz	1 GHz	<b>EUT</b>		Lear PEPS UWB Fob	
						<b>Meas. Distance:</b>		60 cm	

UWB Occupied Bandwidth													
Transmit Mode	Symbol Rate (Msym/s)	Data Rate (Mbps)	Voltage (V)	Oper. Freq (MHz)	99% OBW (MHz)	10 dB EBW (MHz)	10 dB EBW Limit (MHz)	fL (MHz)	fL Limit (MHz)	fH (MHz)	fH Limit (MHz)	fmax (MHz)	Pass/Fail
UWB PPM	-	-	3.0	3993.6	748.4	784.4	500.0	3574.4	3100.0	4358.8	10600.0	3838.3	Pass

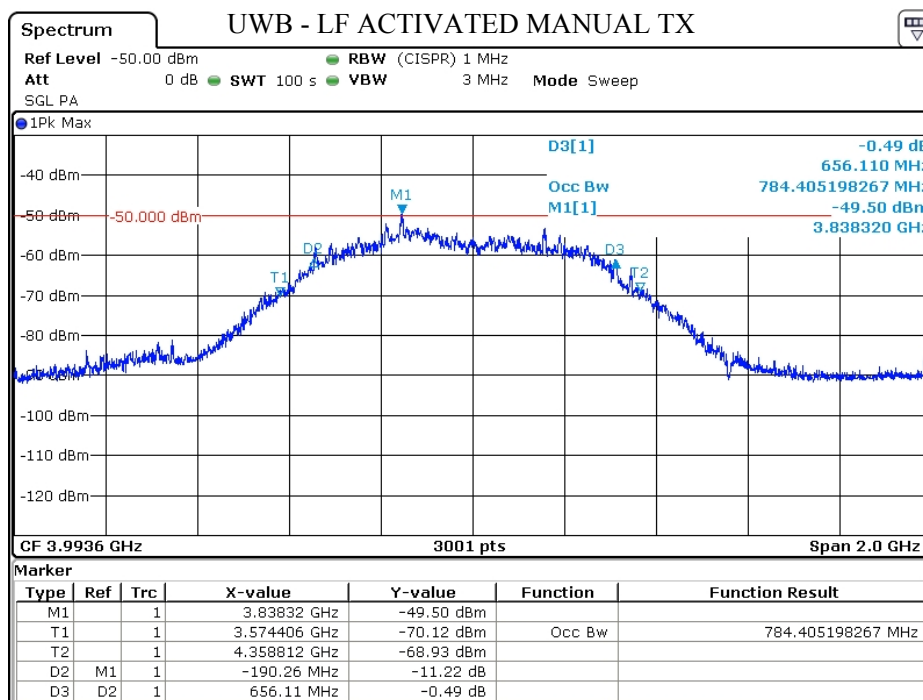


Figure 6: Fundamental Emission Bandwidth.

### 4.2.3 Fundamental Emission Field Strength

**Test Setup & Procedure** The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. The fundamental emission is measured at the regulatory distance on our OATS following the UWB measurement procedures in ANSI C63.10:2013/RSS-220. The test equipment employed includes RSFSV30001, HRNQR316401.

**Measurement Results** The details and results of testing the EUT are summarized in Table 6.

Table 6: Fundamental Emission Field Strength.

										<b>EUT Modes:</b> a1 UHF CW mode on Center Channel a2 UHF Normal Operating Mode – Manual Activation by button press. a3 UWB continuously modulated at higher than normal periodic rate, max frame width. a4 UWB Normal Operating Mode – Actuated by detection of LF interrogation.																					
<b>Test Date:</b> 03/22/17																															
<b>Test Engineer:</b> Joseph Brunett																															
R0	Frequency		Temp.	Site			CF	EUT		Test Antenna			Cable Kg	Receiver				Field Strength @ DR				EUT EIRP				Details					
	Start	Stop		MR	DR	N/F		Mode see table	Volt. (V)	Dim cm	Pol. H/V	Dim. cm		Ka dB/m	Rx Power Pk	Bandwidth RMS	RBW MHz	Pk Meas.	Limit USA	CAN	RMS Meas.	Limit USA	CAN	Meas.	Pk Limit USA		Limit CAN	RMS Meas.	Limit USA	Limit CAN	
	MHz	MHz	( C )	m		dB							dBuV/m		MHz														Pass Fail dB		
R1	SETUP		OATSA					LEAP PEPS					HRNQR316401			NOTES: NOTES: Max all orientations of EUT and both Test Antenna Polarizations															
R2	3837.0	3837.0	-2.0	3.0	3.0	1.2	0.0	a3	3.0	4.0	H/V	22.0	34.2	-0.4			28.00	28.00	88.9												
R3	3837.0	3837.0	-2.0	3.0	3.0	1.2	0.0	a3	3.0	4.0	H/V	22.0	34.2	-0.4			50.00	50.00	93.9						-1.3	.0	.0			1.3	
R4																															
R5	3837.0	3837.0	-2.0	3.0	3.0	1.2	0.0	a3	2.7	4.0	H/V	22.0	34.2	-0.4		1.00	3.00					52.4					-42.8	-41.3	-41.3	1.5	
R6	3837.0	3837.0	-2.0	3.0	3.0	1.2	0.0	a3	3.0	4.0	H/V	22.0	34.2	-0.4		1.00	3.00					52.5					-42.7	-41.3	-41.3	1.4	
R7	3837.0	3837.0	-2.0	3.0	3.0	1.2	0.0	a3	3.3	4.0	H/V	22.0	34.2	-0.4		1.00	3.00					52.4					-42.8	-41.3	-41.3	1.5	
R8																															
R9																															
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29	C30	C31
(ROW)	(COLUMN) NOTE:																														
R0	C4 MR is Measurement Range, which is reduced from DR to achieve necessary SNR.																														
R0	C5 DR is the regulatory Desired Range measurement distance.																														
R0	C6 N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) and Test Antenna dimension (C12), where applicable.																														
R0	C7 CF is computed using a 20 dB/decade Decay Rate.																														
R0	C15 When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings and Pr is not reported.																														
R2-R7	C19,C22 PEAK and RMS Power measured with 1 GHz Span, 1001 Freq Samples, 1 sec sweep, Max-Held.																														
R3	C19 Peak in 50 MHz BW computed from (R2;C19) using 20*log10(50MHz / 28MHz)																														
R5-7	C30 ISED Correspondence regarding this particular product permitted use at proposed power rating under RSS-220 Hand-Held Regulations. See correspondence included in this application.																														



#### 4.2.4 Exposure and Potential Health Hazard

To demonstrate compliance with regulations that place limitations on human electromagnetic field exposure for both the general public and for workers, we compute EIRP from measured emission data. These levels are compared with limits placed by the directives and recommendations detailed in Section 2.1. Table 7 details the results of these computations.

Table 7: Electromagnetic Field Exposure.

USA REF: 1.1310, 2.1091/1093, 447498 D01 General RF Exposure Guidance v06  
 IC REF: RSS-102 Issue 5, Safety Code 6  
 Min. Sep. Distance: <5 mm (Portable)

Test Date: 22-Mar-17  
 Test Engineer: Joseph Brunett  
 EUT: LEAR SAT 4  
 EUT Mode: Worst Case  
 Meas. Distance: See Fund. Power Table

Mode	Frequency Band		E-Field @ 3m (Avg) dBuV/m	EIRP (Avg) mW	H-Field @ MSP (Avg) dBuA/m	Canada ISSED RSS-102 MPE		MPE Ratio	USA FCC 1.1310 MPE		
	Start MHz	Stop MHz				SC6 Limit @ MSP dBuV/m	SC6 Limit @ MSP dBuA/m		SAR Threshold	SAR Threshold Limit	Worst Case MPE Ratio
Other											
Mode	Frequency Band		Pk EIRP + Duty (Avg/RMS) dBm	E-Field @ 20cm (RMS) dBuV/m	Pwr Density @ 20cm (RMS)* mW/cm2	EIRP + Duty (RMS) mW	Minimum 1g / 10g SAR Threshold Limit	MPE Ratio	SAR Threshold	Minimum 1g / 10g SAR Threshold Limit	MPE Ratio
UHF	314.7	315.3	-26.7	92.0	0.00000	0.00212	69.1			3	
UWB	3574.40	4358.80	-20.2	98.6	0.00000	0.00966	1.5	0.00644	0.00039	3	0.00013
IF SUM OF ALL MPE RATIOS IS > 1, THEN THE EUT MUST UNDERGO SAR TESTING PER FCC AND ISSED (IC) REGULATIONS.								MPE RATIO Total (<1):	.006	MPE RATIO Total (<1):	.000
* EIRP (mW) = S (mW/cm²) x 4 x PI x 20cm²								REQUIRES SAR TESTING	No	REQUIRES SAR TESTING	No

## 4.3 Unintentional Emissions

### 4.3.1 Transmit Chain Spurious Emissions

**Test Setup & Procedure** The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Spurious radiated emissions measurements are made following the UWB measurement procedures in ANSI C63.10:2013/RSS-220 up to 40 GHz. The test equipment employed includes RSFSV30001, BICEMCO01, LOGEMCO01, HRNQR316401, HQR2TO18S01, HRNK01, HRNKA01.

**Measurement Results** The details and results of testing the EUT are summarized in Table 8.

Table 8(a): Transmit Chain Spurious Emissions.

EUT Modes: a1 UHF CW mode on Center Channel a2 UHF Normal Operating Mode – Manual Activation by button press. a3 UWB continuously modulated at higher than normal periodic rate, max frame width. a4 UWB Normal Operating Mode – Actuated by detection of LF interrogation.																																
Test Date: 03/29/17 Test Engineer: Joseph Brunett																																
R0	Frequency		Temp. ( C )	Site			CF	EUT			Test Antenna			Cable Kg	Receiver			Field Strength @ DR				EUT EIRP				Details Pass Fail dB						
	Start	Stop		MR	DR	N/F		Mode see table	Volt.	Dim	Pol.	Dim.	Ka		Rx Power	Bandwidth	Meas.	Pk	Limit	Meas.	Pk	Limit	Meas.	Pk	Limit		Meas.	Pk	Limit			
	MHz	MHz			m				(V)	cm	H/V	cm	dB/m		dBm	RBW	VBW	USA	CAN	USA	CAN	USA	CAN	USA	CAN		USA	CAN	USA	CAN		
R1	SETUP:			OATSA				LEAR PEPs				BICEMC001				RSFSV4001				NOTES: All background noise												
R2	30.0	88.0	20	3.0	3.0	1.3	0.0	a3	3.0	4.0	H/V	150.0	16.9	35.0			0.1	0.3	32.1										40.0	40.0	7.9	
R3	88.0	216.0	20	3.0	3.0	3.2	0.0	a3	3.0	4.0	H/V	150.0	16.9	35.0			0.1	0.3	33.1										43.5	43.5	10.4	
R4	SETUP:			OATSA				LEAR PEPs				LOGEMC001				RSFSV4001				NOTES: Max all orientations of EUT, noise floor data												
R5	216.0	960.0	20	3.0	3.0	6.4	0.0	a3	3.0	4.0	H/V	100.0	20.1	29.9			0.1	0.3	38.0										46.0	46.0	8.0	
R6	SETUP:			OATSA				LEAR PEPs				HRNQ316401				RSFSV30001				NOTES: Max all orient. of EUT, noise floor data in R7-R11, measured signal R12, R13.												
R7	1164.0	1240.0	20	0.6	3.0	0.4	14.0	a3	3.0	4.0	H/V	22.0	25.2	-0.4			0.001	0.001	-3.0										-98.2	-85.3	12.9	
R8	1559.0	1610.0	20	0.6	3.0	0.5	14.0	a3	3.0	4.0	H/V	22.0	21.9	-0.4			0.001	0.001	-0.1										-95.3	-85.3	10.0	
R9	960.0	1610.0	20	0.6	3.0	0.5	14.0	a3	3.0	4.0	H/V	22.0	27.6	19.3			1	3	22.0			12.0							-73.2	-34.0	-75.3	7.9
R10	1610.0	1990.0	20	0.6	3.0	0.6	14.0	a3	3.0	4.0	H/V	22.0	21.7	19.1			1	3	26.1			15.9							-69.1	-34.0	-79.3	9.3
R11	1990.0	3100.0	20	0.6	3.0	1.0	14.0	a3	3.0	4.0	H/V	22.0	20.6	18.2			1	3	32.1			19.8							-63.1	-34.0	-75.4	5.4
R12	3100.0	3615.0	20	0.6	3.0	1.2	14.0	a3	3.0	4.0	H/V	22.0	27.4	18.0			1	3	53.9			41.1							-41.3	-34.0	-54.1	7.3
R13	4337.0	4750.0	20	0.6	3.0	1.5	14.0	a3	3.0	4.0	H/V	22.0	52.5	17.3			1	3	54.9			41.0							-40.3	-34.0	-54.2	6.3
R14	SETUP:			OATSA				LEAR PEPs				HQR2018S01				RSFSV30001				NOTES: Max all orientations of EUT, noise floor data												
R15	4750.0	10600.0	20	0.6	3.0	1.6	14.0	a3	3.0	4.0	H/V	15.0	35.3	29.1			1	3	25.2			15.1							-70.0	-34.0	-80.1	36.0
R16	10600.0	18000.0	20	0.6	3.0	2.7	14.0	a3	3.0	4.0	H/V	15.0	34.3	23.5			1	3	26.9			16.1							-68.3	-34.0	-79.1	17.8
R17	SETUP:			OATSA				LEAR PEPs				HRNK001				RSFSV30001				NOTES: Max all orientations of EUT, noise floor data												
R18	18000.0	26500.0	20	0.3	3.0	1.8	20.0	a3	3.0	4.0	H/V	10.2	33.7	36.5			1	3	33.1			23.8							-62.1	-34.0	-71.4	10.1
R19	SETUP:			OATSA				LEAR PEPs				HRNKA001				RSFSV30001				NOTES: Max all orientations of EUT, noise floor data												
R20	26500.0	40000.0	20	0.2	3.0	2.3	23.5	a3	3.0	4.0	H/V	9.2	37.2	12.5	39	28	1	3	42.5			29.2							-52.7	-34.0	-66.0	4.7
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29	C30	C31	
(ROW)	(COLUMN) NOTE:																															
R0	C4 MR is Measurement Range, which is reduced from DR to achieve necessary SNR.																															
R0	C5 DR is the regulatory Desired Range measurement distance.																															
R0	C6 N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) and Test Antenna dimension (C12), where applicable.																															
R0	C7 CF is computed using a 20 dB/decade Decay Rate.																															
R0	C15 When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings and Pr (C15/16) is not reported.																															
R19	C19,C22 PEAK and RMS Power measured with 1 GHz Span, 1001 Freq Samples, 1 sec sweep, Max-Held.																															
R20	C19 Peak in 50 MHz BW computed from (R19/C19) using 20*log10(50MHz / 28MHz)																															
R12-13	C30 ISED Correspondence regarding this particular product permitted use at proposed power rating under RSS-220 Hand-Held Regulations. See correspondence included in this application.																															

Table 8(b): Transmit Chain Spurious Emissions.

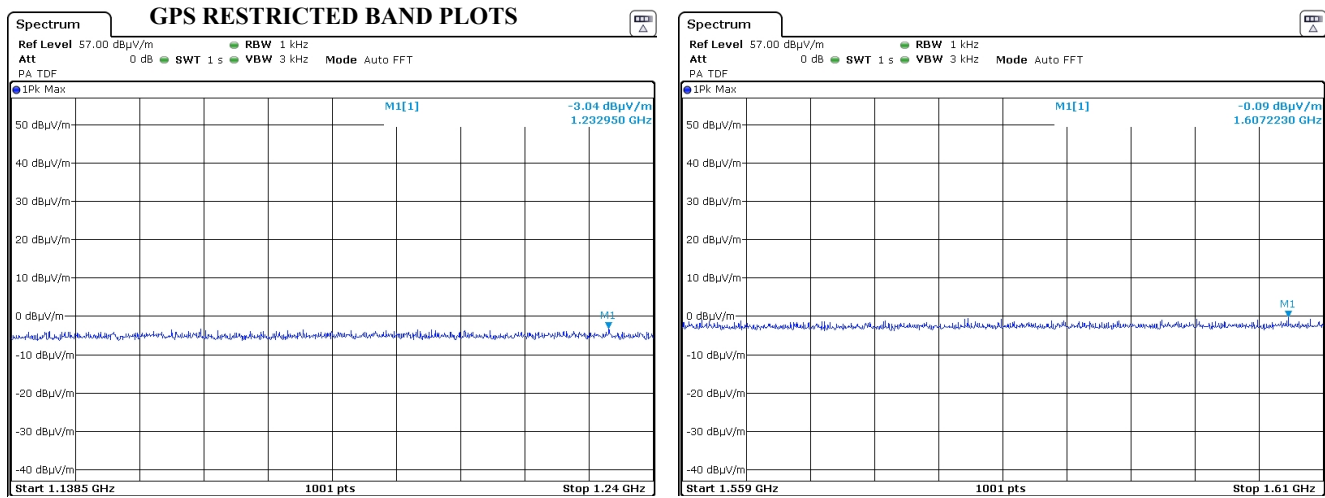


Table 8(c): Transmit Chain Spurious Emissions.

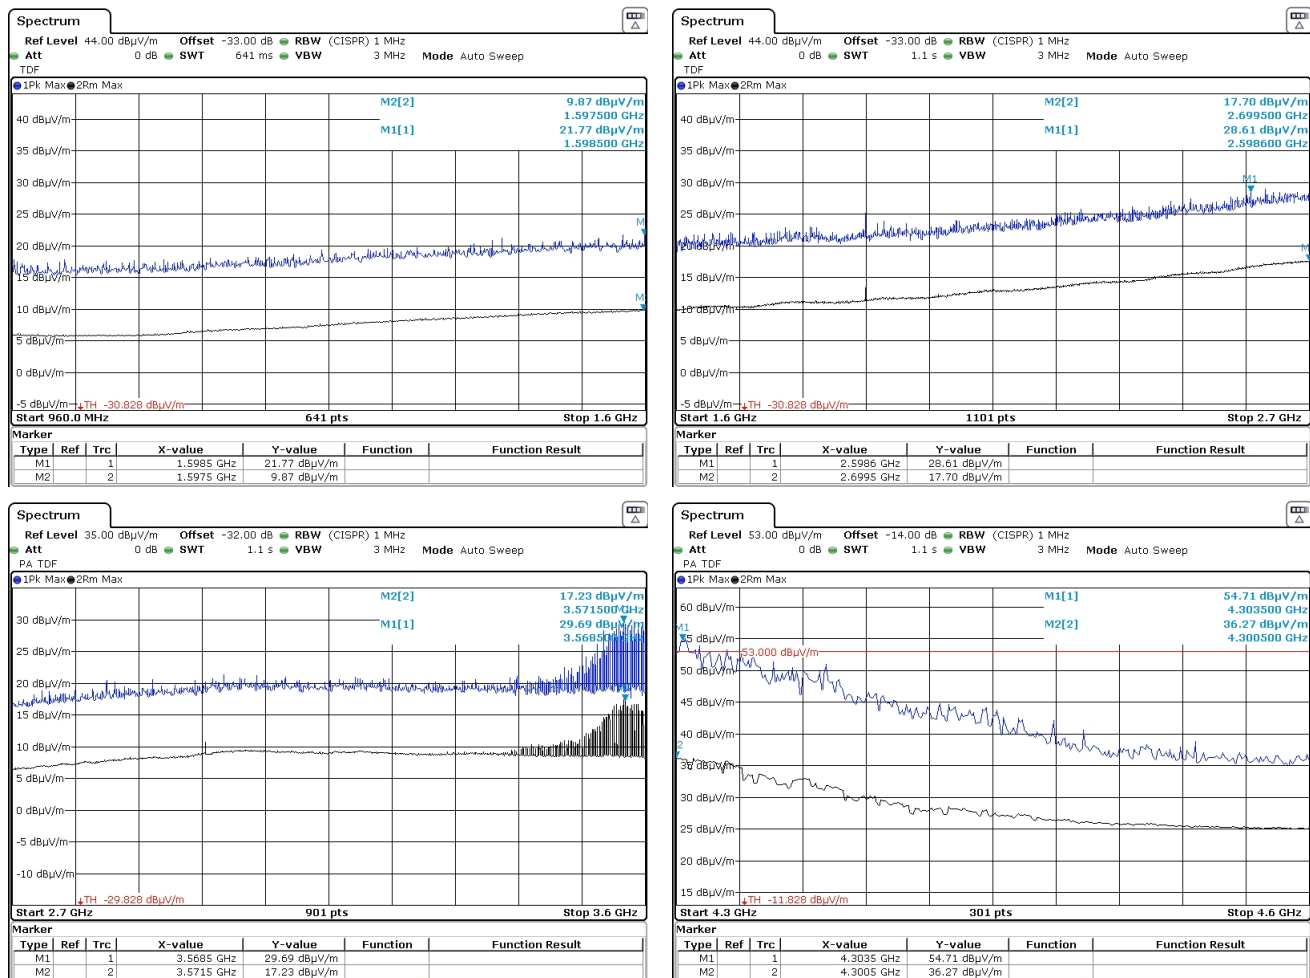
**INDOOR PRE-SCAN SPURIOUS**

Table 8(d): Transmit Chain Spurious Emissions.

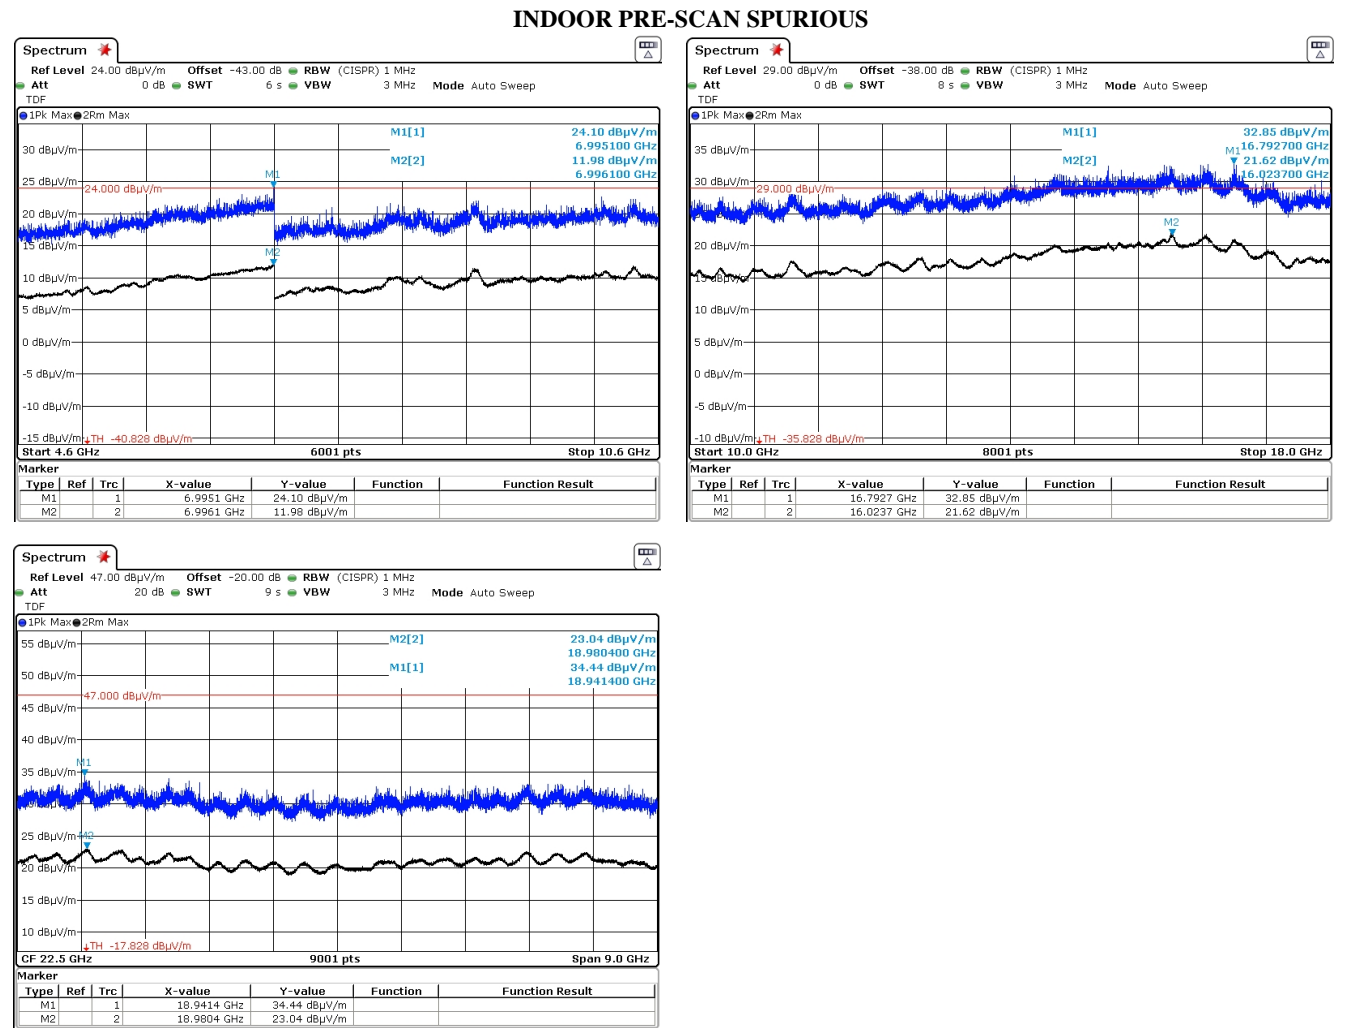
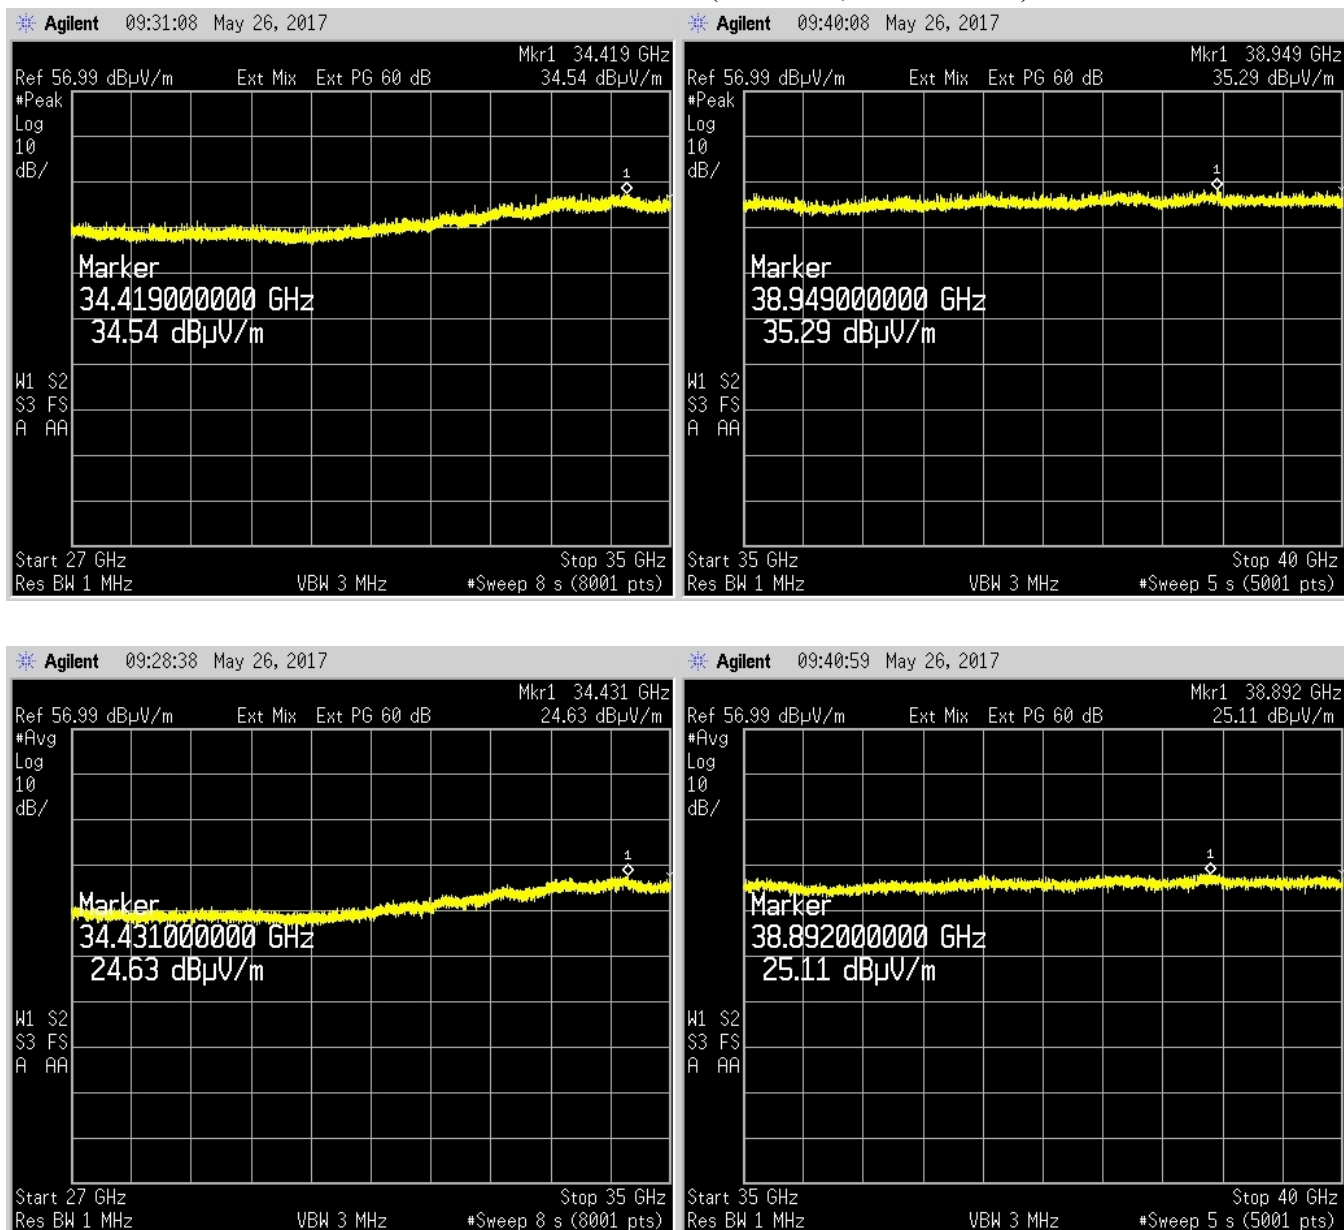


Table 8(e): Transmit Chain Spurious Emissions.

**INDOOR PRE-SCAN SPURIOUS (TOP PEAK, BOTTOM RMS)**

#### **4.3.2 Radiated Digital Spurious**

The results for the measurement of digital spurious emissions are not reported herein as all digital emissions were greater than 20 dB below the regulatory limit. Radiation from digital components was measured to 4 GHz, or to five times the maximum digital component operating frequency, whichever is greater.

## 5 Measurement Uncertainty

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of  $k = 2$ .

Table 9: Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty <sup>†</sup>
Radio Frequency	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$
Conducted Emm. Amplitude	$\pm 1.8 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm 2.7 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm 2.5 \text{ dB}$
Radiated Emm. Amplitude ( $f > 1000 \text{ MHz}$ )	$\pm 3.7 \text{ dB}$
DC and Low Frequency Voltages	$\pm 2\%$
Temperature	$\pm 0.5^\circ \text{C}$
Humidity	$\pm 5\%$

<sup>†</sup>Ref: CISPR 16-4-2:2011+A1:2014