



FCC PART 15E TEST REPORT No.24T04Z200129-008

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN

SM-A065M/DS,SM-A065M

FCC ID:ZCASMA065M

with

Hardware Version: REV1.0

Software Version: A065M.001

Issued Date: 2024-06-25

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z200129-008	Rev.0	1st edition	2024-06-25

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

CONTENTS	3
1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. LABORATORY ENVIRONMENT	8
6. TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS	9
6DB EMISSION BANDWIDTH	9
6.2. STATEMENTS	9
6.3. TEST CONDITIONS	9
7. TEST FACILITIES UTILIZED	10
8. MEASUREMENT UNCERTAINTY	11
8.1. TRANSMITTER OUTPUT POWER	11
8.2. PEAK POWER SPECTRAL DENSITY	11
8.3. 6DB EMISSION BANDWIDTH	11
8.4. BAND EDGES COMPLIANCE	11
8.5. SPURIOUS EMISSIONS	11
8.6. RADIATED UNWANTED EMISSION	11
8.7. AC POWER-LINE CONDUCTED EMISSION	11
ANNEX A: MEASUREMENT RESULTS	12
A.1. MEASUREMENT METHOD	12

A.2. MAXIMUM PEAK OUTPUT POWER	13
A.2.1 ANTENNA GAIN	13
A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	13
A.3. PEAK POWER SPECTRAL DENSITY	18
A.4. 6dB EMISSION BANDWIDTH	20
A.5. RADIATED UNWANTED EMISSION	25
A.5.1 LIMITS	25
A.5.2 TEST SETUP	26
A.5.3 TEST PROCEDURES	27
A.5.4 CALCULATION	27
A.6. AC POWERLINE CONDUCTED EMISSION	45
A.6.1 SUMMARY	45
A.6.2 METHOD OF MEASUREMENT	45
A.6.3 TEST CONDITION	45
A.6.4 TEST SETUP	45
A.6.5 MEASUREMENT RESULT AND LIMIT	46
ANNEX B: EUT PARAMETERS	49
ANNEX C: ACCREDITATION CERTIFICATE	49

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2024-05-20


Testing End Date: 2024-06-25

1.5. Signature



Yao Xingyu

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Pang Shuai

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address/Post: 19 Chapin Rd., Building D Pine Brook, NJ 07058
Contact: Jenni Chun
Email: j1.chun@samsung.com
Telephone: +1-201-937-4203

2.2. Manufacturer Information

Company Name: Samsung Electronics Co., Ltd.
Address/Post: Samsung R5, Maetan dong 129, Samsung ro
Youngtong gu, Suwon city 443 742, Korea
Contact: Sunghoon Cho
Email: ggobi.cho@samsung.com
Telephone: +82-10-2722-4159
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN
Model name	SM-A065M/DS,SM-A065M
FCC ID	ZCASMA065M
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Nominal Voltage	3.85V

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT12a	2404200129UT12a	REV1.0	A065M.001	2024-05-20
UT10a	2404200129UT10a	REV1.0	A065M.001	2024-05-20

*EUT ID: is used to identify the test sample in the lab internally.

UT12a is used for Conduction test, UT10a is used for Radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Name	Model	Manufacturer
AE1-1	Battery	HQ-7160SS	SCUD (FUJIAN) Electronics Co., Ltd.
AE1-2	Battery	HQ-7160SD	SCUD (FUJIAN) Electronics Co., Ltd.
AE1-3	Battery	HQ-7160NA	Ningde Ampere technology limited
AE2-1*	Adapter	EP-TA800	SOLUM CO.,LTD.
AE2-2*	Adapter	EP-T1510	DONGYANG E&P INC.
AE2-3*	Adapter	EP-TA200	RFTECH ELECTRONICS (HUIZHOU) CO., LTD
AE3-1	Date Cable1 C-C	EP-DN980BWE	RFTECH ELECTRONICS (HUIZHOU) CO., LTD
AE3-2	Date Cable2 C-C	EP-DN980BWE	Guangxi Broad Telecommunication Co.,Ltd.
AE3-3	Date Cable3 C-C	EP-DN980BWE	Cresyn electronics(Dongguan)Co;Ltd.
AE3-4	Date Cable4 C-C	EP-DN980BWE	ASAP TECHNOLOGY(JIANGXI) CO.,LTD.
AE4*	Date Cable5 C-A	EP-DR140AWE	Cresyn electronics(Dongguan)Co;Ltd.
AE5*	Headset	EHS61ASFWE	Dongguan YoungBo Electronics

*AE ID: is used to identify the test sample in the lab internally.

*AE2-1, AE2-2, AE2-3, AE4 and A5 are not the AE for EUT, provided by the client for relevant tests.

3.4. General Description

Equipment Under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E:	
	15.205 Restricted bands of operation;	2021
	15.209 Radiated emission limits, general requirements;	
	15.407 General technical requirements	
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from	
	Low-Voltage Electrical and Electronic Equipment in the	2013
	Range of 9 kHz to 40 GHz	
UNII: KDB 789033	General U-NII Test Procedures New Rules v02r01	2017-12
D02		

5. Laboratory Environment

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
6dB Emission Bandwidth	15.407 (e)	/	P
Radiated Unwanted Emission	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2024-07-04
2	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2025-04-01
3	Attenuator	10dB/2W	/	Rosenberger	/	/
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103015	R&S	1 year	2025-01-18
2	Test Receiver	FSV30	101047	R&S	1 year	2024-10-08
3	Test Receiver	ESU26	100376	R&S	1 year	2024-06-29
4	Loop Antenna	HFH2-Z2	829324/007	R&S	1 year	2025-01-04
5	EMI Antenna	VULB9163	302	Schwarzbeck	1 year	2024-08-28
6	EMI Antenna	3117	00139065	ETS-Lindgren	1 year	2024-10-22
7	EMI Antenna	LB-180400 -25-C-KF	21100840000 06	A-INFO	1 year	2025-05-15

AC Power Line Conducted Emission

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101459	R&S	1 year	2025-05-16
2	Test Receiver	ESCI	100766	R&S	1 year	2025-04-18

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. 6dB Emission Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

8.6. Radiated Unwanted Emission

Frequency Range	Uncertainty(dB)
9kHz-30MHz	3.96
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.73
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.62
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.52

8.7. AC Power-line Conducted Emission


Measurement Uncertainty : 3.10dB,k=2

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

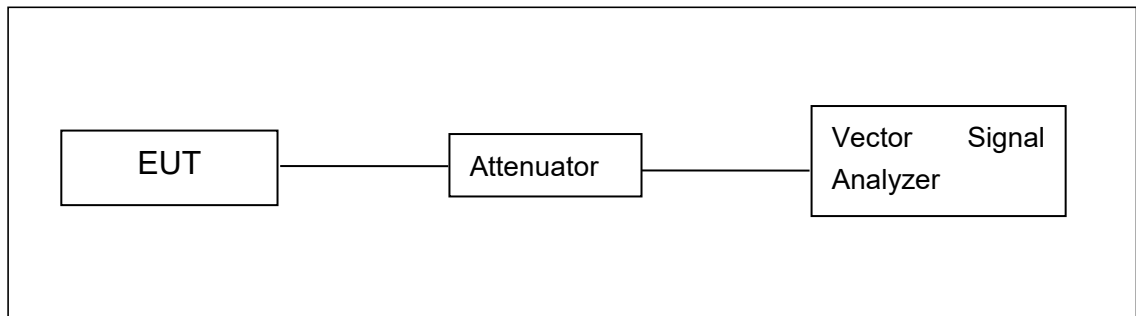

A.1.2. Radiated Emission Measurements

Measurement performed according to Clause 6.4, 6.5, 6.6 in ANSI C63.10 and II.G.4, II.G.5, II.G.6 in KDB 789033.

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

Set RBW = 1 MHz.

Set VBW $\geq$ 3 MHz.

Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.

Sweep time = auto.

Detector = power averaging (rms)

Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal. Add 10 log (1/x), where x is the duty cycle

A.2.1 Antenna Gain

Antenna gain is -0.8dBi and the value is supplied by the applicant or manufacturer.

A.2.2. Maximum Average Output Power-Conducted

EUT ID: UT12a

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	12.16	/	/
	9	12.36	12.33	12.30
	12	12.29	/	/
	18	12.09	/	/
	24	12.21	/	/
	36	12.14	/	/
	48	12.31	/	/
	54	12.34	/	/

The data rate 9Mbps is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	12.33	/	/
	MCS1	12.33	/	/
	MCS2	12.24	/	/
	MCS3	12.31	/	/
	MCS4	12.28	/	/
	MCS5	12.19	/	/
	MCS6	12.24	/	/
	MCS7	12.36	12.39	12.10

The data rate MCS7 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	11.45	/	/
	MCS1	11.41	/	/
	MCS2	11.53	/	/
	MCS3	11.64	/	/
	MCS4	11.69	11.73	11.44
	MCS5	10.66	/	/
	MCS6	10.91	/	/
	MCS7	10.68	/	/
	MCS8	10.67	/	/

The data rate MCS4 is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	11.93	/
	MCS1	12.01	11.63
	MCS2	11.79	/
	MCS3	11.72	/
	MCS4	11.98	/
	MCS5	11.91	/
	MCS6	11.88	/
	MCS7	12.00	/

The data rate MCS1 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	12.13	/
	MCS1	12.09	/
	MCS2	12.11	/
	MCS3	12.14	/
	MCS4	12.21	11.45
	MCS5	10.98	/
	MCS6	11.37	/
	MCS7	11.34	/
	MCS8	10.99	/
	MCS9	10.79	/

The data rate MCS4 is selected as worst condition, and the following cases are performed with this condition.


802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	11.96
	MCS1	11.96
	MCS2	11.87
	MCS3	12.02
	MCS4	10.46
	MCS5	10.72
	MCS6	11.06
	MCS7	11.03
	MCS8	10.58
	MCS9	10.58

The data rate MCS2 is selected as worst condition, and the following cases are performed with this condition.

Duty cycle

Mode	11a		
Duty Cycle	95%		
Mode	11N 20M	11N 40M	
Duty Cycle	76%	89%	
Mode	11ac-20M	11ac- 40M	11ac- 80M
Duty Cycle	83%	78%	68%

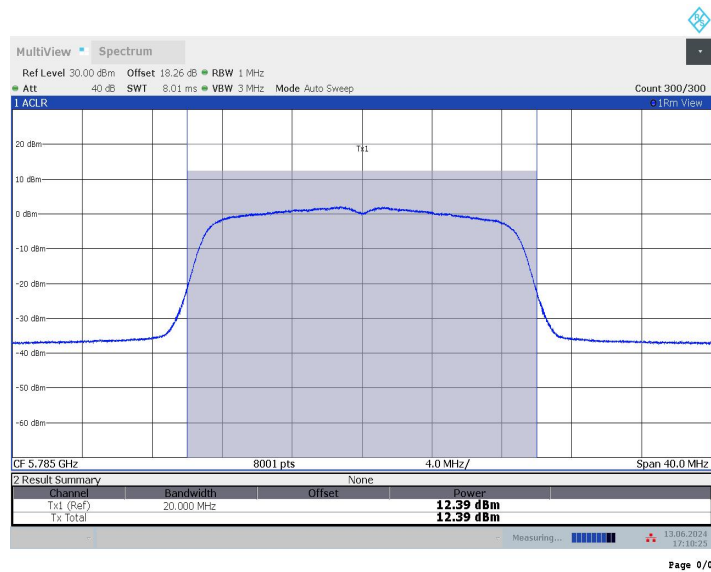

Maximum output Power:11n20 CH157

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

Set RBW = 500 kHz.

Set VBW $\geq$ 3 MHz.

Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.

Sweep time = auto.

Detector = power averaging (rms)

Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter. Use the peak search function on the instrument to find the peak of the spectrum and record its value. Add $10 \log (1/x)$, where x is the duty cycle.


Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

EUT ID: UT12a

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	-0.78	P
	157	-0.74	P
	165	-0.57	P
802.11n HT20	149	-0.52	P
	157	-0.32	P
	165	-0.64	P
802.11ac HT40	151	-3.52	P
	159	-4.40	P
802.11ac vHT80	155	-6.07	P

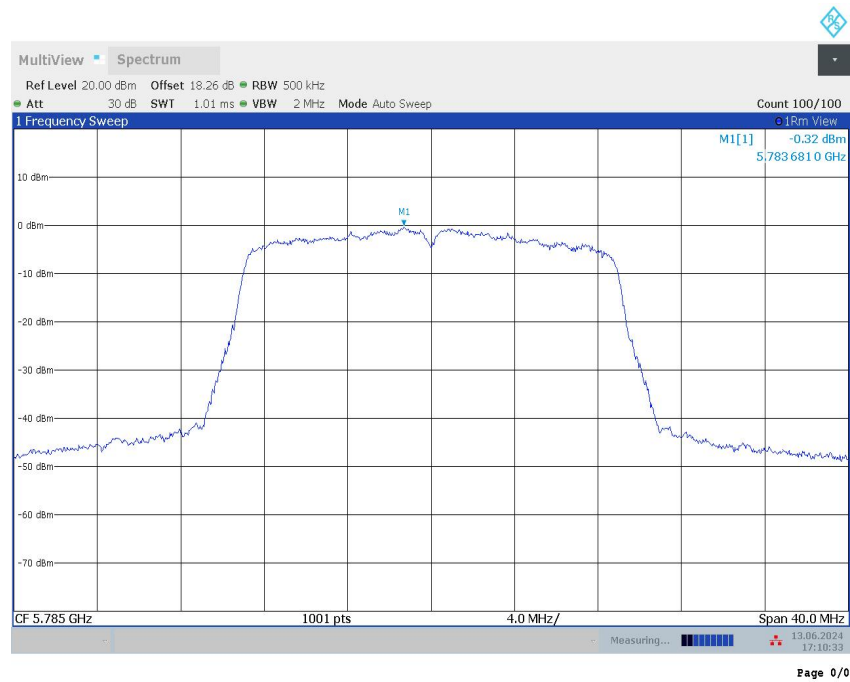

Peak Power Spectral Density:11n20 CH157

Conclusion: PASS

A.4. 6dB Emission Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

Set RBW = 100 kHz.

Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------


EUT ID: UT12a

Measurement Result:


Mode	Channel	6dB Emission Bandwidth (MHz)	conclusion
802.11a	149	15.32	P
	157	15.36	P
	165	13.20	P
802.11n HT20	149	15.64	P
	157	15.96	P
	165	16.24	P
802.11ac VHT40	151	35.12	P
	159	35.04	P
802.11ac VHT80	155	75.20	P

Test graphs as below:


11A_5745

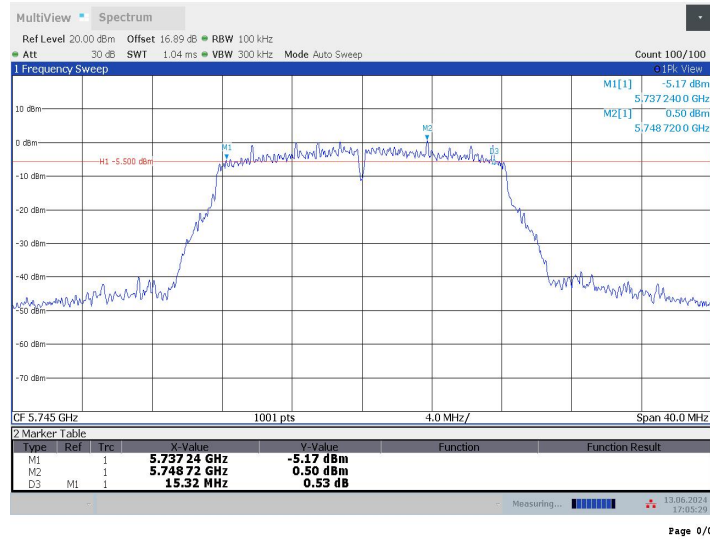


11A_5785

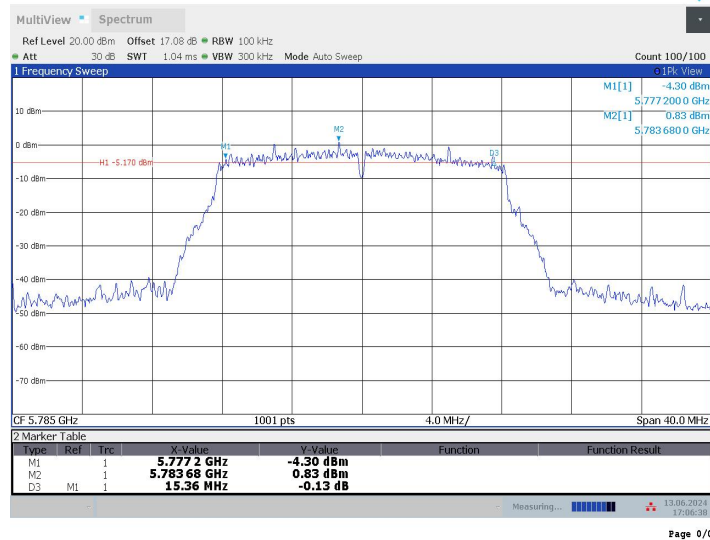


11A_5825

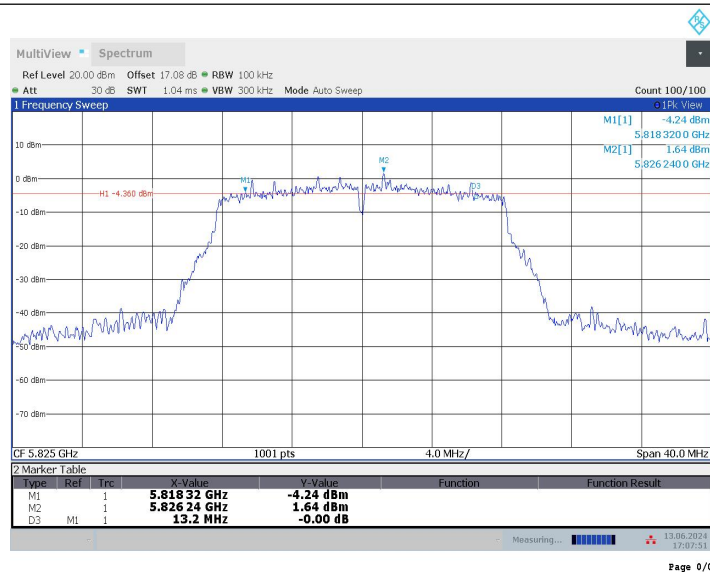


11N20SISO_5745

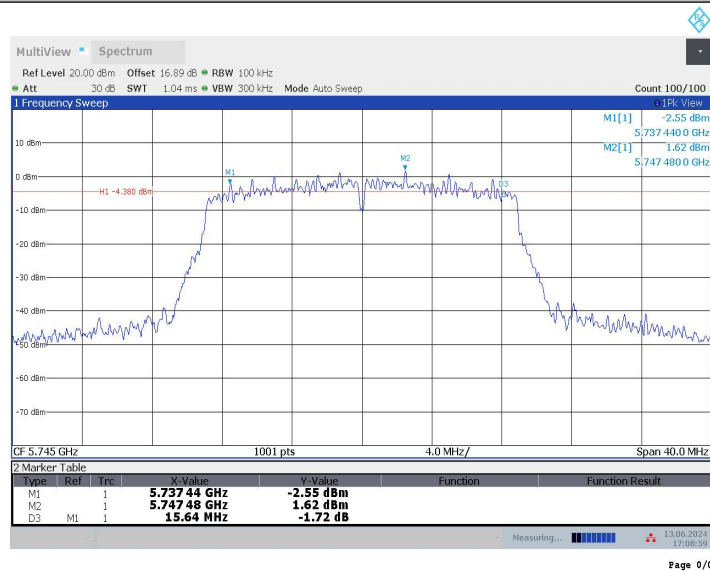


11N20SISO_5785

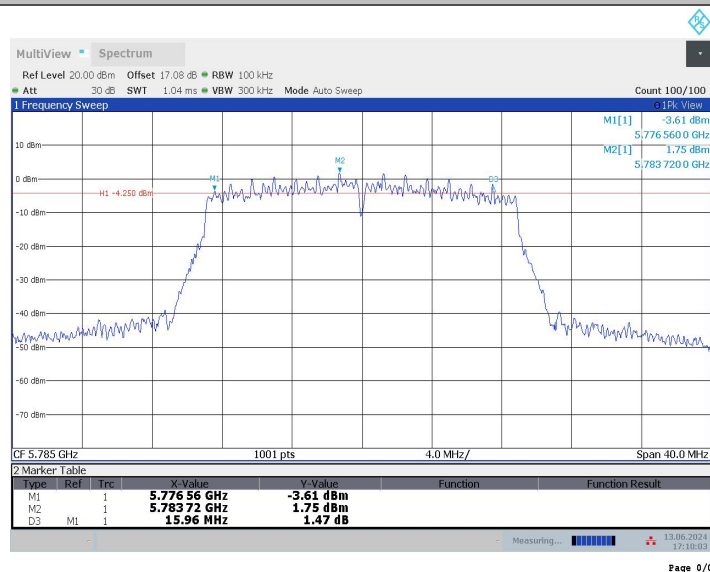


11N20SISO_5825

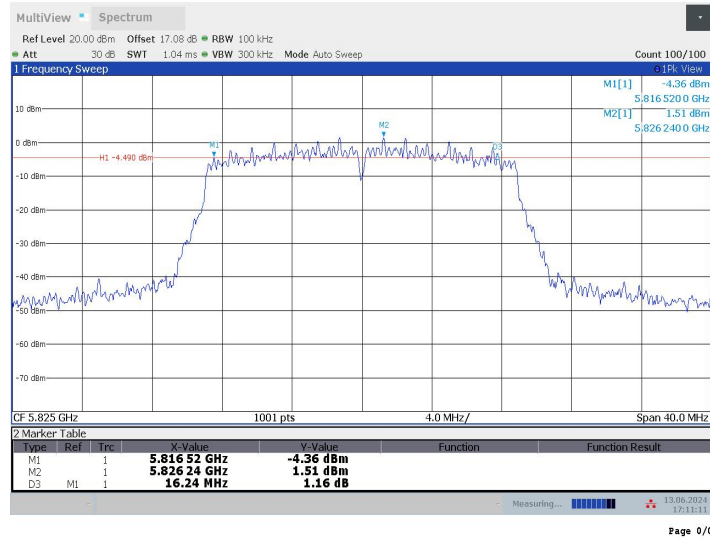


11AC40SISO_5755

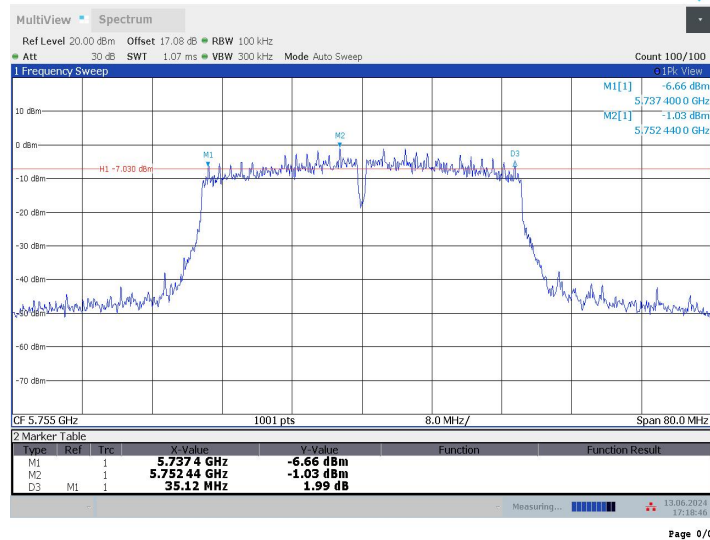

11AC40SISO_5795

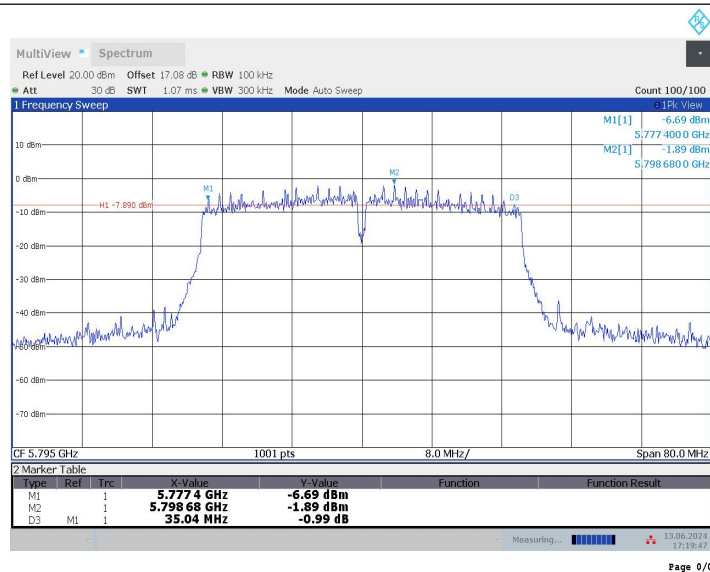

11AC80SISO_5775

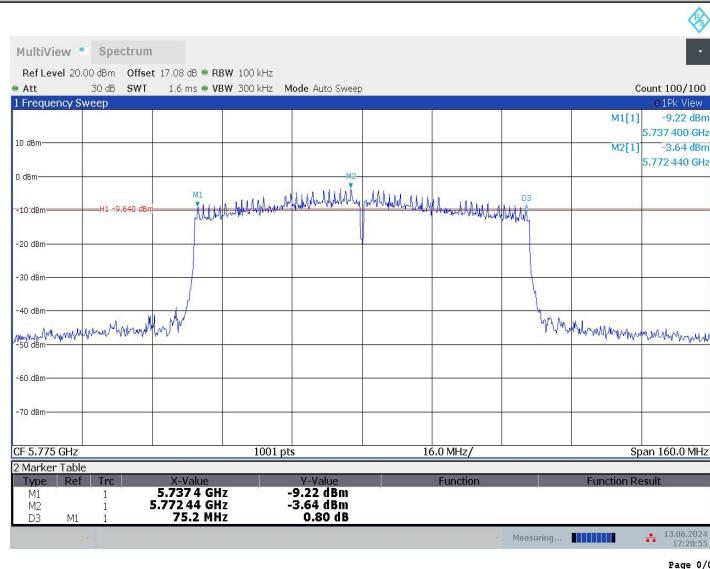

Conclusion: PASS

A.5. Radiated Unwanted Emission

A.5.1 Limits

Unwanted Emissions in the unrestricted bands shall not exceed the limits that shown in 15.407:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: Increasing linearly from point to point.	

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength (μ V/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor (as defined in KDB 789033 II.G.2.d).

A.5.2 Test setup

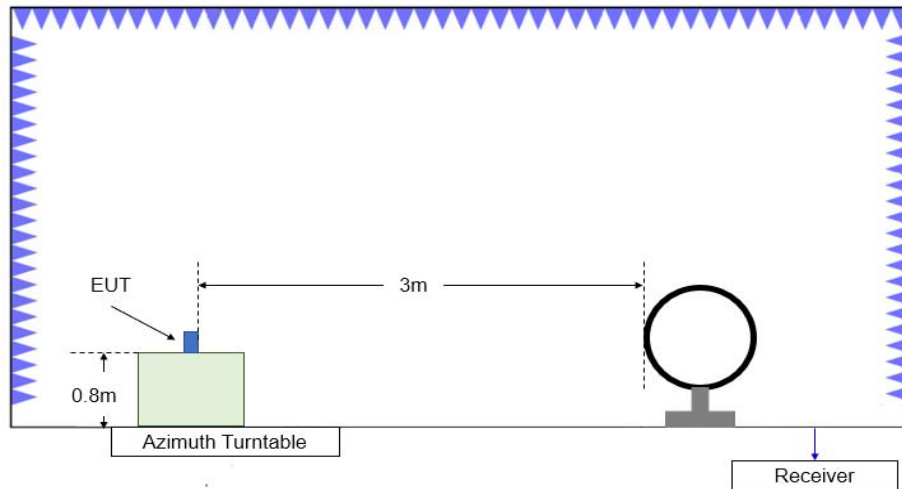


Figure A.5.1. Test Site Diagram (9kHz-30MHz)

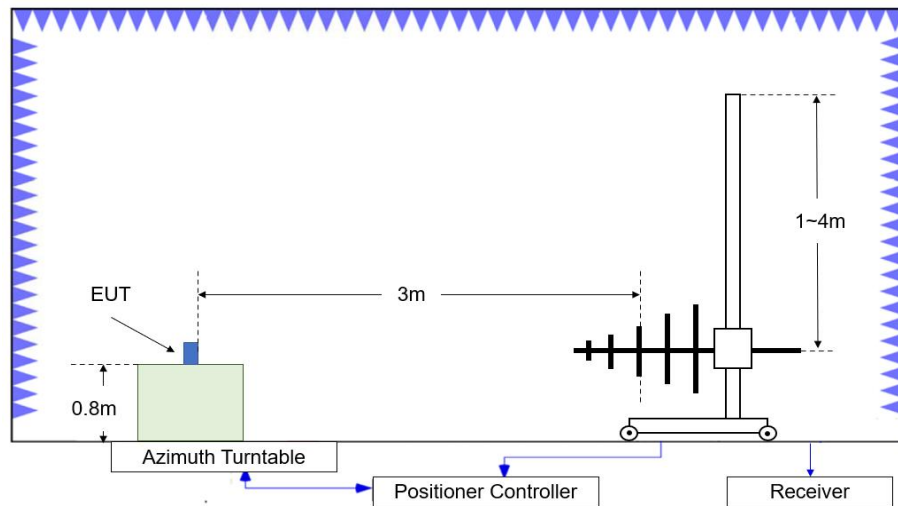


Figure A.5.2. Test Site Diagram (30MHz-1GHz)

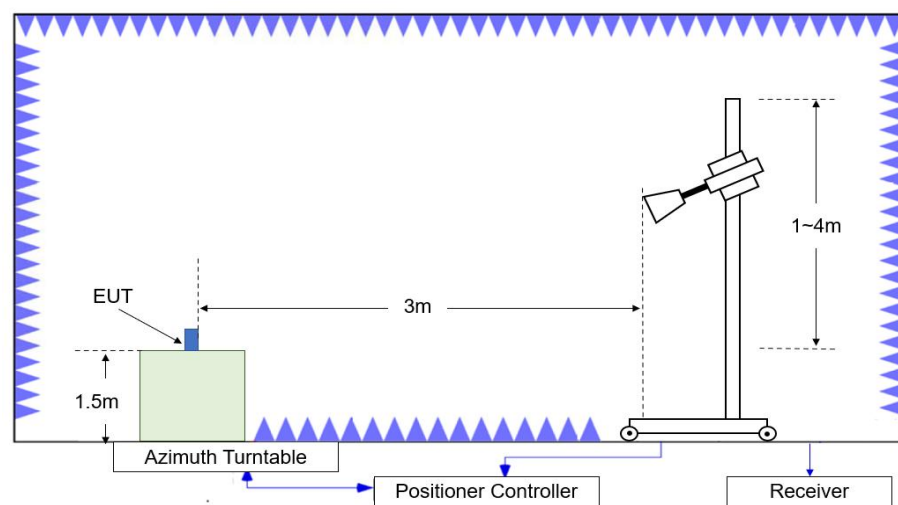


Figure A.5.3. Test Site Diagram (1GHz-40GHz)

A.5.3 Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10 and KDB 789033 D02 v02r01.

Test setting

Frequency of emission (MHz)	RBW/VBW
30-1000	100kHz/300kHz
1000-4000	1MHz/3MHz
4000-18000	1MHz/3MHz
18000-26500	1MHz/3MHz
26500-40000	1MHz/3MHz

A.5.4 Calculation

1. The measurement results reported below is calculated by:

Measurement Results (dB μ V/m) = $P_{\text{measurement}}$ (dB μ V) + Cable Loss(dB) + Antenna Factor (dB/m)

Where: $P_{\text{measurement}}$ is the field strength recorded from the instrument

2. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log(D) + 104.77$$

Where:

E is the field strength in dB μ V/m

D is the measurement distance in meters

EIRP is the equivalent isotropically radiated power in dBm

Test note

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
3. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
4. Measurement frequencies were performed from 9 kHz to 40GHz.

A.5.5 Measurement Result

Average Results:

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5405.125	44.49	-22.48	34.87	32.11	54.00	9.51	V
5409.625	44.58	-22.39	34.84	32.13	54.00	9.42	V
11490.000	34.12	-29.52	38.28	25.35	54.00	19.88	V
15884.000	38.79	-24.48	40.67	22.61	54.00	15.21	H
17985.500	40.47	-23.41	41.20	22.68	54.00	13.53	V
17994.000	40.51	-23.28	41.20	22.59	54.00	13.49	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5404.875	44.42	-22.49	34.87	32.04	54.00	9.58	V
5410.750	44.55	-22.40	34.84	32.11	54.00	9.45	V
11570.000	34.30	-29.57	38.30	25.57	54.00	19.70	H
15894.500	38.79	-24.63	40.69	22.73	54.00	15.21	H
17983.000	40.43	-23.42	41.20	22.65	54.00	13.57	V
17995.500	40.59	-23.25	41.20	22.64	54.00	13.41	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5407.875	44.40	-22.43	34.85	31.98	54.00	9.60	V
5411.875	44.43	-22.43	34.83	32.03	54.00	9.57	V
11650.000	34.26	-28.95	38.40	24.81	54.00	19.74	H
15882.500	38.81	-24.47	40.67	22.62	54.00	15.19	H
17983.500	40.50	-23.42	41.20	22.72	54.00	13.50	H
17944.000	40.63	-23.46	41.20	22.89	54.00	13.37	V

802.11n-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5407.250	44.46	-22.44	34.86	32.04	54.00	9.54	V
5411.000	44.49	-22.41	34.83	32.06	54.00	9.51	V
11490.000	34.20	-29.52	38.28	25.44	54.00	19.80	V
15874.500	38.77	-24.59	40.65	22.71	54.00	15.23	H
17982.000	40.22	-23.43	41.20	22.45	54.00	13.78	V
17995.000	40.54	-23.26	41.20	22.61	54.00	13.46	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5398.625	44.35	-22.62	34.90	32.07	54.00	9.65	V
5410.875	44.48	-22.40	34.83	32.05	54.00	9.52	V
11570.000	34.28	-29.57	38.30	25.55	54.00	19.72	V
15849.000	38.82	-24.55	40.60	22.77	54.00	15.18	V
17982.500	40.37	-23.42	41.20	22.60	54.00	13.63	V
17994.500	40.58	-23.27	41.20	22.65	54.00	13.42	H

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5412.375	44.46	-22.44	34.83	32.07	54.00	9.54	V
5416.625	44.38	-22.53	34.80	32.11	54.00	9.62	V
11650.000	34.39	-28.95	38.40	24.94	54.00	19.61	H
15850.500	38.78	-24.54	40.60	22.71	54.00	15.22	H
17974.000	40.20	-23.42	41.20	22.42	54.00	13.80	H
17992.000	40.50	-23.33	41.20	22.63	54.00	13.50	H

802.11n-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5403.875	44.37	-22.51	34.88	32.00	54.00	9.63	V
5409.875	44.47	-22.39	34.84	32.01	54.00	9.53	V
11510.000	34.60	-29.25	38.30	25.55	54.00	19.40	H
15860.000	38.81	-24.61	40.62	22.80	54.00	15.19	V
17969.500	40.16	-23.41	41.20	22.37	54.00	13.84	V
17991.500	40.42	-23.34	41.20	22.56	54.00	13.58	H

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5410.875	44.45	-22.40	34.83	32.02	54.00	9.55	V
5416.250	44.45	-22.52	34.80	32.17	54.00	9.55	V
11590.000	34.09	-29.56	38.30	25.35	54.00	19.91	H
15906.000	38.62	-24.75	40.71	22.66	54.00	15.38	V
17983.000	40.37	-23.42	41.20	22.60	54.00	13.63	V
17997.000	40.64	-23.21	41.20	22.65	54.00	13.36	V

802.11ac-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5411.250	44.42	-22.41	34.83	32.00	54.00	9.58	V
5415.250	44.37	-22.50	34.81	32.07	54.00	9.63	V
11488.500	35.06	-29.55	38.28	26.33	54.00	18.94	V
15850.000	38.62	-24.53	40.60	22.55	54.00	15.38	H
17954.000	39.87	-23.54	41.20	22.21	54.00	14.13	V
17998.500	40.31	-23.18	41.20	22.29	54.00	13.69	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5412.875	44.40	-22.45	34.82	32.03	54.00	9.60	V
5416.375	44.45	-22.53	34.80	32.17	54.00	9.55	V
11570.500	35.19	-29.58	38.30	26.47	54.00	18.81	H
15848.000	38.64	-24.57	40.60	22.61	54.00	15.36	H
17902.500	39.73	-23.39	41.20	21.92	54.00	14.27	V
17997.000	40.35	-23.21	41.20	22.37	54.00	13.65	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5408.750	44.53	-22.41	34.85	32.10	54.00	9.47	V
5416.000	44.32	-22.52	34.80	32.03	54.00	9.68	V
11648.500	35.00	-29.01	38.40	25.61	54.00	19.00	V
15851.000	38.61	-24.54	40.60	22.55	54.00	15.39	V
17899.500	39.69	-23.38	41.20	21.87	54.00	14.31	H
17993.500	40.26	-23.30	41.20	22.36	54.00	13.74	V

802.11ac-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5404.500	44.38	-22.50	34.87	32.00	54.00	9.62	V
5408.625	44.37	-22.41	34.85	31.93	54.00	9.63	V
11510.000	34.53	-29.25	38.30	25.48	54.00	19.47	V
15912.500	38.77	-24.75	40.73	22.80	54.00	15.23	V
17985.000	40.37	-23.41	41.20	22.58	54.00	13.63	H
17996.000	40.57	-23.24	41.20	22.61	54.00	13.43	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5410.500	44.45	-22.39	34.84	32.00	54.00	9.55	V
5413.500	44.42	-22.46	34.82	32.06	54.00	9.58	V
11590.000	34.17	-29.56	38.30	25.43	54.00	19.83	H
15859.000	38.69	-24.60	40.62	22.68	54.00	15.31	V
17983.000	40.43	-23.42	41.20	22.65	54.00	13.57	V
17993.500	40.45	-23.30	41.20	22.55	54.00	13.55	V

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5409.250	44.51	-22.40	34.84	32.06	54.00	9.49	V
5415.875	44.34	-22.52	34.80	32.05	54.00	9.66	V
11550.000	34.53	-29.12	38.30	25.36	54.00	19.47	V
15918.000	38.54	-24.74	40.74	22.54	54.00	15.46	V
17973.500	39.99	-23.41	41.20	22.20	54.00	14.01	V
17994.000	40.38	-23.28	41.20	22.46	54.00	13.62	V

Peak Results:
802.11a

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5650.172	58.39	-22.35	34.70	46.03	68.33	9.94	V
5650.345	58.35	-22.34	34.70	45.99	68.46	10.11	H
11490.000	45.71	-29.52	38.28	36.94	74.00	28.29	V
17235.000	51.01	-23.68	40.96	33.73	68.30	17.29	H
17510.500	53.80	-23.67	41.00	36.48	68.30	14.50	H
17599.500	53.28	-23.37	41.00	35.65	68.30	15.02	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5763.500	58.96	-22.38	34.83	46.50	68.33	9.37	V
5817.500	57.89	-22.05	34.94	45.01	68.33	10.44	H
11570.000	45.82	-29.57	38.30	37.08	74.00	28.18	V
17355.000	50.53	-23.76	40.90	33.39	68.30	17.77	V
17544.000	52.56	-23.67	41.00	35.23	68.30	15.74	H
17680.000	52.69	-23.89	41.16	35.41	68.30	15.61	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5924.195	58.06	-22.25	35.10	45.21	68.80	10.73	V
5924.712	58.72	-22.26	35.10	45.88	68.41	9.70	V
11650.000	47.08	-28.95	38.40	37.63	74.00	26.92	V
17475.500	51.41	-23.53	40.98	33.96	68.30	16.89	V
17608.000	52.84	-23.28	41.02	35.11	68.30	15.46	H
17677.500	51.65	-23.85	41.16	34.35	68.30	16.65	H

802.11n-HT20
Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5651.552	58.04	-22.31	34.70	45.66	69.35	11.30	V
5653.967	58.84	-22.25	34.70	46.39	71.14	12.29	H
11490.000	46.36	-29.52	38.28	37.60	74.00	27.64	V
17235.000	51.41	-23.68	40.96	34.12	68.30	16.89	V
17421.000	52.36	-23.76	40.92	35.20	68.30	15.94	V
17640.500	52.70	-23.80	41.08	35.42	68.30	15.60	V

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5758.000	57.15	-22.37	34.82	44.70	68.33	11.18	H
5810.000	57.37	-22.23	34.92	44.68	68.33	10.96	H
11570.000	45.62	-29.57	38.30	36.89	74.00	28.38	V
17355.000	50.97	-23.76	40.90	33.83	68.30	17.33	V
17494.000	52.81	-23.63	40.99	35.44	68.30	15.49	H
17614.500	53.23	-23.36	41.03	35.57	68.30	15.07	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5922.355	58.94	-22.19	35.10	46.03	70.16	11.22	H
5923.102	58.85	-22.21	35.10	45.97	69.60	10.75	V
11650.000	45.62	-28.95	38.40	36.16	74.00	28.38	H
17475.000	51.35	-23.52	40.98	33.89	68.30	16.95	V
17646.500	53.03	-23.70	41.09	35.63	68.30	15.27	H
17687.000	51.86	-23.84	41.17	34.52	68.30	16.44	H

802.11n-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5650.288	57.98	-22.34	34.70	45.63	68.41	10.43	H
5651.092	58.05	-22.32	34.70	45.67	69.01	10.96	V
11510.000	46.27	-29.25	38.30	37.22	74.00	27.73	V
17265.000	50.63	-23.61	40.93	33.30	68.30	17.67	V
17456.000	52.77	-23.51	40.96	35.33	68.30	15.52	V
17671.500	53.01	-23.77	41.14	35.64	68.30	15.29	H

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5924.540	58.34	-22.26	35.10	45.50	68.54	10.20	V
5924.770	58.15	-22.26	35.10	45.31	68.37	10.22	H
11590.000	46.84	-29.56	38.30	38.10	74.00	27.16	V
17385.000	50.80	-23.73	40.90	33.63	68.30	17.50	V
17599.000	53.16	-23.38	41.00	35.55	68.30	15.14	V
17687.000	51.60	-23.84	41.17	34.27	68.30	16.70	H

802.11ac-HT20

Channel 149

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5650.345	58.70	-22.34	34.70	46.34	68.46	9.76	V
5651.955	58.50	-22.30	34.70	46.10	69.65	11.15	V
11490.000	45.84	-29.52	38.28	37.08	74.00	28.16	H
17235.000	49.97	-23.68	40.96	32.69	68.30	18.33	H
17489.000	51.83	-23.64	40.99	34.48	68.30	16.47	H
17667.000	53.13	-23.68	41.13	35.68	68.30	15.17	H

Channel 157

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5758.500	57.63	-22.37	34.82	45.18	68.30	10.67	V
5816.000	57.53	-22.09	34.93	44.68	68.30	10.77	H
11599.500	48.29	-29.38	38.30	39.37	74.00	25.71	V
16848.000	53.21	-23.83	41.45	35.59	68.30	15.09	H
17336.500	52.57	-23.62	40.90	35.29	68.30	15.73	H
17640.000	53.10	-23.81	41.08	35.83	68.30	15.20	V

Channel 165

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5923.390	58.36	-22.22	35.10	45.48	69.39	11.04	V
5923.677	58.04	-22.23	35.10	45.17	69.18	11.14	V
11664.500	48.34	-28.99	38.43	38.90	74.00	25.66	H
16771.000	52.80	-24.19	41.50	35.49	68.30	15.50	H
17468.500	52.58	-23.47	40.97	35.08	68.30	15.72	H
17672.500	52.84	-23.78	41.15	35.48	68.30	15.45	V

802.11ac-HT40

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5650.977	57.84	-22.33	34.70	45.47	68.92	11.08	V
5651.495	57.88	-22.31	34.70	45.50	69.31	11.42	H
11510.000	46.00	-29.25	38.30	36.95	74.00	28.00	H
17265.000	51.10	-23.61	40.93	33.77	68.30	17.20	V
17451.000	52.38	-23.57	40.95	35.00	68.30	15.92	H
17605.000	52.81	-23.31	41.01	35.11	68.30	15.49	V

Channel 159

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5923.448	58.88	-22.22	35.10	46.01	69.35	10.47	V
5924.137	58.28	-22.24	35.10	45.42	68.84	10.56	V
11590.000	46.04	-29.56	38.30	37.30	74.00	27.96	H
17385.000	50.74	-23.73	40.90	33.57	68.30	17.56	V
17517.500	51.74	-23.82	41.00	34.56	68.30	16.56	V
17621.500	53.34	-23.51	41.04	35.80	68.30	14.96	H

802.11ac-HT80

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5650.345	57.64	-22.34	34.70	45.28	68.46	10.81	H
5924.597	58.04	-22.26	35.10	45.20	68.50	10.45	V
11550.000	46.06	-29.12	38.30	36.88	74.00	27.94	V
17325.000	51.30	-23.71	40.90	34.11	68.30	17.00	V
17535.000	52.11	-23.76	41.00	34.87	68.30	16.19	V
17684.500	52.19	-23.86	41.17	34.88	68.30	16.11	V

Conclusion: PASS
Note:

1. The spurious emission above 18G is noise only.
2. All emissions below 30MHz are more than 20 dB below the limit

Band edge compliance

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.1	P
	5825 MHz	Fig.2	P
802.11n HT20	5745 MHz	Fig.3	P
	5825 MHz	Fig.4	P
802.11n HT40	5755 MHz	Fig.5	P
	5795 MHz	Fig.6	P
802.11ac HT20	5745 MHz	Fig.7	P
	5825 MHz	Fig.8	P
802.11ac HT40	5755 MHz	Fig.9	P
	5795 MHz	Fig.10	P
802.11ac HT80	5775 MHz	Fig.11 Fig.12	P

Conclusion: PASS

Test graphs as below:

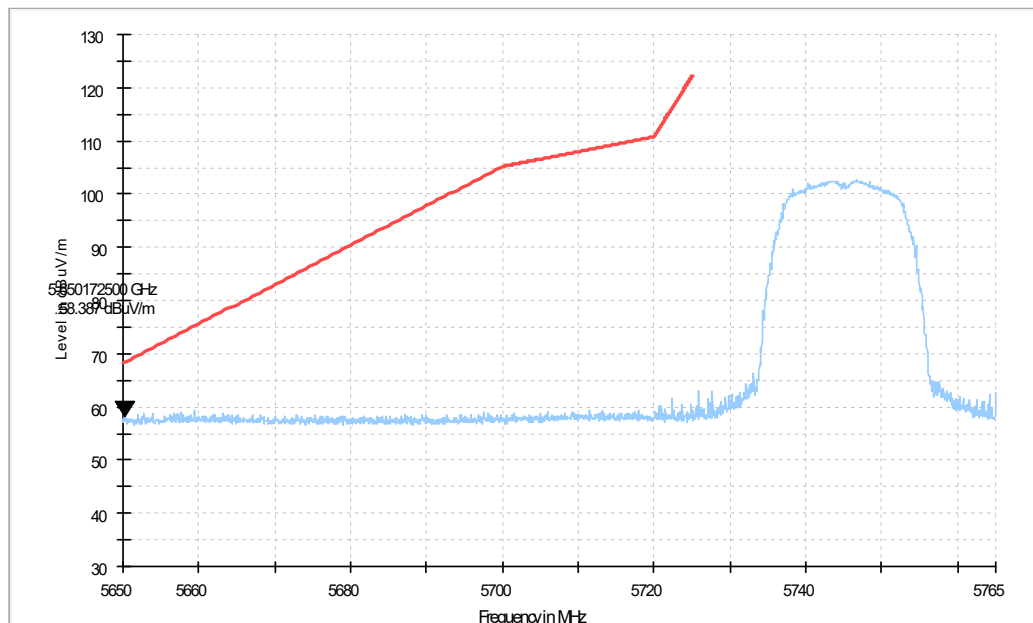


Fig. 1 Band Edges (802.11a Ch149, 5745MHz)

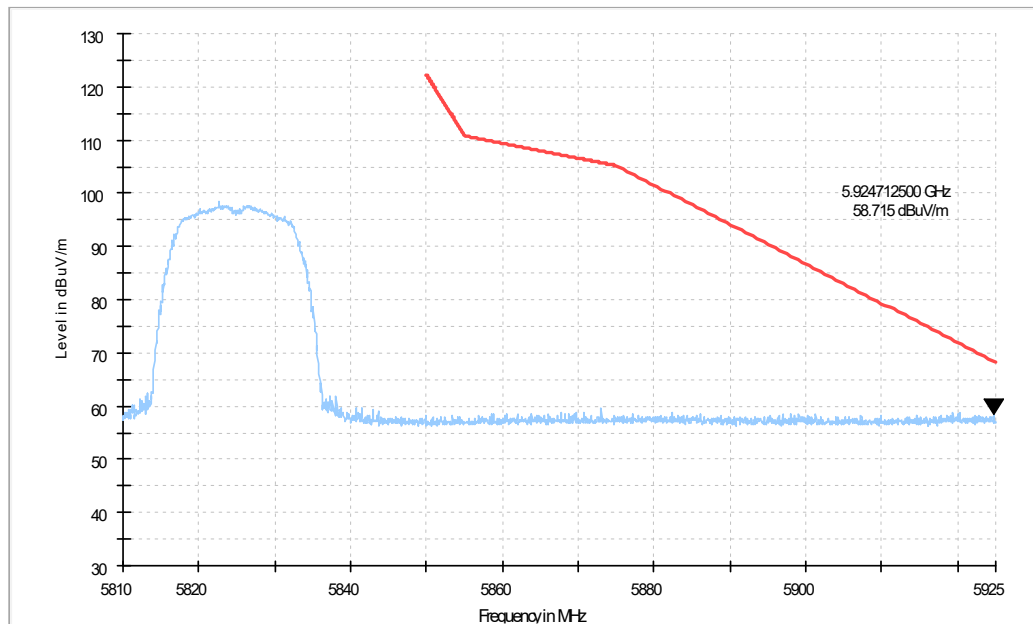


Fig. 2 Band Edges (802.11a Ch165, 5825MHz)

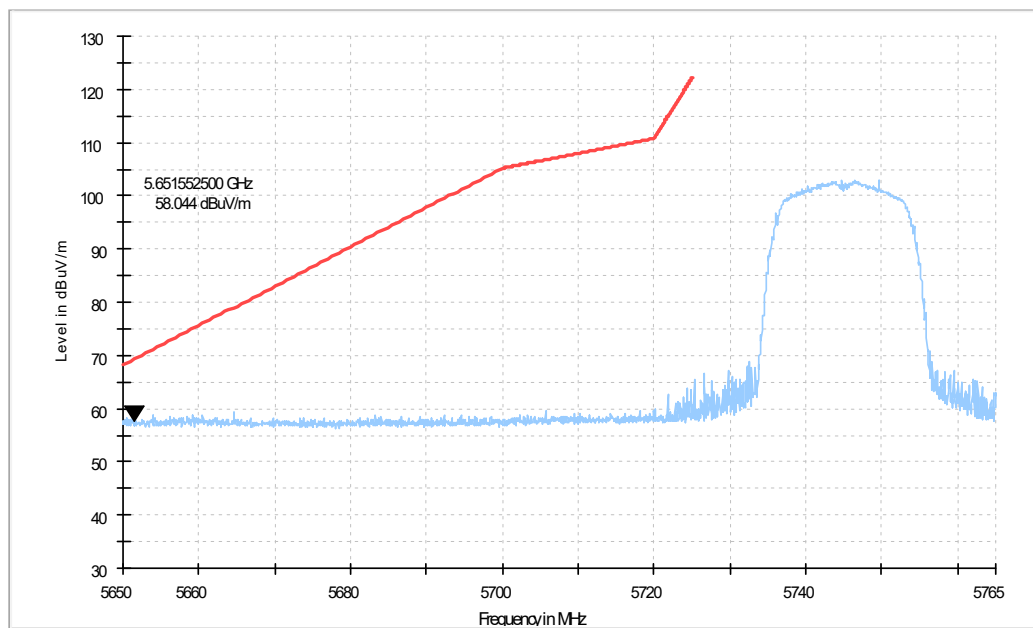


Fig. 3 Band Edges (802.11n-HT20 Ch149, 5745MHz)

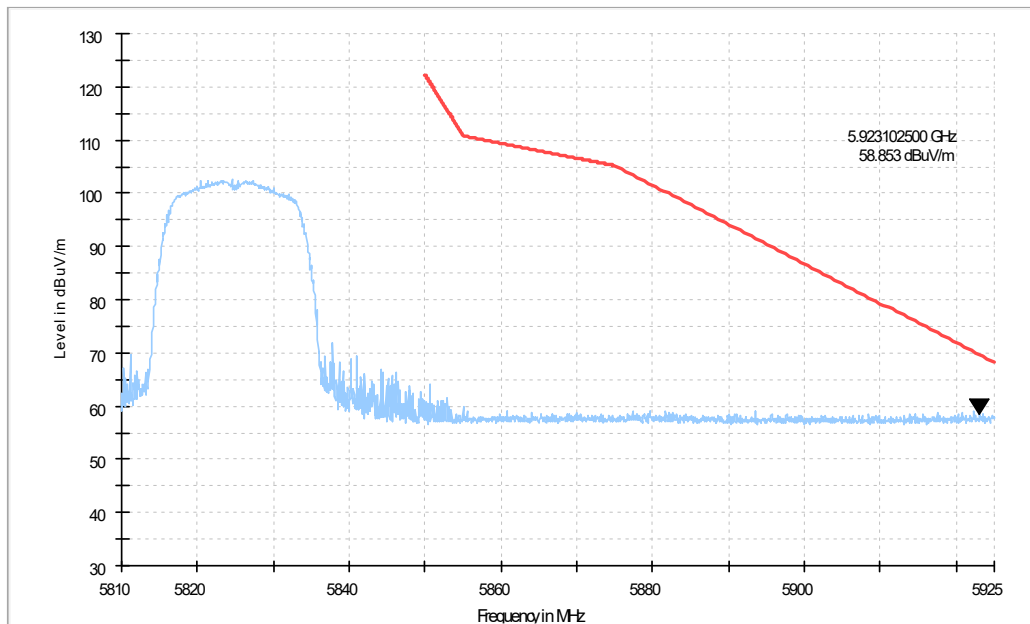


Fig. 4 Band Edges (802.11n-HT20 Ch165, 5825MHz)

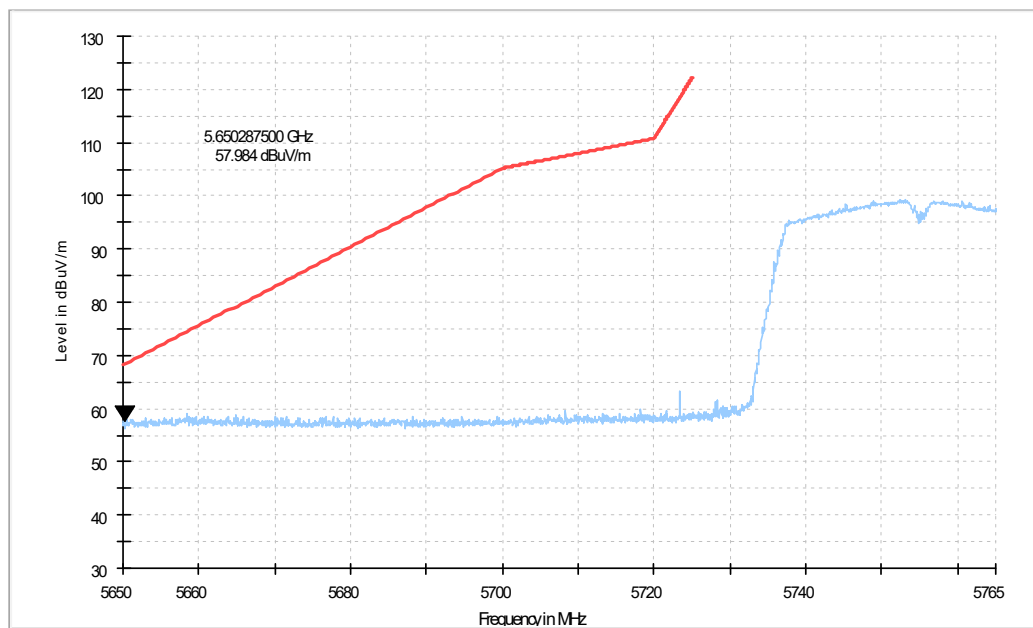


Fig. 5 Band Edges (802.11n-HT40 Ch151, 5755MHz)

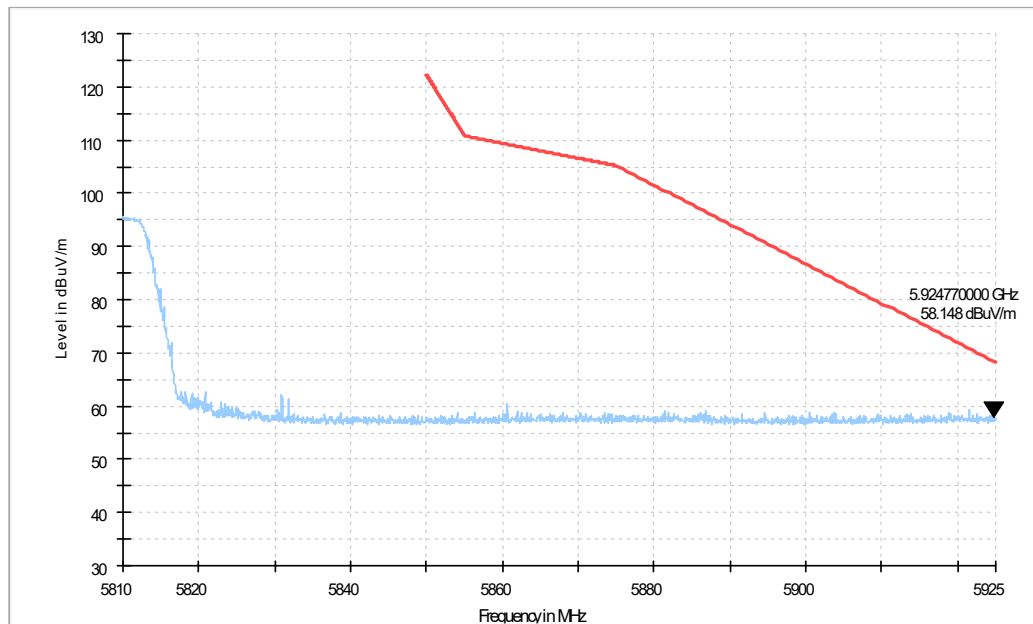


Fig. 6 Band Edges (802.11n-HT40 Ch159, 5795MHz)

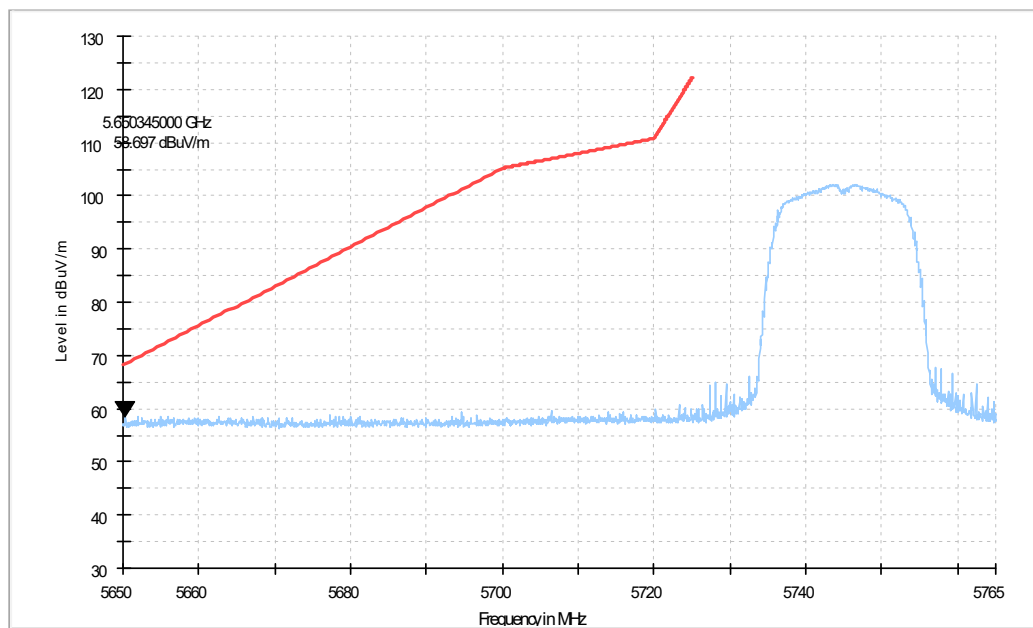


Fig. 7 Band Edges (802.11ac-HT20 Ch149, 5745MHz)

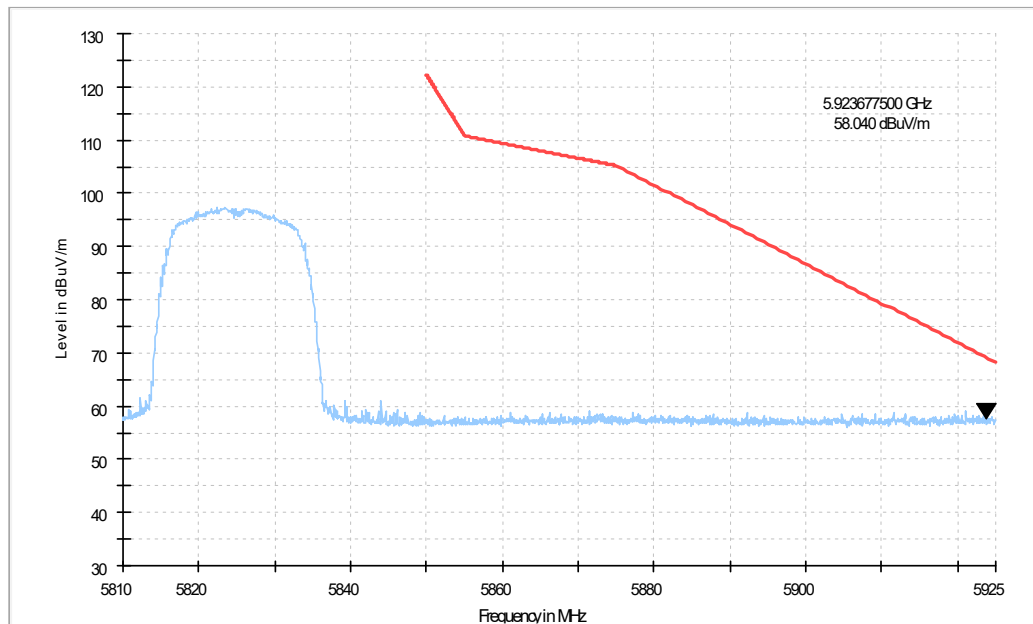


Fig. 8 Band Edges (802.11ac-HT20 Ch165, 5825MHz)

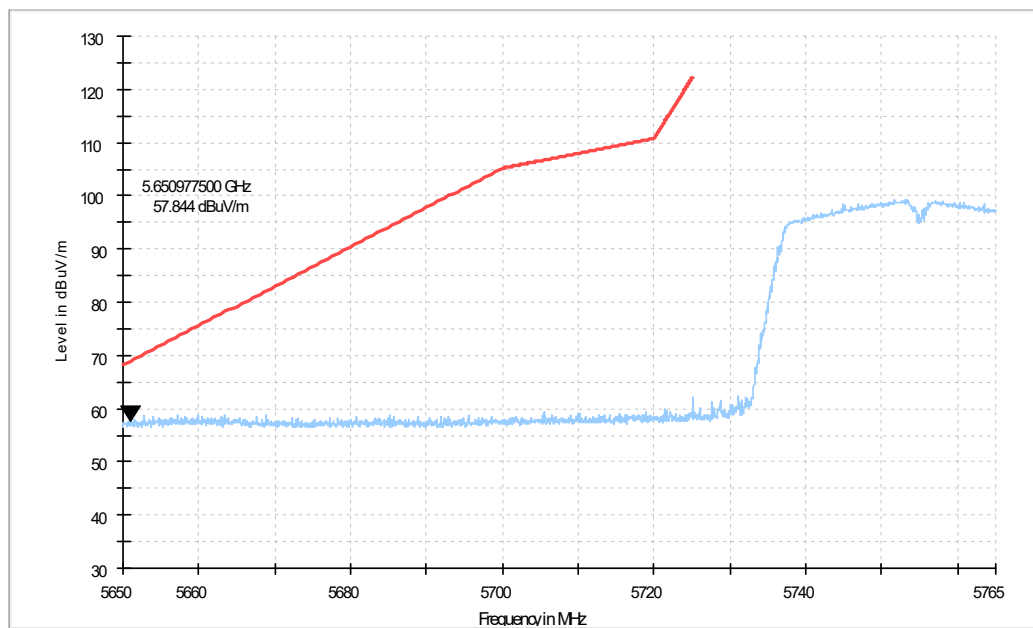


Fig. 9 Band Edges (802.11ac-HT40 Ch151, 5755MHz)

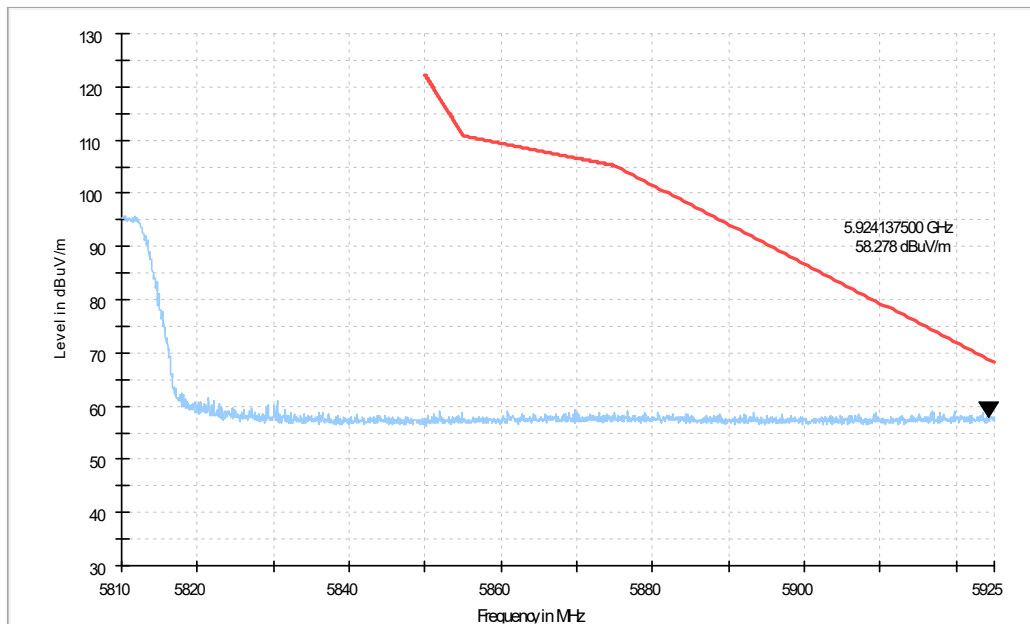


Fig. 10 Band Edges (802.11ac-HT40 Ch159, 5795MHz)

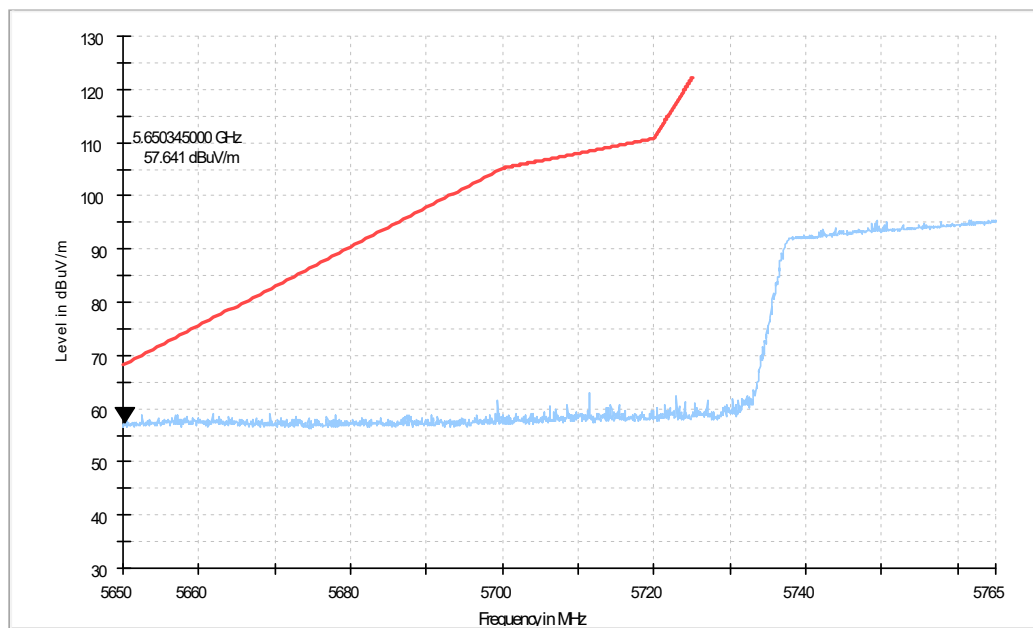


Fig. 11 Band Edges (802.11ac-HT80 Ch155, 5775MHz)

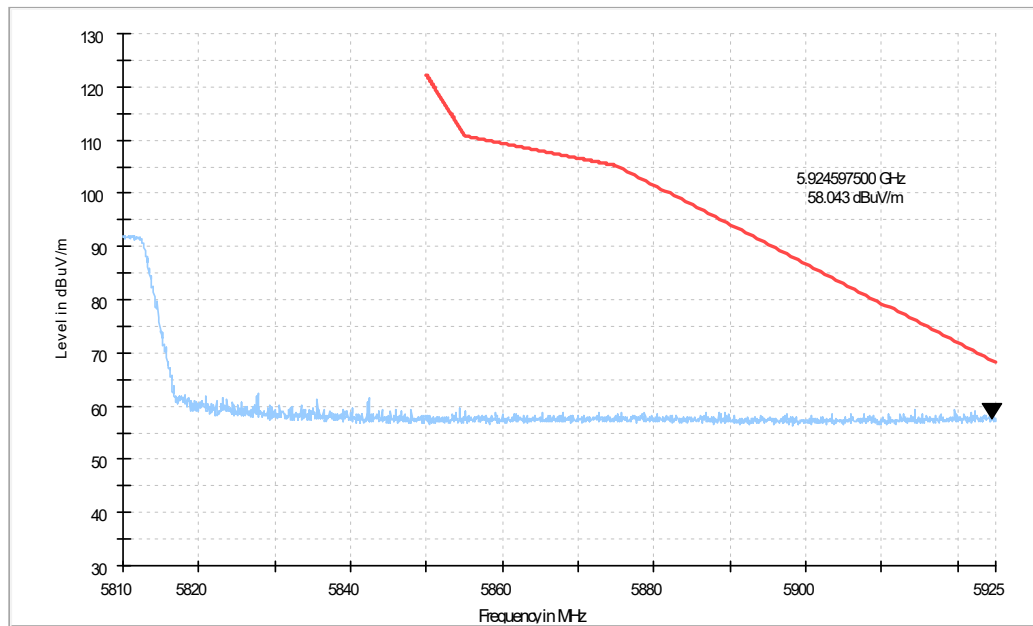


Fig. 12 Band Edges (802.11ac-HT80, 5775MHz)

A.6. AC Powerline Conducted Emission

A.6.1 Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

A.6.2 Method of Measurement

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:
Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

A.6.3 Test Condition

Voltage (V)	Frequency (Hz)
120	60

A.6.4 Test setup

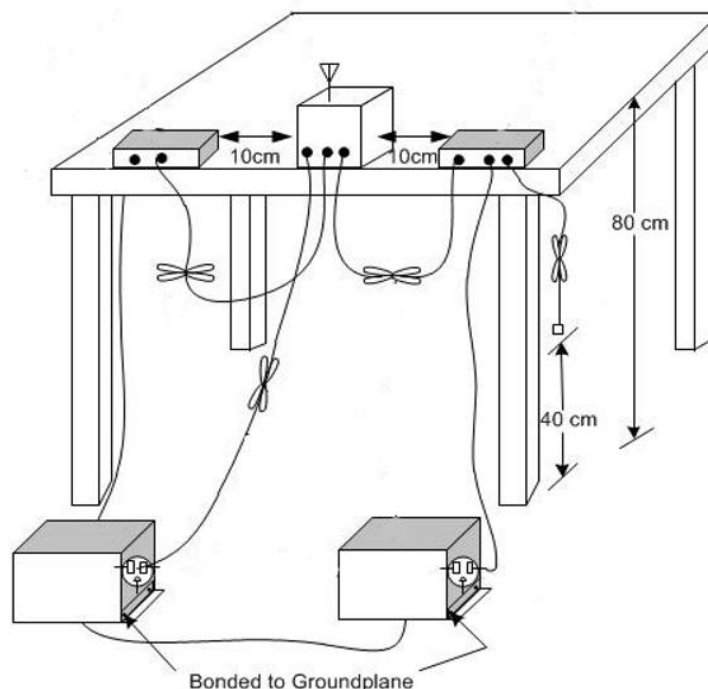

A.6.5 Measurement Result and limit

Wi-Fi (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		Wi-Fi	Idle	
0.15 to 0.5	66 to 56	Fig.A.6.1	Fig. A.6.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Wi-Fi (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		Wi-Fi	Idle	
0.15 to 0.5	56 to 46	Fig.A.6.1	Fig. A.6.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

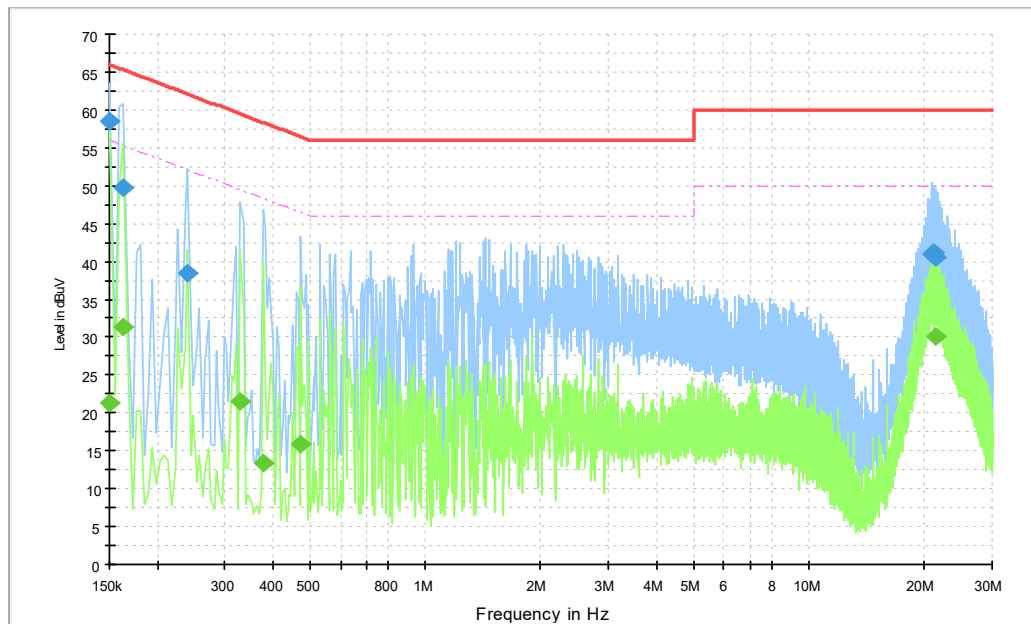


Fig.A.6.1. AC Powerline Conducted Emission-Ide

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	58.6	2000.0	9.000	On	N	20.3	7.4	66.0
0.163500	49.8	2000.0	9.000	On	N	20.1	15.5	65.3
0.240000	38.3	2000.0	9.000	On	N	20.1	23.7	62.1
20.917500	41.0	2000.0	9.000	On	L1	20.1	19.0	60.0
21.102000	41.2	2000.0	9.000	On	L1	20.1	18.8	60.0
21.435000	40.5	2000.0	9.000	On	L1	20.1	19.5	60.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	21.2	2000.0	9.000	On	N	20.3	34.8	56.0
0.163500	31.3	2000.0	9.000	On	N	20.1	24.0	55.3
0.330000	21.6	2000.0	9.000	On	L1	20.0	27.9	49.5
0.379500	13.4	2000.0	9.000	On	N	20.1	34.9	48.3
0.474000	15.8	2000.0	9.000	On	N	20.2	30.7	46.4
21.345000	30.0	2000.0	9.000	On	N	20.3	20.0	50.0

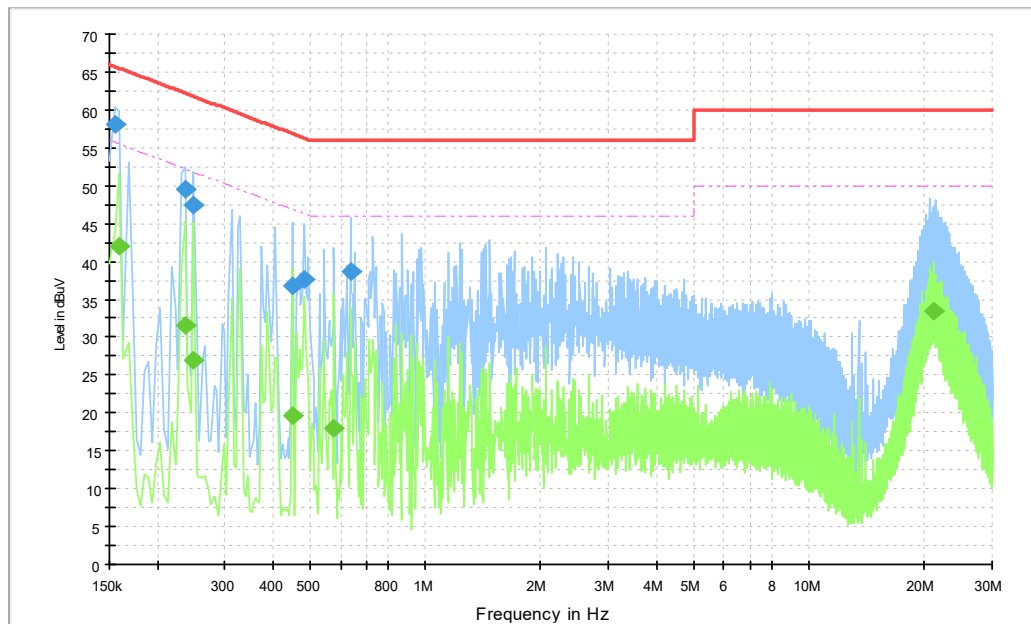


Fig.A.6.2. AC Powerline Conducted Emission-Ide

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	58.2	2000.0	9.000	On	L1	20.2	7.6	65.8
0.235500	49.6	2000.0	9.000	On	L1	20.0	12.7	62.3
0.249000	47.5	2000.0	9.000	On	N	20.1	14.3	61.8
0.451500	36.9	2000.0	9.000	On	N	20.2	20.0	56.8
0.483000	37.5	2000.0	9.000	On	N	20.2	18.7	56.3
0.636000	38.7	2000.0	9.000	On	N	20.1	17.3	56.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	42.0	2000.0	9.000	On	L1	20.1	13.5	55.5
0.235500	31.5	2000.0	9.000	On	N	20.0	20.8	52.3
0.249000	26.9	2000.0	9.000	On	L1	20.0	24.9	51.8
0.451500	19.6	2000.0	9.000	On	L1	20.1	27.2	46.8
0.577500	17.9	2000.0	9.000	On	L1	20.0	28.1	46.0
21.205500	33.5	2000.0	9.000	On	L1	20.1	16.5	50.0

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



*** END OF REPORT BODY ***