



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant:** Shenzhen Youmi Intelligent Technology Co., Ltd.

Address: 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District,  
Shenzhen City, China

**FCC ID:** 2ATZ4-A15P5G

**Product Name:** Smart phone

**Standard(s):** 47 CFR Part 2, 47 CFR Part 22, Subpart H

47 CFR Part 24, Subpart E

47 CFR Part 27

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems  
v03r01

KDB 971168 D02 Misc Rev Approv License Digital  
v02r02

The above device has been tested and found compliant with the requirement of the relative standards by  
China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR230745209-00F

**Date Of Issue:** 2023/12/21

**Reviewed By:** Calvin Chen

Title: RF Engineer

**Approved By:** Sun Zhong

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>5</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>8</b>
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details .....	11
1.2.3 Support Cable List and Details .....	11
1.2.4 Block Diagram of Test Setup.....	12
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>13</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>14</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>16</b>
<b>3.1 APPLICABLE STANDARD FOR PART 22 SUBPART H: .....</b>	<b>16</b>
3.1.1 RF Output Power .....	16
3.1.2 Spurious Emissions .....	16
3.1.3 Frequency stability.....	16
<b>3.2 APPLICABLE STANDARD FOR PART 24 SUBPART E: .....</b>	<b>18</b>
3.2.1 RF Output Power .....	18
3.2.2 Spurious Emissions .....	18
3.2.3 Frequency stability.....	18
<b>3.3 APPLICABLE STANDARD FOR PART 27: .....</b>	<b>19</b>
3.3.1 RF Output Power .....	19
3.3.2 Spurious Emissions .....	19
3.3.3 Frequency stability.....	21
<b>3.4 TEST METHOD: .....</b>	<b>22</b>
<b>4. Test DATA AND RESULTS.....</b>	<b>29</b>
<b>4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....</b>	<b>29</b>
<b>4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....</b>	<b>35</b>
<b>4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:.....</b>	<b>41</b>
<b>4.4 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5:.....</b>	<b>48</b>
<b>4.5 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 2.....</b>	<b>55</b>
<b>4.6 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5.....</b>	<b>76</b>
<b>4.7 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 12.....</b>	<b>92</b>
<b>4.8 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 13.....</b>	<b>108</b>
<b>4.9 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41.....</b>	<b>118</b>

<b>4.10 RADIATED SPURIOUS EMISSIONS.....</b>	<b>134</b>
<b>5. EUT PHOTOGRAPHS .....</b>	<b>144</b>
<b>6. TEST SETUP PHOTOGRAPHS .....</b>	<b>145</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230745209-00F	Original Report	2023/12/21

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Smart phone
<b>Trade Name:</b>	UMIDIGI
<b>EUT Model:</b>	MP36
<b>Operation Bands and modes:</b>	GSM/GPRS/EDGE: 850/1900 WCDMA: Band 2/5 LTE: Band 2/5/12/13/41
<b>Modulation Type:</b>	GSM/GPRS/EDGE:GMSK,8PSK WCDMA: BPSK,QPSK,16QAM LTE: BPSK,16QAM
<b>Rated Input Voltage:</b>	DC 3.87V from battery or DC 5/9/12/15/20/11V from adapter
<b>Serial Number:</b>	RF: 2BCU-1 RE: 2BCU-2
<b>EUT Received Date:</b>	2023/9/18
<b>EUT Received Status:</b>	Good

#### Operation Voltage( $V_{DC}$ ) ▲:

Lowest:	3.35	Normal:	3.87	Highest:	4.43
---------	------	---------	------	----------	------

#### Transmission Antenna Information ▲:

Antenna Manufacturer	Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (G <sub>T</sub> ) (dBi)	L <sub>c</sub> (dB)
ANWEI communication Equipment Co.,Ltd	FPC	GSM850	824-849	-4.65	0.5
		PCS1900	1850-1910	-1.14	0
		WCDMA B2	1850-1910	-1.14	0
		WCDMA B5	824-849	-4.65	0.5
		LTE B2	1850-1910	-1.14	0
		LTE B5	824-849	-4.65	0.5
		LTE B12	699-716	-6.53	0.5
		LTE B13	777-787	-4.97	0.5
		LTE B41	2496-2690	0.82	0.8

Note:

L<sub>c</sub>= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

For LTE Band 41, the Operation frequency is 2496-2690MHz for FCC.

GSM 850/ WCDMA Band 5/ LTE Band 5/ LTE Band 12/ LTE Band 13/5G NR n5 transmitted at antenna 0.

LTE Band 41 transmitted at antenna 1.

PCS 1900/ WCDMA Band 2/ LTE Band 2/5G NR n66 transmitted at antenna 3.

**Accessory Information:**

Accessory Description	Manufacturer	Model	Parameters
Adapter	UMIDIGI	HJ-PD66W-US	Input: AC 100-240V, 50/60Hz, 1.5A Output: DC 5.0V, 3.0A, 15.0W or 9.0V, 3.0A, 27.0W or 12.0V, 3.0A, 36.0W or 15.0V, 3.0A, 45.0W or 20.0V, 3.25A, 65.0W or 11.0V, 6.0A, 66.0W MAX

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in each operation mode.
<b>Equipment Modifications:</b>	No
<b>EUT Exercise Software:</b>	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting: GSM/GPRS/EGPRS  Function: Menu select > GSM Mobile Station > GSM 850/1900 Press Connection control to choose the different menus Press RESET > choose all the reset all settings Connection Press Signal Off to turn off the signal and change settings Network Support > GSM + GPRS or GSM + EGSM Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH  BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]  Channel Type > Off P0 > 4 dB Slot Config > Unchanged (if already set under MS signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)  Bit Stream > 2E9-1 PSR Bit Stream AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Connection Press Signal on to turn on the signal and change settings	



**WCDMA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta$	11/15	6/15	1 /15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30 15	2/15	5/15
	$\beta_c / \beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/1	2/15	30/15	4/15	5/15
	CM(dB)	1.0	3.	2.0	3.0	1.0
<b>HSDPA Specific Settings</b>	MPR(dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
<b>HSUPA Specific Settings</b>	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
	DE- PCCH		8	8	5	7
	DHARQ	0	0	0	0	0
	A Index	20	12	1	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	82.8	205.8	308.9
	Reference E_FCI's	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

**LTE (FDD):**

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	> 5	≤ 1
			5	> 6	≤ 1
			10	> 6	≤ 1
			15	> 8	≤ 1
			20	> 10	≤ 1
NS_04	6.6.2.2.2	41	5	> 6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 <sup>1</sup>	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

**LTE(TDD):**

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink		UpPTS		Extended cyclic prefix in downlink	
	DwPTS	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	DwPTS	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Calculated Duty Cycle**

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink  $\times (T_s) \times \# \text{ of } S + \# \text{ of } U$

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$  seconds


**1.2.2 Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
/	/	/	/

**1.2.3 Support Cable List and Details**

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

#### 1.2.4 Block Diagram of Test Setup

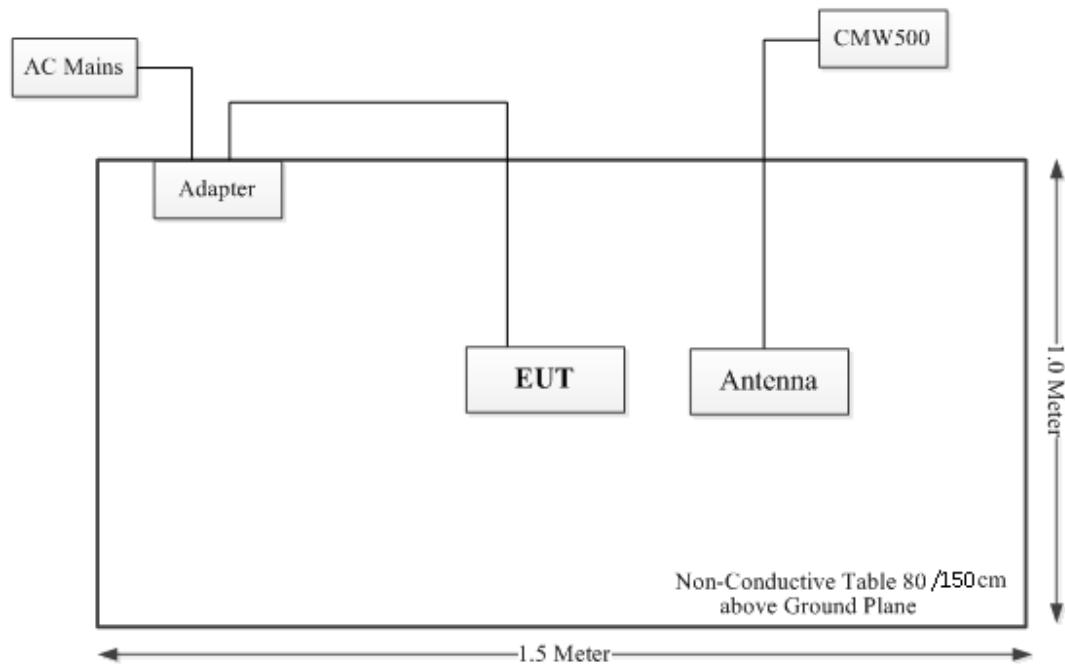

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 <sup>-6</sup>

## 2. SUMMARY OF TEST RESULTS

### Cellular Band: GSM 850/WCDMA Band 5/LTE Band 5:

FCC Standard Rule(s)	Description of Test	Result	Section
§ 2.1055, § 22.355	Frequency stability	Compliant	4.1, 4.4, 4.6
§2.1046;§ 22.913	Transmitter output power and effective radiated power (e.r.p.)	Compliant	4.1, 4.4, 4.6
§ 2.1051,§ 22.917 (a)	Transmitter unwanted emissions- at Antenna Terminal	Compliant	4.1, 4.4, 4.6
§ 22.917 (a)	Transmitter unwanted emissions- Out of band emission	Compliant	4.1, 4.4, 4.6
§ 2.1053, § 22.917 (a)	Transmitter unwanted emissions- Radiated Spurious emissions	Compliant	4.10
§ 2.1049; § 22.905	Occupied Bandwidth	Compliant	4.1, 4.4, 4.6

### PCS Band: GSM 1900/WCDMA Band 2/LTE Band 2:

FCC Standard Rule(s)	Description of Test	Result	Section
§ 2.1055, § 24.235	Frequency stability	Compliant	4.2, 4.3, 4.5
§2.1046,§ 24.232	Transmitter Output Power and Equivalent Isotropically Radiated Power	Compliant	4.2, 4.3, 4.5
§ 2.1051,§ 24.238 (a)	Transmitter unwanted emissions- at Antenna Terminal	Compliant	4.2, 4.3, 4.5
§ 24.238 (a)	Transmitter unwanted emissions- Out of band emission	Compliant	4.2, 4.3, 4.5
§ 2.1053,§ 24.238 (a)	Transmitter unwanted emissions- Radiated Spurious emissions	Compliant	4.10
§ 2.1049, § 24.238	Occupied Bandwidth	Compliant	4.2, 4.3, 4.5

**LTE Band 12/13:**

FCC Standard Rule(s)	Description of Test	Result	Section
§ 2.1055, §27.54	Transmitter frequency stability	Compliant	4.7, 4.8
§2.1046, §27.50	Transmitter output power and effective radiated power (e.r.p.)	Compliant	4.7, 4.8
§ 2.1051, §27.53	Transmitter unwanted emissions- at Antenna Terminal	Compliant	4.7, 4.8
§27.53	Transmitter unwanted emissions- Out of band emission	Compliant	4.7, 4.8
§ 2.1053, §27.53	Transmitter unwanted emissions- Radiated Spurious emissions	Compliant	4.10
§ 2.1049, §27.53	Occupied Bandwidth	Compliant	4.7, 4.8

**BRS/EBS Band: LTE Band 41:**

FCC Standard Rule(s)	Description of Test	Result	Section
§ 2.1055, §27.54	Frequency stability	Compliant	4.9
FCC§2.1046, §27.50	Transmitter Output Power and Equivalent Isotropically Radiated Power	Compliant	4.9
FCC§ 2.1051, §27.53	Transmitter unwanted emissions- at Antenna Terminal	Compliant	4.9
§27.53	Transmitter unwanted emissions- Out of band emission	Compliant	4.9
§ 2.1053, §27.53	Transmitter unwanted emissions- Radiated Spurious emissions	Compliant	4.10
§ 2.1049, §27.53	Occupied Bandwidth	Compliant	4.9

### 3. REQUIREMENTS AND TEST PROCEDURES

---

#### 3.1 Applicable Standard For Part 22 Subpart H:

##### 3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

##### 3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

##### 3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.



Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

<b>Frequency range (MHz)</b>	<b>Base, fixed (ppm)</b>	<b>Mobile &gt;3 watts (ppm)</b>	<b>Mobile ≤3 watts (ppm)</b>
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	<b>2.5</b>	<b>2.5</b>
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

## **3.2 Applicable Standard For Part 24 Subpart E:**

### **3.2.1 RF Output Power**

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.2.2 Spurious Emissions**

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

### **3.2.3 Frequency stability**

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 3.3 Applicable Standard For Part 27:

#### 3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

#### 3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than:  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log (P)$  dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than  $61 + 10 \log (P)$  dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than  $67 + 10 \log (P)$  dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2296 and 2300 MHz,  $61 + 10 \log (P)$  dB on all frequencies between 2292 and 2296 MHz,  $67 + 10 \log (P)$  dB on all frequencies between 2288 and 2292 MHz, and  $70 + 10 \log (P)$  dB below 2288 MHz;

(iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2365 MHz, and not less than  $70 + 10 \log (P)$  dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### 3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 3.4 Test Method:

#### 3.4.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively  
(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

#### Test Setup Block:

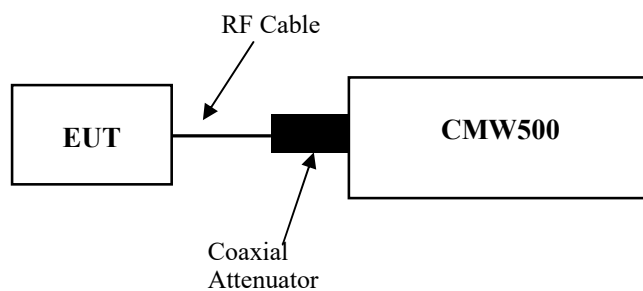

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

### 3.4.2 Occupied Bandwidth


According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of  $1.5 \times \text{OBW}$  is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.  
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

#### Test Setup Block:

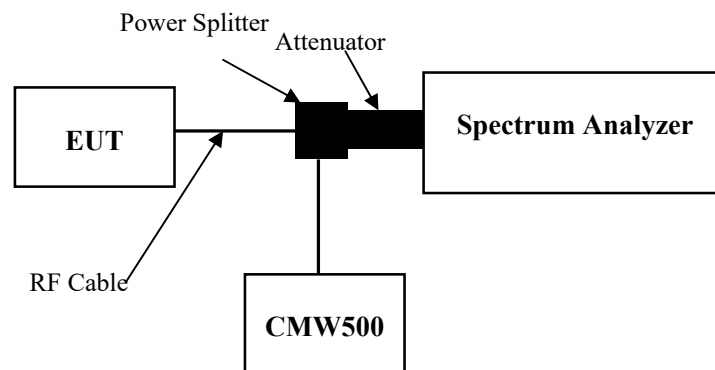


### 3.4.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),8 effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

#### Test Setup Block:

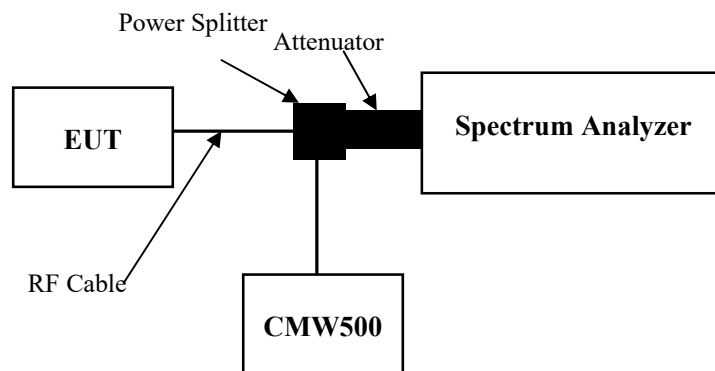




### 3.4.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

#### Test Setup Block:

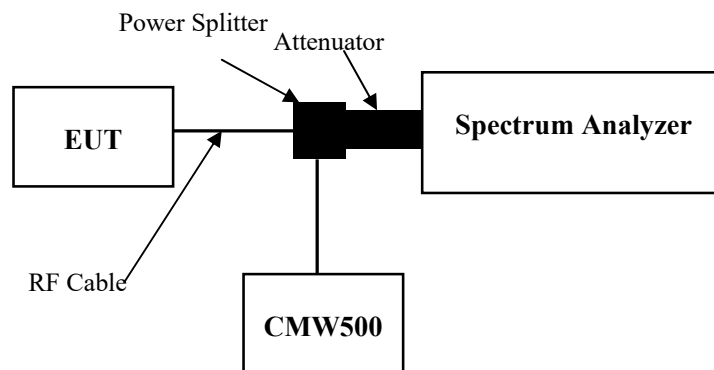

### 3.4.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.


#### Test Setup Block:

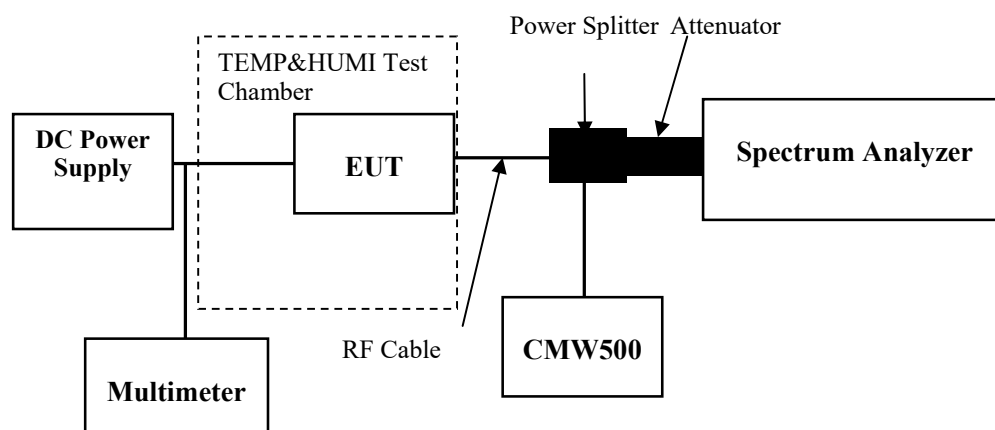


### 3.4.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

**Test setup:**

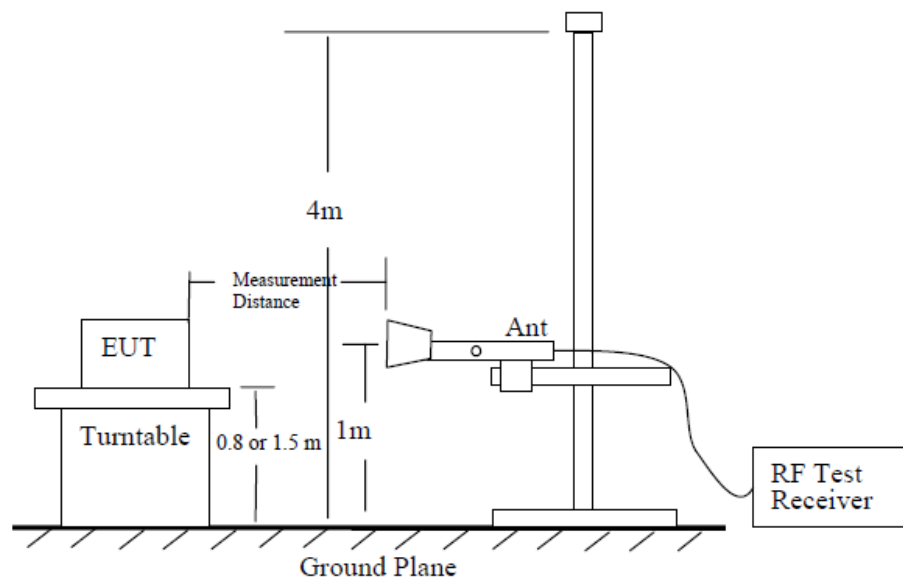

**Figure 6—Test site-up for radiated ERP and/or EIRP measurements**

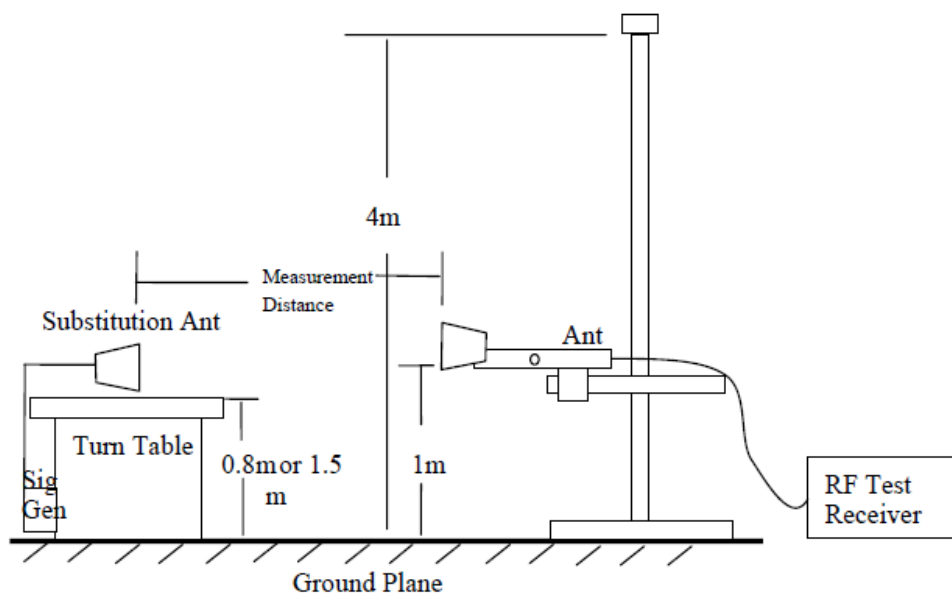

**Figure 7—Substitution method set-up for radiated emission**

**Test Procedure:**

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
  - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
 
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where
 

$P_e$  = equivalent emission power in dBm  
 $P_s$  = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:  $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$ . If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

## 4. Test DATA AND RESULTS

### 4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	2BCU-1	Test Date:	2023/9/22~2023/9/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ken Tang	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	26.5-25.4	Relative Humidity: (%)	57-49	ATM Pressure: (kPa)	101
----------------------	-----------	------------------------------	-------	------------------------	-----

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	2292/10/8	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

**Test Data:****RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	32.39	32.49	32.34	25.19	38.45
GPRS 1 Slot	32.19	32.43	32.44	25.14	38.45
GPRS 2 Slots	30.2	30.42	30.38	23.12	38.45
GPRS 3 Slots	28.23	28.12	28.34	21.04	38.45
GPRS 4 Slots	26.38	26.18	26.47	19.17	38.45
EDGE 1 Slot	25.02	25.05	25.12	17.82	38.45
EDGE 2 Slots	23.32	23.38	23.36	16.08	38.45
EDGE 3 Slots	21.29	21.21	21.17	13.99	38.45
EDGE 4 Slots	19.58	19.32	19.41	12.28	38.45
"Note: ERP= Conducted Power(dBm) - LC(dB) + GT(dBd) GT(dBd)=GT(dBi)-2.15"					
				<b>Result:</b>	<b>Pass</b>

**Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.244	0.247	0.247	0.310	0.312	0.316
EDGE	0.246	0.245	0.244	0.313	0.320	0.321
Note: The test plots please refer to the Plots of Occupied Bandwidth						

**Spurious Emissions at Antenna Terminal**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>
----------------	--


**Out of band emission, Band Edge**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---

Frequency Stability for FCC:					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.87	115.673	0.138	2.5
	-20	3.87	105.720	0.126	2.5
	-10	3.87	102.639	0.123	2.5
	0	3.87	110.335	0.132	2.5
	10	3.87	101.363	0.121	2.5
	20	3.87	106.763	0.128	2.5
	30	3.87	113.271	0.135	2.5
	40	3.87	101.262	0.121	2.5
	50	3.87	109.929	0.131	2.5
Frequency Stability vs. Voltage	20	3.35	107.854	0.129	2.5
	20	4.43	105.883	0.127	2.5
				<b>Result:</b>	<b>Pass</b>

Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.87	111.672	0.133	2.5
	-20	3.87	114.941	0.137	2.5
	-10	3.87	115.900	0.139	2.5
	0	3.87	103.780	0.124	2.5
	10	3.87	106.083	0.127	2.5
	20	3.87	119.307	0.143	2.5
	30	3.87	102.652	0.123	2.5
	40	3.87	100.763	0.120	2.5
	50	3.87	116.189	0.139	2.5
Frequency Stability vs. Voltage	20	3.35	103.215	0.123	2.5
	20	4.43	110.774	0.132	2.5
				<b>Result:</b>	<b>Pass</b>

**Test Plots**(Note: The 11.5dB is the Insertion loss of the RF cable, Coaxial tee connector and Attenuator, which was offset into the Spectrum Analyzer):

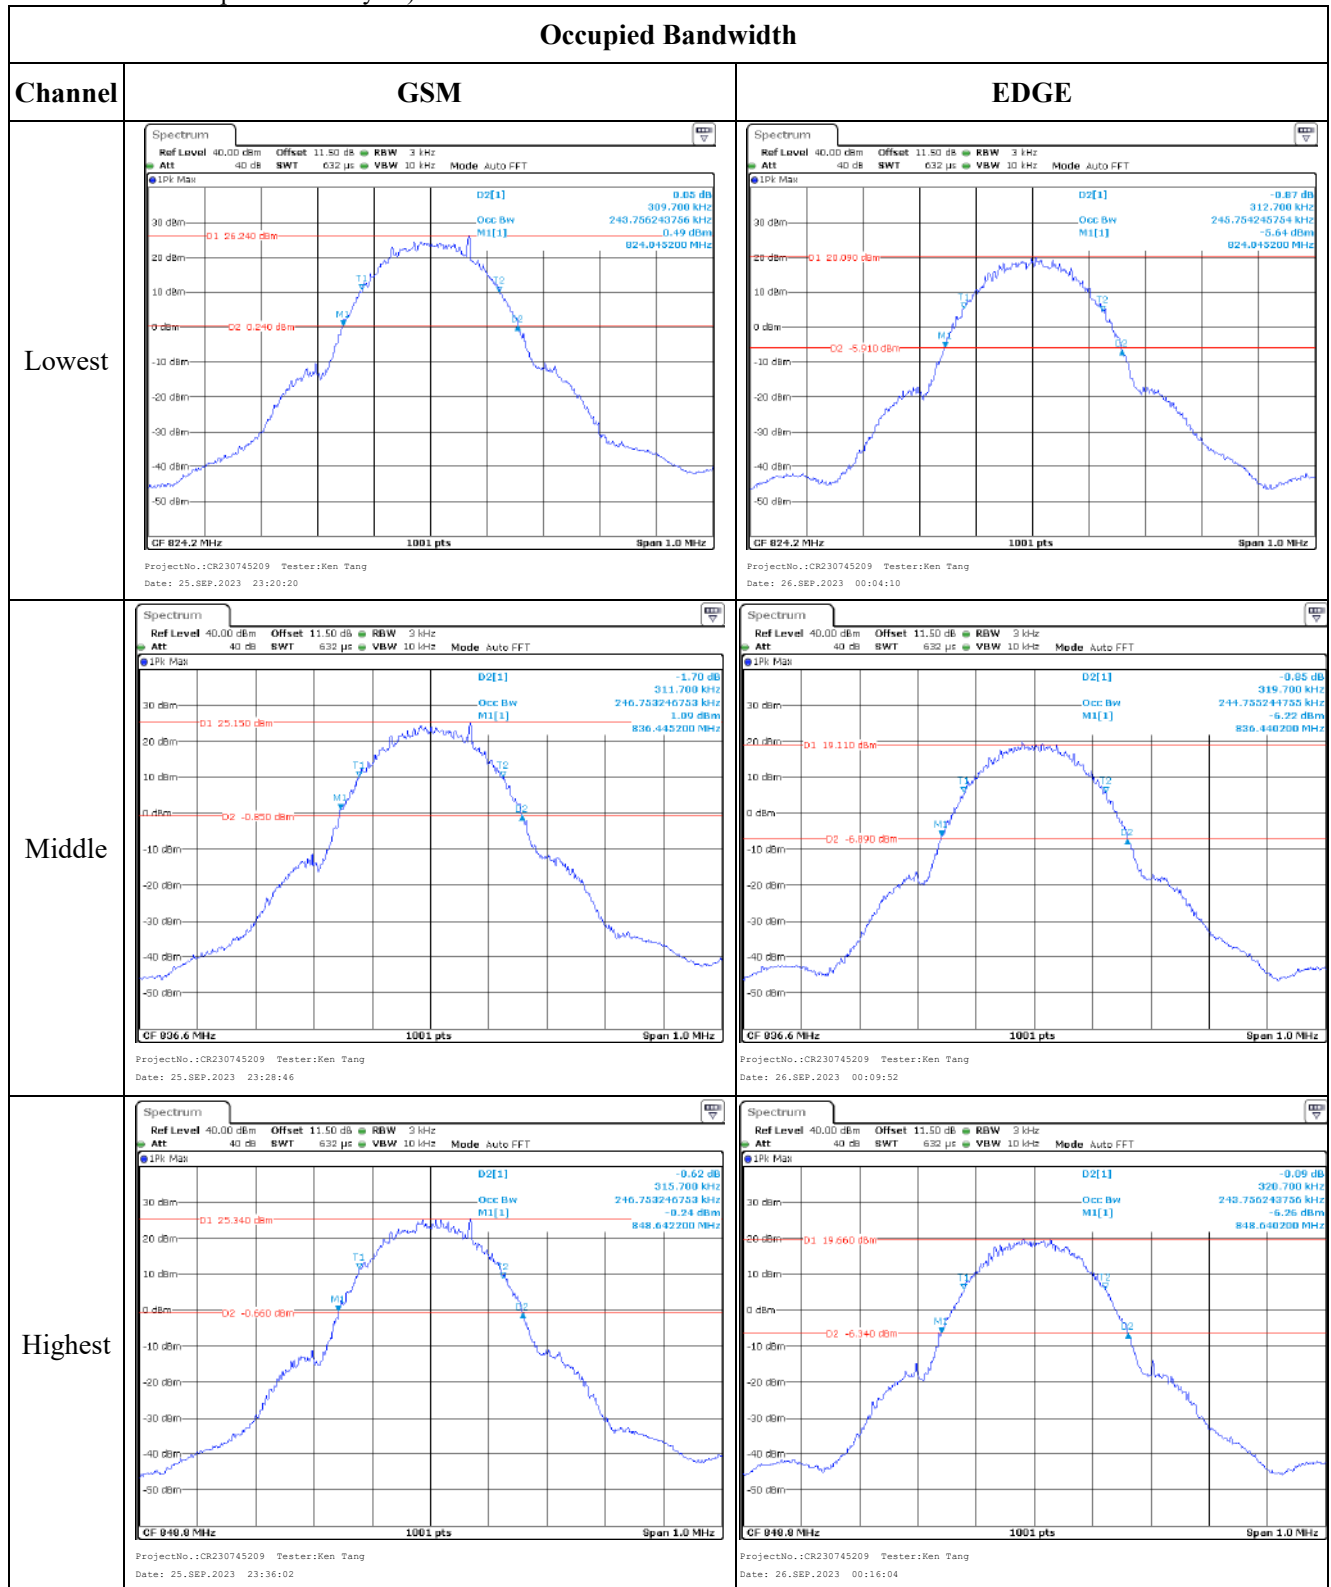





## Spurious Emissions at Antenna Terminal



Channel

GSM



Lowest

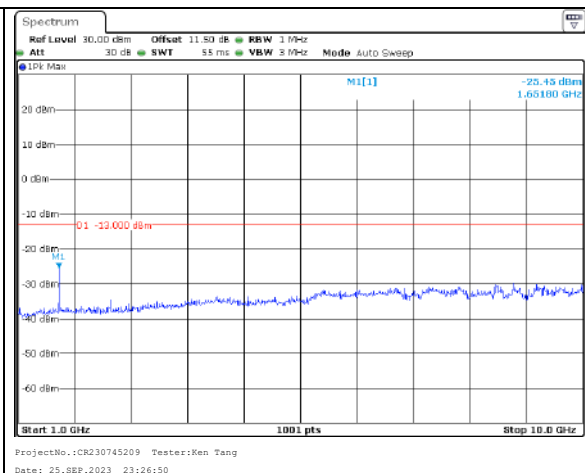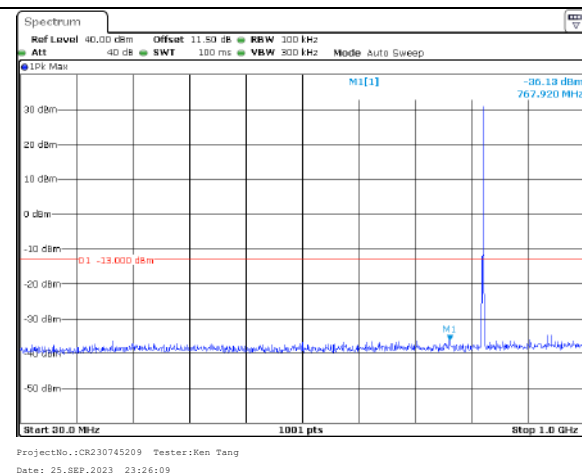


Middle

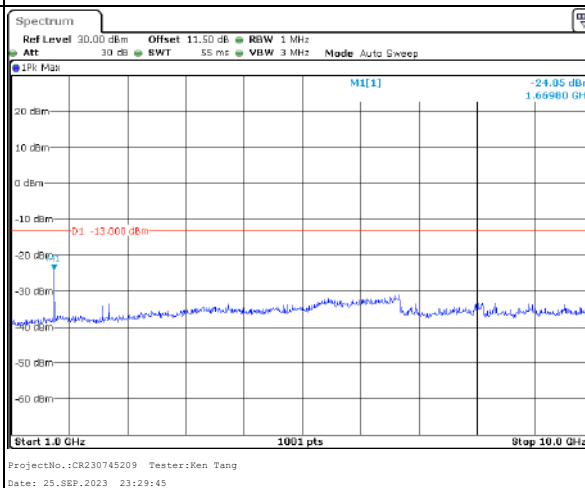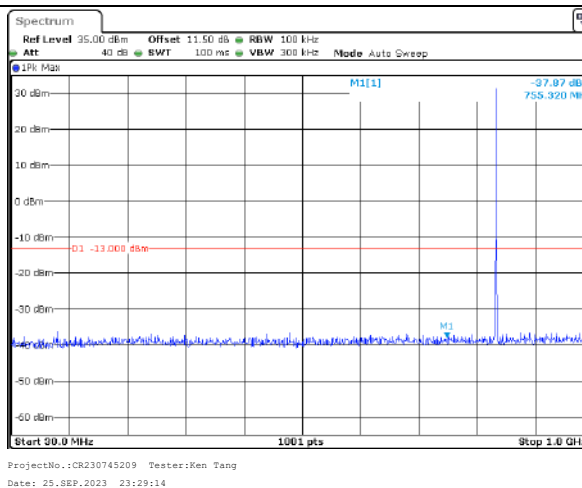

Highest

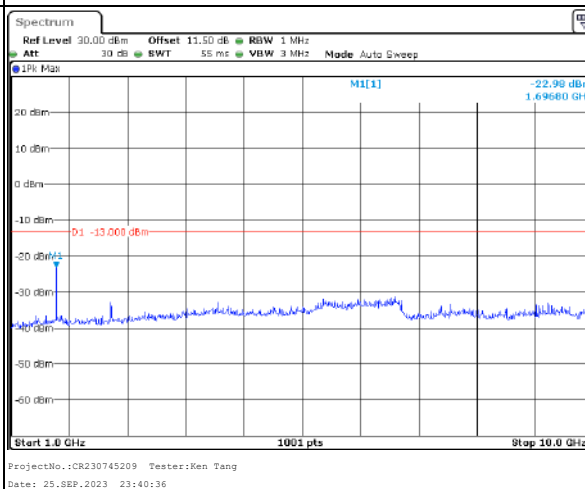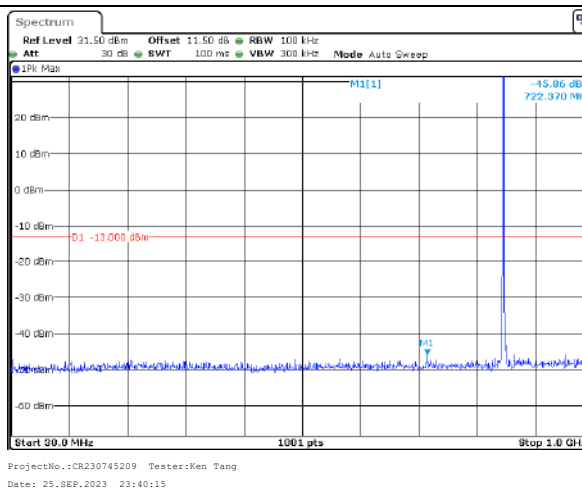

## Out of band emission, Band Edge

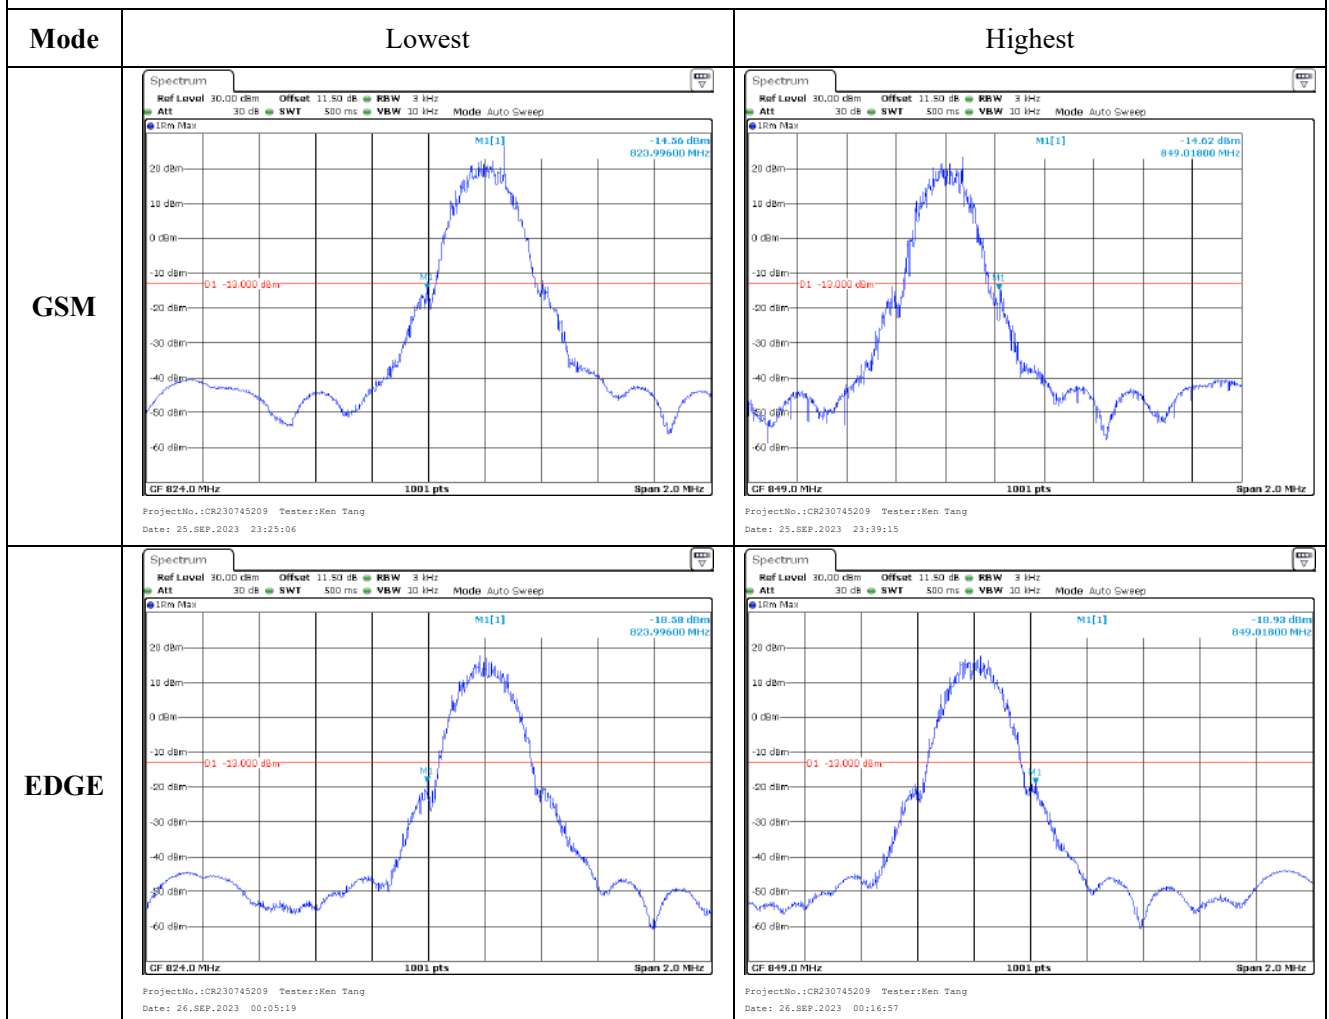

**4.2 Antenna Port Test Data and Results for GSM 1900 band:**

Serial Number:	2BCU-1	Test Date:	2023/9/22~2023/9/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ken Tang	Test Result:	<b>Pass</b>

**Environmental Conditions:**

Temperature: (°C)	26.5-25.4	Relative Humidity: (%)	57-49	ATM Pressure: (kPa)	101
----------------------	-----------	------------------------------	-------	------------------------	-----

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency For Each Mode:**

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

**Test Data:**

<b>RF Output Power</b>					
Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	28.87	28.74	28.96	27.82	33
GPRS 1 Slot	26.85	26.99	26.81	25.85	33
GPRS 2 Slots	25.04	25.14	25.16	24.02	33
GPRS 3 Slots	23.05	23.16	23.21	22.07	33
GPRS 4 Slots	26.14	26.07	26.29	25.15	33
EDGE 1 Slot	24.59	24.56	24.69	23.55	33
EDGE 2 Slots	22.78	22.88	22.61	21.74	33
EDGE 3 Slots	20.43	20.23	20.25	19.29	33
EDGE 4 Slots	18.35	18.28	18.43	17.29	33
Note: EIRP=Conducted Power(dBm) - L <sub>c</sub> (dB) + G <sub>T</sub> (dBi)					
				<b>Result:</b>	<b>Pass</b>

**Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.247	0.246	0.245	0.317	0.315	0.313
EDGE	0.242	0.244	0.244	0.316	0.317	0.32
Note: The test plots please refer to the Plots of Occupied Bandwidth						

**Spurious Emissions at Antenna Terminal**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>
----------------	--

**Out of band emission, Band Edge**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---

**Frequency Stability for FCC:**

Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.87	1850.027	1850.000	1909.985	1910.000
	-20	3.87	1850.030	1850.000	1909.990	1910.000
	-10	3.87	1850.002	1850.000	1909.997	1910.000
	0	3.87	1850.008	1850.000	1909.972	1910.000
	10	3.87	1850.029	1850.000	1909.997	1910.000
	20	3.87	1850.001	1850.000	1909.987	1910.000
	30	3.87	1850.023	1850.000	1909.986	1910.000
	40	3.87	1850.006	1850.000	1909.983	1910.000
	50	3.87	1850.026	1850.000	1909.993	1910.000
Frequency Stability vs. Voltage	20	3.35	1850.008	1850.000	1909.971	1910.000
	20	4.43	1850.028	1850.000	1909.997	1910.000
<b>Result:</b>					<b>Pass</b>	

Test Mode:	8PSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.87	1850.018	1850.000	1909.976	1910.000
	-20	3.87	1850.022	1850.000	1909.980	1910.000
	-10	3.87	1850.002	1850.000	1909.970	1910.000
	0	3.87	1850.003	1850.000	1909.990	1910.000
	10	3.87	1850.025	1850.000	1909.994	1910.000
	20	3.87	1850.020	1850.000	1909.985	1910.000
	30	3.87	1850.019	1850.000	1909.980	1910.000
	40	3.87	1850.004	1850.000	1909.971	1910.000
	50	3.87	1850.021	1850.000	1909.986	1910.000
Frequency Stability vs. Voltage	20	3.35	1850.017	1850.000	1909.977	1910.000
	20	4.43	1850.002	1850.000	1909.983	1910.000
<b>Result:</b>					<b>Pass</b>	



		Occupied Bandwidth	
Channel		GSM	EDGE
Lowest		<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 00:10:51</p>	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 18:57:56</p>
Middle		<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 00:38:47</p>	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 19:04:22</p>
Highest		<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 00:42:30</p>	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 19:08:34</p>

## Spurious Emissions at Antenna Terminal



Channel

GSM



Lowest

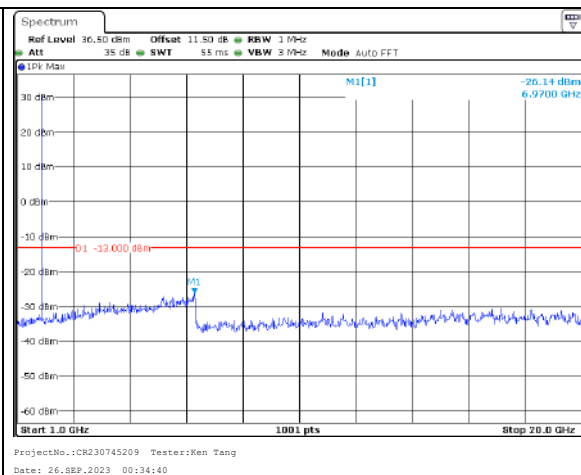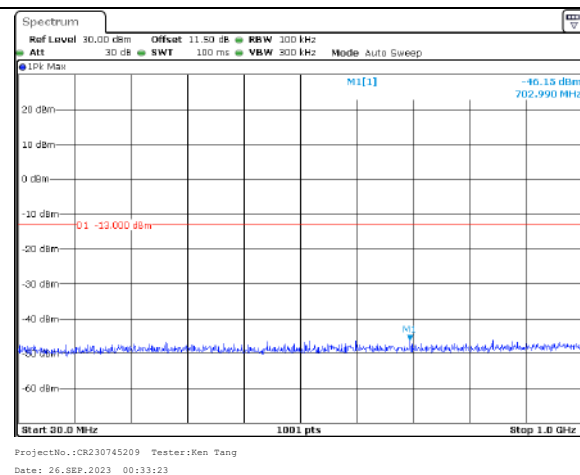


Middle

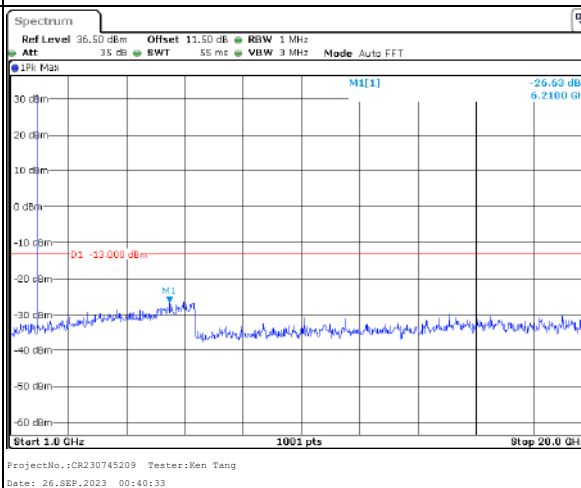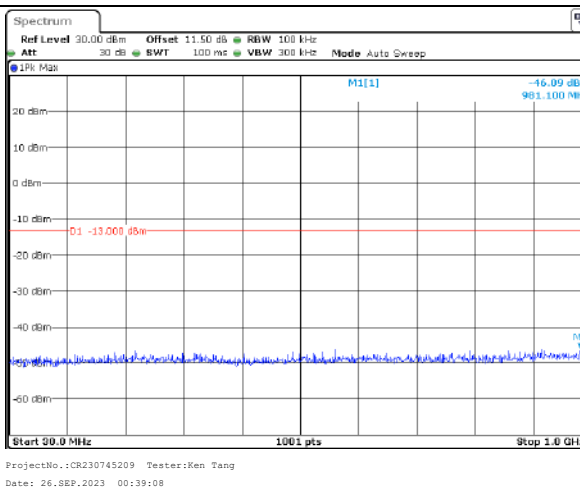

Highest

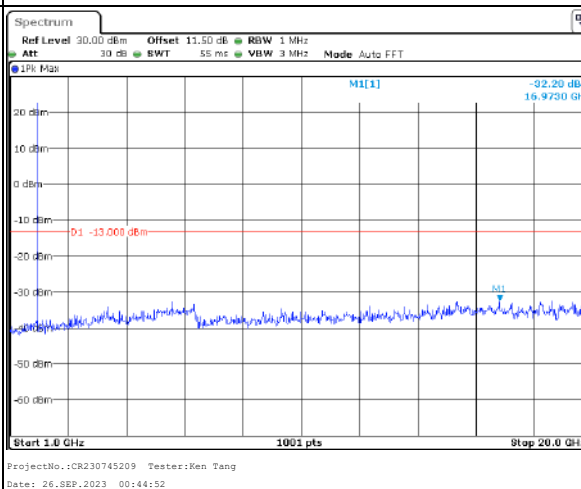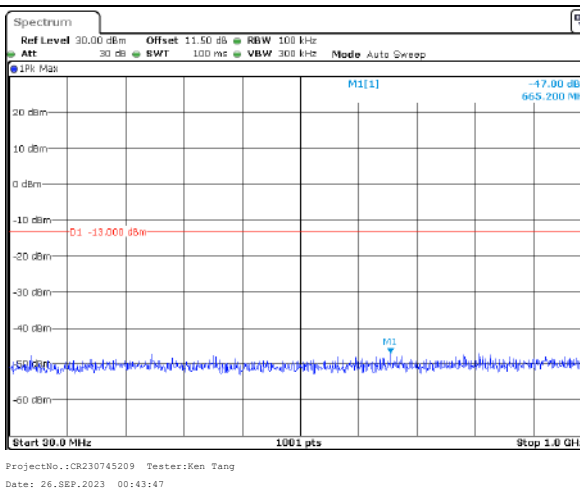

## Out of band emission, Band Edge

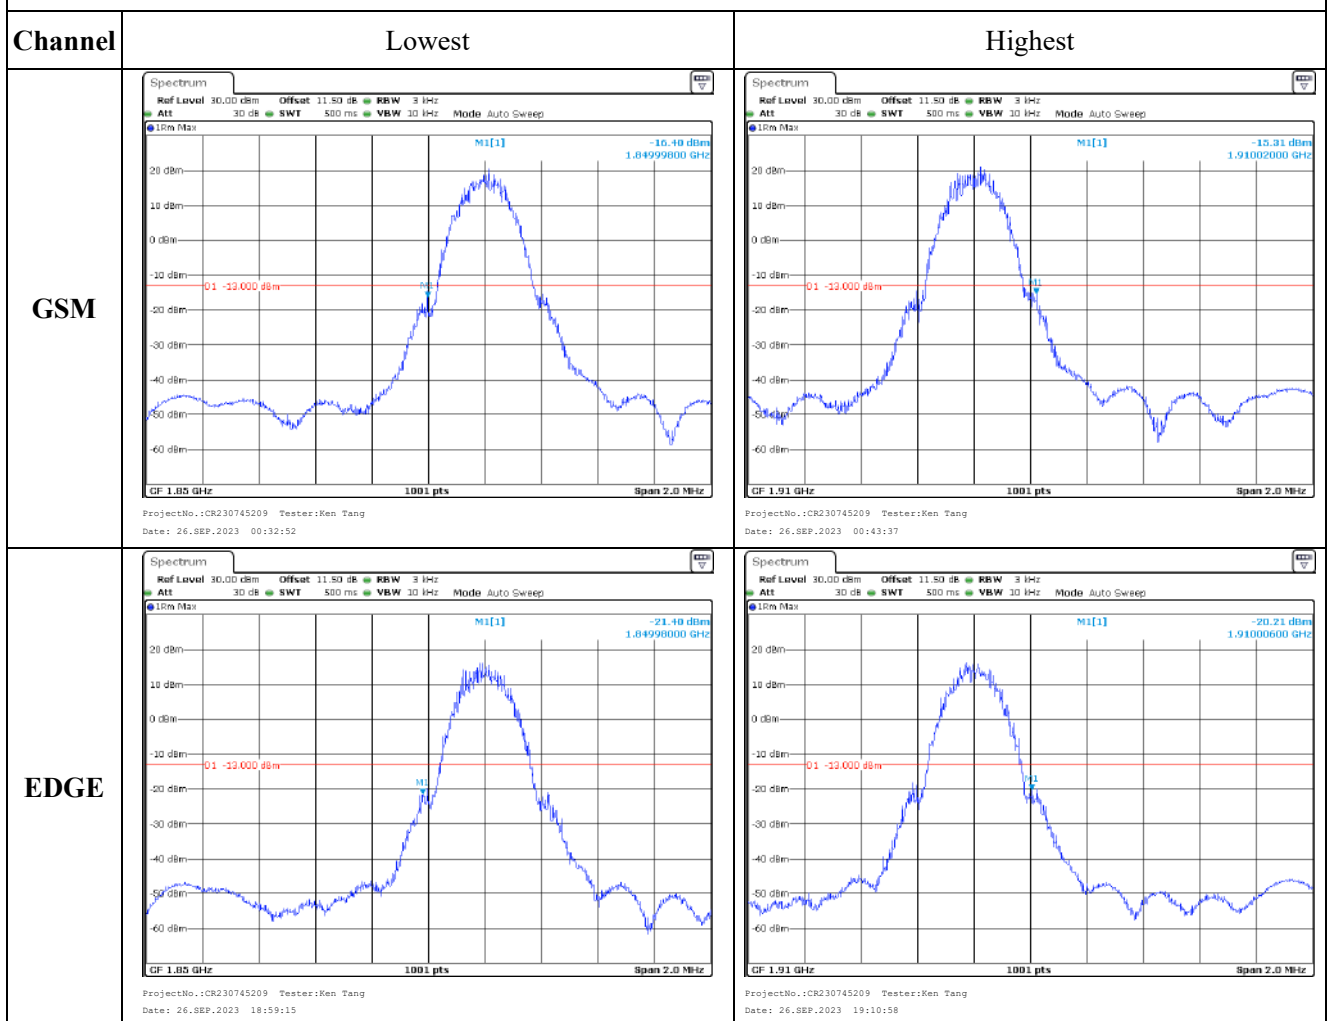



**4.3 Antenna Port Test Data and Results for WCDMA Band 2:**

Serial Number:	2BCU-1	Test Date:	2023/9/22~2023/9/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ken Tang	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.5-25.4	Relative Humidity: (%)	57-49	ATM Pressure: (kPa)	101
----------------------	-----------	------------------------------	-------	------------------------	-----

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency For Each Mode:**

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1852.4	1880	1907.6

**Test Data:****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	17.17	17.09	17.12	16.03	33
HSDPA Subtest 1	16.78	16.81	16.92	15.78	33
HSDPA Subtest 2	16.95	16.96	16.94	15.82	33
HSDPA Subtest 3	16.86	17.00	17.04	15.9	33
HSDPA Subtest 4	16.81	16.96	16.95	15.82	33
HSUPA Subtest 1	16.97	16.97	16.79	15.83	33
HSUPA Subtest 2	16.79	16.88	17.03	15.89	33
HSUPA Subtest 3	16.98	16.88	16.99	15.85	33
HSUPA Subtest 4	16.90	16.80	16.93	15.79	33
HSUPA Subtest 5	16.67	16.90	16.88	15.76	33
HSPA+ Subtest 1	16.35	16.55	16.42	15.41	33

Note: EIRP=Conducted Power(dBm) - L<sub>c</sub>(dB) + G<sub>T</sub>(dBi)**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	6.53	9.98	9.92	13
HSDPA	9.36	9.06	6.22	13
HSUPA	8.96	9.44	7.87	13

**Result:****Pass**

**Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.166	4.196	4.166	4.755	4.835	4.775
HSDPA	4.156	4.166	4.146	4.715	4.735	4.715
HSUPA	4.156	4.166	4.156	4.715	4.725	4.705

Note: The test plots please refer to the Plots of Occupied Bandwidth

**Spurious Emissions at Antenna Terminal**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>
----------------	--


**Out of band emission, Band Edge**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---

**Frequency Stability for FCC:**

Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.87	1850.021	1850.000	1909.990	1910.000
	-20	3.87	1850.028	1850.000	1909.975	1910.000
	-10	3.87	1850.007	1850.000	1909.963	1910.000
	0	3.87	1850.014	1850.000	1909.971	1910.000
	10	3.87	1850.019	1850.000	1909.983	1910.000
	20	3.87	1850.003	1850.000	1909.997	1910.000
	30	3.87	1850.012	1850.000	1909.986	1910.000
	40	3.87	1850.026	1850.000	1909.971	1910.000
	50	3.87	1850.013	1850.000	1909.995	1910.000
Frequency Stability vs. Voltage	20	3.35	1850.013	1850.000	1909.330	1910.000
	20	4.43	1850.009	1850.000	1909.994	1910.000
					<b>Result:</b>	<b>Pass</b>

**Test Plots**(Note: The 11.5dB is the Insertion loss of the RF cable, Coaxial tee connector and Attenuator, which was offset into the Spectrum Analyzer):

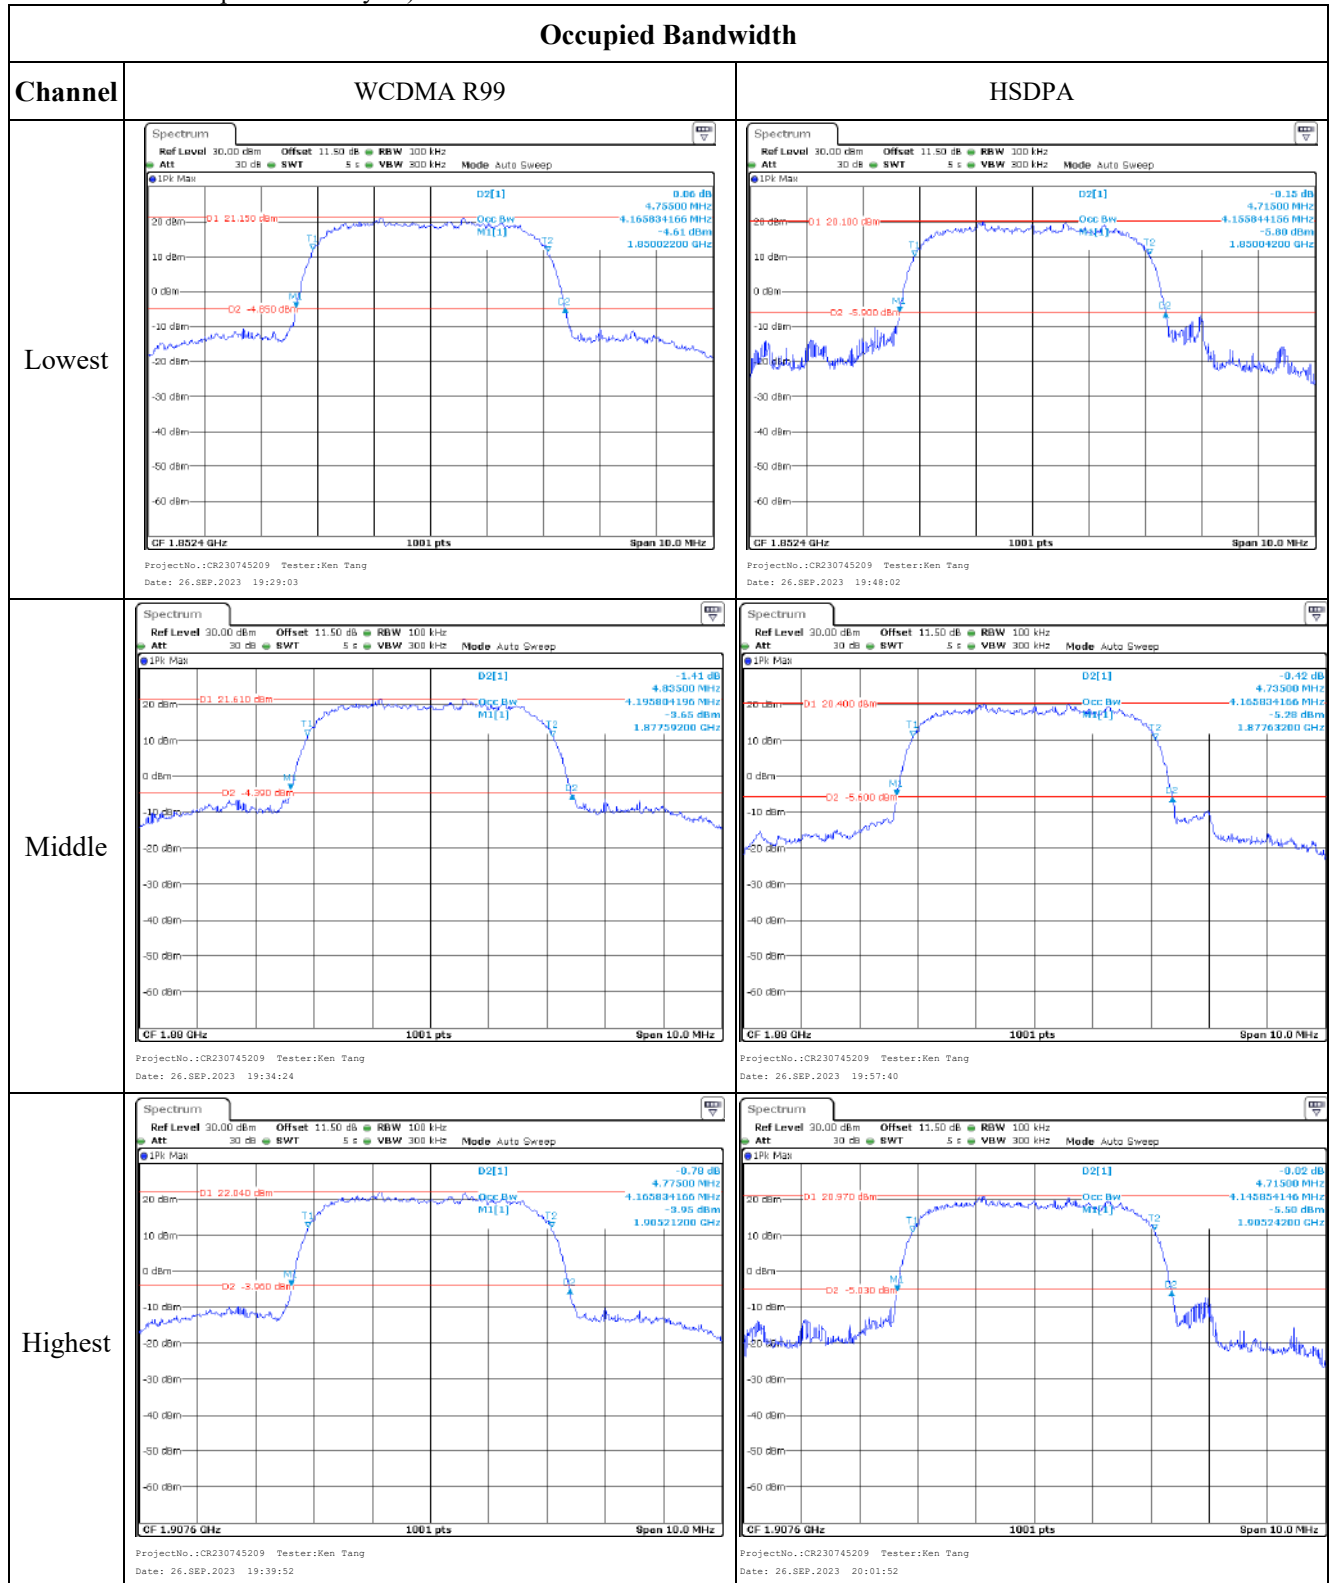


## Occupied Bandwidth


Channel

HSUPA


Lowest

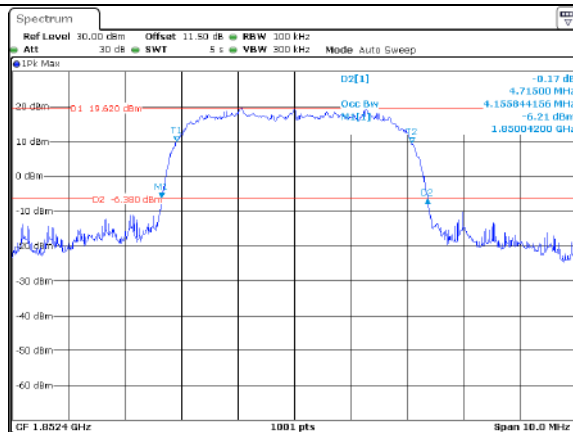

Middle

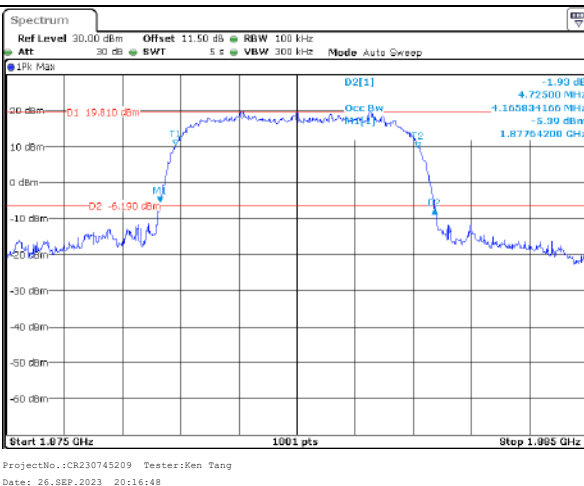

Highest


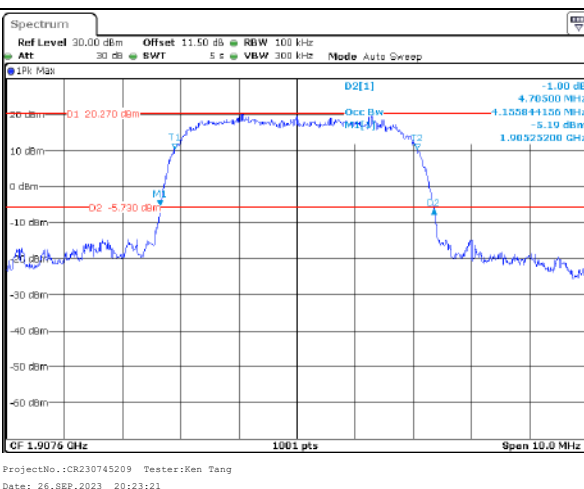


## Spurious Emissions at Antenna Terminal



Channel

WCDMA R99



Lowest

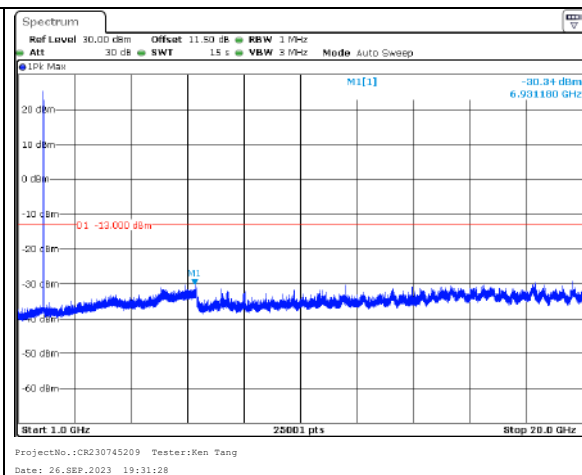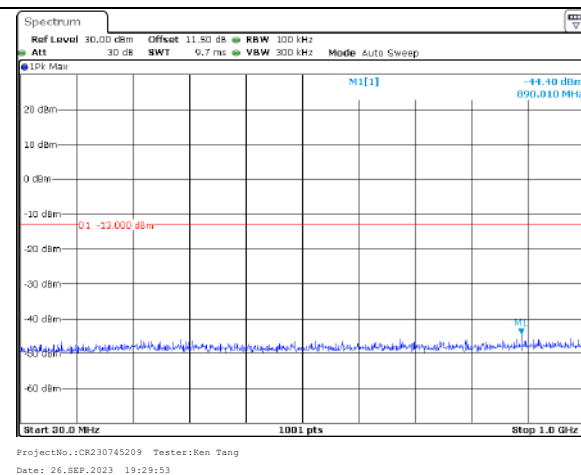

Middle

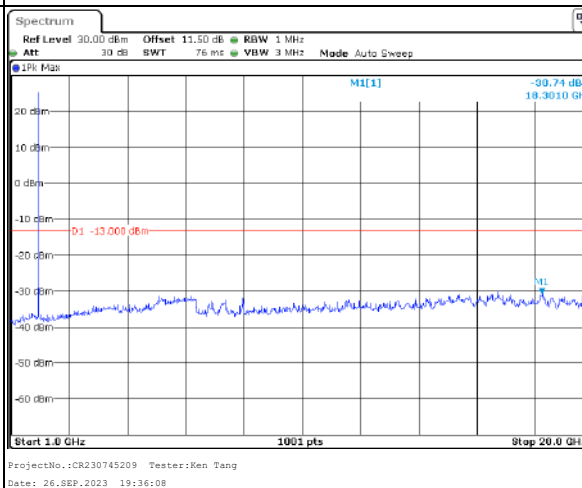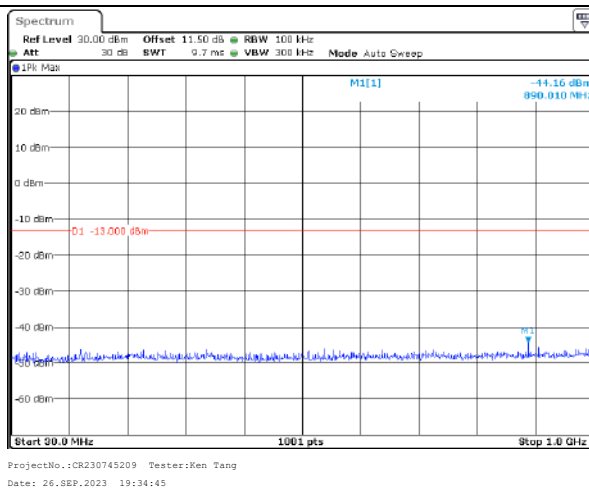

Highest

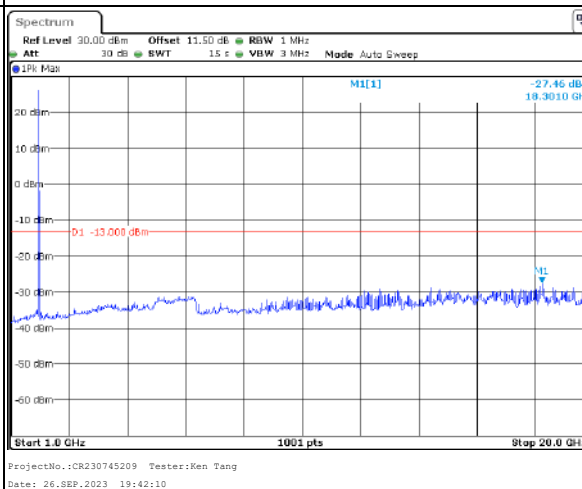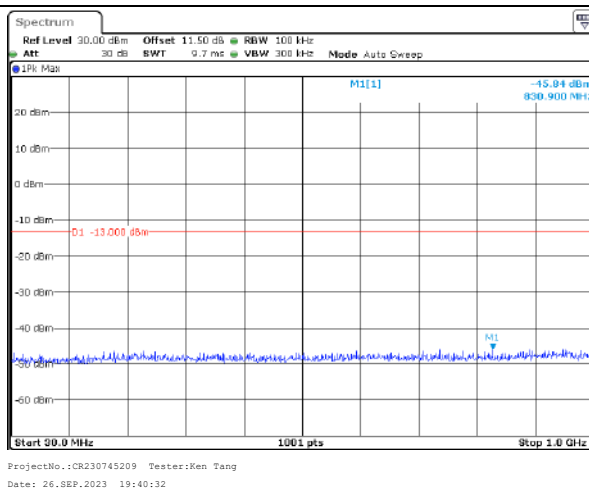

## Out of band emission, Band Edge

Mode	Lowest	Highest
R99	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 19:29:32</p>	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 19:40:11</p>
HSUPA	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 20:12:18</p>	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 20:23:35</p>
HSDPA	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 19:49:06</p>	<p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 20:02:52</p>

**4.4 Antenna Port Test Data and Results for WCDMA Band 5:**

Serial Number:	2BCU-1	Test Date:	2023/9/22~2023/9/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ken Tang	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.5-25.4	Relative Humidity: (%)	57-49	ATM Pressure: (kPa)	101
----------------------	-----------	------------------------------	-------	------------------------	-----

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency:**

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	826.4	836.6	846.6



**Test Data:****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.03	23.20	23.06	15.9	38.45
HSDPA Subtest 1	22.99	23.09	22.89	15.79	38.45
HSDPA Subtest 2	22.85	22.96	22.91	15.66	38.45
HSDPA Subtest 3	23.06	22.84	22.9	15.76	38.45
HSDPA Subtest 4	22.79	22.71	22.99	15.69	38.45
HSUPA Subtest 1	23.22	23.05	23.18	15.92	38.45
HSUPA Subtest 2	23.15	23.32	23.19	16.02	38.45
HSUPA Subtest 3	23.24	23.3	23.26	16	38.45
HSUPA Subtest 4	23.18	23.15	23.25	15.95	38.45
HSUPA Subtest 5	23.21	23.06	23.09	15.91	38.45
HSPA+ Subtest 1	22.96	22.89	22.84	15.66	38.45
"Note: ERP= Conducted Power(dBm) - LC(dB) + GT(dBd) GT(dBd)=GT(dBi)-2.15"					
				<b>Result:</b>	<b>Pass</b>

**Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	9.12	7.34	6.96	13
HSDPA	7.12	7.32	7.62	13
HSUPA	8.65	9.01	6.97	13
				Result: Pass

**Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.156	4.206	4.166	4.735	4.835	4.785
HSDPA	4.146	4.166	4.146	4.705	4.745	4.705
HSUPA	4.166	4.186	4.156	4.715	4.775	4.725

Note: The test plots please refer to the Plots of Occupied Bandwidth

**Spurious Emissions at Antenna Terminal**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>
----------------	--


**Out of band emission, Band Edge**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---

**Frequency Stability for FCC**

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.87	119.955	0.143	2.5
	-20	3.87	106.542	0.127	2.5
	-10	3.87	114.753	0.137	2.5
	0	3.87	117.042	0.140	2.5
	10	3.87	117.248	0.140	2.5
	20	3.87	118.623	0.142	2.5
	30	3.87	110.971	0.133	2.5
	40	3.87	105.080	0.126	2.5
	50	3.87	102.381	0.122	2.5
Frequency Stability vs. Voltage	20	3.35	115.250	0.138	2.5
	20	4.43	101.553	0.121	2.5
<b>Result:</b>				<b>Pass</b>	

**Test Plots**(Note: The 11.5dB is the Insertion loss of the RF cable, Coaxial tee connector and Attenuator, which was offset into the Spectrum Analyzer):

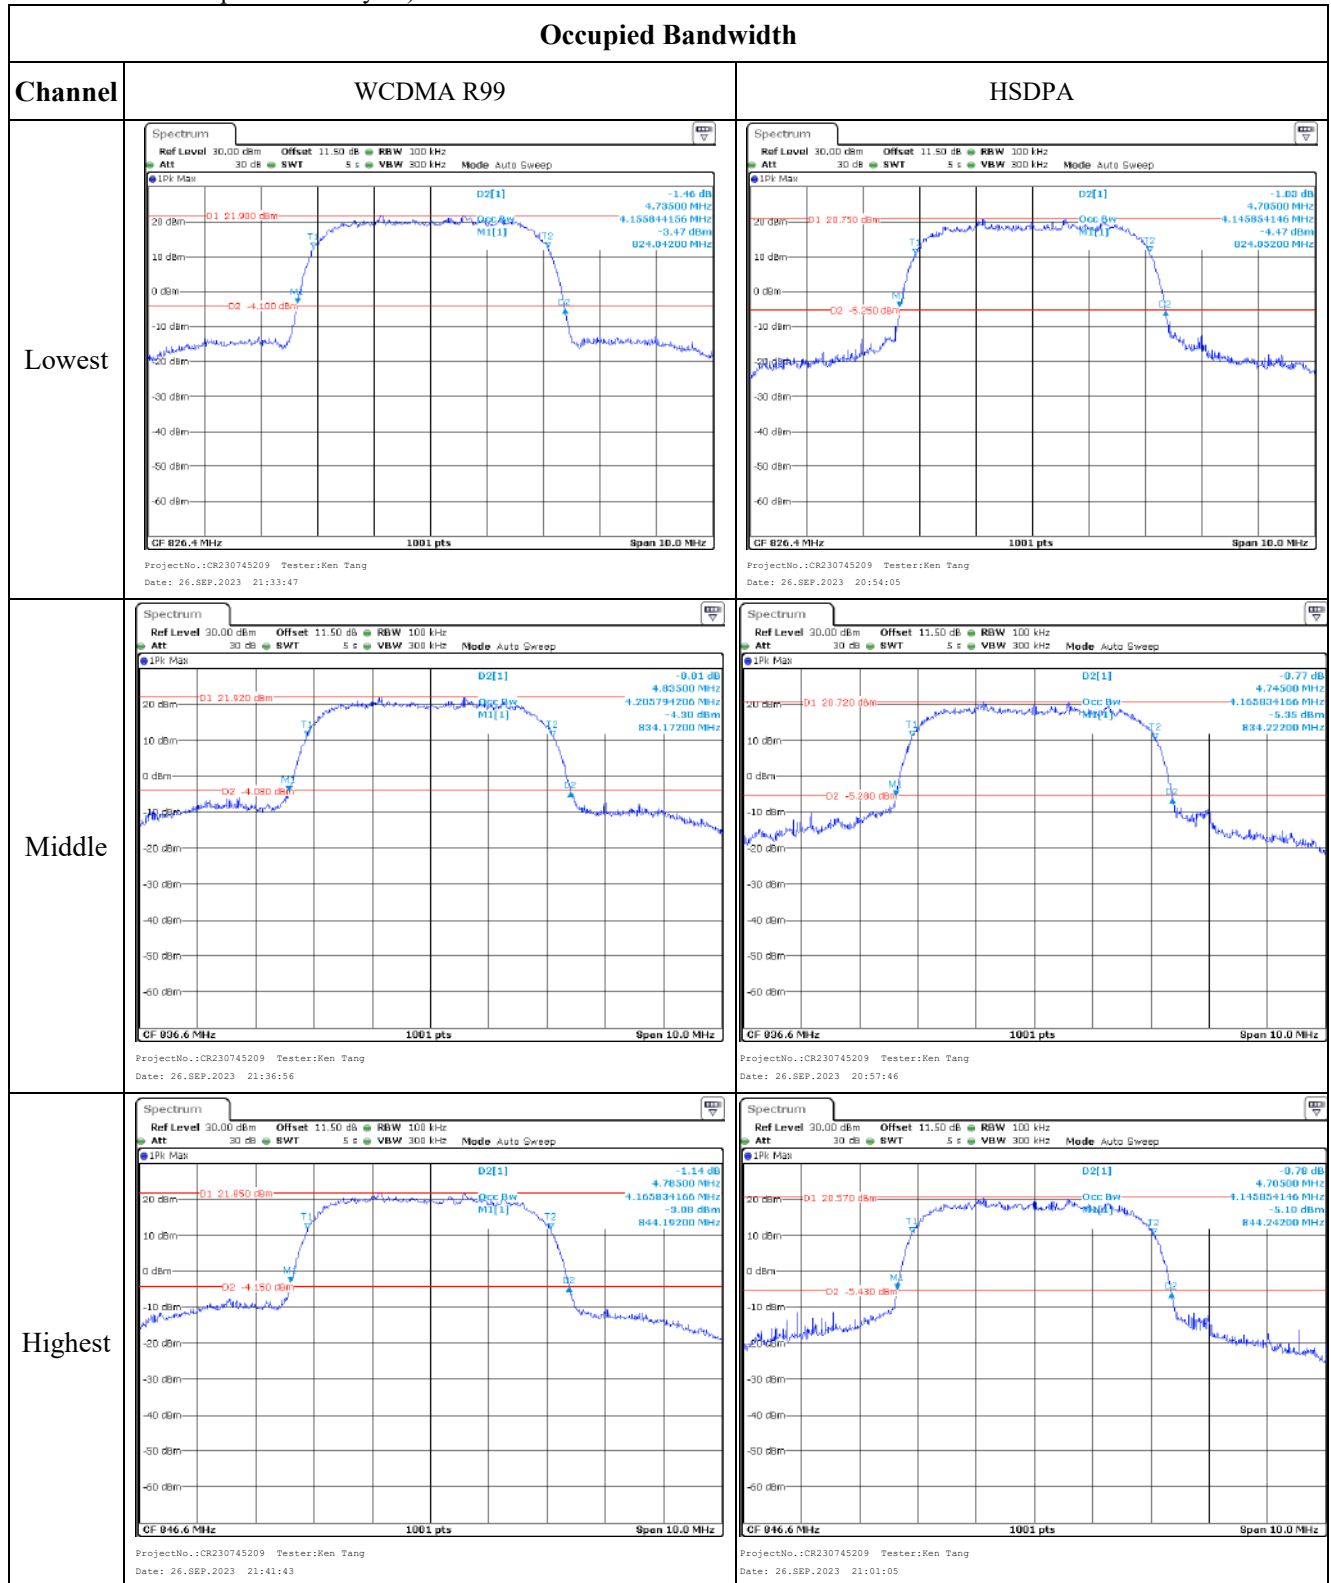


## Occupied Bandwidth

Channel


HSUPA

Lowest

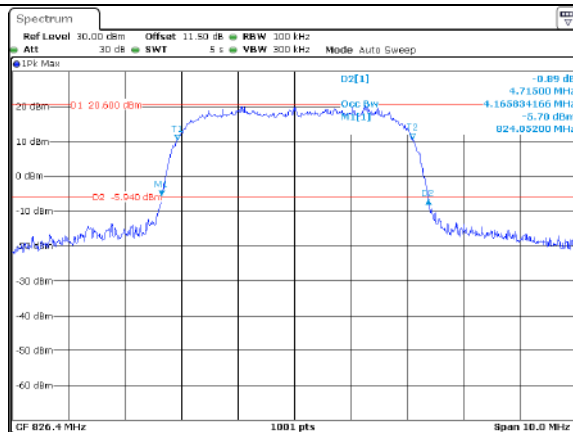


ProjectNo.:CR230745209 Tester:Ken Tang  
Date: 26.SEP.2023 20:35:14

Middle

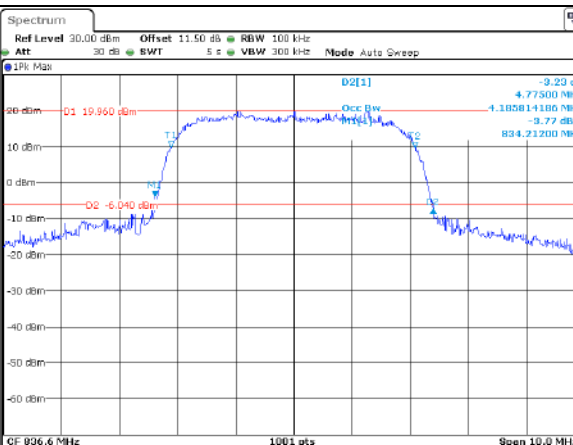

ProjectNo.:CR230745209 Tester:Ken Tang  
Date: 26.SEP.2023 20:43:34

Highest

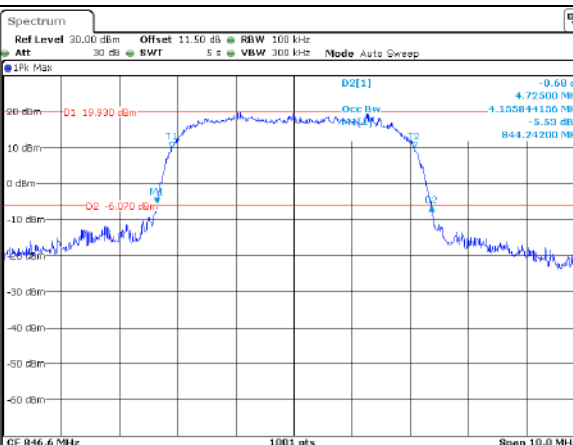



ProjectNo.:CR230745209 Tester:Ken Tang  
Date: 26.SEP.2023 20:48:22

## Spurious Emissions at Antenna Terminal



Channel

WCDMA R99



Lowest

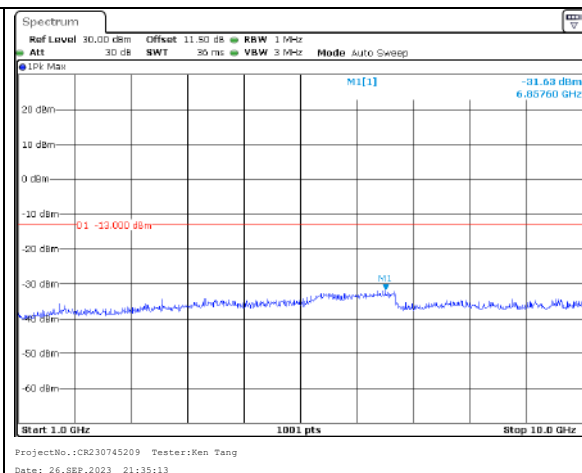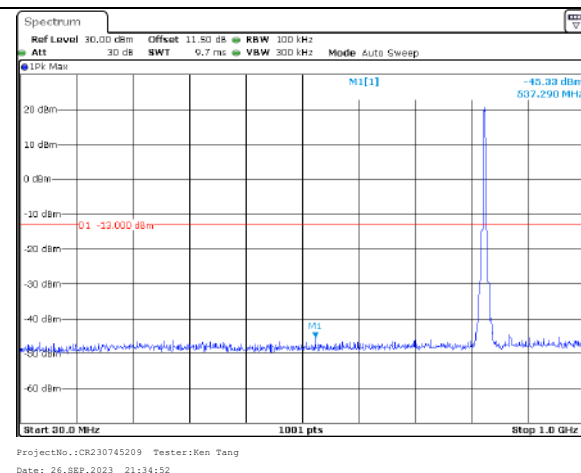







Middle

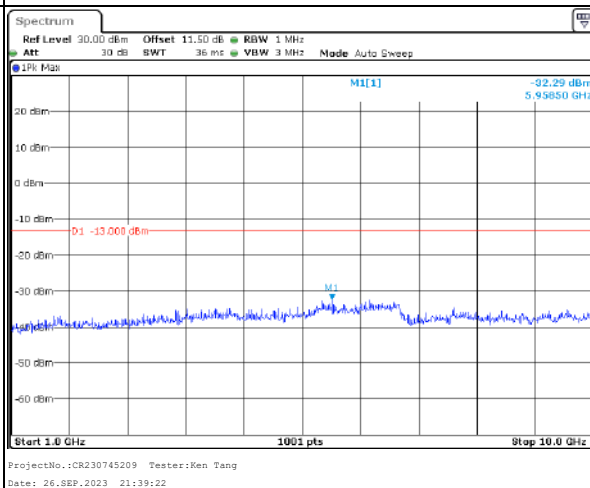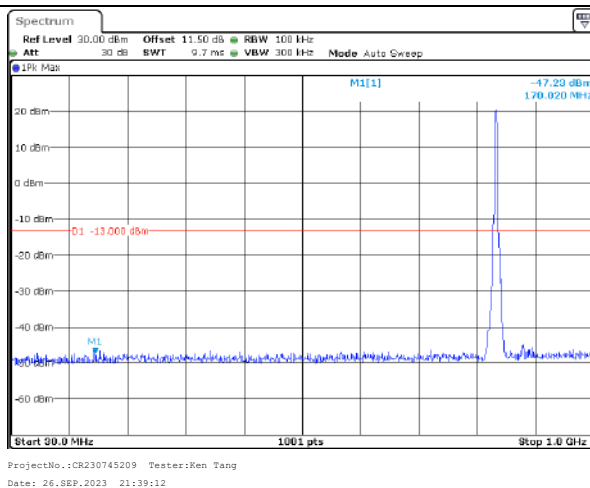

Highest

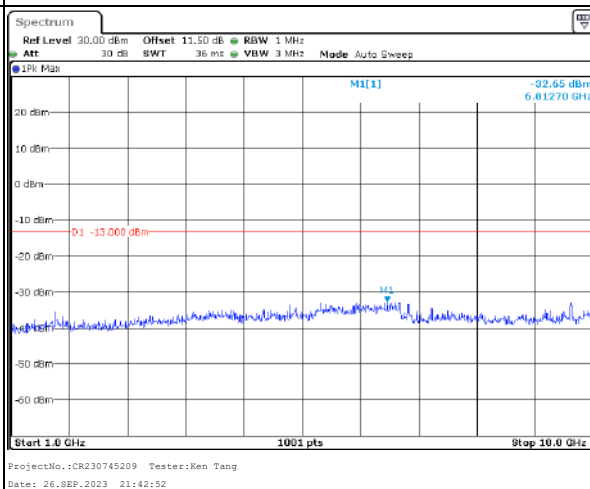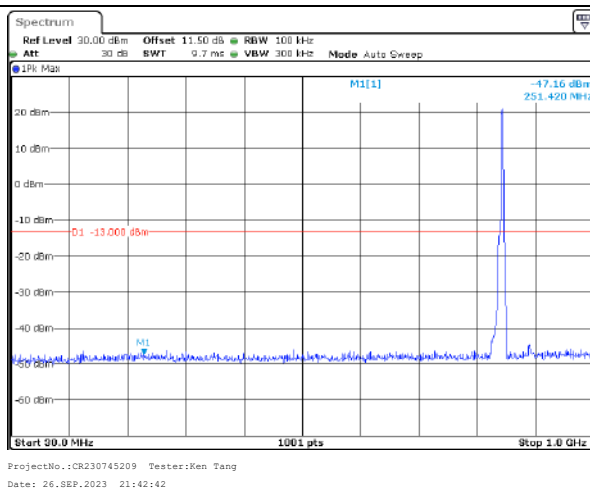

## Out of band emission, Band Edge

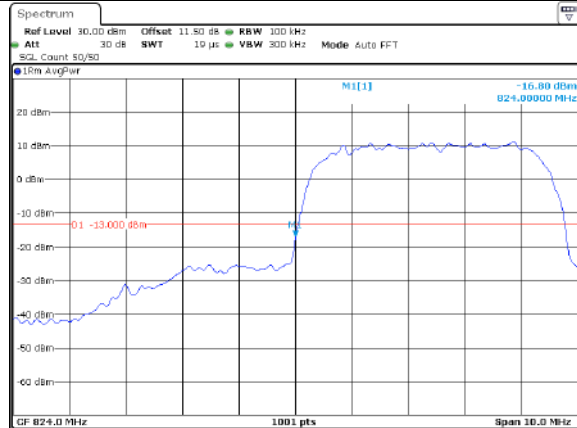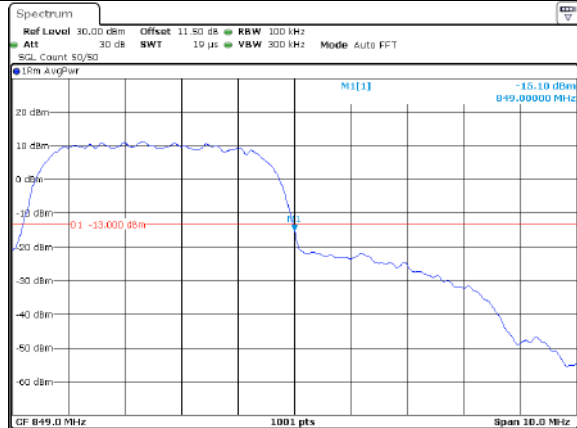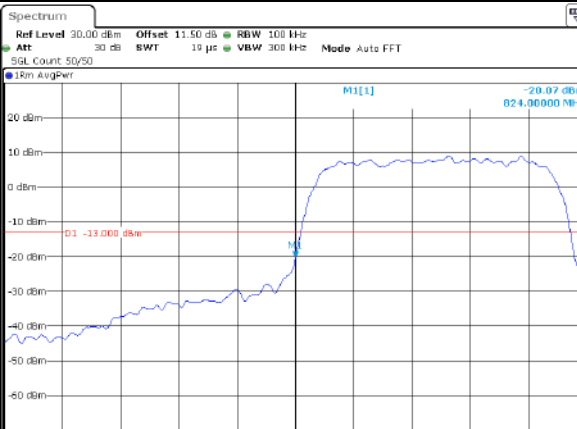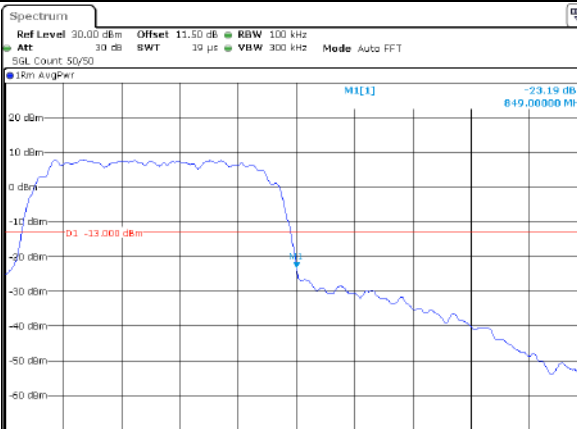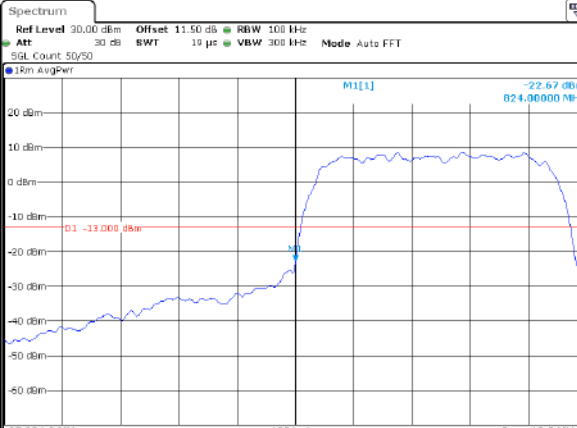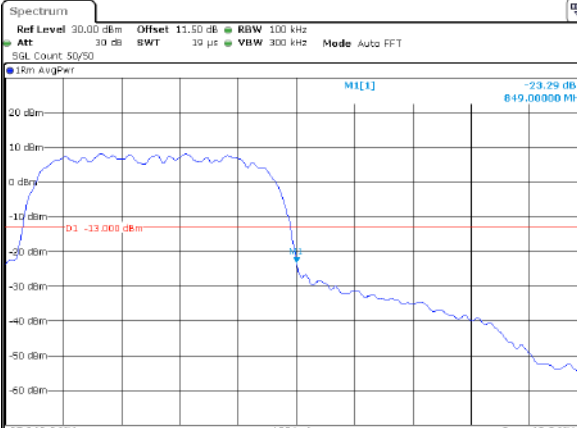Mode	Lowest	Highest
R99	 <p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 21:34:21</p>	 <p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 21:42:05</p>
HSUPA	 <p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 20:35:25</p>	 <p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 20:48:34</p>
HSDPA	 <p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 20:54:16</p>	 <p>ProjectNo.:CR230745209 Tester:Ken Tang Date: 26.SEP.2023 21:01:17</p>

**4.5 Antenna Port Test Data and Results for LTE Band 2**

Serial Number:	2BCU-1	Test Date:	2023/9/22~2023/9/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ken Tang	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.5-25.4	Relative Humidity: (%)	57-49	ATM Pressure: (kPa)	101
----------------------	-----------	------------------------------	-------	------------------------	-----

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency For Each Mode:**

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

**Test Data:****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	19.87	19.57	19.75	18.85	33
	RB1#3	19.89	19.72	19.92		
	RB1#5	19.91	19.75	19.77		
	RB3#0	19.97	19.89	19.98		
	RB3#3	19.99	19.85	19.82		
	RB6#0	18.95	19.02	19.2		
1.4MHz 16QAM	RB1#0	18.79	18.93	18.8	18.06	33
	RB1#3	18.68	19.11	18.84		
	RB1#5	18.71	19.14	18.84		
	RB3#0	19.01	19.18	19.1		
	RB3#3	19	19.2	19.08		
	RB6#0	17.88	18	18.21		
3MHz QPSK	RB1#0	19.86	19.93	19.85	18.84	33
	RB1#8	19.95	19.97	19.97		
	RB1#14	19.83	19.96	19.98		
	RB6#0	18.96	19	19.16		
	RB6#9	18.92	18.98	19.14		
	RB15#0	18.91	18.99	19.15		
3MHz 16QAM	RB1#0	18.98	19.5	18.94	18.36	33
	RB1#8	18.94	19.44	19.15		
	RB1#14	18.9	19.45	19.03		
	RB6#0	17.89	18.07	18.18		
	RB6#9	17.83	18.05	18.2		
	RB15#0	17.96	18.07	18.14		
5MHz QPSK	RB1#0	19.88	19.88	19.95	18.81	33
	RB1#13	19.83	19.76	19.93		
	RB1#24	19.89	19.95	19.85		
	RB15#0	18.91	19.11	19.27		
	RB15#10	18.9	19.06	19.1		
	RB25#0	18.89	19.08	19.12		
5MHz 16QAM	RB1#0	19.24	19.16	19.03	18.1	33
	RB1#13	19.14	19.08	19.01		
	RB1#24	19.19	19.13	19.09		
	RB15#0	17.95	18.1	18.29		
	RB15#10	17.91	18.08	18.13		
	RB25#0	17.96	18.13	18.22		
10MHz QPSK	RB1#0	19.88	19.9	19.96	18.82	33
	RB1#25	19.88	19.85	19.77		
	RB1#49	19.8	19.78	19.86		



	RB25#0	18.86	19.01	19.09		
	RB25#25	18.79	19.67	18.97		
	RB50#0	18.84	18.98	19.05		
10MHz 16QAM	RB1#0	18.97	19.47	19.23	18.39	33
	RB1#25	18.92	19.53	19.28		
	RB1#49	18.88	19.52	19.3		
	RB25#0	18.02	18.08	18.13		
	RB25#25	17.89	18	18		
	RB50#0	17.84	17.99	18.05		
15MHz QPSK	RB1#0	19.81	19.97	19.99	18.85	33
	RB1#38	19.78	19.88	19.99		
	RB1#74	19.78	19.93	19.78		
	RB36#0	18.89	18.97	19.84		
	RB36#39	18.84	18.94	19.02		
	RB75#0	18.88	18.98	19.07		
15MHz 16QAM	RB1#0	19.3	19.4	19.18	18.37	33
	RB1#38	19.25	19.51	19.24		
	RB1#74	19.23	19.47	19.23		
	RB36#0	17.92	18.02	18.13		
	RB36#39	17.91	17.98	18.08		
	RB75#0	17.88	18.01	18.07		
20MHz QPSK	RB1#0	19.82	19.83	19.92	18.81	33
	RB1#50	19.79	19.95	19.77		
	RB1#99	19.74	19.87	19.87		
	RB50#0	18.91	18.96	19.12		
	RB50#50	18.9	18.92	18.95		
	RB100#0	18.9	18.96	19.02		
20MHz 16QAM	RB1#0	19.53	19.22	19.29	18.39	33
	RB1#50	19.52	19.27	19.23		
	RB1#99	19.48	19.23	19.28		
	RB50#0	17.92	17.98	18.1		
	RB50#50	17.89	17.92	17.95		
	RB100#0	17.83	17.96	18.02		
Note: EIRP=Conducted Power(dBm) - LC(dB) + GT(dBi)						
					Result:	Pass

<b>Peak-to-average Ratio(PAR)</b>					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	8.68	7.60	6.18	13
	RB100#0	6.63	8.57	7.72	13
20MHz 16QAM	RB1#0	9.71	9.31	9.13	13
	RB100#0	9.31	9.80	9.11	13
<b>Result:</b>					<b>Pass</b>

<b>Occupied Bandwidth</b>						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.096	1.102	1.302	1.332	1.320
1.4MHz 16QAM	1.102	1.102	1.096	1.320	1.332	1.290
3MHz QPSK	2.683	2.683	2.683	2.916	2.904	2.892
3MHz 16QAM	2.683	2.683	2.683	2.904	2.916	2.904
5MHz QPSK	4.511	4.511	4.511	5.000	5.020	5.020
5MHz 16QAM	4.511	4.511	4.511	5.020	5.000	4.980
10MHz QPSK	8.942	8.942	8.942	9.640	9.800	9.600
10MHz 16QAM	8.982	8.942	8.942	9.640	9.600	9.640
15MHz QPSK	13.473	13.533	13.473	14.760	14.880	14.700
15MHz 16QAM	13.533	13.533	13.473	14.700	14.640	14.700
20MHz QPSK	17.964	17.884	17.884	19.600	19.200	19.200
20MHz 16QAM	17.884	17.964	17.964	19.440	19.200	19.280
Note: The test plots please refer to the Plots of Occupied Bandwidth						


<b>Spurious Emissions at Antenna Terminal</b>	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>

<b>Out of band emission, Band Edge</b>	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>







Frequency Stability for FCC:						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.87	1850.018	1850.000	1909.970	1910.000
	-20	3.87	1850.028	1850.000	1909.984	1910.000
	-10	3.87	1850.009	1850.000	1909.984	1910.000
	0	3.87	1850.004	1850.000	1909.990	1910.000
	10	3.87	1850.002	1850.000	1909.998	1910.000
	20	3.87	1850.026	1850.000	1909.991	1910.000
	30	3.87	1850.024	1850.000	1909.993	1910.000
	40	3.87	1850.014	1850.000	1909.973	1910.000
	50	3.87	1850.015	1850.000	1909.980	1910.000
Frequency Stability vs. Voltage	20	3.35	1850.017	1850.000	1909.986	1910.000
	20	4.43	1850.001	1850.000	1909.983	1910.000
					<b>Result:</b>	<b>Pass</b>

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.87	1850.018	1850.000	1909.982	1910.000
	-20	3.87	1850.009	1850.000	1909.971	1910.000
	-10	3.87	1850.030	1850.000	1909.980	1910.000
	0	3.87	1850.025	1850.000	1909.979	1910.000
	10	3.87	1850.010	1850.000	1909.989	1910.000
	20	3.87	1850.019	1850.000	1909.972	1910.000
	30	3.87	1850.002	1850.000	1909.974	1910.000
	40	3.87	1850.008	1850.000	1909.992	1910.000
	50	3.87	1850.013	1850.000	1909.972	1910.000
Frequency Stability vs. Voltage	20	3.35	1850.002	1850.000	1909.975	1910.000
	20	4.43	1850.009	1850.000	1909.988	1910.000
					<b>Result:</b>	<b>Pass</b>

**Test Plots**(Note: The 11.5dB is the Insertion loss of the RF cable, Coaxial tee connector and Attenuator, which was offset into the Spectrum Analyzer):

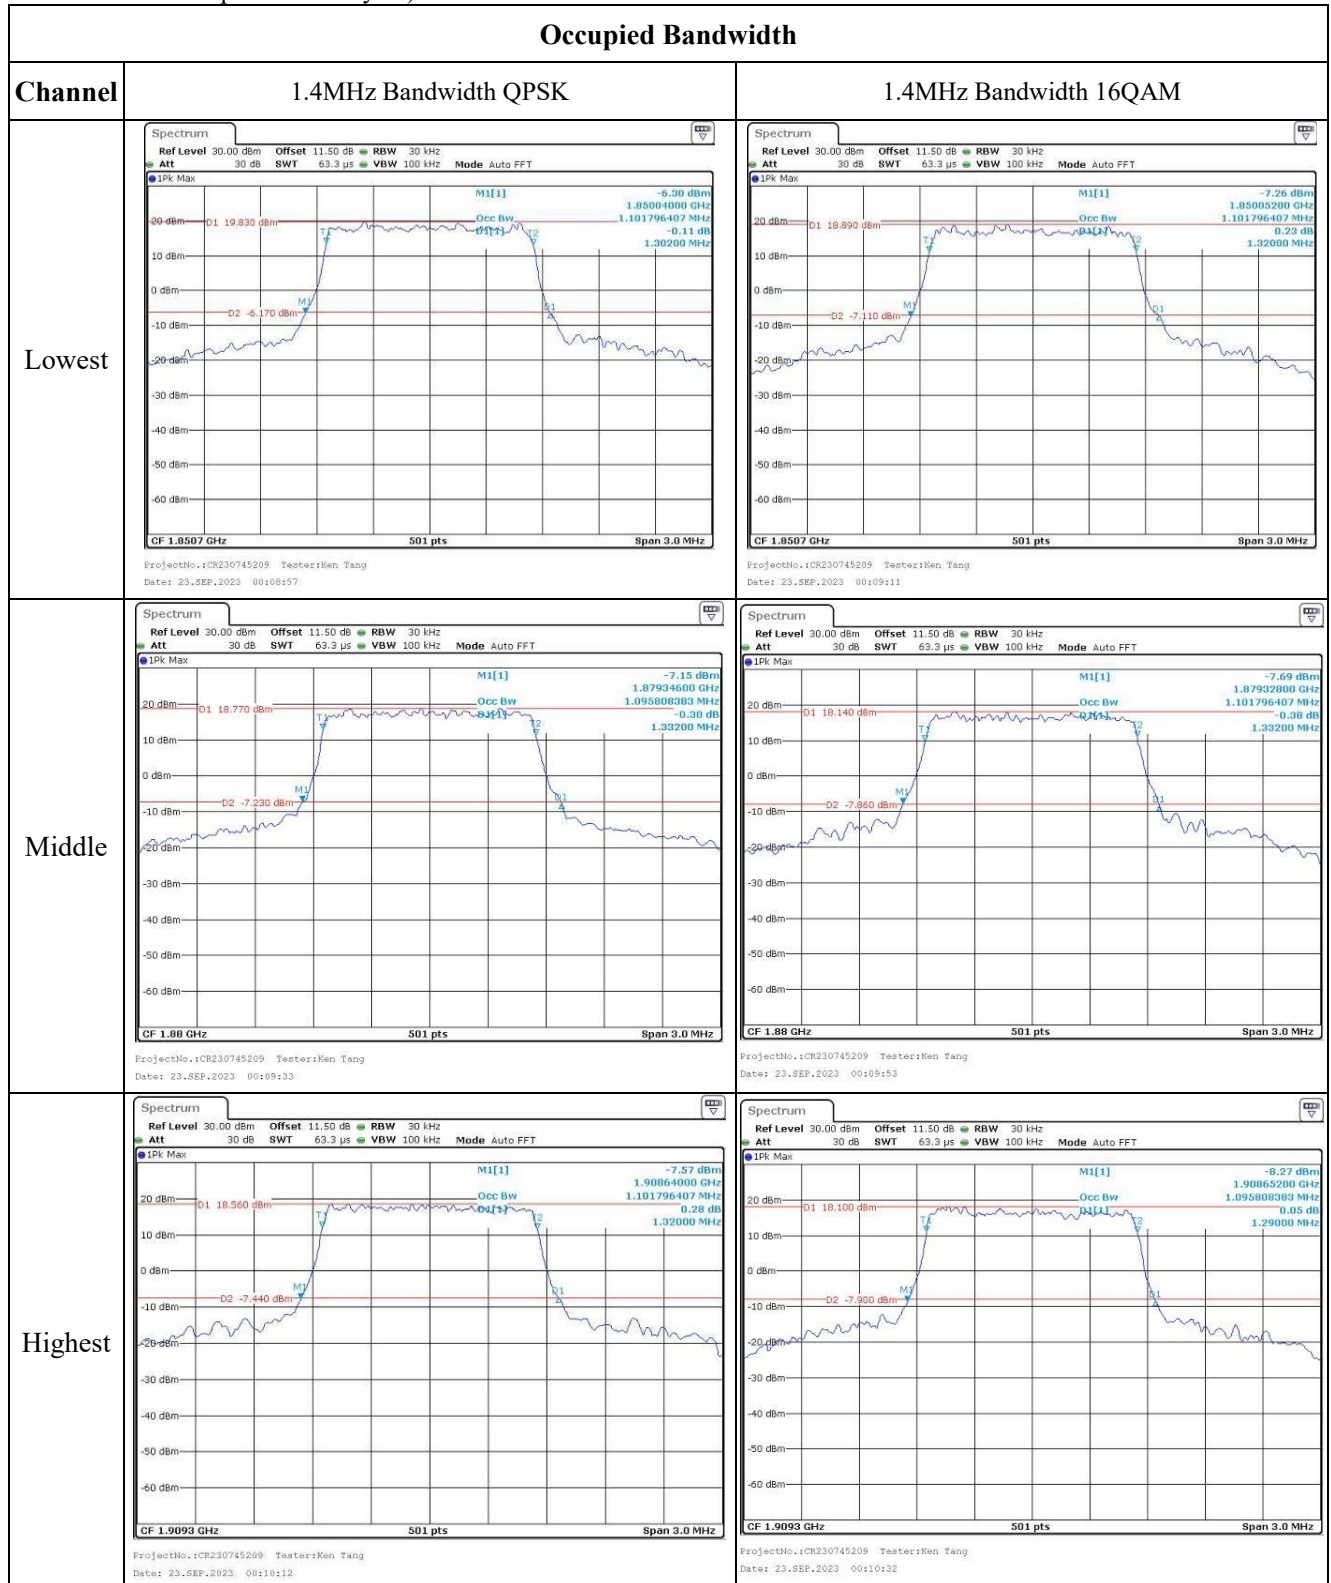

## Occupied Bandwidth

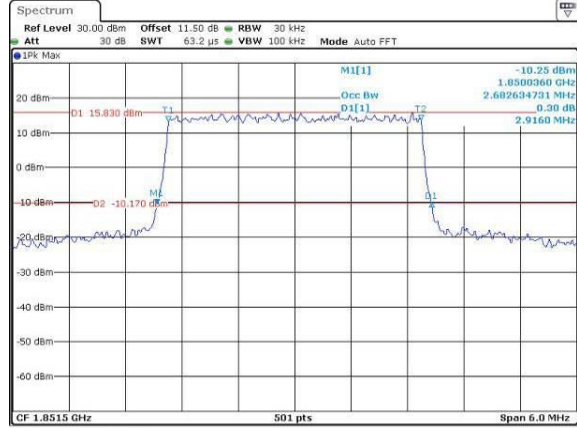
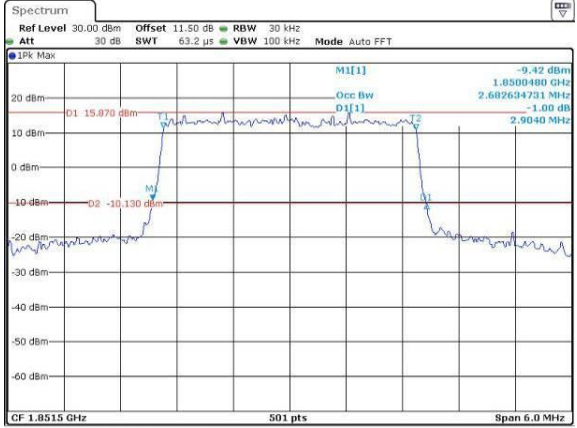
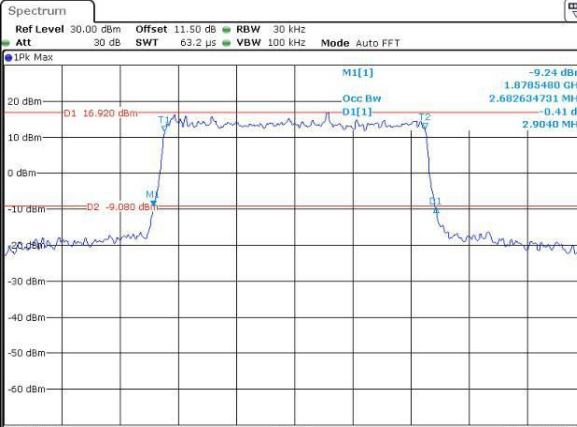
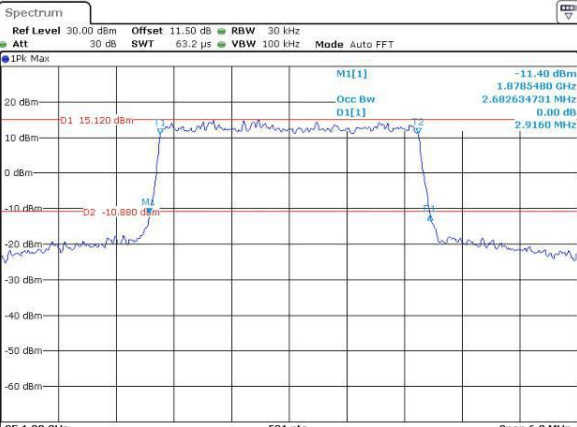
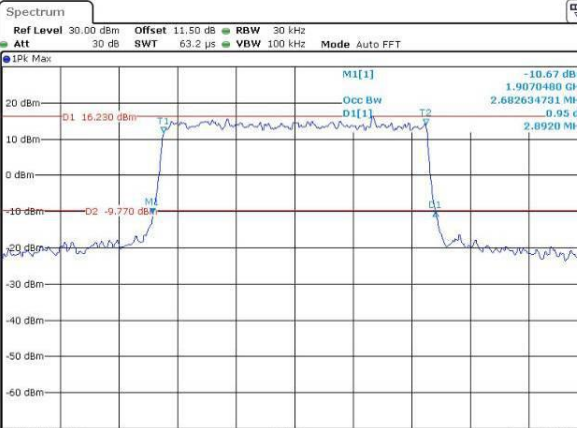
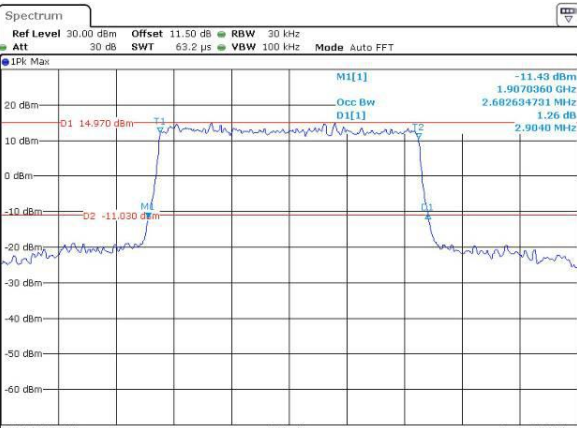
Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	 <p>Ref Level 30.00 dBm Offset 11.50 dB RBW 30 kHz Att 30 dB SWT 63.2 <math>\mu</math>s VBW 100 kHz Mode Auto FFT M1[1] -10.25 dBm M2 -10.170 dBm D1[1] -0.30 dBm CF 1.8515 GHz 501 pts Span 6.0 MHz</p>	 <p>Ref Level 30.00 dBm Offset 11.50 dB RBW 30 kHz Att 30 dB SWT 63.2 <math>\mu</math>s VBW 100 kHz Mode Auto FFT M1[1] -9.42 dBm M2 -10.130 dBm D1[1] -1.00 dBm CF 1.8515 GHz 501 pts Span 6.0 MHz</p>
Middle	 <p>Ref Level 30.00 dBm Offset 11.50 dB RBW 30 kHz Att 30 dB SWT 63.2 <math>\mu</math>s VBW 100 kHz Mode Auto FFT M1[1] -9.24 dBm M2 -9.080 dBm D1[1] -0.41 dBm CF 1.88 GHz 501 pts Span 6.0 MHz</p>	 <p>Ref Level 30.00 dBm Offset 11.50 dB RBW 30 kHz Att 30 dB SWT 63.2 <math>\mu</math>s VBW 100 kHz Mode Auto FFT M1[1] -11.40 dBm M2 -10.880 dBm D1[1] 0.00 dBm CF 1.88 GHz 501 pts Span 6.0 MHz</p>
Highest	 <p>Ref Level 30.00 dBm Offset 11.50 dB RBW 30 kHz Att 30 dB SWT 63.2 <math>\mu</math>s VBW 100 kHz Mode Auto FFT M1[1] -10.67 dBm M2 -9.770 dBm D1[1] -0.95 dBm CF 1.9085 GHz 501 pts Span 6.0 MHz</p>	 <p>Ref Level 30.00 dBm Offset 11.50 dB RBW 30 kHz Att 30 dB SWT 63.2 <math>\mu</math>s VBW 100 kHz Mode Auto FFT M1[1] -11.43 dBm M2 -11.030 dBm D1[1] 1.26 dBm CF 1.9085 GHz 501 pts Span 6.0 MHz</p>

## Occupied Bandwidth







Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230745209 Testter:Ken Tang Date: 23.SEP.2023 00:14:24</p>	<p>ProjectNo.:CR230745209 Testter:Ken Tang Date: 23.SEP.2023 00:14:44</p>
Middle	<p>ProjectNo.:CR230745209 Testter:Ken Tang Date: 23.SEP.2023 00:15:25</p>	<p>ProjectNo.:CR230745209 Testter:Ken Tang Date: 23.SEP.2023 00:15:49</p>
Highest	<p>ProjectNo.:CR230745209 Testter:Ken Tang Date: 23.SEP.2023 00:16:20</p>	<p>ProjectNo.:CR230745209 Testter:Ken Tang Date: 23.SEP.2023 00:16:38</p>



## Occupied Bandwidth

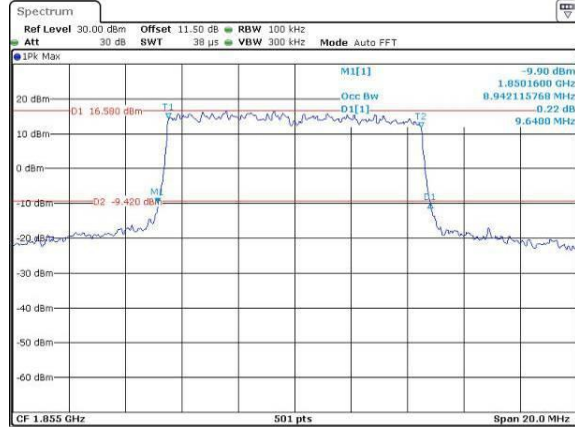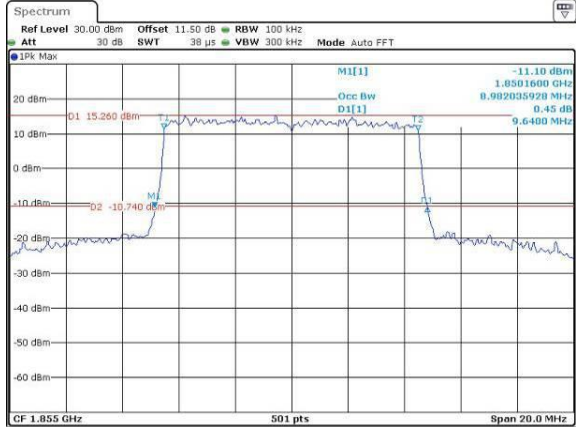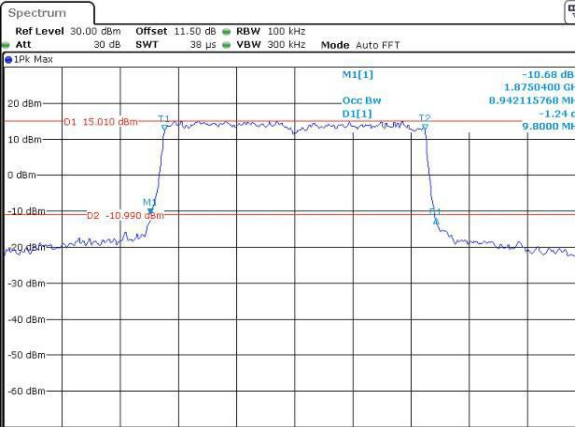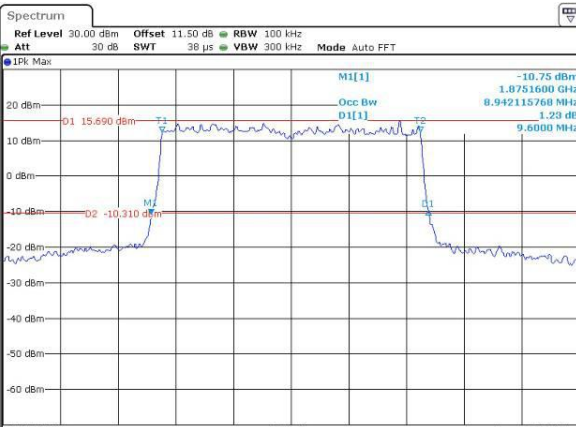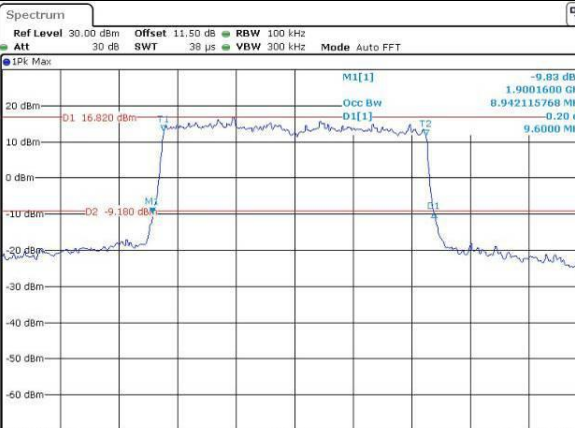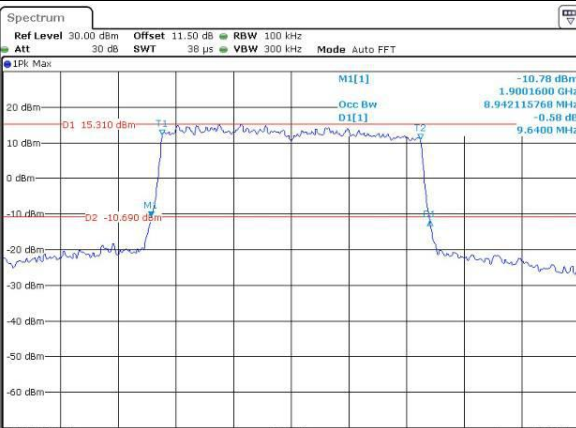Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	 <p>ProjectNo.:CR230745209 Testeri:Ken Tang Date: 23.SEP.2023 00:18:11</p>	 <p>ProjectNo.:CR230745209 Testeri:Ken Tang Date: 23.SEP.2023 00:18:38</p>
Middle	 <p>ProjectNo.:CR230745209 Testeri:Ken Tang Date: 23.SEP.2023 00:19:15</p>	 <p>ProjectNo.:CR230745209 Testeri:Ken Tang Date: 23.SEP.2023 00:19:43</p>
Highest	 <p>ProjectNo.:CR230745209 Testeri:Ken Tang Date: 23.SEP.2023 00:20:17</p>	 <p>ProjectNo.:CR230745209 Testeri:Ken Tang Date: 23.SEP.2023 00:20:56</p>

## Occupied Bandwidth

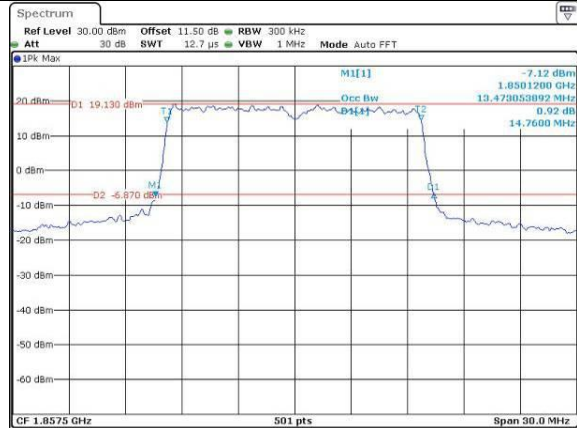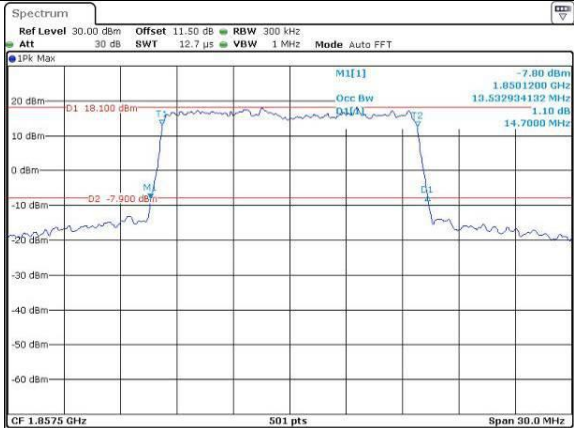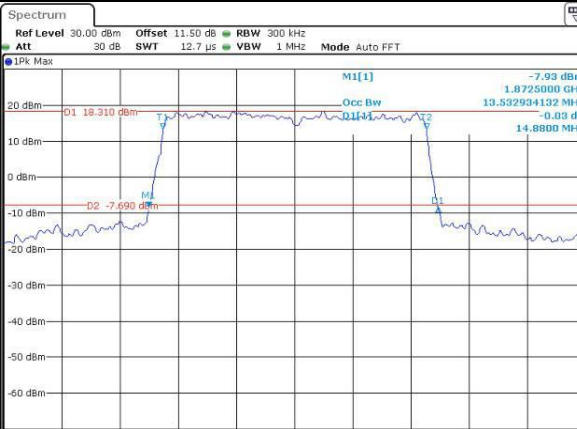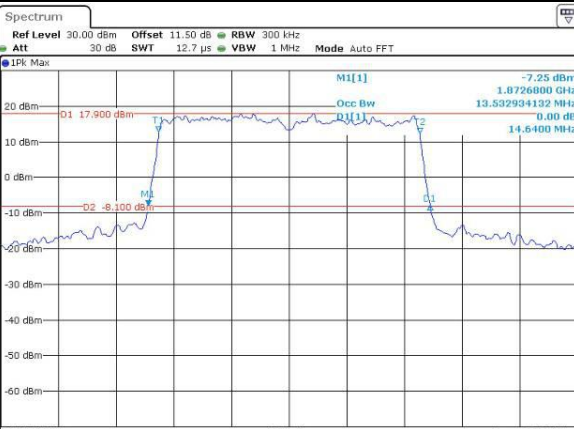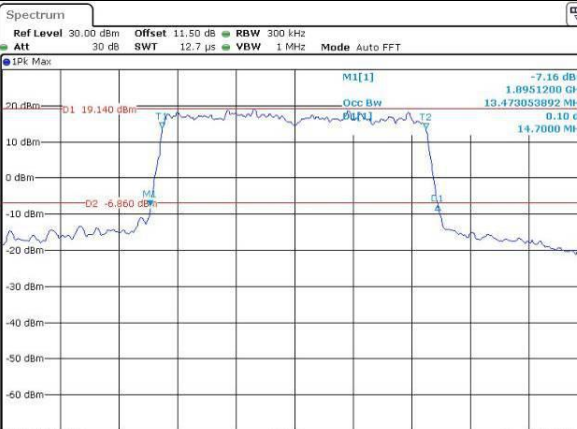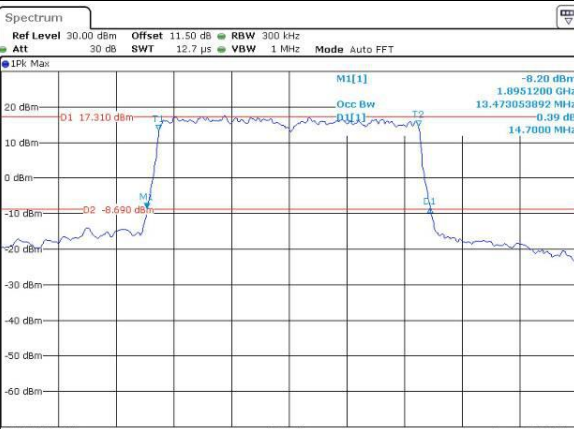Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	 <p>ProjectNo.:CR230745209 Testor:Ken Tang Date: 23.SEP.2023 00:22:36</p>	 <p>ProjectNo.:CR230745209 Testor:Ken Tang Date: 23.SEP.2023 00:23:08</p>
Middle	 <p>ProjectNo.:CR230745209 Testor:Ken Tang Date: 23.SEP.2023 00:23:41</p>	 <p>ProjectNo.:CR230745209 Testor:Ken Tang Date: 23.SEP.2023 00:24:16</p>
Highest	 <p>ProjectNo.:CR230745209 Testor:Ken Tang Date: 23.SEP.2023 00:24:49</p>	 <p>ProjectNo.:CR230745209 Testor:Ken Tang Date: 23.SEP.2023 00:25:28</p>




## Occupied Bandwidth

## Channel



## 20MHz Bandwidth QPSK

## 20MHz Bandwidth 16QAM



## Lowest

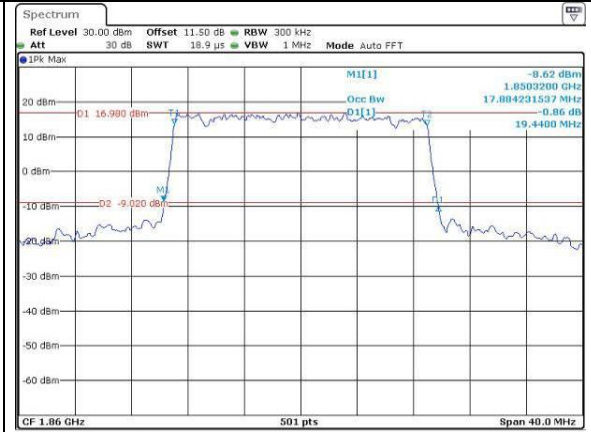

## Middle

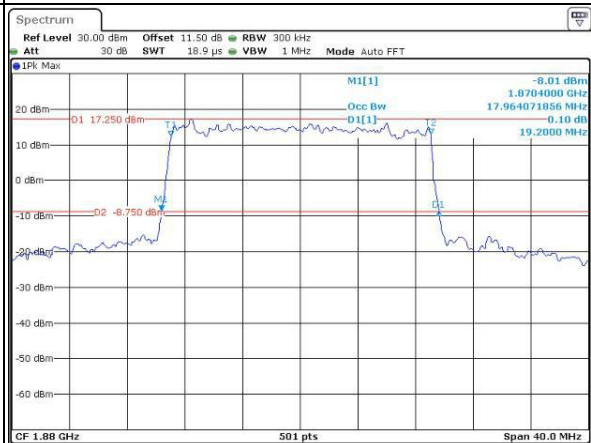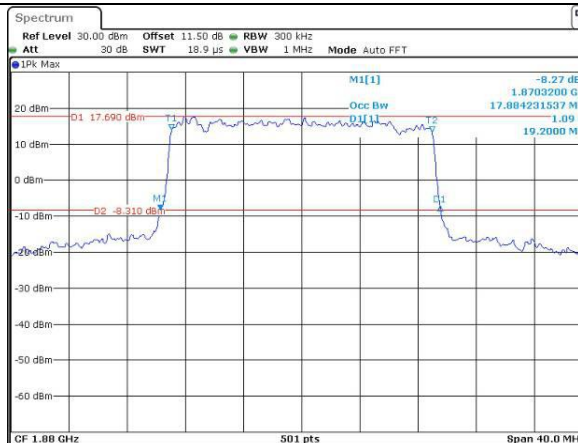

## Highest

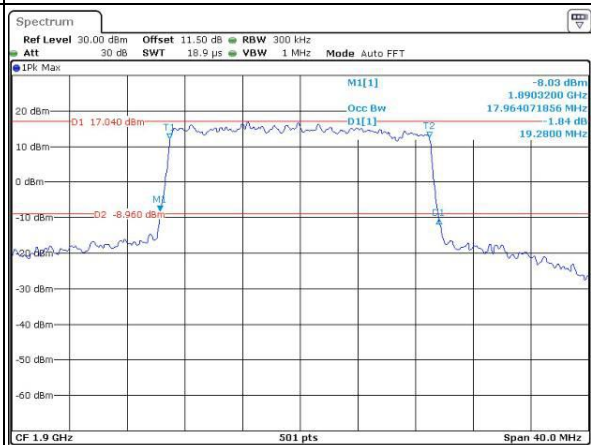
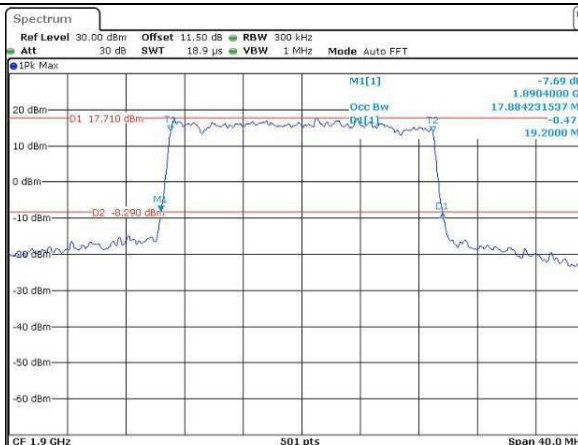


## Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

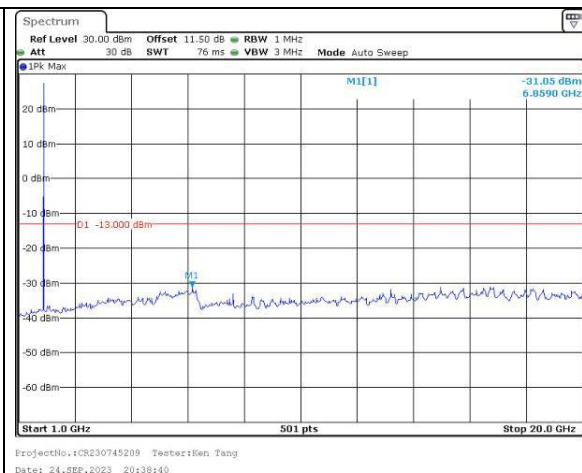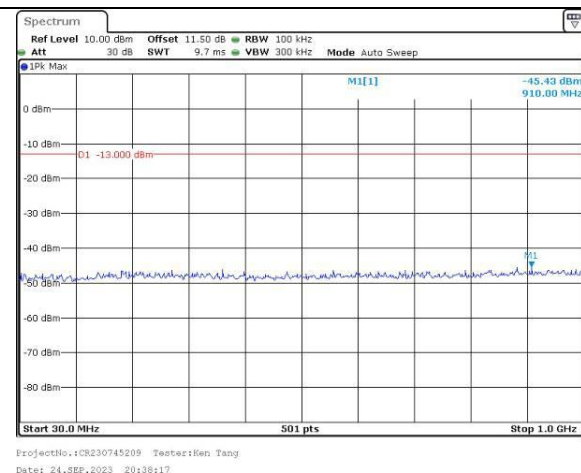

Middle

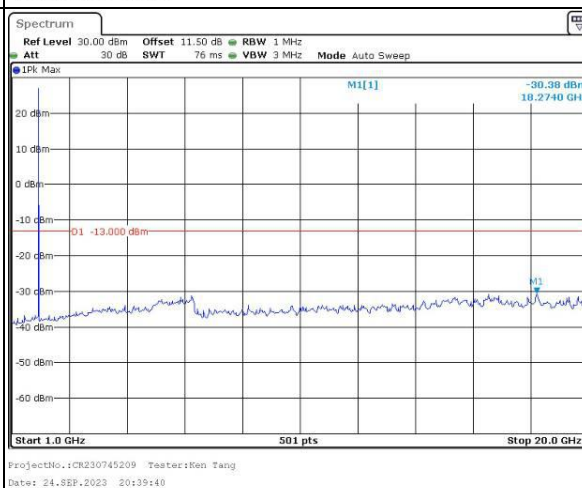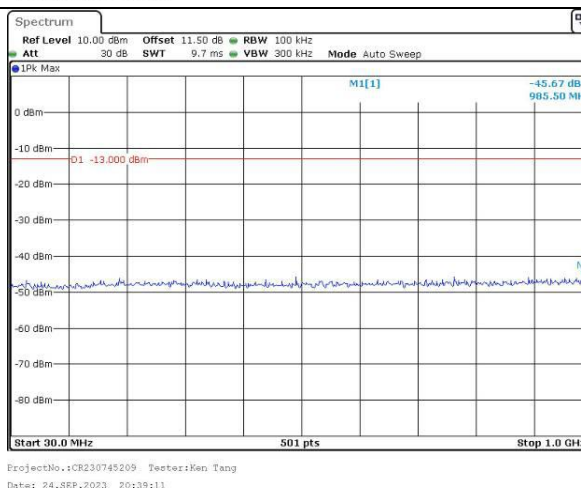

Highest

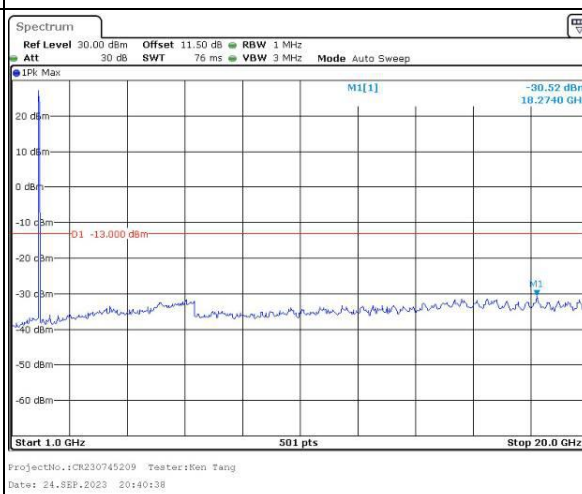
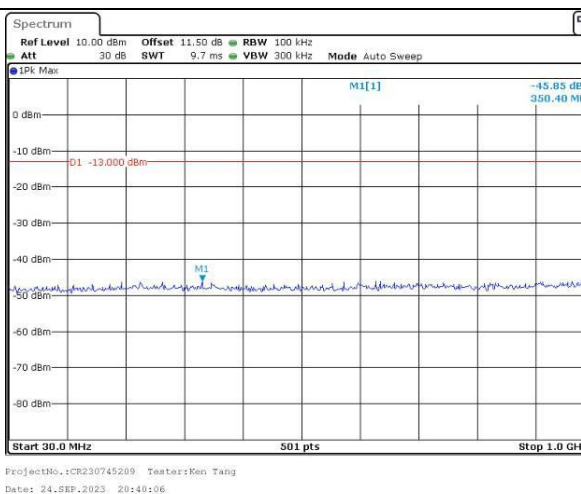


## Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

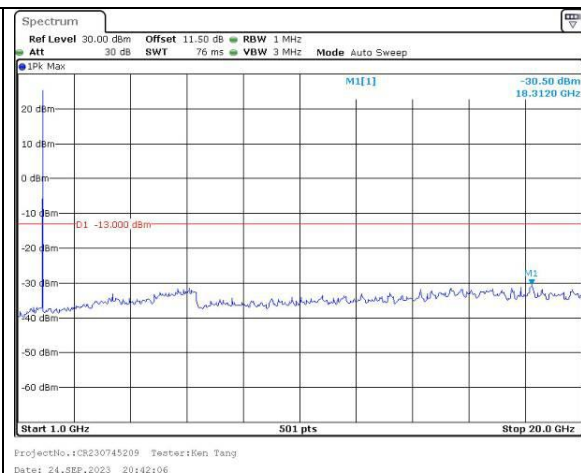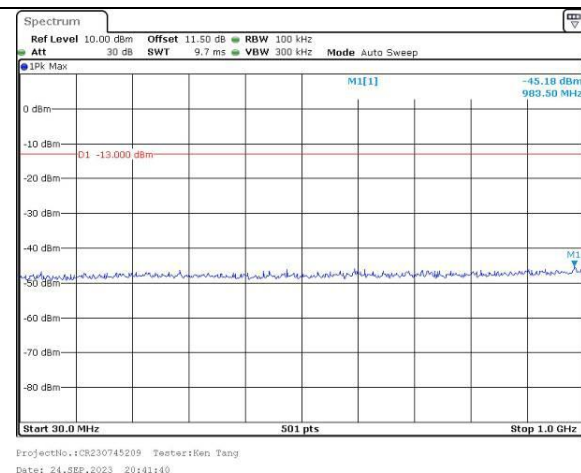

Middle

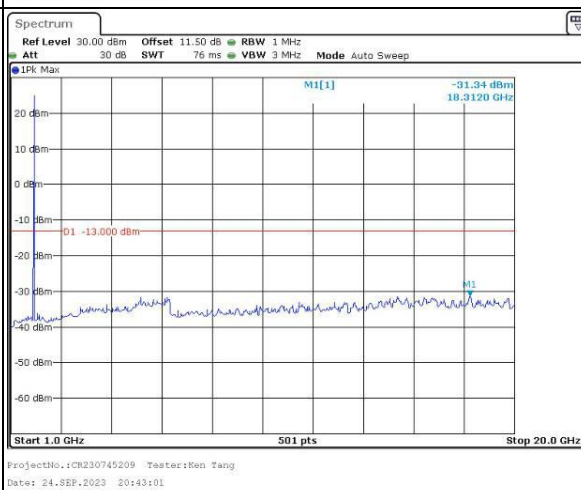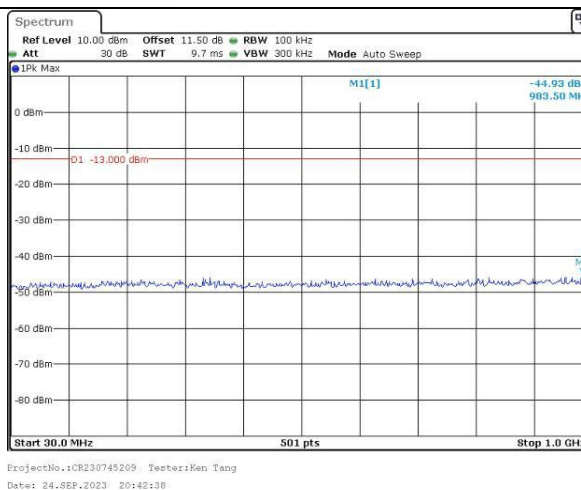

Highest

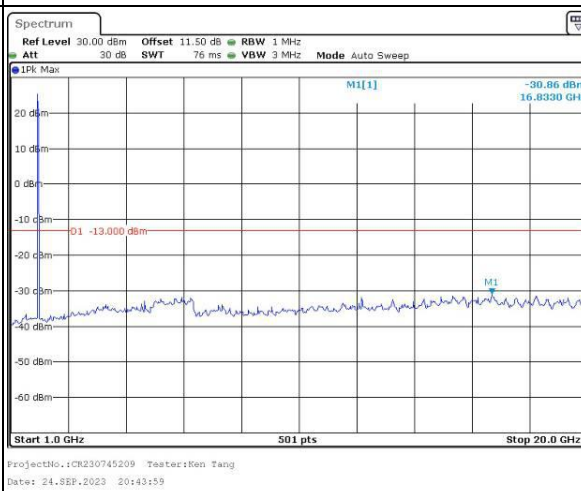
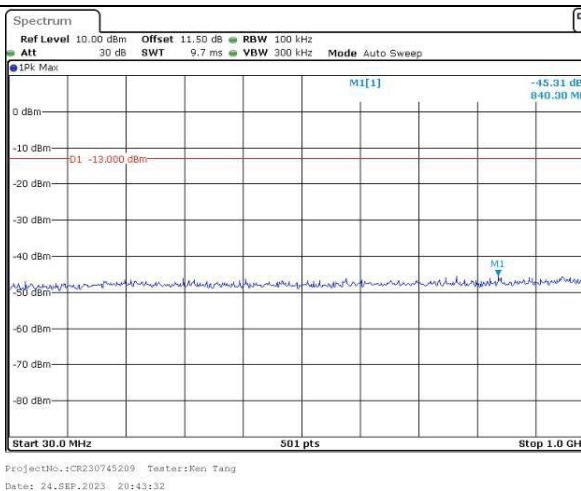


## Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

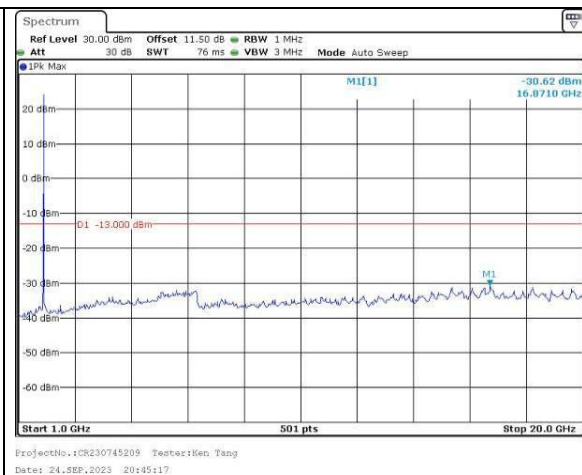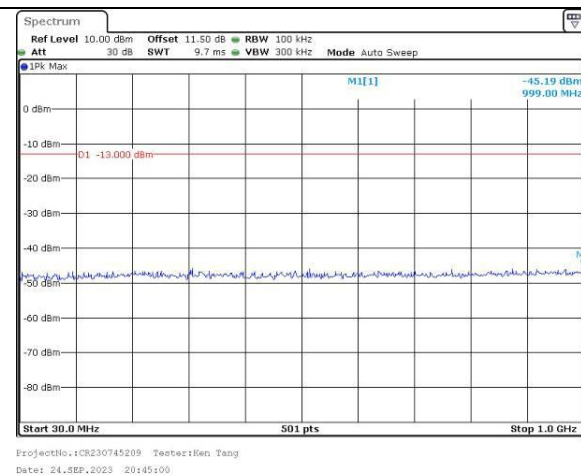


Middle

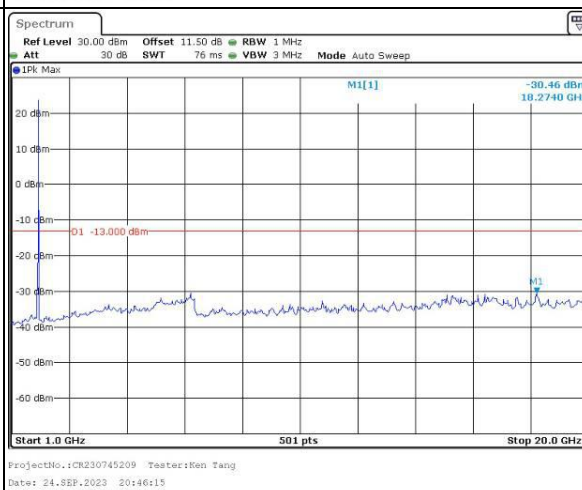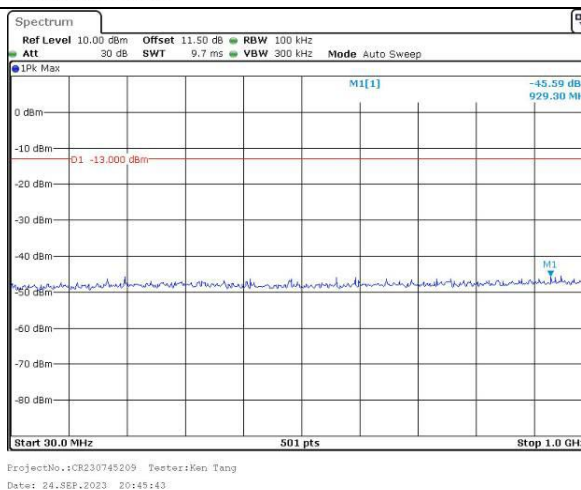

Highest

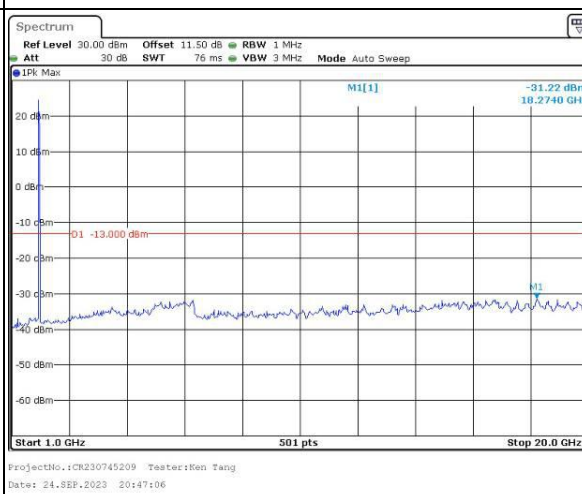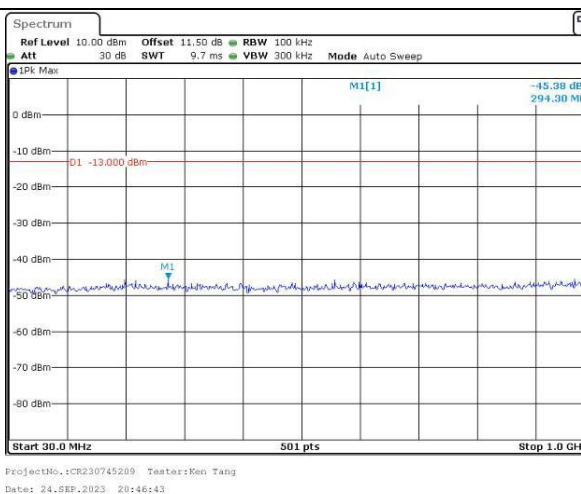

## Spurious Emissions at Antenna Terminal

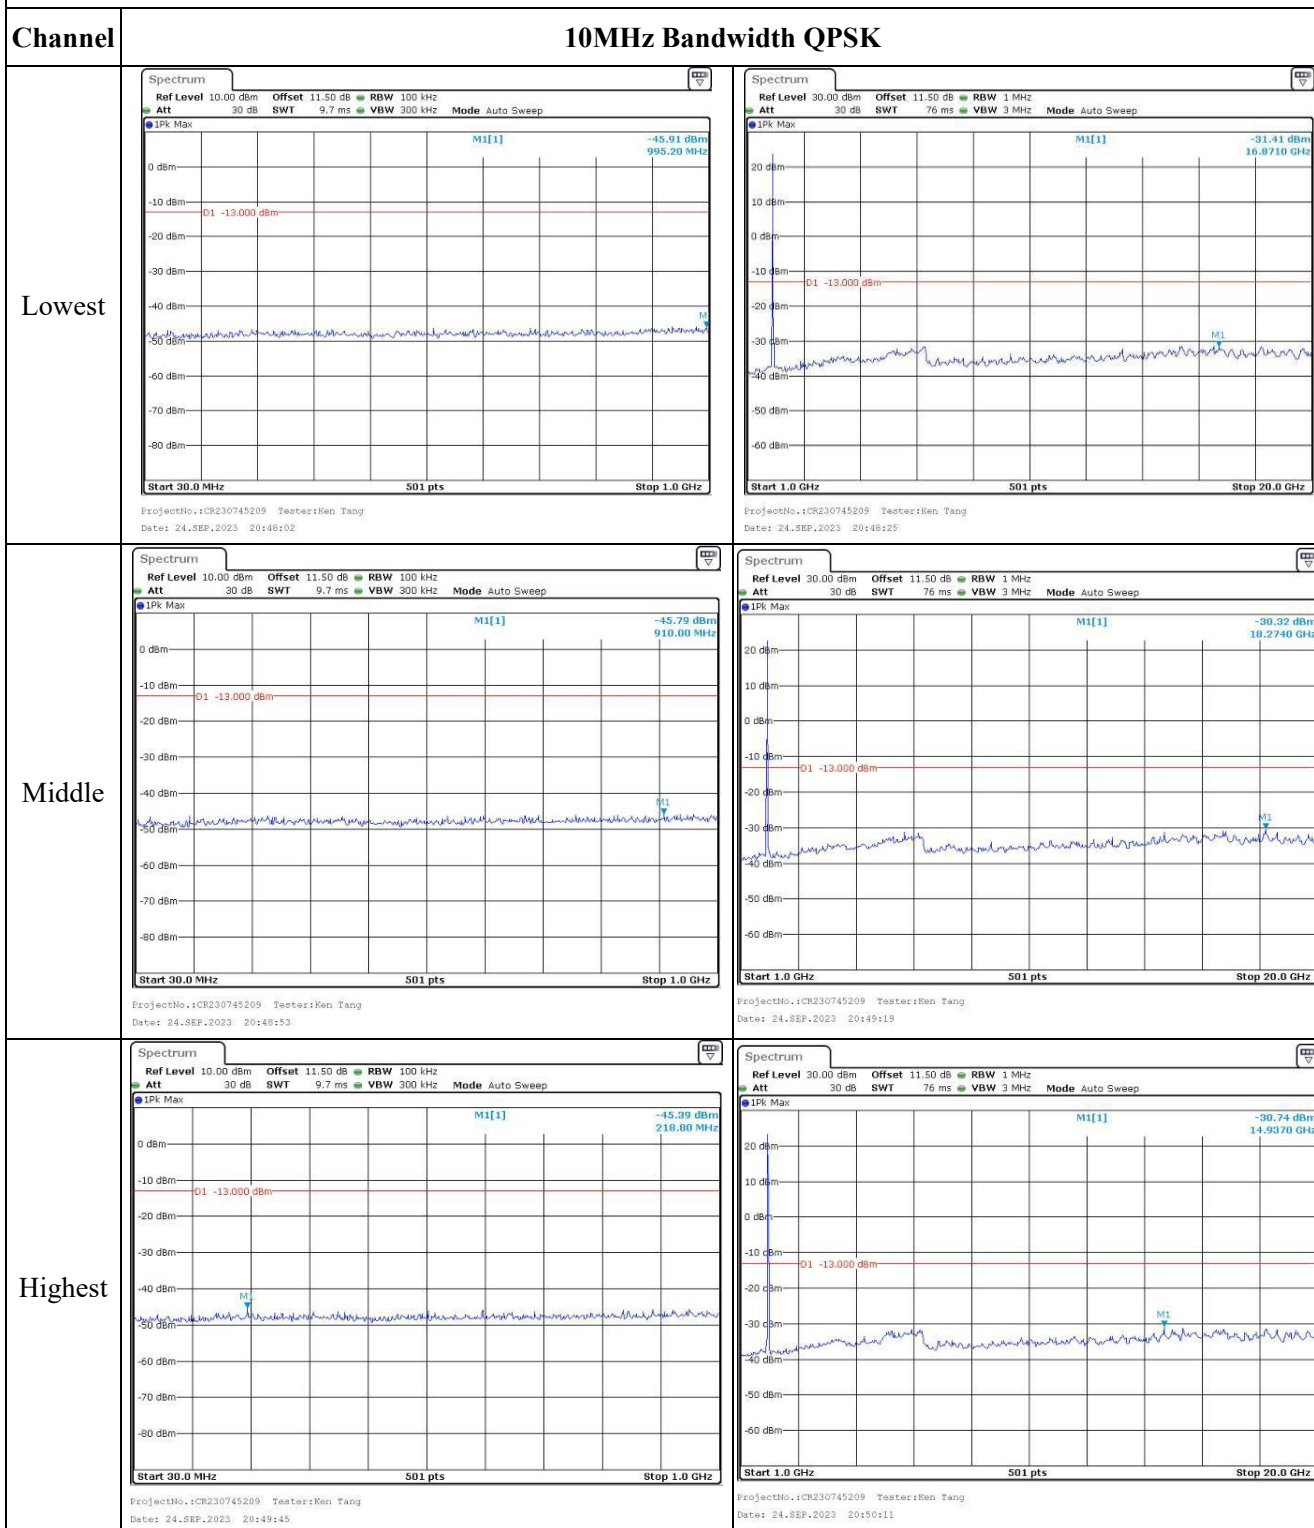





## Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

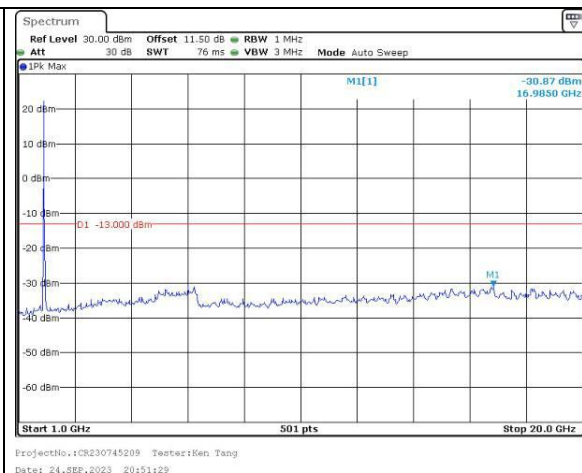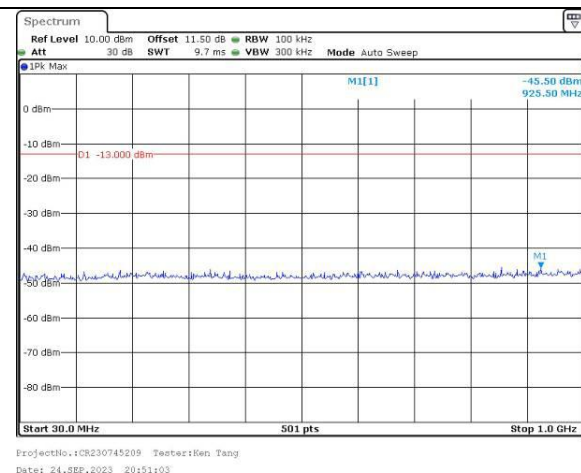

Middle

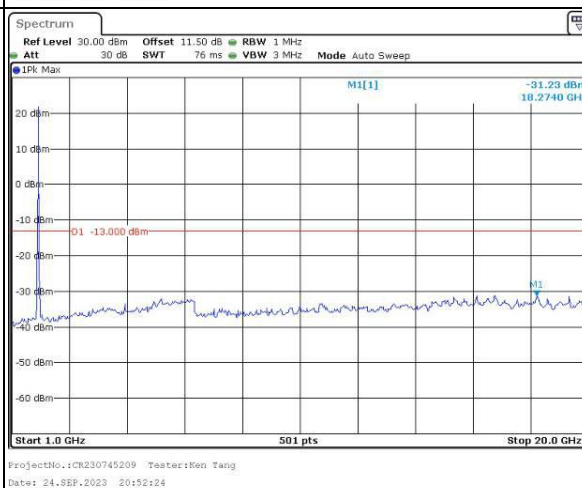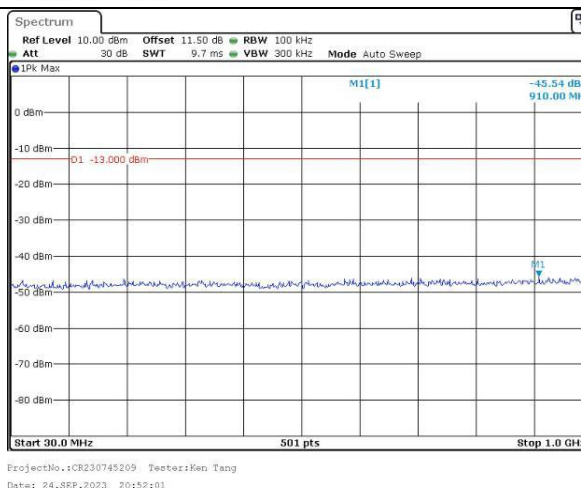

Highest

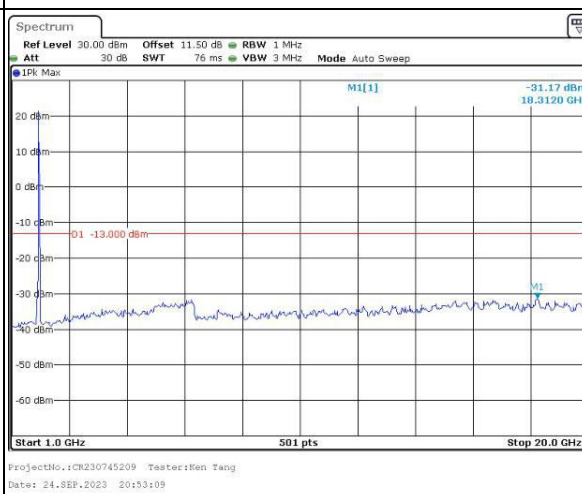
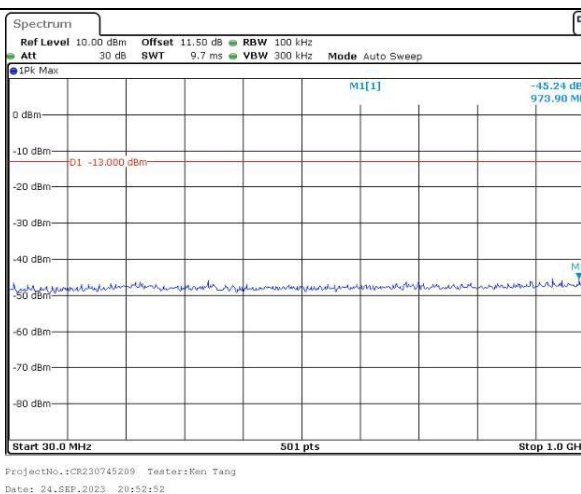


## Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

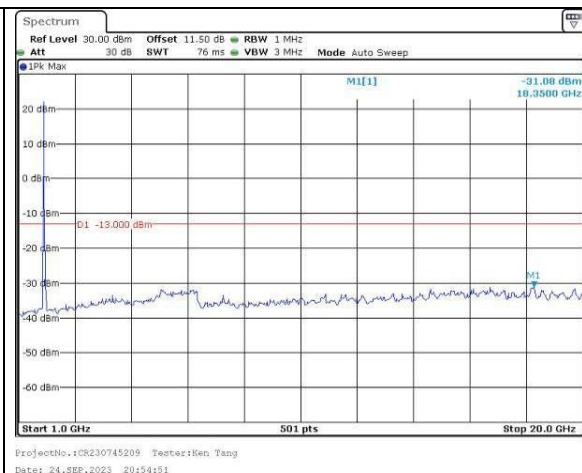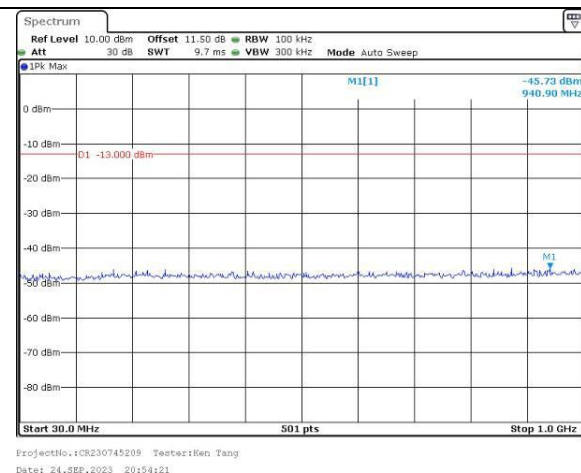


Middle

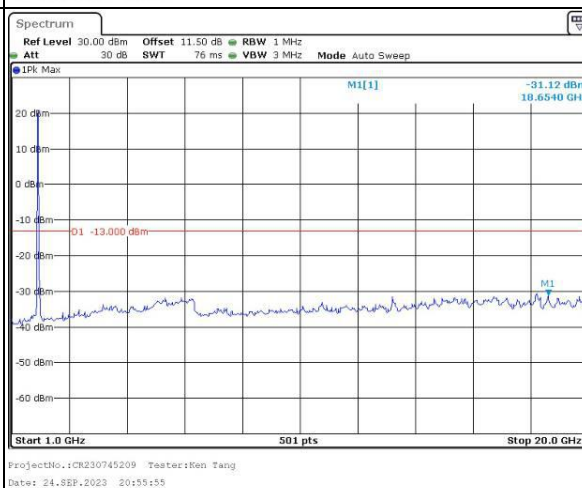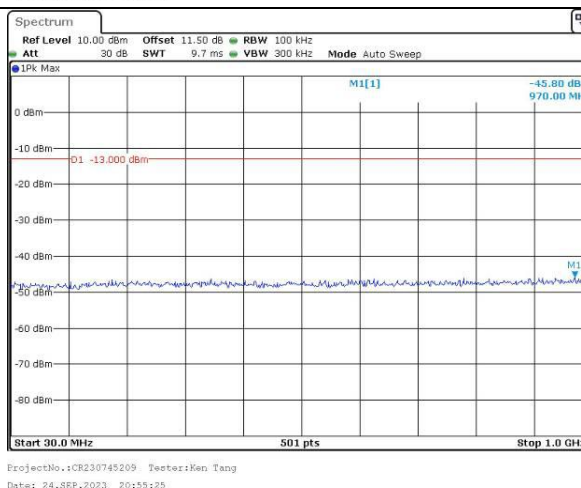

Highest

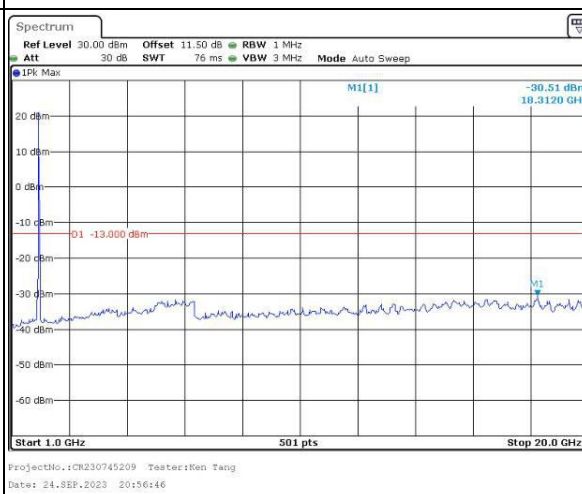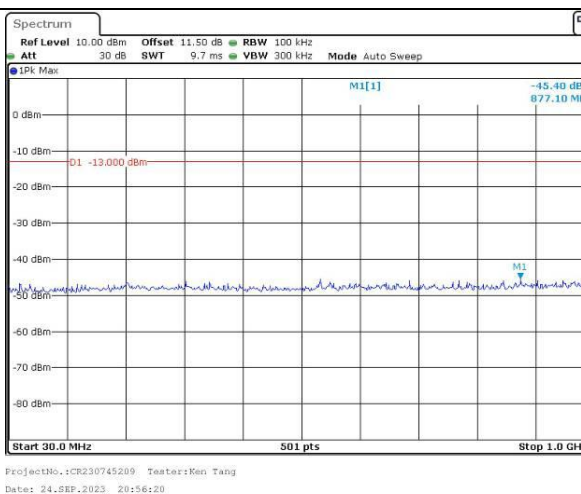


## Out of band emission, Band Edge

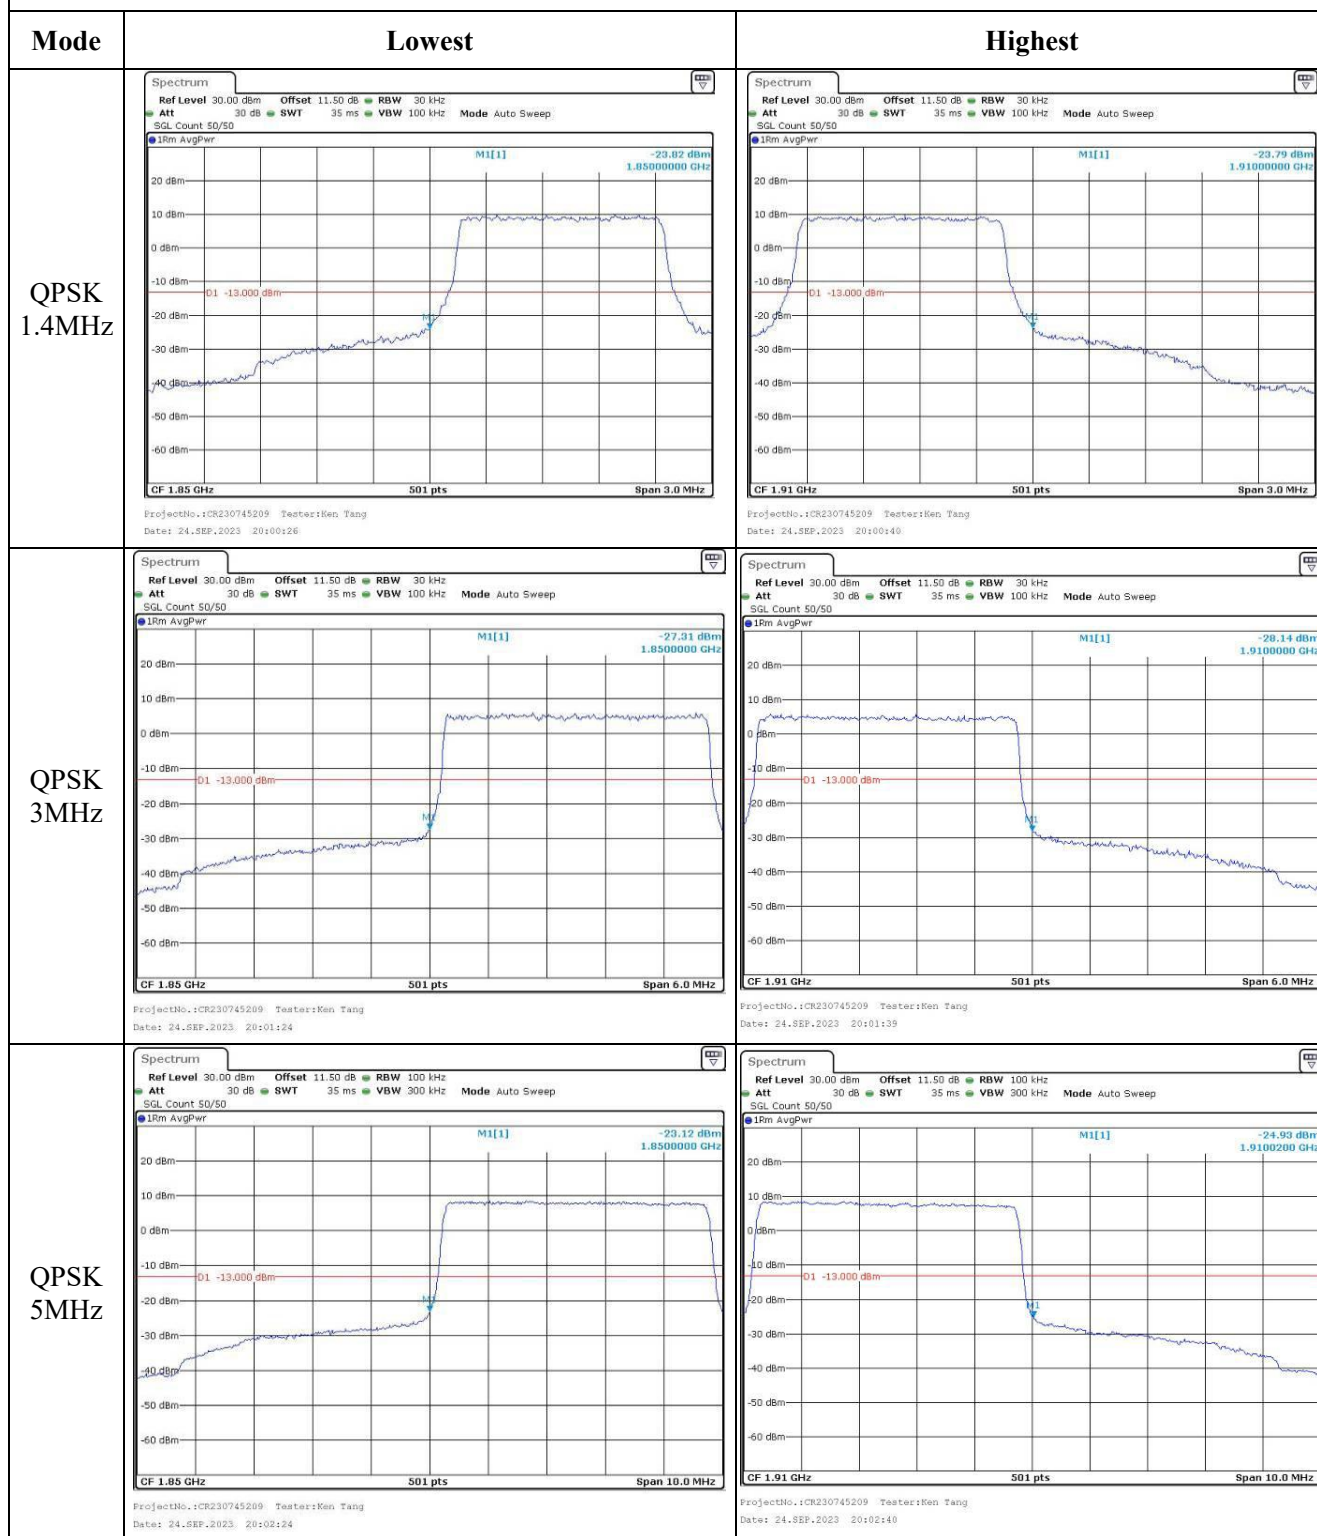







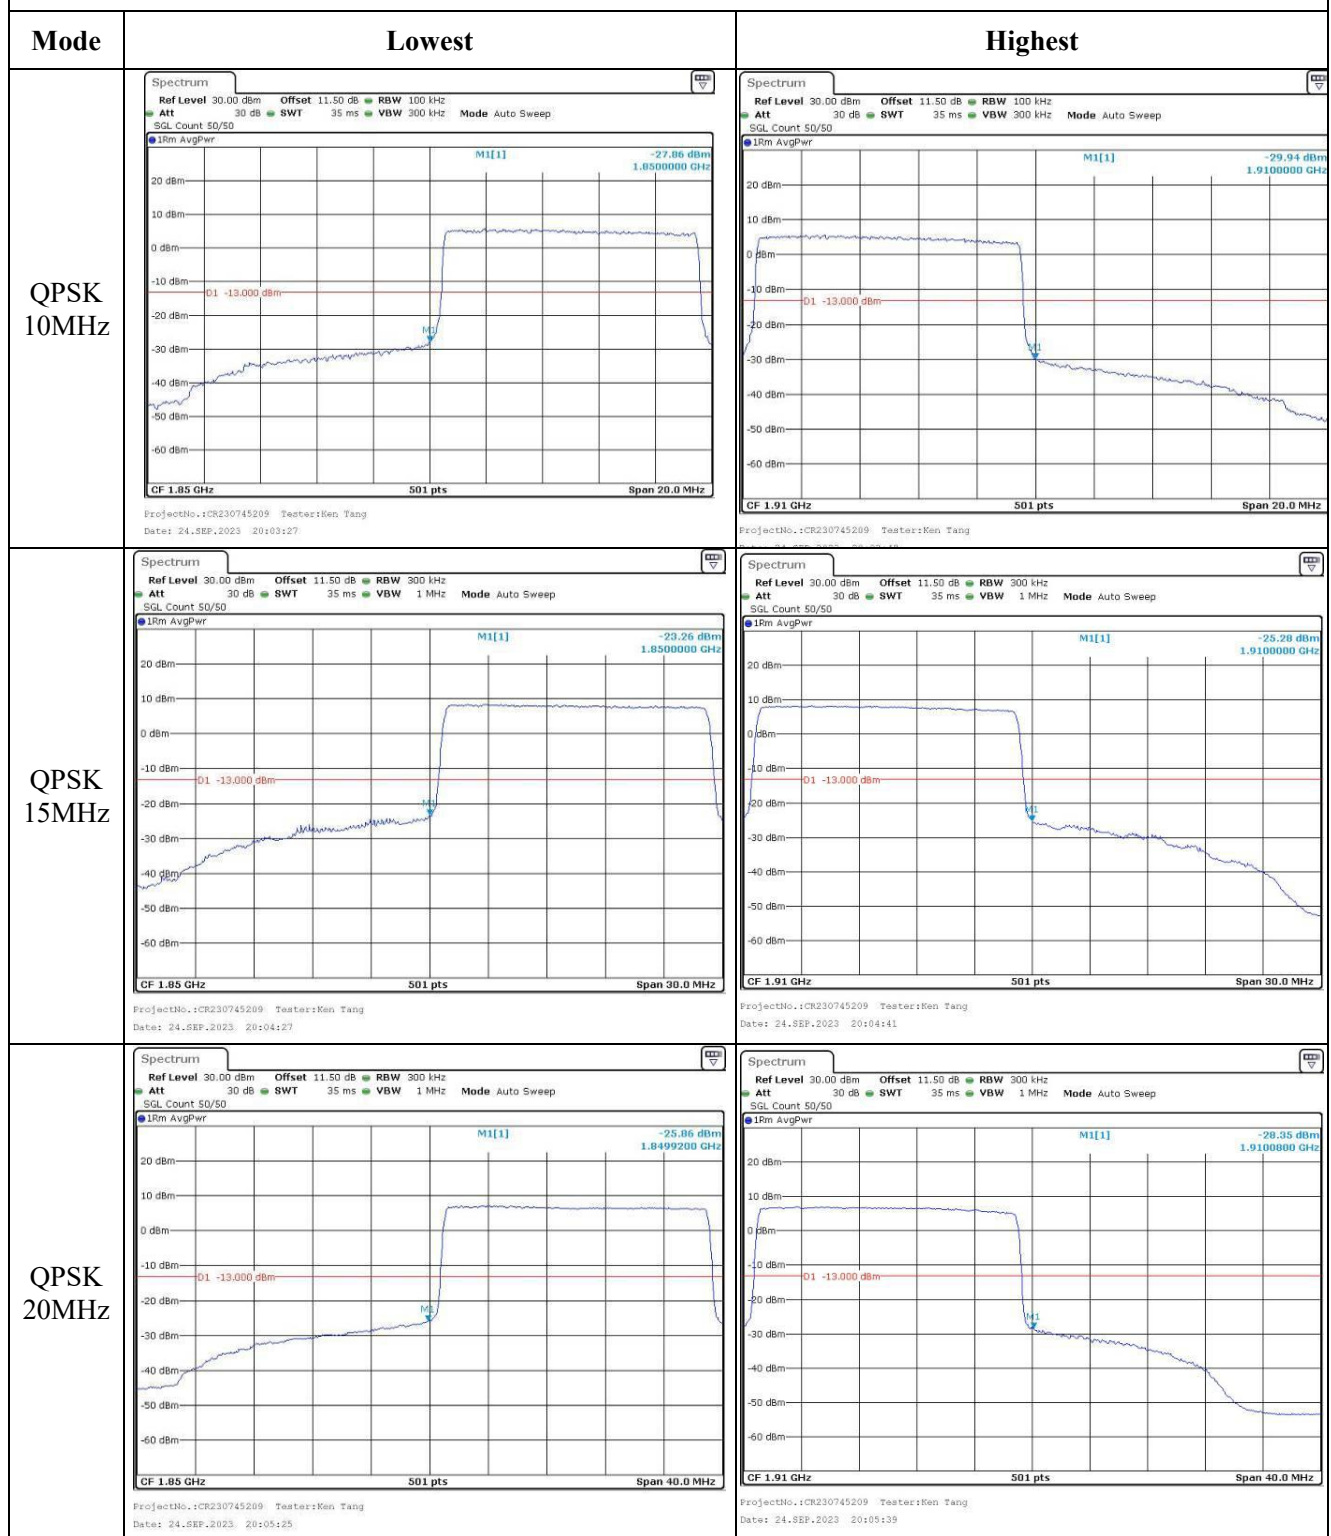


## Out of band emission, Band Edge

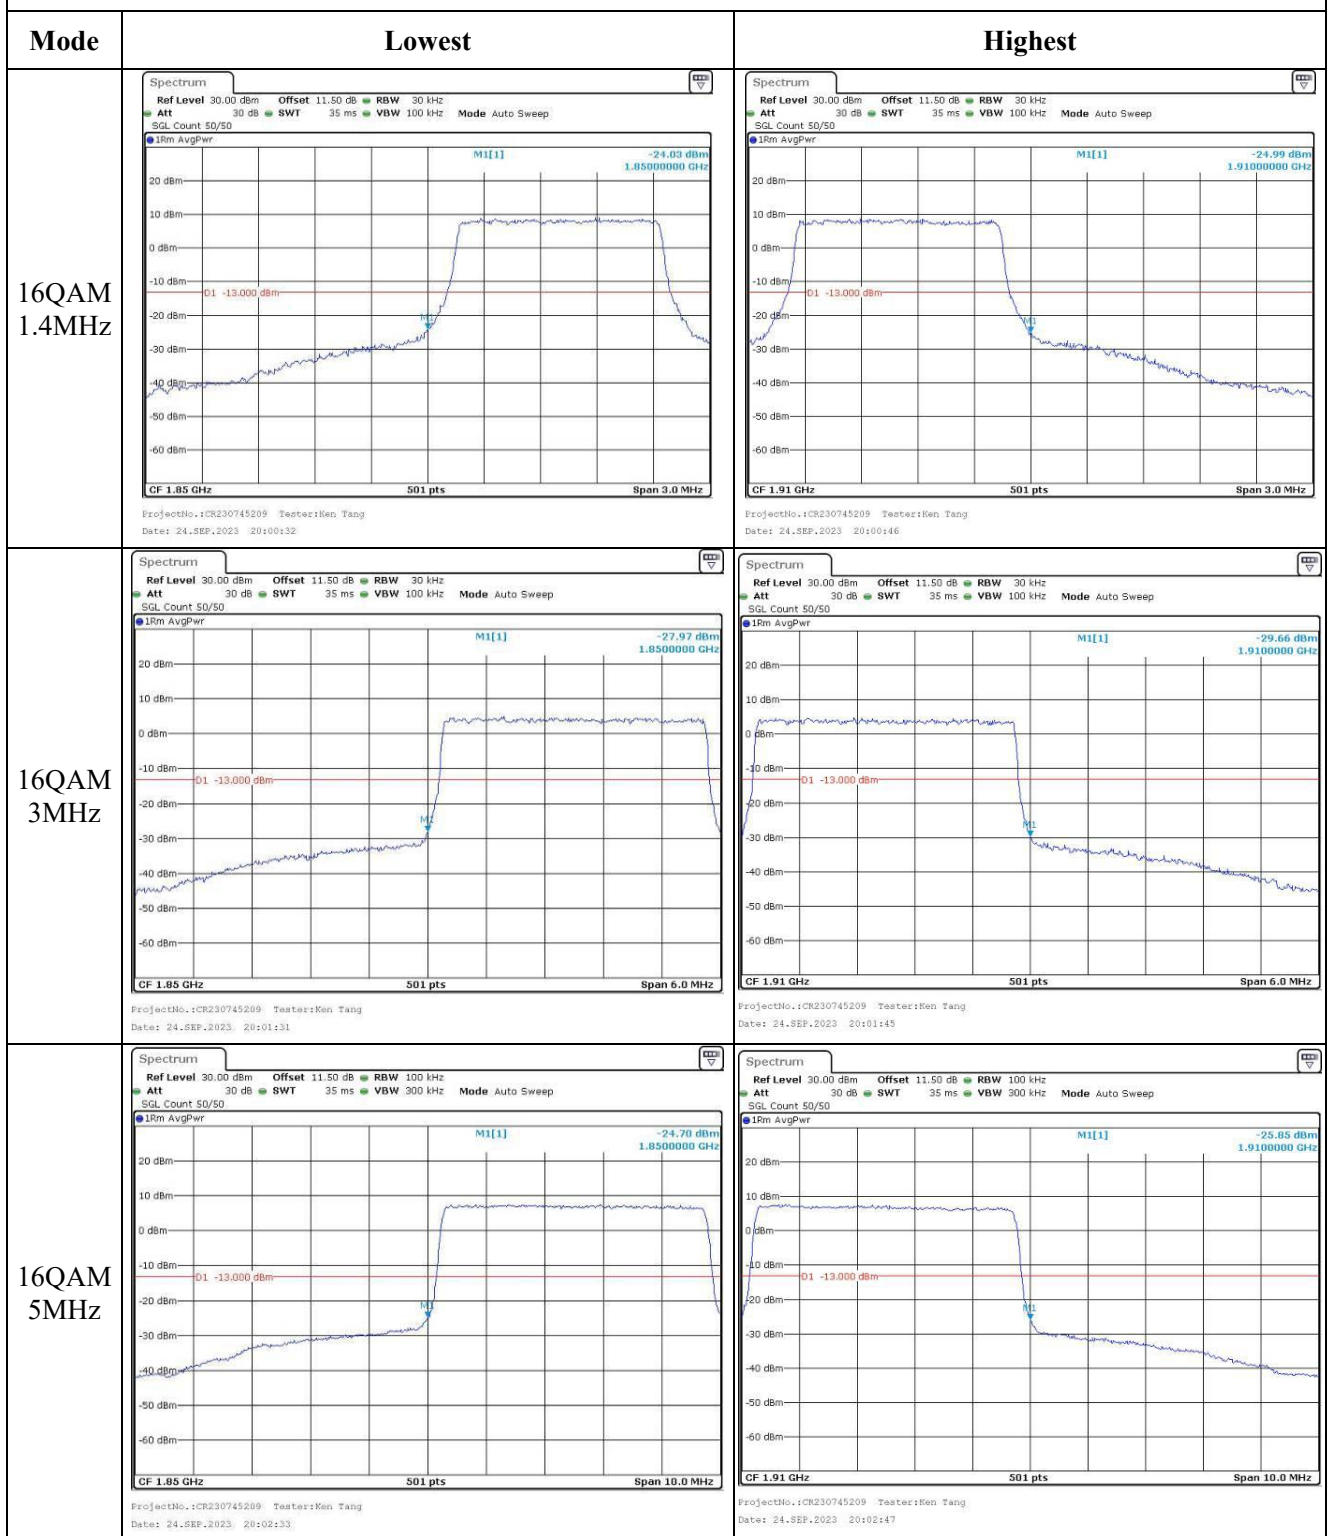

## Out of band emission, Band Edge

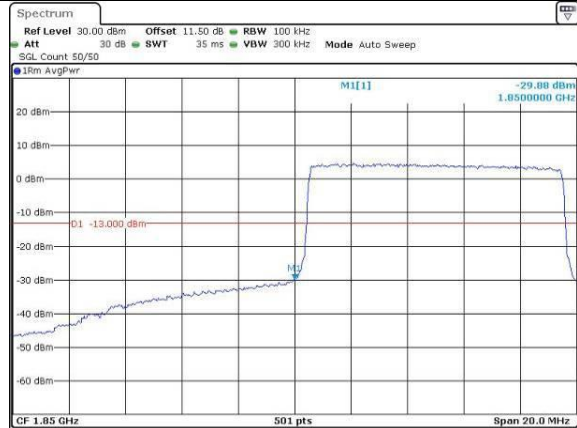

## Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 10MHz	 <p>ProjectNo.:CR230745209 Testert:Ken Tang Date: 24.SEP.2023 20:03:34</p>	 <p>ProjectNo.:CR230745209 Testert:Ken Tang Date: 24.SEP.2023 20:03:49</p>
16QAM 15MHz	 <p>ProjectNo.:CR230745209 Testert:Ken Tang Date: 24.SEP.2023 20:04:34</p>	 <p>ProjectNo.:CR230745209 Testert:Ken Tang Date: 24.SEP.2023 20:04:49</p>
16QAM 20MHz	 <p>ProjectNo.:CR230745209 Testert:Ken Tang Date: 24.SEP.2023 20:05:32</p>	 <p>ProjectNo.:CR230745209 Testert:Ken Tang Date: 24.SEP.2023 20:05:46</p>

**4.6 Antenna Port Test Data and Results for LTE Band 5**

Serial Number:	2BCU-1	Test Date:	2023/9/22~2023/9/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ken Tang	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.5-25.4	Relative Humidity: (%)	57-49	ATM Pressure: (kPa)	101
----------------------	-----------	------------------------------	-------	------------------------	-----

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Frequency For Each Mode:**

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

**Test Data:****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.95	23.95	23.89	16.87	38.45
	RB1#3	23.93	23.91	23.95		
	RB1#5	23.98	23.91	23.95		
	RB3#0	24.17	24.11	24.11		
	RB3#3	24.15	24.06	24.13		
	RB6#0	23.08	23.11	23.07		
1.4MHz 16QAM	RB1#0	23.17	23.26	23.05	16.04	38.45
	RB1#3	23.2	23.25	23.07		
	RB1#5	23.2	23.23	23.07		
	RB3#0	23.34	23.02	23.02		
	RB3#3	23.33	22.98	23.02		
	RB6#0	22.11	22.23	21.99		
3MHz QPSK	RB1#0	24.03	24.2	23.93	16.9	38.45
	RB1#8	24.04	24.15	23.91		
	RB1#14	24.04	24.12	23.92		
	RB6#0	23.12	23.12	23.09		
	RB6#9	23.1	23.07	23.02		
	RB15#0	23.15	23.07	23.09		
3MHz 16QAM	RB1#0	23.16	23.53	23.24	16.23	38.45
	RB1#8	23.12	23.46	23.17		
	RB1#14	23.13	23.44	23.19		
	RB6#0	22.07	22.2	22.14		
	RB6#9	22.02	22.14	22.13		
	RB15#0	22.15	22.16	22.04		
5MHz QPSK	RB1#0	24.18	24.38	24.01	17.08	38.45
	RB1#13	24.13	24.32	23.97		
	RB1#24	24.18	24.29	23.97		
	RB15#0	23.12	23.24	23.16		
	RB15#10	23.19	23.1	22.93		
	RB25#0	23.14	23.13	23		
5MHz 16QAM	RB1#0	23.22	23.08	23.34	16.04	38.45
	RB1#13	23.21	23.04	23.27		
	RB1#24	23.26	23.04	23.26		
	RB15#0	22.14	22.29	22.19		
	RB15#10	22.21	22.11	21.96		
	RB25#0	22.2	22.23	22.06		
10MHz QPSK	RB1#0	24.09	24.15	24.2	16.9	38.45
	RB1#25	24.12	24.11	24.16		
	RB1#49	24.03	24.06	24.15		

	RB25#0	23.01	23.24	23.1		
	RB25#25	23.13	22.94	22.9		
	RB50#0	23.11	23.08	23.07		
10MHz 16QAM	RB1#0	23.3	23.2	23.59	16.29	38.45
	RB1#25	23.34	23.16	23.56		
	RB1#49	23.25	23.12	23.45		
	RB25#0	22.1	22.33	22.14		
	RB25#25	22.15	22.07	21.97		
	RB50#0	22.11	22.08	22.06		
Note: ERP= Conducted Power(dBm) - LC(dB) + GT(dBd) GT(dBd)=GT(dBi)-2.15						
					Result:	Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	9.16	8.84	6.22	13
	RB50#0	7.05	8.30	9.32	13
10MHz 16QAM	RB1#0	8.76	8.38	8.41	13
	RB50#0	6.13	7.54	7.75	13
				Result:	Pass

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.114	1.108	1.362	1.836	1.416
1.4MHz 16QAM	1.108	1.102	1.108	1.500	1.740	1.470
3MHz QPSK	2.683	2.695	2.695	2.916	2.928	2.940
3MHz 16QAM	2.683	2.683	2.683	2.916	2.916	2.940
5MHz QPSK	4.491	4.531	4.491	5.040	5.100	5.060
5MHz 16QAM	4.511	4.511	4.531	5.020	5.040	4.980
10MHz QPSK	8.942	8.942	8.942	9.600	9.840	9.640
10MHz 16QAM	8.942	8.942	8.942	9.640	9.640	9.600
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>

**Out of band emission, Band Edge**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---

**Frequency Stability for FCC**

Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.87	110.520	0.132	2.5
	-20	3.87	106.741	0.128	2.5
	-10	3.87	106.789	0.128	2.5
	0	3.87	119.471	0.143	2.5
	10	3.87	108.921	0.130	2.5
	20	3.87	104.570	0.125	2.5
	30	3.87	100.448	0.120	2.5
	40	3.87	108.878	0.130	2.5
	50	3.87	113.475	0.136	2.5
Frequency Stability vs. Voltage	20	3.35	106.196	0.127	2.5
	20	4.43	100.475	0.120	2.5
				<b>Result:</b>	<b>Pass</b>

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.87	108.113	0.129	2.5
	-20	3.87	100.431	0.120	2.5
	-10	3.87	116.045	0.139	2.5
	0	3.87	104.095	0.124	2.5
	10	3.87	108.138	0.129	2.5
	20	3.87	115.926	0.139	2.5
	30	3.87	102.338	0.122	2.5
	40	3.87	106.728	0.128	2.5
	50	3.87	103.773	0.124	2.5
Frequency Stability vs. Voltage	20	3.35	104.593	0.125	2.5
	20	4.43	103.539	0.124	2.5
				<b>Result:</b>	<b>Pass</b>



**Test Plots**(Note: The 11.5dB is the Insertion loss of the RF cable, Coaxial tee connector and Attenuator, which was offset into the Spectrum Analyzer):

