






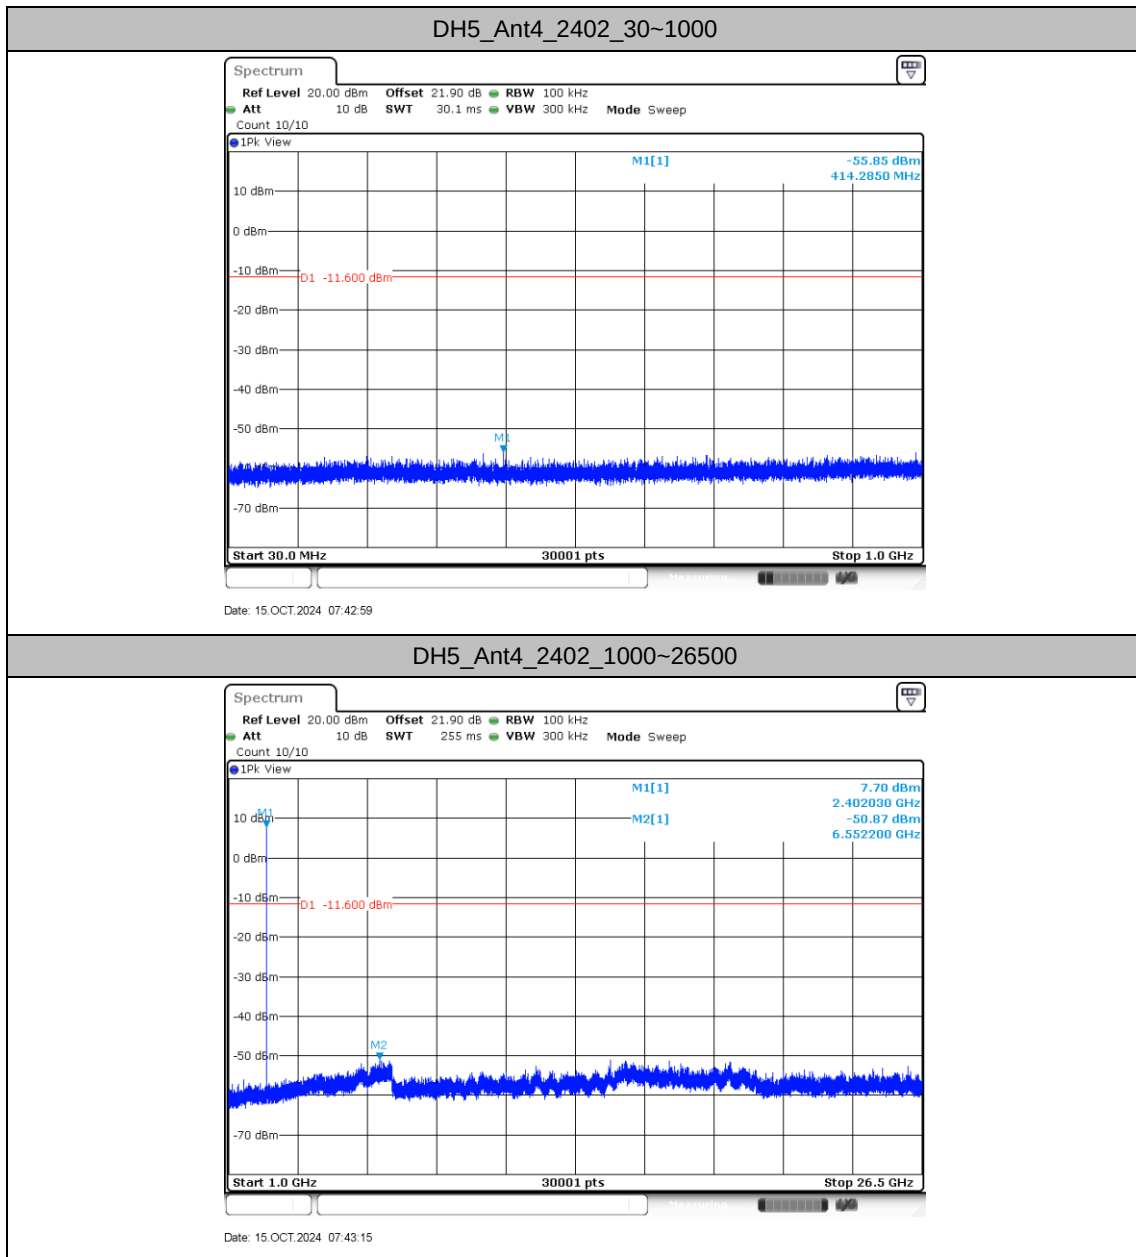


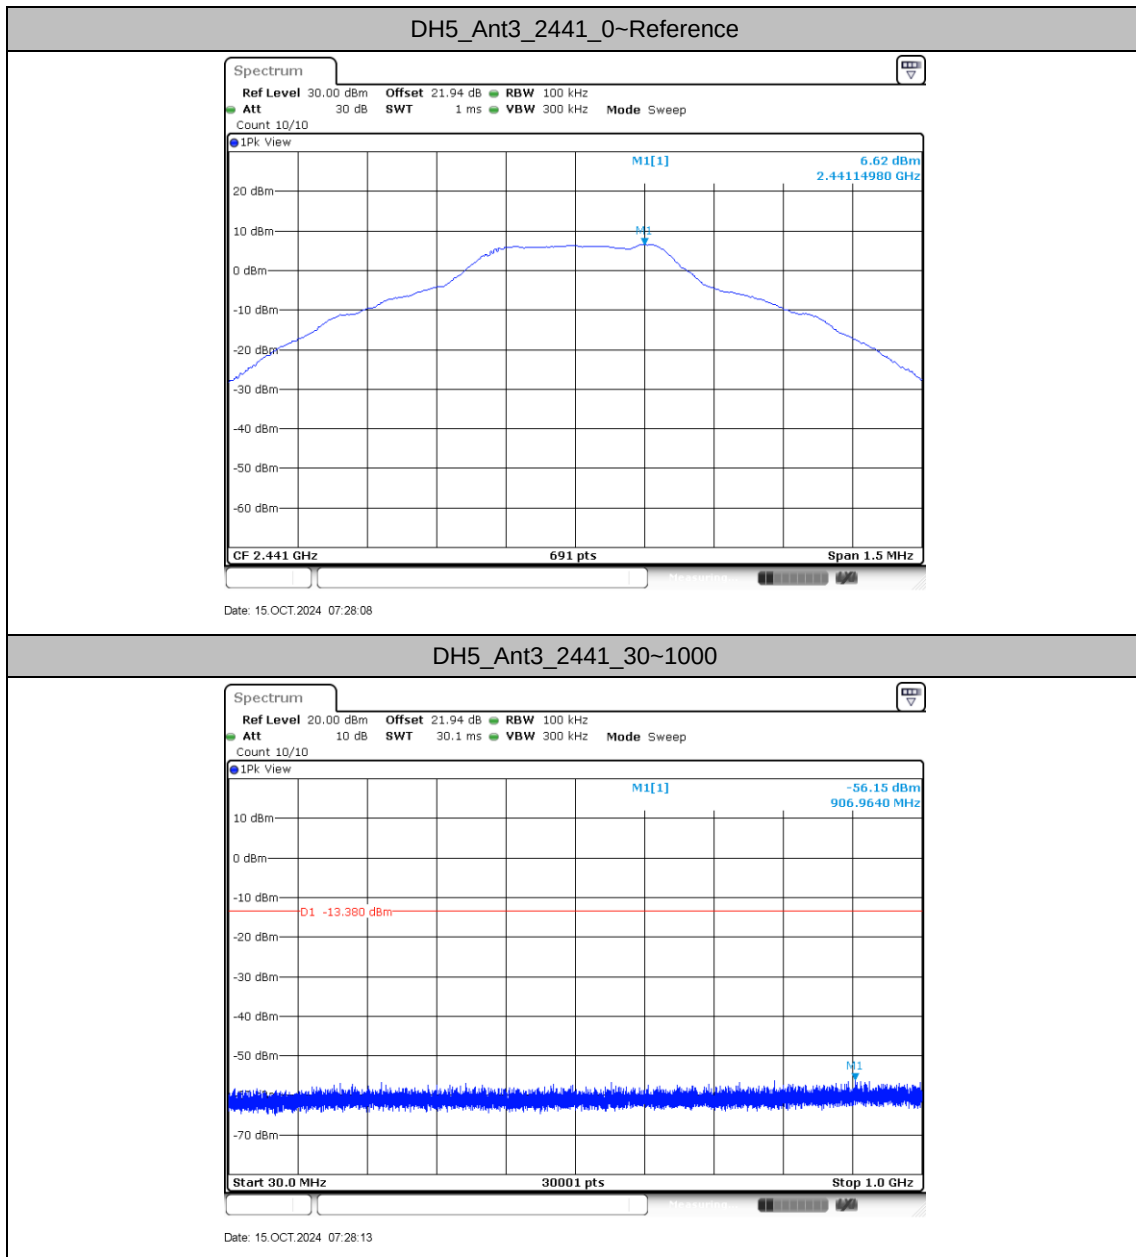


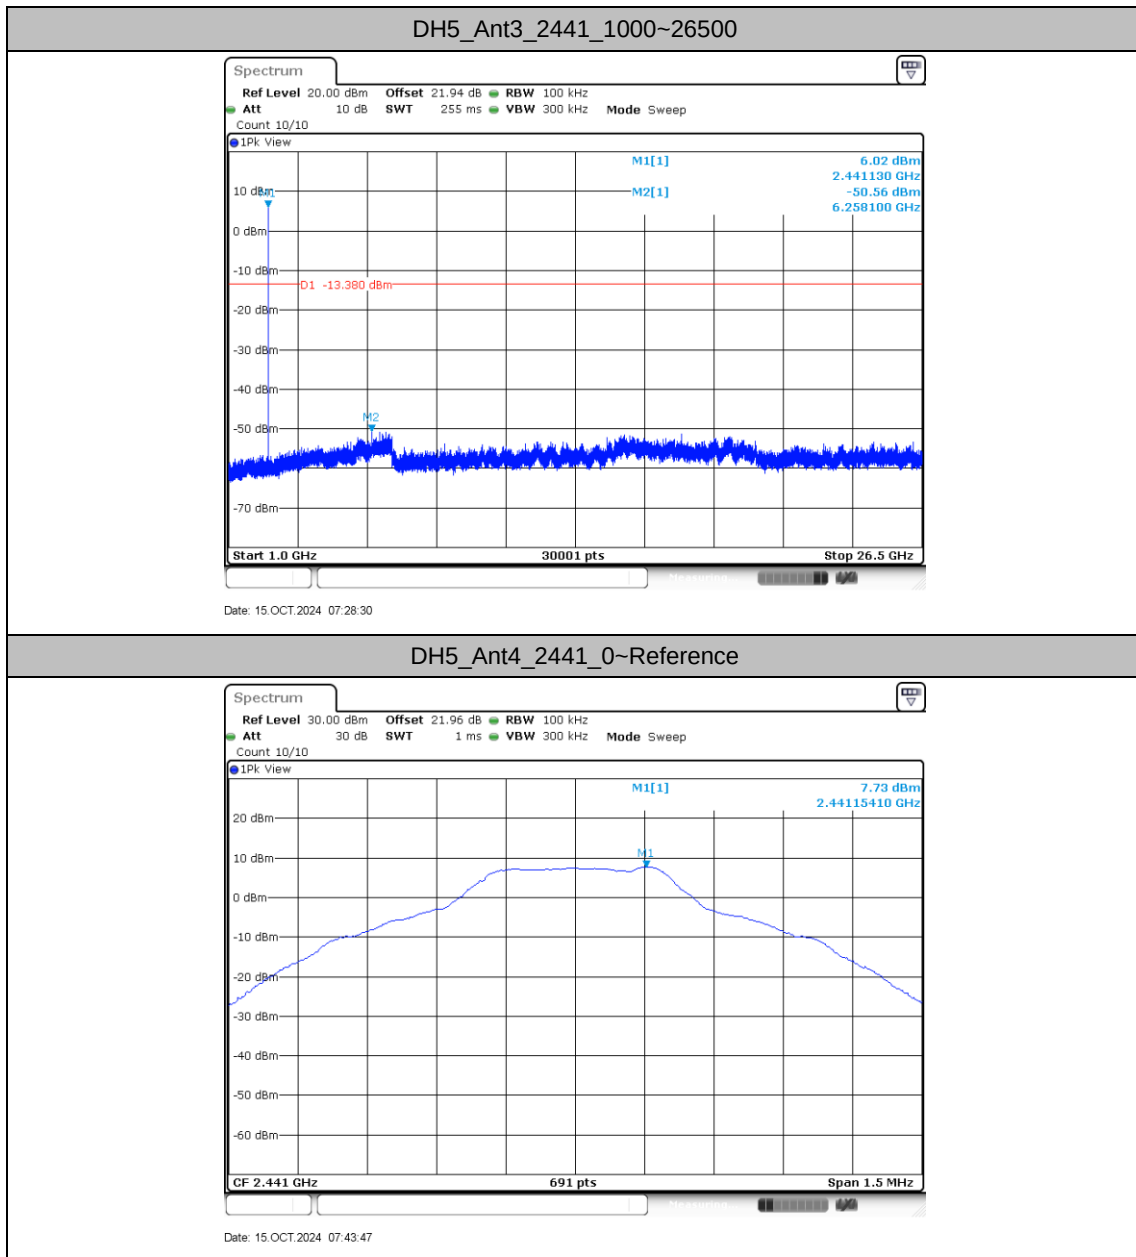


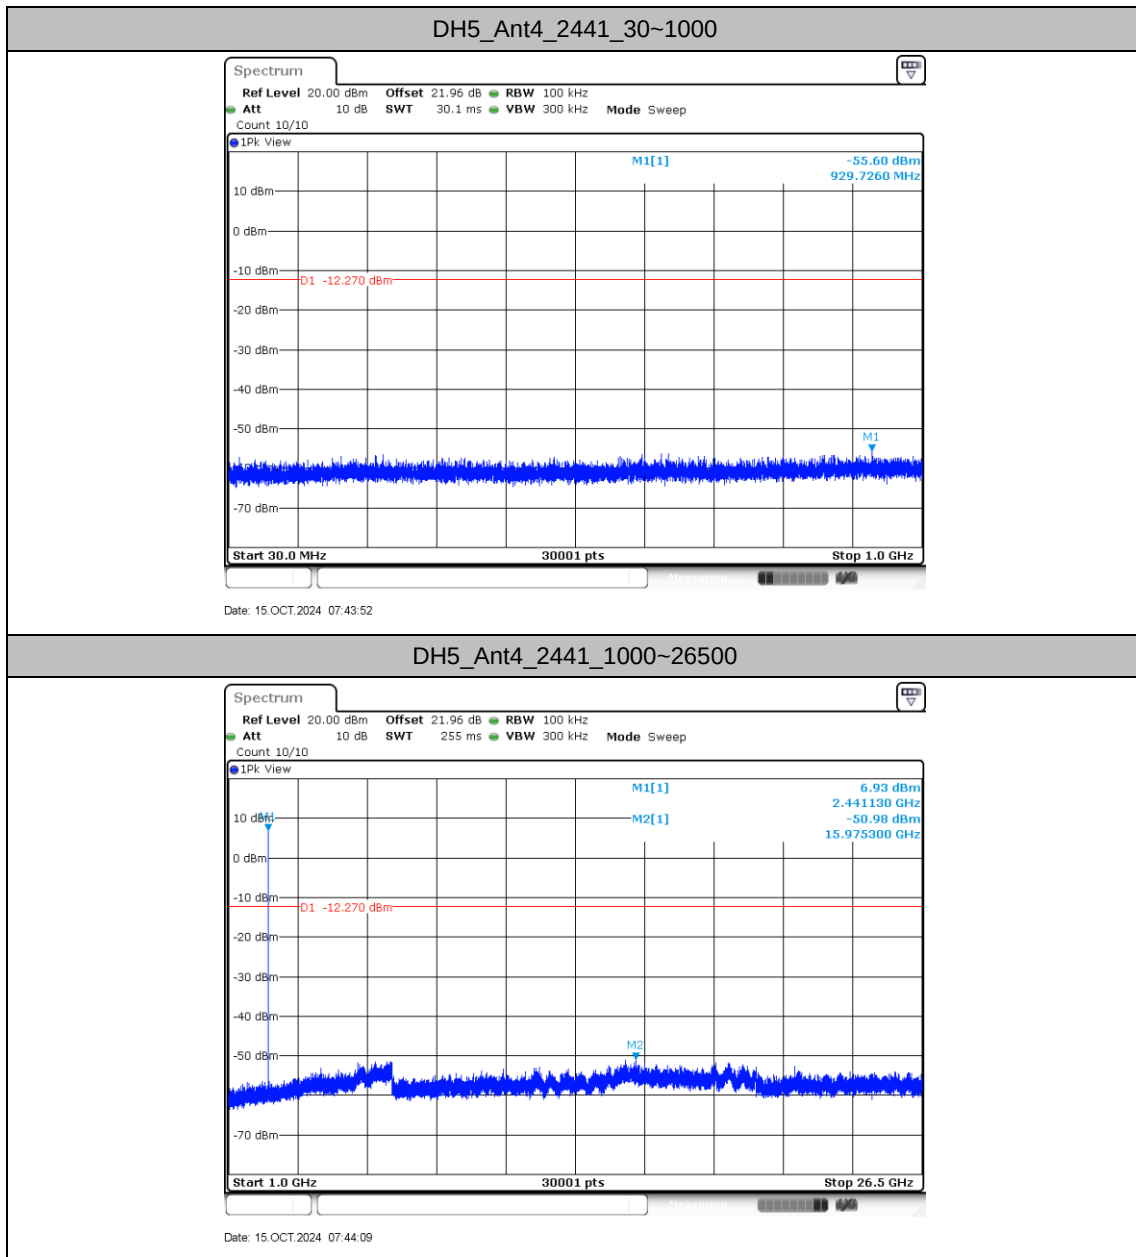


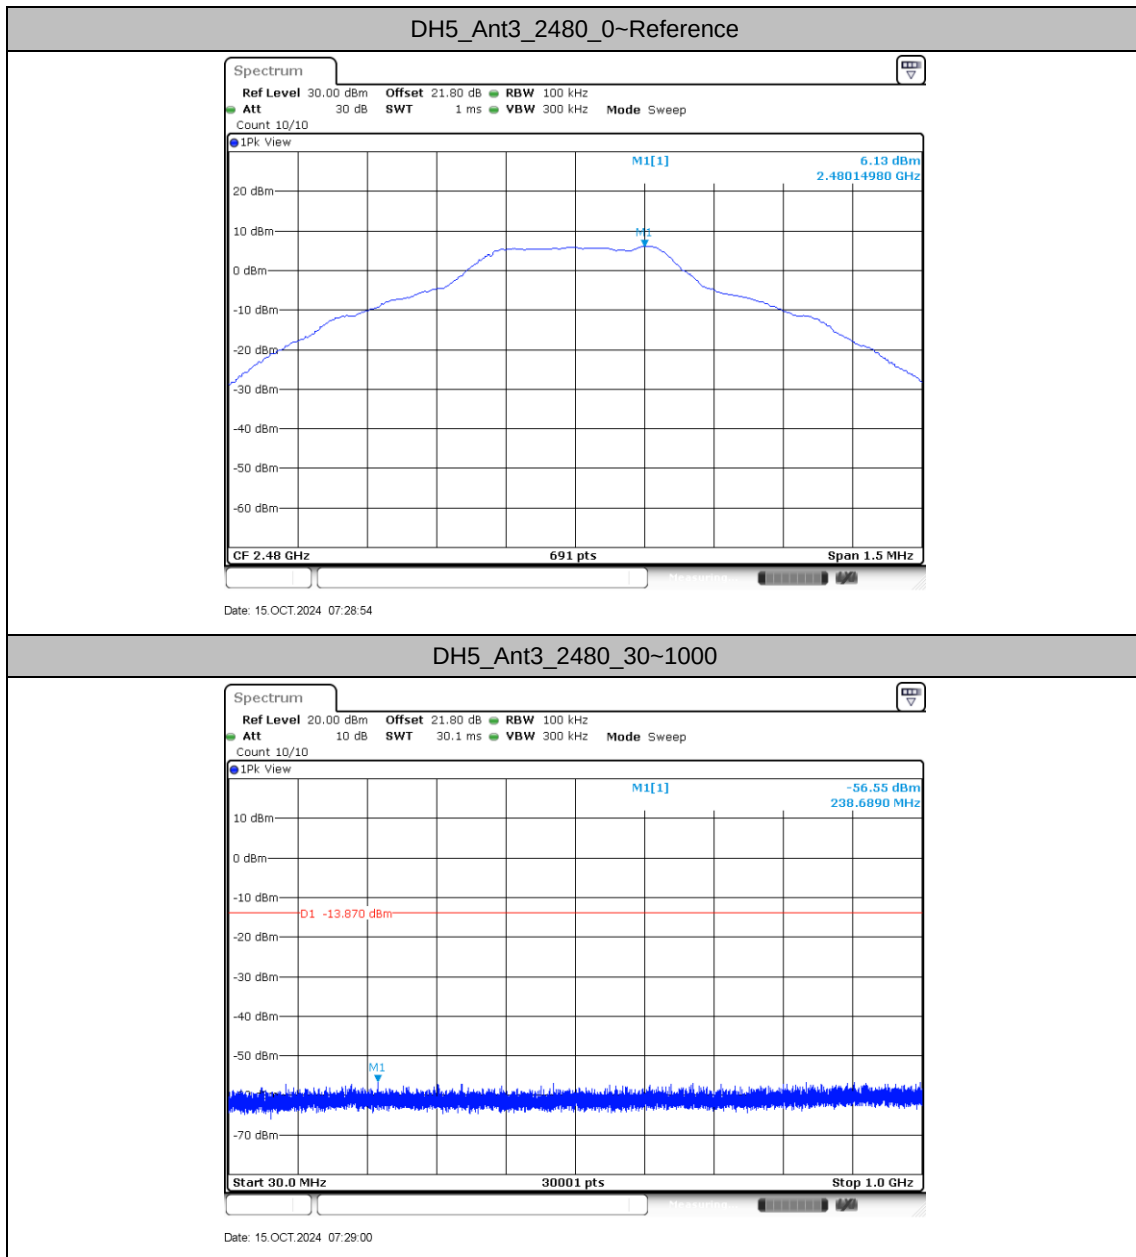


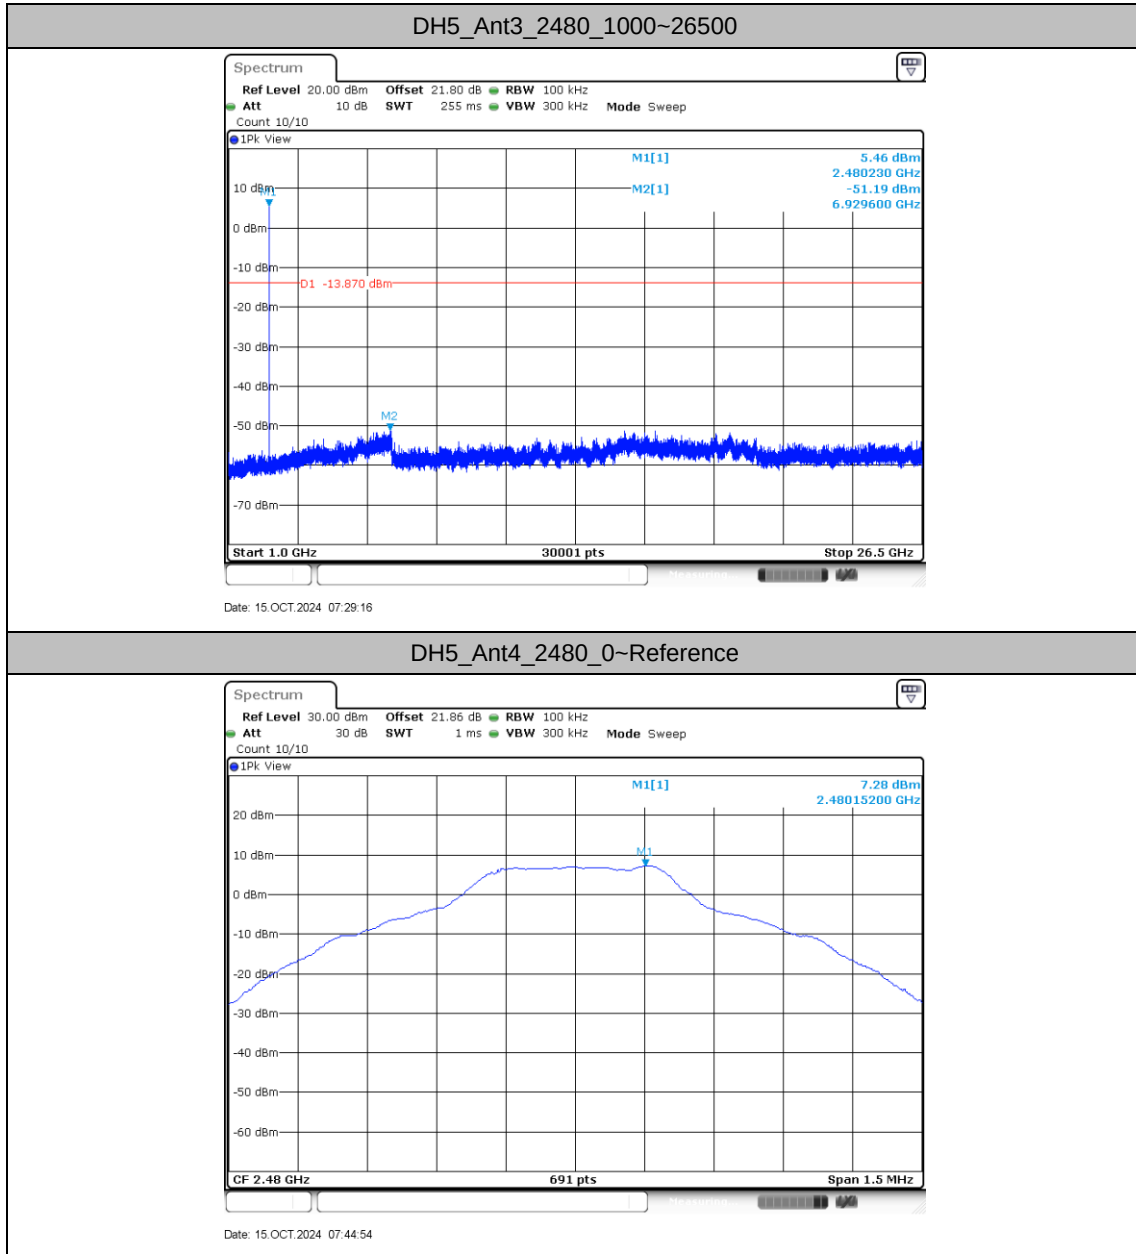


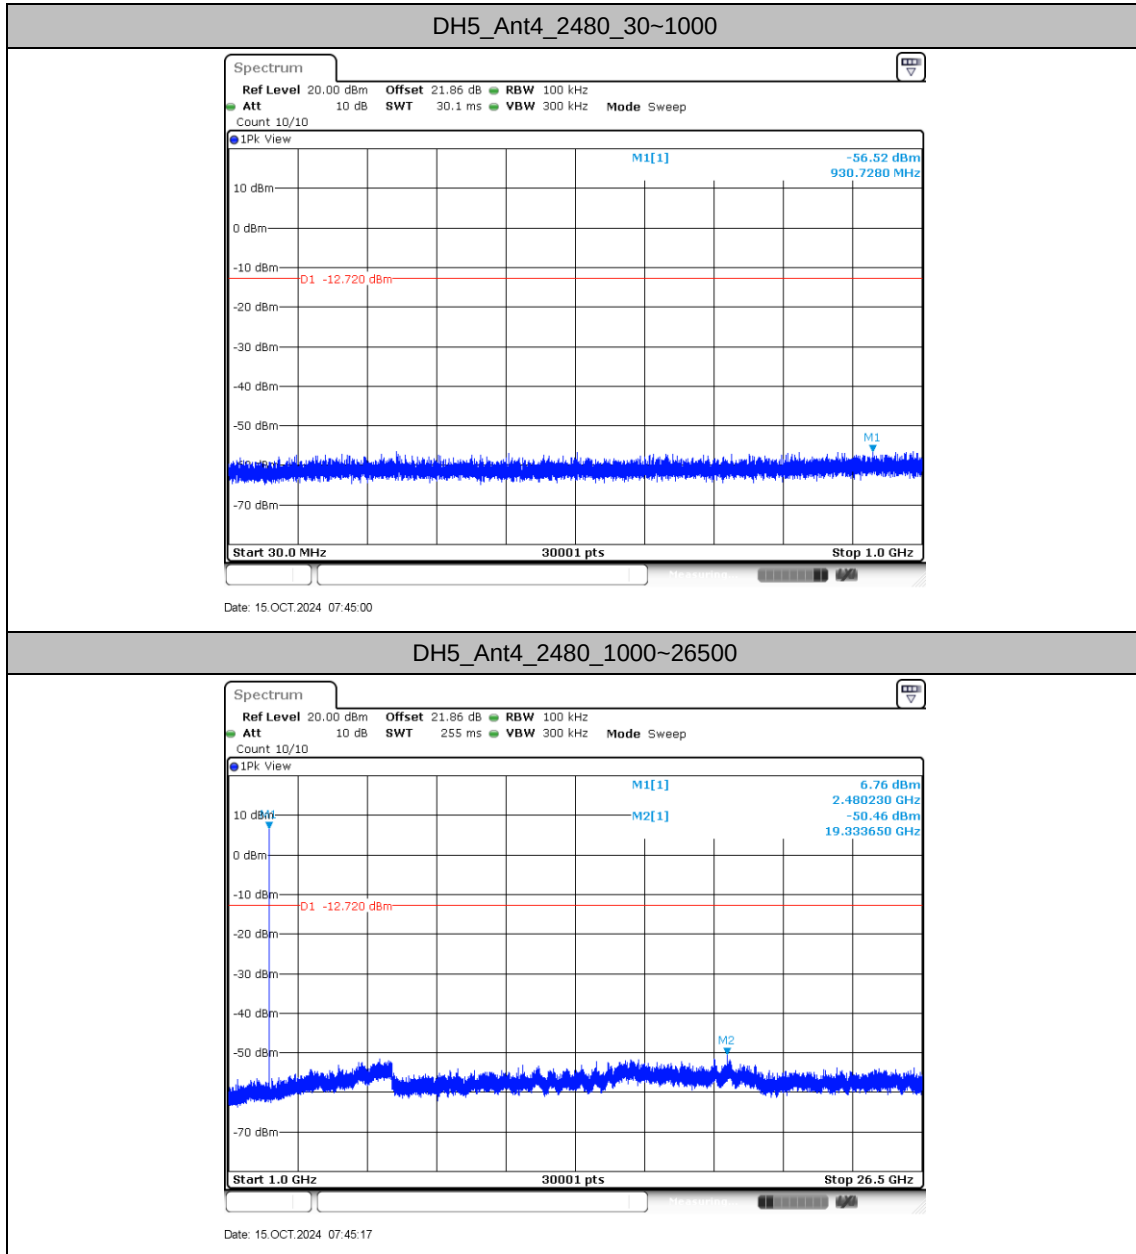


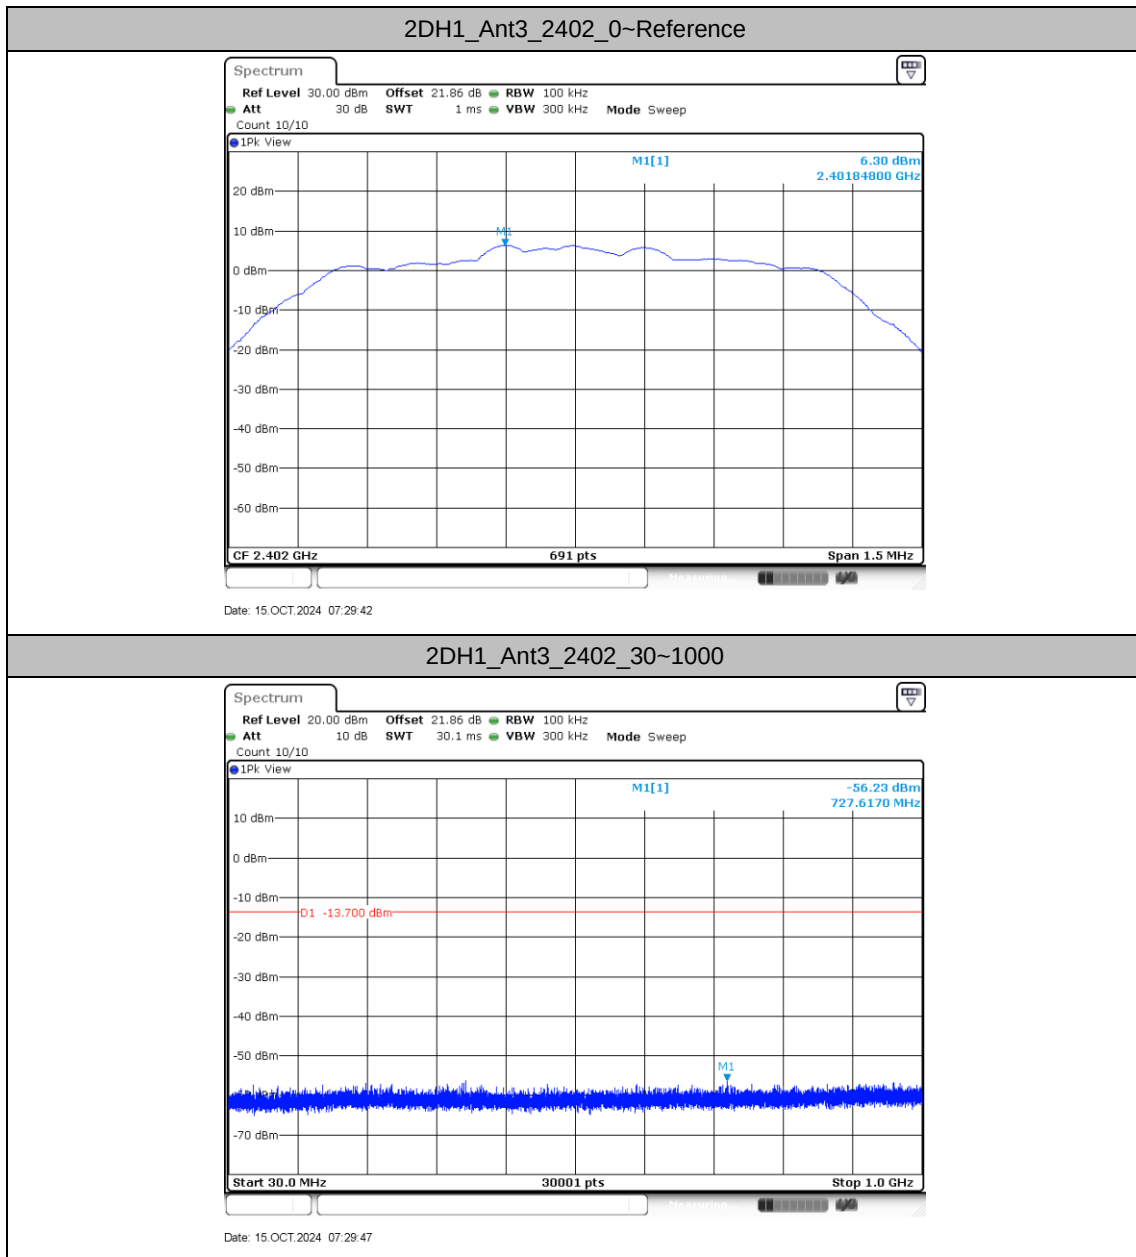


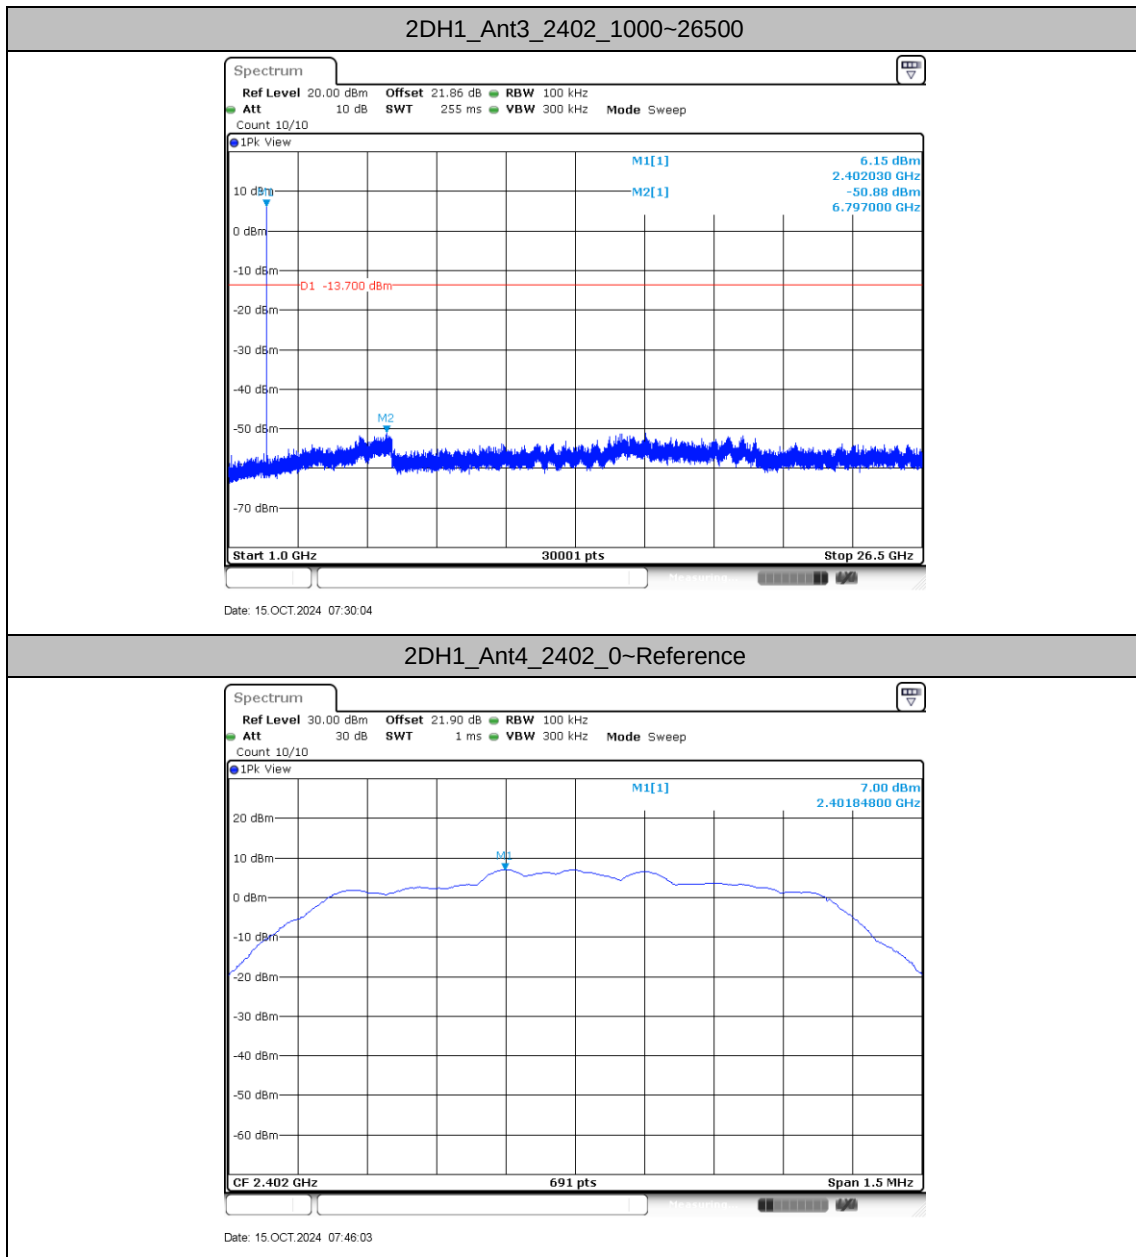


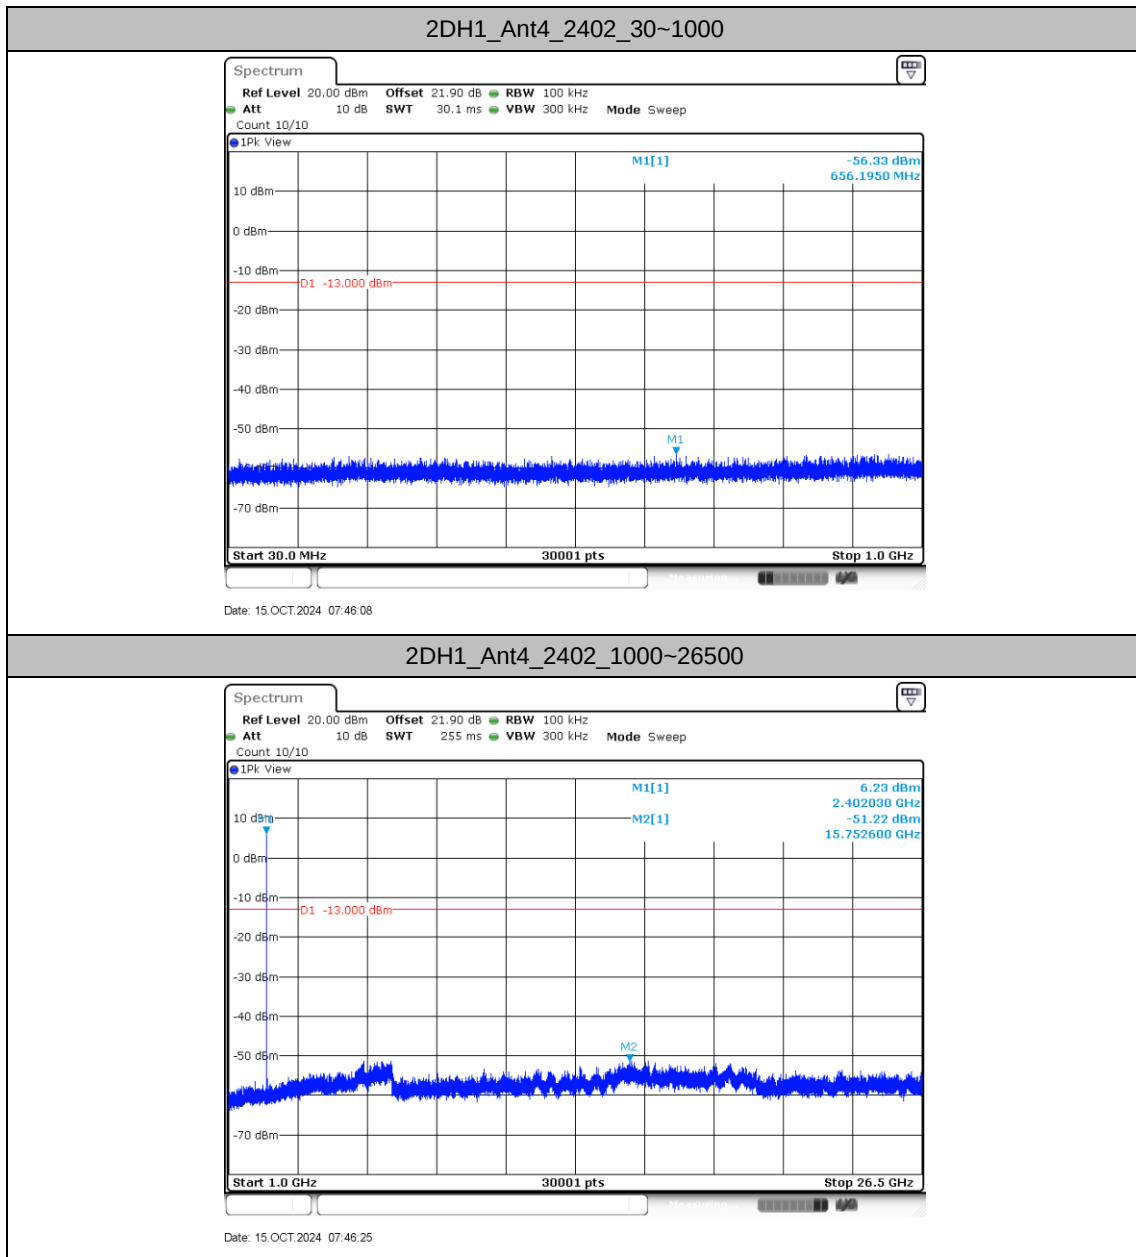


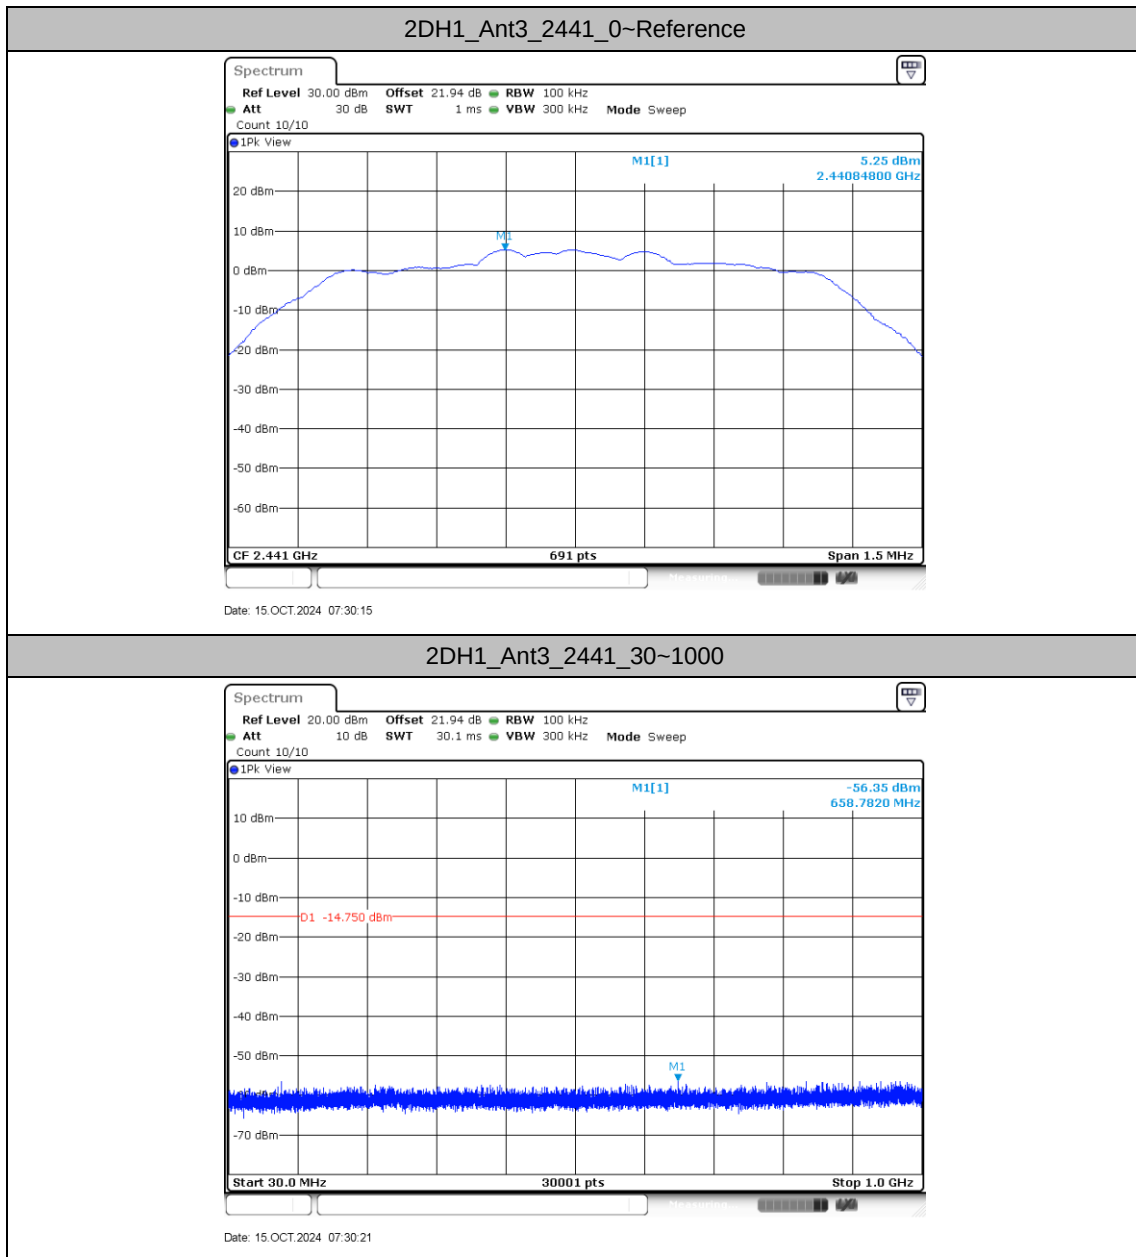


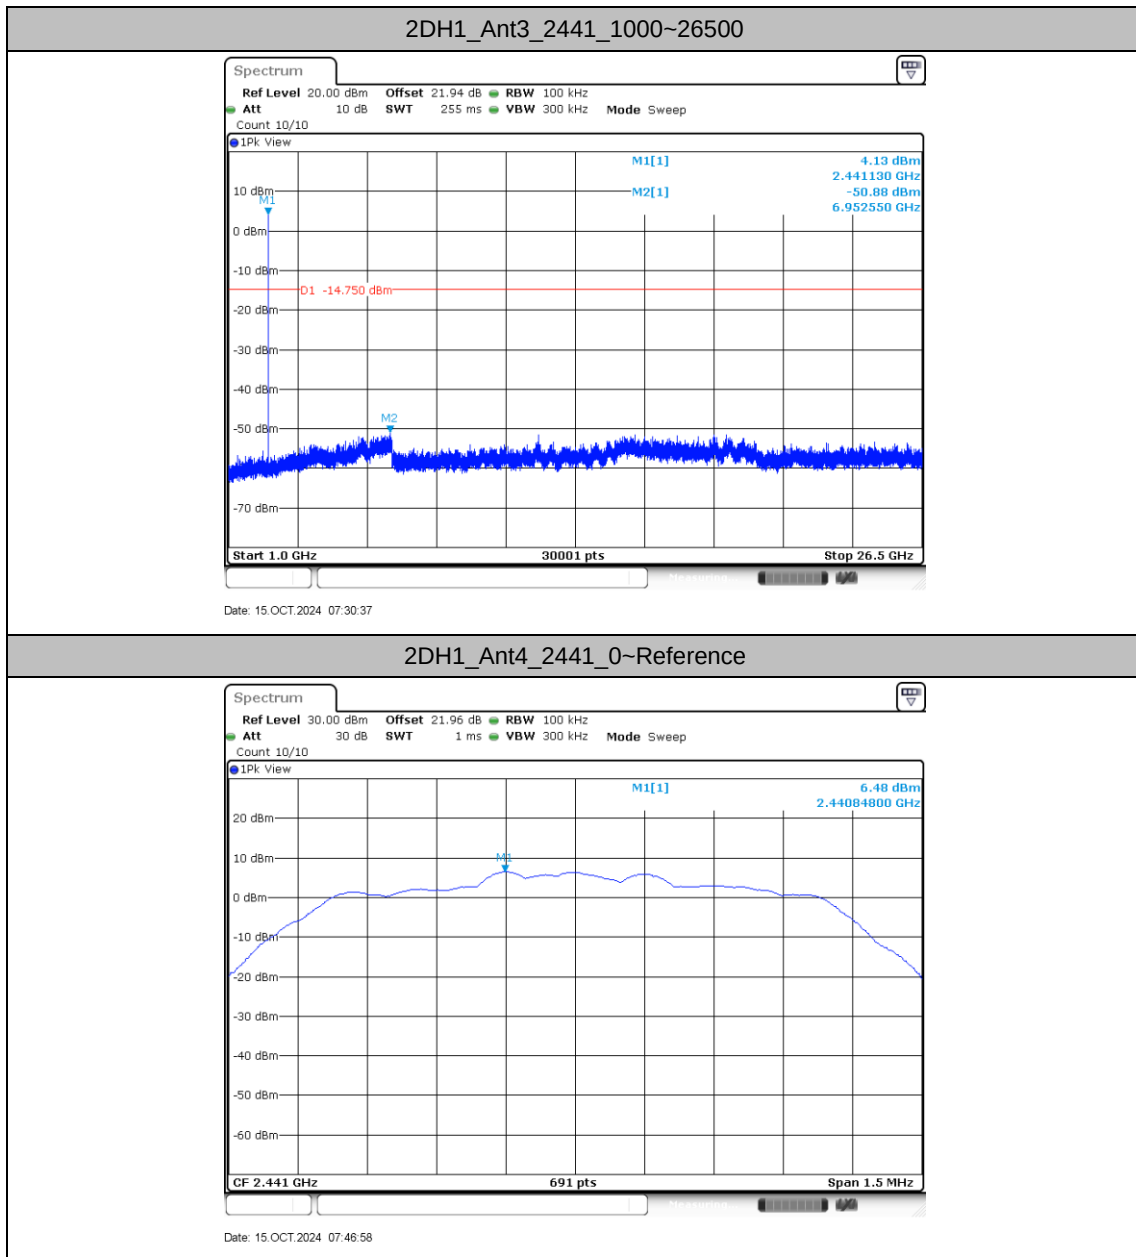


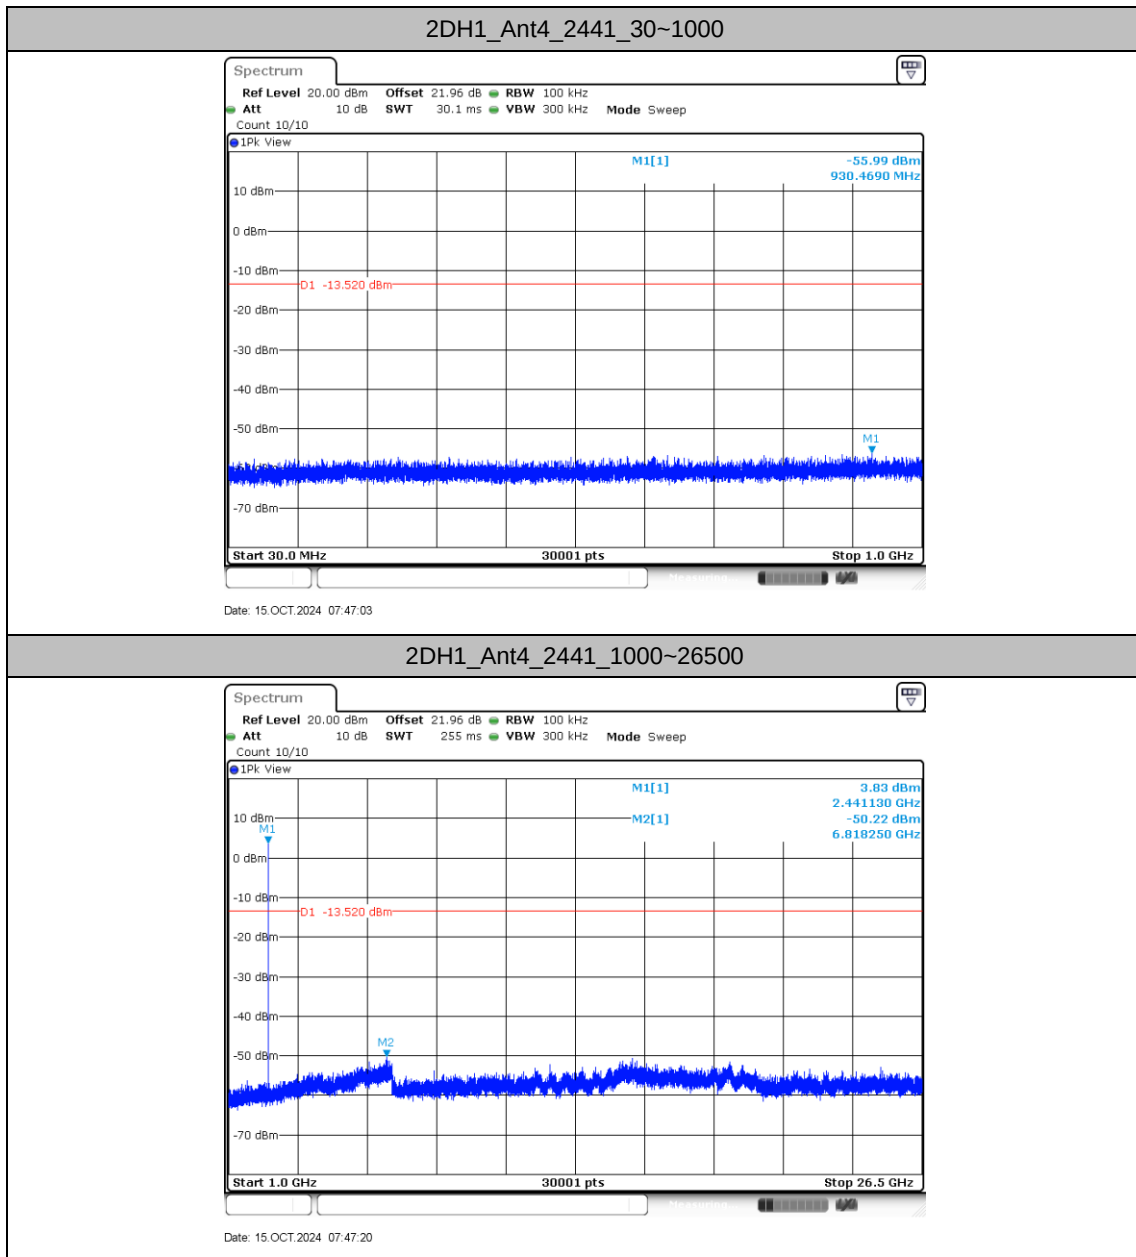


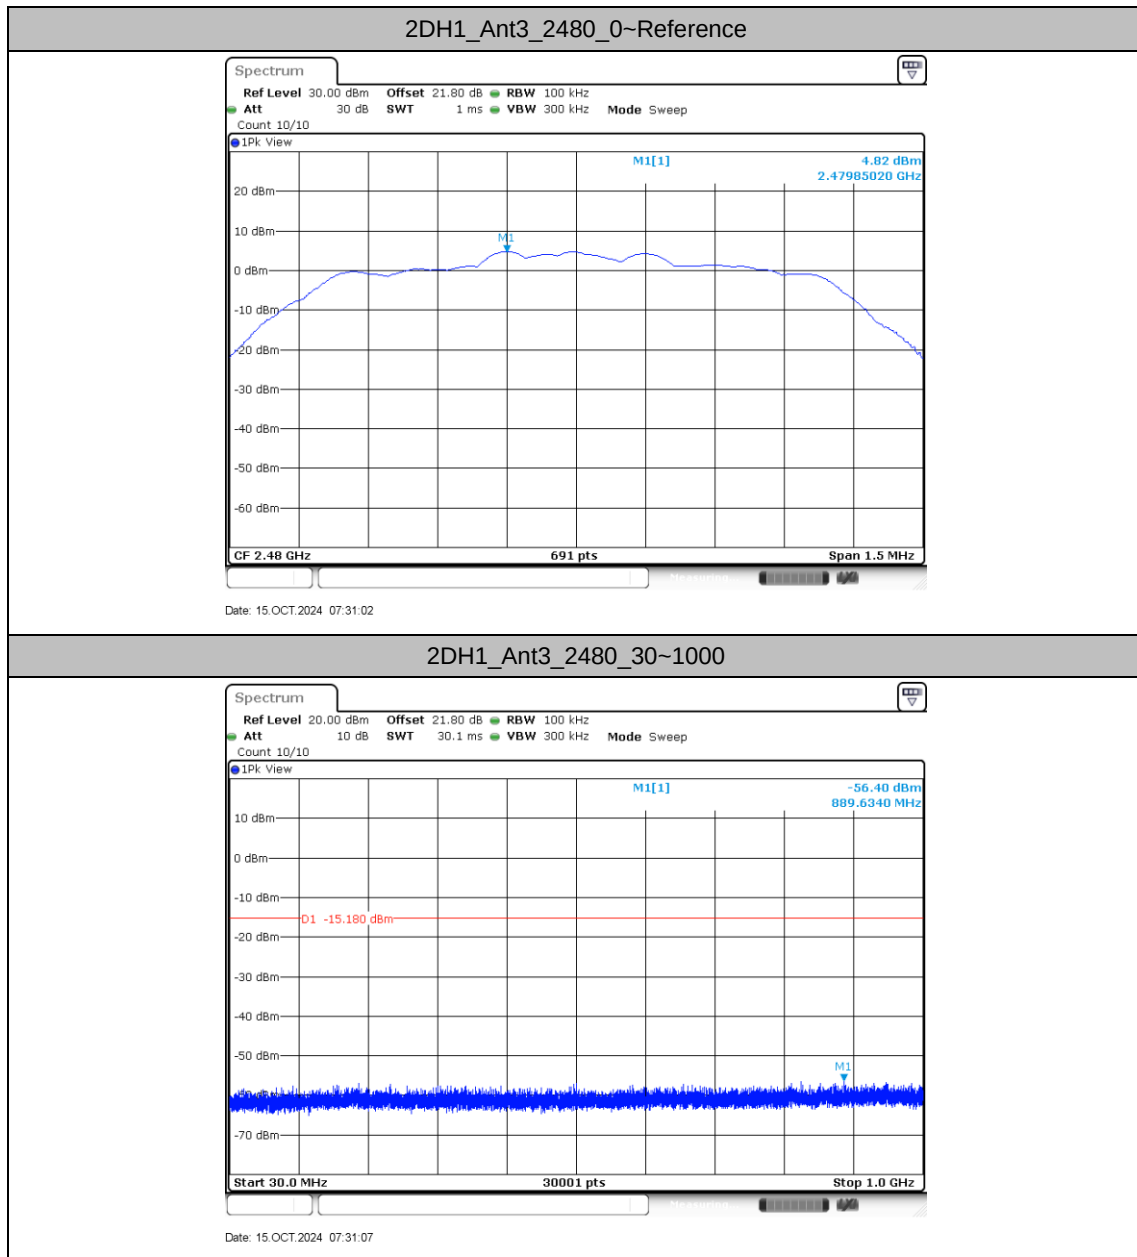


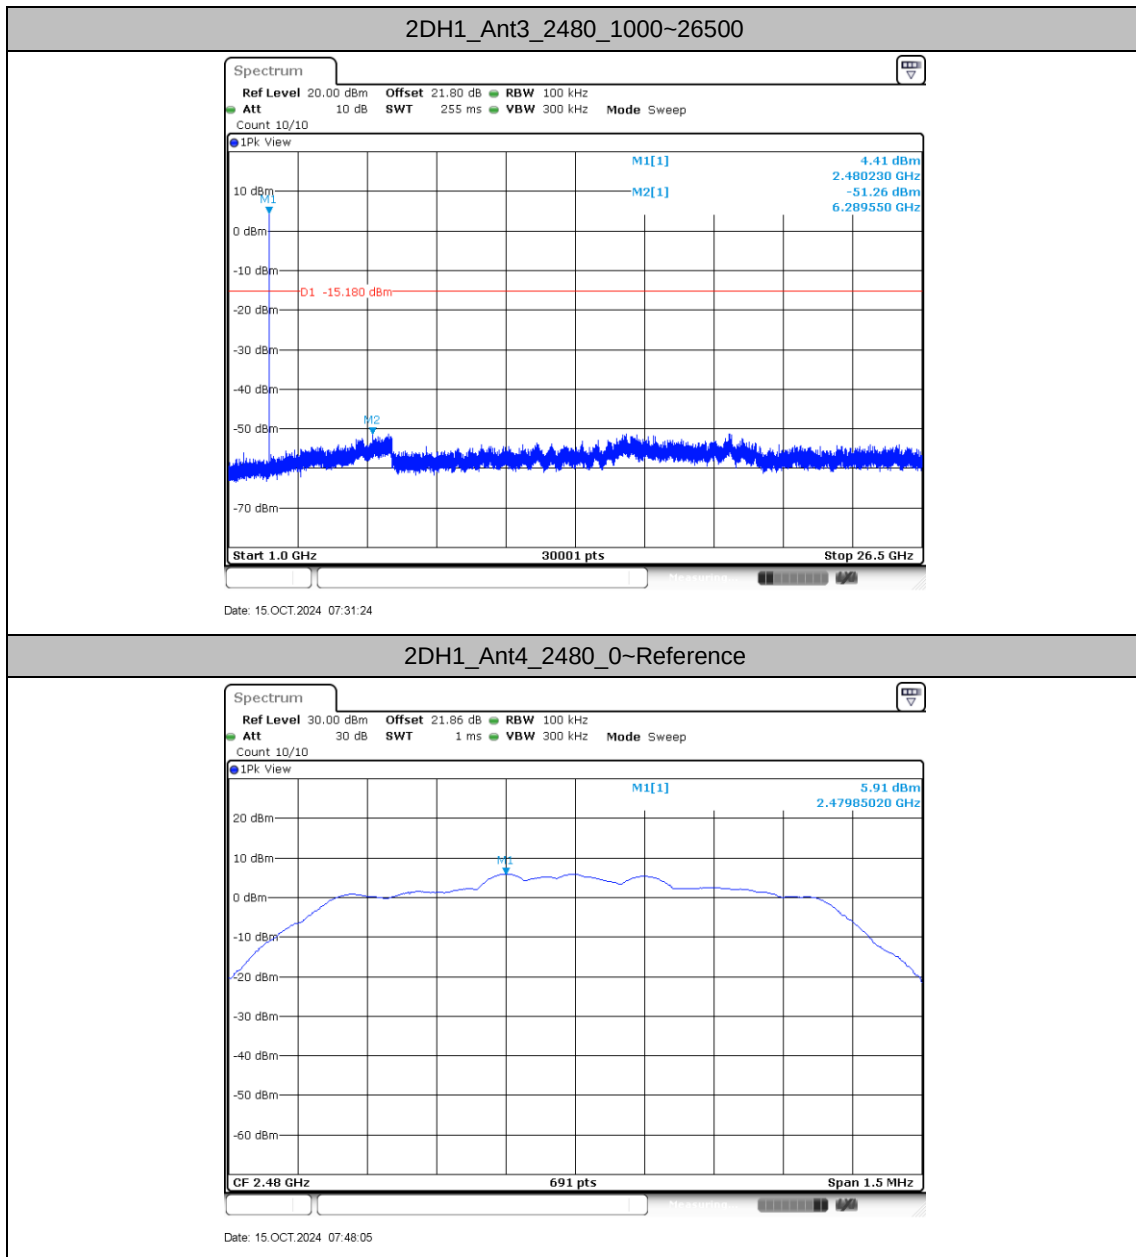


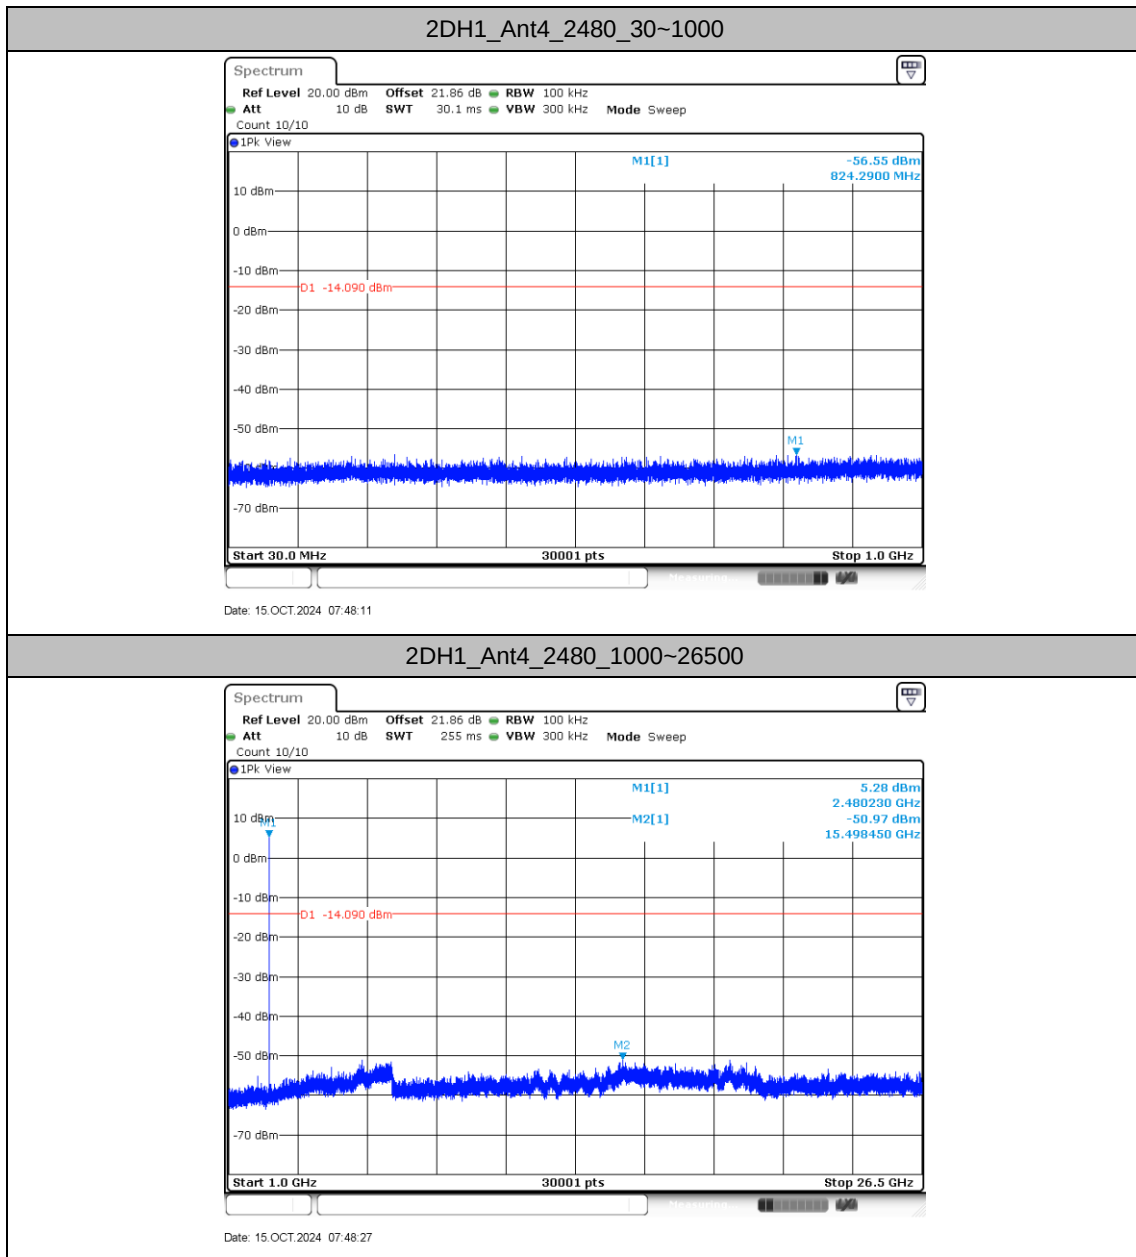


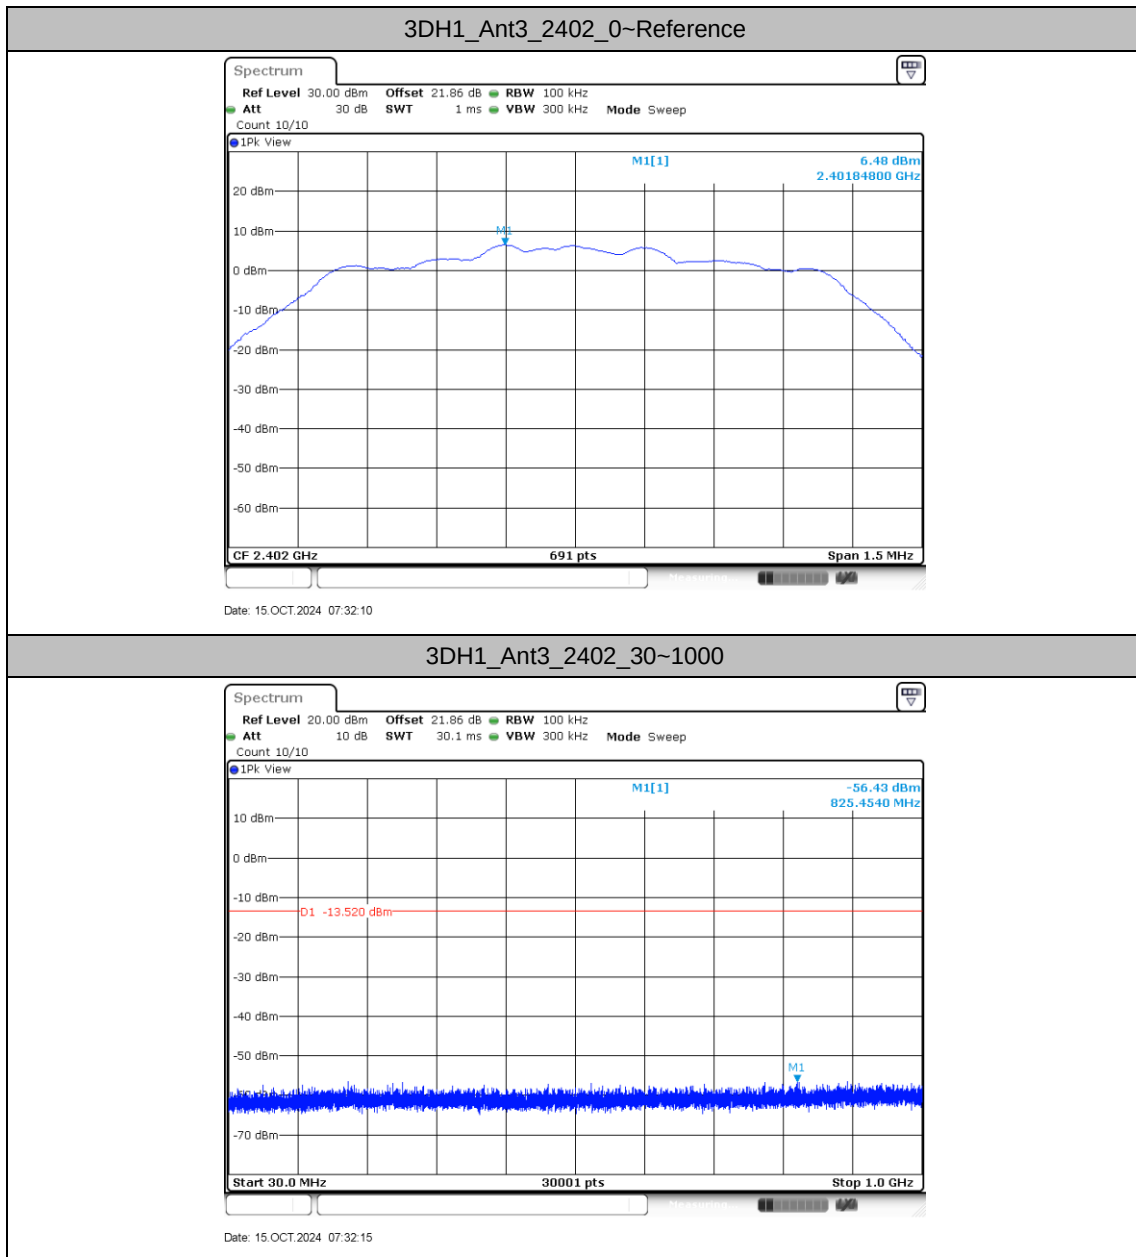


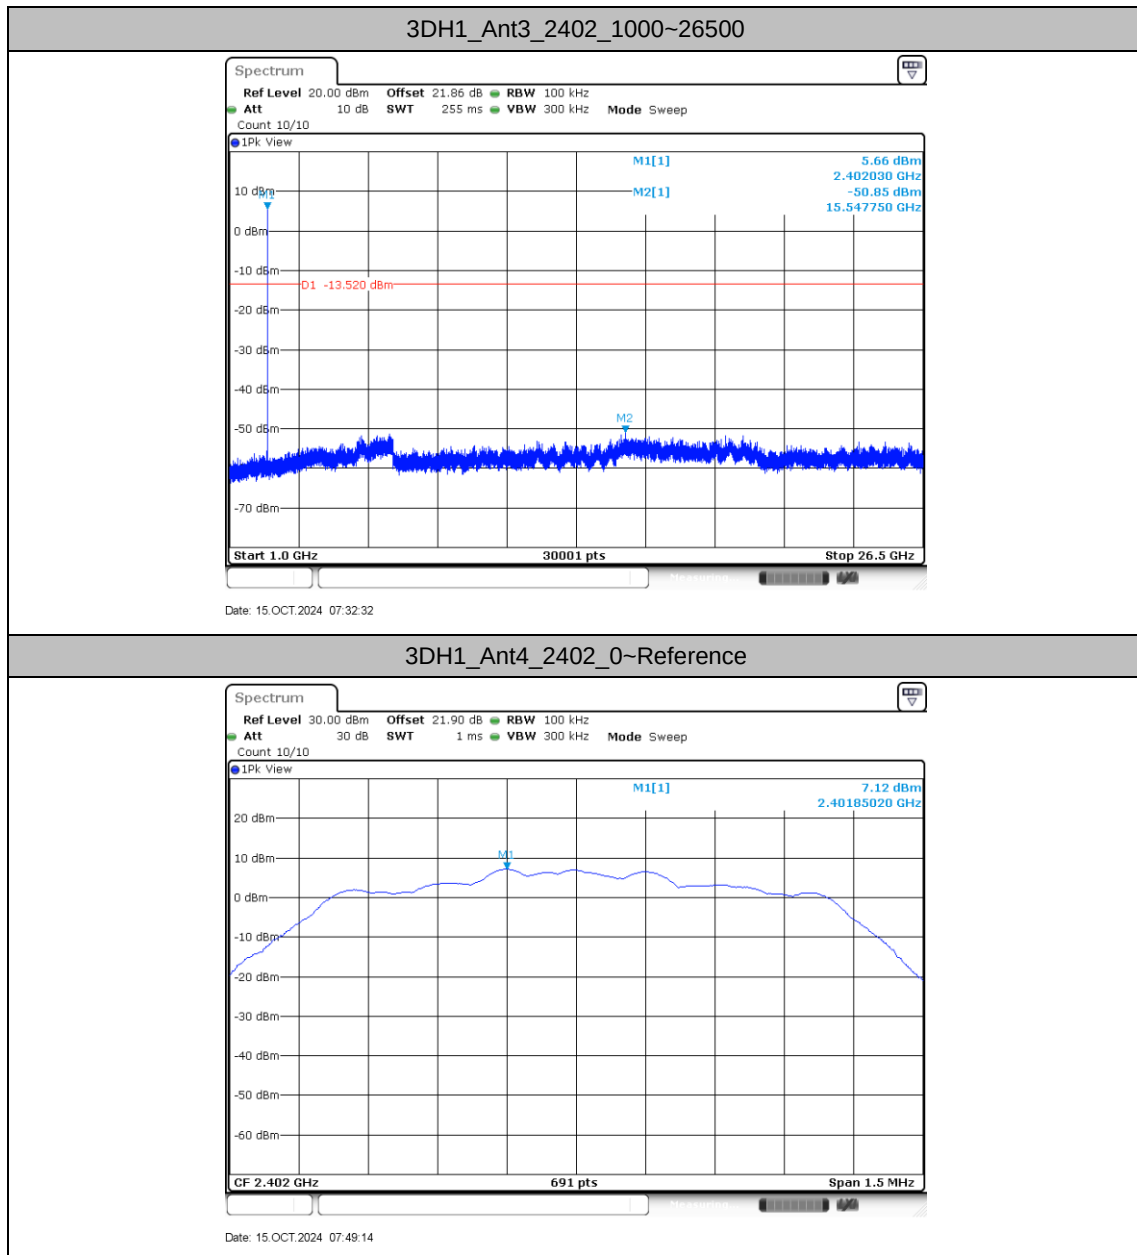


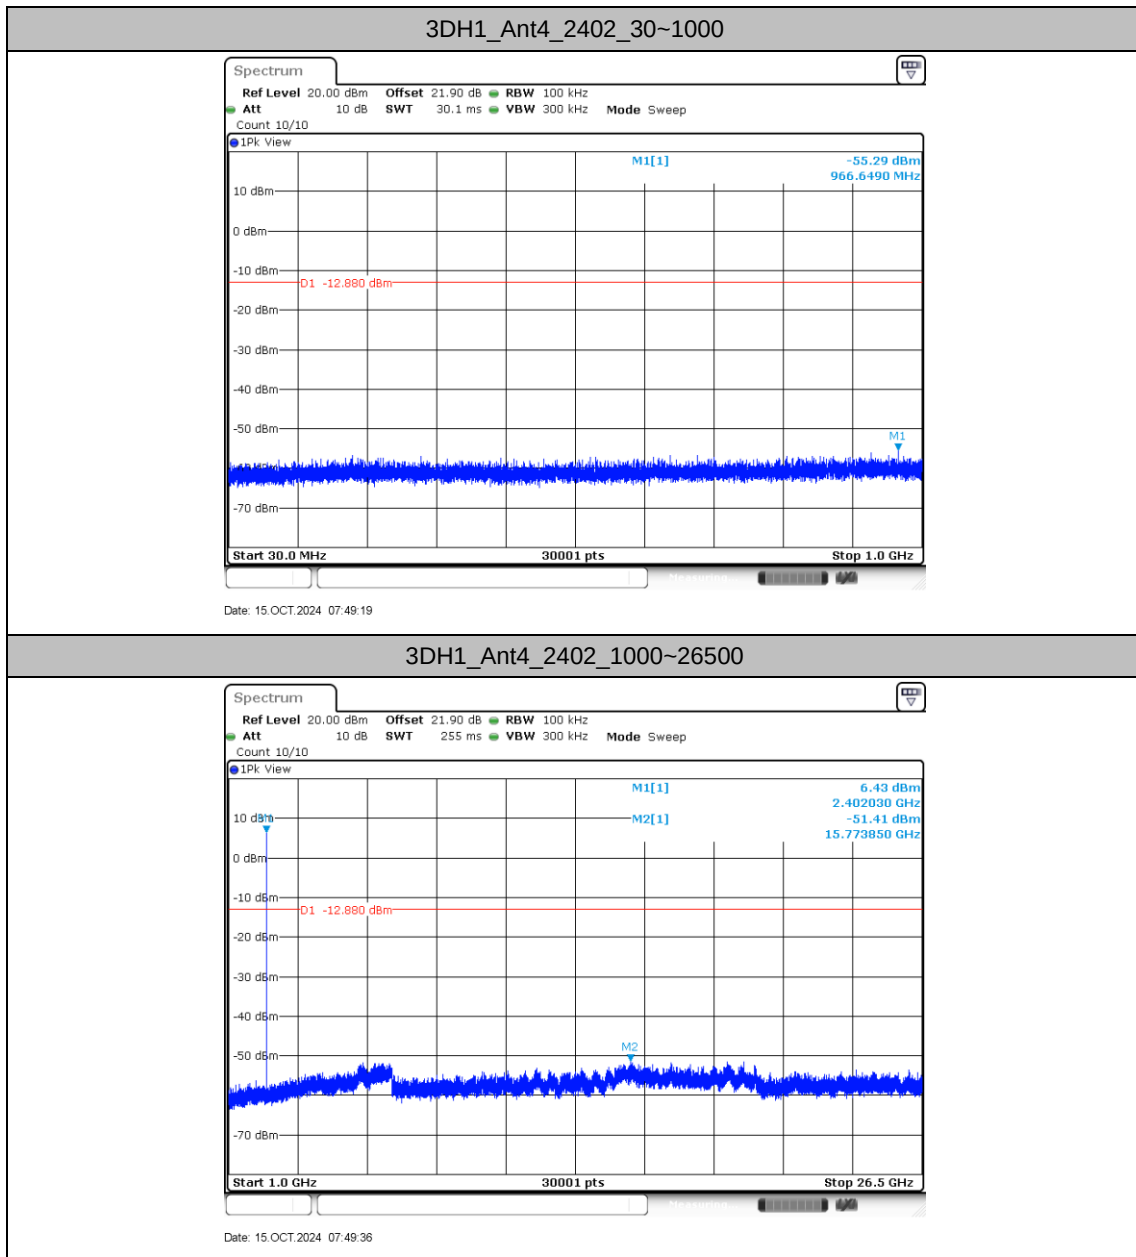


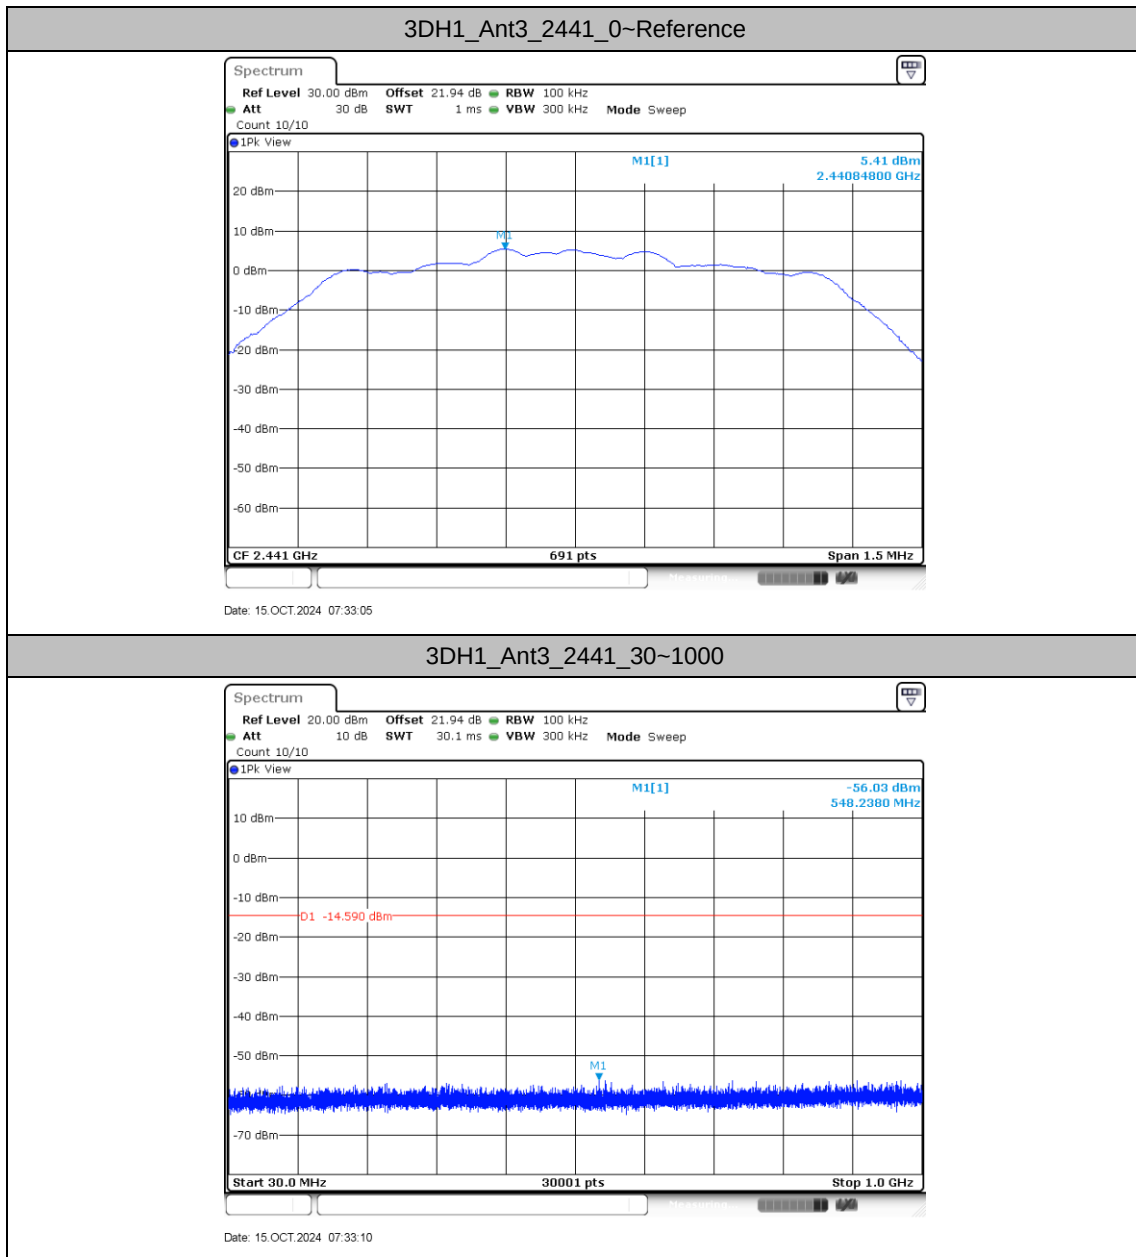


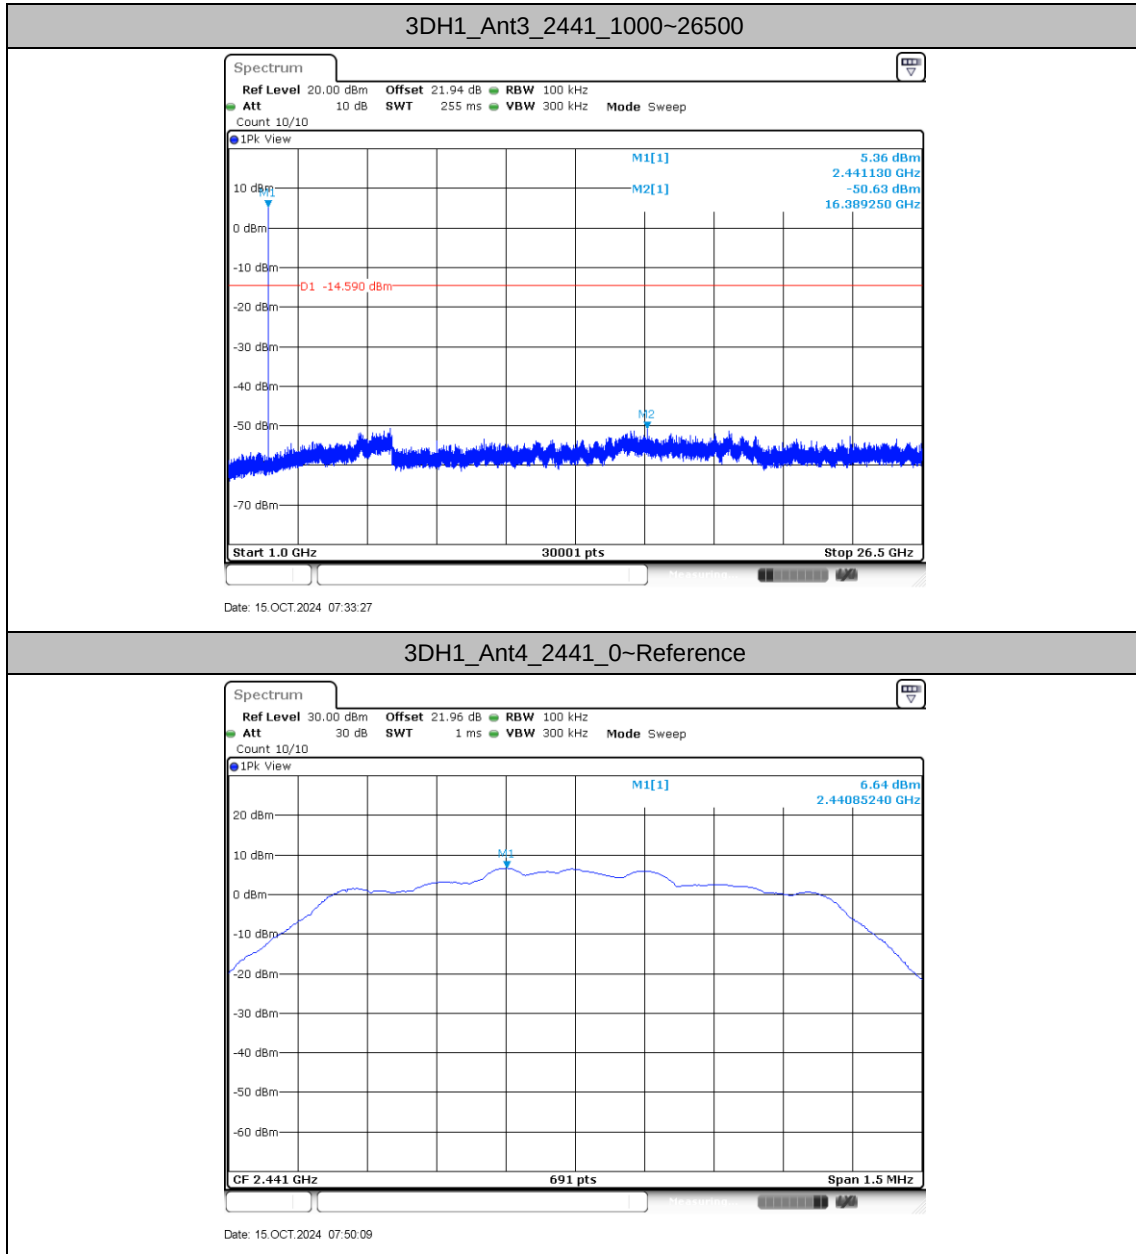

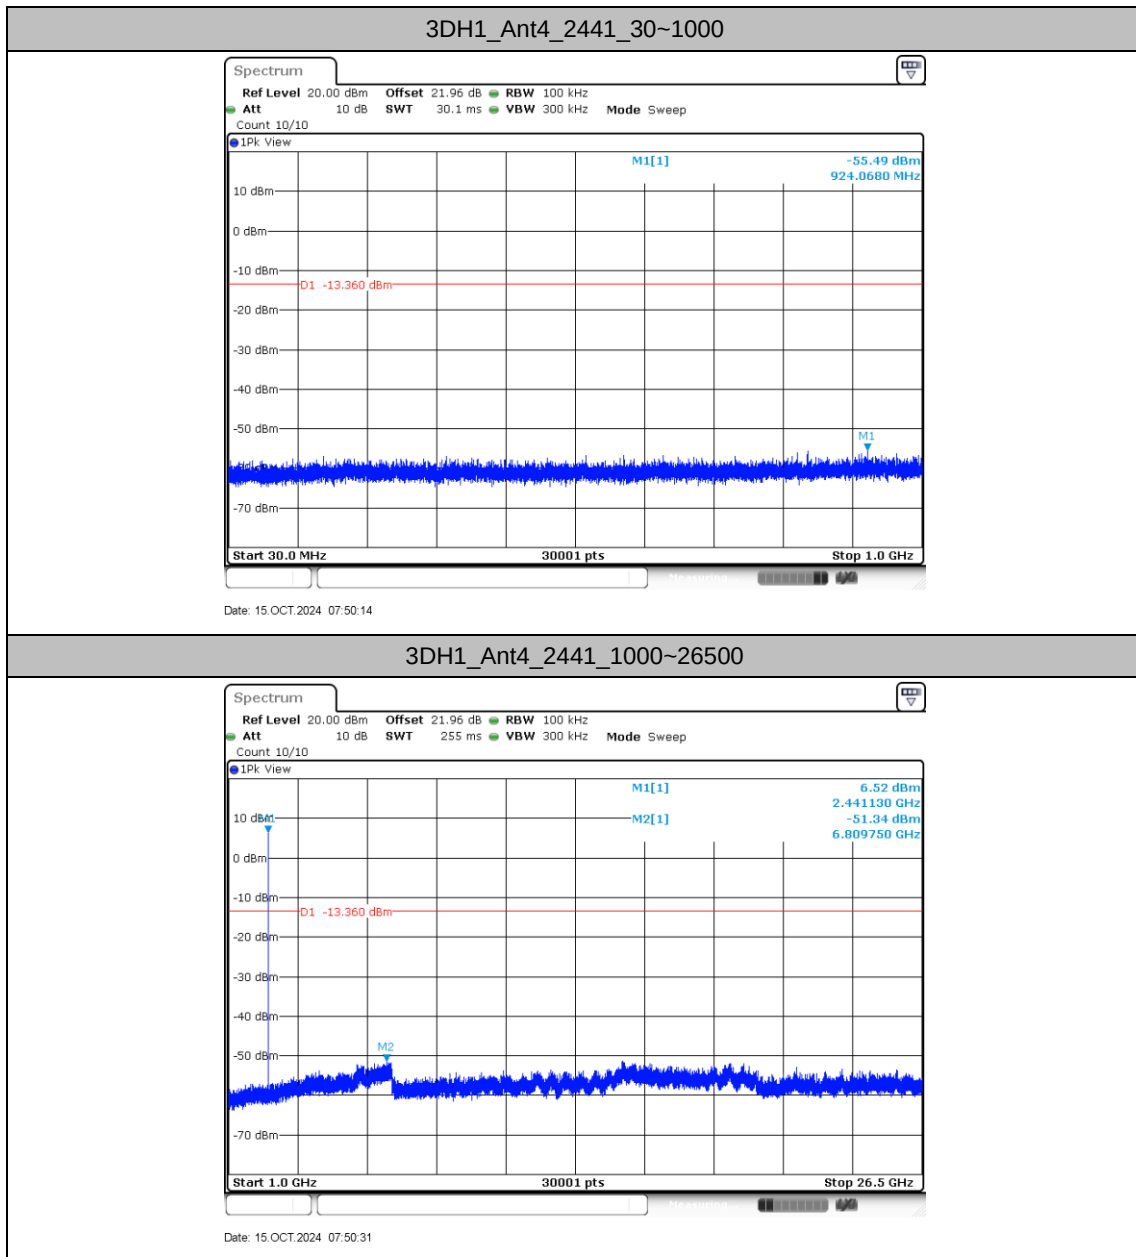

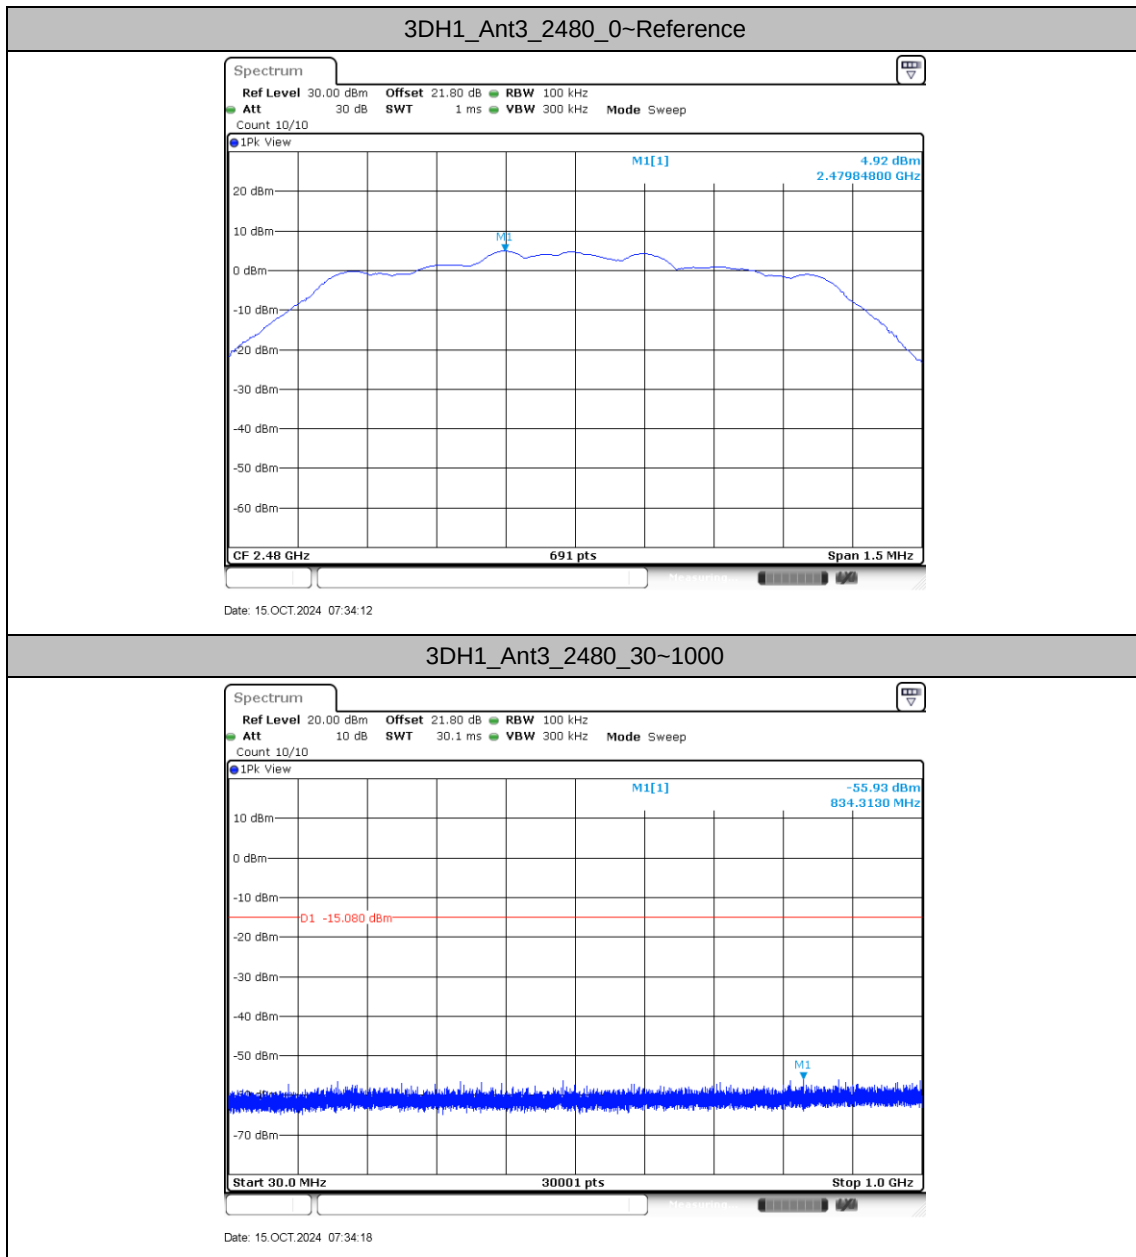


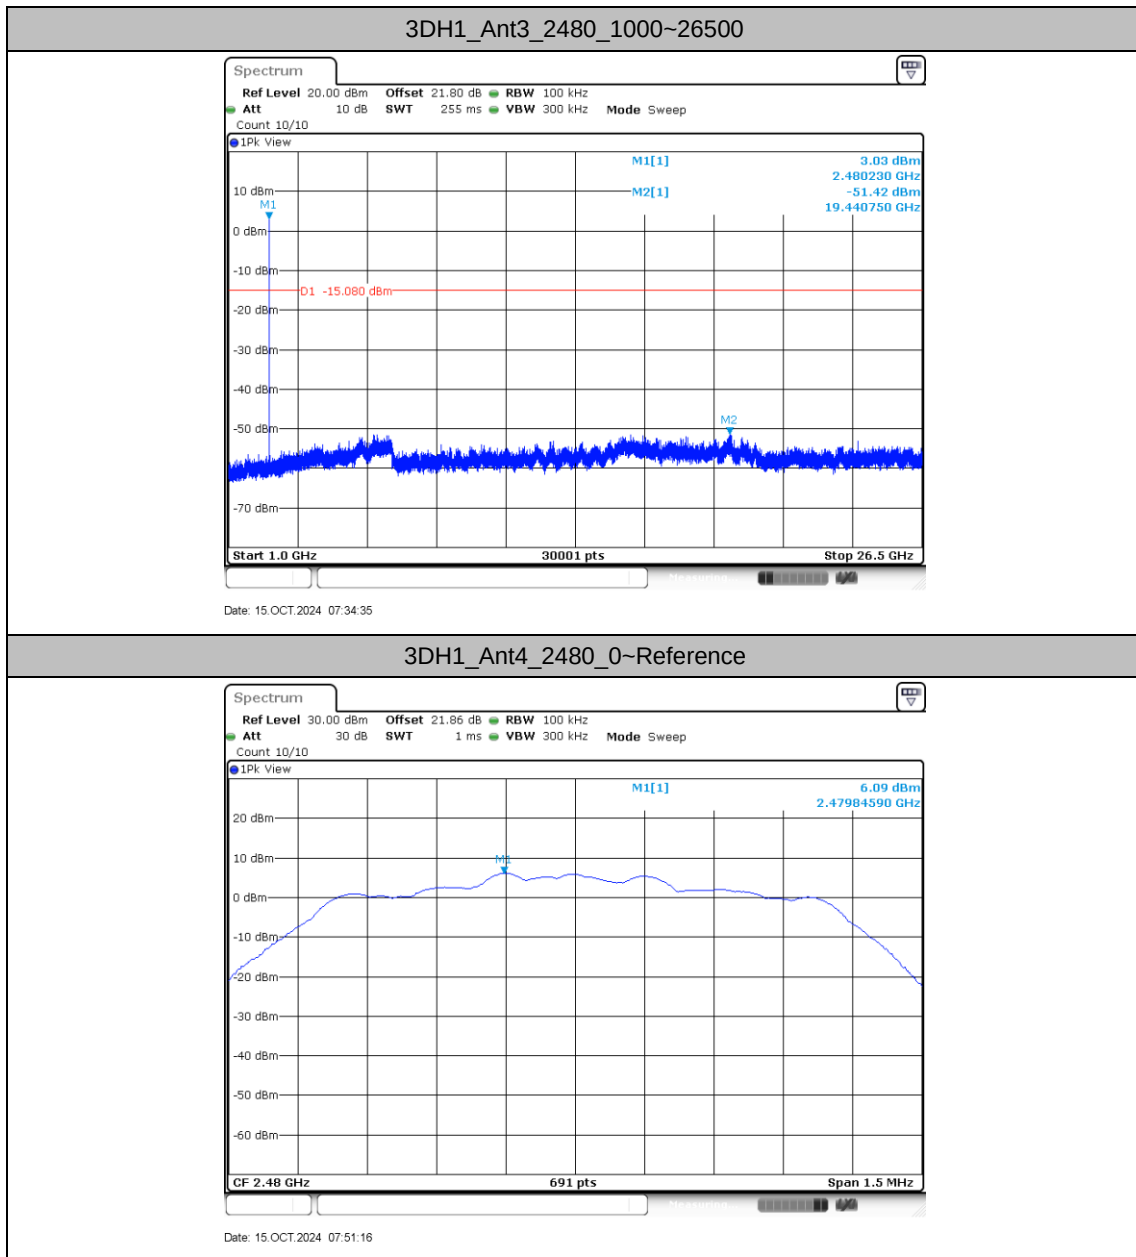

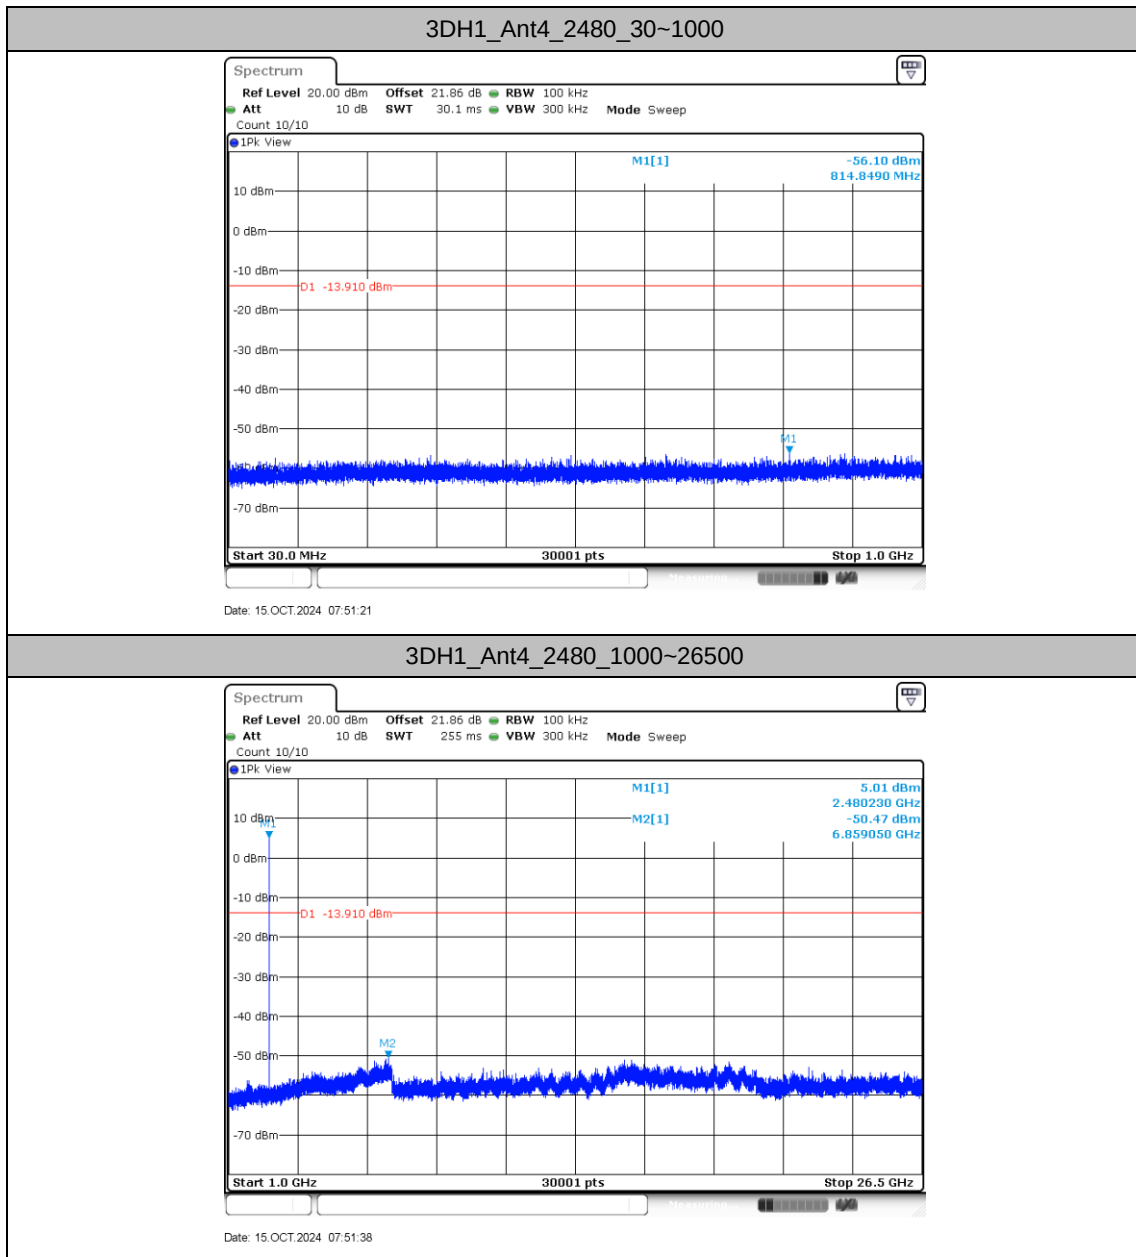

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

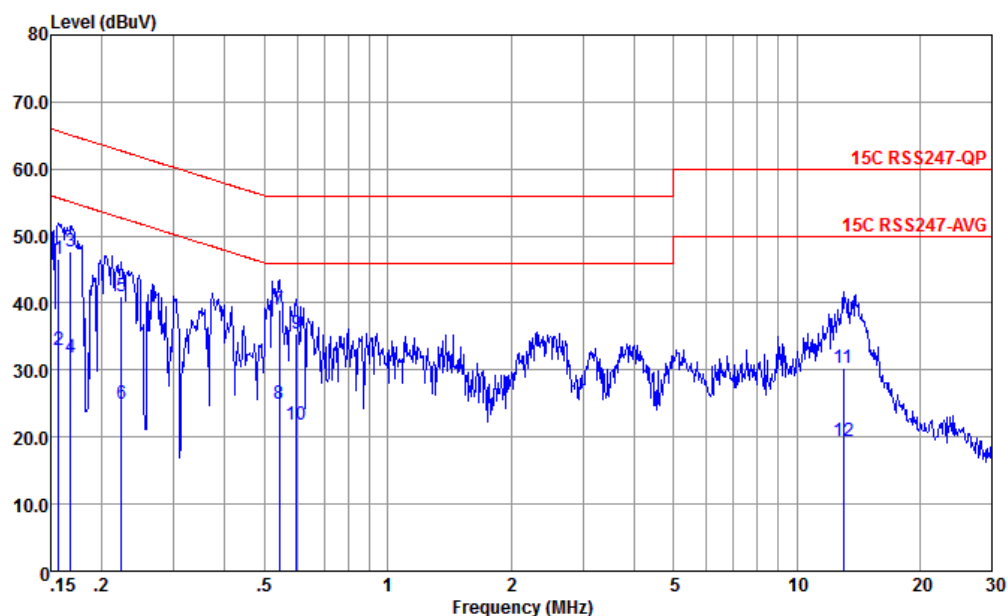


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.156	46.47	-19.18	65.65	35.91	0.11	10.45	QP
2	0.156	33.07	-22.58	55.65	22.51	0.11	10.45	Average
3	0.168	47.76	-17.32	65.08	37.21	0.10	10.45	QP
4	0.168	31.86	-23.22	55.08	21.31	0.10	10.45	Average
5	0.223	41.05	-21.65	62.70	30.51	0.08	10.46	QP
6	0.223	25.05	-27.65	52.70	14.51	0.08	10.46	Average
7 *	0.544	39.07	-16.93	56.00	28.80	-0.12	10.39	QP
8	0.544	24.87	-21.13	46.00	14.60	-0.12	10.39	Average
9	0.598	35.44	-20.56	56.00	25.20	-0.13	10.37	QP
10	0.598	21.84	-24.16	46.00	11.60	-0.13	10.37	Average
11	12.988	30.27	-29.73	60.00	20.20	-0.20	10.27	QP
12	12.988	19.37	-30.63	50.00	9.30	-0.20	10.27	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

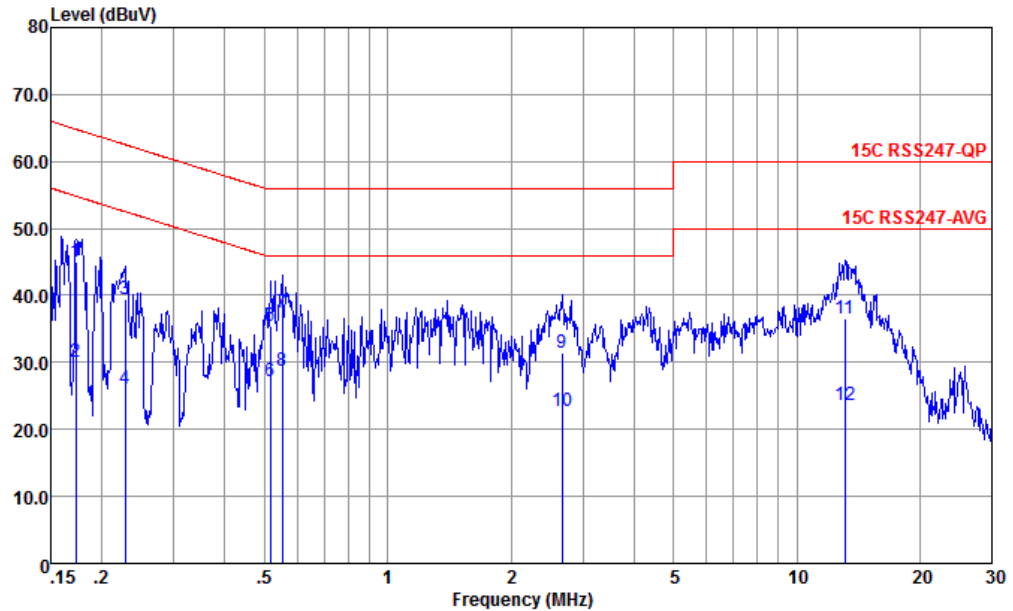

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.173	45.08	-19.73	64.81	34.51	0.12	10.45	QP
2	0.173	30.18	-24.63	54.81	19.61	0.12	10.45	Average
3	0.228	39.42	-23.10	62.52	28.90	0.05	10.47	QP
4	0.228	26.02	-26.50	52.52	15.50	0.05	10.47	Average
5	0.516	35.35	-20.65	56.00	25.10	-0.15	10.40	QP
6	0.516	27.15	-18.85	46.00	16.90	-0.15	10.40	Average
7	0.552	37.43	-18.57	56.00	27.19	-0.15	10.39	QP
8 *	0.552	28.83	-17.17	46.00	18.59	-0.15	10.39	Average
9	2.664	31.52	-24.48	56.00	21.49	-0.20	10.23	QP
10	2.664	22.62	-23.38	46.00	12.59	-0.20	10.23	Average
11	13.127	36.65	-23.35	60.00	26.59	-0.21	10.27	QP
12	13.127	23.65	-26.35	50.00	13.59	-0.21	10.27	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	48~49%
		Temperature :	24~25°C



Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	3	Bluetooth BR_GFSK	00	2402	3DH5	-	-
Mode 2	2400-2483.5	3	Bluetooth BR_GFSK	39	2441	3DH5	-	-
Mode 3	2400-2483.5	3	Bluetooth BR_GFSK	78	2480	3DH5	-	-
Mode 4	2400-2483.5	4	Bluetooth BR_GFSK	00	2402	3DH5	-	-
Mode 5	2400-2483.5	4	Bluetooth BR_GFSK	39	2441	3DH5	-	-
Mode 6	2400-2483.5	4	Bluetooth BR_GFSK	78	2480	3DH5	-	-
Mode 7	2400-2483.5	3	Bluetooth BR_GFSK-LF	78	2480	3DH5	-	LF
Mode 8	2400-2483.5	4	Bluetooth BR_GFSK-LF	78	2480	3DH5	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2386.34	46.95	74.00	-27.05	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	43.55	74.00	-30.45	V	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	43.91	74.00	-30.09	V	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2486.61	47.14	74.00	-26.86	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	45.61	74.00	-28.39	H	Peak	Pass	Harmonic
4	Bluetooth BR_GFSK	00	2367.33	43.77	74.00	-30.23	H	PEAK	Pass	Band Edge
4	Bluetooth BR_GFSK	00	4804.00	43.96	74.00	-30.04	H	Peak	Pass	Harmonic
5	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
5	Bluetooth BR_GFSK	39	7323.00	44.22	74.00	-29.78	V	Peak	Pass	Harmonic
6	Bluetooth BR_GFSK	78	2490.03	44.30	74.00	-29.70	V	PEAK	Pass	Band Edge
6	Bluetooth BR_GFSK	78	7440.00	45.46	74.00	-28.54	V	Peak	Pass	Harmonic
7	Bluetooth BR_GFSK-LF	78	54.25	29.88	40.00	-10.12	V	Peak	Pass	LF
8	Bluetooth BR_GFSK-LF	78	42.61	31.32	40.00	-8.68	V	Peak	Pass	LF

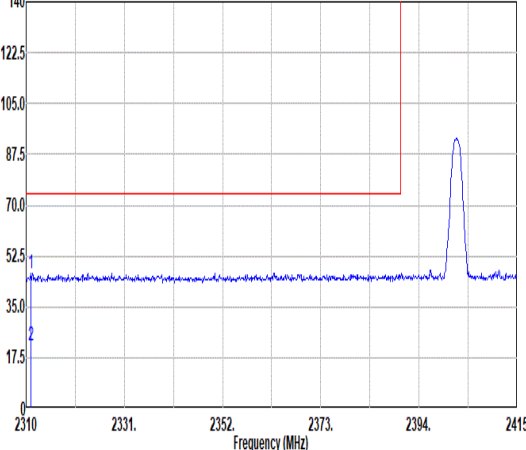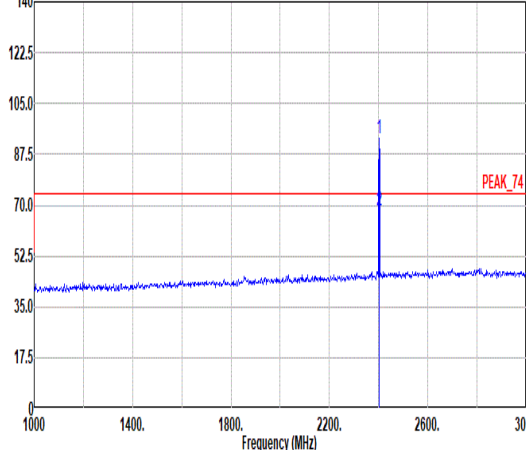

Mode	1																																																																																																																									
	Band Edge																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																									
ANT	3																																																																																																																									
Pol.	Horizontal					Fundamental																																																																																																																				
Peak	Level (dBuV/m) Date: 2024-12-30  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2311.05</td><td>46.36</td><td>74.00</td><td>-27.64</td><td>40.90</td><td>30.60</td><td>7.54</td><td>32.68</td><td>350</td><td>201 PEAK</td></tr><tr><td>2</td><td>2311.05</td><td>21.57</td><td>54.00</td><td>-32.43</td><td>16.11</td><td>30.60</td><td>7.54</td><td>32.68</td><td>350</td><td>201 AVERAGE</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2311.05	46.36	74.00	-27.64	40.90	30.60	7.54	32.68	350	201 PEAK	2	2311.05	21.57	54.00	-32.43	16.11	30.60	7.54	32.68	350	201 AVERAGE	Level (dBuV/m) Date: 2024-12-30  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.05</td><td>-----</td><td>87.30</td><td>30.60</td><td>7.79</td><td>32.64</td><td>350</td><td>201 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>68.26</td><td>-----</td><td>62.51</td><td>30.60</td><td>7.79</td><td>32.64</td><td>350</td><td>201 AVERAGE</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.05	-----	87.30	30.60	7.79	32.64	350	201 PEAK	2	2402.00	68.26	-----	62.51	30.60	7.79	32.64	350	201 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	2311.05	46.36	74.00	-27.64	40.90	30.60	7.54	32.68	350	201 PEAK																																																																																																																
2	2311.05	21.57	54.00	-32.43	16.11	30.60	7.54	32.68	350	201 AVERAGE																																																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	2402.00	93.05	-----	87.30	30.60	7.79	32.64	350	201 PEAK																																																																																																																	
2	2402.00	68.26	-----	62.51	30.60	7.79	32.64	350	201 AVERAGE																																																																																																																	

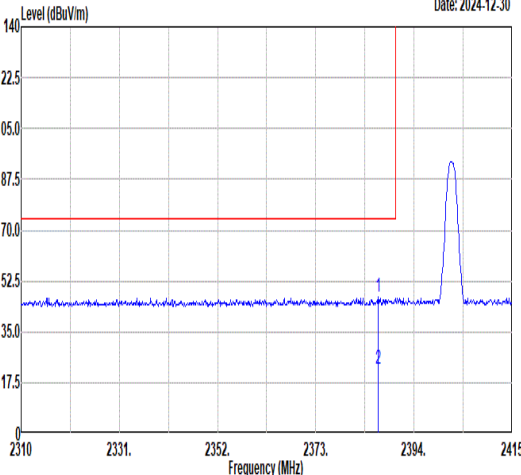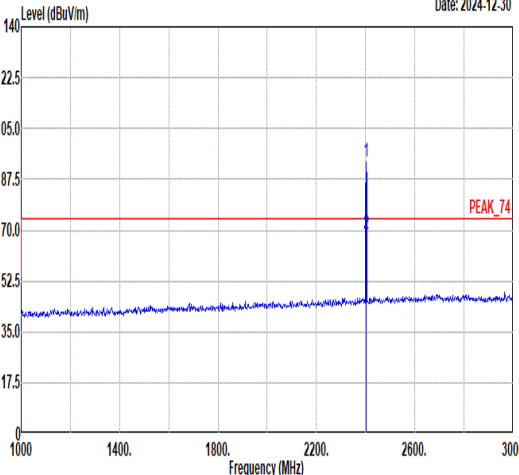

Mode	1																																																																																																																	
	Band Edge																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																	
ANT	3																																																																																																																	
Pol.	Vertical					Fundamental																																																																																																												
Peak																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.34</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>41.25</td><td>30.60</td><td>7.75</td><td>32.65</td><td>345</td><td>221 PEAK</td></tr><tr><td>2</td><td>2386.34</td><td>22.16</td><td>54.00</td><td>-31.84</td><td>16.46</td><td>30.60</td><td>7.75</td><td>32.65</td><td>345</td><td>221 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2386.34	46.95	74.00	-27.05	41.25	30.60	7.75	32.65	345	221 PEAK	2	2386.34	22.16	54.00	-31.84	16.46	30.60	7.75	32.65	345	221 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.71</td><td>-----</td><td>-----</td><td>87.96</td><td>30.60</td><td>7.79</td><td>32.64</td><td>345</td><td>221 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>68.92</td><td>-----</td><td>-----</td><td>63.17</td><td>30.60</td><td>7.79</td><td>32.64</td><td>345</td><td>221 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.71	-----	-----	87.96	30.60	7.79	32.64	345	221 PEAK	2	2402.00	68.92	-----	-----	63.17	30.60	7.79	32.64	345	221 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	2386.34	46.95	74.00	-27.05	41.25	30.60	7.75	32.65	345	221 PEAK																																																																																																								
2	2386.34	22.16	54.00	-31.84	16.46	30.60	7.75	32.65	345	221 AVERAGE																																																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	2402.00	93.71	-----	-----	87.96	30.60	7.79	32.64	345	221 PEAK																																																																																																								
2	2402.00	68.92	-----	-----	63.17	30.60	7.79	32.64	345	221 AVERAGE																																																																																																								



Mode	1																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																
ANT	3																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>43.24</td><td>74.00</td><td>-30.76</td><td>62.75</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>18.45</td><td>54.00</td><td>-35.55</td><td>37.96</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	43.24	74.00	-30.76	62.75	36.39	8.94	64.84	---	---	Peak	2	4804.00	18.45	54.00	-35.55	37.96	36.39	8.94	64.84	---	---	Average	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>43.55</td><td>74.00</td><td>-30.45</td><td>63.06</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>18.76</td><td>54.00</td><td>-35.24</td><td>38.27</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	43.55	74.00	-30.45	63.06	36.39	8.94	64.84	---	---	Peak	2	4804.00	18.76	54.00	-35.24	38.27	36.39	8.94	64.84	---	---	Average
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	4804.00	43.24	74.00	-30.76	62.75	36.39	8.94	64.84	---	---	Peak																																																																																																																						
2	4804.00	18.45	54.00	-35.55	37.96	36.39	8.94	64.84	---	---	Average																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4804.00	43.55	74.00	-30.45	63.06	36.39	8.94	64.84	---	---	Peak																																																																																																																						
2	4804.00	18.76	54.00	-35.24	38.27	36.39	8.94	64.84	---	---	Average																																																																																																																						



		2																																																																																																																																																																													
Mode		Harmonic																																																																																																																																																																													
		2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																													
ANT		3																																																																																																																																																																													
Pol.		Horizontal					Vertical																																																																																																																																																																								
Peak Avg		Level (dBuV/m) Date: 2025-01-08 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4882.00</td><td>42.85</td><td>74.00</td><td>-31.15</td><td>62.46</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>18.06</td><td>54.00</td><td>-35.94</td><td>37.67</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>43.45</td><td>74.00</td><td>-30.55</td><td>61.39</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>18.66</td><td>54.00</td><td>-35.34</td><td>36.60</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4882.00	42.85	74.00	-31.15	62.46	36.51	8.70	64.82	---	---	Peak	2	4882.00	18.06	54.00	-35.94	37.67	36.51	8.70	64.82	---	---	Average	3	7323.00	43.45	74.00	-30.55	61.39	36.88	10.18	65.00	---	---	Peak	4	7323.00	18.66	54.00	-35.34	36.60	36.88	10.18	65.00	---	---	Average	Level (dBuV/m) Date: 2025-01-08 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4882.00</td><td>43.19</td><td>74.00</td><td>-30.81</td><td>62.80</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>18.40</td><td>54.00</td><td>-35.60</td><td>38.01</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>43.91</td><td>74.00</td><td>-30.09</td><td>61.85</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>19.12</td><td>54.00</td><td>-34.88</td><td>37.06</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4882.00	43.19	74.00	-30.81	62.80	36.51	8.70	64.82	---	---	Peak	2	4882.00	18.40	54.00	-35.60	38.01	36.51	8.70	64.82	---	---	Average	3	7323.00	43.91	74.00	-30.09	61.85	36.88	10.18	65.00	---	---	Peak	4	7323.00	19.12	54.00	-34.88	37.06	36.88	10.18	65.00	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																						
1	4882.00	42.85	74.00	-31.15	62.46	36.51	8.70	64.82	---	---	Peak																																																																																																																																																																				
2	4882.00	18.06	54.00	-35.94	37.67	36.51	8.70	64.82	---	---	Average																																																																																																																																																																				
3	7323.00	43.45	74.00	-30.55	61.39	36.88	10.18	65.00	---	---	Peak																																																																																																																																																																				
4	7323.00	18.66	54.00	-35.34	36.60	36.88	10.18	65.00	---	---	Average																																																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																						
1	4882.00	43.19	74.00	-30.81	62.80	36.51	8.70	64.82	---	---	Peak																																																																																																																																																																				
2	4882.00	18.40	54.00	-35.60	38.01	36.51	8.70	64.82	---	---	Average																																																																																																																																																																				
3	7323.00	43.91	74.00	-30.09	61.85	36.88	10.18	65.00	---	---	Peak																																																																																																																																																																				
4	7323.00	19.12	54.00	-34.88	37.06	36.88	10.18	65.00	---	---	Average																																																																																																																																																																				





Mode	3																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																													
ANT	3																																																																																																													
Pol.	Vertical					Fundamental																																																																																																								
Peak	Level (dBuV/m) Date: 2024-12-30 Frequency (MHz)					Level (dBuV/m) Date: 2024-12-30 Frequency (MHz)																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.05</td><td>47.07</td><td>74.00</td><td>-26.93</td><td>41.18</td><td>30.60</td><td>7.89</td><td>32.60</td><td>364 192 PEAK</td></tr><tr><td>2</td><td>2498.05</td><td>22.28</td><td>54.00</td><td>-31.72</td><td>16.39</td><td>30.60</td><td>7.89</td><td>32.60</td><td>364 192 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.05	47.07	74.00	-26.93	41.18	30.60	7.89	32.60	364 192 PEAK	2	2498.05	22.28	54.00	-31.72	16.39	30.60	7.89	32.60	364 192 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>89.35</td><td>-----</td><td>-----</td><td>83.45</td><td>30.64</td><td>7.87</td><td>32.61</td><td>364 192 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>64.56</td><td>-----</td><td>-----</td><td>58.66</td><td>30.64</td><td>7.87</td><td>32.61</td><td>364 192 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	89.35	-----	-----	83.45	30.64	7.87	32.61	364 192 PEAK	2	2480.00	64.56	-----	-----	58.66	30.64	7.87	32.61	364 192 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2498.05	47.07	74.00	-26.93	41.18	30.60	7.89	32.60	364 192 PEAK																																																																																																					
2	2498.05	22.28	54.00	-31.72	16.39	30.60	7.89	32.60	364 192 AVERAGE																																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	89.35	-----	-----	83.45	30.64	7.87	32.61	364 192 PEAK																																																																																																					
2	2480.00	64.56	-----	-----	58.66	30.64	7.87	32.61	364 192 AVERAGE																																																																																																					



Mode	3																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																							
ANT	3																																																																																																																																							
Pol.	Horizontal					Vertical																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-01-09 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>42.13</td><td>74.00</td><td>-31.87</td><td>61.84</td><td>36.64</td><td>8.46</td><td>64.81</td><td>--- Peak</td></tr><tr><td>2 4960.00</td><td>17.34</td><td>54.00</td><td>-36.66</td><td>37.05</td><td>36.64</td><td>8.46</td><td>64.81</td><td>--- Average</td></tr><tr><td>3 7440.00</td><td>45.61</td><td>74.00</td><td>-28.39</td><td>63.65</td><td>36.76</td><td>10.17</td><td>64.97</td><td>--- Peak</td></tr><tr><td>4 7440.00</td><td>20.82</td><td>54.00</td><td>-33.18</td><td>38.86</td><td>36.76</td><td>10.17</td><td>64.97</td><td>--- Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 4960.00	42.13	74.00	-31.87	61.84	36.64	8.46	64.81	--- Peak	2 4960.00	17.34	54.00	-36.66	37.05	36.64	8.46	64.81	--- Average	3 7440.00	45.61	74.00	-28.39	63.65	36.76	10.17	64.97	--- Peak	4 7440.00	20.82	54.00	-33.18	38.86	36.76	10.17	64.97	--- Average	Level (dBuV/m) Date: 2025-01-09 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>43.11</td><td>74.00</td><td>-30.89</td><td>62.82</td><td>36.64</td><td>8.46</td><td>64.81</td><td>--- Peak</td></tr><tr><td>2 4960.00</td><td>18.32</td><td>54.00</td><td>-35.68</td><td>38.03</td><td>36.64</td><td>8.46</td><td>64.81</td><td>--- Average</td></tr><tr><td>3 7440.00</td><td>43.17</td><td>74.00</td><td>-30.83</td><td>61.21</td><td>36.76</td><td>10.17</td><td>64.97</td><td>--- Peak</td></tr><tr><td>4 7440.00</td><td>18.38</td><td>54.00</td><td>-35.62</td><td>36.42</td><td>36.76</td><td>10.17</td><td>64.97</td><td>--- Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 4960.00	43.11	74.00	-30.89	62.82	36.64	8.46	64.81	--- Peak	2 4960.00	18.32	54.00	-35.68	38.03	36.64	8.46	64.81	--- Average	3 7440.00	43.17	74.00	-30.83	61.21	36.76	10.17	64.97	--- Peak	4 7440.00	18.38	54.00	-35.62	36.42	36.76	10.17	64.97	--- Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																
1 4960.00	42.13	74.00	-31.87	61.84	36.64	8.46	64.81	--- Peak																																																																																																																																
2 4960.00	17.34	54.00	-36.66	37.05	36.64	8.46	64.81	--- Average																																																																																																																																
3 7440.00	45.61	74.00	-28.39	63.65	36.76	10.17	64.97	--- Peak																																																																																																																																
4 7440.00	20.82	54.00	-33.18	38.86	36.76	10.17	64.97	--- Average																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																
1 4960.00	43.11	74.00	-30.89	62.82	36.64	8.46	64.81	--- Peak																																																																																																																																
2 4960.00	18.32	54.00	-35.68	38.03	36.64	8.46	64.81	--- Average																																																																																																																																
3 7440.00	43.17	74.00	-30.83	61.21	36.76	10.17	64.97	--- Peak																																																																																																																																
4 7440.00	18.38	54.00	-35.62	36.42	36.76	10.17	64.97	--- Average																																																																																																																																

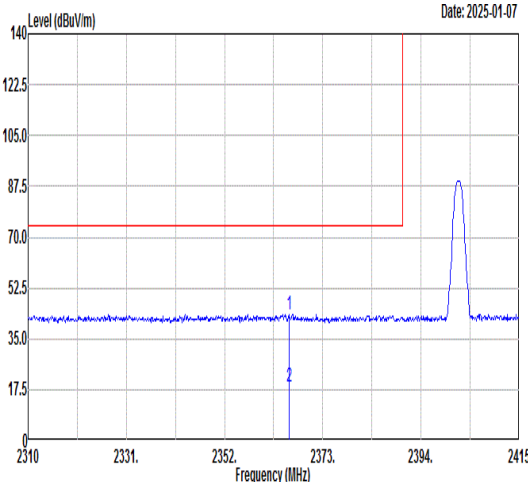
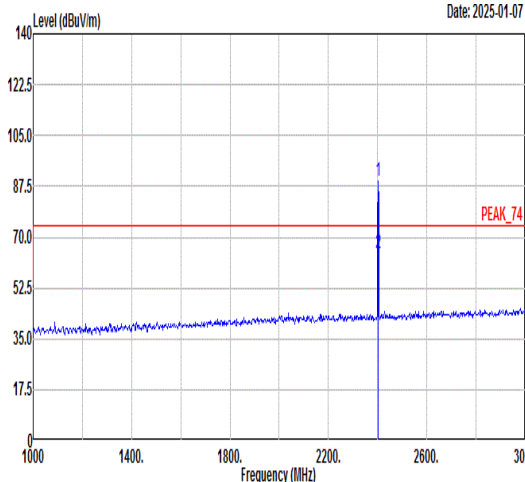


Mode	4																																																																																																									
	Band Edge																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																									
ANT	4																																																																																																									
Pol.	Vertical	Fundamental																																																																																																								
Peak	Date: 2025-01-07  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2365.76</td><td>43.54</td><td>74.00</td><td>-30.46</td><td>41.58</td><td>30.77</td><td>5.34</td><td>34.15</td><td>200</td><td>43 PEAK</td></tr><tr><td>2</td><td>2365.76</td><td>18.75</td><td>54.00</td><td>-35.25</td><td>16.79</td><td>30.77</td><td>5.34</td><td>34.15</td><td>200</td><td>43 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2365.76	43.54	74.00	-30.46	41.58	30.77	5.34	34.15	200	43 PEAK	2	2365.76	18.75	54.00	-35.25	16.79	30.77	5.34	34.15	200	43 AVERAGE	Date: 2025-01-07  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>89.47</td><td>-----</td><td>-----</td><td>87.46</td><td>30.78</td><td>5.37</td><td>34.14</td><td>200</td><td>43 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>64.68</td><td>-----</td><td>-----</td><td>62.67</td><td>30.78</td><td>5.37</td><td>34.14</td><td>200</td><td>43 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	89.47	-----	-----	87.46	30.78	5.37	34.14	200	43 PEAK	2	2402.00	64.68	-----	-----	62.67	30.78	5.37	34.14	200	43 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2365.76	43.54	74.00	-30.46	41.58	30.77	5.34	34.15	200	43 PEAK																																																																																																
2	2365.76	18.75	54.00	-35.25	16.79	30.77	5.34	34.15	200	43 AVERAGE																																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2402.00	89.47	-----	-----	87.46	30.78	5.37	34.14	200	43 PEAK																																																																																																
2	2402.00	64.68	-----	-----	62.67	30.78	5.37	34.14	200	43 AVERAGE																																																																																																



Mode	4																																																																						
	Harmonic																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																						
ANT	4																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz)						Level (dBuV/m) Date: 2025-01-07 Frequency (MHz)																																																																
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4804.00</td><td>43.96</td><td>74.00</td><td>-30.04</td><td>63.47</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>19.17</td><td>54.00</td><td>-34.83</td><td>38.68</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4804.00	43.96	74.00	-30.04	63.47	36.39	8.94	64.84	---	---	Peak	2	4804.00	19.17	54.00	-34.83	38.68	36.39	8.94	64.84	---	---	Average
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	4804.00	43.96	74.00	-30.04	63.47	36.39	8.94	64.84	---	---	Peak																																																												
2	4804.00	19.17	54.00	-34.83	38.68	36.39	8.94	64.84	---	---	Average																																																												
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4804.00</td><td>43.50</td><td>74.00</td><td>-30.50</td><td>63.01</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>18.71</td><td>54.00</td><td>-35.29</td><td>38.22</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4804.00	43.50	74.00	-30.50	63.01	36.39	8.94	64.84	---	---	Peak	2	4804.00	18.71	54.00	-35.29	38.22	36.39	8.94	64.84	---	---	Average	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	4804.00	43.50	74.00	-30.50	63.01	36.39	8.94	64.84	---	---	Peak																																																												
2	4804.00	18.71	54.00	-35.29	38.22	36.39	8.94	64.84	---	---	Average																																																												

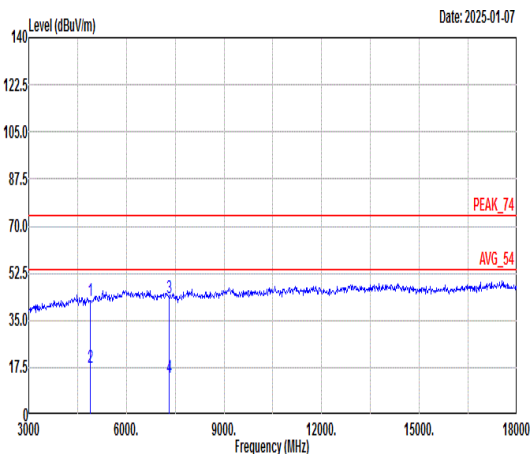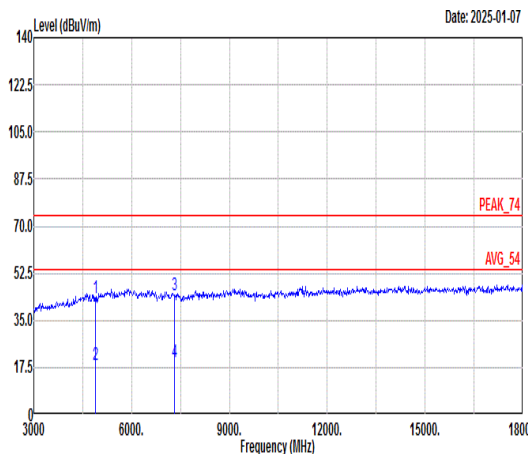

Mode	5																																																																																																																																																																		
	Harmonic																																																																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																		
ANT	4																																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																																												
Peak Avg	 Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.32</td><td>74.00</td><td>-31.68</td><td>61.93</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>17.53</td><td>54.00</td><td>-36.47</td><td>37.14</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>43.37</td><td>74.00</td><td>-30.63</td><td>61.31</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>13.58</td><td>54.00</td><td>-40.42</td><td>31.52</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.32	74.00	-31.68	61.93	36.51	8.70	64.82	---	---	Peak	2	4882.00	17.53	54.00	-36.47	37.14	36.51	8.70	64.82	---	---	Average	3	7323.00	43.37	74.00	-30.63	61.31	36.88	10.18	65.00	---	---	Peak	4	7323.00	13.58	54.00	-40.42	31.52	36.88	10.18	65.00	---	---	Average	 Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>43.48</td><td>74.00</td><td>-30.52</td><td>63.09</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>18.69</td><td>54.00</td><td>-35.31</td><td>38.30</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>44.22</td><td>74.00</td><td>-29.78</td><td>62.16</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>19.43</td><td>54.00</td><td>-34.57</td><td>37.37</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	43.48	74.00	-30.52	63.09	36.51	8.70	64.82	---	---	Peak	2	4882.00	18.69	54.00	-35.31	38.30	36.51	8.70	64.82	---	---	Average	3	7323.00	44.22	74.00	-29.78	62.16	36.88	10.18	65.00	---	---	Peak	4	7323.00	19.43	54.00	-34.57	37.37	36.88	10.18	65.00	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	4882.00	42.32	74.00	-31.68	61.93	36.51	8.70	64.82	---	---	Peak																																																																																																																																																								
2	4882.00	17.53	54.00	-36.47	37.14	36.51	8.70	64.82	---	---	Average																																																																																																																																																								
3	7323.00	43.37	74.00	-30.63	61.31	36.88	10.18	65.00	---	---	Peak																																																																																																																																																								
4	7323.00	13.58	54.00	-40.42	31.52	36.88	10.18	65.00	---	---	Average																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	4882.00	43.48	74.00	-30.52	63.09	36.51	8.70	64.82	---	---	Peak																																																																																																																																																								
2	4882.00	18.69	54.00	-35.31	38.30	36.51	8.70	64.82	---	---	Average																																																																																																																																																								
3	7323.00	44.22	74.00	-29.78	62.16	36.88	10.18	65.00	---	---	Peak																																																																																																																																																								
4	7323.00	19.43	54.00	-34.57	37.37	36.88	10.18	65.00	---	---	Average																																																																																																																																																								



Mode	6																																																																																																																																																					
	Harmonic																																																																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																					
ANT	4																																																																																																																																																					
Pol.	Horizontal								Vertical																																																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz)								Level (dBuV/m) Date: 2025-01-09 Frequency (MHz)																																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4960.00</td><td>44.29</td><td>74.00</td><td>-29.71</td><td>64.00</td><td>36.64</td><td>8.46</td><td>64.81</td><td>--- --- Peak</td></tr><tr><td>2</td><td>4960.00</td><td>19.50</td><td>54.00</td><td>-34.50</td><td>39.21</td><td>36.64</td><td>8.46</td><td>64.81</td><td>--- --- Average</td></tr><tr><td>3</td><td>7440.00</td><td>45.08</td><td>74.00</td><td>-28.92</td><td>63.12</td><td>36.76</td><td>10.17</td><td>64.97</td><td>--- --- Peak</td></tr><tr><td>4</td><td>7440.00</td><td>20.29</td><td>54.00</td><td>-33.71</td><td>38.33</td><td>36.76</td><td>10.17</td><td>64.97</td><td>--- --- Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4960.00	44.29	74.00	-29.71	64.00	36.64	8.46	64.81	--- --- Peak	2	4960.00	19.50	54.00	-34.50	39.21	36.64	8.46	64.81	--- --- Average	3	7440.00	45.08	74.00	-28.92	63.12	36.76	10.17	64.97	--- --- Peak	4	7440.00	20.29	54.00	-33.71	38.33	36.76	10.17	64.97	--- --- Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4960.00</td><td>42.24</td><td>74.00</td><td>-31.76</td><td>61.95</td><td>36.64</td><td>8.46</td><td>64.81</td><td>--- --- Peak</td></tr><tr><td>2</td><td>4960.00</td><td>17.45</td><td>54.00</td><td>-36.55</td><td>37.16</td><td>36.64</td><td>8.46</td><td>64.81</td><td>--- --- Average</td></tr><tr><td>3</td><td>7440.00</td><td>45.46</td><td>74.00</td><td>-28.54</td><td>63.50</td><td>36.76</td><td>10.17</td><td>64.97</td><td>--- --- Peak</td></tr><tr><td>4</td><td>7440.00</td><td>20.67</td><td>54.00</td><td>-33.33</td><td>38.71</td><td>36.76</td><td>10.17</td><td>64.97</td><td>--- --- Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4960.00	42.24	74.00	-31.76	61.95	36.64	8.46	64.81	--- --- Peak	2	4960.00	17.45	54.00	-36.55	37.16	36.64	8.46	64.81	--- --- Average	3	7440.00	45.46	74.00	-28.54	63.50	36.76	10.17	64.97	--- --- Peak	4	7440.00	20.67	54.00	-33.33	38.71	36.76	10.17	64.97	--- --- Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																													
1	4960.00	44.29	74.00	-29.71	64.00	36.64	8.46	64.81	--- --- Peak																																																																																																																																													
2	4960.00	19.50	54.00	-34.50	39.21	36.64	8.46	64.81	--- --- Average																																																																																																																																													
3	7440.00	45.08	74.00	-28.92	63.12	36.76	10.17	64.97	--- --- Peak																																																																																																																																													
4	7440.00	20.29	54.00	-33.71	38.33	36.76	10.17	64.97	--- --- Average																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																														
1	4960.00	42.24	74.00	-31.76	61.95	36.64	8.46	64.81	--- --- Peak																																																																																																																																													
2	4960.00	17.45	54.00	-36.55	37.16	36.64	8.46	64.81	--- --- Average																																																																																																																																													
3	7440.00	45.46	74.00	-28.54	63.50	36.76	10.17	64.97	--- --- Peak																																																																																																																																													
4	7440.00	20.67	54.00	-33.33	38.71	36.76	10.17	64.97	--- --- Average																																																																																																																																													



Mode	7																																																																																																																																																																																																																			
	LF																																																																																																																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK-LF_CH78_2480MHz																																																																																																																																																																																																																			
ANT	3																																																																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																																																																													
QPI/ Peak	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>24.25</td><td>40.00</td><td>-15.75</td><td>29.93</td><td>25.29</td><td>0.53</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>103.72</td><td>32.72</td><td>43.50</td><td>-10.78</td><td>46.74</td><td>16.63</td><td>1.04</td><td>31.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>229.82</td><td>27.92</td><td>46.00</td><td>-18.08</td><td>41.62</td><td>16.24</td><td>1.56</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>331.67</td><td>27.59</td><td>46.00</td><td>-18.41</td><td>37.13</td><td>20.09</td><td>1.91</td><td>31.54</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>560.59</td><td>28.44</td><td>46.00</td><td>-17.56</td><td>30.22</td><td>27.00</td><td>2.48</td><td>31.26</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>754.59</td><td>31.38</td><td>46.00</td><td>-14.62</td><td>30.70</td><td>28.83</td><td>2.86</td><td>31.01</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table> Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>25.39</td><td>40.00</td><td>-14.61</td><td>31.07</td><td>25.29</td><td>0.53</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>54.25</td><td>29.88</td><td>40.00</td><td>-10.12</td><td>47.98</td><td>12.87</td><td>0.73</td><td>31.70</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>103.72</td><td>33.05</td><td>43.50</td><td>-10.45</td><td>47.07</td><td>16.63</td><td>1.04</td><td>31.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>160.95</td><td>26.95</td><td>43.50</td><td>-16.55</td><td>40.82</td><td>16.42</td><td>1.29</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>197.81</td><td>27.92</td><td>43.50</td><td>-15.58</td><td>43.02</td><td>14.98</td><td>1.42</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>566.41</td><td>31.24</td><td>46.00</td><td>-14.76</td><td>33.28</td><td>26.70</td><td>2.49</td><td>31.23</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	24.25	40.00	-15.75	29.93	25.29	0.53	31.50	---	---	Peak	2	103.72	32.72	43.50	-10.78	46.74	16.63	1.04	31.69	---	---	Peak	3	229.82	27.92	46.00	-18.08	41.62	16.24	1.56	31.50	---	---	Peak	4	331.67	27.59	46.00	-18.41	37.13	20.09	1.91	31.54	---	---	Peak	5	560.59	28.44	46.00	-17.56	30.22	27.00	2.48	31.26	---	---	Peak	6	754.59	31.38	46.00	-14.62	30.70	28.83	2.86	31.01	---	---	Peak		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	25.39	40.00	-14.61	31.07	25.29	0.53	31.50	---	---	Peak	2	54.25	29.88	40.00	-10.12	47.98	12.87	0.73	31.70	---	---	Peak	3	103.72	33.05	43.50	-10.45	47.07	16.63	1.04	31.69	---	---	Peak	4	160.95	26.95	43.50	-16.55	40.82	16.42	1.29	31.58	---	---	Peak	5	197.81	27.92	43.50	-15.58	43.02	14.98	1.42	31.50	---	---	Peak	6	566.41	31.24	46.00	-14.76	33.28	26.70	2.49	31.23	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																											
1	30.00	24.25	40.00	-15.75	29.93	25.29	0.53	31.50	---	---	Peak																																																																																																																																																																																																									
2	103.72	32.72	43.50	-10.78	46.74	16.63	1.04	31.69	---	---	Peak																																																																																																																																																																																																									
3	229.82	27.92	46.00	-18.08	41.62	16.24	1.56	31.50	---	---	Peak																																																																																																																																																																																																									
4	331.67	27.59	46.00	-18.41	37.13	20.09	1.91	31.54	---	---	Peak																																																																																																																																																																																																									
5	560.59	28.44	46.00	-17.56	30.22	27.00	2.48	31.26	---	---	Peak																																																																																																																																																																																																									
6	754.59	31.38	46.00	-14.62	30.70	28.83	2.86	31.01	---	---	Peak																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																											
1	30.00	25.39	40.00	-14.61	31.07	25.29	0.53	31.50	---	---	Peak																																																																																																																																																																																																									
2	54.25	29.88	40.00	-10.12	47.98	12.87	0.73	31.70	---	---	Peak																																																																																																																																																																																																									
3	103.72	33.05	43.50	-10.45	47.07	16.63	1.04	31.69	---	---	Peak																																																																																																																																																																																																									
4	160.95	26.95	43.50	-16.55	40.82	16.42	1.29	31.58	---	---	Peak																																																																																																																																																																																																									
5	197.81	27.92	43.50	-15.58	43.02	14.98	1.42	31.50	---	---	Peak																																																																																																																																																																																																									
6	566.41	31.24	46.00	-14.76	33.28	26.70	2.49	31.23	---	---	Peak																																																																																																																																																																																																									




Mode	8																																																																																																																																																																																													
	LF																																																																																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK-LF_CH78_2480MHz																																																																																																																																																																																													
ANT	4																																																																																																																																																																																													
Pol.	Horizontal								Vertical																																																																																																																																																																																					
QPI Peak	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>30.00</td><td>24.92</td><td>40.00</td><td>-15.08</td><td>30.60</td><td>25.29</td><td>0.53</td><td>31.50</td><td>--- Peak</td></tr><tr><td>2</td><td>103.72</td><td>31.86</td><td>43.50</td><td>-11.64</td><td>45.88</td><td>16.63</td><td>1.04</td><td>31.69</td><td>--- Peak</td></tr><tr><td>3</td><td>194.90</td><td>25.00</td><td>43.50</td><td>-18.50</td><td>40.17</td><td>14.93</td><td>1.41</td><td>31.51</td><td>--- Peak</td></tr><tr><td>4</td><td>329.73</td><td>27.35</td><td>46.00</td><td>-18.65</td><td>36.96</td><td>20.02</td><td>1.91</td><td>31.54</td><td>--- Peak</td></tr><tr><td>5</td><td>558.65</td><td>28.13</td><td>46.00</td><td>-17.87</td><td>29.91</td><td>27.01</td><td>2.48</td><td>31.27</td><td>--- Peak</td></tr><tr><td>6</td><td>762.35</td><td>31.70</td><td>46.00</td><td>-14.30</td><td>30.96</td><td>28.89</td><td>2.87</td><td>31.02</td><td>--- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	30.00	24.92	40.00	-15.08	30.60	25.29	0.53	31.50	--- Peak	2	103.72	31.86	43.50	-11.64	45.88	16.63	1.04	31.69	--- Peak	3	194.90	25.00	43.50	-18.50	40.17	14.93	1.41	31.51	--- Peak	4	329.73	27.35	46.00	-18.65	36.96	20.02	1.91	31.54	--- Peak	5	558.65	28.13	46.00	-17.87	29.91	27.01	2.48	31.27	--- Peak	6	762.35	31.70	46.00	-14.30	30.96	28.89	2.87	31.02	--- Peak	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>30.00</td><td>25.46</td><td>40.00</td><td>-14.54</td><td>31.14</td><td>25.29</td><td>0.53</td><td>31.50</td><td>--- Peak</td></tr><tr><td>2</td><td>42.61</td><td>31.32</td><td>40.00</td><td>-8.68</td><td>43.92</td><td>18.52</td><td>0.63</td><td>31.75</td><td>--- Peak</td></tr><tr><td>3</td><td>59.10</td><td>29.74</td><td>40.00</td><td>-10.26</td><td>48.67</td><td>12.00</td><td>0.77</td><td>31.70</td><td>--- Peak</td></tr><tr><td>4</td><td>102.75</td><td>33.39</td><td>43.50</td><td>-10.11</td><td>47.54</td><td>16.51</td><td>1.03</td><td>31.69</td><td>--- Peak</td></tr><tr><td>5</td><td>195.87</td><td>27.11</td><td>43.50</td><td>-16.39</td><td>42.26</td><td>14.94</td><td>1.42</td><td>31.51</td><td>--- Peak</td></tr><tr><td>6</td><td>569.32</td><td>31.61</td><td>46.00</td><td>-14.39</td><td>33.81</td><td>26.52</td><td>2.50</td><td>31.22</td><td>--- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	30.00	25.46	40.00	-14.54	31.14	25.29	0.53	31.50	--- Peak	2	42.61	31.32	40.00	-8.68	43.92	18.52	0.63	31.75	--- Peak	3	59.10	29.74	40.00	-10.26	48.67	12.00	0.77	31.70	--- Peak	4	102.75	33.39	43.50	-10.11	47.54	16.51	1.03	31.69	--- Peak	5	195.87	27.11	43.50	-16.39	42.26	14.94	1.42	31.51	--- Peak	6	569.32	31.61	46.00	-14.39	33.81	26.52	2.50	31.22	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																																					
	1	30.00	24.92	40.00	-15.08	30.60	25.29	0.53	31.50	--- Peak																																																																																																																																																																																				
	2	103.72	31.86	43.50	-11.64	45.88	16.63	1.04	31.69	--- Peak																																																																																																																																																																																				
	3	194.90	25.00	43.50	-18.50	40.17	14.93	1.41	31.51	--- Peak																																																																																																																																																																																				
	4	329.73	27.35	46.00	-18.65	36.96	20.02	1.91	31.54	--- Peak																																																																																																																																																																																				
	5	558.65	28.13	46.00	-17.87	29.91	27.01	2.48	31.27	--- Peak																																																																																																																																																																																				
	6	762.35	31.70	46.00	-14.30	30.96	28.89	2.87	31.02	--- Peak																																																																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																																						
1	30.00	25.46	40.00	-14.54	31.14	25.29	0.53	31.50	--- Peak																																																																																																																																																																																					
2	42.61	31.32	40.00	-8.68	43.92	18.52	0.63	31.75	--- Peak																																																																																																																																																																																					
3	59.10	29.74	40.00	-10.26	48.67	12.00	0.77	31.70	--- Peak																																																																																																																																																																																					
4	102.75	33.39	43.50	-10.11	47.54	16.51	1.03	31.69	--- Peak																																																																																																																																																																																					
5	195.87	27.11	43.50	-16.39	42.26	14.94	1.42	31.51	--- Peak																																																																																																																																																																																					
6	569.32	31.61	46.00	-14.39	33.81	26.52	2.50	31.22	--- Peak																																																																																																																																																																																					


Appendix D. Duty Cycle Plots

Ant 3 :

3DH5 on time (One Pulse) Plot on Channel 39

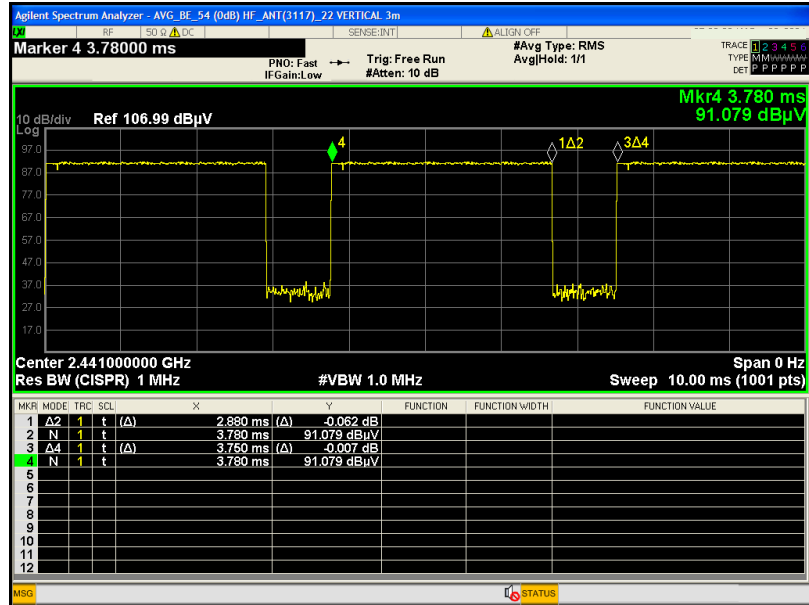

3DH5 on time (Count Pulses) Plot on Channel 39

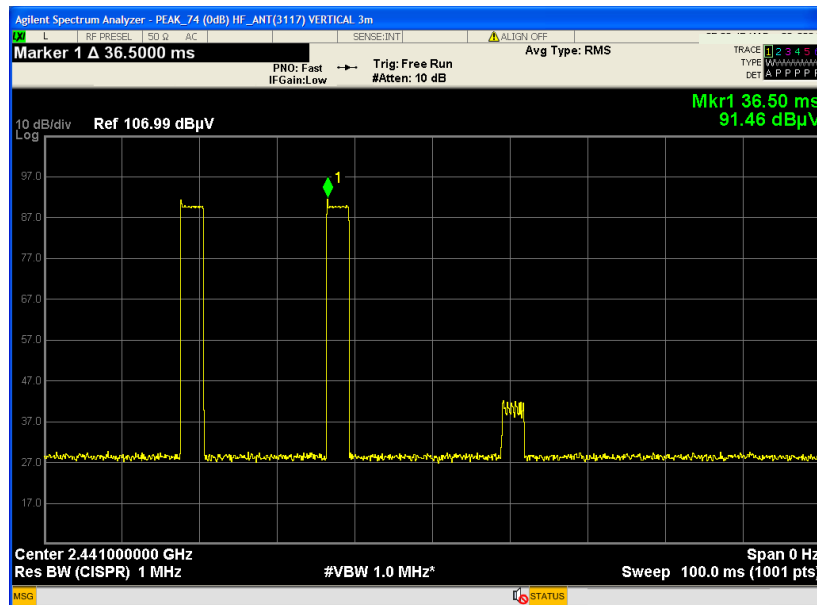


Note:


1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Ant 4 :

3DH5 on time (One Pulse) Plot on Channel 39

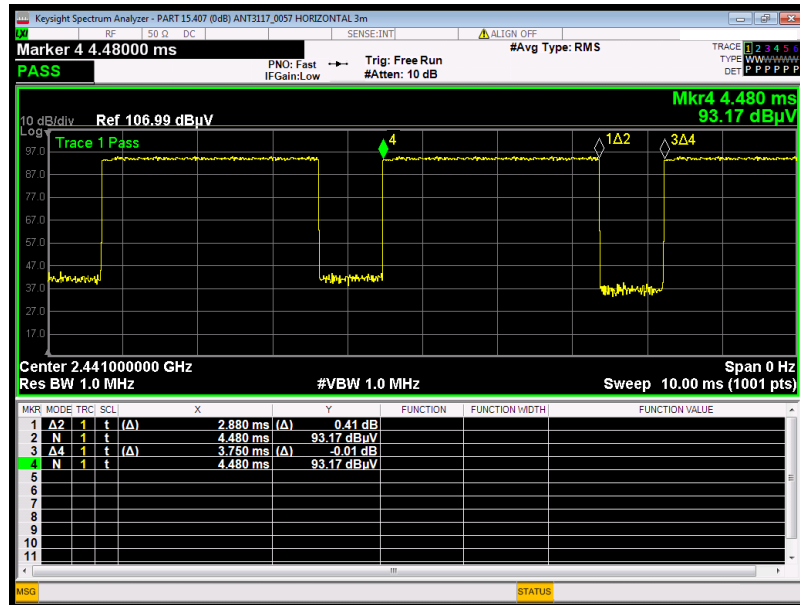

3DH5 on time (Count Pulses) Plot on Channel 39

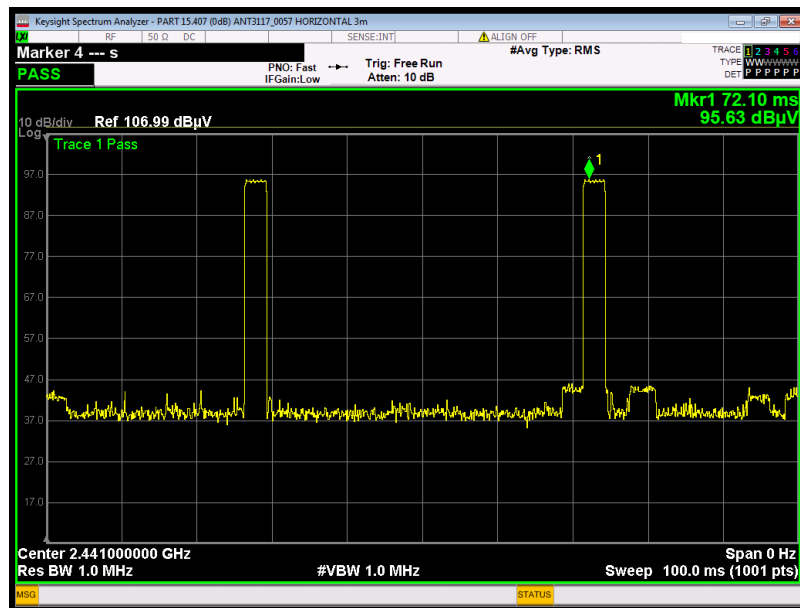

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.