



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: JEM ACCESSORIES INC.

Address: 32 Brunswick Avenue, Edison, New Jersey, United States, 08817

FCC ID: 2AHAS-MLW71003

**Product Name: WiFi 2M RGBIC LED STRIP LIGHT
WiFi 5M RGBIC LED STRIP LIGHT
WiFi 15M RGBIC LED STRIP LIGHT**

**Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230848226-00B

Date Of Issue: 2023/10/27

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	8
1.3 MEASUREMENT UNCERTAINTY	9
2. SUMMARY OF TEST RESULTS	10
3. REQUIREMENTS AND TEST PROCEDURES	11
3.1 AC LINE CONDUCTED EMISSIONS.....	11
3.1.1 Applicable Standard.....	11
3.1.2 EUT Setup.....	12
3.1.3 EMI Test Receiver Setup	12
3.1.4 Test Procedure	13
3.1.5 Corrected Amplitude & Margin Calculation.....	13
3.2 RADIATION SPURIOUS EMISSIONS	14
3.2.1 Applicable Standard.....	14
3.2.2 EUT Setup.....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	15
3.2.4 Test Procedure	15
3.2.5 Corrected Amplitude & Margin Calculation.....	15
3.3 MINIMUM 6 DB BANDWIDTH.....	16
3.3.1 Applicable Standard.....	16
3.3.2 EUT Setup.....	16
3.3.3 Test Procedure	16
3.4 MAXIMUM CONDUCTED OUTPUT POWER.....	17
3.4.1 Applicable Standard.....	17
3.4.2 EUT Setup.....	17
3.4.3 Test Procedure	17
3.5 MAXIMUM POWER SPECTRAL DENSITY	18
3.5.1 Applicable Standard.....	18
3.5.2 EUT Setup.....	18
3.5.3 Test Procedure	18
3.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	19
3.6.1 Applicable Standard.....	19
3.6.2 EUT Setup.....	19
3.6.3 Test Procedure	19

3.7 DUTY CYCLE	20
3.7.1 EUT Setup.....	20
3.7.2 Test Procedure	20
3.8 ANTENNA REQUIREMENT.....	21
3.8.1 Applicable Standard.....	21
3.8.2 Judgment.....	21
4. Test DATA AND RESULTS	22
4.1 AC LINE CONDUCTED EMISSIONS.....	22
4.2 RADIATION SPURIOUS EMISSIONS	29
4.3 6 dB EMISSION BANDWIDTH	56
4.4 MAXIMUM CONDUCTED OUTPUT POWER.....	59
4.5 MAXIMUM POWER SPECTRAL DENSITY	62
4.6 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	65
4.7 DUTY CYCLE	68
5. RF EXPOSURE EVALUATION	70
5.1.1 APPLICABLE STANDARD.....	70
5.1.2 MEASUREMENT RESULT.....	70
6. EUT PHOTOGRAPHS	71
7. TEST SETUP PHOTOGRAPHS	72

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230848226-00B	Original Report	2023/10/27

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	WiFi 2M RGBIC LED STRIP LIGHT WiFi 5M RGBIC LED STRIP LIGHT WiFi 15M RGBIC LED STRIP LIGHT
EUT Model:	MLW7-1003-ICM, MLB7-1003-ICM
Multiple Models:	MLW7-1001-ICM, MLB7-1001-ICM MLW7-1002-ICM, MLB7-1002-ICM
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	7.33 dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC12V from adapter for model MLW7-1003-ICM, MLB7-1003-ICM DC5V from USB Port for model: MLW7-1002-ICM, MLB7-1002-ICM MLW7-1001-ICM, MLB7-1001-ICM
Serial Number:	2A3A-4 for RF 2A3Z-1(model MLW7-1001-ICM), 2A3Z-2(model MLW7-1002-ICM), 2A3Z-3(MLW7-1003-ICM) for CE&RE
EUT Received Date:	2023/9/7
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer. The differences between models do not affect the Radiated Emission test above 1GHz and the RF Conducted Test, which were performed with model MLW7-1003-ICM.	

Operation Frequency Detail: For BLE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480
Per section 15.31(m), the below frequencies were performed the test as below:			
Test Channel		Frequency (MHz)	
Lowest		2402	
Middle		2440	
Highest		2480	

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
PCB	50	2.4~2.5GHz	2.5 dBi
The Method of §15.203 Compliance: ☒ Antenna must be permanently attached to the unit. ☐ Antenna must use a unique type of connector to attach to the EUT. ☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters	Note:
Adapter	HAIHONG ELECTRONICS CO.,LTD	HH0024Z-120200-AU	Input:100-240V,50/60Hz 0.8A Max Output:12.0V, 2.0A	Just for model MLW7-1003-ICM, MLB7-1003-ICM

1.2 Description of Test Configuration**1.2.1 EUT Operation Condition:**

For BLE:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:	No		
EUT Exercise Software:	EspRFTestTool_v3.6_Manual.exe		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
1Mbps	12	12	12
2Mbps	12	12	12

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Socket	Unknown	Unknown
Infinix	Adapter	U180XSA	Unknown


Note: support equipment adapter is just for model MLW7-1002-ICM, MLB7-1002-ICM; MLW7-1001-ICM, MLB7-1001-ICM

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Detachable DC cable	No	No	0.8	Adapter	EUT
Cable	No	No	1.2	Socket	LISN/AC Mains

1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

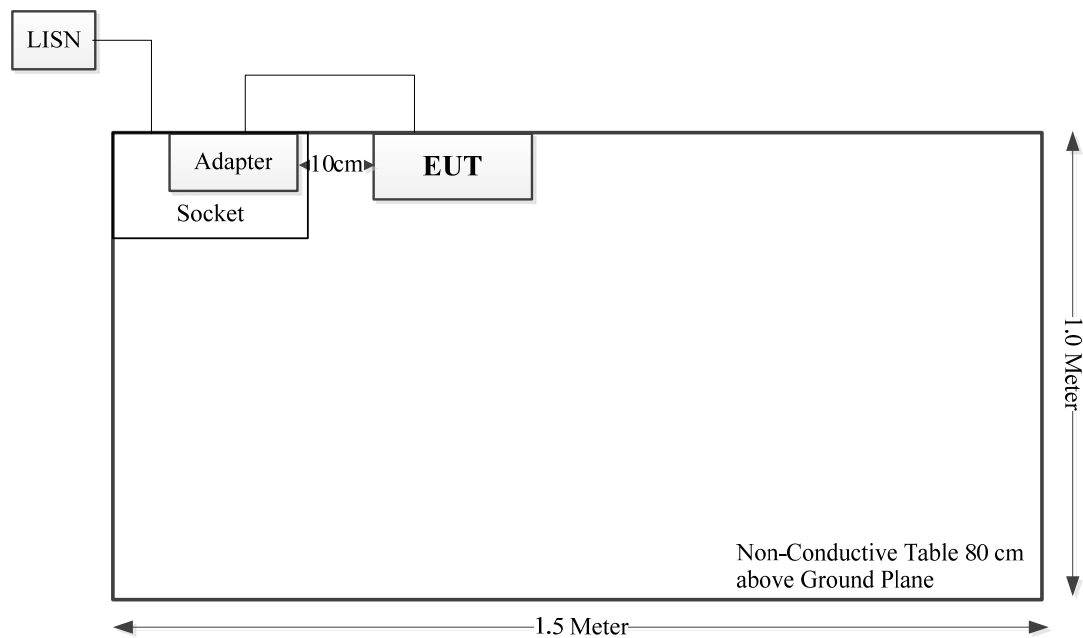

Spurious Emissions:

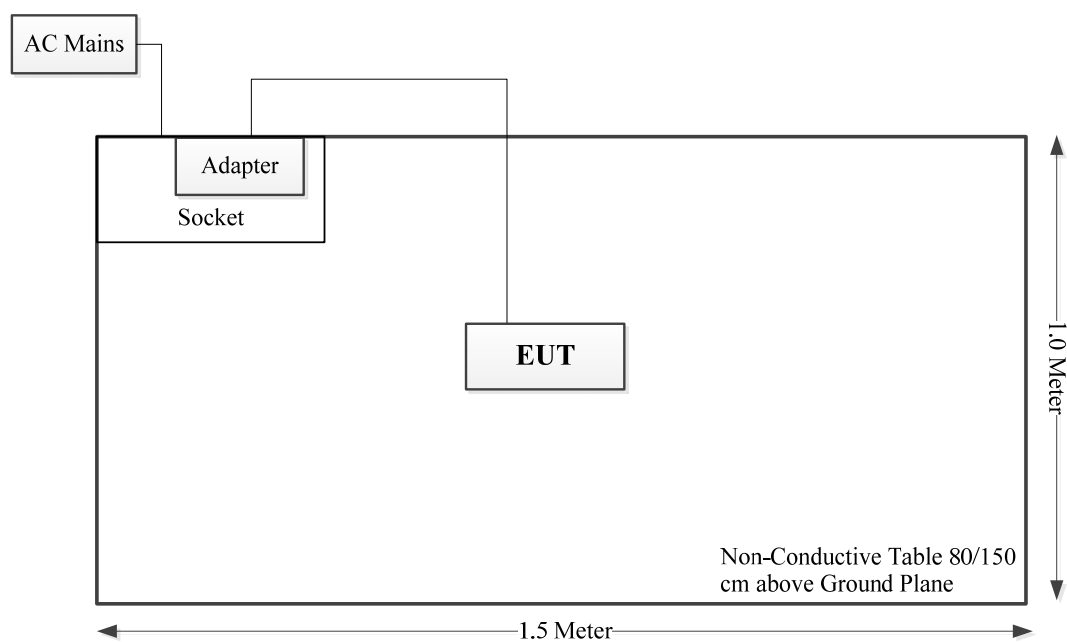

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
§15.247 (a)(2)	Minimum 6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.203	Antenna Requirement	Compliant
FCC§15.247 (i) & §1.1307	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

Below 1GHz:

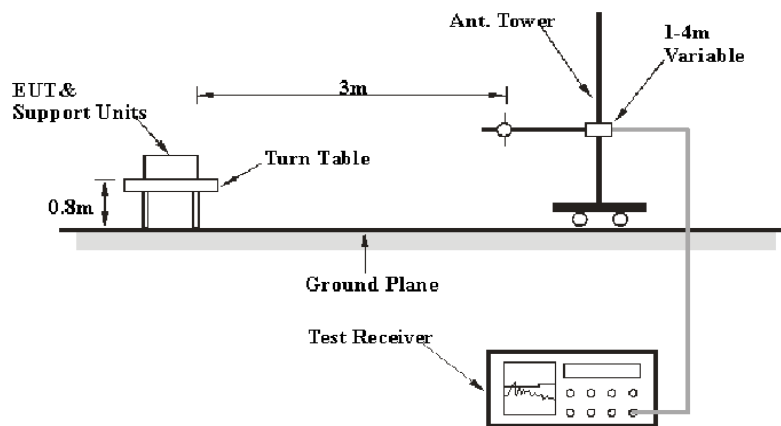

Above 1GHz:

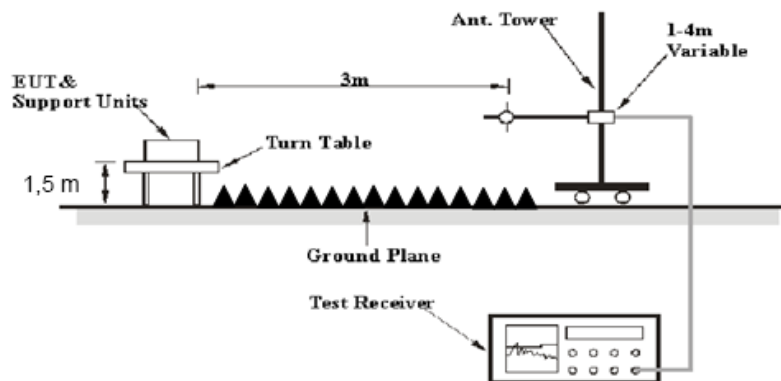

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 Minimum 6 dB Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup

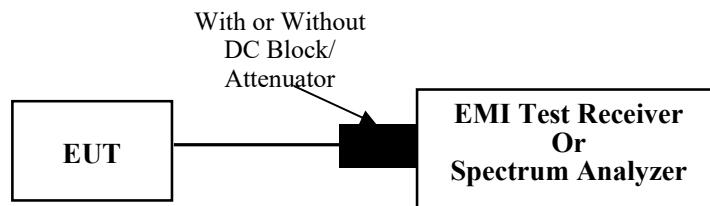

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.4.2 EUT Setup

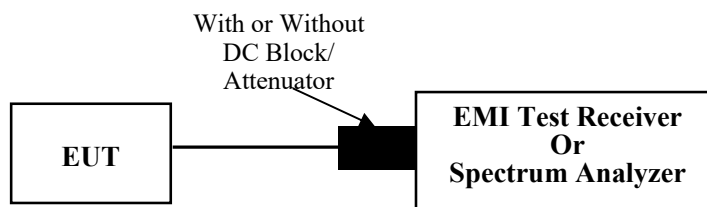

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq [3 \times RBW]$.
- c) Set $span \geq [3 \times RBW]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


3.5 Maximum power spectral density

3.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.5.2 EUT Setup

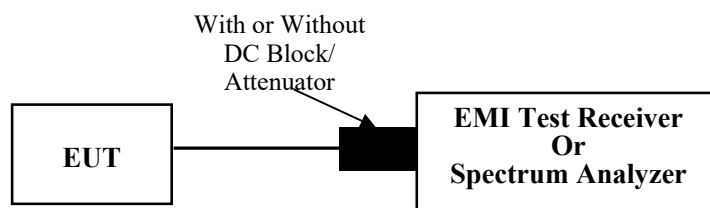

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


3.6 100 kHz Bandwidth of Frequency Band Edge

3.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.6.2 EUT Setup

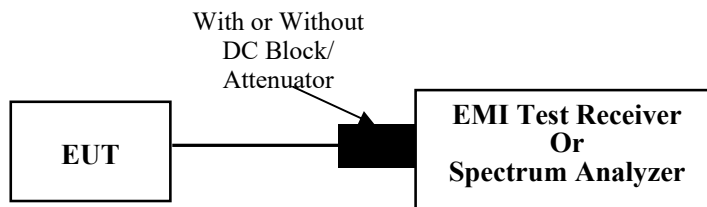

3.6.3 Test Procedure


According to ANSI C63.10-2013 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.7 Duty Cycle

3.7.1 EUT Setup

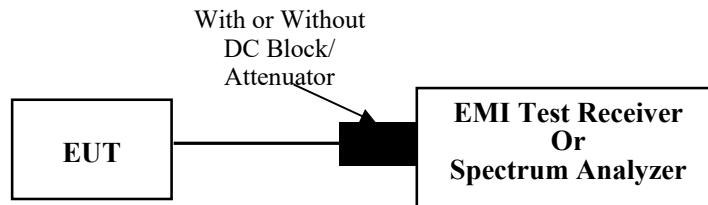

3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2A3Z-1, 2A3Z-2, 2A3Z-3	Test Date:	2023/09/21
Test Site:	CE	Test Mode:	Transmitting(maximum output power mode 2M bps high channel)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7	Relative Humidity: (%)	54	ATM Pressure: (kPa)	100.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


For model MLW7-1003-ICM (The length of lamp strip is 15m):

Project No.: CR230848226-RF

Tester: David Huang

Port: Line

Note:

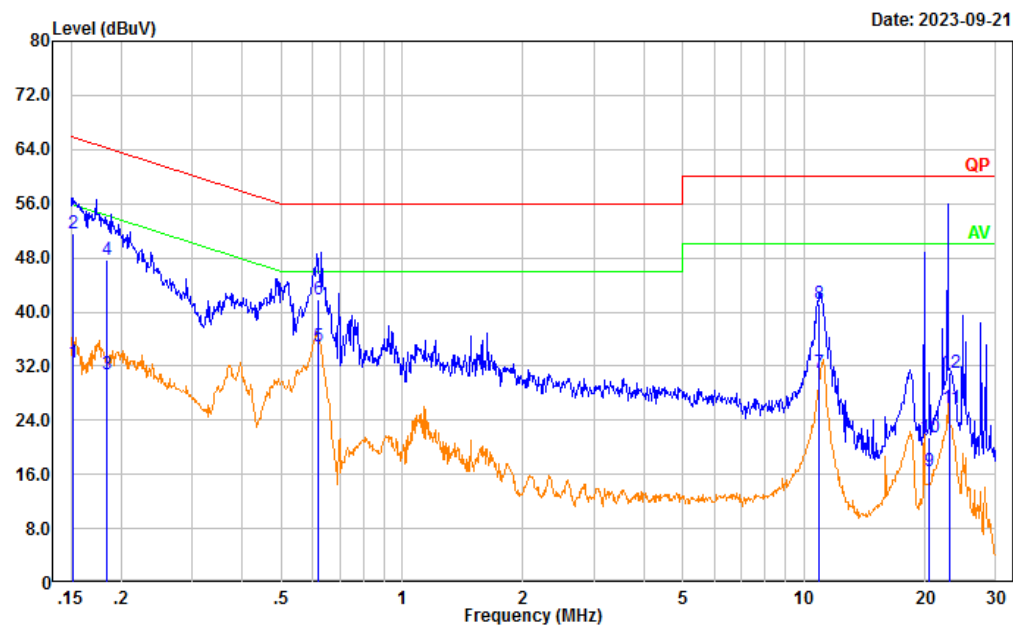


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.152	22.97	9.61	32.58	55.88	23.30	Average
2	0.152	41.99	9.61	51.60	65.88	14.28	QP
3	0.184	21.19	9.61	30.80	54.30	23.50	Average
4	0.184	38.00	9.61	47.61	64.30	16.69	QP
5	0.617	25.26	9.62	34.88	46.00	11.12	Average
6	0.617	32.21	9.62	41.83	56.00	14.17	QP
7	10.937	21.33	9.67	31.00	50.00	19.00	Average
8	10.937	31.47	9.67	41.14	60.00	18.86	QP
9	20.414	6.66	9.80	16.46	50.00	33.54	Average
10	20.414	11.72	9.80	21.52	60.00	38.48	QP
11	23.099	15.93	9.81	25.74	50.00	24.26	Average
12	23.099	21.11	9.81	30.92	60.00	29.08	QP

Project No.: CR230848226-RF

Tester: David Huang

Port: neutral

Note:

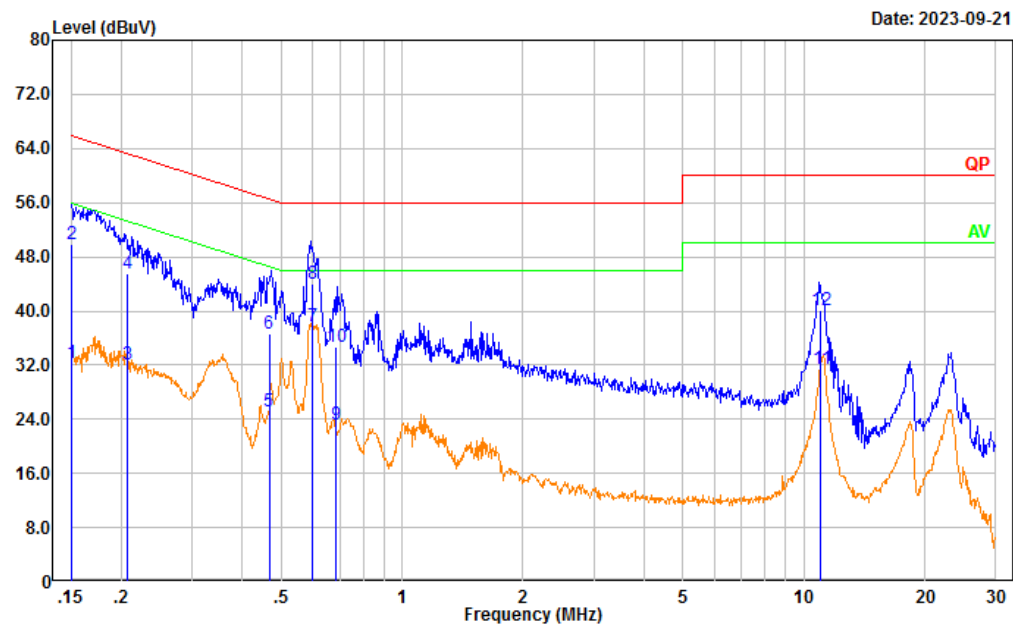

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.151	22.75	9.61	32.36	55.96	23.60	Average
2	0.151	40.21	9.61	49.82	65.96	16.14	QP
3	0.207	22.54	9.61	32.15	53.33	21.18	Average
4	0.207	36.01	9.61	45.62	63.33	17.71	QP
5	0.467	15.48	9.61	25.09	46.57	21.48	Average
6	0.467	27.06	9.61	36.67	56.57	19.90	QP
7	0.599	28.01	9.62	37.63	46.00	8.37	Average
8	0.599	34.35	9.62	43.97	56.00	12.03	QP
9	0.682	13.55	9.62	23.17	46.00	22.83	Average
10	0.682	24.98	9.62	34.60	56.00	21.40	QP
11	11.014	21.69	9.67	31.36	50.00	18.64	Average
12	11.014	30.50	9.67	40.17	60.00	19.83	QP

For model MLW7-1001-ICM (The length of lamp strip is 2m):


Project No.: CR230848226-RF

Tester: David Huang

Port: Line

Note:

Date: 2023-09-21

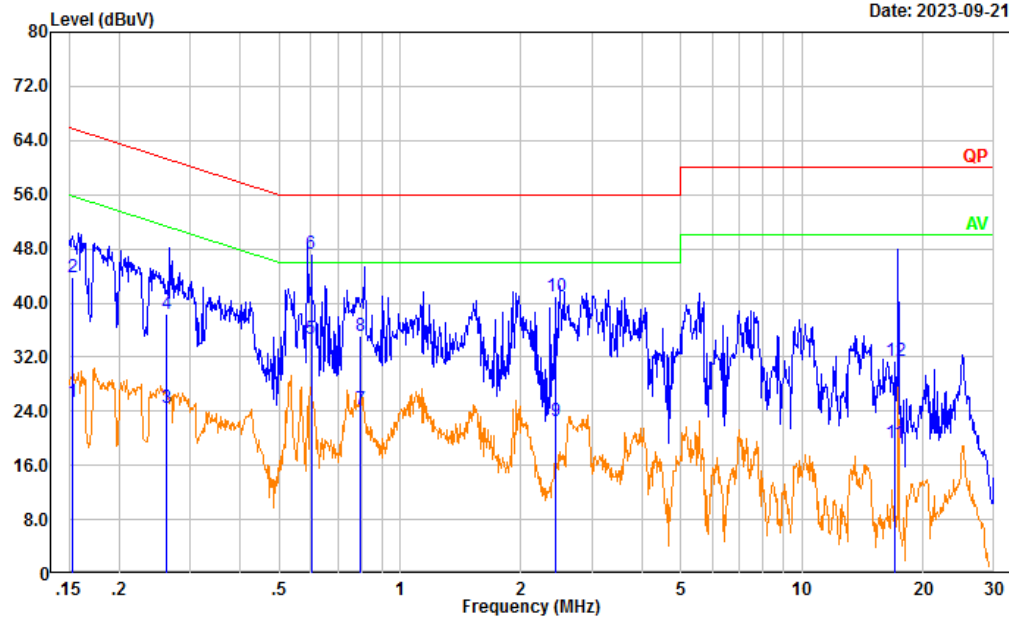


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.153	15.86	9.61	25.47	55.82	30.35	Average
2	0.153	34.12	9.61	43.73	65.82	22.09	QP
3	0.262	14.85	9.61	24.46	51.35	26.89	Average
4	0.262	28.87	9.61	38.48	61.35	22.87	QP
5	0.601	25.07	9.62	34.69	46.00	11.31	Average
6	0.601	37.56	9.62	47.18	56.00	8.82	QP
7	0.798	14.67	9.62	24.29	46.00	21.71	Average
8	0.798	25.48	9.62	35.10	56.00	20.90	QP
9	2.444	12.99	9.64	22.63	46.00	23.37	Average
10	2.444	31.36	9.64	41.00	56.00	15.00	QP
11	17.014	9.52	9.73	19.25	50.00	30.75	Average
12	17.014	21.62	9.73	31.35	60.00	28.65	QP

Project No.: CR230848226-RF

Tester: David Huang

Port: neutral

Note:

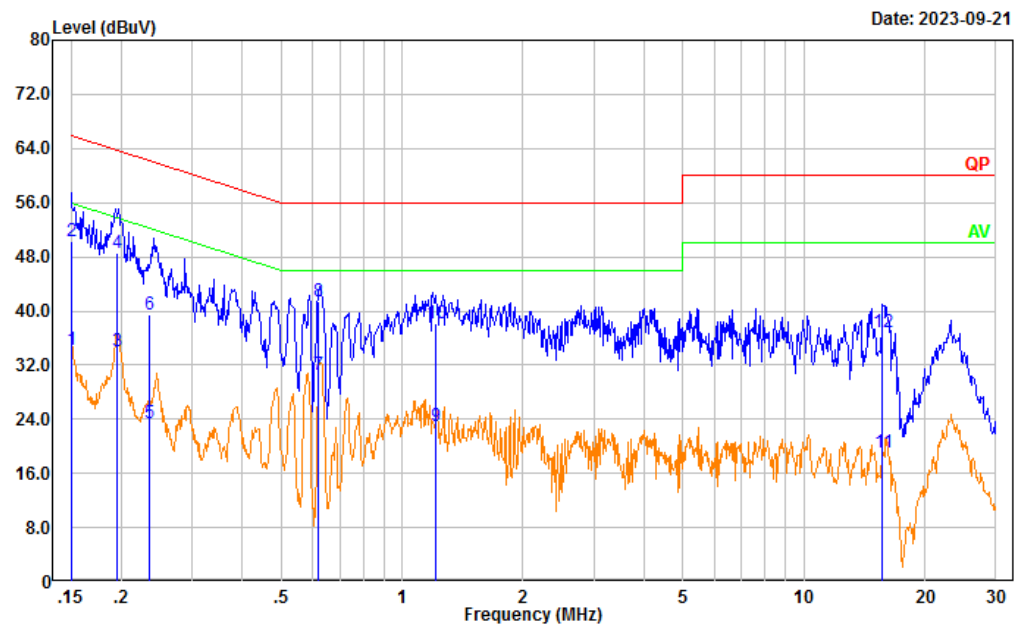

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	24.72	9.61	34.33	55.96	21.63	Average
2	0.151	40.58	9.61	50.19	65.96	15.77	QP
3	0.195	24.38	9.61	33.99	53.83	19.84	Average
4	0.195	39.01	9.61	48.62	63.83	15.21	QP
5	0.236	13.90	9.61	23.51	52.25	28.74	Average
6	0.236	29.81	9.61	39.42	62.25	22.83	QP
7	0.619	20.88	9.62	30.50	46.00	15.50	Average
8	0.619	31.82	9.62	41.44	56.00	14.56	QP
9	1.213	13.44	9.62	23.06	46.00	22.94	Average
10	1.213	28.46	9.62	38.08	56.00	17.92	QP
11	15.684	9.31	9.69	19.00	50.00	31.00	Average
12	15.684	27.15	9.69	36.84	60.00	23.16	QP


For model MLW7-1002-ICM (The length of lamp strip is 5 m):

Project No.: CR230848226-RF

Tester: David Huang

Port: Line

Note:

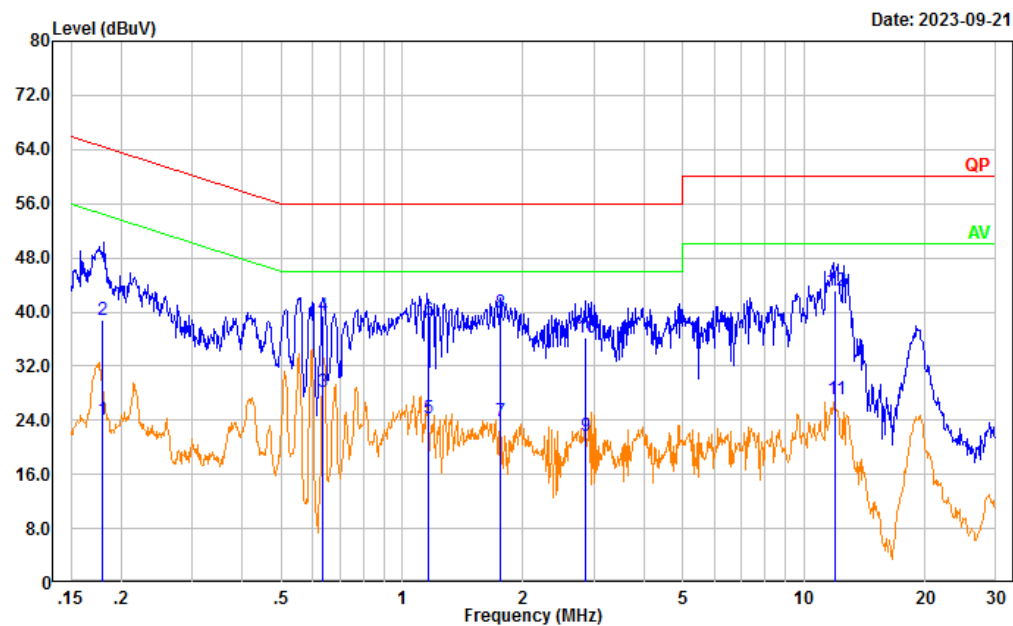


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.180	14.36	9.61	23.97	54.49	30.52	Average
2	0.180	29.10	9.61	38.71	64.49	25.78	QP
3	0.633	18.65	9.62	28.27	46.00	17.73	Average
4	0.633	29.80	9.62	39.42	56.00	16.58	QP
5	1.160	14.70	9.62	24.32	46.00	21.68	Average
6	1.160	29.29	9.62	38.91	56.00	17.09	QP
7	1.760	14.16	9.63	23.79	46.00	22.21	Average
8	1.760	30.28	9.63	39.91	56.00	16.09	QP
9	2.861	11.99	9.65	21.64	46.00	24.36	Average
10	2.861	26.64	9.65	36.29	56.00	19.71	QP
11	11.972	17.45	9.67	27.12	50.00	22.88	Average
12	11.972	33.37	9.67	43.04	60.00	16.96	QP

Project No.: CR230848226-RF

Tester: David Huang

Port: neutral

Note:

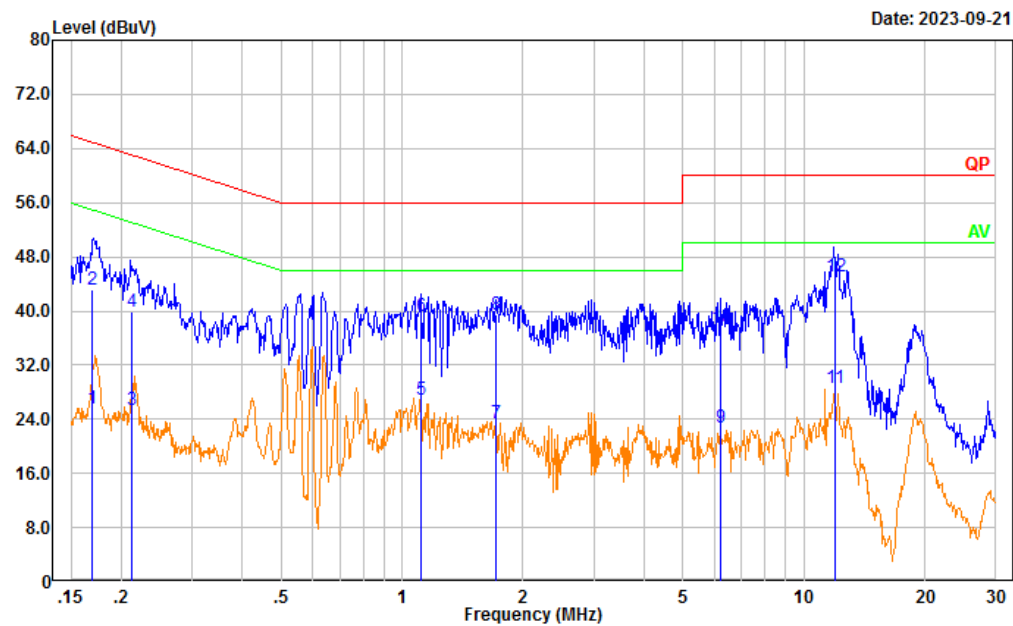

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.169	15.93	9.61	25.54	55.01	29.47	Average
2	0.169	33.56	9.61	43.17	65.01	21.84	QP
3	0.212	15.78	9.61	25.39	53.13	27.74	Average
4	0.212	30.18	9.61	39.79	63.13	23.34	QP
5	1.118	17.36	9.62	26.98	46.00	19.02	Average
6	1.118	29.69	9.62	39.31	56.00	16.69	QP
7	1.719	13.88	9.63	23.51	46.00	22.49	Average
8	1.719	29.79	9.63	39.42	56.00	16.58	QP
9	6.188	13.00	9.66	22.66	50.00	27.34	Average
10	6.188	27.94	9.66	37.60	60.00	22.40	QP
11	11.941	18.85	9.67	28.52	50.00	21.48	Average
12	11.941	35.38	9.67	45.05	60.00	14.95	QP

4.2 Radiation Spurious Emissions

Serial Number:	2A3Z-1, 2A3Z-2, 2A3Z-3	Test Date:	30MHz-1GHz : 2023/9/11~2023/10/19 1-25GHz : 2023/9/18
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Hugo Huo&Jeff Luo&Coco Tian	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	25~25.6	Relative Humidity: (%)	60~63	ATM Pressure: (kPa)	100~100.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
30MHz-1GHz					
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
Sunol Sciences	Antenna	JB6	A082520-5	2023/9/18	2026/9/16
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
1-25GHz					
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to the table and plots.


1) 30MHz-1GHz (maximum output power mode BLE 2Mbps)

For model MLW7-1003-ICM (The length of lamp strip is 15m):


Low channel

Project No.: CR230848226-RF
Tester: Jeff Luo
Polarization: horizontal
Note:

Date: 2023-10-19

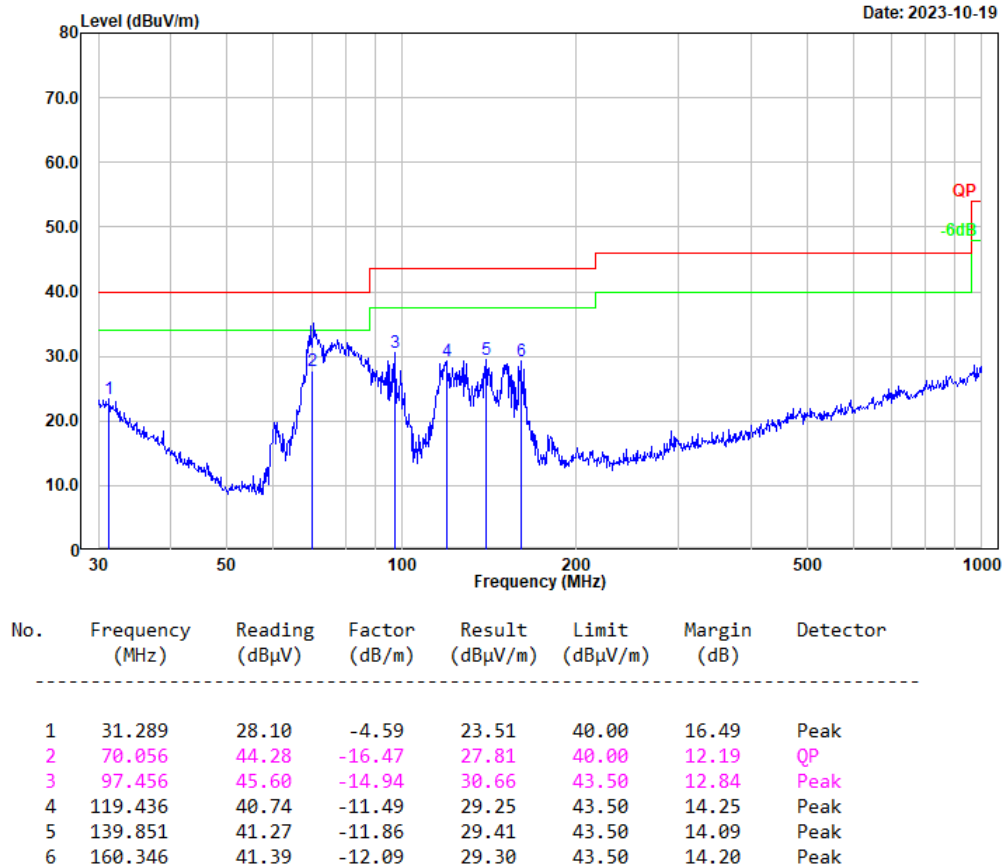

Project No.: CR230848226-RF
Tester: Jeff Luo
Polarization: vertical
Note:

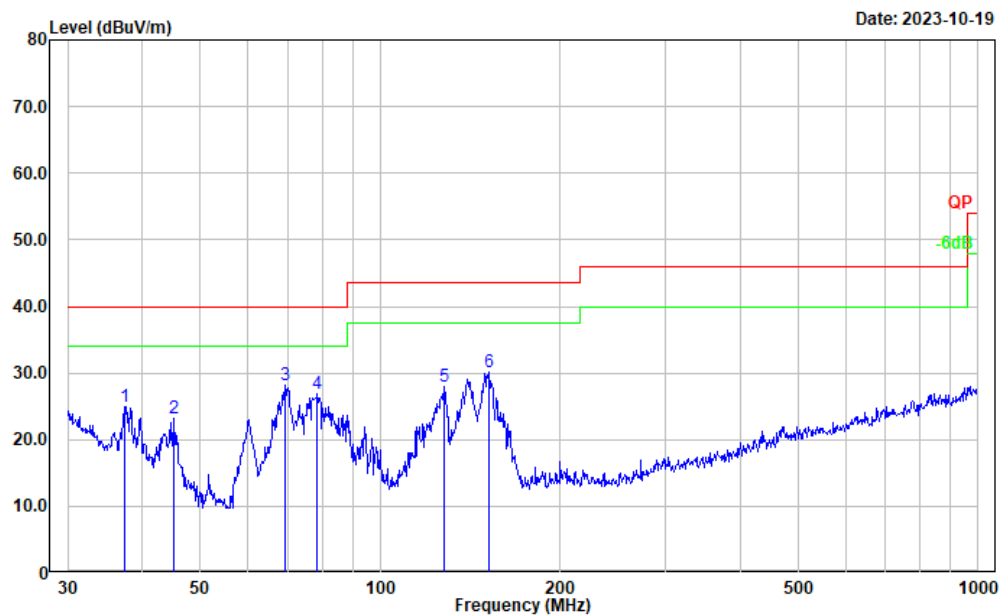

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	37.416	34.32	-9.31	25.01	40.00	14.99	Peak
2	45.058	37.36	-14.25	23.11	40.00	16.89	Peak
3	69.357	44.80	-16.56	28.24	40.00	11.76	Peak
4	78.413	44.28	-17.30	26.98	40.00	13.02	Peak
5	127.665	39.18	-11.30	27.88	43.50	15.62	Peak
6	152.130	42.17	-12.02	30.15	43.50	13.35	Peak


Middle channel

Project No.: CR230848226-RF

Tester: Jeff Luo


Polarization: horizontal

Note:

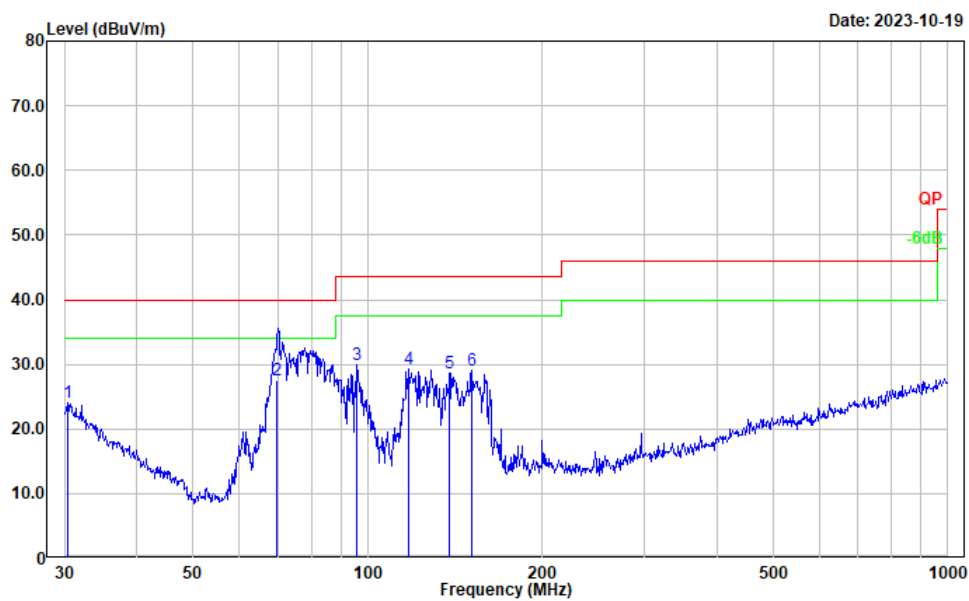

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.424	27.90	-3.93	23.97	40.00	16.03	Peak
2	69.765	43.94	-16.49	27.45	40.00	12.55	QP
3	95.762	45.23	-15.40	29.83	43.50	13.67	Peak
4	117.360	40.95	-11.67	29.28	43.50	14.22	Peak
5	138.387	40.40	-11.81	28.59	43.50	14.91	Peak
6	151.067	41.02	-12.05	28.97	43.50	14.53	Peak

Project No.: CR230848226-RF
Tester: Jeff Luo
Polarization: vertical
Note:

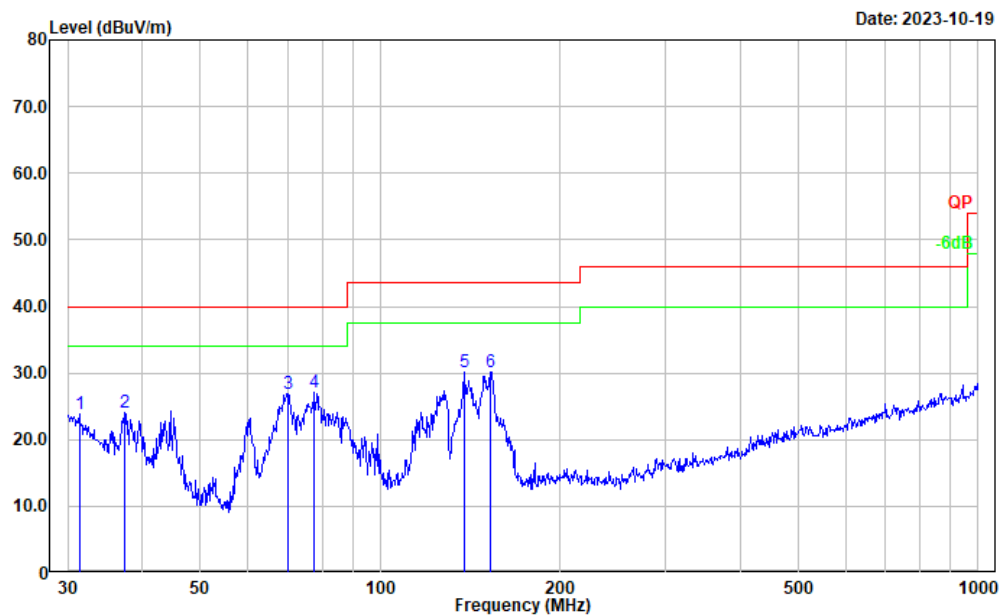

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.399	28.56	-4.67	23.89	40.00	16.11	Peak
2	37.416	33.30	-9.31	23.99	40.00	16.01	Peak
3	70.090	43.44	-16.47	26.97	40.00	13.03	Peak
4	77.593	44.36	-17.21	27.15	40.00	12.85	Peak
5	137.903	41.99	-11.79	30.20	43.50	13.30	Peak
6	152.664	42.26	-12.02	30.24	43.50	13.26	Peak


High channel

Project No.: CR230848226-RF

Tester: Jeff Luo


Polarization: horizontal

Note:

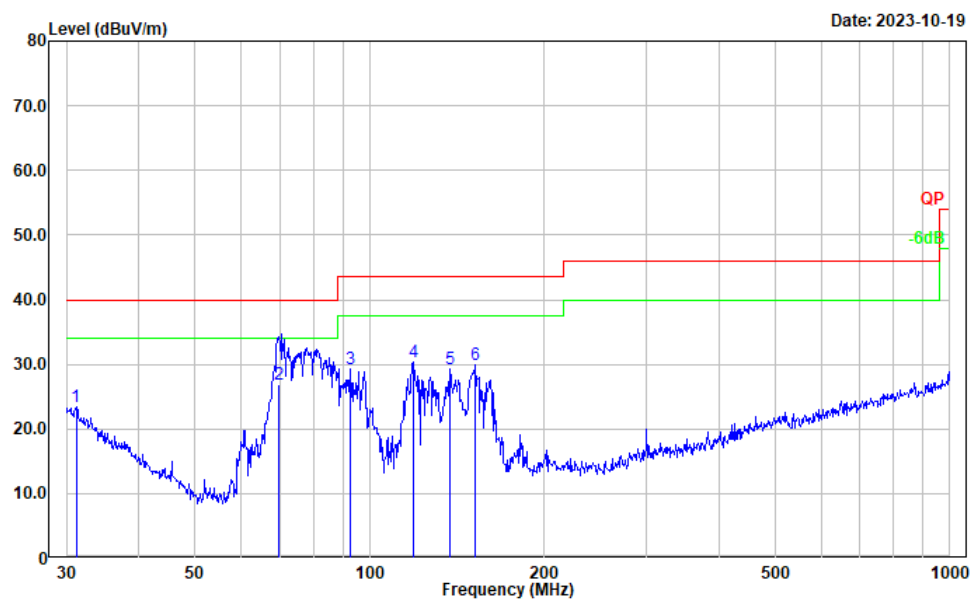

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.180	27.96	-4.50	23.46	40.00	16.54	Peak
2	69.563	43.36	-16.52	26.84	40.00	13.16	QP
3	92.462	45.63	-16.32	29.31	43.50	14.19	Peak
4	119.018	41.89	-11.53	30.36	43.50	13.14	Peak
5	137.420	40.95	-11.75	29.20	43.50	14.30	Peak
6	152.130	41.83	-12.02	29.81	43.50	13.69	Peak

Project No.: CR230848226-RF
Tester: Jeff Luo
Polarization: vertical
Note:

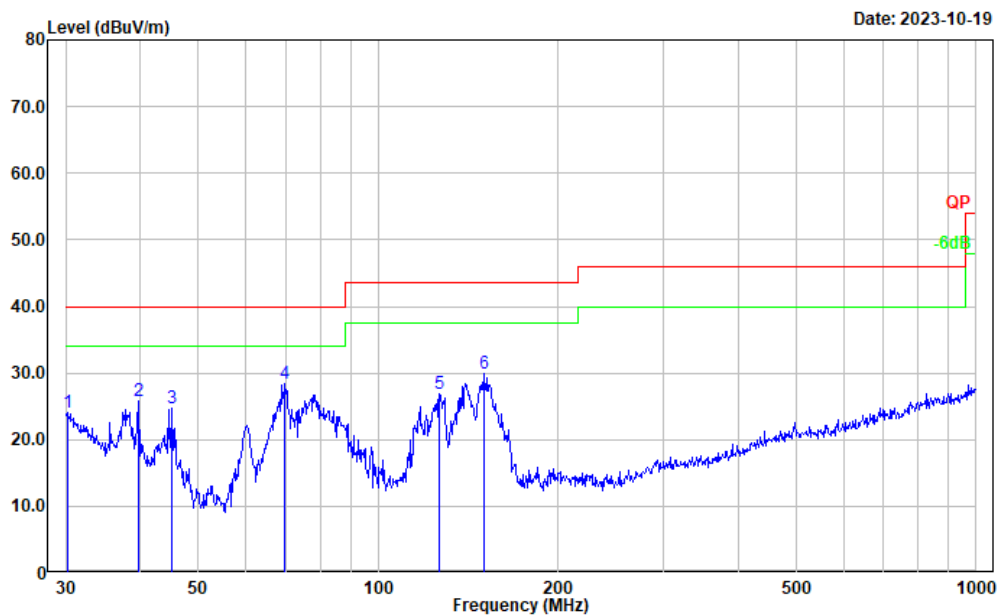


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	27.86	-3.76	24.10	40.00	15.90	Peak
2	39.715	36.94	-11.09	25.85	40.00	14.15	Peak
3	45.058	39.07	-14.25	24.82	40.00	15.18	Peak
4	69.845	44.78	-16.48	28.30	40.00	11.70	Peak
5	126.329	38.13	-11.32	26.81	43.50	16.69	Peak
6	150.011	41.98	-12.00	29.98	43.50	13.52	Peak

For model MLW7-1001-ICM (The length of lamp strip is 2m):


Low channel

Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: horizontal
Note:

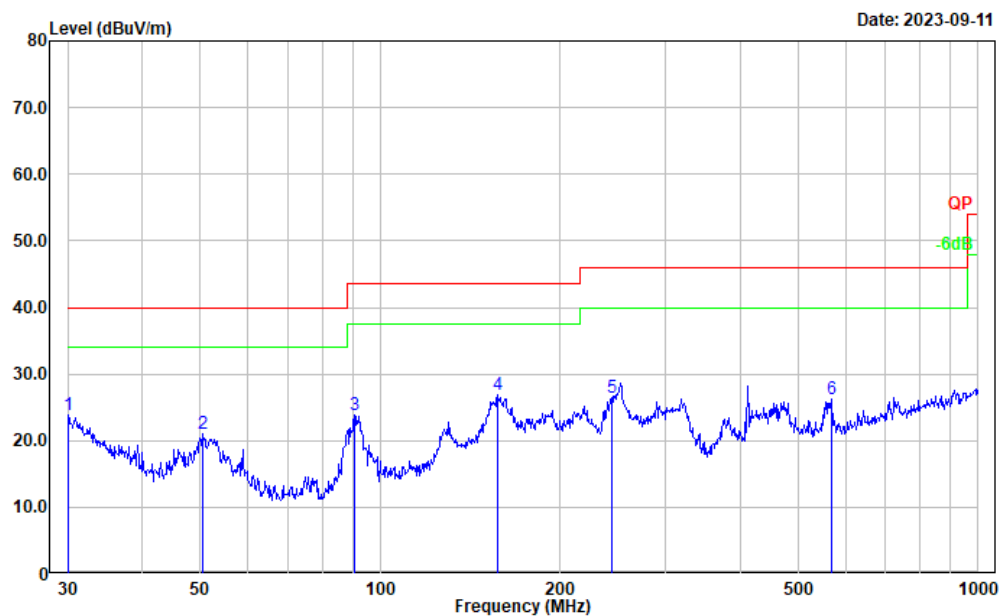

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.50	-3.60	23.90	40.00	16.10	Peak
2	50.586	38.26	-17.19	21.07	40.00	18.93	Peak
3	90.537	40.75	-16.80	23.95	43.50	19.55	Peak
4	157.559	38.95	-12.05	26.90	43.50	16.60	Peak
5	244.232	39.41	-12.98	26.43	46.00	19.57	Peak
6	568.613	31.78	-5.62	26.16	46.00	19.84	Peak

Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: vertical
Note:

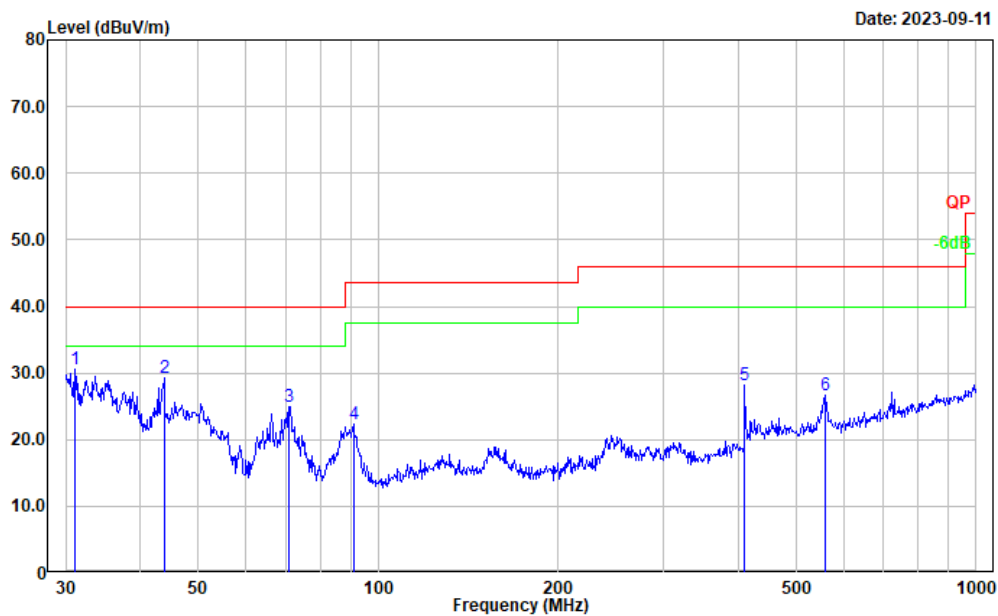

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.071	35.10	-4.43	30.67	40.00	9.33	Peak
2	43.812	42.90	-13.56	29.34	40.00	10.66	Peak
3	70.832	41.44	-16.55	24.89	40.00	15.11	Peak
4	90.855	38.98	-16.72	22.26	43.50	21.24	Peak
5	410.383	36.62	-8.36	28.26	46.00	17.74	Peak
6	558.730	32.27	-5.65	26.62	46.00	19.38	Peak


Middle channel

Project No.: CR230848226-RF

Tester: Hugo Huo


Polarization: horizontal

Note:

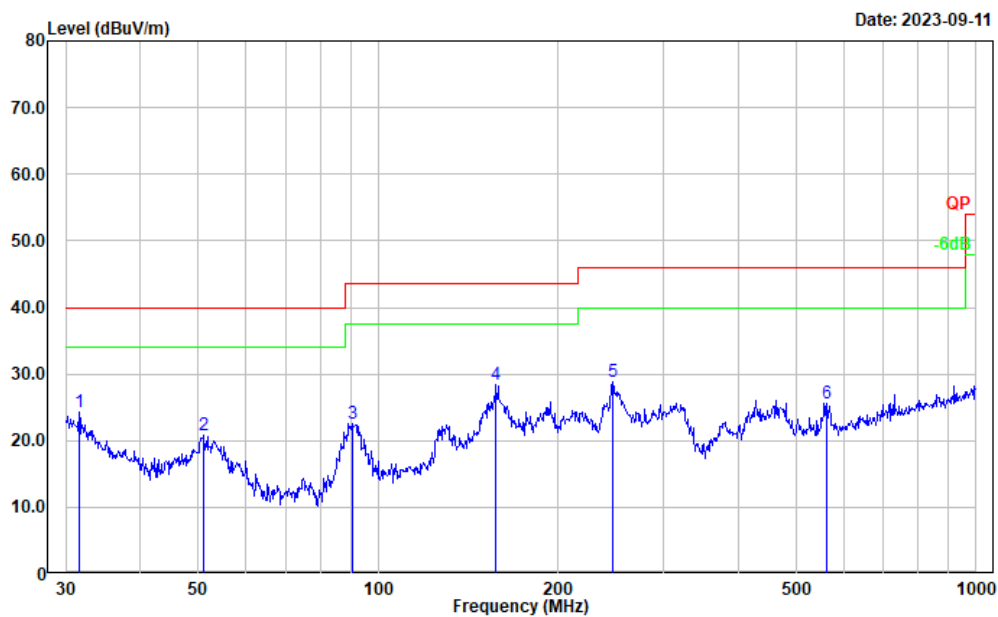

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.620	29.16	-4.83	24.33	40.00	15.67	Peak
2	51.121	37.96	-17.21	20.75	40.00	19.25	Peak
3	90.537	39.38	-16.80	22.58	43.50	20.92	Peak
4	157.559	40.43	-12.05	28.38	43.50	15.12	Peak
5	246.815	41.77	-13.02	28.75	46.00	17.25	Peak
6	562.662	31.30	-5.63	25.67	46.00	20.33	Peak


Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: vertical
Note:

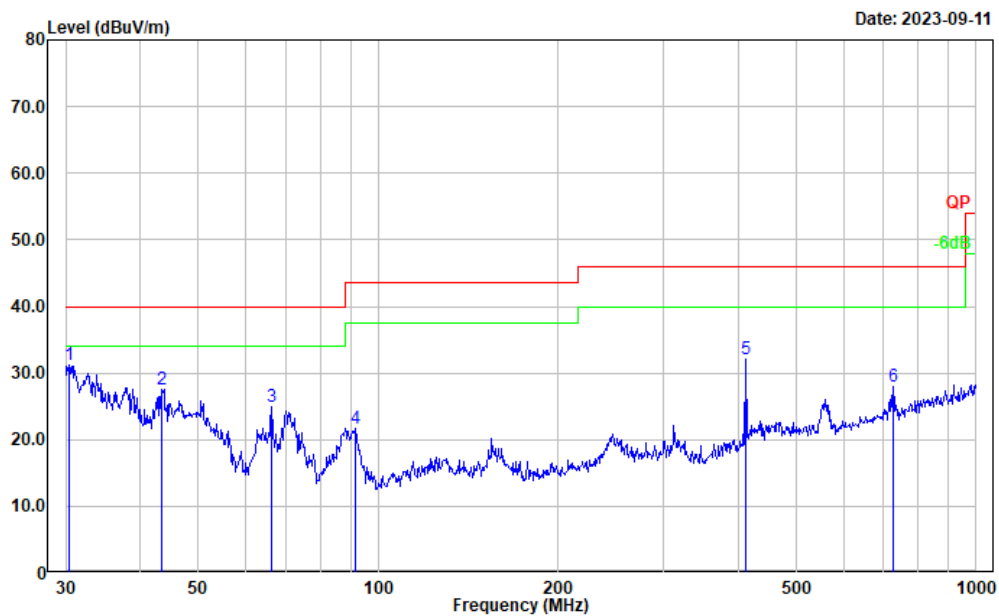

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	35.10	-3.93	31.17	40.00	8.83	Peak
2	43.353	40.79	-13.29	27.50	40.00	12.50	Peak
3	66.266	41.73	-16.84	24.89	40.00	15.11	Peak
4	91.495	38.27	-16.57	21.70	43.50	21.80	Peak
5	411.824	40.43	-8.28	32.15	46.00	13.85	Peak
6	726.805	30.94	-3.03	27.91	46.00	18.09	Peak


High channel

Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: horizontal
Note:

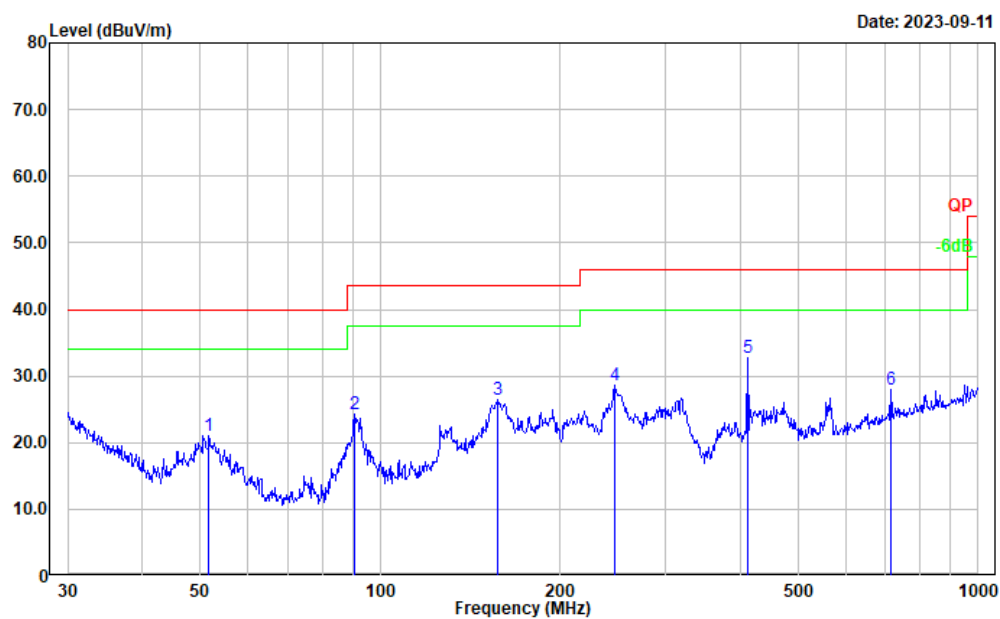

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	51.662	38.29	-17.20	21.09	40.00	18.91	Peak
2	90.537	41.06	-16.80	24.26	43.50	19.24	Peak
3	157.559	38.61	-12.05	26.56	43.50	16.94	Peak
4	246.815	41.74	-13.02	28.72	46.00	17.28	Peak
5	411.824	41.07	-8.28	32.79	46.00	13.21	Peak
6	714.173	31.29	-3.39	27.90	46.00	18.10	Peak

Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: vertical
Note:

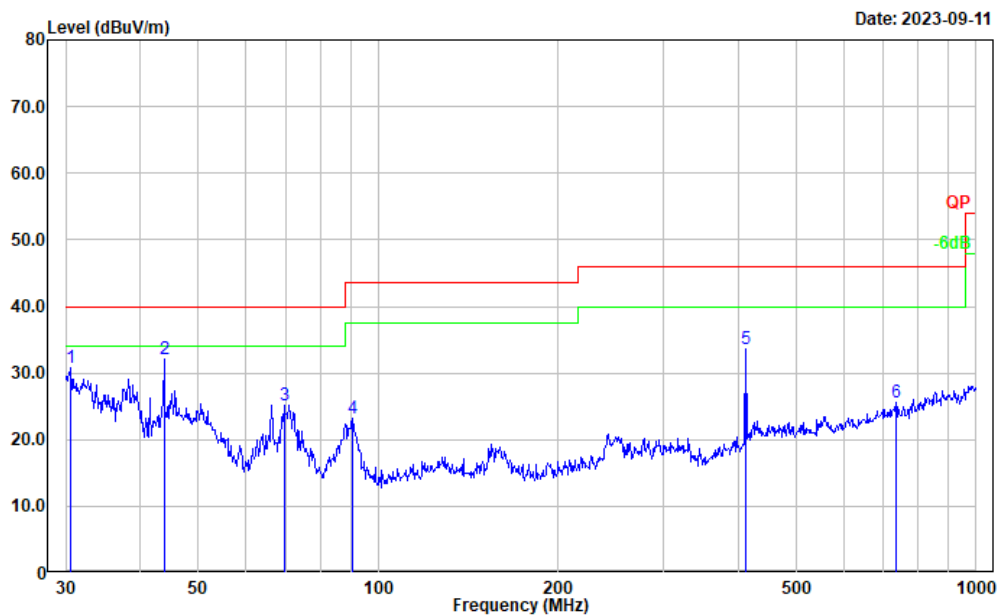


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	34.83	-4.09	30.74	40.00	9.26	Peak
2	43.812	45.56	-13.56	32.00	40.00	8.00	Peak
3	69.600	41.73	-16.52	25.21	40.00	14.79	Peak
4	90.537	39.90	-16.80	23.10	43.50	20.40	Peak
5	411.824	41.97	-8.28	33.69	46.00	12.31	Peak
6	734.491	28.51	-2.90	25.61	46.00	20.39	Peak

For model MLW7-1002-ICM (The length of lamp strip is 5 m):

Low channel


Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: horizontal
Note:

Date: 2023-09-11

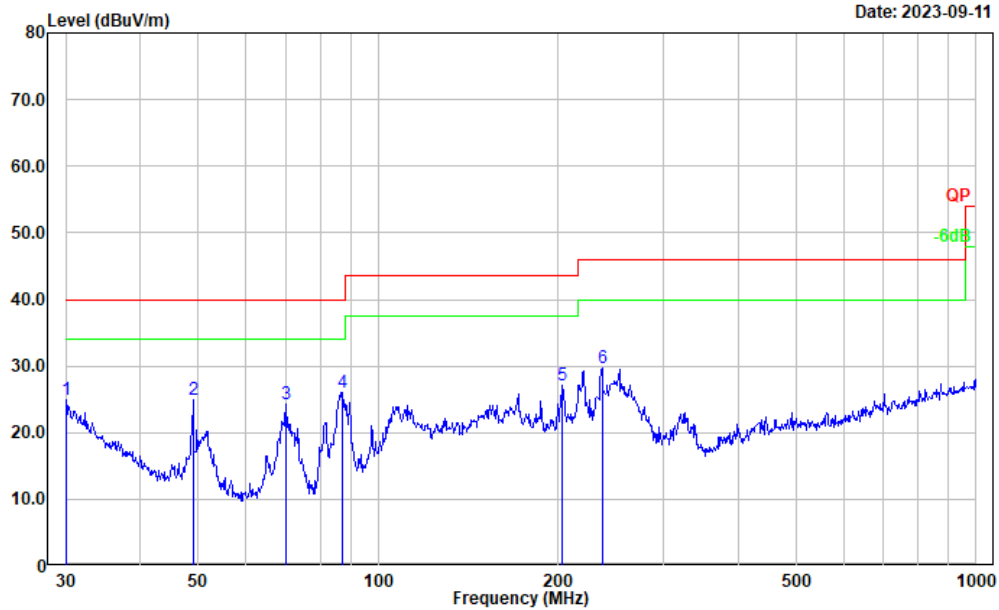

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.48	-3.60	24.88	40.00	15.12	Peak
2	49.014	41.58	-16.60	24.98	40.00	15.02	Peak
3	70.090	40.85	-16.47	24.38	40.00	15.62	Peak
4	87.112	43.07	-17.08	25.99	40.00	14.01	Peak
5	203.523	39.35	-12.32	27.03	43.50	16.47	Peak
6	236.645	42.82	-13.05	29.77	46.00	16.23	Peak

Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: vertical
Note:

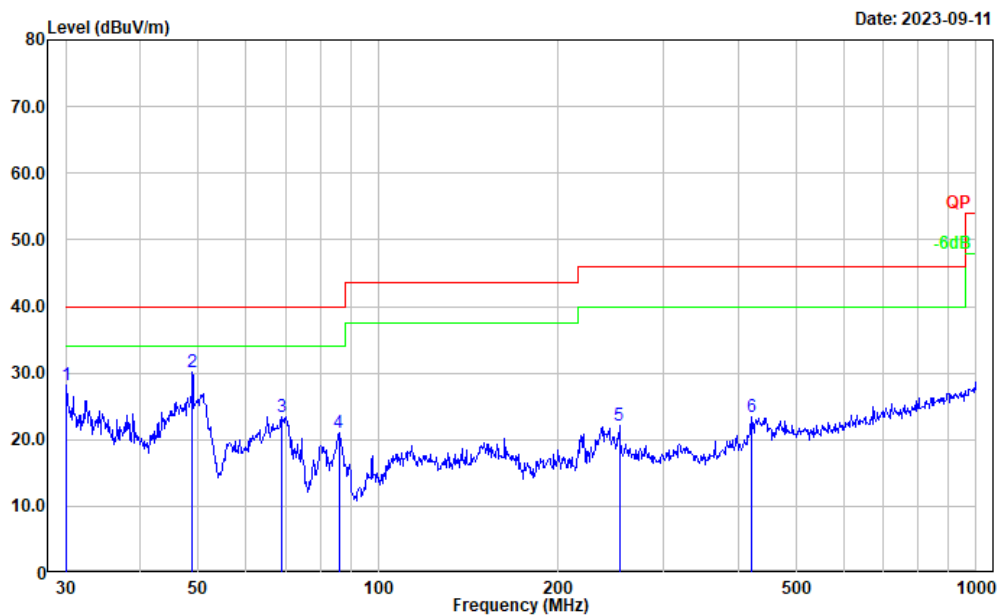


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	31.94	-3.68	28.26	40.00	11.74	Peak
2	48.843	46.56	-16.50	30.06	40.00	9.94	Peak
3	69.114	40.10	-16.59	23.51	40.00	16.49	Peak
4	85.898	38.14	-17.15	20.99	40.00	19.01	Peak
5	252.948	34.95	-12.93	22.02	46.00	23.98	Peak
6	422.058	31.31	-7.83	23.48	46.00	22.52	Peak

Middle channel


Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: horizontal
Note:

Date: 2023-09-11

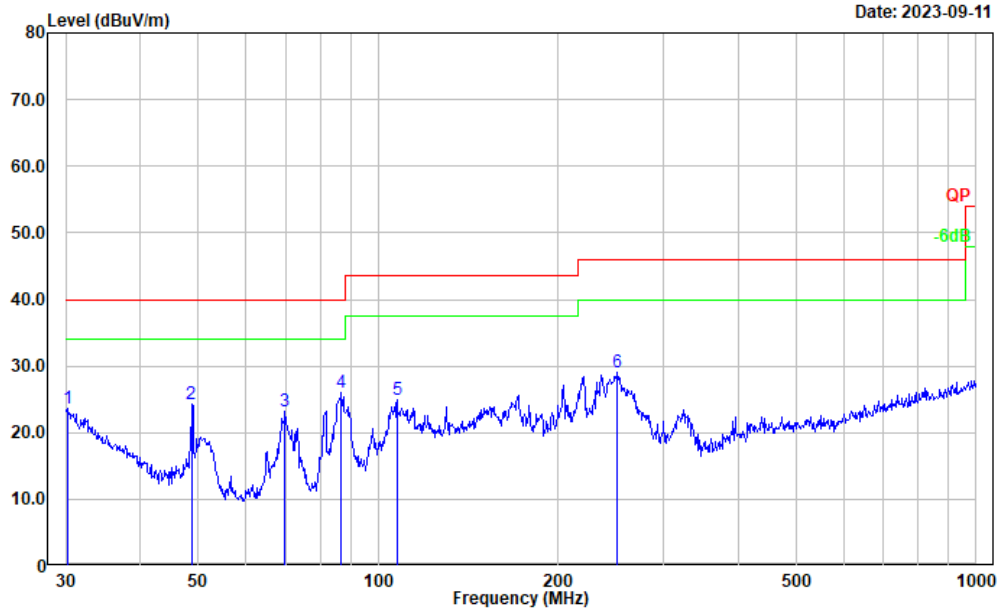

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	27.42	-3.85	23.57	40.00	16.43	Peak
2	48.672	40.64	-16.41	24.23	40.00	15.77	Peak
3	69.845	39.72	-16.48	23.24	40.00	16.76	Peak
4	86.807	43.07	-17.10	25.97	40.00	14.03	Peak
5	107.510	37.75	-12.80	24.95	43.50	18.55	Peak
6	251.180	42.14	-13.03	29.11	46.00	16.89	Peak

Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: vertical
Note:

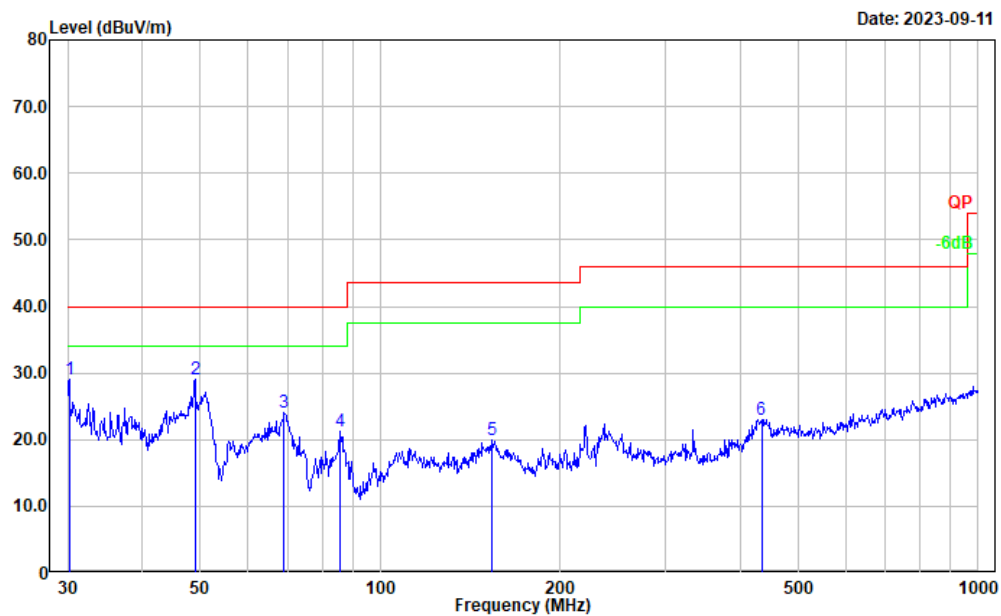


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	32.91	-3.76	29.15	40.00	10.85	Peak
2	49.014	45.55	-16.60	28.95	40.00	11.05	Peak
3	69.114	40.59	-16.59	24.00	40.00	16.00	Peak
4	85.598	38.32	-17.15	21.17	40.00	18.83	Peak
5	153.739	31.94	-12.01	19.93	43.50	23.57	Peak
6	434.065	30.40	-7.37	23.03	46.00	22.97	Peak

High channel


Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: horizontal
Note:

Date: 2023-09-11

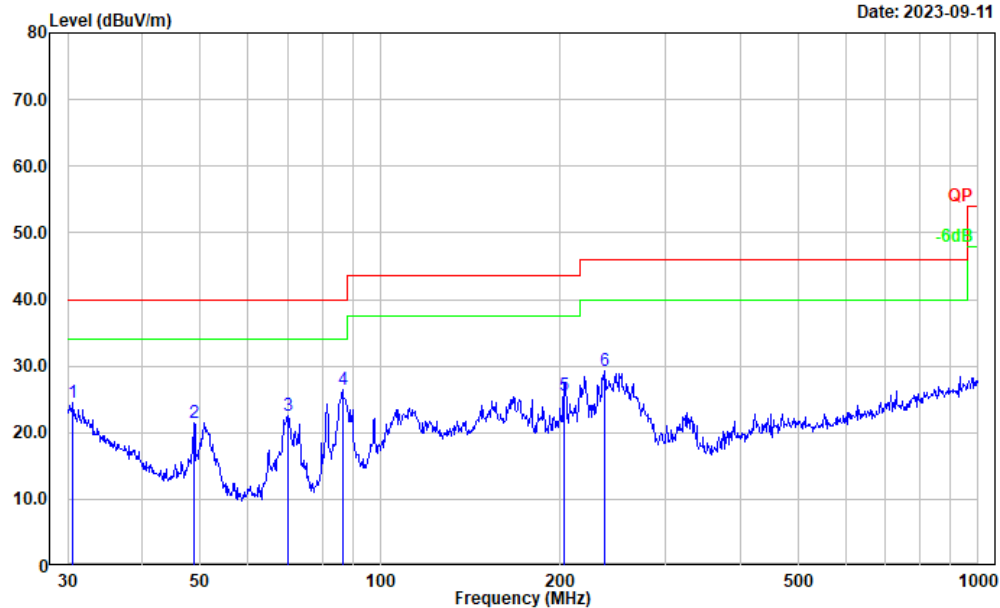

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	28.64	-4.09	24.55	40.00	15.45	Peak
2	48.843	38.02	-16.50	21.52	40.00	18.48	Peak
3	70.090	39.08	-16.47	22.61	40.00	17.39	Peak
4	86.503	43.63	-17.11	26.52	40.00	13.48	Peak
5	202.810	37.92	-12.29	25.63	43.50	17.87	Peak
6	237.476	42.30	-13.05	29.25	46.00	16.75	Peak

Project No.: CR230848226-RF
Tester: Hugo Huo
Polarization: vertical
Note:

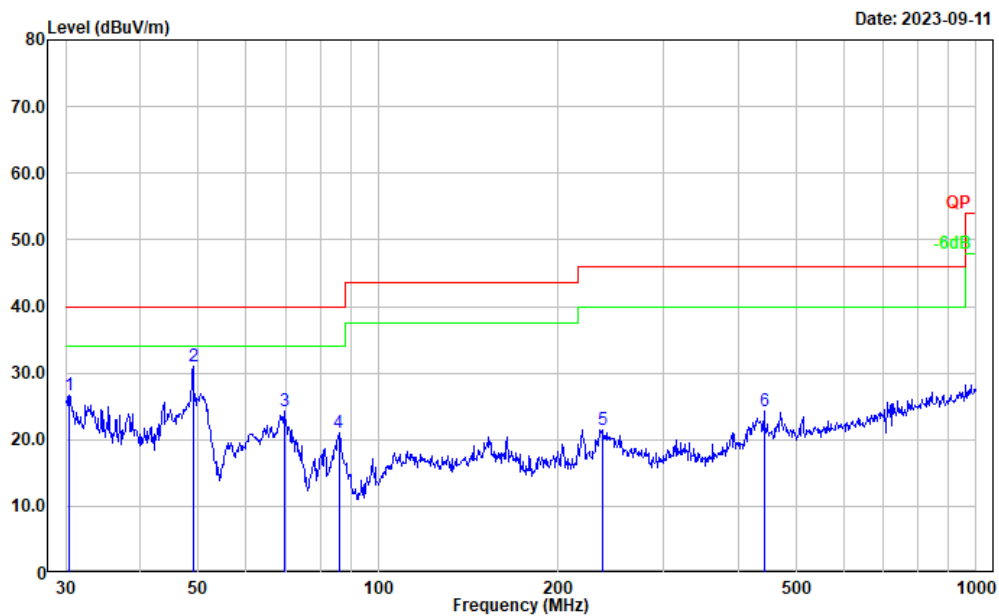


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	30.61	-3.93	26.68	40.00	13.32	Peak
2	49.014	47.63	-16.60	31.03	40.00	8.97	Peak
3	69.600	40.70	-16.52	24.18	40.00	15.82	Peak
4	85.898	38.22	-17.15	21.07	40.00	18.93	Peak
5	236.645	34.59	-13.05	21.54	46.00	24.46	Peak
6	441.743	31.43	-7.24	24.19	46.00	21.81	Peak

2) 1-25GHz for model MLW7-1003-ICM (The length of lamp strip is 15m):**BLE 1Mbps:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2402 MHz							
2390.000	19.96	PK	H	31.46	51.42	74.00	22.58
2390.000	14.79	AV	H	31.46	46.25	54.00	7.75
2390.000	20.31	PK	V	31.46	51.77	74.00	22.23
2390.000	15.06	AV	V	31.46	46.52	54.00	7.48
4804.000	40.72	PK	H	10.91	51.63	74.00	22.37
4804.000	32.23	AV	H	10.91	43.14	54.00	10.86
4804.000	38.21	PK	V	10.91	49.12	74.00	24.88
4804.000	29.9	AV	V	10.91	40.81	54.00	13.19
Middle Channel: 2440 MHz							
4880.000	39.98	PK	H	11.07	51.05	74.00	22.95
4880.000	31.69	AV	H	11.07	42.76	54.00	11.24
4880.000	42.56	PK	V	11.07	53.63	74.00	20.37
4880.000	32.07	AV	V	11.07	43.14	54.00	10.86
High Channel: 2480 MHz							
2483.500	32.48	PK	H	31.64	64.12	74.00	9.88
2483.500	15.73	AV	H	31.64	47.37	54.00	6.63
2483.500	34.13	PK	V	31.64	65.77	74.00	8.23
2483.500	16.94	AV	V	31.64	48.58	54.00	5.42
4960.000	44.7	PK	H	11.24	55.94	74.00	18.06
4960.000	34.42	AV	H	11.24	45.66	54.00	8.34
4960.000	48.42	PK	V	11.24	59.66	74.00	14.34
4960.000	38.99	AV	V	11.24	50.23	54.00	3.77


BLE 2Mbps:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2402 MHz							
2390.000	19.72	PK	H	31.46	51.18	74.00	22.82
2390.000	14.77	AV	H	31.46	46.23	54.00	7.77
2390.000	20.24	PK	V	31.46	51.7	74.00	22.30
2390.000	15.38	AV	V	31.46	46.84	54.00	7.16
4804.000	45.04	PK	H	10.91	55.95	74.00	18.05
4804.000	36.1	AV	H	10.91	47.01	54.00	6.99
4804.000	45.37	PK	V	10.91	56.28	74.00	17.72
4804.000	36.56	AV	V	10.91	47.47	54.00	6.53
Middle Channel: 2440 MHz							
4880.000	45.35	PK	H	11.07	56.42	74.00	17.58
4880.000	36.67	AV	H	11.07	47.74	54.00	6.26
4880.000	45.74	PK	V	11.07	56.81	74.00	17.19
4880.000	36.89	AV	V	11.07	47.96	54.00	6.04
High Channel: 2480 MHz							
2483.500	25.44	PK	H	31.64	57.08	74.00	16.92
2483.500	15.29	AV	H	31.64	46.93	54.00	7.07
2483.500	27.08	PK	V	31.64	58.72	74.00	15.28
2483.500	16.89	AV	V	31.64	48.53	54.00	5.47
4960.000	44.61	PK	H	11.24	55.85	74.00	18.15
4960.000	34.65	AV	H	11.24	45.89	54.00	8.11
4960.000	48.69	PK	V	11.24	59.93	74.00	14.07
4960.000	37.76	AV	V	11.24	49	54.00	5.00

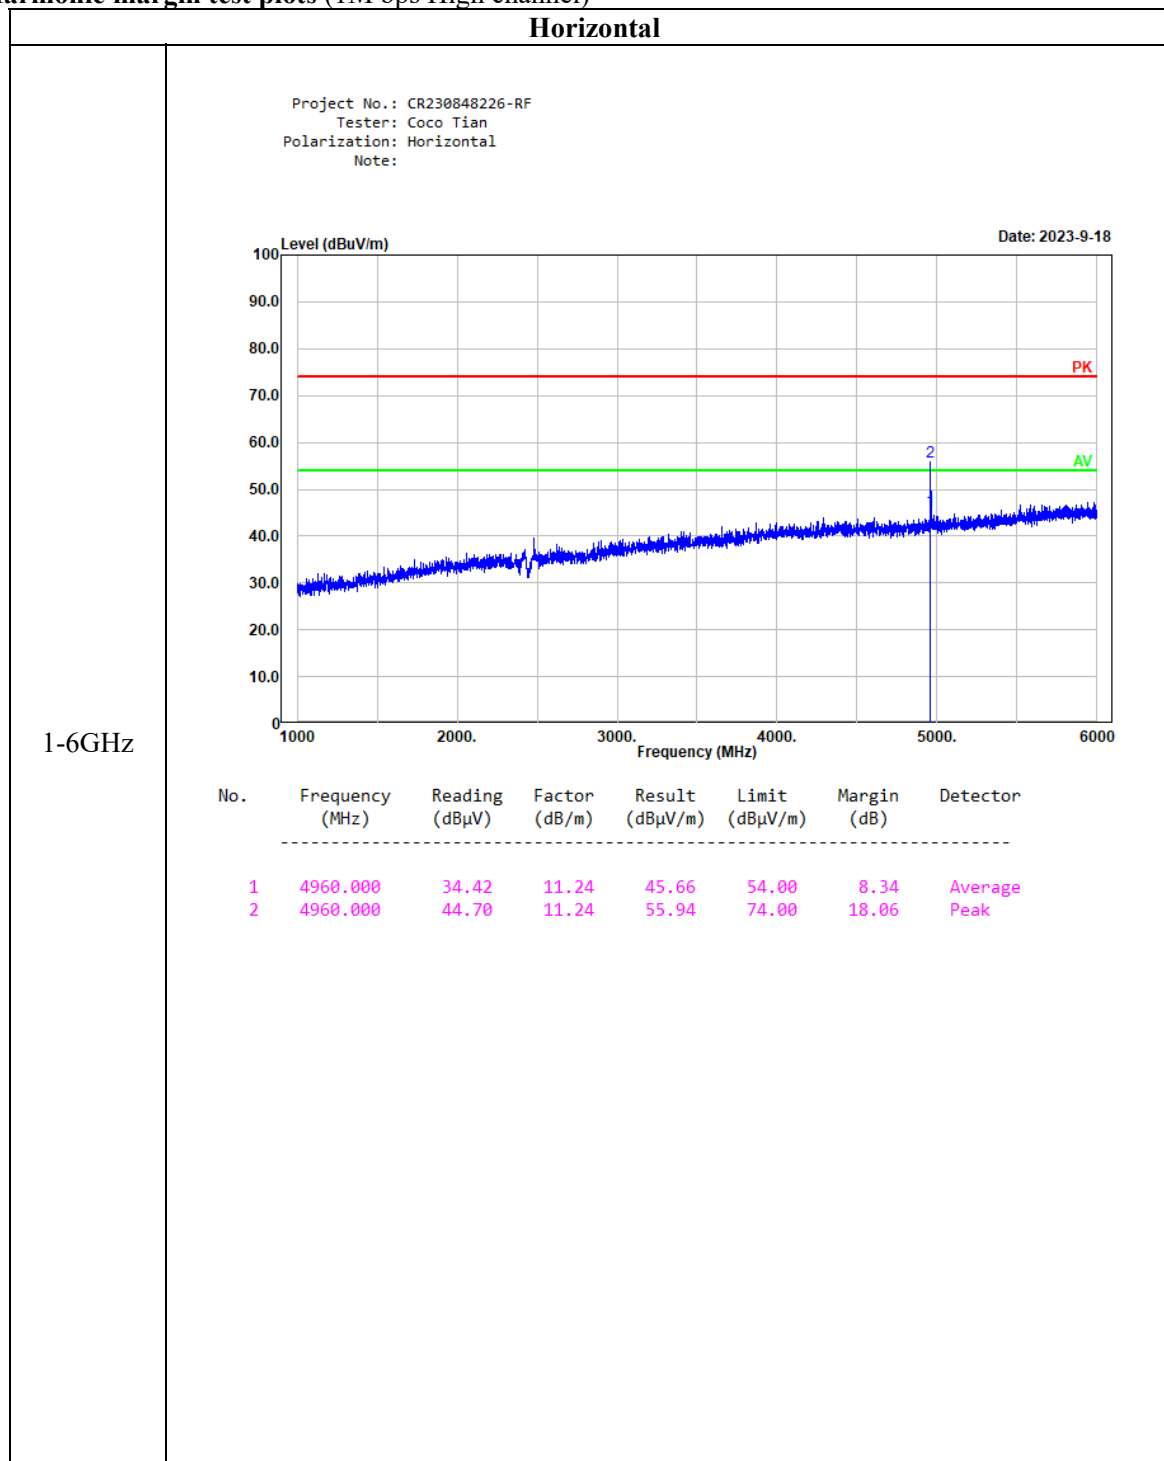Harmonic margin test plots (1M bps High channel)

Horizontal

Project No.: CR230848226-RF
Tester: Coco Tian
Polarization: Horizontal
Note:

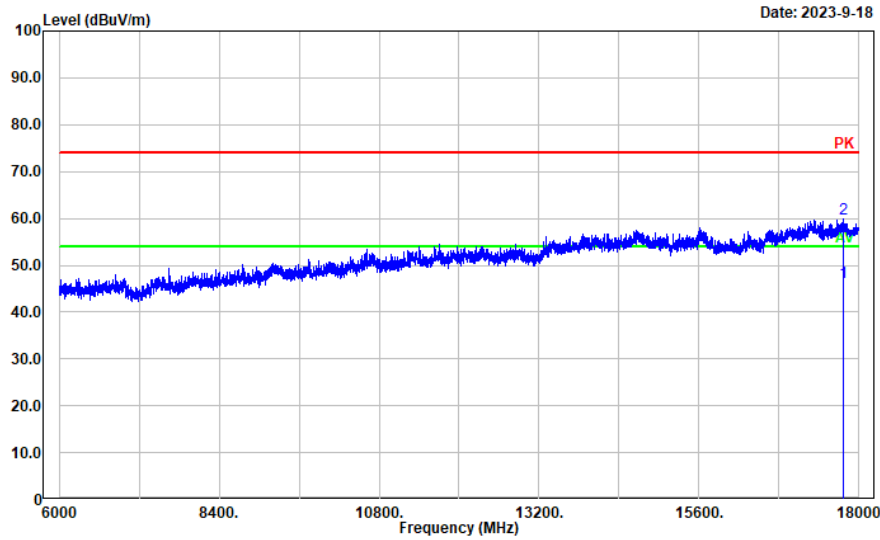


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	17762.350	15.73	30.65	46.38	54.00	7.62	Average
2	17762.350	29.13	30.65	59.78	74.00	14.22	Peak

Horizontal

Project No.: CR230848226-RF
Tester: Coco Tian
Polarization: Horizontal
Note:

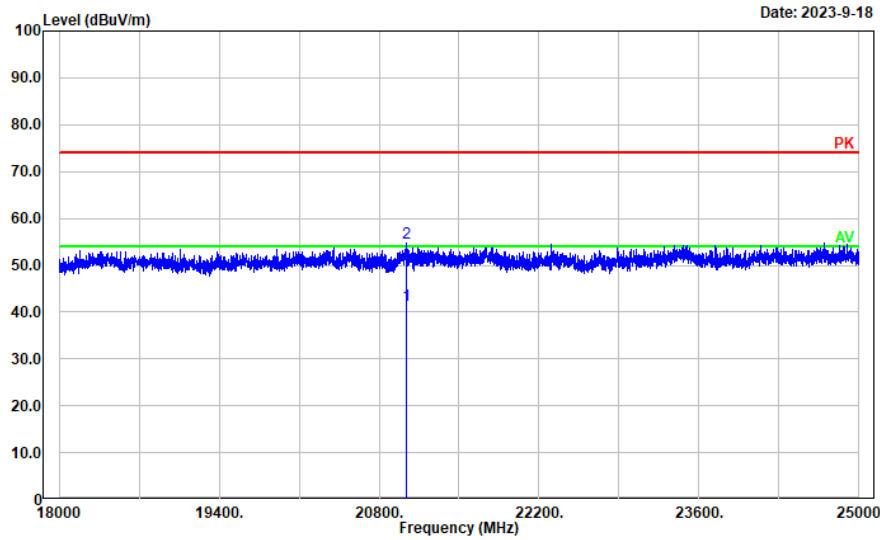


18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21042.810	36.93	4.64	41.57	54.00	12.43	Average
2	21042.810	50.04	4.64	54.68	74.00	19.32	Peak

Vertical

Project No.: CR230848226-RF
Tester: Coco Tian
Polarization: Vertical
Note:

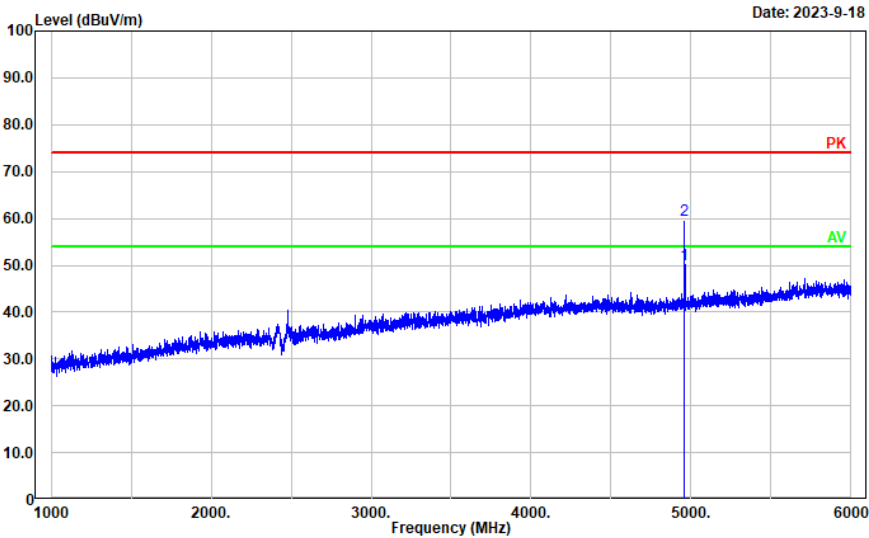


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4960.000	38.99	11.24	50.23	54.00	3.77	Average
2	4960.000	48.42	11.24	59.66	74.00	14.34	Peak

Vertical

Project No.: CR230848226-RF
Tester: Coco Tian
Polarization: Vertical
Note:

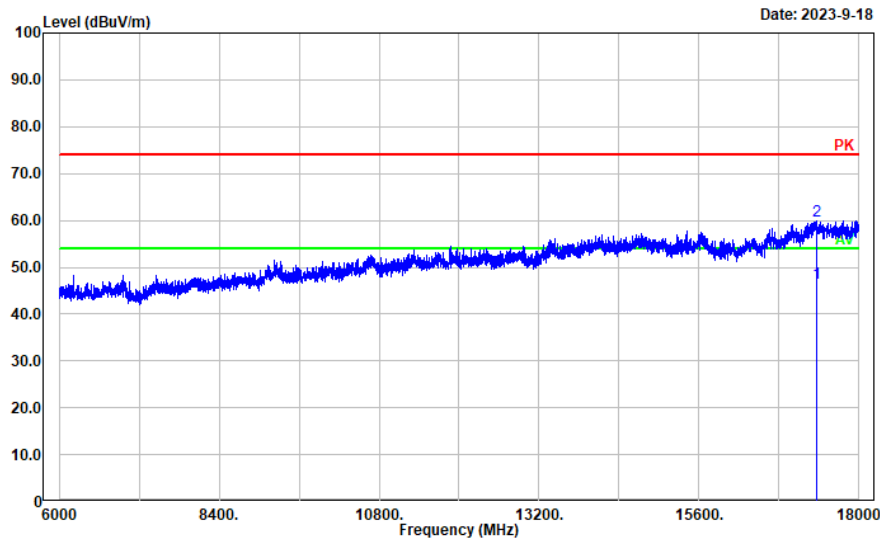


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	17359.070	18.90	27.79	46.69	54.00	7.31	Average
2	17359.070	32.15	27.79	59.94	74.00	14.06	Peak

Vertical

Project No.: CR230848226-RF
Tester: Coco Tian
Polarization: Vertical
Note:

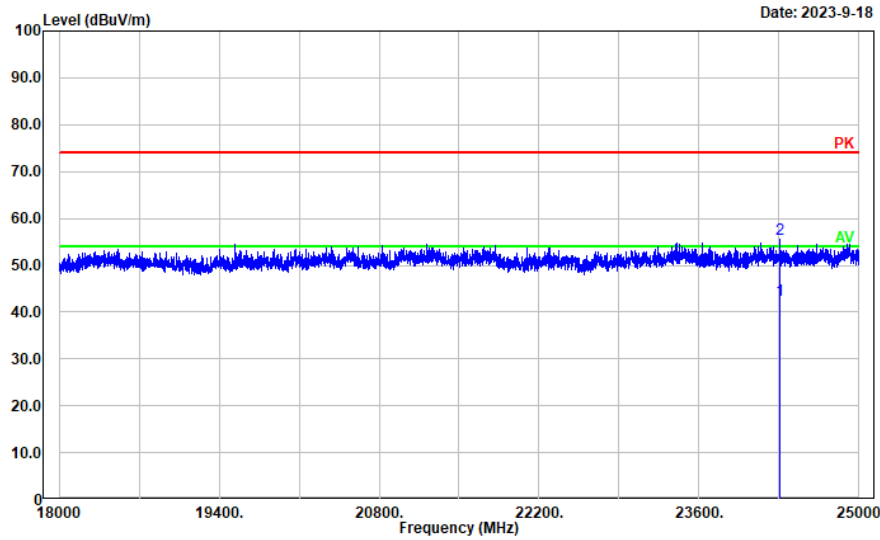

18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	24311.060	37.56	5.11	42.67	54.00	11.33	Average
2	24311.060	50.33	5.11	55.44	74.00	18.56	Peak

4.3 6 dB Emission Bandwidth

Serial Number:	2A3A-4	Test Date:	2023/9/16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----


Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40-N	102259	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE 1Mbps	2402	0.666	≥ 0.5
	2440	0.666	≥ 0.5
	2480	0.666	≥ 0.5
BLE 2Mbps	2402	1.296	≥ 0.5
	2440	1.308	≥ 0.5
	2480	1.332	≥ 0.5

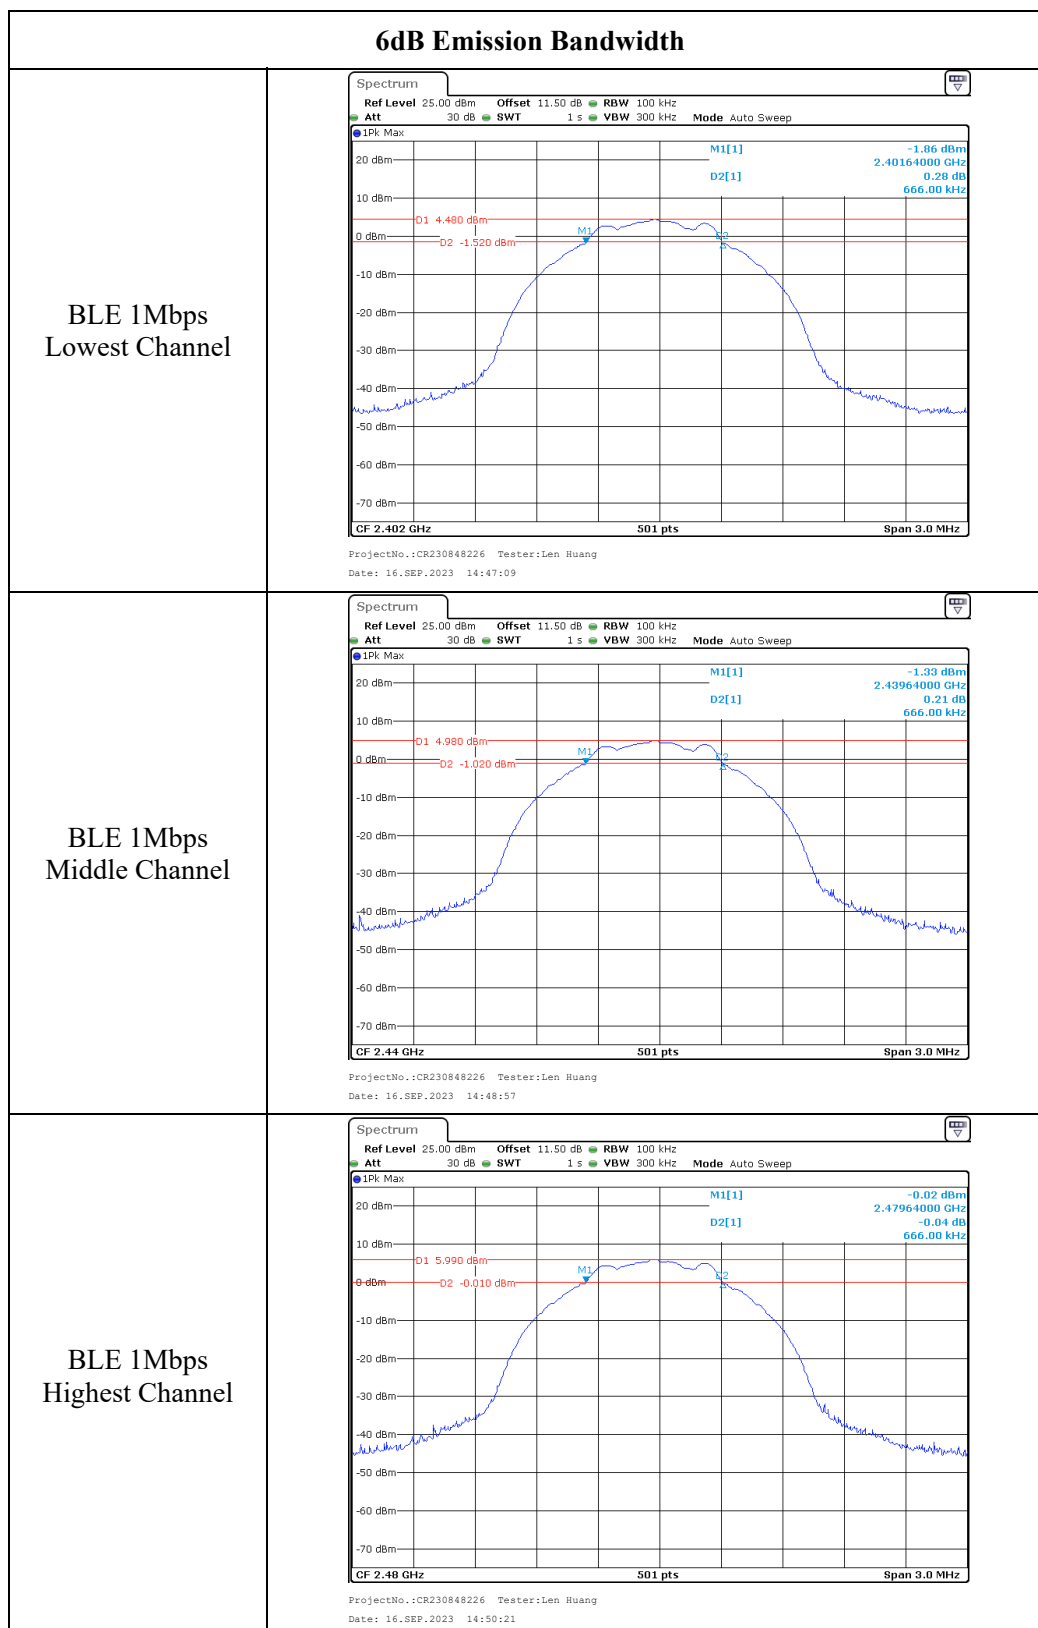

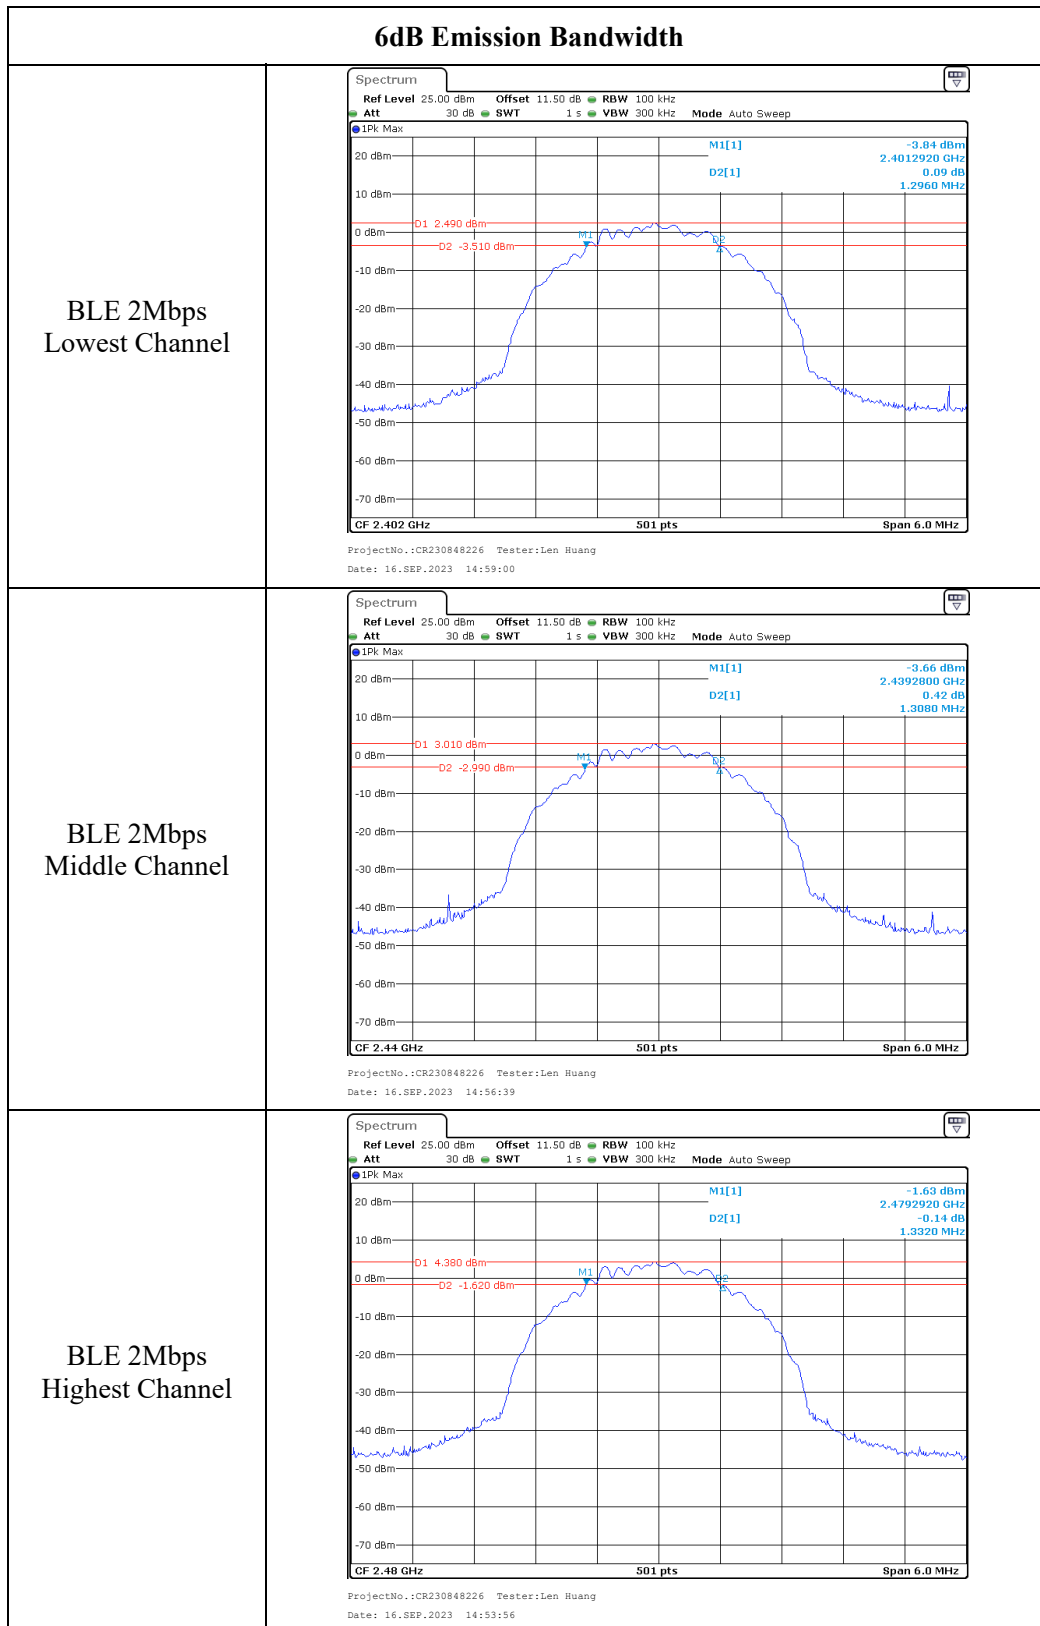

4.4 Maximum Conducted Output Power

Serial Number:	2A3A-4	Test Date:	2023/9/16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:




Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40-N	102259	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).




Test Data:

Test Modes	Test Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)
BLE 1Mbps	2402	6.20	≤30
	2440	6.46	≤30
	2480	5.70	≤30
BLE 2Mbps	2402	5.75	≤30
	2440	6.18	≤30
	2480	7.33	≤30

Maximum Conducted Peak Output Power

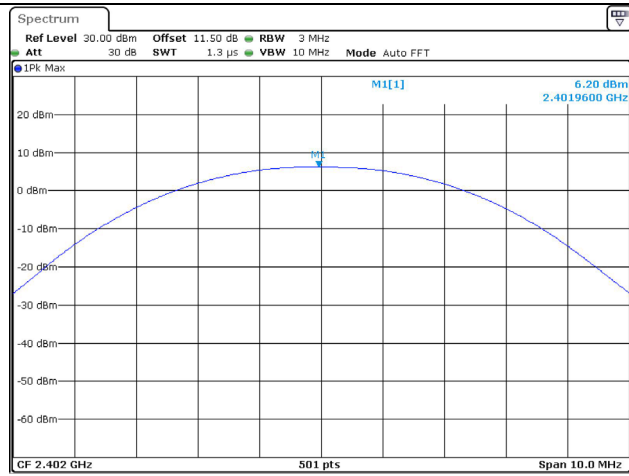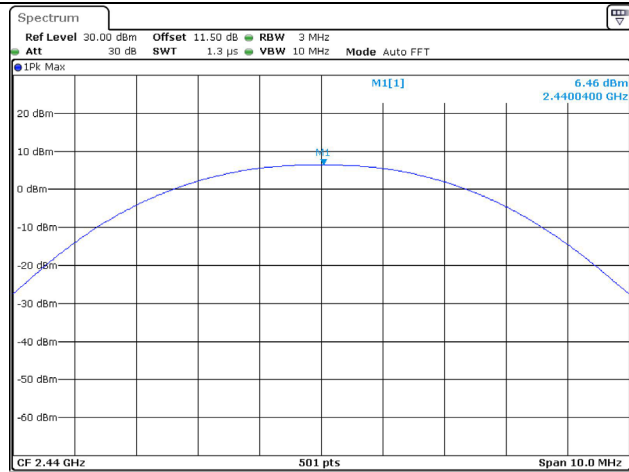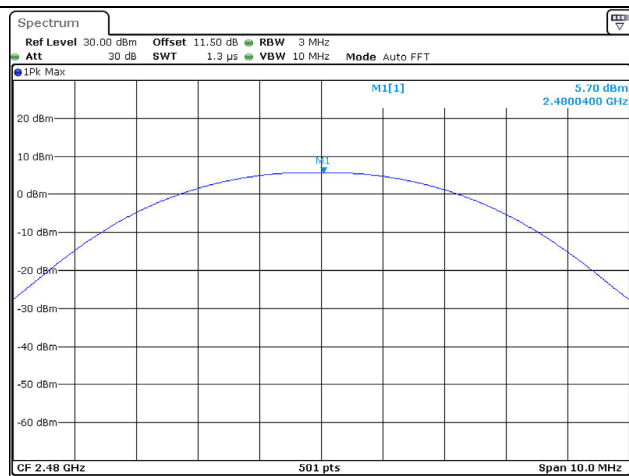BLE 1Mbps
Lowest ChannelBLE 1Mbps
Middle ChannelBLE 1Mbps
Highest Channel

Maximum Conducted Peak Output Power

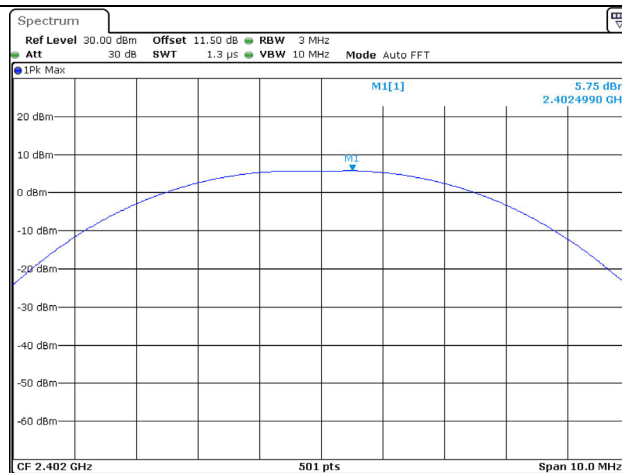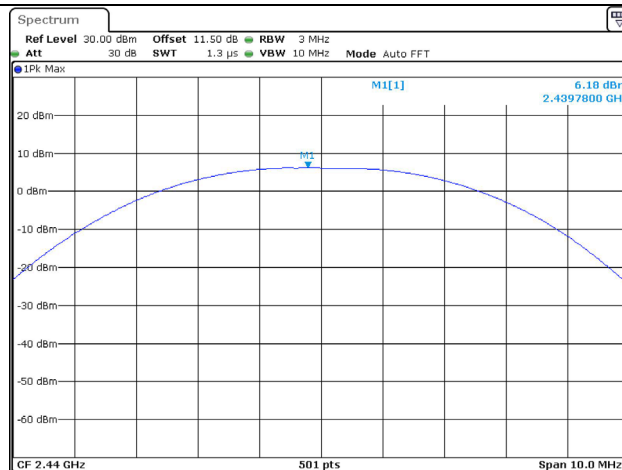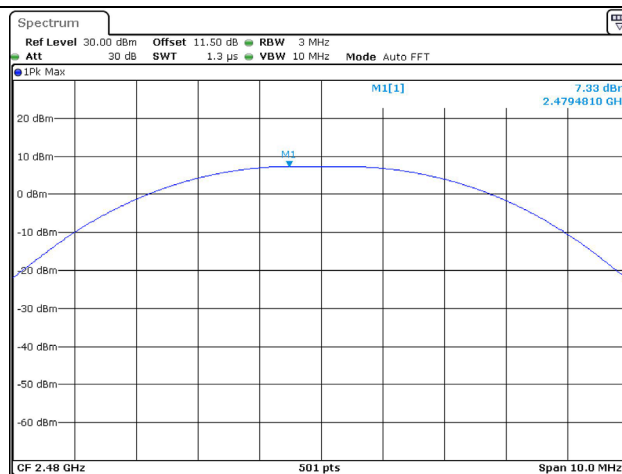BLE 2Mbps
Lowest ChannelProjectNo.:CR230848226 Tester:Len Huang
Date: 16.SEP.2023 14:44:48BLE 2Mbps
Middle ChannelProjectNo.:CR230848226 Tester:Len Huang
Date: 16.SEP.2023 14:43:05BLE 2Mbps
Highest ChannelProjectNo.:CR230848226 Tester:Len Huang
Date: 16.SEP.2023 14:41:31

4.5 Maximum power spectral density

Serial Number:	2A3A-4	Test Date:	2023/9/16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----




Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40-N	102259	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	2402	-10.67	≤8.00
	2440	-10.42	≤8.00
	2480	-11.28	≤8.00
BLE 2Mbps	2402	-14.78	≤8.00
	2440	-14.68	≤8.00
	2480	-14.05	≤8.00

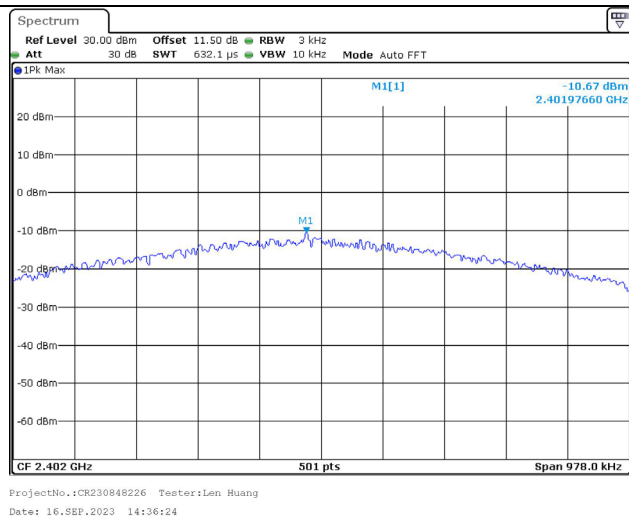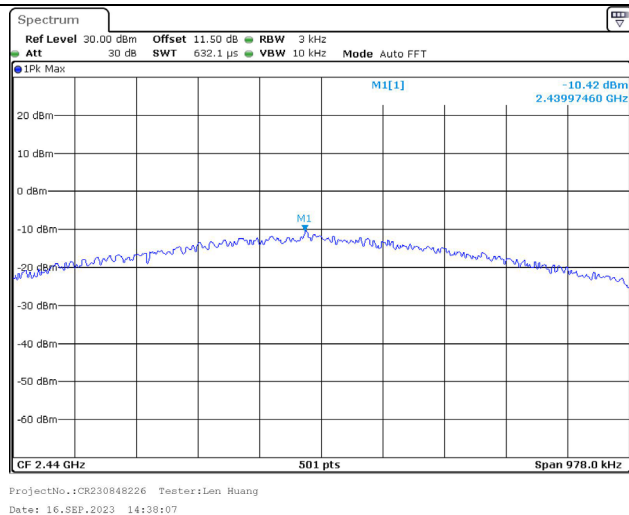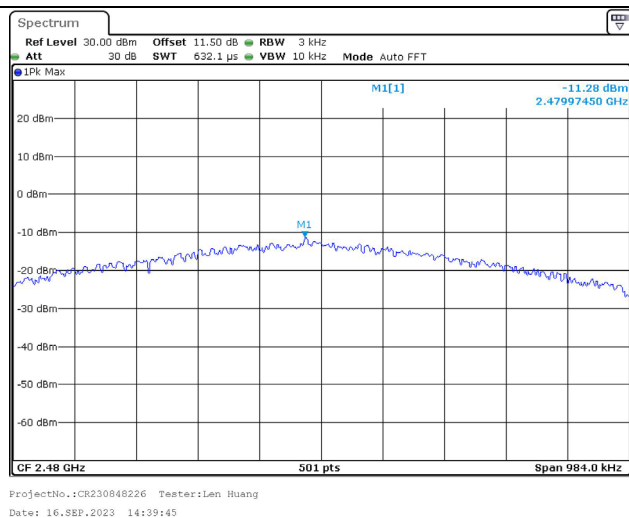Maximum power spectral densityBLE 1Mbps
Lowest ChannelBLE 1Mbps
Middle ChannelBLE 1Mbps
Highest Channel

BLE 2Mbps
Lowest Channel



BLE 2Mbps
Middle Channel



BLE 2Mbps
Highest Channel



4.6 100 kHz Bandwidth of Frequency Band Edge

Serial Number:	2A3A-4	Test Date:	2023/9/16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.8	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40-N	102259	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


100 kHz Bandwidth of Frequency Band Edge

BLE 1Mbps
Lowest Band edge

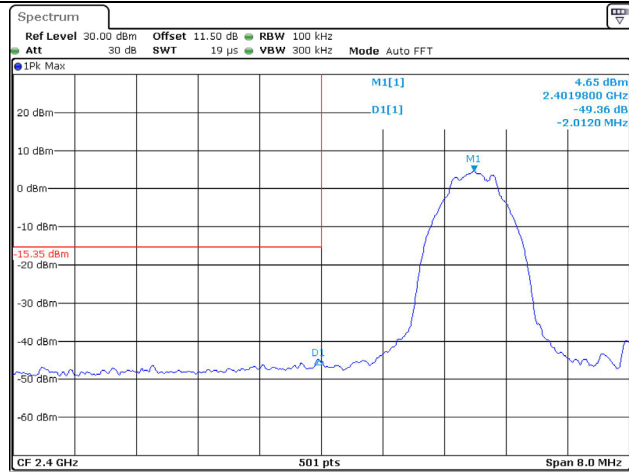



ProjectNo.:CR230848226 Tester:Len Huang
Date: 16.SEP.2023 14:36:51

BLE 1Mbps
Highest Band edge

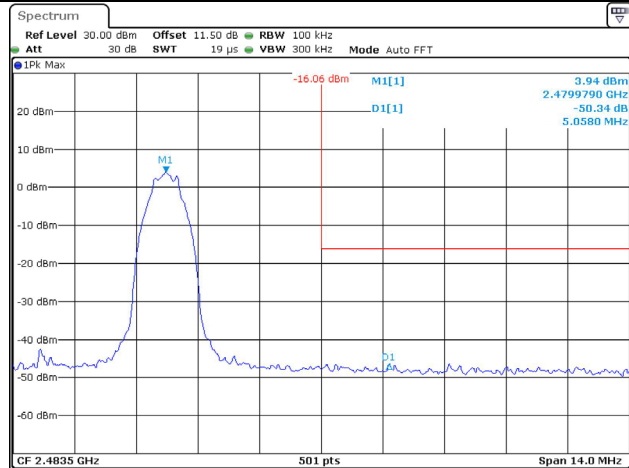

ProjectNo.:CR230848226 Tester:Len Huang
Date: 16.SEP.2023 14:40:06

100 kHz Bandwidth of Frequency Band Edge

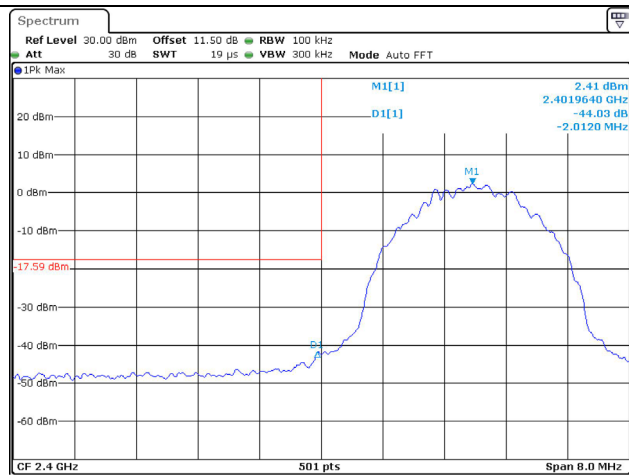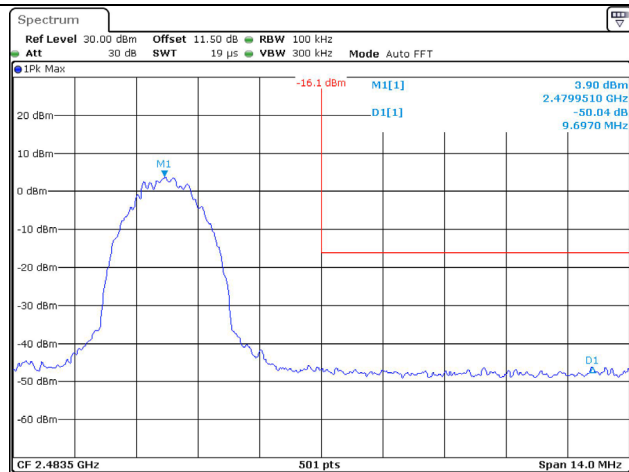BLE 2Mbps
Lowest Band edgeProjectNo.:CR230848226 Tester:Len Huang
Date: 16.SEP.2023 14:45:17BLE 2Mbps
Highest Band edgeProjectNo.:CR230848226 Tester:Len Huang
Date: 16.SEP.2023 14:42:00

4.7 Duty Cycle

Serial Number:	2A3A-4	Test Date:	2023/10/27
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26.8	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101.3
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40-N	102259	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (Hz)
BLE 1Mbps	2440	100	100	100.00	/	10
BLE 2Mbps	2440	100	100	100.00	/	10


Duty Cycle

BLE 1Mbps

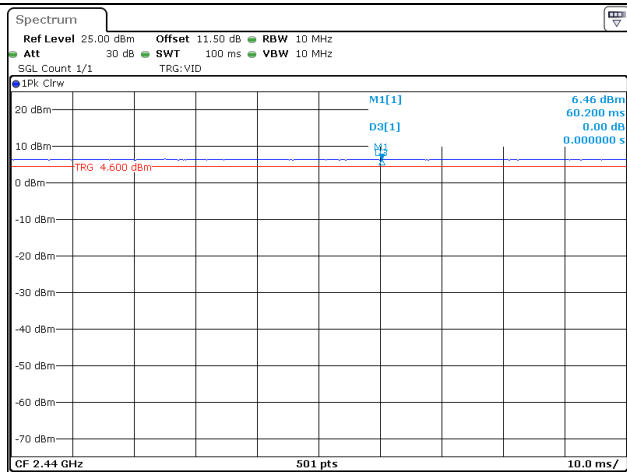

ProjectNo.:CR230848226 Tester:Len Huang
Date: 27.OCT.2023 19:17:48

BLE 2Mbps

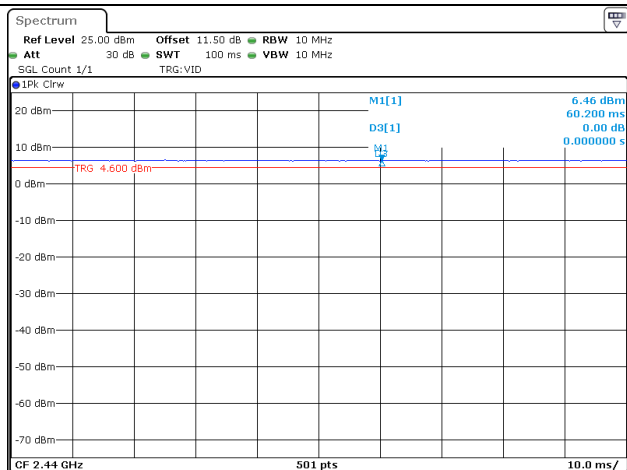

ProjectNo.:CR230848226 Tester:Len Huang
Date: 27.OCT.2023 19:18:30

5. RF EXPOSURE EVALUATION

5.1.1 Applicable Standard

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

5.1.2 Measurement Result

Operation Modes	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP		Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP (dBm)	MPE-Based Exemption
				(mW)	(dBm)				
BLE	2408-2480	19.88	200	768	28.85	8	2.5	8.35	Compliant
2.4G WLAN	2412-2462	19.80	200	768	28.85	25	2.5	25.35	Compliant

Note:

The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.

The WLAN 2.4G and BLE can't transmission simultaneously.

Result: The device compliant the MPE-Based Exemption at 20cm distances.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR230848226-EXP EUT EXTERNAL PHOTOGRAPHS and
CR230848226-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230848226-00B-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====