

产品规格书

PRODUCT SPECIFICATION SHEET

物料名称

APPELLATION: 无线H模组

产品型号

MODE: YKS-CD007-WL02

客户料号

No.:

生产方	工艺审核 TECHNICAL	品质审核 QUALITY	项目审核 PROJECT	开发审核 DEVELOPING

客户方	材料工程师 Materials Engineer	设计工程师 Engineer	主管审批 Approval	研发体系 R & D System


Manufacturer: Shenzhen Hongda Weixin Electronic Technology Co., Ltd.



变更履历表

[illegible]

1. DIMENSIONS & MARKING:

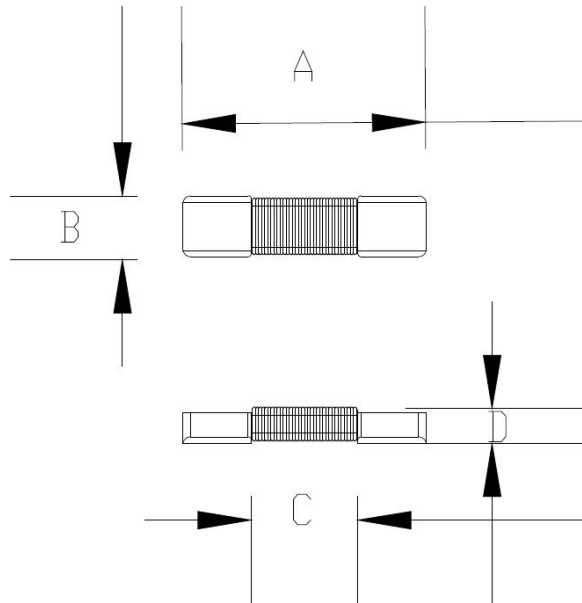

Symbol	A	B	C	D	
Value(mm)	16.00 ± 1.00	4.20 ± 1.00	7.0 ± 0.50	2.20 ± 0.50	

2. ELECTRICAL SPECIFICATIONS @25°C


- 2.1 Operating Temperature range: -40°C~+85°C
- 2.2 Storage temperature range: -25°C TO +125°C
- 2.3 The test frequency: 111 KHz, 100mV @ 25°C,65%
- 2.4 OCL : $20 \pm 10\%$ μ H .
- 2.5 Diameter : 0.08mm*105P
- 2.6 Turns Ratio: 10T
- 2.7 Q Value: 40 MIN
- 2.8 DCR: 75m Ω MAX
- 2.9 Turns of coil: 34TS

DRAWN BY:	CHECKED BY:	APPROVED BY:	CUSTOMER:
H E ₁₁			REV. : A
			PAGE: 3 Of 4

3、 Bill of materials:

序号	物料名称	物料规格	材料使用	备注
1	丝包线	0.2mm*31P	√	
2	自粘线	0.2mm*31P		
3	磁	16.0*4.2*2.2mm	√	
4	高温胶带	7.0*5.5*0.05mm	√	
5	背胶贴	7.0*5.5*0.1mm		
6	胶水	环保水性胶	√	
7	锡条	Sn97.3-0.7Cu	√	

4、 Packaging:

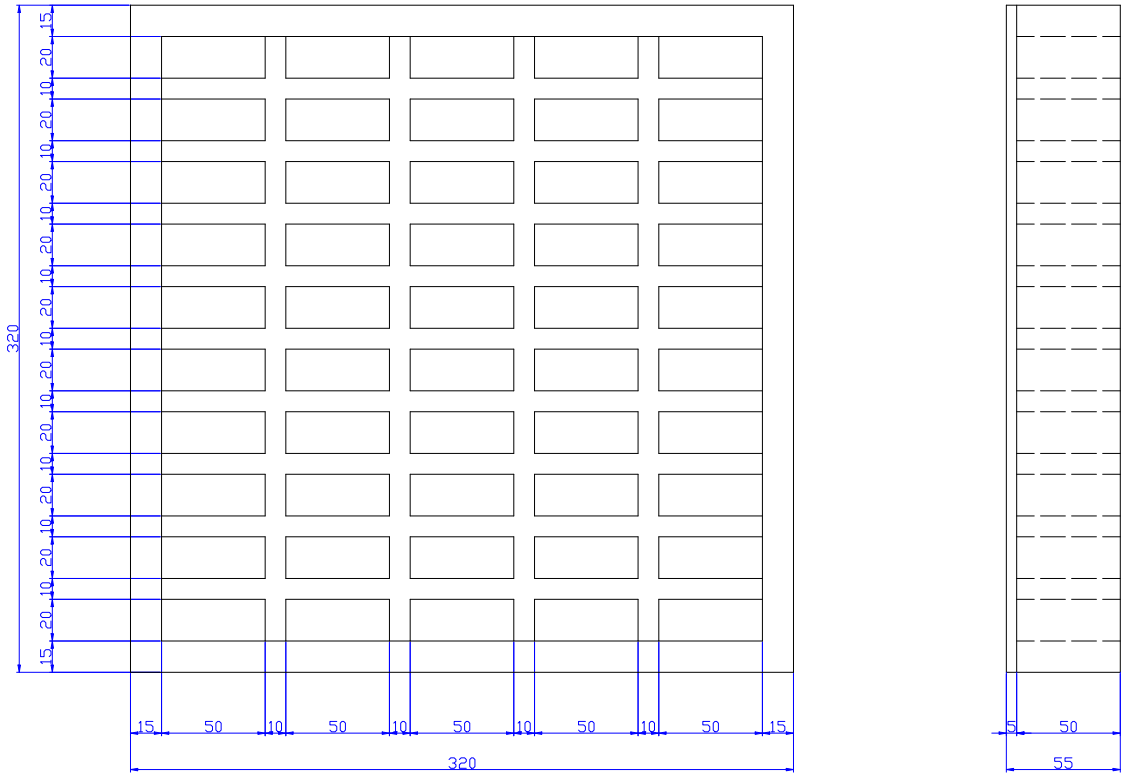

- 4.1 Quantity per grid: 6 PCS
- 4.2 Quantity per carton: 6*50 = 300PCS
- 4.3 Quantity per carton: 300*3 = 900PCS
- 4.4 Carton size:150*350*180mm.

DRAWN BY:	CHECKED BY:	APPROVED BY:	CUSTOMER:
深 H E			REV.: A
			PAGE: 4 Of 4