



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057

Page (36) of (71)

Test results (Above 1 000 MHz)

Mode: LE 1 Mbps(Left unit)

Distance of measurement: 3 meter


Channel: 00

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 330.87	48.11	Peak	H	-7.48	-	40.63	74.00	33.37
1 332.67	45.78	Peak	V	-7.47	-	38.31	74.00	35.69
4 803.60	40.85	Peak	H	7.10	-	47.95	74.00	26.05

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 326.86	41.05	Peak	H	-0.88	-	40.17	74.00	33.83
2 373.69	39.95	Peak	V	-0.84	-	39.11	74.00	34.89

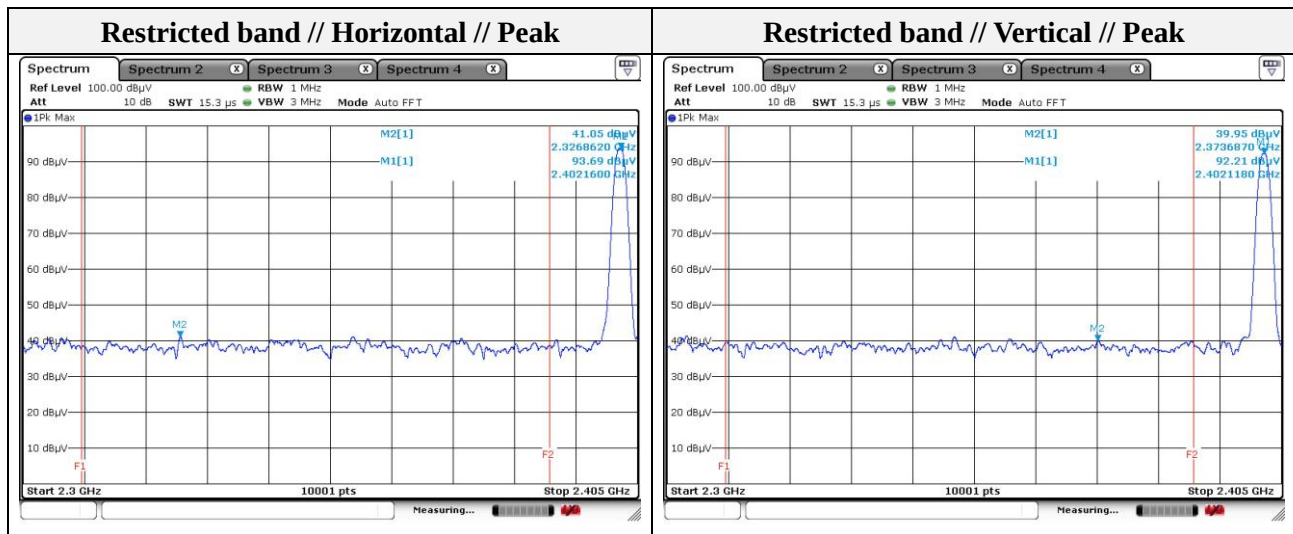

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057

Page (37) of (71)

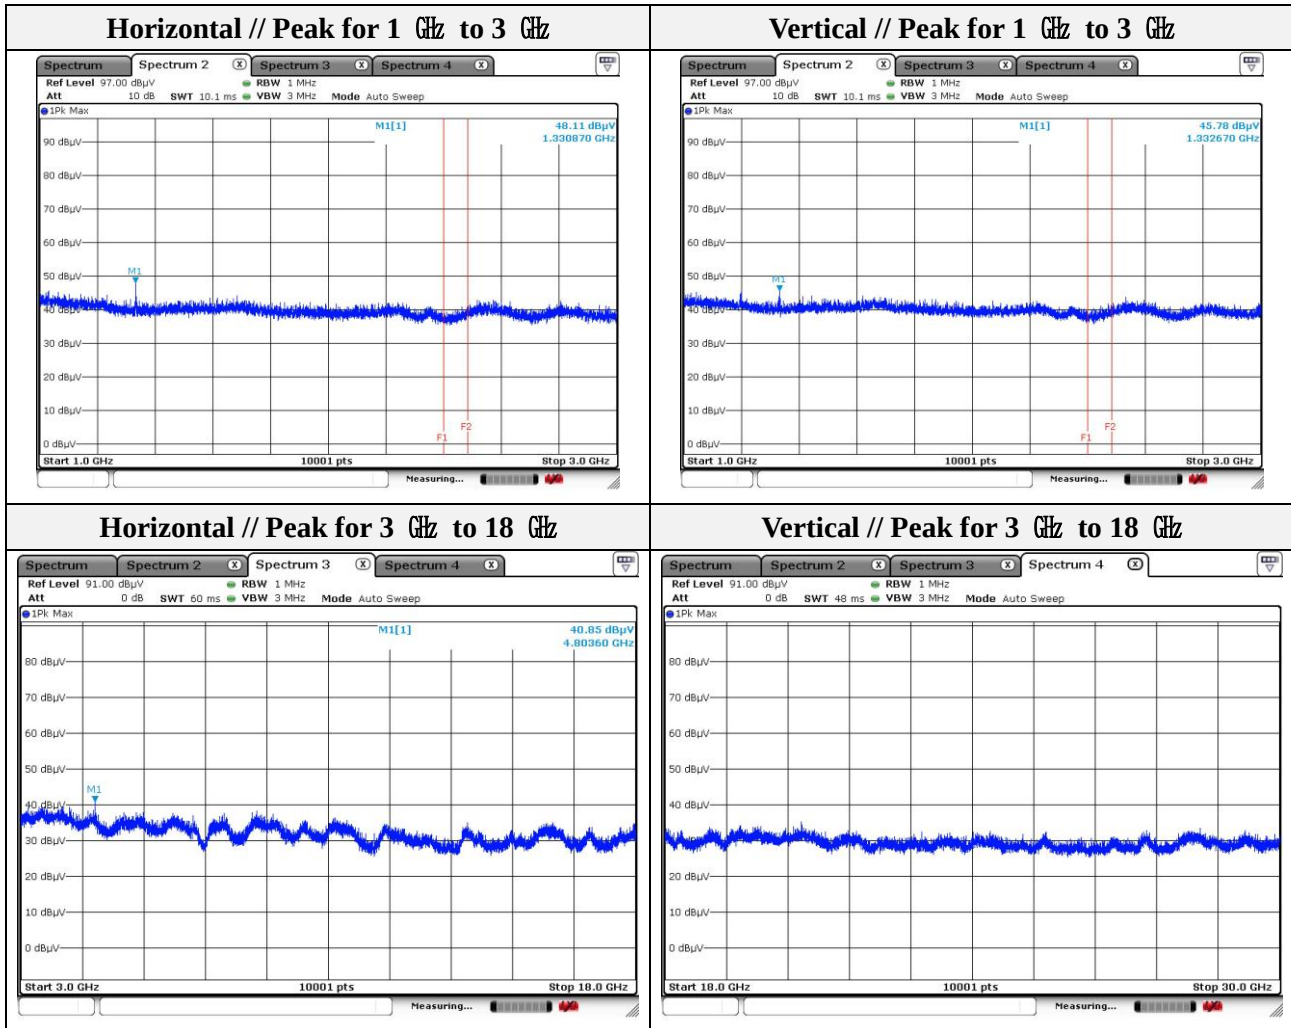

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-22T0057
Page (38) of (71)


Mode: LE 1 Mbps(Left unit)

Distance of measurement: 3 meter

Channel: 20

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 035.50	44.91	Peak	V	-9.24	-	35.67	74.00	38.33
1 327.27	49.37	Peak	H	-7.50	-	41.87	74.00	32.13
4 884.60	38.54	Peak	H	7.72	-	46.26	74.00	27.74

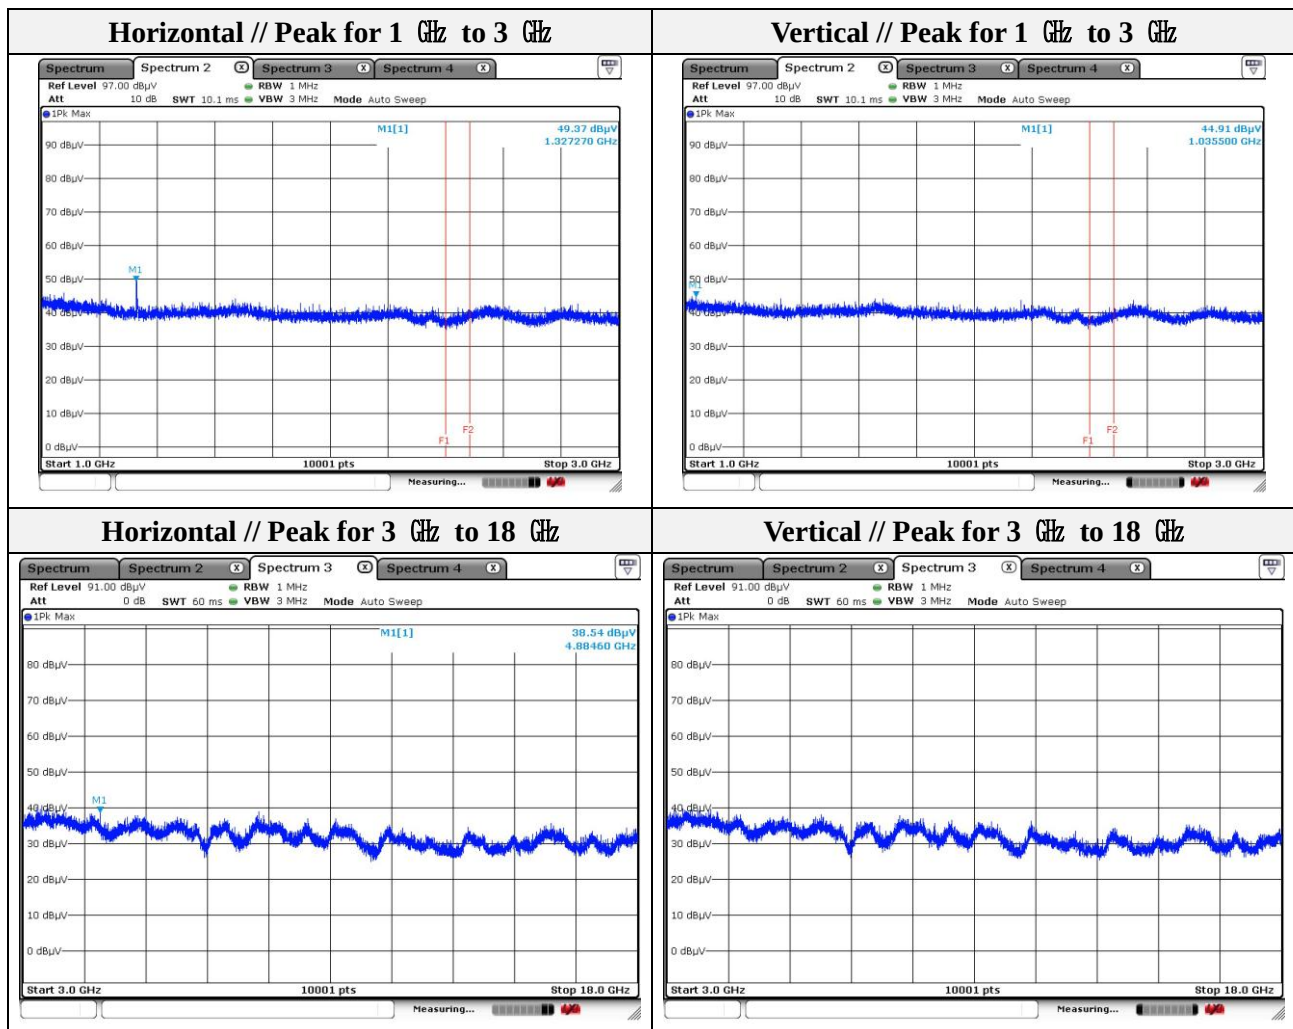

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




Mode: LE 1 Mbps(Left unit)
Distance of measurement: 3 meter
Channel: 39

- **Spurious**


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 327.07	49.24	Peak	H	-7.50	-	41.74	74.00	32.26
1 664.43	45.08	Peak	V	-4.84	-	40.24	74.00	33.76
4 959.60	38.47	Peak	H	8.30	-	46.77	74.00	27.23

- **Band edge**

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.61	43.57	Peak	V	0.77	-	42.80	74.00	31.20
2 487.31	41.80	Peak	H	-0.77	-	41.03	74.00	32.97

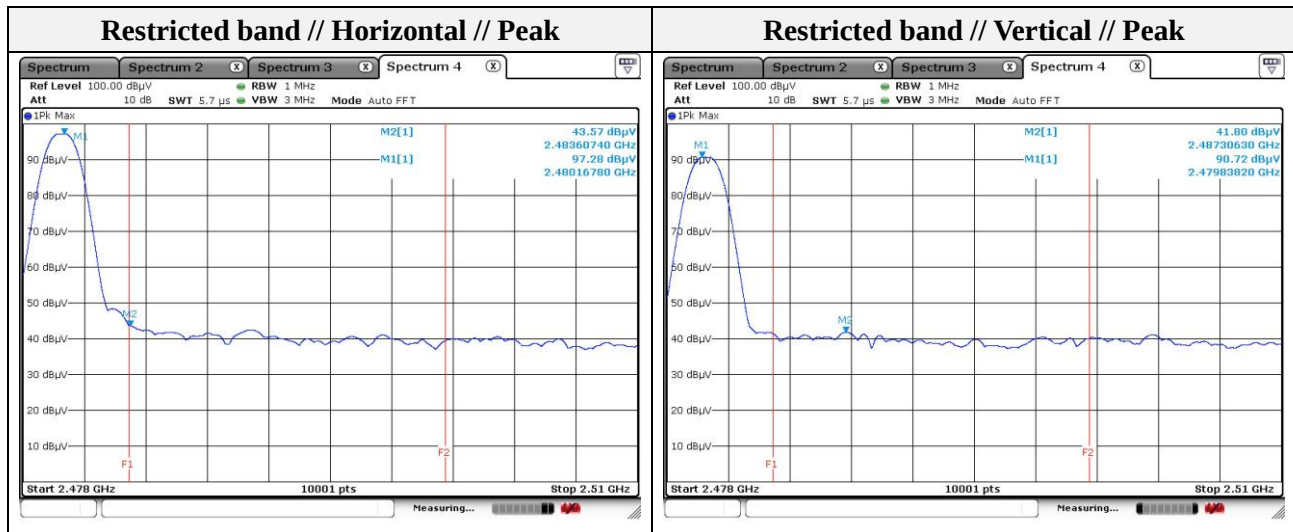

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

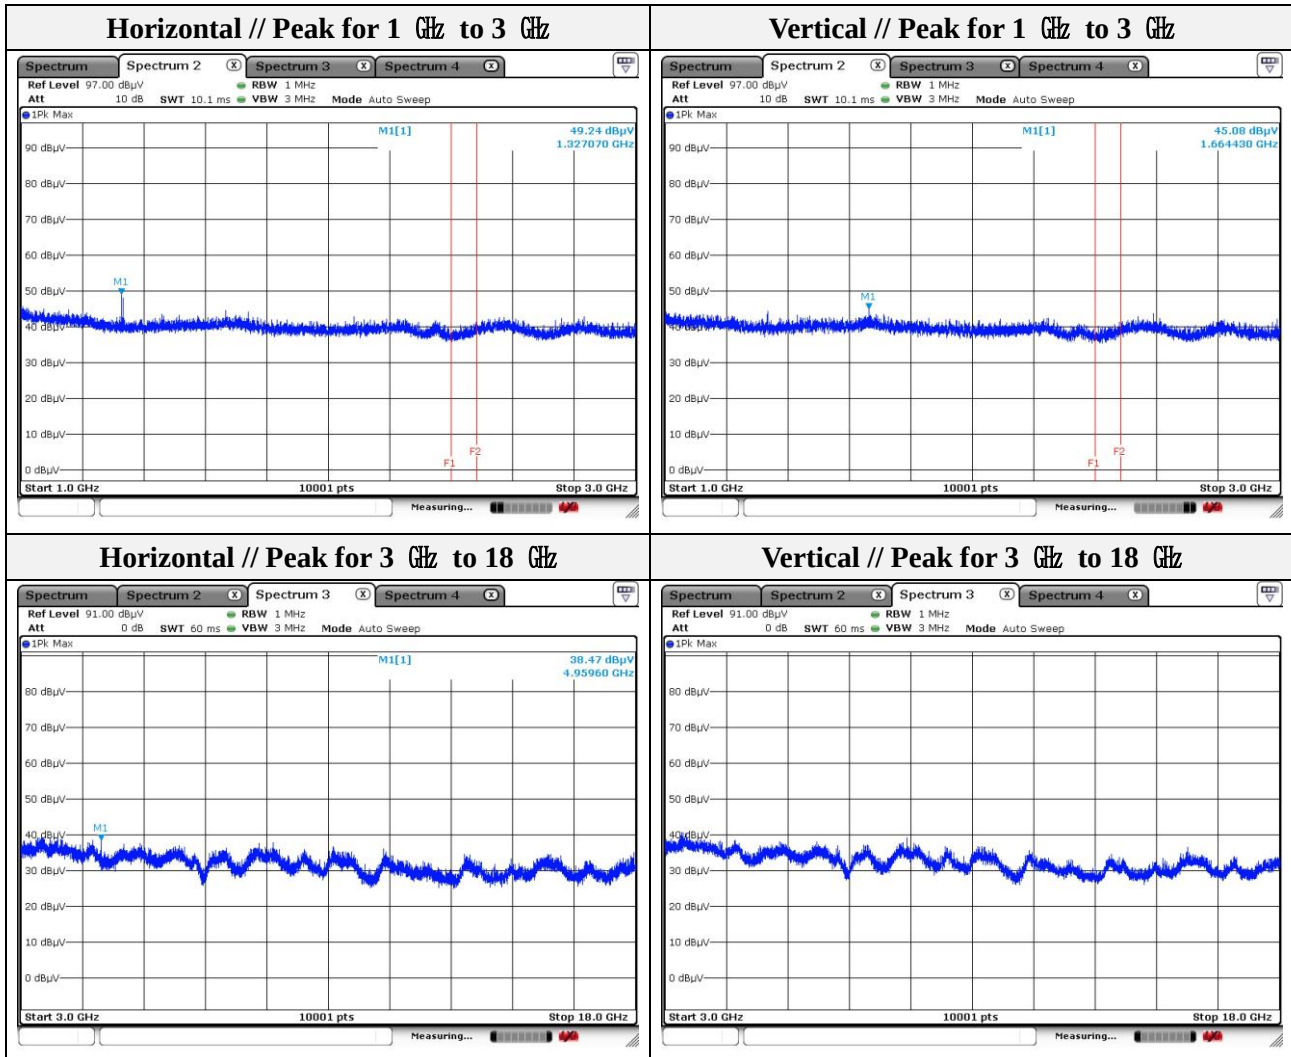

Note.

1. Average test would be performed if the peak result were greater than the average limit.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057


Page (41) of (71)

Test results (18 GHz to 30 GHz) – Worst case

Mode: LE 1 Mbps(Left unit)

Distance of measurement: 3 meter

Channel: 00 (Worst case)

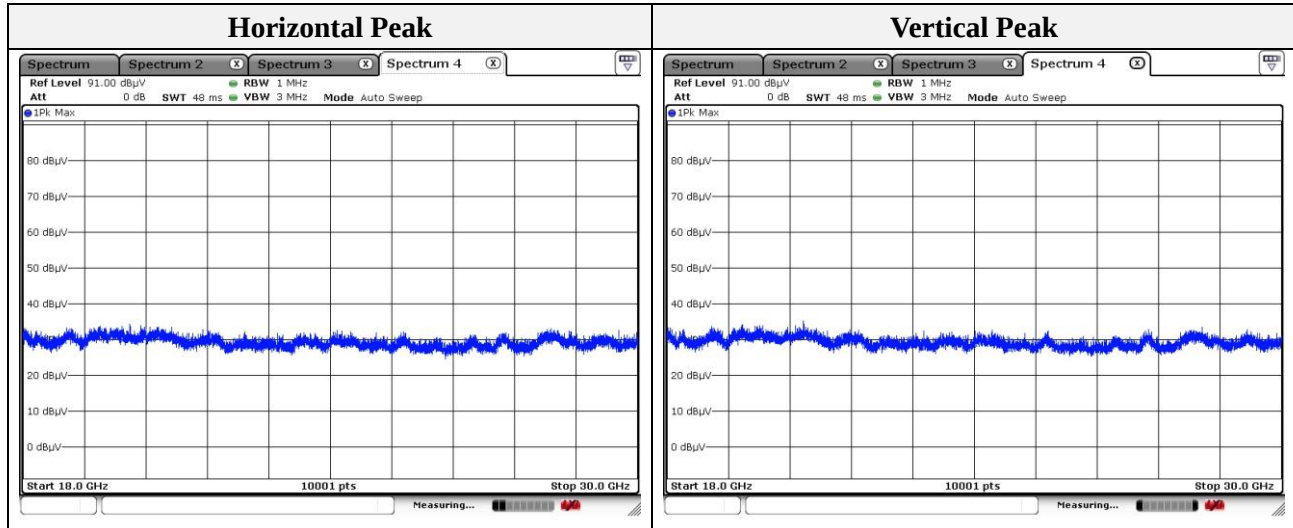

Note.

No spurious emission were detected above 18 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057

Page (42) of (71)

Test results (Above 1 000 MHz)

Mode: LE 2 Mbps (Left unit)

Distance of measurement: 3 meter


Channel: 00

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 065.89	45.05	Peak	V	-9.06	-	35.99	74.00	38.01
1 330.47	48.37	Peak	H	-7.48	-	40.89	74.00	33.11
4 805.10	41.22	Peak	H	7.11	-	48.33	74.00	25.67

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 348.04	40.73	Peak	H	-0.87	-	39.86	74.00	34.14
2 375.63	41.75	Peak	V	-0.84	-	40.91	74.00	33.09

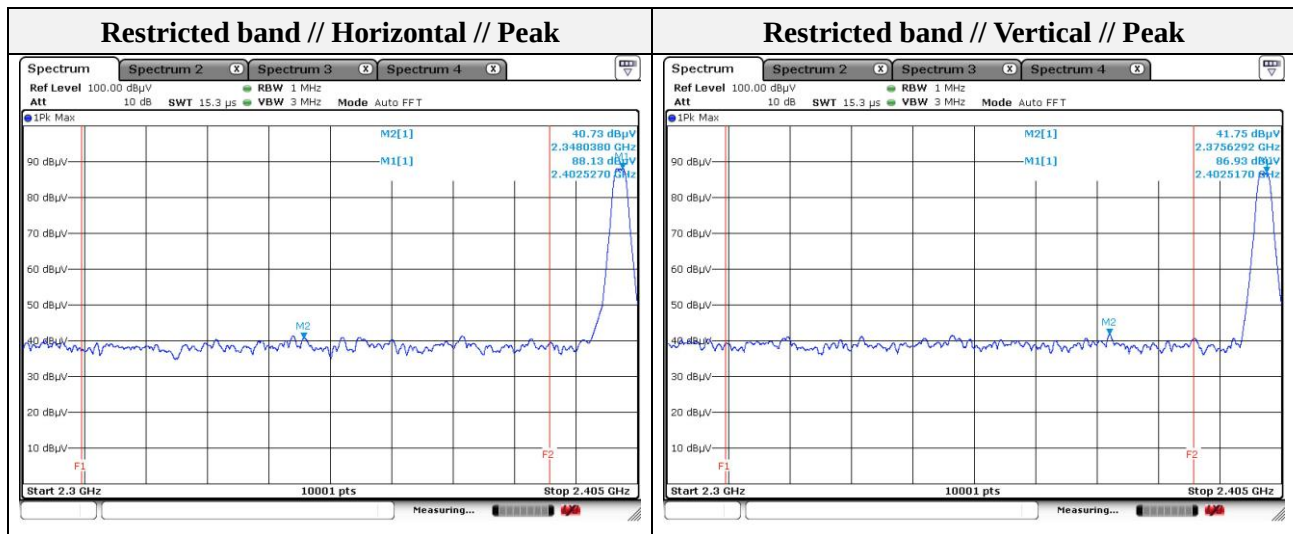

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057

Page (43) of (71)

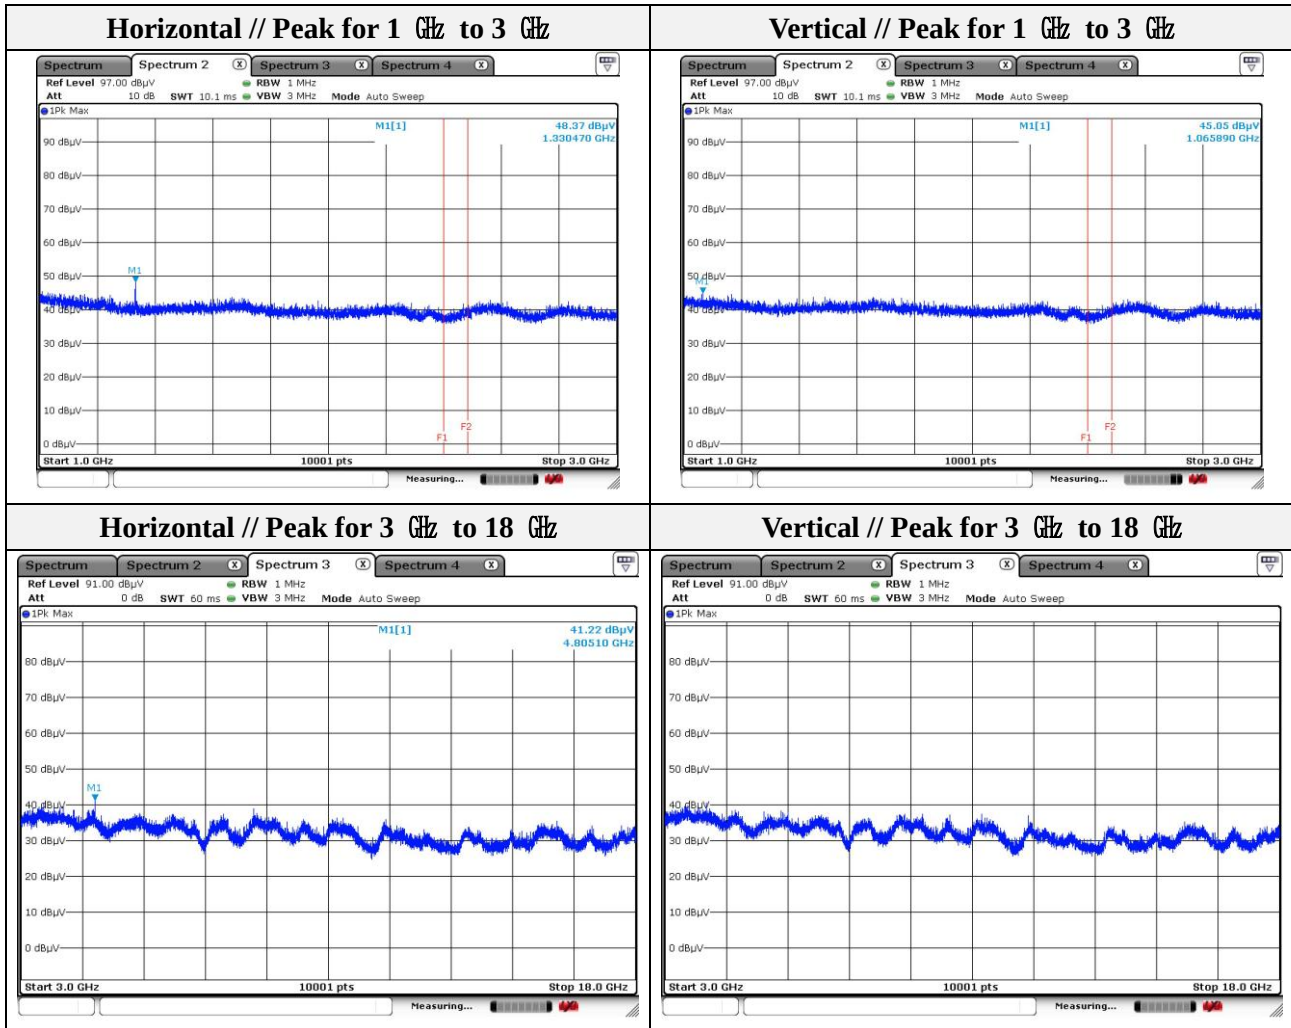

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-22T0057
Page (44) of (71)


Mode: LE 2 Mbps (Left unit)

Distance of measurement: 3 meter

Channel: 20

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 035.30	44.32	Peak	V	-9.24	-	35.08	74.00	38.92
1 328.67	49.52	Peak	H	-7.49	-	42.03	74.00	31.97
4 884.60	39.04	Peak	H	7.72	-	46.76	74.00	27.24

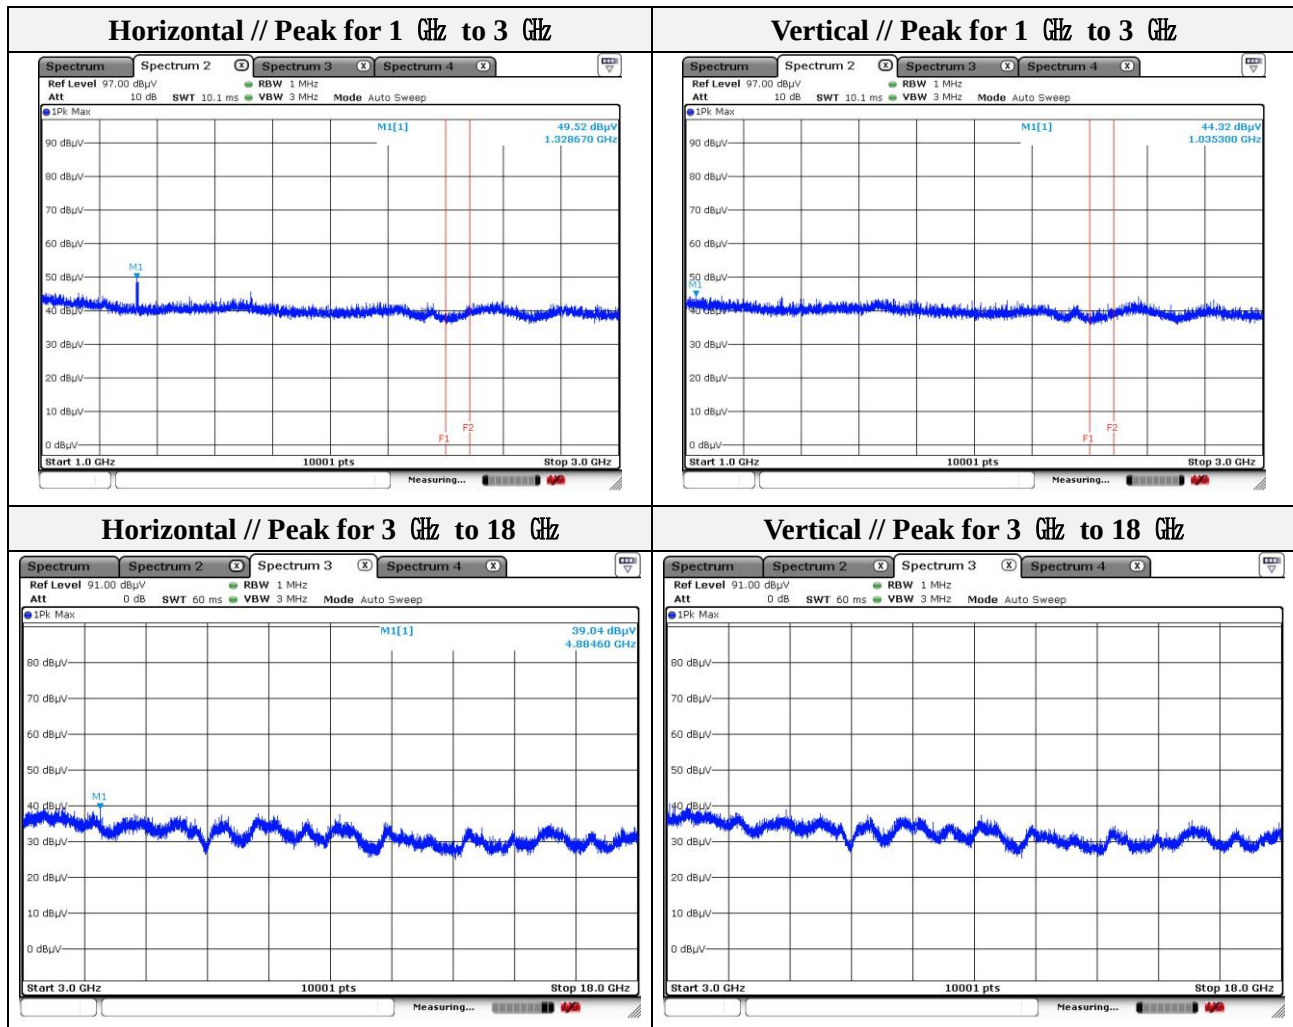

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Mode: LE 2 Mbps (Left unit)

Distance of measurement: 3 meter


Channel: 39

- Spurious


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 083.69	44.18	Peak	V	-8.96	-	35.22	74.00	38.78
1 330.47	45.81	Peak	H	-7.48	-	38.33	74.00	35.67
4 959.60	37.63	Peak	H	8.30	-	45.93	74.00	28.07

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.50	42.63	Peak	V	-0.77	-	41.86	74.00	32.14
2 483.50	47.13	Peak	H	-0.77	-	46.36	74.00	27.64

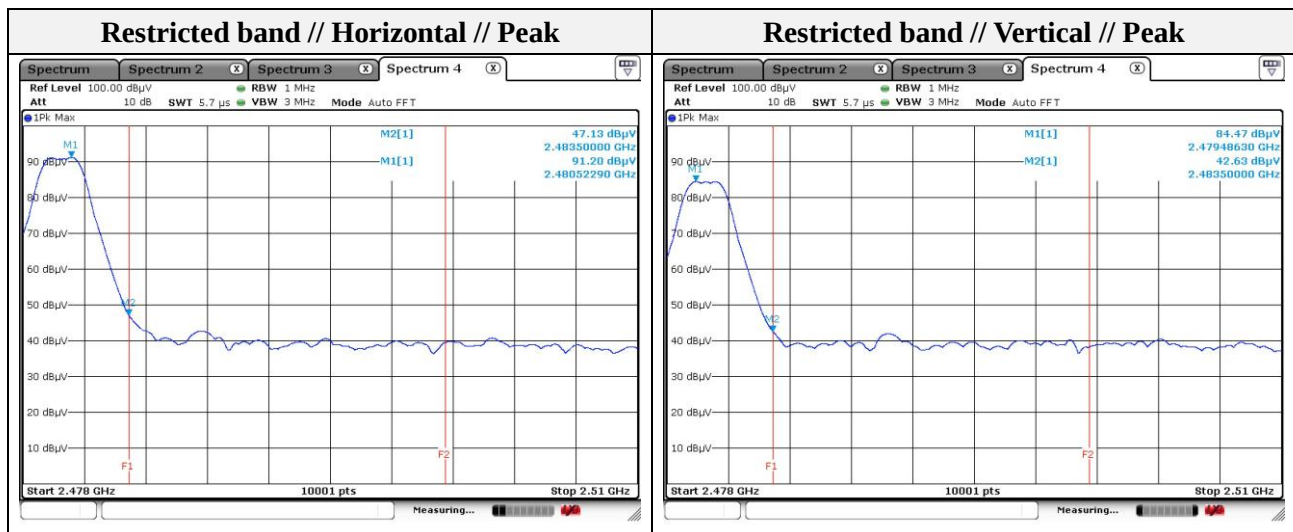

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

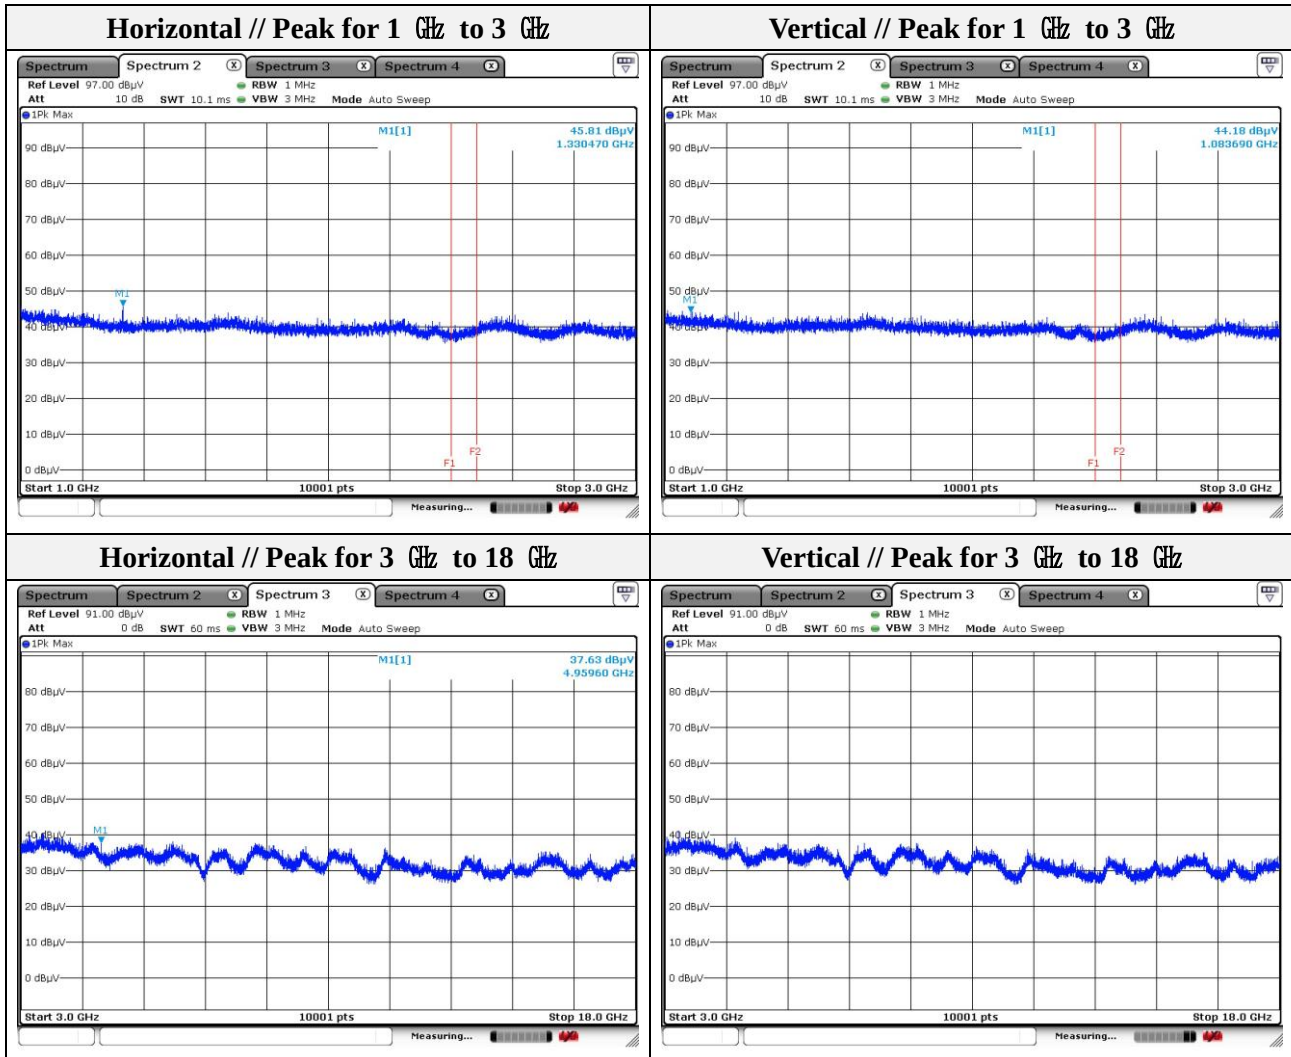

Note.

1. Average test would be performed if the peak result were greater than the average limit.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057


Page (47) of (71)

Test results (18 GHz to 30 GHz) – Worst case

Mode: LE 1 Mbps (Left unit)

Distance of measurement: 3 meter

Channel: 00 (Worst case)

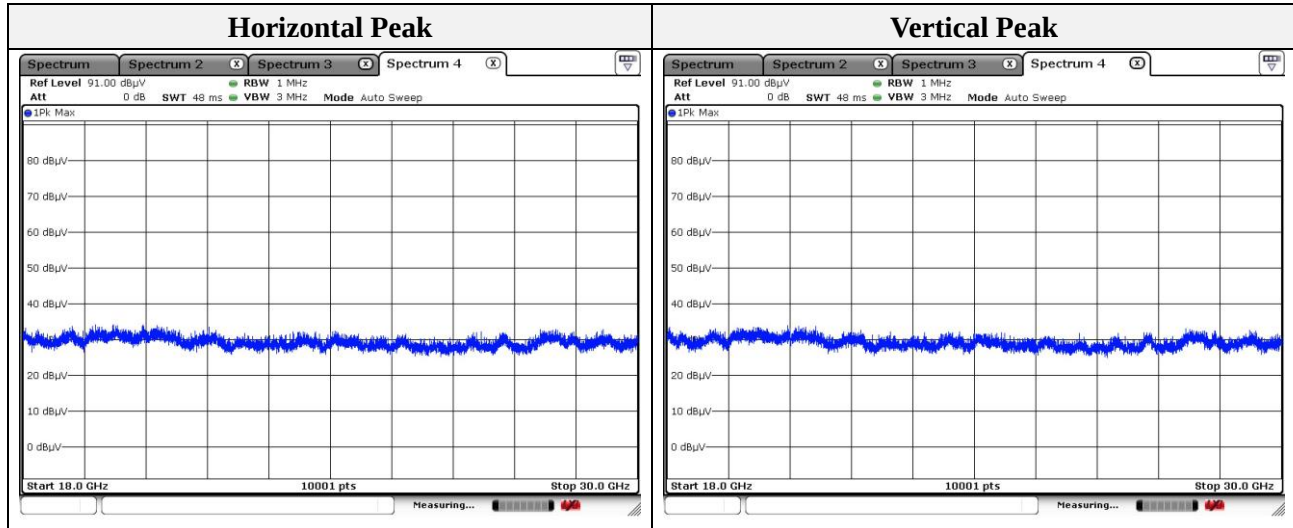

Note.

No spurious emission were detected above 18 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




Mode: LE 1 Mbps (Right unit)
Distance of measurement: 3 meter
Channel: 00

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 332.07	48.03	Peak	H	-7.47	-	40.56	74.00	33.44
1 332.67	45.78	Peak	V	-7.47	-	38.31	74.00	35.69
4 803.60	40.05	Peak	H	7.10	-	47.15	74.00	26.85

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 341.61	41.23	Peak	H	-0.87	-	40.36	74.00	33.64
2 362.61	41.41	Peak	V	-0.85	-	40.56	74.00	33.44

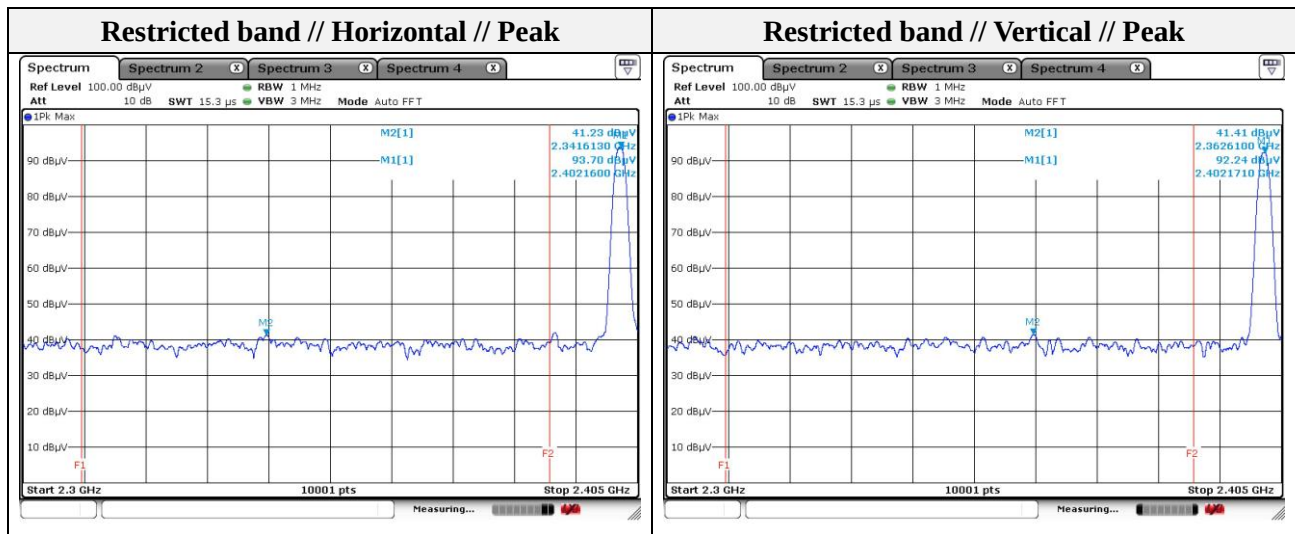


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-22T0057
Page (49) of (71)

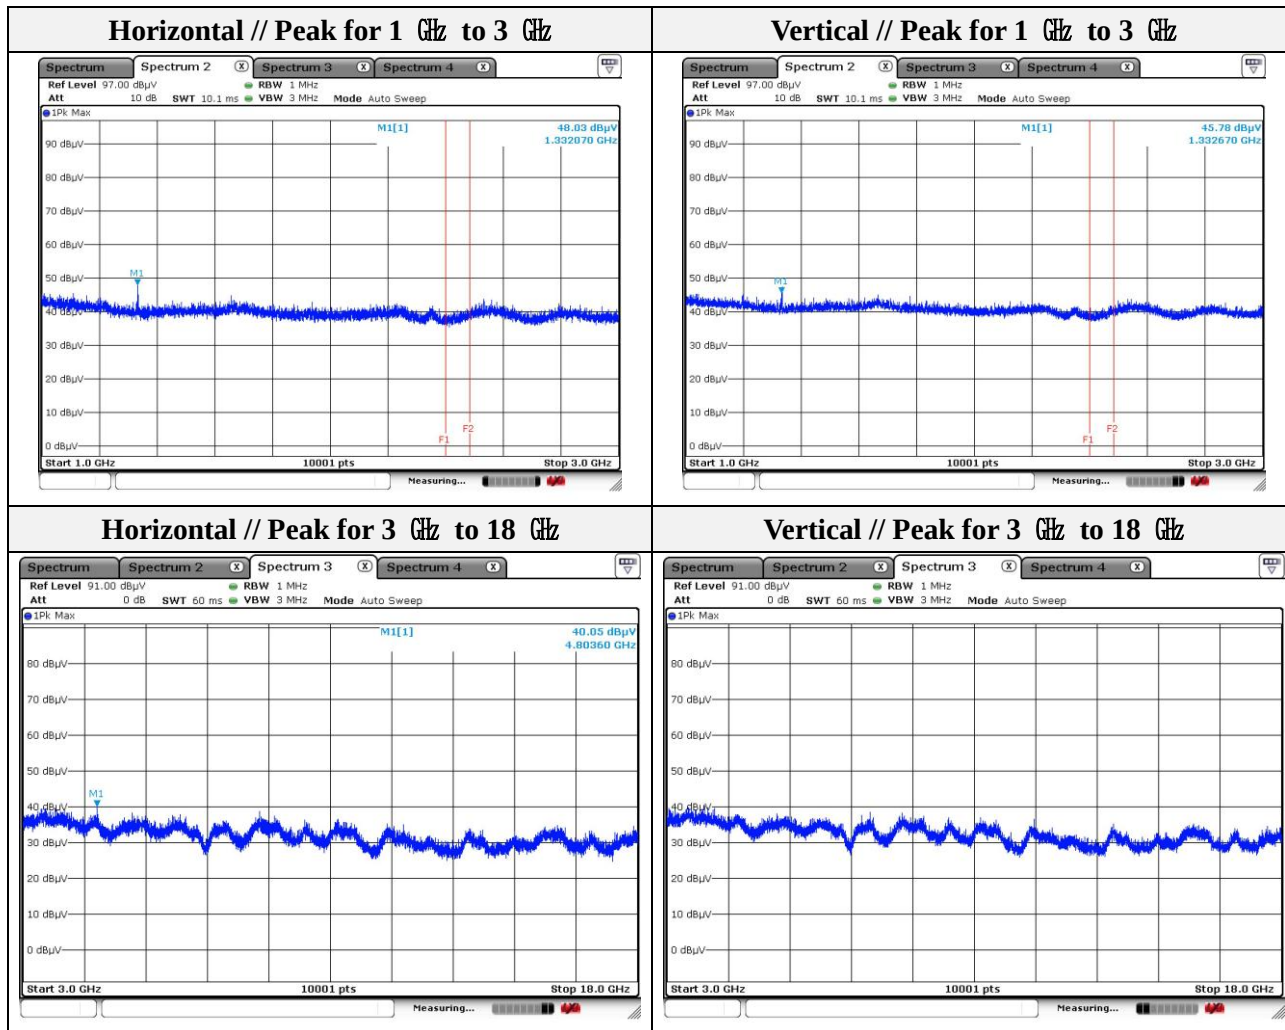

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057

Page (50) of (71)


Mode: LE 1 Mbps (Right unit)

Distance of measurement: 3 meter

Channel: 20

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 329.67	49.71	Peak	H	-7.48	-	42.23	74.00	31.77
1 332.67	44.38	Peak	V	-7.47	-	36.91	74.00	37.09
4 884.60	39.78	Peak	H	7.72	-	47.50	74.00	26.50

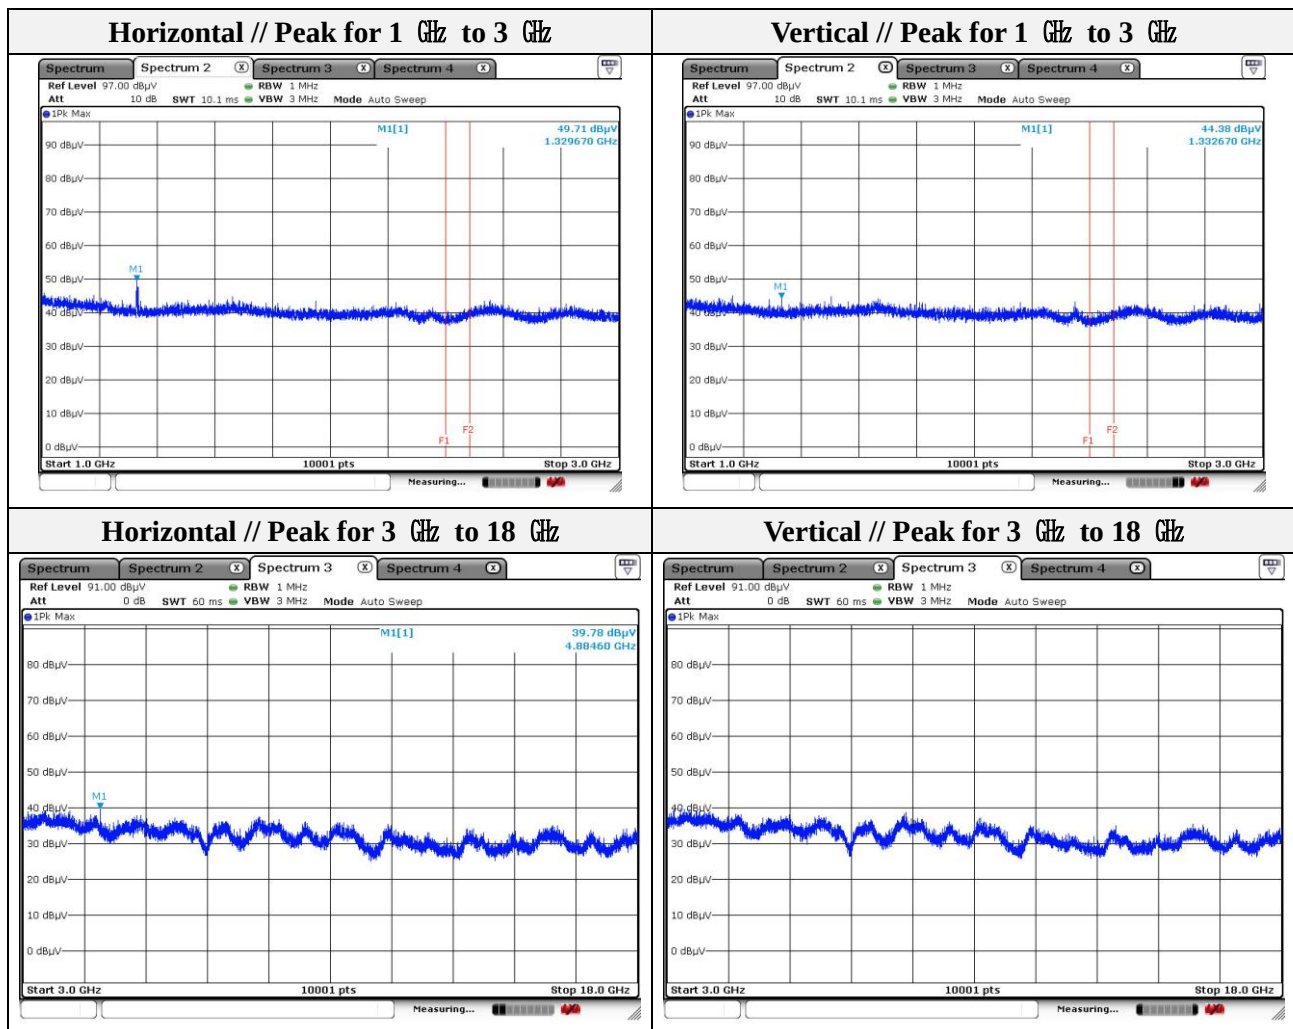

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-22T0057
Page (51) of (71)


Mode: LE 1 Mbps (Right unit)
Distance of measurement: 3 meter
Channel: 39

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 328.47	49.98	Peak	H	-7.49	-	42.49	74.00	31.51
1 665.83	45.44	Peak	V	-4.82	-	40.62	74.00	33.38
4 959.60	38.19	Peak	H	8.30	-	46.49	74.00	27.51

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.61	43.89	Peak	H	-0.77	-	43.12	74.00	30.88
2 483.62	40.82	Peak	V	-0.77	-	40.05	74.00	33.95

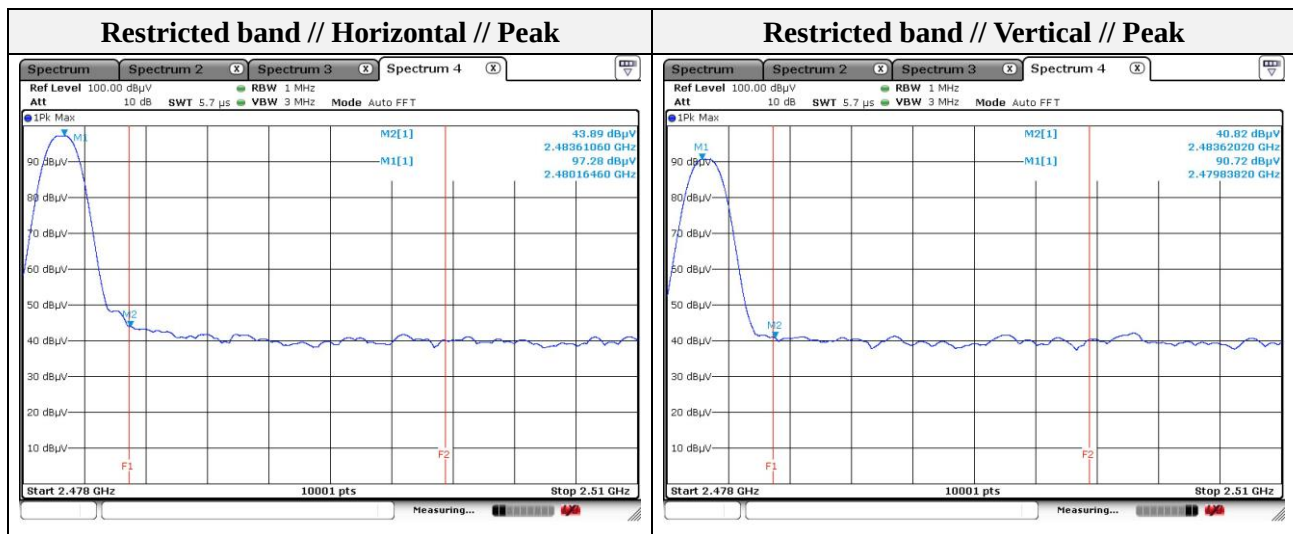

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057

Page (52) of (71)

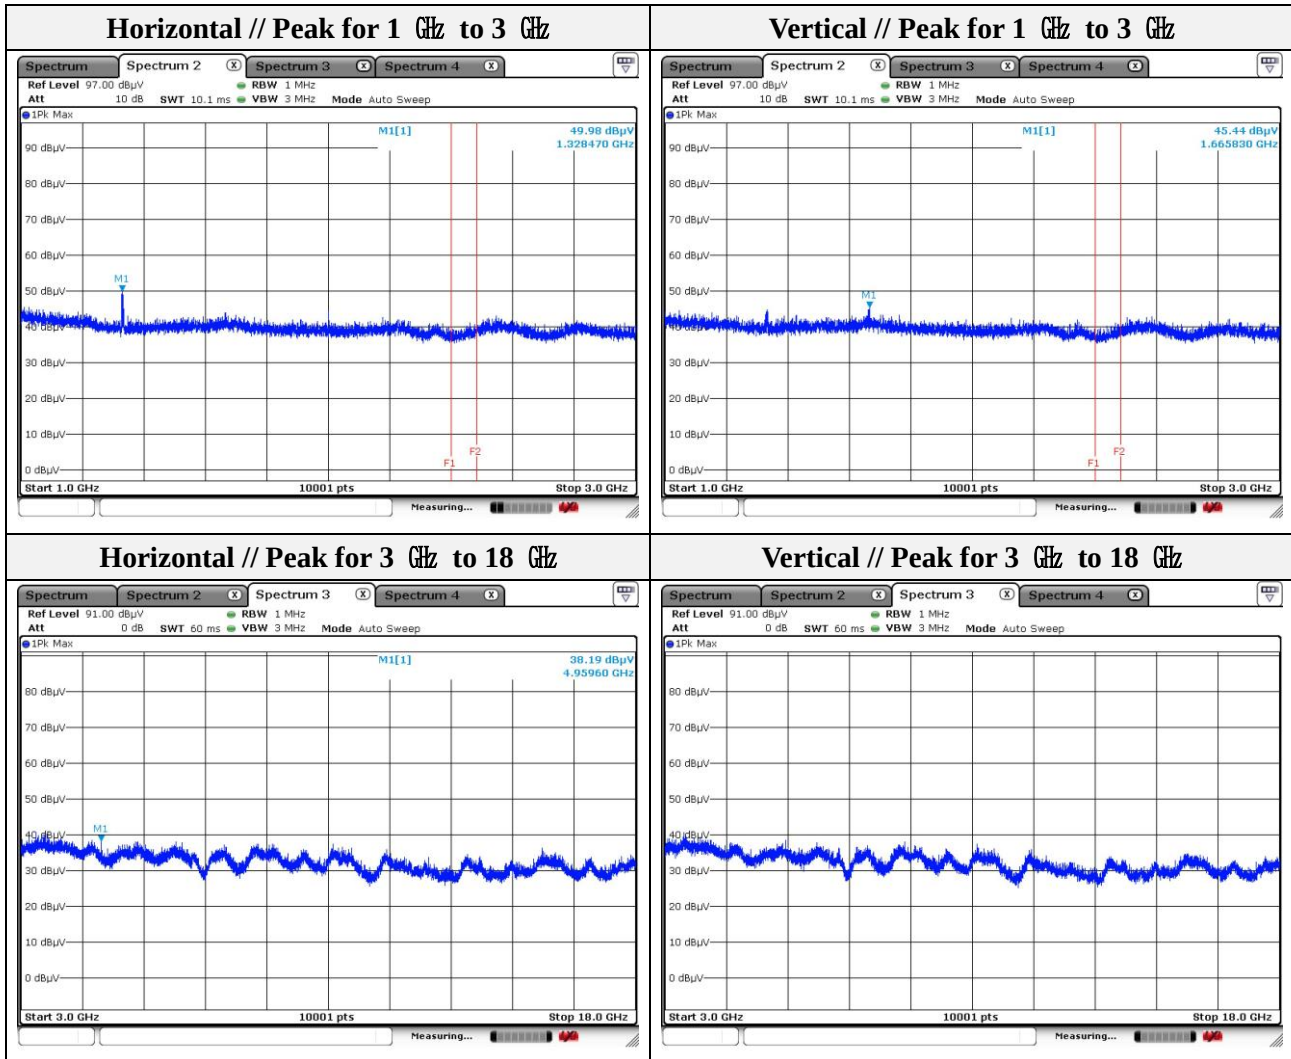

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057


Page (53) of (71)

Test results (18 GHz to 30 GHz) – Worst case

Mode: LE 1 Mbps (Right unit)

Distance of measurement: 3 meter

Channel: 00 (Worst case)

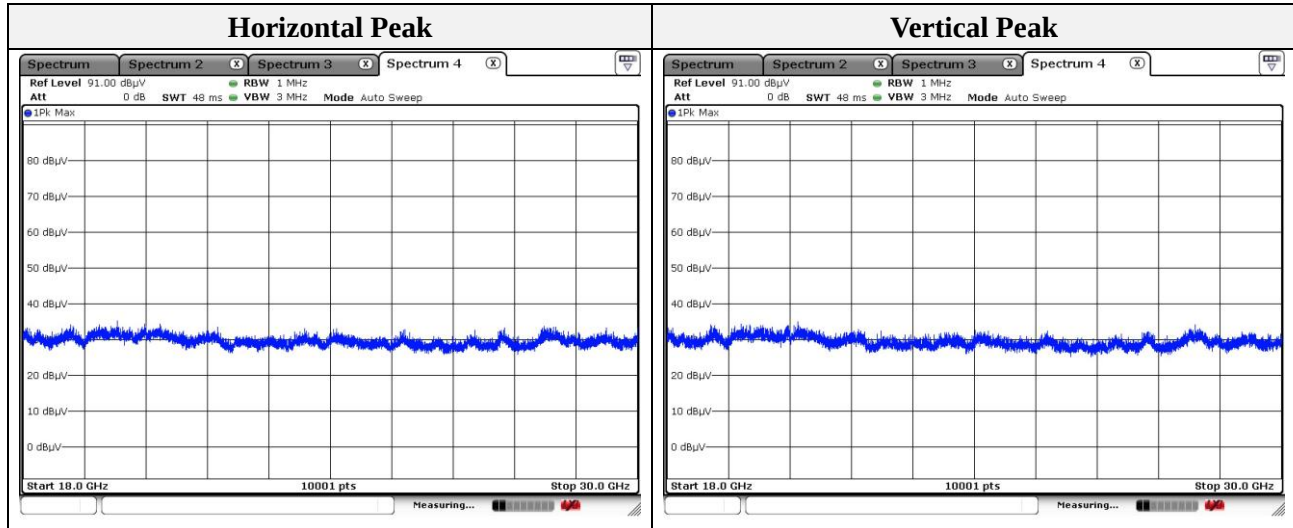

Note.

No spurious emission were detected above 18 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test results (Above 1 000 MHz)


Mode: LE 2 Mbps (Right unit)
Distance of measurement: 3 meter
Channel: 00

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 331.27	48.81	Peak	H	-7.47	-	41.34	74.00	32.66
1 663.23	45.97	Peak	V	-4.85	-	41.12	74.00	32.88
4 805.10	41.59	Peak	H	7.11	-	48.70	74.00	25.30

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 348.27	42.46	Peak	H	-0.87	-	41.59	74.00	32.41
2 370.64	40.98	Peak	V	-0.84	-	40.14	74.00	33.86

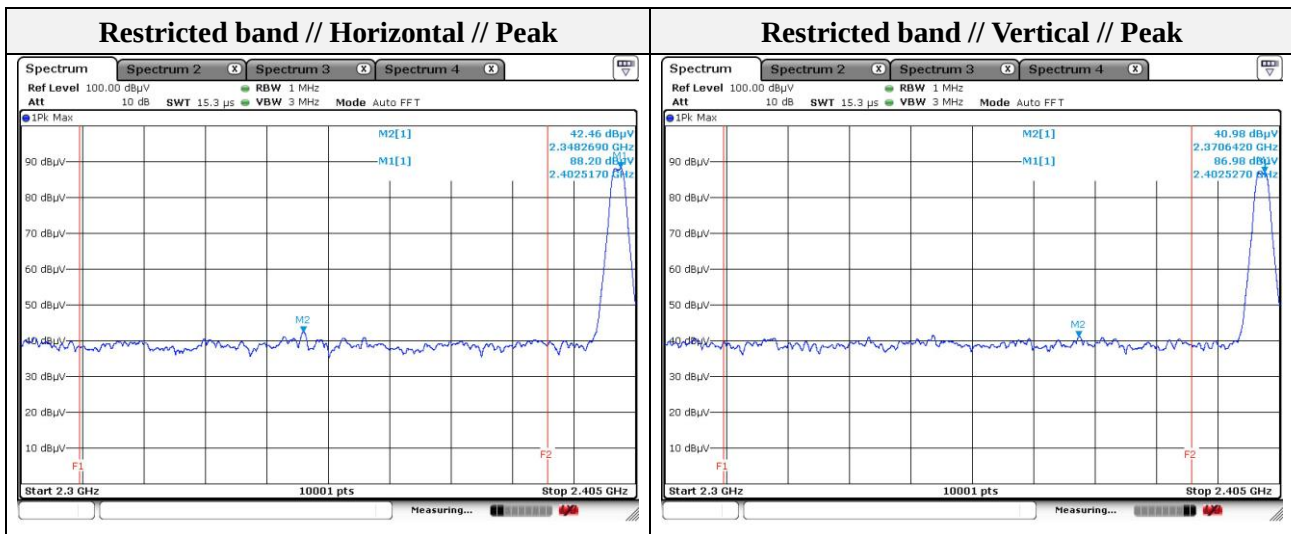

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057

Page (55) of (71)

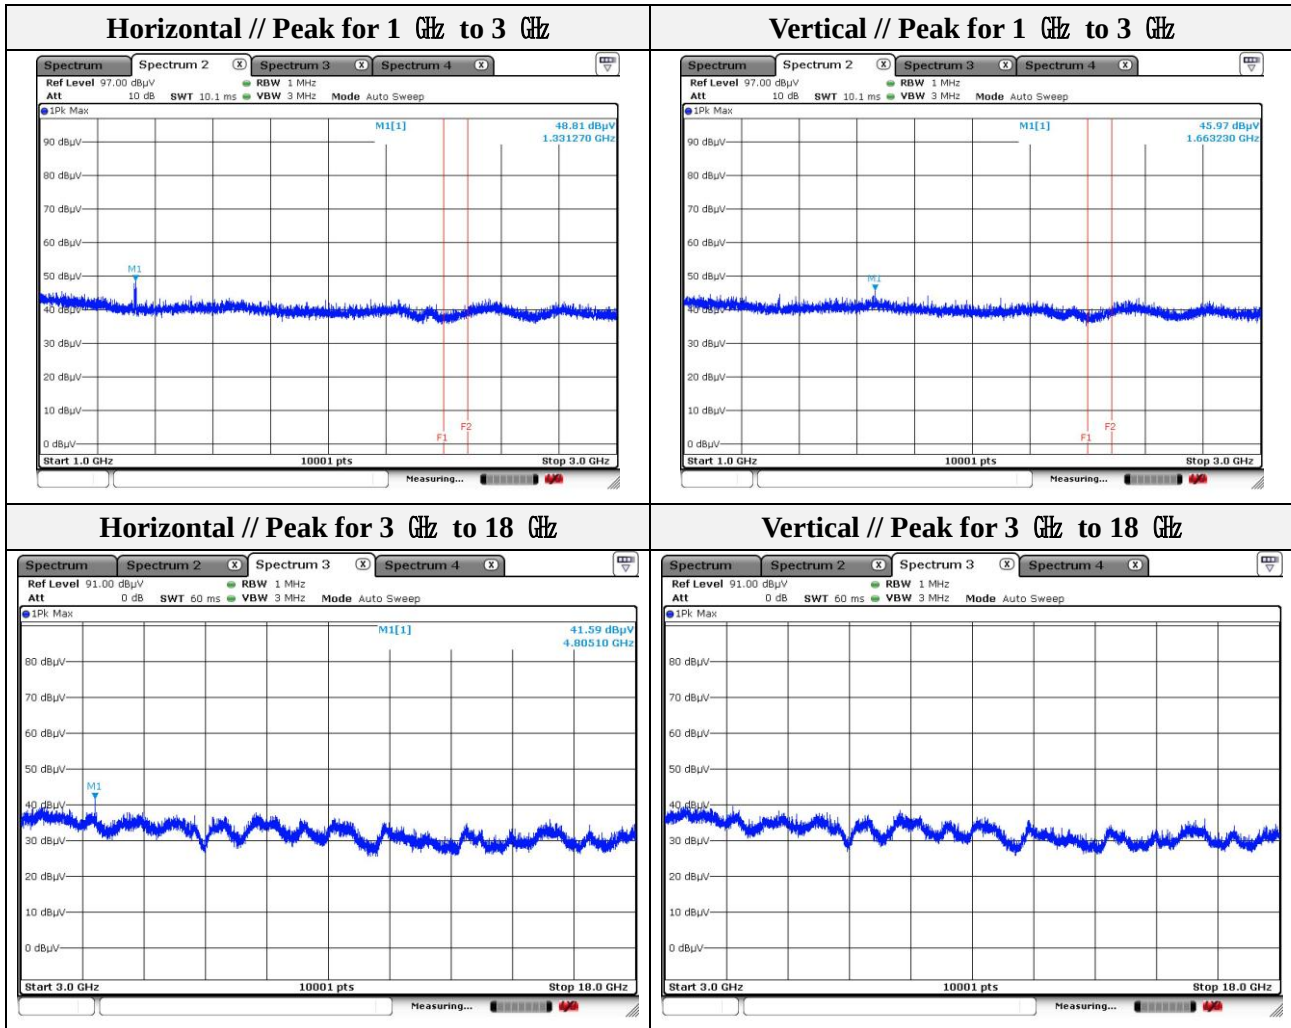

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0057

Page (56) of (71)


Mode: LE 2 Mbps (Right unit)

Distance of measurement: 3 meter

Channel: 20

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 331.47	49.34	Peak	H	-7.47	-	41.87	74.00	32.13
1 665.03	44.83	Peak	V	-4.83	-	40.00	74.00	34.00
4 884.60	38.79	Peak	H	7.72	-	46.51	74.00	27.49

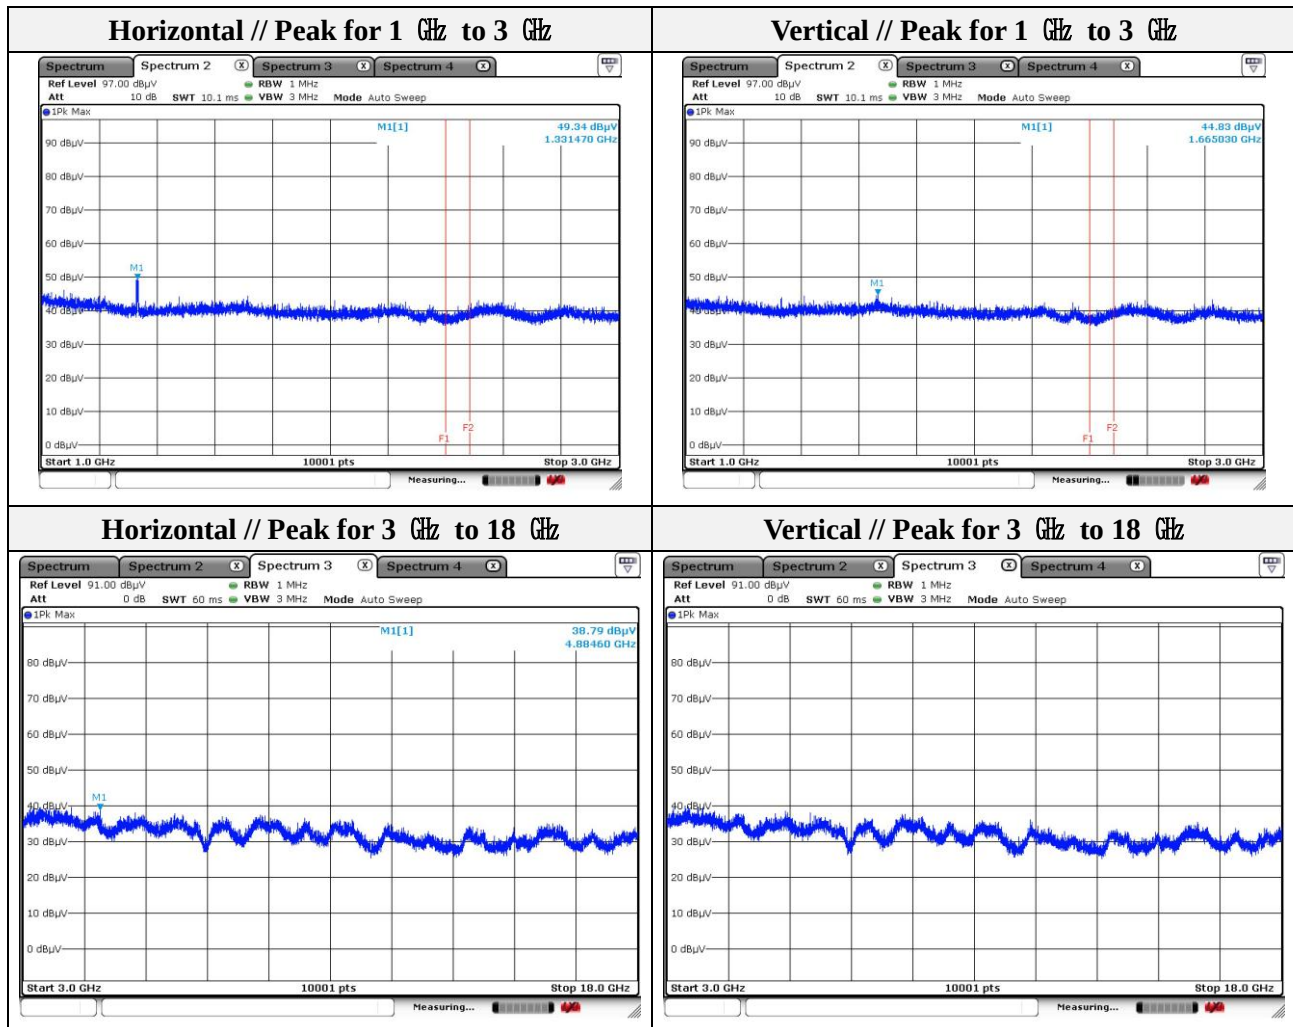

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




Mode: LE 2 Mbps (Right unit)
Distance of measurement: 3 meter
Channel: 39

- **Spurious**


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 031.10	44.77	Peak	V	-9.26	-	35.51	74.00	38.49
1 329.67	49.67	Peak	H	-7.48	-	42.19	74.00	31.81
4 959.60	37.84	Peak	H	8.30	-	46.14	74.00	27.86

- **Band edge**

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.50	47.96	Peak	H	-0.77	-	47.19	74.00	26.81
2 483.50	43.80	Peak	V	-0.77	-	43.03	74.00	30.97

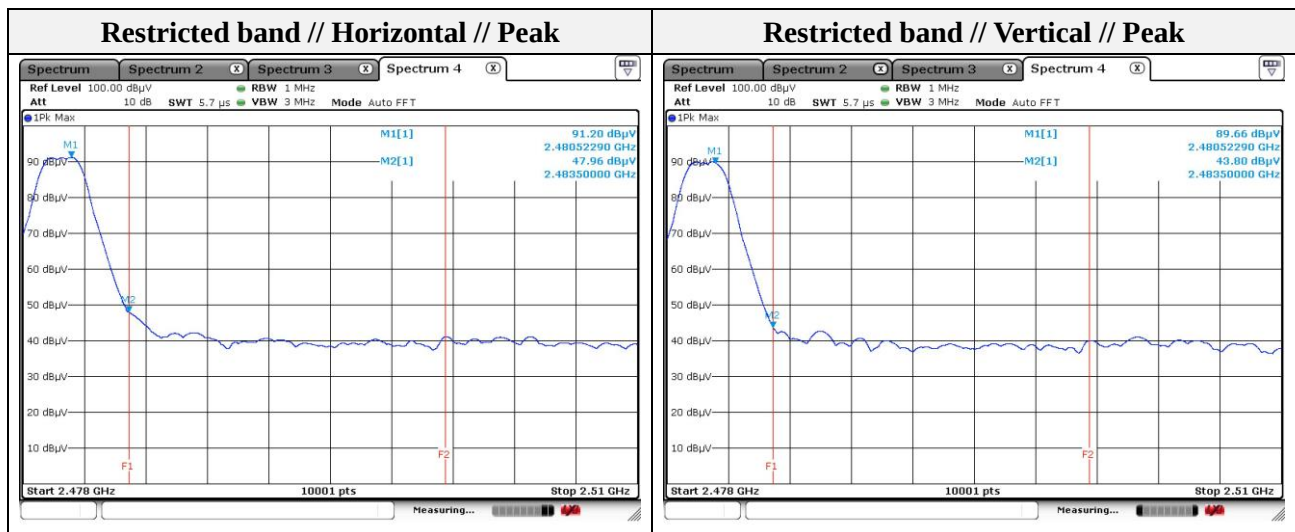

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

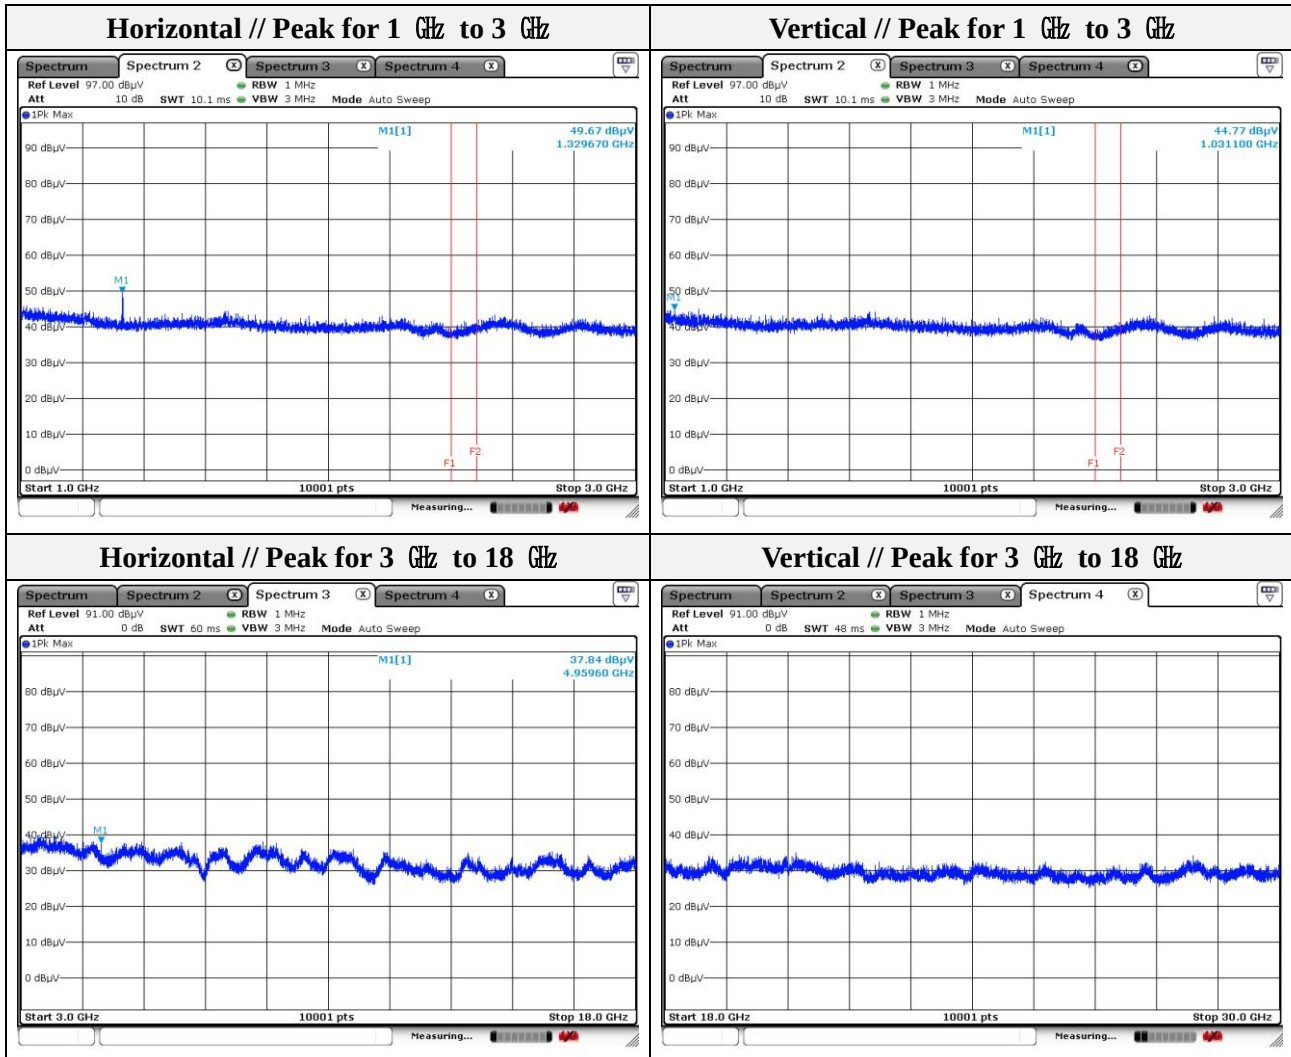

Note.

1. Average test would be performed if the peak result were greater than the average limit.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-RF1-22T0057
Page (59) of (71)

Test results (18 GHz to 30 GHz) – Worst case

Mode: LE 2 Mbps (Right unit)

Distance of measurement: 3 meter

Channel: 00 (Worst case)

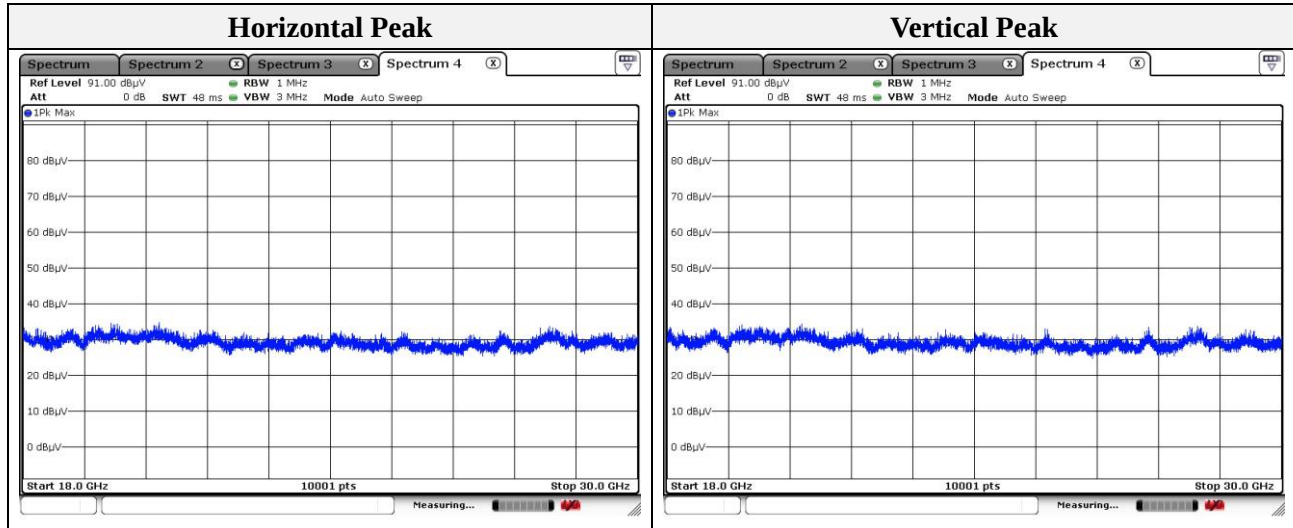


Note.

No spurious emission were detected above 18 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.5. Conducted spurious emissions & band edge

Test setup



Test procedure

Band edge

ANSI C63.10-2013 - Section 11.11

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Set the RBW = 100 kHz
4. Set the VBW = $[3 \times \text{RBW}]$.
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow trace to fully stabilize.

Out of band emissions

ANSI C63.10-2013 - Section 11.11




1. Start frequency was set to 30 MHz and stop frequency was set to 25 GHz for 2.4 GHz frequencies and 40 GHz for 5 GHz frequencies
2. Set the RBW = 100 kHz
3. Set the VBW = $[3 \times \text{RBW}]$.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow trace to fully stabilize.

Limit


According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

Limit

According to RSS-247 5.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

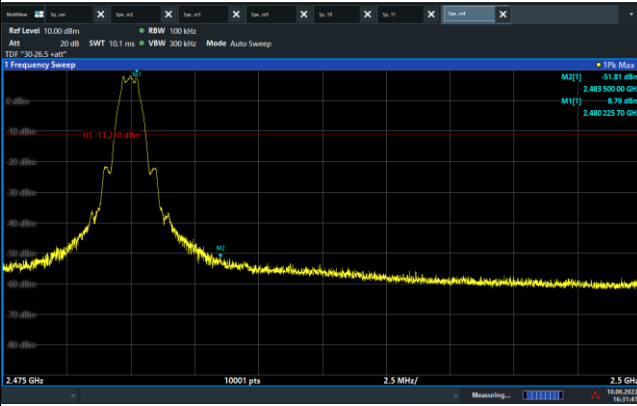
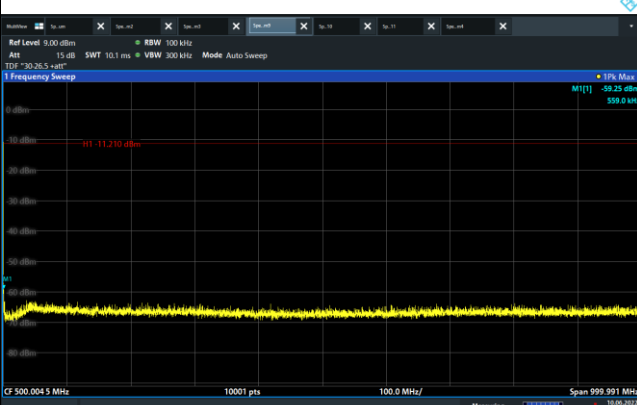
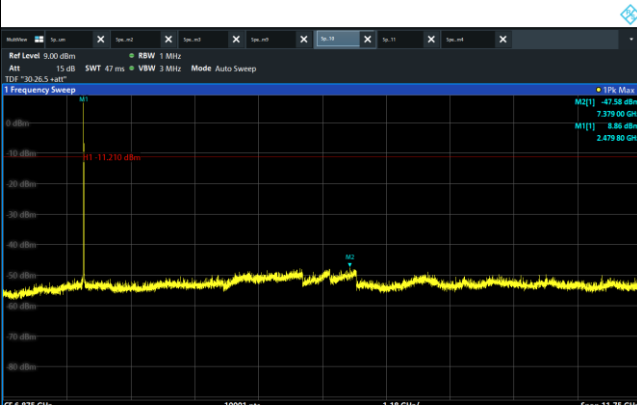
LE 1 Mbps (Left unit)	
2 480 MHz	-
	BLANK
	BLANK
	BLANK

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

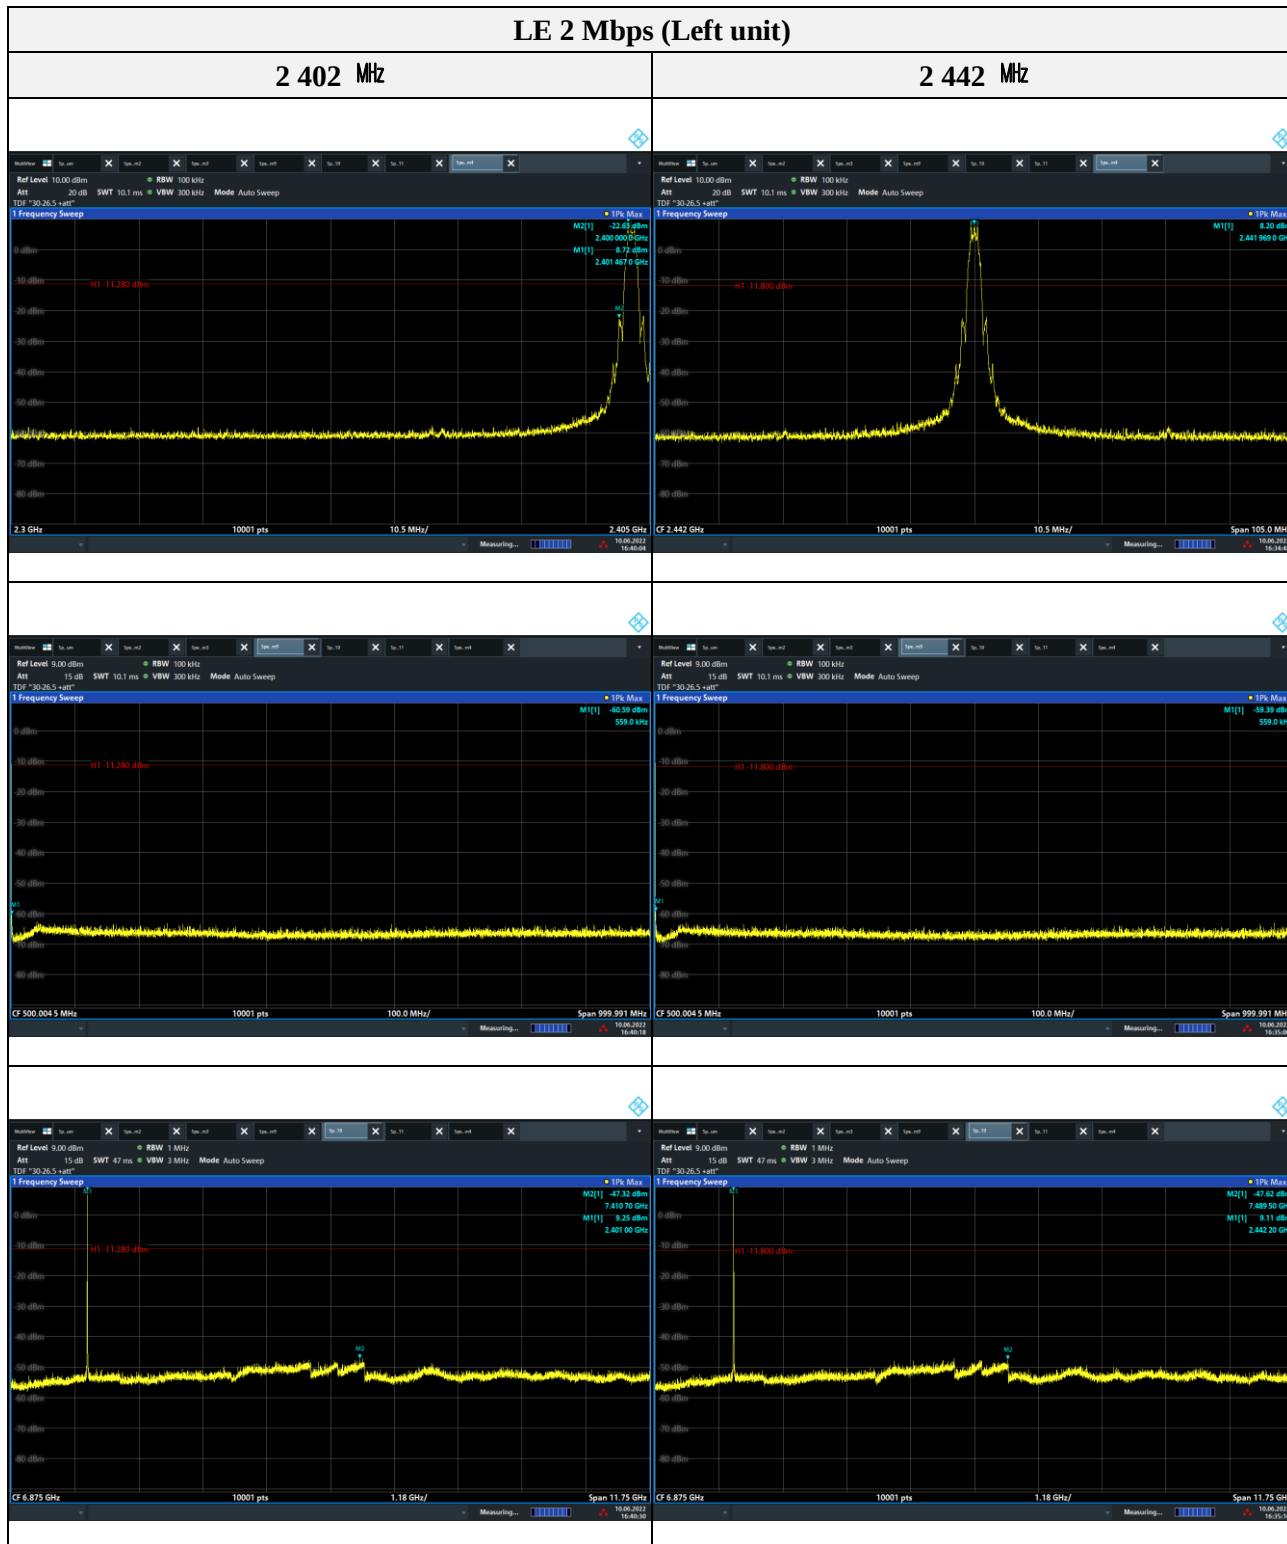


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

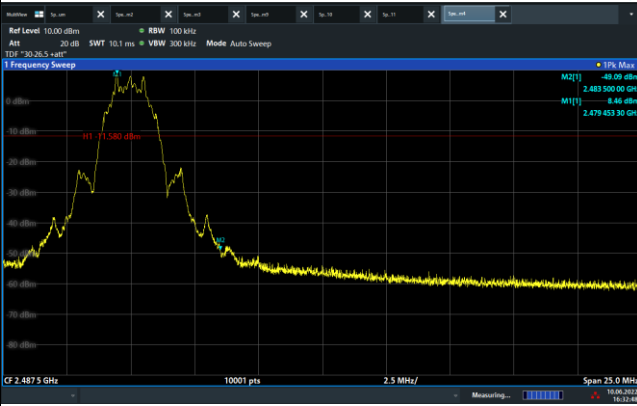
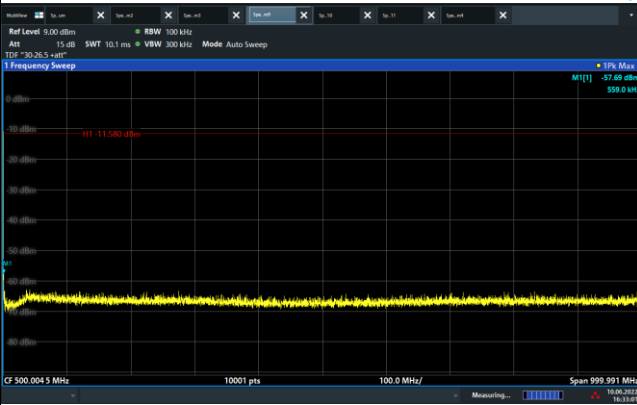
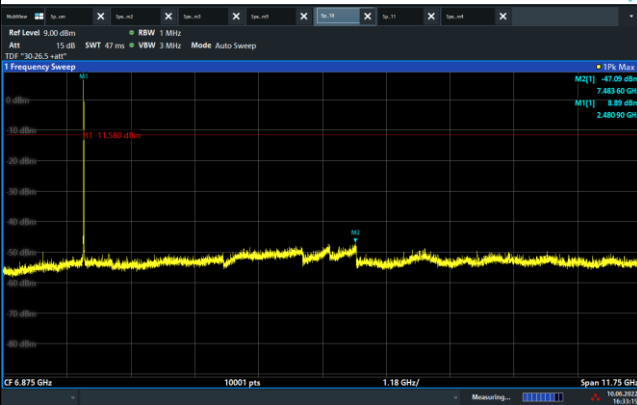


LE 2 Mbps (Left unit)	
2 480 MHz	-
	BLANK
	BLANK
	BLANK


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

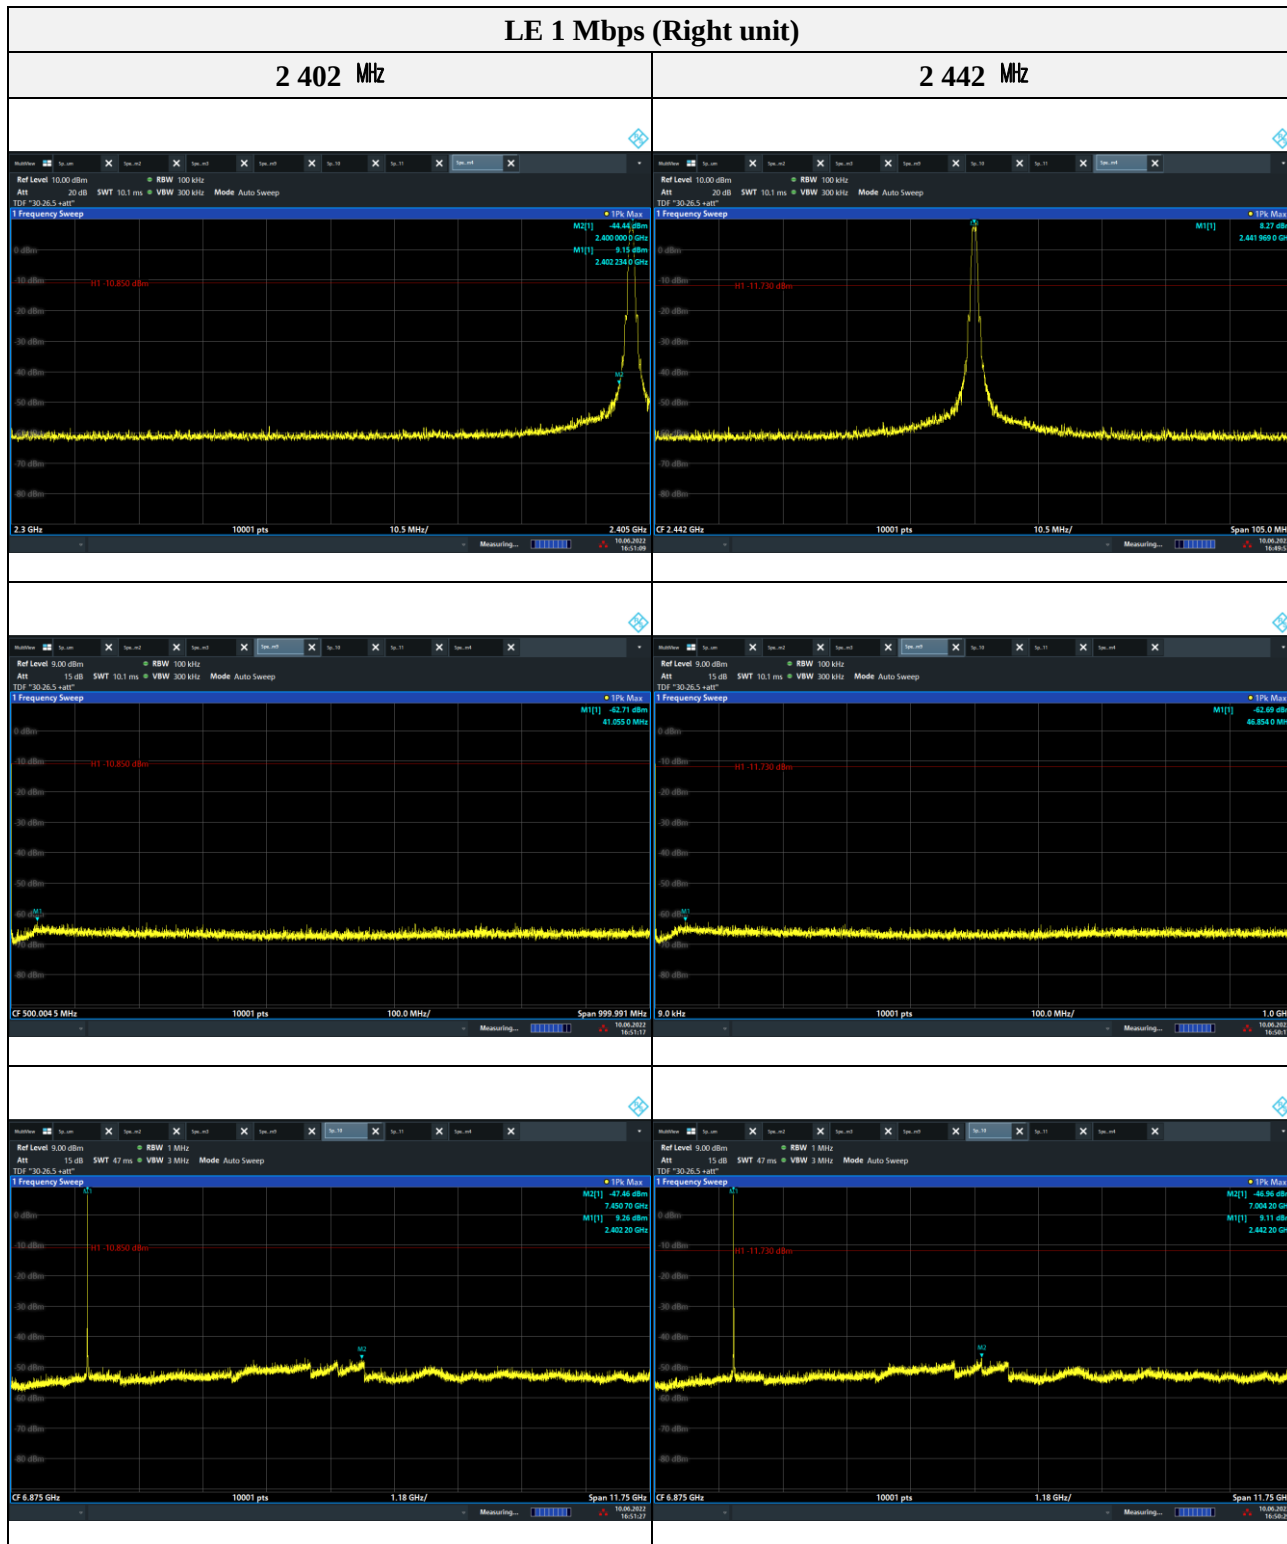

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

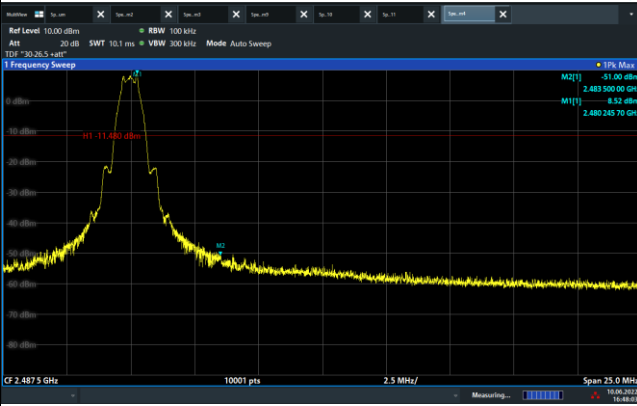
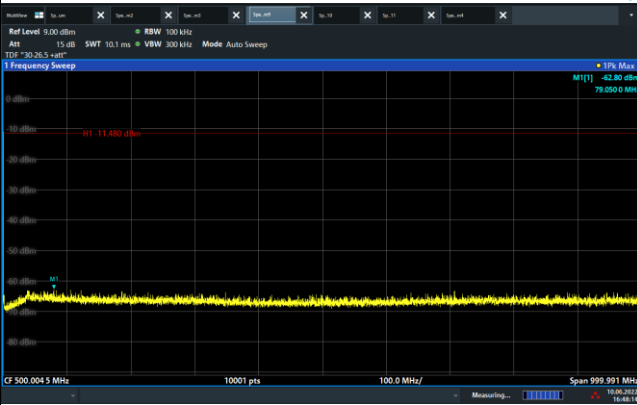
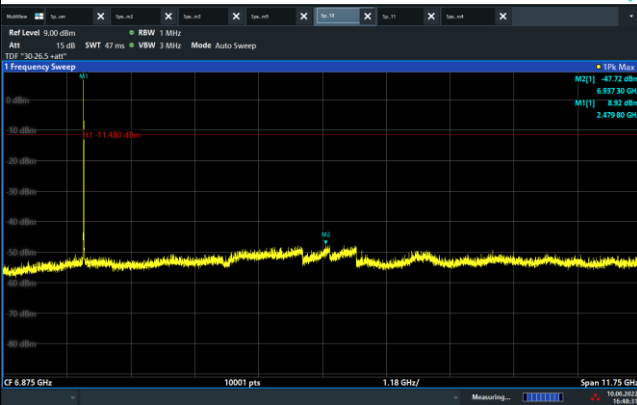
LE 1 Mbps (Right unit)	
2 480 MHz	-
	BLANK
	BLANK
	BLANK

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

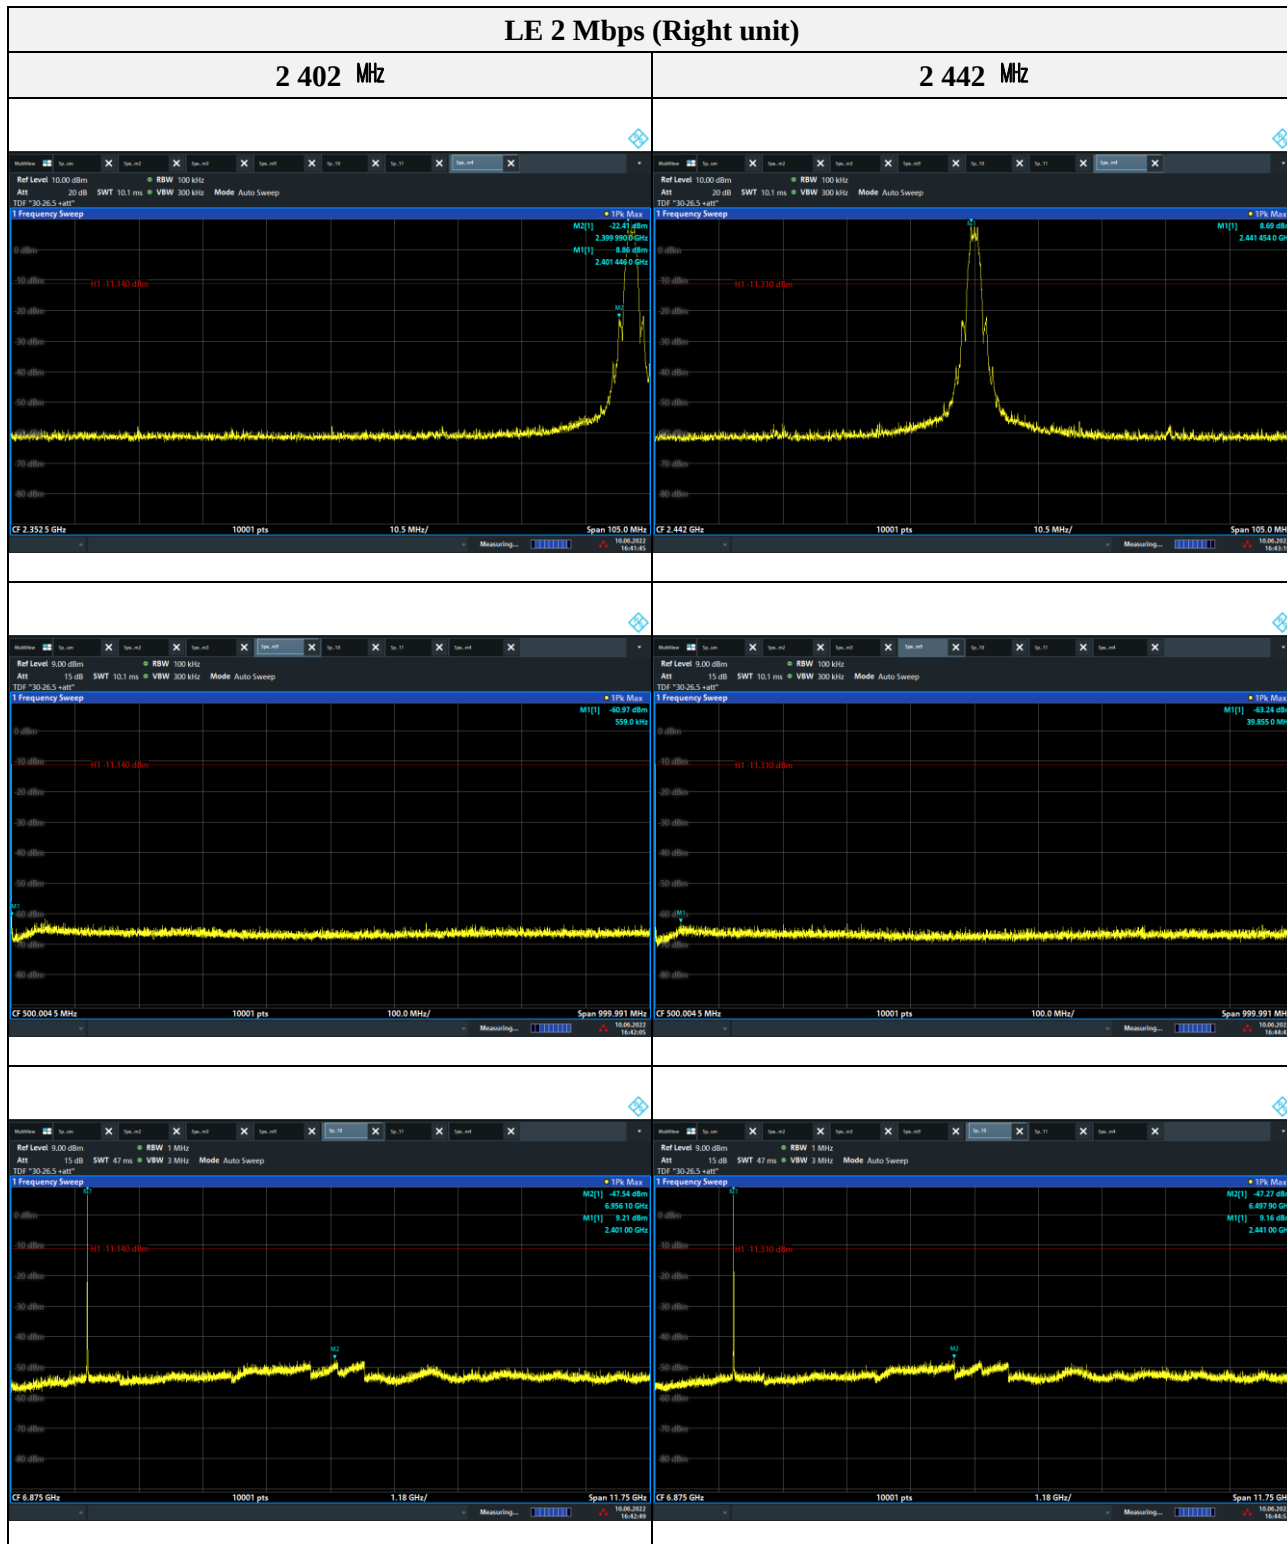

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

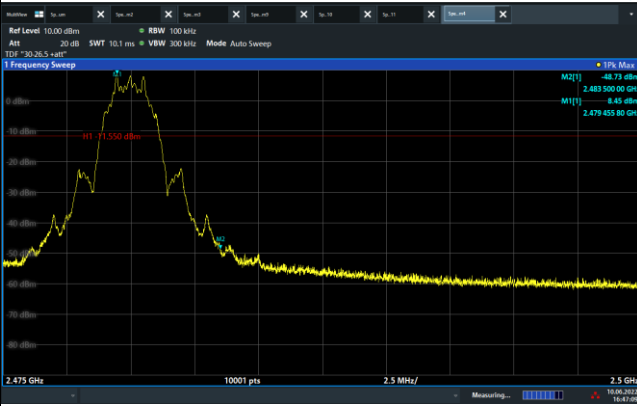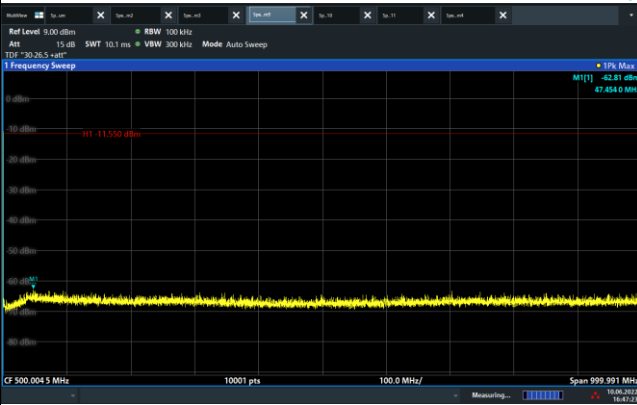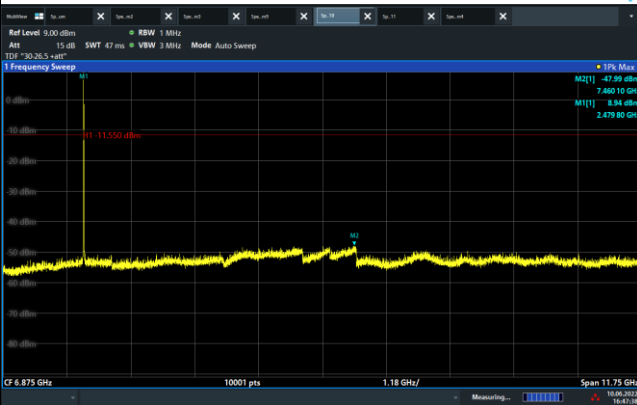

LE 2 Mbps (Right unit)	
2 480 MHz	-
	BLANK
	BLANK
	BLANK

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-22T0057
Page (70) of (71)

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV3044	101272	1 year	2023.03.14
SIGNAL GENERATOR	KEYSIGHT	N5182B	MY59100115	1 year	2023.04.27
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2023.05.13
Power Meter	Anritsu	ML2495A	2010001	1 year	2023.04.27
Pulse Power Sensor	Anritsu	MA2411B	1911111	1 year	2023.04.27
Attenuator	Mini-Circuits	BW-S10-2W263+	3	1 year	2023.01.17
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2023.01.18
BILOG ANTENNA	Schwarzbeck	VULB 9168	9168-461	2 years	2022.12.22
Horn Antenna	A.H	SAS-571	414	1 year	2023.01.18
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 year	2023.01.18
Amplifier	SONOMA INSTRUMENT	310N	401123	1 year	2023.06.02
PREAMPLIFIER	HP	8449B	3008A00538	1 year	2023.06.02
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2023.01.17
Attenuator	HUBER+SHHNER	6806.17.A	NONE	1 year	2023.04.01
DC Power supply	Agilent	6632B	MY43004090	1 year	2022.06.21
EMI Test Receiver	R&S	ESU26	100552	1 year	2023.03.31

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LGS53	306QCZP560949

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr