

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

# TEST REPORT


## FCC PART 15 SUBPART C 15.247

**Report Reference No.**.....: **GTS20200828019-1-1-1****FCC ID**.....: **2AUZX-WWDLWU**

Compiled by  
( position+printed name+signature)...: File administrators Jimmy Wang

Supervised by  
( position+printed name+signature)...: Test Engineer Aaron Tan

Approved by  
( position+printed name+signature)...: Manager Jason Hu

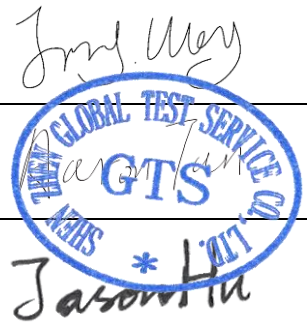**Date of issue**.....: Aug. 28, 2020**Representative Laboratory Name**.: **Shenzhen Global Test Service Co., Ltd.**

**Address**.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

**Applicant's name**.....: **Ubitech Limited**

**Address** .....: Unit 12, 7/F Block A, Hi-Tech Industrial Centre, 5-21 Pak Tin Par Street, Tsuen Wan, NT, Hong Kong

**Test specification** .....**Standard** .....: **FCC Part 15.247****TRF Originator** .....: Shenzhen Global Test Service Co.,Ltd.**Master TRF** .....: Dated 2014-12**Shenzhen Global Test Service Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: Wireless Water Detector**Trade Mark** .....: N/A**Manufacturer** .....: Yong Chao Plastic Technology Co.,Ltd**Model/Type reference**.....: WWDULU**List Model** .....: WWDLWU**Ratings** .....: 3.3V---3uA**Result**.....: **PASS**

**TEST REPORT**

<b>Test Report No. :</b> <b>GTS20200828019-1-1-1</b>	Aug. 28, 2020 Date of issue
------------------------------------------------------	--------------------------------

Equipment under Test                    :            Wireless Water Detector

Model /Type                                :            WWDULU

Listed Models                             :            WWDLWU

**Applicant**                                 :            **Ubitech Limited**

Address                                     :            Unit 12, 7/F Block A, Hi-Tech Industrial Centre, 5-21 Pak  
Tin Par Street, Tsuen Wan, NT, Hong Kong

**Manufacturer**                            :            **Yong Chao Plastic Technology Co.,Ltd**

Address                                     :            No.21, Jinlang 1 Street, Diaolang village, Huangjiang  
Town, Dongguan City, Guangdong, China

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b><u>1</u></b>	<b><u>TEST STANDARDS .....</u></b>	<b><u>4</u></b>
<b><u>2</u></b>	<b><u>SUMMARY .....</u></b>	<b><u>5</u></b>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test	6
2.4	Short description of the Equipment under Test (EUT)	6
2.5	EUT operation mode	6
2.6	Block Diagram of Test Setup	7
2.7	Special Accessories	7
2.8	Related Submittal(s) / Grant (s)	7
2.9	Modifications	7
<b><u>3</u></b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b><u>8</u></b>
3.1	Address of the test laboratory	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Summary of measurement results	9
3.5	Statement of the measurement uncertainty	10
3.6	Equipments Used during the Test	10
<b><u>4</u></b>	<b><u>TEST CONDITIONS AND RESULTS.....</u></b>	<b><u>12</u></b>
4.1	Conducted Emissions Test	12
4.2	Radiated Emissions and Band Edge	13
4.3	Maximum Peak Conducted Output Power	22
4.4	Power Spectral Density	23
4.5	20dB and 99% Bandwidth	25
4.6	Frequency Separation	27
4.7	Number of hopping frequency	28
4.8	Time of Occupancy (Dwell Time)	29
4.9	Out-of-band Emissions	30
4.10	Pseudorandom Frequency Hopping Sequence	33
4.11	Antenna Requirement	34
<b><u>5</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT1 .....</u></b>	<b><u>35</u></b>
<b><u>6</u></b>	<b><u>PHOTOS OF THE EUT .....</u></b>	<b><u>36</u></b>

# **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	Aug. 13, 2020
Testing commenced on	:	Aug. 14, 2020
Testing concluded on	:	Aug. 25, 2020

### 2.2 Product Description

Product Name:	Wireless Water Detector
Model/Type reference:	WWDULU
Power supply:	ER14250- Battery 3.6V 1200mAh
Hardware Version:	Lora Rev1.1
Software Version:	V1.2.48
Test samples ID:	GTS20200828019-1-1#
<b>Lora 125KHz:</b>	
Operation frequency:	902.3MHz~914.9MHz
Modulation:	LoRa
Channel number:	64
Channel separation:	200KHz
Antenna type:	Monopole antenna
Antenna gain:	1.0 dBi

## 2.3 Equipment Under Test

### Power supply system utilised

Power supply voltage	:	<input type="radio"/>	230V / 50 Hz	<input type="radio"/>	120V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 3.6V from battery

## 2.4 Short description of the Equipment under Test (EUT)

This is a Wireless Water Detector.

For more details, refer to the user's manual of the EUT.


## 2.5 EUT operation mode

The Applicant provides communication tools software (CustosGeneralTool.UI) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. There are 64 channels provided to the EUT operation on 125kHz and 8 channels operation on 500kHz.

### Operation Frequency Lora 125KHz:

Channel	Frequency (MHz)
<b>00</b>	<b>902.3</b>
01	902.5
⋮	⋮
31	908.5
<b>32</b>	<b>908.7</b>
30	908.9
⋮	⋮
62	914.7
<b>63</b>	<b>914.9</b>

## 2.6 Block Diagram of Test Setup

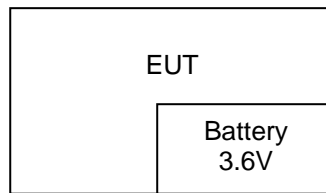

## 2.7 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
/	/	/	/	/	/
/	/	/	/	/	/
/	/	/	/	/	/
/	/	/	/	/	/

## 2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

## 2.9 Modifications

No modifications were implemented to meet testing criteria.

### **3 TEST ENVIRONMENT**

#### **3.1 Address of the test laboratory**

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **3.2 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 165725**

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**A2LA-Lab Cert. No.: 4758.01**

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**CNAS-Lab Code: L8169**

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

#### **3.3 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

### 3.4 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Lowest	Pass
§15.247(a)(1)	Number of Hopping channels	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Full	Lora DR2	<input checked="" type="checkbox"/> Full	Pass
§15.247(a)(1)	Time of Occupancy (dwell time)	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Middle	Pass
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Pass
§15.247(b)(1)	Maximum output power	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Pass
§15.247(e)	Power spectral density	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Pass
§15.247(d)	Band edge compliance conducted	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Pass
§15.205	Band edge compliance radiated	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Pass
§15.247(d)	TX spurious emissions conducted	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Pass
§15.247(d)	TX spurious emissions Radiated Above 1GHz	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Pass
§15.209(a)	TX spurious Emissions radiated Below 1GHz	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Middle	Pass
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	Lora DR0 Lora DR1 Lora DR2 Lora DR3	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Lora DR2	<input checked="" type="checkbox"/> Middle	Pass

Note: DR means DataRate refer to LoRaWAN Specification as below:

DataRate	Configuration	Indicative physical bit rate [bit/sec]
0	LoRa: SF10 / 125 kHz	980
1	LoRa: SF9 / 125 kHz	1760
2	LoRa: SF8 / 125 kHz	3125
3	LoRa: SF7 / 125 kHz	5470
4	LoRa: SF8 / 500 kHz	12500

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

### 3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2019/09/20	2020/09/19
LISN	R&S	ESH2-Z5	893606/008	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESPI3	101841-cd	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESCI7	101102	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	E4407B	MY45132751	2019/09/20	2020/09/19
Spectrum Analyzer	R&S	FSV40	100019	2019/09/20	2020/09/19
Vector Signal generator	Agilent	N5181A	MY49060502	2019/09/20	2020/09/19
Signal generator	Agilent	E4421B	3610AO1069	2019/09/20	2020/09/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2019/09/20	2020/09/19
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2019/09/23	2020/09/22
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2019/10/12	2020/10/11
Bilog Antenna	Schwarzbeck	VULB9163	000976	2020/05/25	2021/05/24
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV 9743	#202	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV9179	9719-025	2019/09/20	2020/09/19
Amplifier	EMCI	EMC051845B	980355	2019/09/20	2020/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/09/20	2020/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2019/09/20	2020/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2019/09/20	2020/09/19
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2019/09/20	2020/09/19
RF Cable(above	HUBER+SUHNER	RG214	RE02	2019/09/20	2020/09/19

1GHz)					
Data acquisition card	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
Test Control Unit	Tonscend	JS0806-1	178060067	2020/06/19	2021/06/18
Automated filter bank	Tonscend	JS0806-F	19F8060177	2020/06/19	2021/06/18
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

## 4 TEST CONDITIONS AND RESULTS

### 4.1 Conducted Emissions Test


#### LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST CONFIGURATION

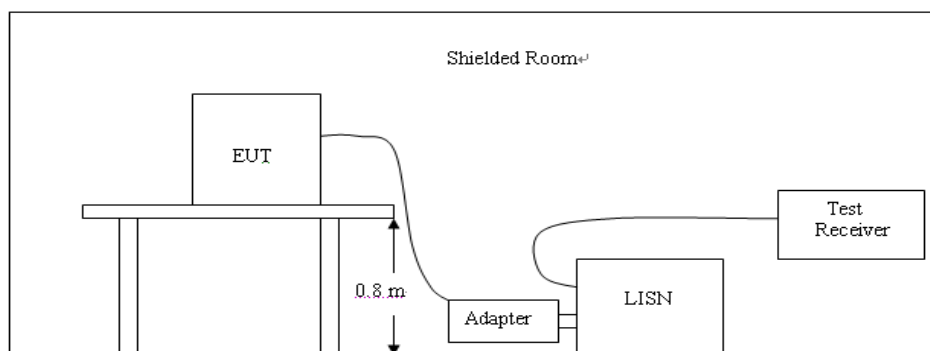

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.


#### TEST RESULTS

Not applicable to this device, which is powered by battery.


## 4.2 Radiated Emissions and Band Edge

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

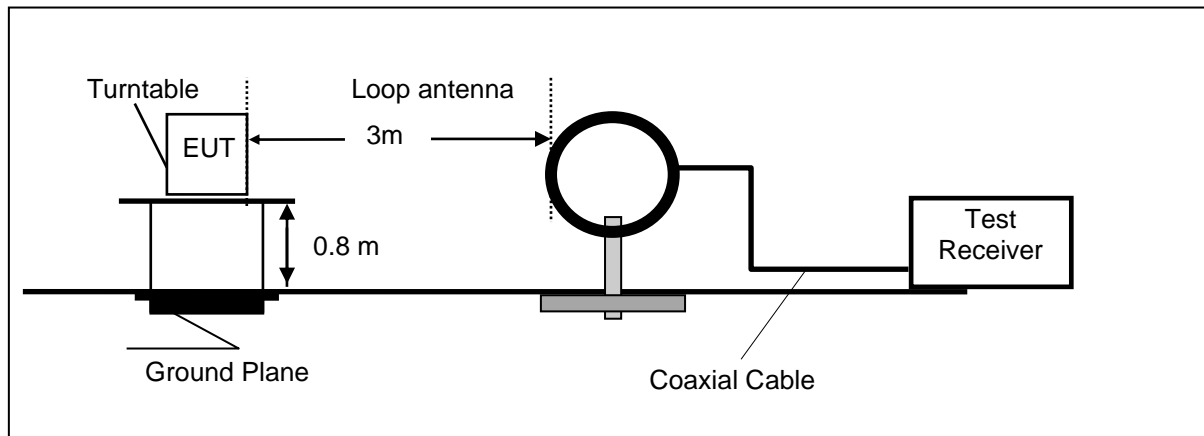

Frequency range 30MHz – 1000MHz

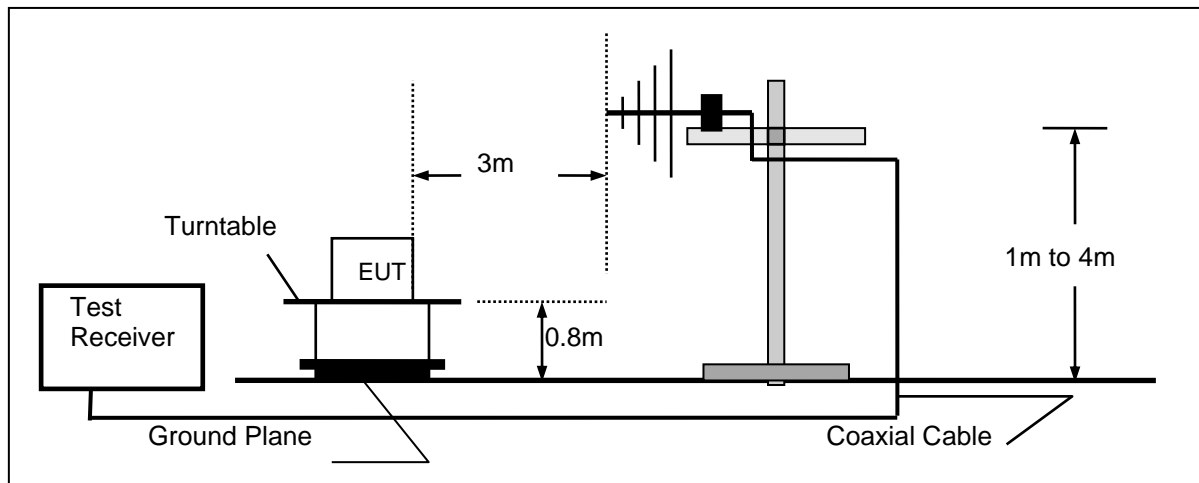

Frequency range above 1GHz-25GHz

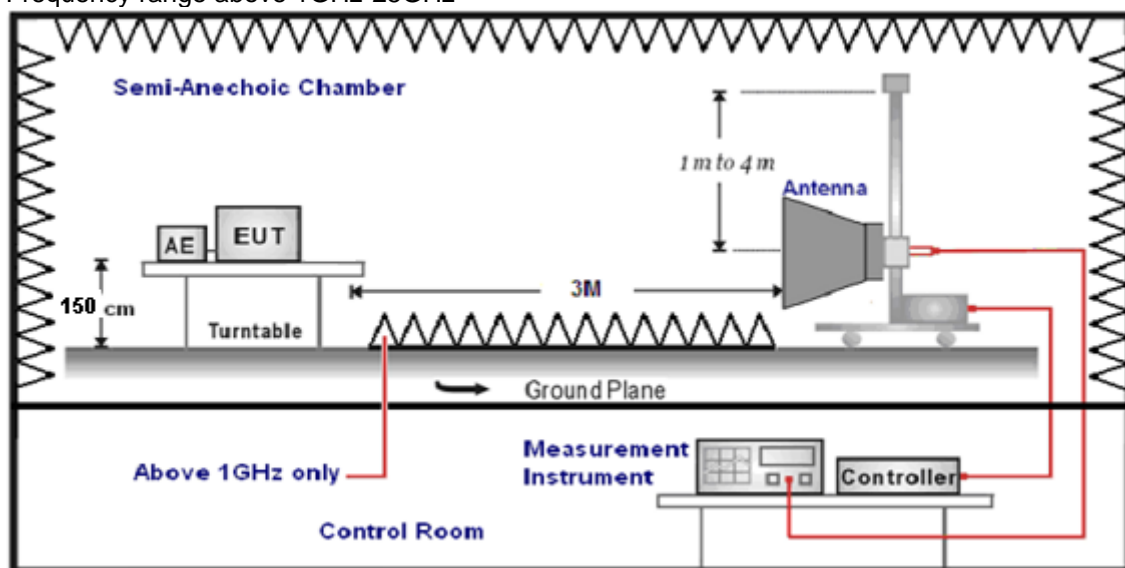

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 10GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

**TEST RESULTS**


Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	Lora

Remark:


1. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

**For 30MHz-1GHz****Lora 125KHz**

Test Frequency:	902.3MHz	Polarization:	Horizontal
-----------------	----------	---------------	------------

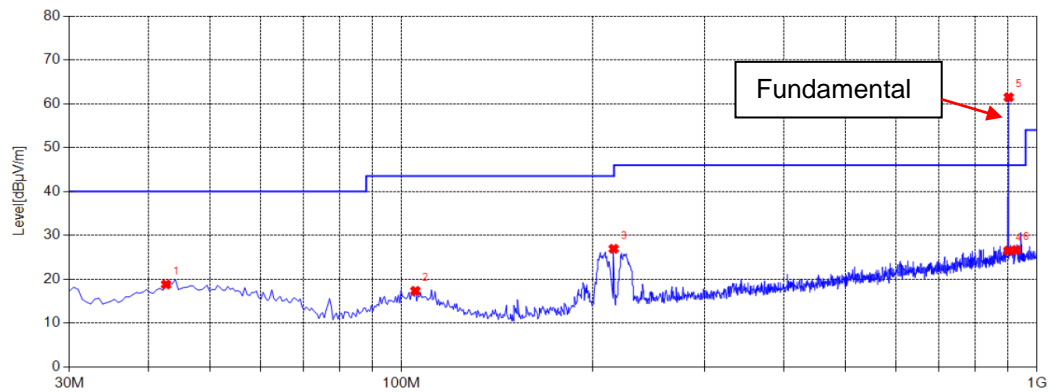
**Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading (dBμV/m)	Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	42.6100	25.47	-6.65	18.82	40.00	21.18	100	200	PK	Horizontal	Pass
2	105.1750	25.48	-8.12	17.36	43.50	26.14	100	60	PK	Horizontal	Pass
3	215.7550	36.39	-9.46	26.93	43.50	16.57	100	360	PK	Horizontal	Pass
4	902.0000	22.93	3.67	26.60	46.00	19.40	100	80	PK	Horizontal	Pass
5	902.3000	57.80	3.68	61.48	114.00	52.52	100	340	PK	Horizontal	Pass
5	902.3000	57.07	3.68	60.75	94.00	33.25	100	340	QP	Horizontal	Pass
5	902.3000	56.53	3.68	60.21	94.00	33.79	100	340	AV	Horizontal	Pass
6	928.0000	22.22	4.45	26.67	46.00	19.33	100	90	PK	Horizontal	Pass

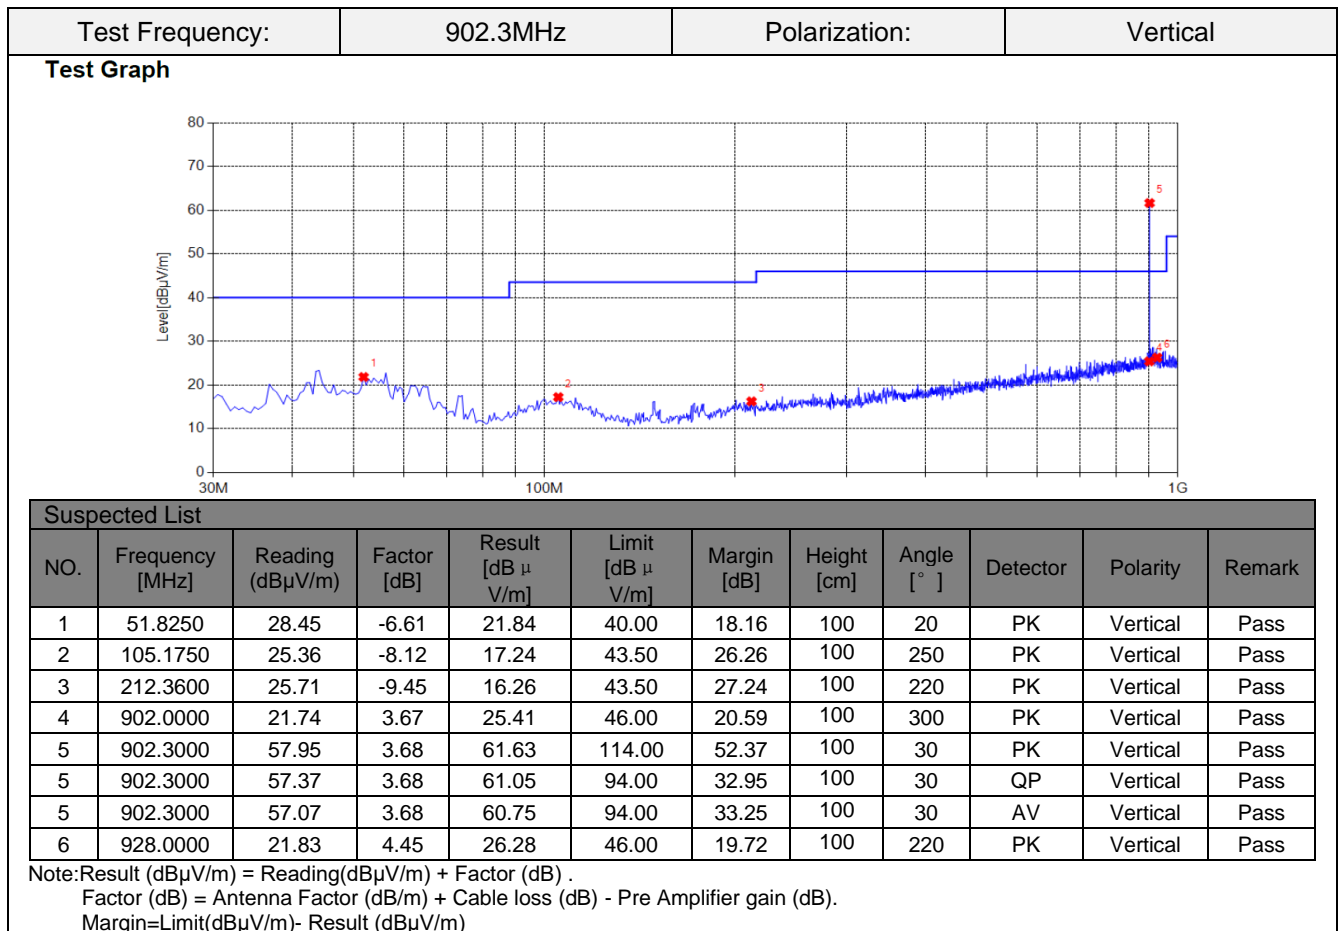

Test Frequency:	908.7MHz	Polarization:	Horizontal
-----------------	----------	---------------	------------

Test Graph

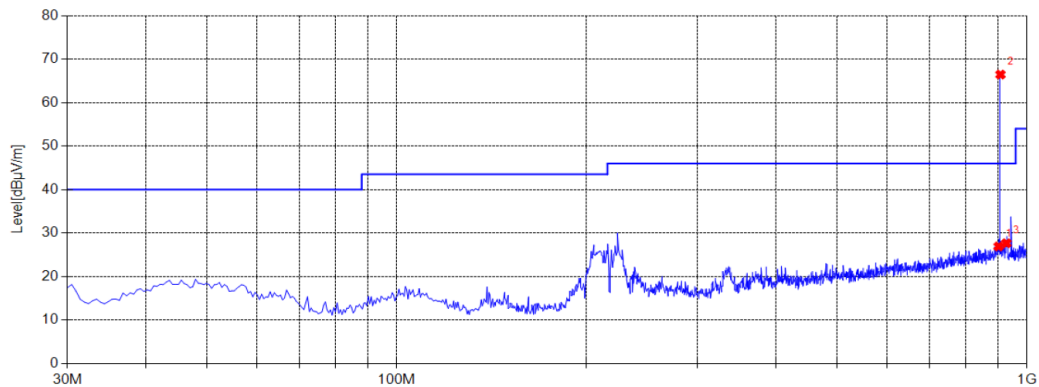


Suspected List

NO.	Frequency [MHz]	Reading (dBμV/m)	Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	902.0000	23.26	3.67	26.93	46.00	19.07	100	90	PK	Horizontal	Pass
2	908.7000	62.90	3.55	66.45	114.00	47.55	100	320	PK	Horizontal	Pass
2	908.7000	61.56	3.55	65.11	94.00	28.89	100	320	QP	Horizontal	Pass
2	908.7000	61.32	3.55	64.87	94.00	29.13	100	320	AV	Horizontal	Pass
3	928.0000	22.22	4.45	26.67	46.00	19.33	100	200	PK	Horizontal	Pass

Test Frequency:	908.7MHz	Polarization:	Vertical
-----------------	----------	---------------	----------

Test Graph

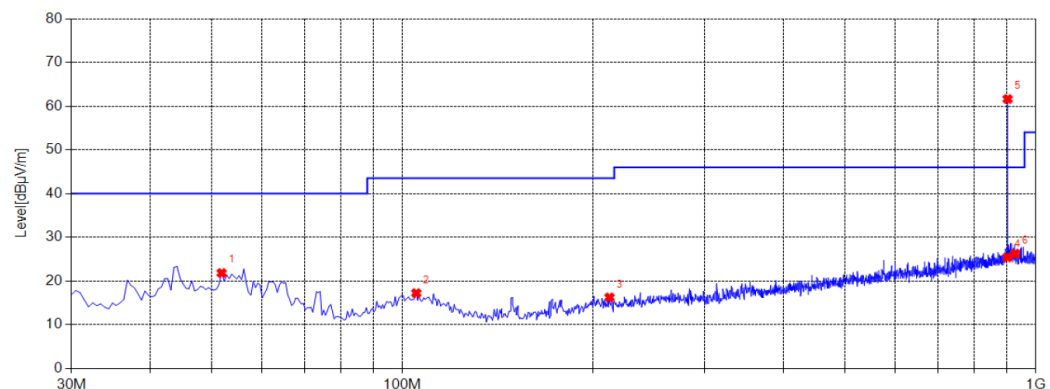

Suspected List

NO.	Frequency [MHz]	Reading (dBμV/m)	Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	902.0000	21.61	3.67	25.28	46.00	20.72	100	110	PK	Vertical	Pass
2	908.7000	63.02	3.55	66.57	114.00	47.43	100	310	PK	Vertical	Pass
2	908.7000	62.46	3.55	66.01	94.00	27.99	100	310	QP	Vertical	Pass
2	908.7000	62.21	3.55	65.76	94.00	28.24	100	310	AV	Vertical	Pass
3	928.0000	21.35	4.45	25.80	46.00	20.20	100	140	PK	Vertical	Pass


Note: Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .

Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Margin = Limit (dBμV/m) - Result (dBμV/m)

Test Frequency:	914.900MHz	Polarization:	Horizontal
-----------------	------------	---------------	------------

Test Graph

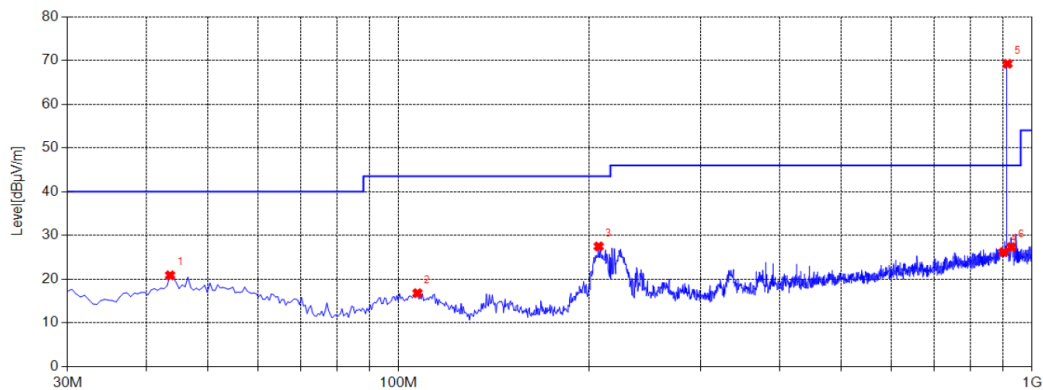


Suspected List

NO.	Frequency [MHz]	Reading (dBμV/m)	Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.5800	27.44	-6.55	20.89	40.00	19.11	100	360	PK	Horizontal	Pass
2	107.1150	25.03	-8.22	16.81	43.50	26.69	100	110	PK	Horizontal	Pass
3	207.0250	36.92	-9.42	27.50	43.50	16.00	100	160	PK	Horizontal	Pass
4	902.0000	22.52	3.67	26.19	46.00	19.81	100	130	PK	Horizontal	Pass
5	914.9000	65.93	3.31	69.24	114.00	44.76	100	290	PK	Horizontal	Pass
5	914.9000	65.44	3.31	68.75	94.00	25.25	100	290	QP	Horizontal	Pass
5	914.9000	64.81	3.31	68.12	94.00	25.88	100	290	AV	Horizontal	Pass
6	928.0000	22.89	4.45	27.34	46.00	18.66	100	310	PK	Horizontal	Pass

Test Frequency:	914.900MHz	Polarization:	Vertical
-----------------	------------	---------------	----------

Test Graph

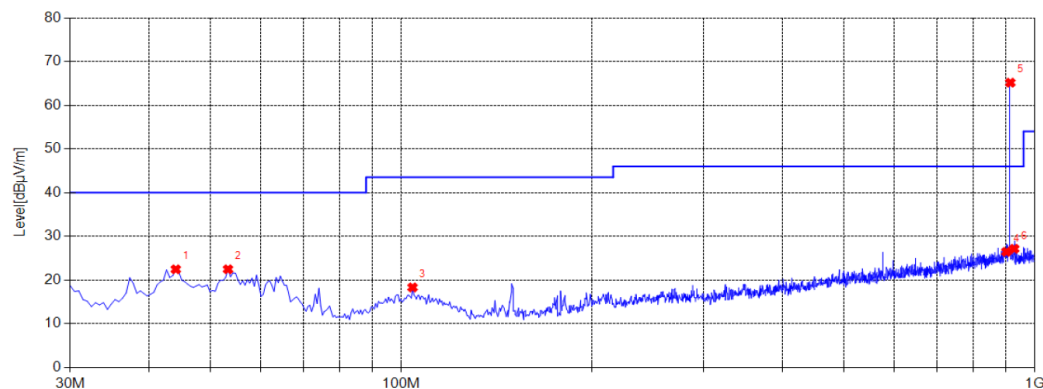

Suspected List

NO.	Frequency [MHz]	Reading (dBμV/m)	Factor [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.0650	28.99	-6.53	22.46	40.00	17.54	100	30	PK	Vertical	Pass
2	53.2800	29.33	-6.86	22.47	40.00	17.53	100	330	PK	Vertical	Pass
3	104.2050	26.53	-8.22	18.31	43.50	25.19	100	110	PK	Vertical	Pass
4	902.0000	22.80	3.67	26.47	46.00	19.53	100	310	PK	Vertical	Pass
5	914.9000	61.86	3.31	65.17	114.00	48.83	100	260	PK	Vertical	Pass
5	914.9000	60.91	3.31	64.22	94.00	29.78	100	260	QP	Vertical	Pass
5	914.9000	60.74	3.31	64.05	94.00	29.95	100	260	AV	Vertical	Pass
6	928.0000	22.70	4.45	27.15	46.00	18.85	100	200	PK	Vertical	Pass

Note: Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .

Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Margin = Limit (dBμV/m) - Result (dBμV/m)

## For 1GHz to 25GHz

## Lora 125KHz

Frequency(MHz):				902.30		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	1804.60	58.90	PK	74	15.10	63.17	27.17	4.01	35.45	-4.27
1	1804.60	50.04	AV	54	3.96	54.31	27.17	4.01	35.45	-4.27
2	2706.90	44.25	PK	74	29.75	45.40	29.33	4.94	35.43	-1.15
2	2706.90	--	AV	54	--	--	--	--	--	--
3	5413.80	50.57	PK	74	23.43	44.58	34.74	7.27	36.02	5.99
3	5413.80	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				902.30		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	1804.60	59.22	PK	74	14.78	63.49	27.17	4.01	35.45	-4.27
1	1804.60	51.25	AV	54	2.75	55.52	27.17	4.01	35.45	-4.27
2	2706.90	44.18	PK	74	29.82	45.33	29.33	4.94	35.43	-1.15
2	2706.90	--	AV	54	--	--	--	--	--	--
3	5413.80	51.36	PK	74	22.64	45.37	34.74	7.27	36.02	5.99
3	5413.80	--	AV	54	--	--	--	--	--	--

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

**Lora 125KHz**

Frequency(MHz):				908.70		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	1817.40	59.58	PK	74	14.42	63.76	27.24	4.03	35.44	-4.18
1	1817.40	51.04	AV	54	2.96	55.22	27.24	4.03	35.44	-4.18
2	2726.10	45.21	PK	74	28.79	46.28	29.40	4.96	35.43	-1.07
2	2726.10	--	AV	54	--	--	--	--	--	--
3	5452.20	50.87	PK	74	23.13	44.87	34.75	7.29	36.03	6.00
3	5452.20	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				908.70		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	1817.40	60.32	PK	74	13.68	64.50	27.24	4.03	35.44	-4.18
1	1817.40	51.54	AV	54	2.46	55.72	27.24	4.03	35.44	-4.18
2	2726.10	44.78	PK	74	29.22	45.85	29.40	4.96	35.43	-1.07
2	2726.10	--	AV	54	--	--	--	--	--	--
3	5452.20	51.21	PK	74	22.79	45.21	34.75	7.29	36.03	6.00
3	5452.20	--	AV	54	--	--	--	--	--	--

**REMARKS:**

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

**Lora 125KHz**

Frequency(MHz):				914.90		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	1829.80	58.87	PK	74	15.13	62.96	27.30	4.04	35.43	-4.09
1	1829.80	50.15	AV	54	3.85	54.24	27.30	4.04	35.43	-4.09
2	2744.70	43.98	PK	74	30.02	44.96	29.47	4.98	35.43	-0.98
2	2744.70	--	AV	54	--	--	--	--	--	--
3	5489.40	49.67	PK	74	24.33	43.65	34.75	7.30	36.04	6.02
3	5489.40	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				914.90		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	1829.80	59.78	PK	74	14.22	63.87	27.30	4.04	35.43	-4.09
1	1829.80	50.87	AV	54	3.13	54.96	27.30	4.04	35.43	-4.09
2	2744.70	44.25	PK	74	29.75	45.23	29.47	4.98	35.43	-0.98
2	2744.70	--	AV	54	--	--	--	--	--	--
3	5489.40	50.76	PK	74	23.24	44.74	34.75	7.30	36.04	6.02
3	5489.40	--	AV	54	--	--	--	--	--	--

**REMARKS:**

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

### 4.3 Maximum Peak Conducted Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration

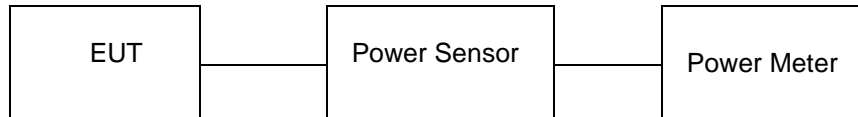

#### Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	Lora

Channel	Output power (dBm)	Limit (dBm)	Result
00	7.363	30.00	Pass
32	8.474		
63	8.200		

Note: 1.The test results including the cable lose.

## 4.4 Power Spectral Density


### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq 3$  kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

### Test Configuration

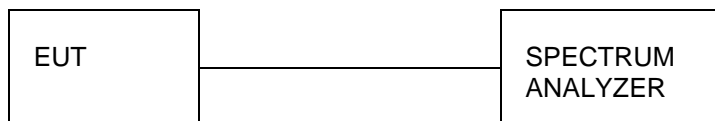

### Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	Lora

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
Lora	00	5.483	8.00	Pass
	32	6.438		
	63	5.207		

Test plot as follows:

Lora	
<div><div><div>Agilent</div><div><div>Ref 17 dBm</div><div>#Atten 25 dB</div><div>Mkr1 902.3120 MHz</div><div>5.483 dBm</div></div><div><div>Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offst</div><div>2</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Center 902.3 MHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 34.31 ms (1001 pts)</div></div></div><div><div>C:PICTURE.GIF file saved</div></div></div> <div><div>Freq/Channel</div><div>Center Freq</div><div>902.300000 MHz</div><div>Start Freq</div><div>902.150000 MHz</div><div>Stop Freq</div><div>902.450000 MHz</div><div>CF Step</div><div>30.0000000 kHz</div><div>Auto</div><div>Man</div><div>Freq Offset</div><div>0.00000000 Hz</div><div>Signal Track</div><div>On</div><div>Off</div><div>Scale Type</div><div>Log</div><div>Lin</div></div>	
CH00	
<div><div><div>Agilent</div><div><div>Ref 17 dBm</div><div>#Atten 25 dB</div><div>Mkr1 908.6970 MHz</div><div>6.438 dBm</div></div><div><div>Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offst</div><div>2</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Center 908.7 MHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 34.31 ms (1001 pts)</div></div></div><div><div>C:PICTURE.GIF file saved</div></div></div> <div><div>Freq/Channel</div><div>Center Freq</div><div>908.700000 MHz</div><div>Start Freq</div><div>908.550000 MHz</div><div>Stop Freq</div><div>908.850000 MHz</div><div>CF Step</div><div>30.0000000 kHz</div><div>Auto</div><div>Man</div><div>Freq Offset</div><div>0.00000000 Hz</div><div>Signal Track</div><div>On</div><div>Off</div><div>Scale Type</div><div>Log</div><div>Lin</div></div>	
CH32	
<div><div><div>Agilent</div><div><div>Ref 17 dBm</div><div>#Atten 25 dB</div><div>Mkr1 914.8436 MHz</div><div>5.207 dBm</div></div><div><div>Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offst</div><div>2</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Center 914.9 MHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 34.31 ms (1001 pts)</div></div></div><div><div>C:PICTURE.GIF file saved</div></div></div> <div><div>Freq/Channel</div><div>Center Freq</div><div>914.900000 MHz</div><div>Start Freq</div><div>914.750000 MHz</div><div>Stop Freq</div><div>915.050000 MHz</div><div>CF Step</div><div>30.0000000 kHz</div><div>Auto</div><div>Man</div><div>Freq Offset</div><div>0.00000000 Hz</div><div>Signal Track</div><div>On</div><div>Off</div><div>Scale Type</div><div>Log</div><div>Lin</div></div>	
CH63	

## 4.5 20dB and 99% Bandwidth

### Limit

For frequency hopping systems operating in the 902-928 MHz band. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW


VBW=approximately 3 X RBW

Detector=Peak

Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recoded.

### Test Configuration

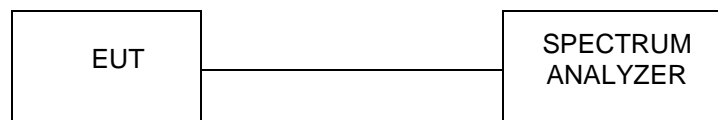



### Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	Lora


Channel	20dB bandwidth (KHz)	99% OBW(KHz)	Result
CH00	144.2	126.8	Pass
CH32	142.7	126.5	
CH63	142.9	125.9	

Test plot as follows:

*Lora*

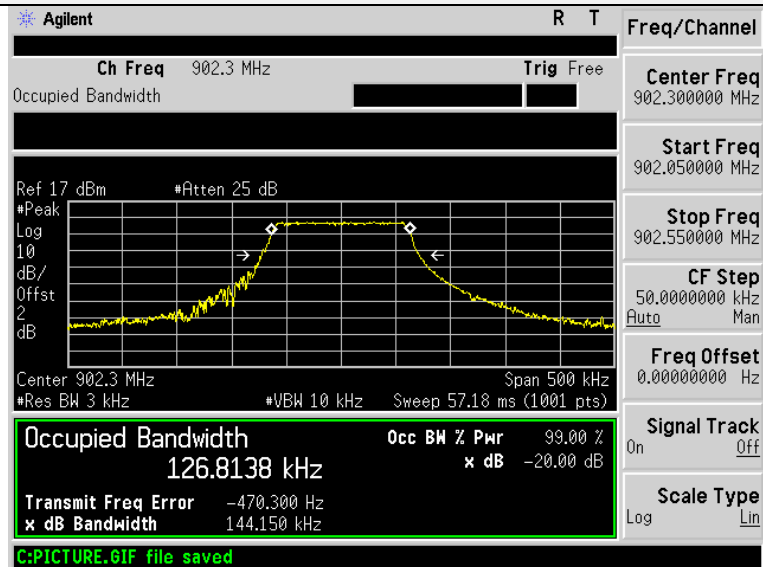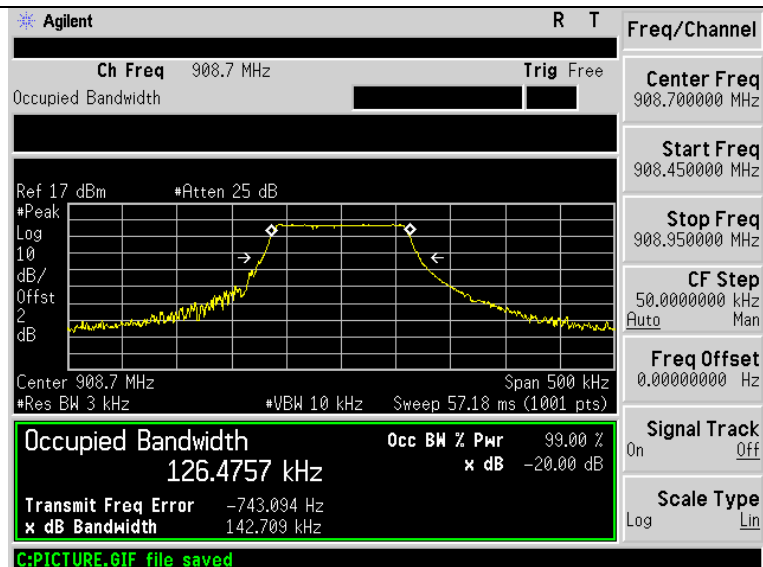 $CH00$ 

## CH32

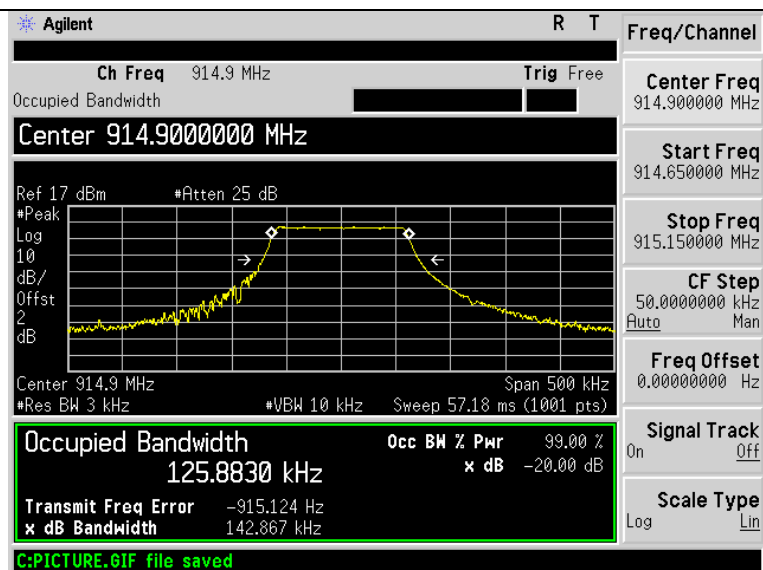

## CH63

## 4.6 Frequency Separation


### LIMIT

FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

### TEST CONFIGURATION

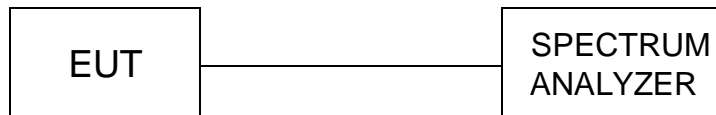


### TEST RESULTS

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	Lora

Channel	Channel Separation (KHz)	Limit	Result
CH00	200	25KHz or 20dB bandwidth	Pass
CH01			

Note: We have tested all mode at high, middle and low channel, and recorded worst case at low channel

### Test plot as follows:

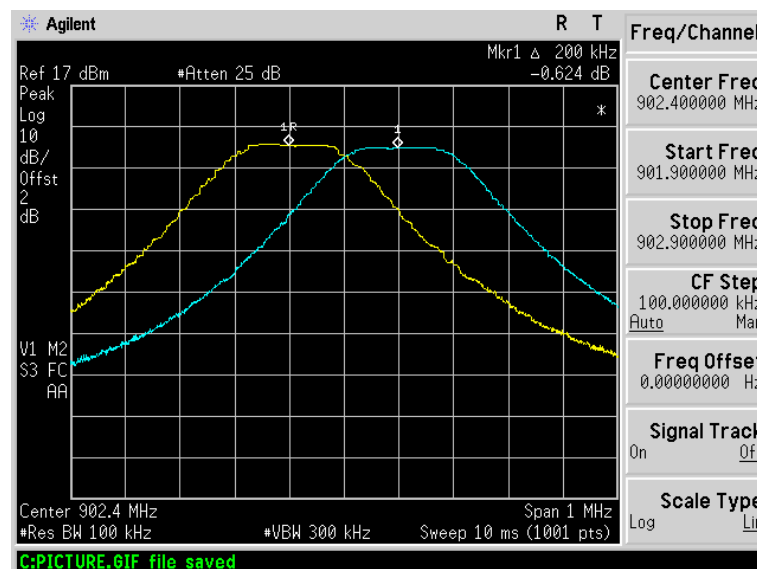

## 4.7 Number of hopping frequency


### Limit

For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 902MHz to 928MHz.

### Test Configuration

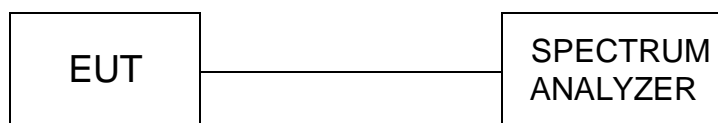


### Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	Lora

Modulation	Number of Hopping Channel	Limit	Result
Lora FHSS	64	≥50	Pass

### Test plot as follows:

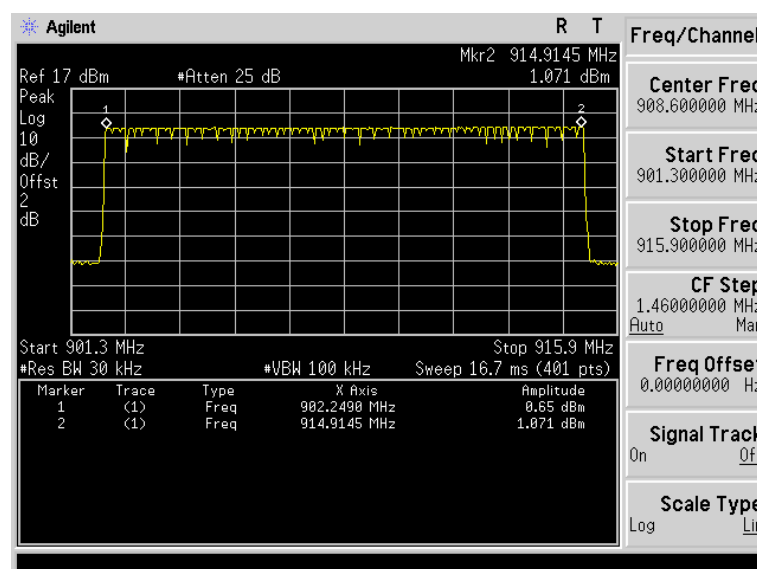

## 4.8 Time of Occupancy (Dwell Time)


### Limit

For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

### Test Configuration

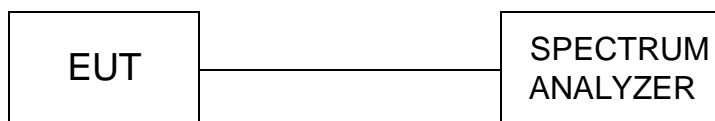


### Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	Lora

In measurement time of 20s, total of 6 transmissions occurred. The duration of one transmission was 51.6ms. Based on these measurements the transmitter operated  $6 \times 51.6\text{ms} = 0.3096\text{s}$  during the 20s period. The measurement result  $0.3096\text{s} < 0.4\text{s}$ , The test result is pass.

### Test plot as follows:

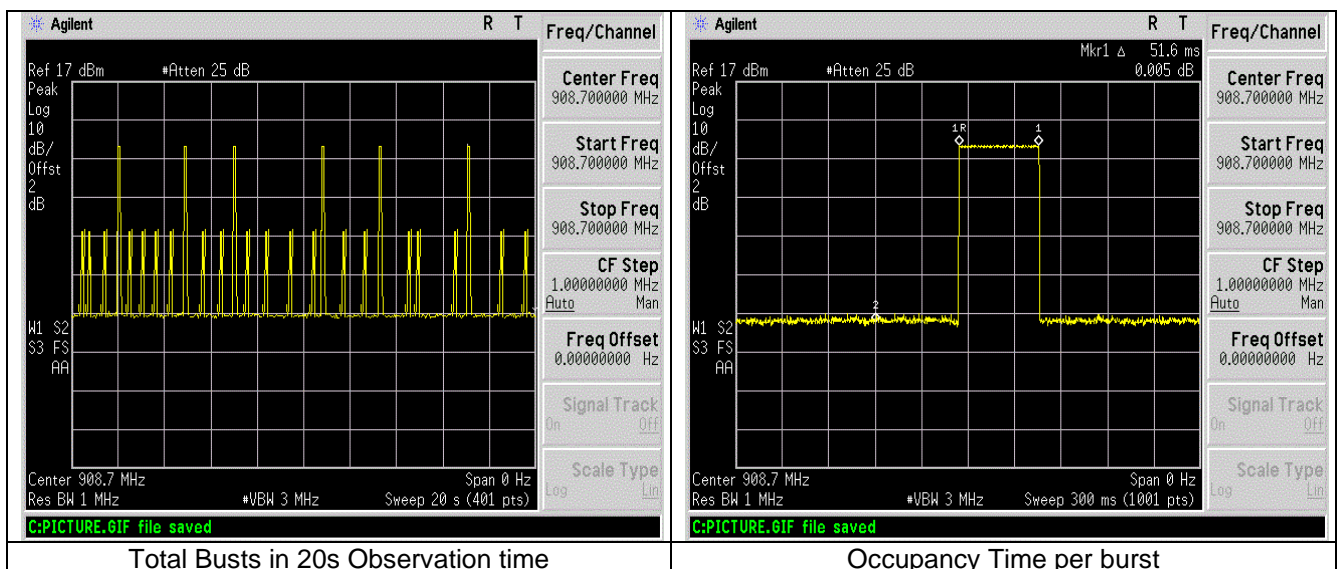

## 4.9 Out-of-band Emissions

### Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

### Test Configuration

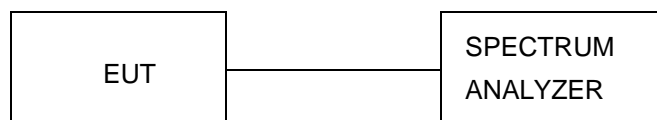



### Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	Lora



Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

Test plot as follows:



## Lora

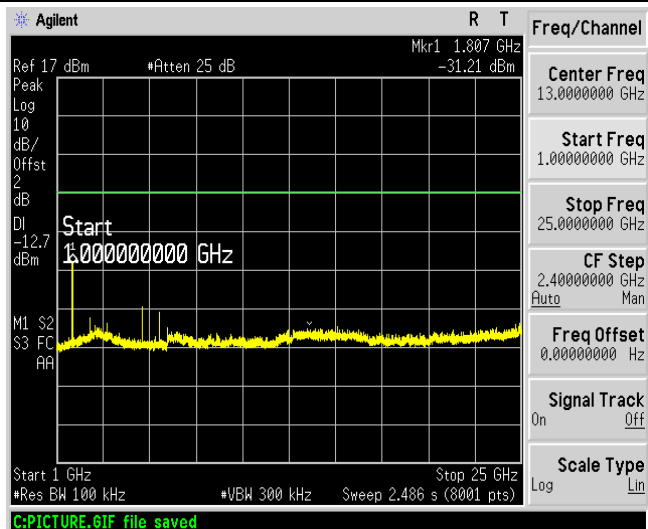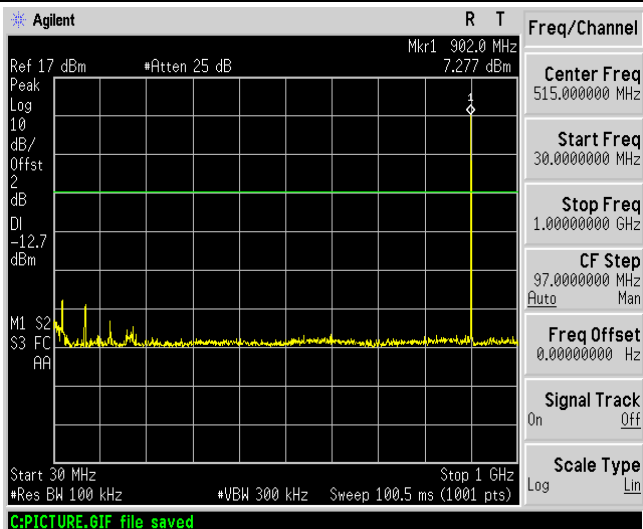



## CH00

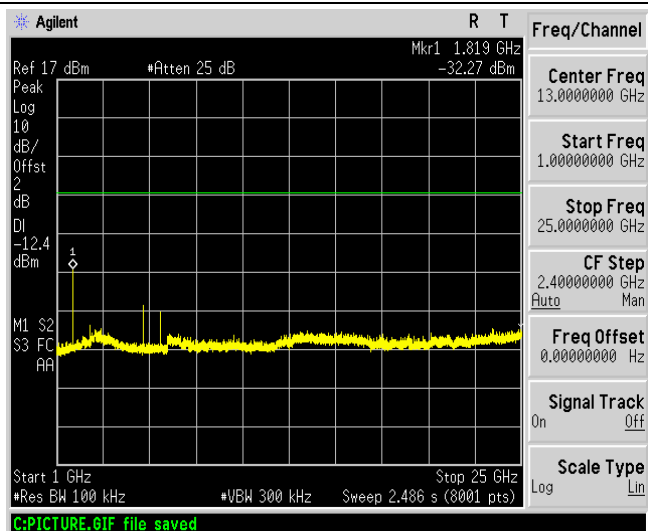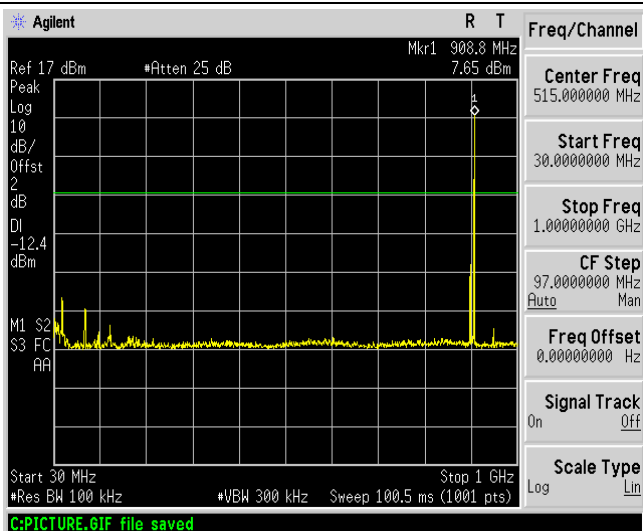


## CH32

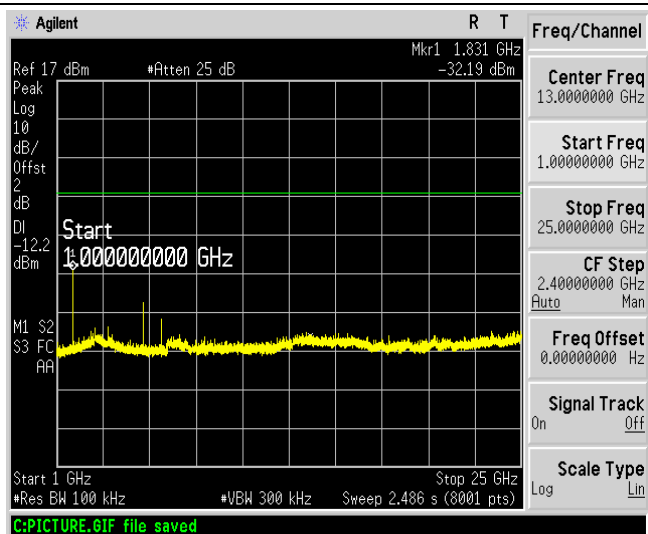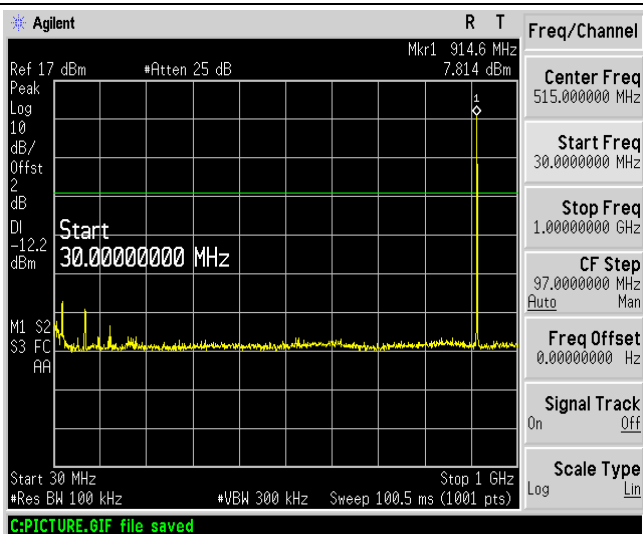


## CH63

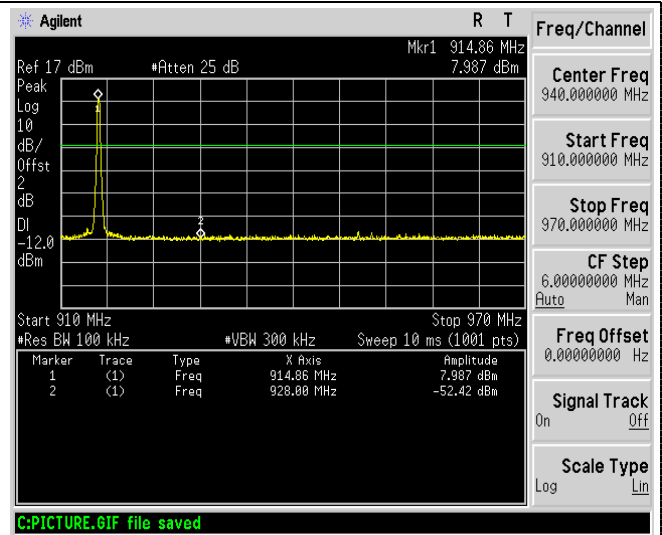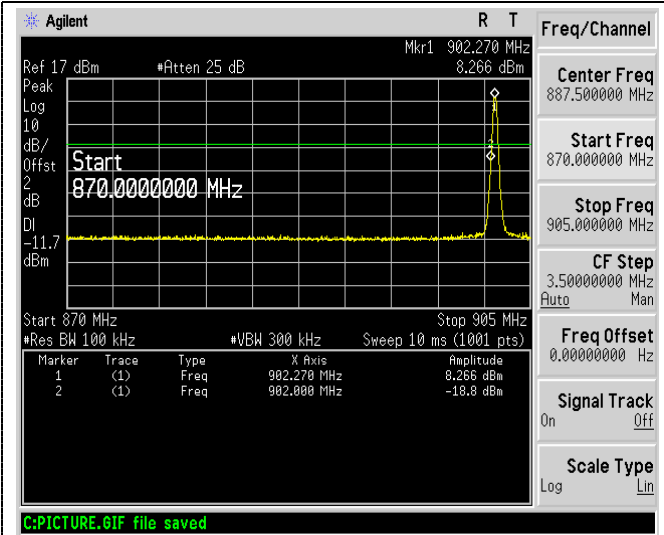

Left Band edge hopping off

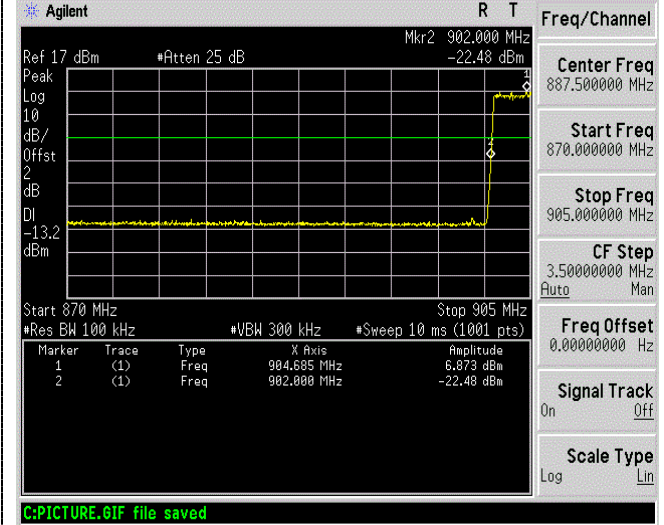

Right Band edge hopping off

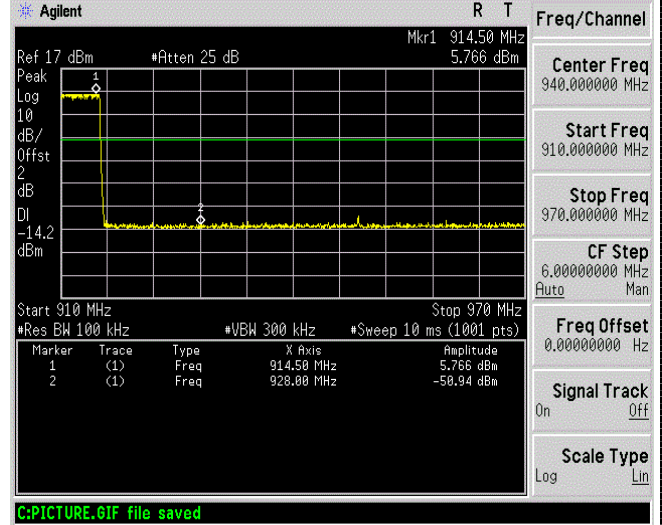

Left Band edge hopping on

Right Band edge hopping on

## 4.10 Pseudorandom Frequency Hopping Sequence

### TEST APPLICABLE

**For 47 CFR Part 15C section 15.247 (a) (1) & RSS 247 requirement:**

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test result

The device hops on 64 channel frequencies that are selected in a pseudo random order.

An example of the order is:

{48, 25, 53, 17, 20, 41, 37, 36, 10, 52, 15, 44, 30, 6, 54, 42, 33, 5, 55, 8, 28, 56, 1, 58, 57, 23, 49, 16, 3, 19, 29, 21, 59, 43, 31, 9, 60, 18, 27, 22, 45, 61, 13, 0, 2, 32, 11, 14, 62, 46, 12, 24, 4, 7, 38, 47, 35, 40, 50, 34, 39, 26, 51, 63}

where Channel 0 is 902.3 MHz and Channel 63 is 914.90 MHz.

The dwell time of the hopping is 52ms. Each channel is used equally on average.

## **4.11 Antenna Requirement**

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **Refer to statement below for compliance**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**


The maximum gain of antenna was 1.00dBi.


## 5 Test Setup Photos of the EUT1




## 6 Photos of the EUT




### External photos



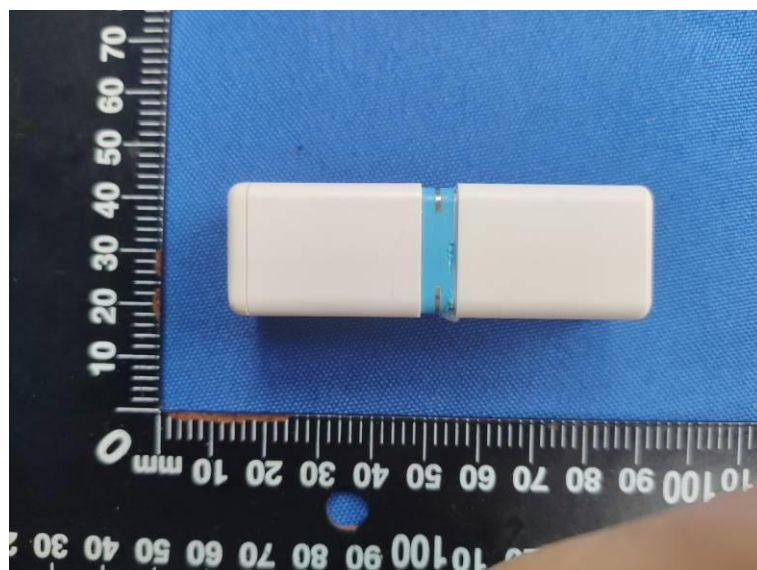


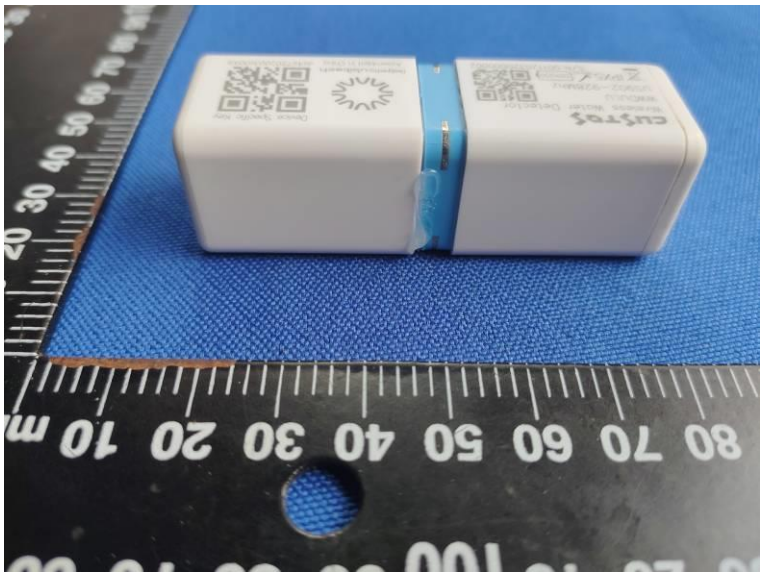

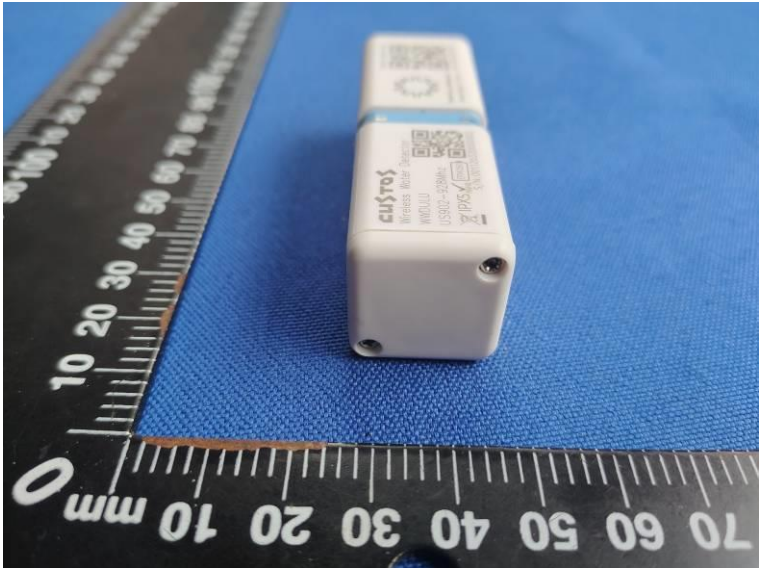

Internal Photos

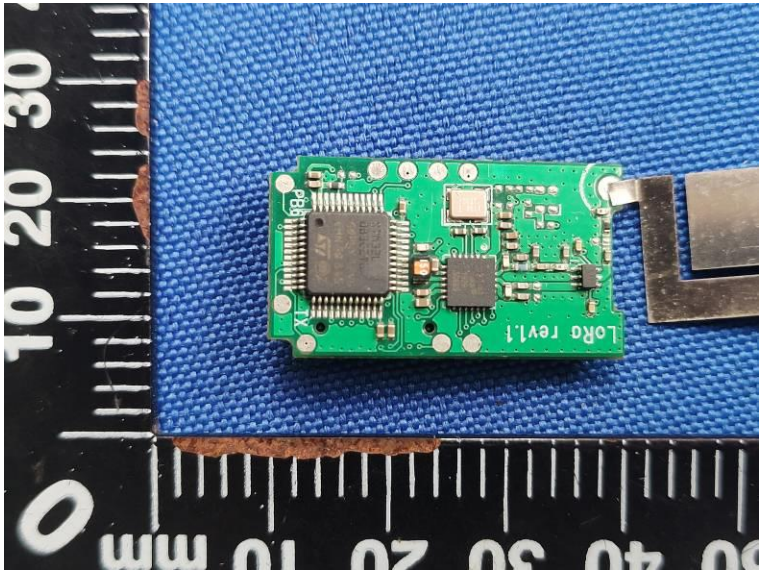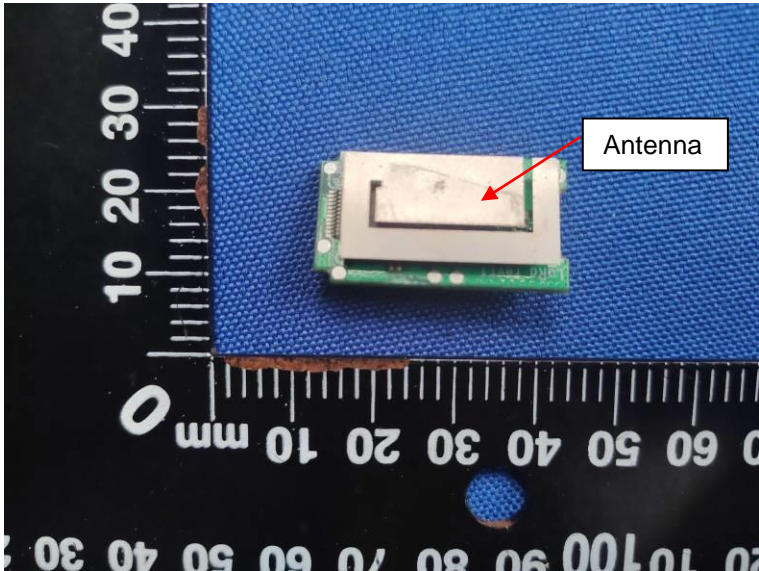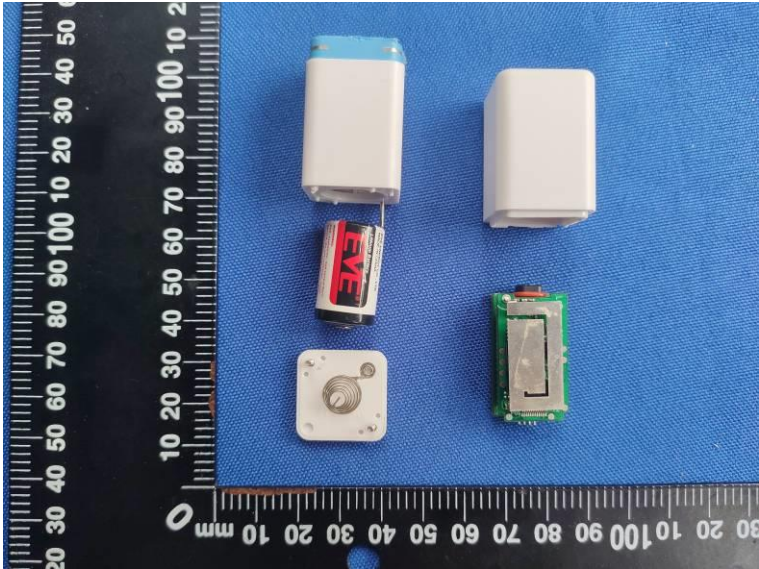

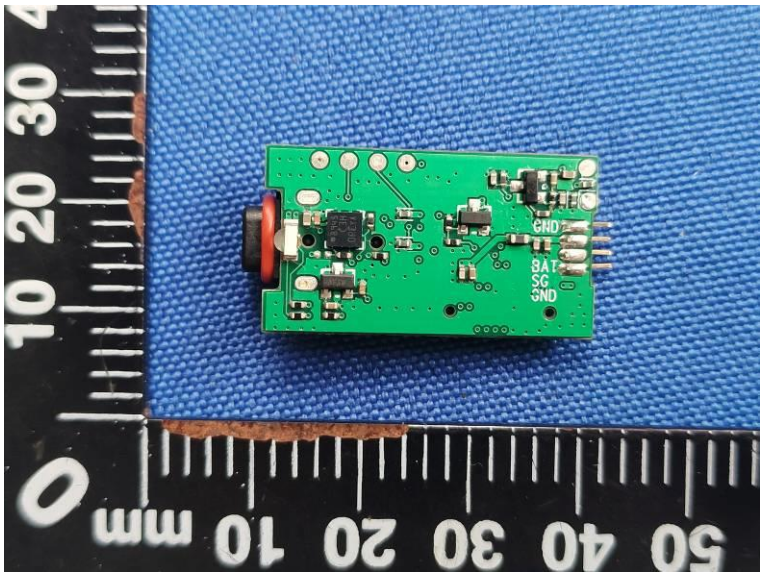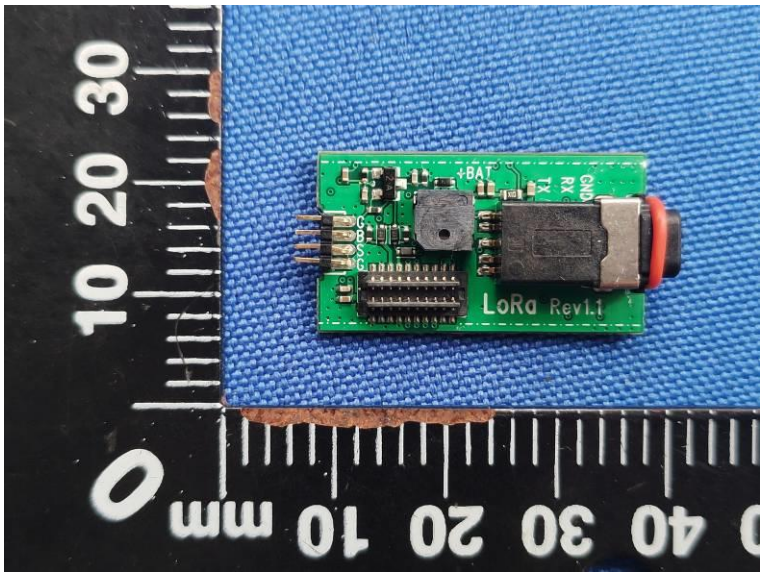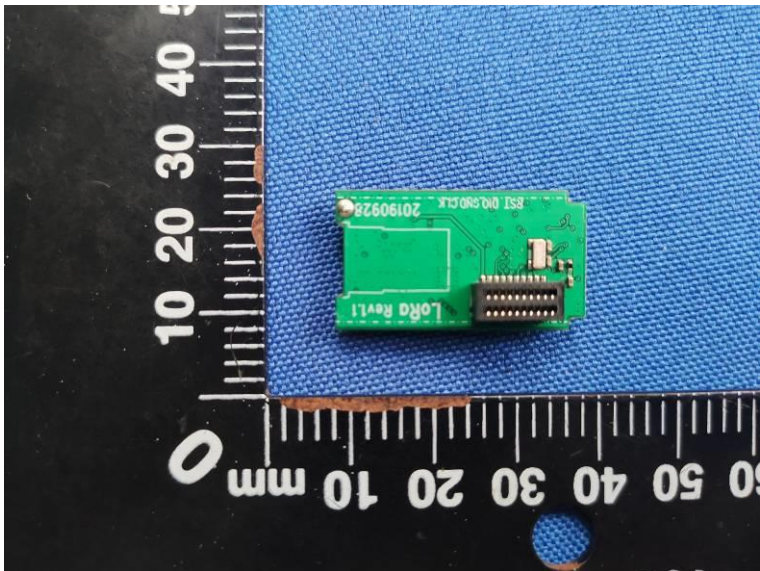

\*\*\*\*\* End of Report \*\*\*\*\*