



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247
RSS-GEN, ISSUE 5, APRIL 2018
RSS-247, ISSUE 2, FEBRUARY 2017
TEST REPORT

For

SZ DJI Osmo Technology Co.,Ltd.

12th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,
Nanshan District, Shenzhen, China

FCC ID: 2ANDR-OT1121807
IC: 23060-OT1121807

Report Type: Original Report	Product Name: OSMO POCKET WIRELESS MODULE
Report Number:	RDG180701002-00B
Report Date:	2018-07-20
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	10
SUPPORT CABLE LIST AND DETAILS	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION	13
APPLICABLE STANDARD	13
FCC §15.203 ,RSS-GEN§6.8- ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a),RSS-Gen §8.8– AC LINE CONDUCTED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	18
FCC §15.209, §15.205 , §15.247(d) & RSS-247 §5.5&RSS-GEN§8.10- SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22
FCC §15.247(a) (2)& RSS-247 §5.2 a) &RSS-247 §5.2 a) &RSS-GEN§6.7 –6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	33

FCC §15.247(b) (3)&RSS-247 §5.4 d) - MAXIMUM CONDUCTED OUTPUT POWER	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA	50
FCC §15.247(d)&RSS-247 §5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	52
FCC §15.247(e) &RSS-247 §5.2 b)- POWER SPECTRAL DENSITY	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	OSMO POCKET WIRELESS MODULE
EUT Model:	OT-112
FCC ID:	2ANDR-OT1121807
IC:	23060-OT1121807
Rated Input Voltage:	DC 5V
External Dimension:	40 mm (L) x 40 mm (W) x 25 mm (H)
Serial Number:	180701002
EUT Received Date:	2018-07-01

Objective

This report is prepared on behalf of **SZ DJI Osmo Technology Co.,Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.209, 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC submissions with Part 15C JAB, FCC ID: 2ANDR-OT1121807.
FCC submissions with Part 15E NII, FCC ID: 2ANDR-OT1121807.
ISED submissions with RSS-247 LE-LAN, IC: 23060-OT1121807.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices", RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.

For 802.11b/g/n ht20/n ht40 modes, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b/g/n ht20, EUT was tested with channel 1, 6 and 11,

For 802.11n ht40, EUT was tested with channel 3, 6 and 9.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The worst condition (maximum power) was configured by system default setting, the software 'MP_TOOL' was use for change the test mode and channels.


Mode	Channel	Frequency (MHz)	Data rate	Power level
802.11b	Low	2412	1 Mbps	41
	Middle	2437	1 Mbps	41
	High	2462	1 Mbps	42
802.11g	Low	2412	6 Mbps	53
	Middle	2437	6 Mbps	53
	High	2462	6 Mbps	54
802.11n ht20	Low	2412	MCS0	53
	Middle	2437	MCS0	53
	High	2462	MCS0	54
802.11n ht40	Low	2422	MCS0	53
	Middle	2437	MCS0	53
	High	2452	MCS0	54

Bluetooth LE mode was configured by the system default setting

The duty cycle as below:


Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	100	100	100
802.11n ht20	100	100	100
802.11n ht40	100	100	100
BLE	0.409	0.625	65.44

802.11b

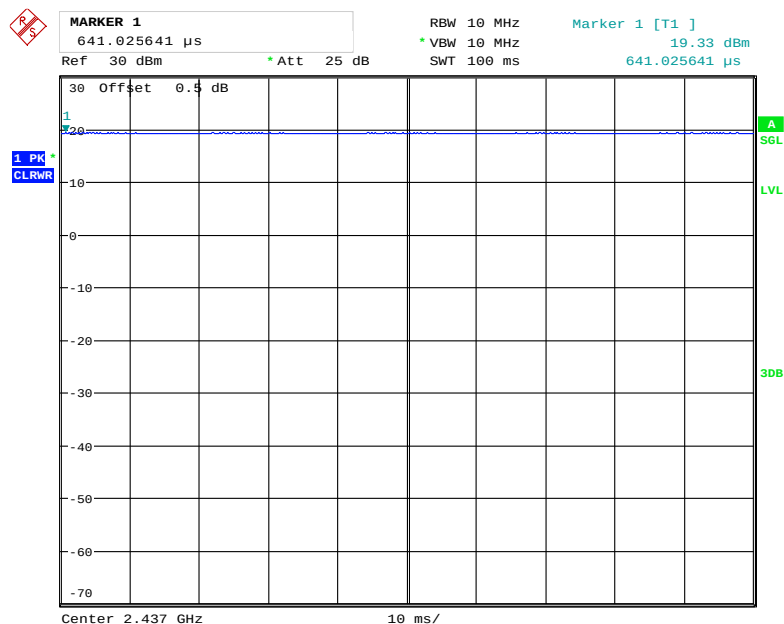


Date: 5.JUL.2018 09:43:34

802.11g

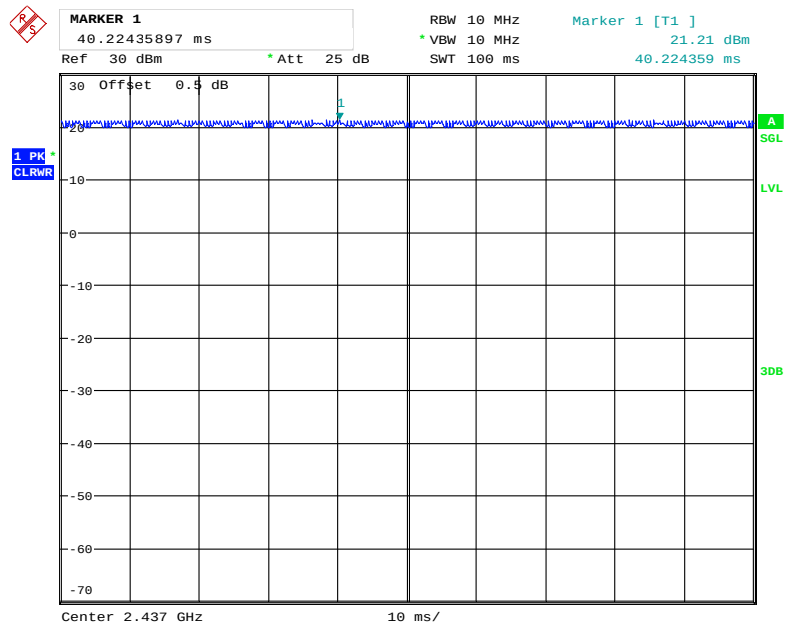


Date: 5.JUL.2018 09:44:07

802.11n ht20

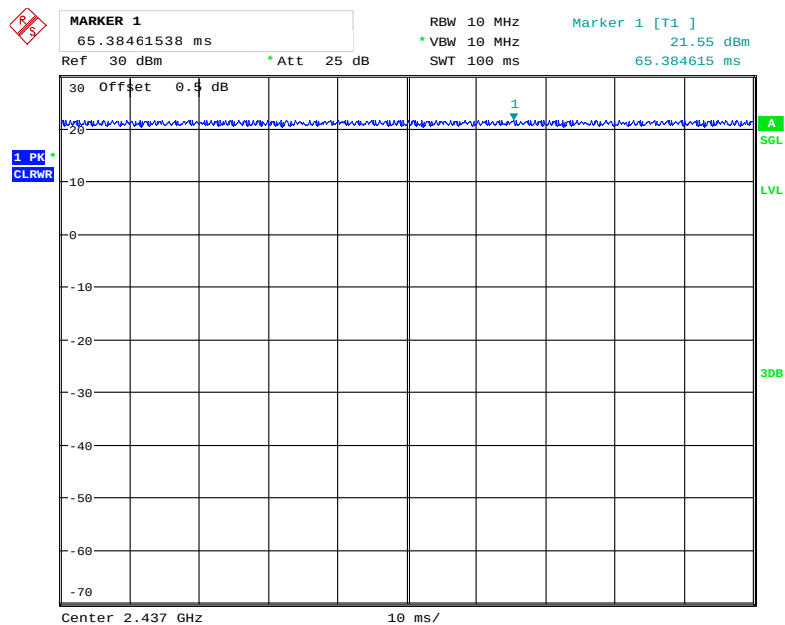


Date: 5.JUL.2018 09:45:21

802.11n ht40

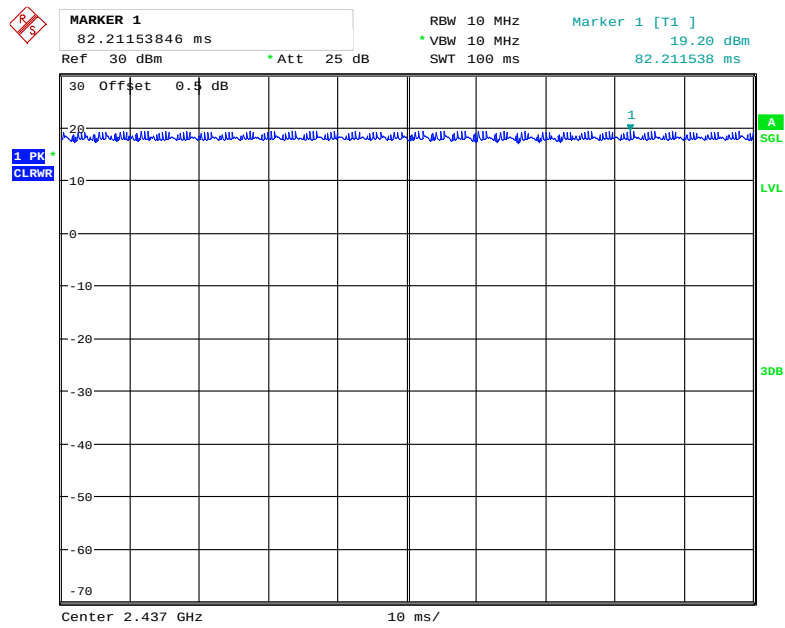

Date: 5.JUL.2018 09:45:37

BLE

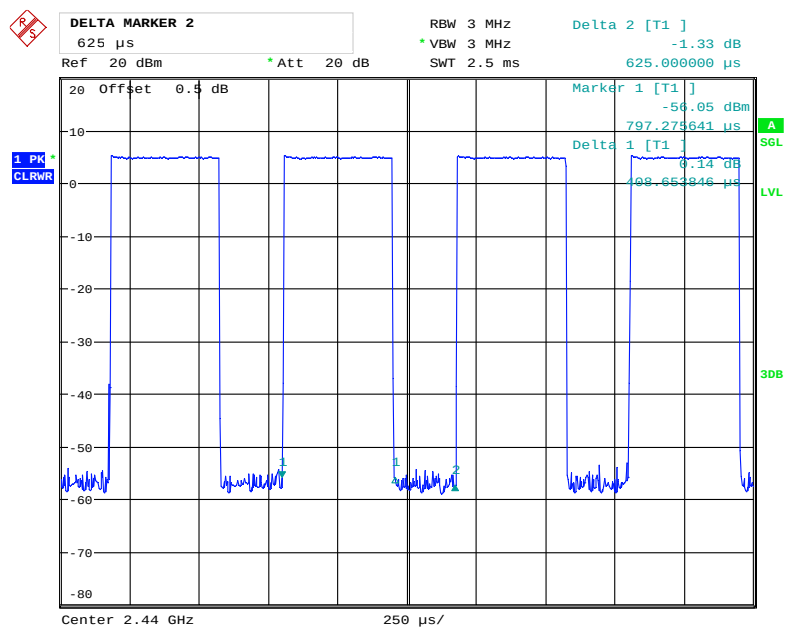


Date: 5.JUL.2018 08:52:34

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Dji	Osmo Pocket	OT110	N/A
Soy	Adapter	s005ayu0500101	N/A

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	Yes	No	1.08	Adapter	EUT

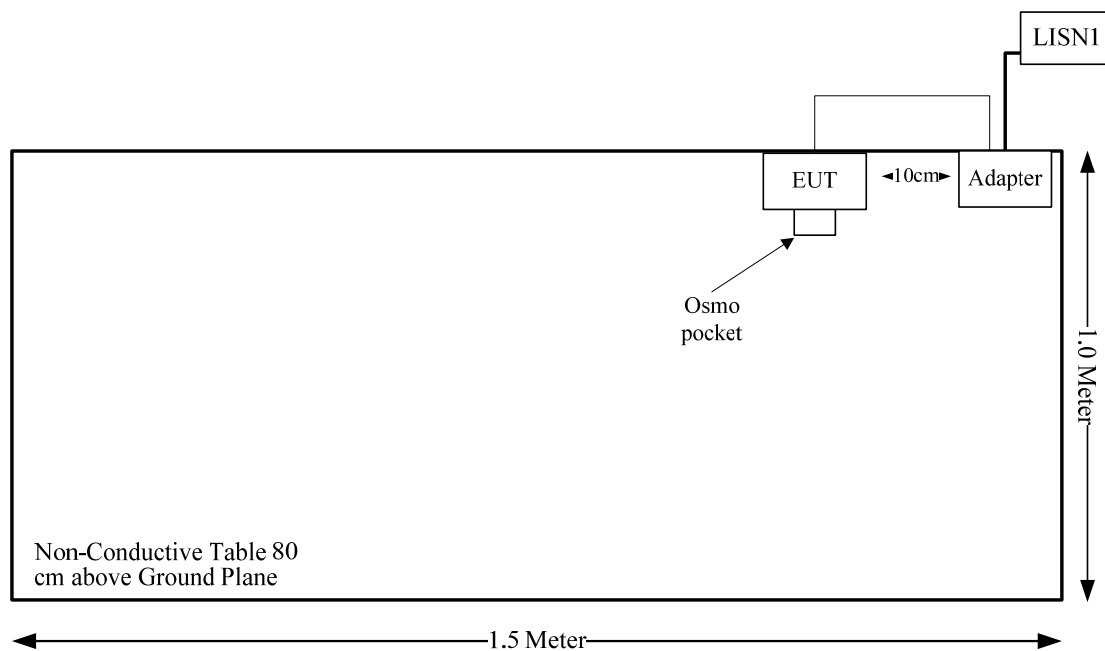Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
RSS-102 §2.5.2	Exemption Limits For Routine Evaluation-RF Exposure Evaluation	Compliance
FCC§15.203 RSS-GEN§6.8	Antenna Requirement	Compliance
§15.207 (a) RSS-Gen §8.8	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d) RSS-247 §5.5 RSS-Gen §8.10	Spurious Emissions	Compliance
§15.247 (a)(2) RSS-247 §5.2 a) RSS-Gen §6.7	6 dB Emission Bandwidth And 99% Occupied Bandwidth	Compliance
§15.247(b)(3) RSS-247 §5.4 d)	Maximum conducted output power	Compliance
§15.247(d) RSS-247 §5.5	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247 (e) RSS-247 §5.2 b)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wifi 2.4G	2412-2462	1.71	1.48	24	251.19	20.00	0.07	1.0
BLE	2402-2480	1.71	1.48	4	2.51	20.00	0.001	1.0
Wifi 5.8G	5725-5850	1.89	1.55	17	50.12	20.00	0.02	1.0

The BLE, Wifi 2.4GHz band or 5GHz band can't transmit simultaneously

Result: The device meet FCC MPE at 20 cm distance

RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION

Applicable Standard

According to RSS-102 § (2.5.2):

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

Calculated Data:

For Wifi 2.4GHz:

The maximum power including tune-up tolerance is 24dBm @ 2.4GHz band, the maximum antenna gain is 1.71 dBi, so the maximum e.i.p. is 25.71 dBm (0.372W)

Exemption from Routine Evaluation Limit is:

$$1.31 \times 10^{-2} f^{0.6834} = 1.31 \times 10^{-2} \times 2412^{0.6834} = 2.68 > 0.372 \text{ W}$$

So the device is compliance exemption from Routine Evaluation Limits –RF exposure Evaluation.

For BLE:

The maximum power including tune-up tolerance is 4dBm @ 2.4GHz band, the maximum antenna gain is 1.71 dBi, so the maximum e.i.p. is 5.71 dBm (0.0372W)

Exemption from Routine Evaluation Limit is:

$$1.31 \times 10^{-2} f^{0.6834} = 1.31 \times 10^{-2} \times 2402^{0.6834} = 2.68 > 0.0372 \text{ W}$$

So the device is compliance exemption from Routine Evaluation Limits –RF exposure Evaluation.

Result: Compliance

FCC §15.203 ,RSS-GEN§6.8- ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §6.8,

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISSED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has an internal antenna arrangement t, the antenna gain is 1.71 dBi in 2.4GHz band and 1.89 dBi in 5.8GHz band, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a),RSS-Gen §8.8– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a) and RSS-Gen§8.8

EUT Setup

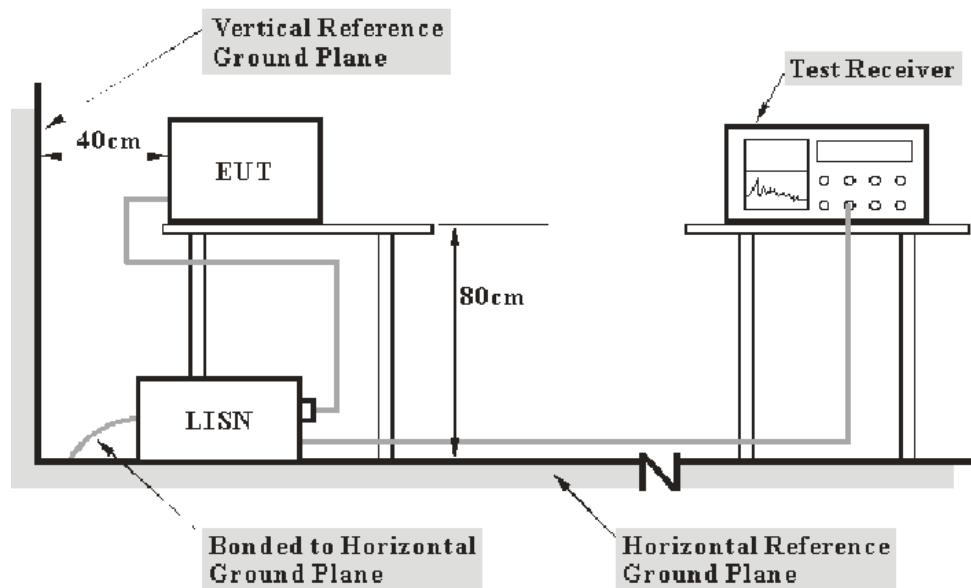

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
N/A	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	27.6 °C
Relative Humidity:	58 %
ATM Pressure:	99.8 kPa

The testing was performed by Sider Huang on 2018-07-18.


Test Mode: Transmitting(802.11b mode middle channel was the worst)

AC120V, 60 Hz, Line:

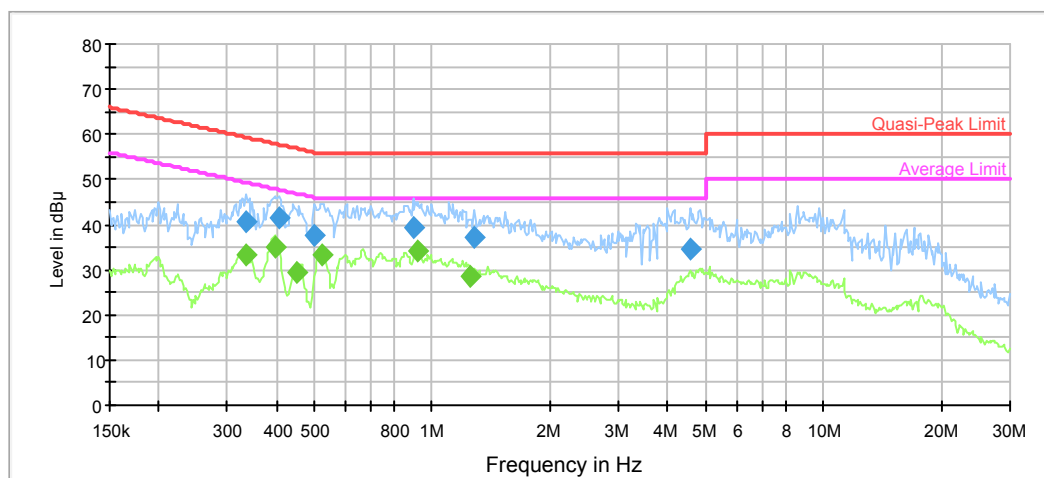

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.335433	40.8	9.000	L1	10.1	18.5	59.3	Compliance
0.406123	41.7	9.000	L1	10.0	16.0	57.7	Compliance
0.499611	37.5	9.000	L1	9.9	18.5	56.0	Compliance
0.893821	39.1	9.000	L1	9.8	16.9	56.0	Compliance
1.279307	37.0	9.000	L1	9.8	19.0	56.0	Compliance
4.577832	34.5	9.000	L1	9.8	21.5	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.335433	33.3	9.000	L1	10.1	16.0	49.3	Compliance
0.396530	34.9	9.000	L1	10.0	13.0	47.9	Compliance
0.450448	29.5	9.000	L1	9.9	17.4	46.9	Compliance
0.524077	33.5	9.000	L1	9.9	12.5	46.0	Compliance
0.922769	34.3	9.000	L1	9.8	11.7	46.0	Compliance
1.249088	28.3	9.000	L1	9.8	17.7	46.0	Compliance

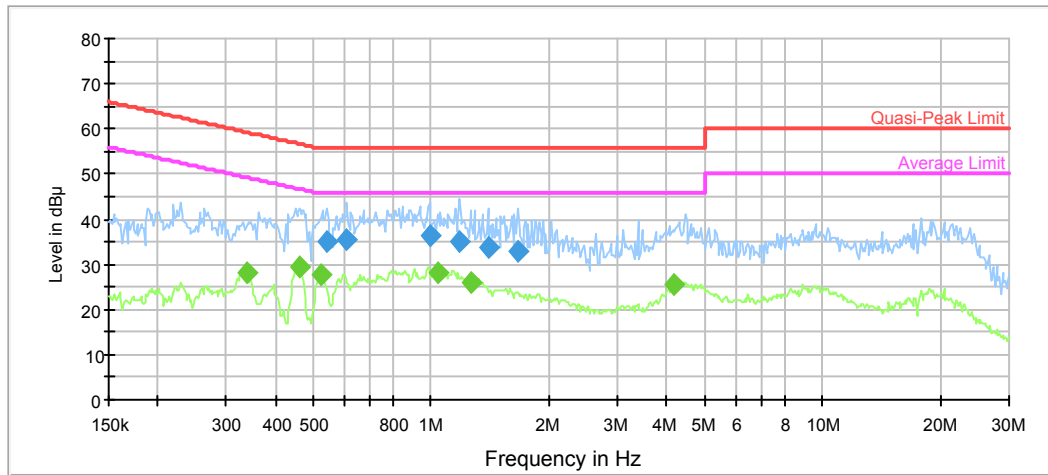AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.541050	35.1	9.000	N	9.9	20.9	56.0	Compliance
0.609741	35.6	9.000	N	9.8	20.4	56.0	Compliance
0.991374	36.4	9.000	N	9.8	19.6	56.0	Compliance
1.181325	34.9	9.000	N	9.8	21.1	56.0	Compliance
1.396499	33.9	9.000	N	9.7	22.1	56.0	Compliance
1.664073	32.9	9.000	N	9.7	23.1	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.338116	27.9	9.000	N	10.1	21.3	49.2	Compliance
0.461346	29.4	9.000	N	9.9	17.3	46.7	Compliance
0.524077	27.7	9.000	N	9.9	18.3	46.0	Compliance
1.039922	28.1	9.000	N	9.8	17.9	46.0	Compliance
1.259081	26.0	9.000	N	9.8	20.0	46.0	Compliance
4.193667	25.7	9.000	N	9.8	20.3	46.0	Compliance


FCC §15.209, §15.205 , §15.247(d) & RSS-247 §5.5&RSS-GEN§8.10- SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205; and RSS-247 §5.5, RSS-GEN §8.10

EUT Setup

Below 1GHz:

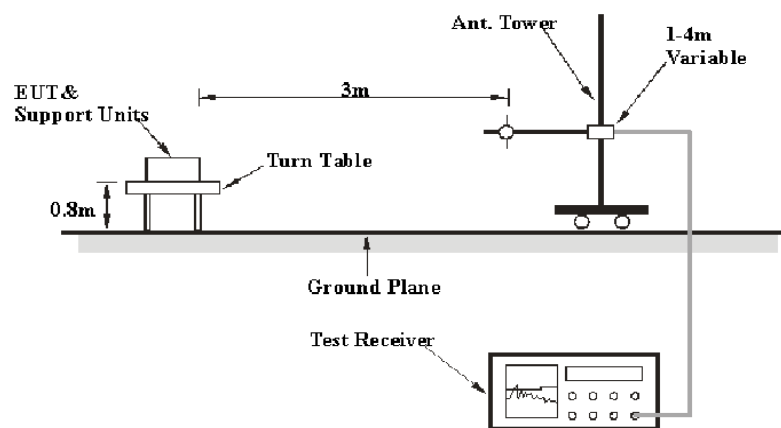

Above 1GHz:

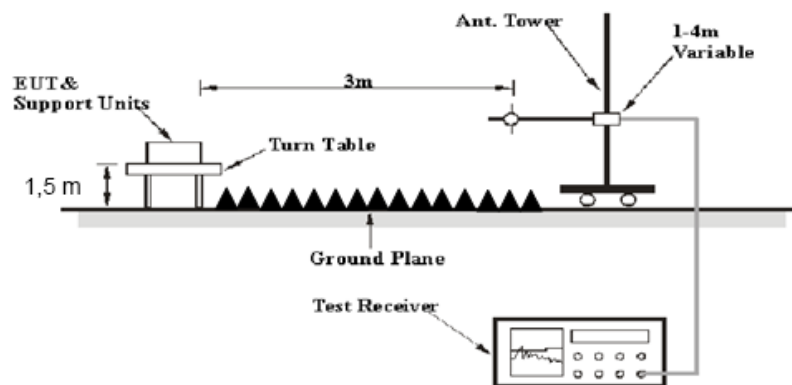

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 and RSS-247 §5.5,RSS-Gen §8.10 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2017-09-05	2018-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	26.5 °C
Relative Humidity:	40 %
ATM Pressure:	99.6 kPa

The testing was performed by Tyler Pan on 2018-07-06.


Test Mode: Transmitting

1) 30MHz-1GHz(802.11b Low Channel was the worst):

Horizontal:

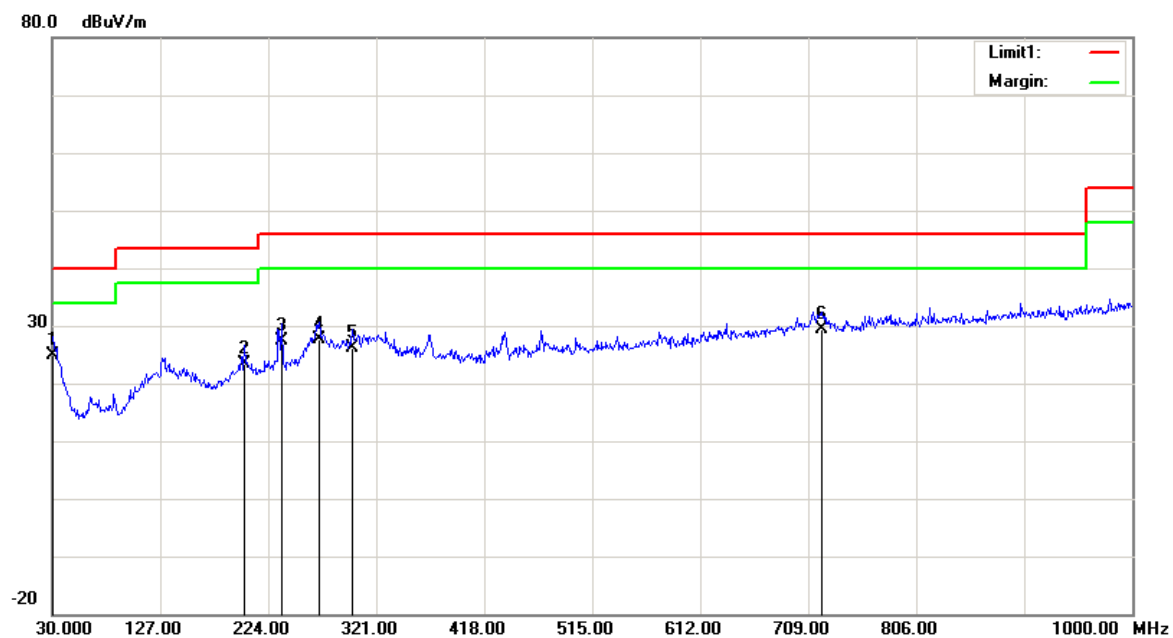

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	24.18	QP	0.82	25.00	40.00	15.00
202.6600	29.64	QP	-6.14	23.50	43.50	20.00
236.6100	33.70	QP	-6.30	27.40	46.00	18.60
269.5900	31.94	QP	-4.34	27.60	46.00	18.40
299.6600	30.26	QP	-4.06	26.20	46.00	19.80
721.6100	25.96	QP	3.44	29.40	46.00	16.60

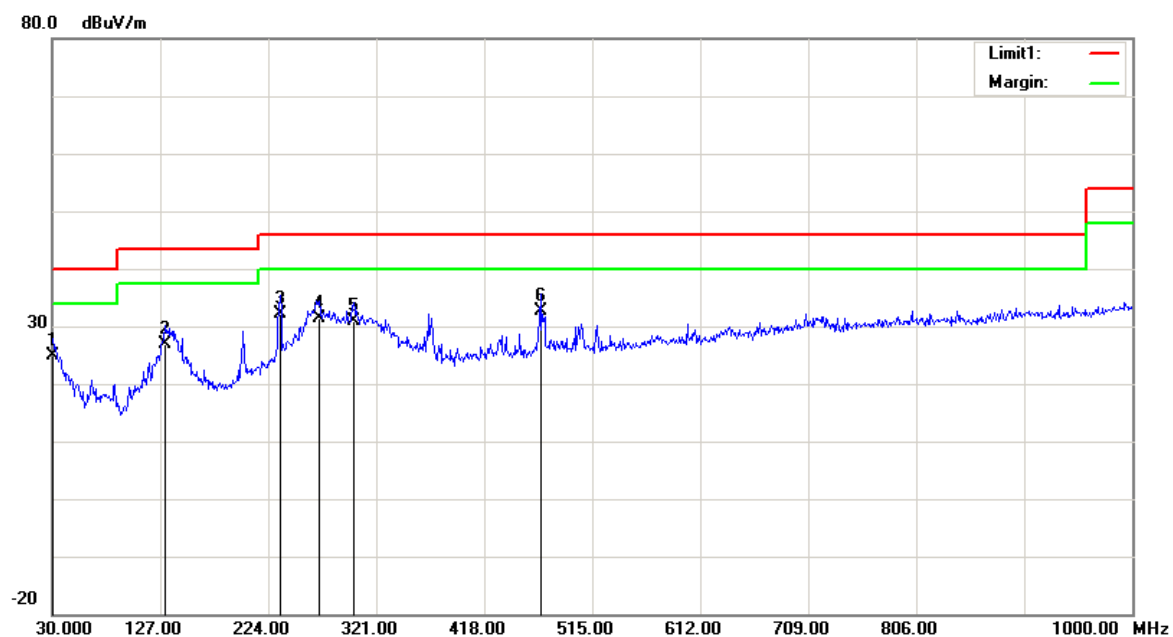Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	24.08	QP	0.82	24.90	40.00	15.10
131.8500	32.02	QP	-5.02	27.00	43.50	16.50
234.6700	38.64	QP	-6.44	32.20	46.00	13.80
269.5900	35.64	QP	-4.34	31.30	46.00	14.70
300.6300	35.03	QP	-4.03	31.00	46.00	15.00
468.4400	33.10	QP	-0.50	32.60	46.00	13.40

2) 1-25GHz:**802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.53	PK	H	28.12	1.81	0.00	103.46	N/A	N/A
2412.00	68.76	AV	H	28.12	1.81	0.00	98.69	N/A	N/A
2412.00	67.08	PK	V	28.12	1.81	0.00	97.01	N/A	N/A
2412.00	62.54	AV	V	28.12	1.81	0.00	92.47	N/A	N/A
2390.00	25.85	PK	H	28.08	1.80	0.00	55.73	74.00	18.27
2390.00	12.21	AV	H	28.08	1.80	0.00	42.09	54.00	11.91
4824.00	47.43	PK	H	32.95	3.19	37.20	46.37	74.00	27.63
4824.00	35.01	AV	H	32.95	3.19	37.20	33.95	54.00	20.05
7236.00	46.38	PK	H	35.81	4.77	37.27	49.69	74.00	24.31
7236.00	34.10	AV	H	35.81	4.77	37.27	37.41	54.00	16.59
Middle Channel: 2437 MHz									
2437.00	71.43	PK	H	28.17	1.82	0.00	101.42	N/A	N/A
2437.00	67.02	AV	H	28.17	1.82	0.00	97.01	N/A	N/A
2437.00	64.53	PK	V	28.17	1.82	0.00	94.52	N/A	N/A
2437.00	60.08	AV	V	28.17	1.82	0.00	90.07	N/A	N/A
4874.00	47.36	PK	H	33.05	3.26	37.21	46.46	74.00	27.54
4874.00	34.95	AV	H	33.05	3.26	37.21	34.05	54.00	19.95
7311.00	46.42	PK	H	36.01	4.64	37.36	49.71	74.00	24.29
7311.00	34.08	AV	H	36.01	4.64	37.36	37.37	54.00	16.63
High Channel: 2462 MHz									
2462.00	71.21	PK	H	28.22	1.83	0.00	101.26	N/A	N/A
2462.00	66.85	AV	H	28.22	1.83	0.00	96.90	N/A	N/A
2462.00	63.20	PK	V	28.22	1.83	0.00	93.25	N/A	N/A
2462.00	59.06	AV	V	28.22	1.83	0.00	89.11	N/A	N/A
2483.50	26.14	PK	H	28.27	1.84	0.00	56.25	74.00	17.75
2483.50	12.39	AV	H	28.27	1.84	0.00	42.50	54.00	11.50
4924.00	47.77	PK	H	33.15	3.27	37.22	46.97	74.00	27.03
4924.00	35.36	AV	H	33.15	3.27	37.22	34.56	54.00	19.44
7386.00	46.51	PK	H	36.20	4.51	37.46	49.76	74.00	24.24
7386.00	34.07	AV	H	36.20	4.51	37.46	37.32	54.00	16.68

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	75.98	PK	H	28.12	1.81	0.00	105.91	N/A	N/A
2412.00	67.85	AV	H	28.12	1.81	0.00	97.78	N/A	N/A
2412.00	66.89	PK	V	28.12	1.81	0.00	96.82	N/A	N/A
2412.00	58.49	AV	V	28.12	1.81	0.00	88.42	N/A	N/A
2390.00	40.65	PK	H	28.08	1.80	0.00	70.53	74.00	3.47
2390.00	19.71	AV	H	28.08	1.80	0.00	49.59	54.00	4.41
4824.00	47.56	PK	H	32.95	3.19	37.20	46.50	74.00	27.50
4824.00	35.16	AV	H	32.95	3.19	37.20	34.10	54.00	19.90
7236.00	46.22	PK	H	35.81	4.77	37.27	49.53	74.00	24.47
7236.00	34.88	AV	H	35.81	4.77	37.27	38.19	54.00	15.81
Middle Channel:2437 MHz									
2437.00	74.35	PK	H	28.17	1.82	0.00	104.34	N/A	N/A
2437.00	66.14	AV	H	28.17	1.82	0.00	96.13	N/A	N/A
2437.00	64.91	PK	V	28.17	1.82	0.00	94.90	N/A	N/A
2437.00	56.52	AV	V	28.17	1.82	0.00	86.51	N/A	N/A
4874.00	47.26	PK	H	33.05	3.26	37.21	46.36	74.00	27.64
4874.00	34.85	AV	H	33.05	3.26	37.21	33.95	54.00	20.05
7311.00	46.34	PK	H	36.01	4.64	37.36	49.63	74.00	24.37
7311.00	33.96	AV	H	36.01	4.64	37.36	37.25	54.00	16.75
Low Channel:2462 MHz									
2462.00	73.49	PK	H	28.22	1.83	0.00	103.54	N/A	N/A
2462.00	65.66	AV	H	28.22	1.83	0.00	95.71	N/A	N/A
2462.00	65.99	PK	V	28.22	1.83	0.00	96.04	N/A	N/A
2462.00	57.76	AV	V	28.22	1.83	0.00	87.81	N/A	N/A
2483.50	37.94	PK	H	28.27	1.84	0.00	68.05	74.00	5.95
2483.50	18.44	AV	H	28.27	1.84	0.00	48.55	54.00	5.45
4924.00	47.21	PK	H	33.15	3.27	37.22	46.41	74.00	27.59
4924.00	34.88	AV	H	33.15	3.27	37.22	34.08	54.00	19.92
7386.00	46.10	PK	H	36.20	4.51	37.46	49.35	74.00	24.65
7386.00	33.79	AV	H	36.20	4.51	37.46	37.04	54.00	16.96

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	74.46	PK	H	28.12	1.81	0.00	104.39	N/A	N/A
2412.00	66.19	AV	H	28.12	1.81	0.00	96.12	N/A	N/A
2412.00	66.66	PK	V	28.12	1.81	0.00	96.59	N/A	N/A
2412.00	58.13	AV	V	28.12	1.81	0.00	88.06	N/A	N/A
2390.00	40.35	PK	H	28.08	1.80	0.00	70.23	74.00	3.77
2390.00	19.41	AV	H	28.08	1.80	0.00	49.29	54.00	4.71
4824.00	47.52	PK	H	32.95	3.19	37.20	46.46	74.00	27.54
4824.00	35.16	AV	H	32.95	3.19	37.20	34.10	54.00	19.90
7236.00	46.35	PK	H	35.81	4.77	37.27	49.66	74.00	24.34
7236.00	33.96	AV	H	35.81	4.77	37.27	37.27	54.00	16.73
Middle channel: 2437 MHz									
2437.00	74.33	PK	H	28.17	1.82	0.00	104.32	N/A	N/A
2437.00	65.97	AV	H	28.17	1.82	0.00	95.96	N/A	N/A
2437.00	65.39	PK	V	28.17	1.82	0.00	95.38	N/A	N/A
2437.00	57.13	AV	V	28.17	1.82	0.00	87.12	N/A	N/A
4874.00	47.31	PK	H	33.05	3.26	37.21	46.41	74.00	27.59
4874.00	34.99	AV	H	33.05	3.26	37.21	34.09	54.00	19.91
7311.00	46.25	PK	H	36.01	4.64	37.36	49.54	74.00	24.46
7311.00	33.76	AV	H	36.01	4.64	37.36	37.05	54.00	16.95
High Channel: 2462 MHz									
2462.00	73.88	PK	H	28.22	1.83	0.00	103.93	N/A	N/A
2462.00	65.15	AV	H	28.22	1.83	0.00	95.20	N/A	N/A
2462.00	63.98	PK	V	28.22	1.83	0.00	94.03	N/A	N/A
2462.00	55.74	AV	V	28.22	1.83	0.00	85.79	N/A	N/A
2483.50	40.44	PK	H	28.27	1.84	0.00	70.55	74.00	3.45
2483.50	19.20	AV	H	28.27	1.84	0.00	49.31	54.00	4.69
4924.00	47.26	PK	H	33.15	3.27	37.22	46.46	74.00	27.54
4924.00	34.85	AV	H	33.15	3.27	37.22	34.05	54.00	19.95
7386.00	46.19	PK	H	36.20	4.51	37.46	49.44	74.00	24.56
7386.00	33.60	AV	H	36.20	4.51	37.46	36.85	54.00	17.15

802.11n ht40 Mode:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	72.51	PK	H	28.14	1.81	0.00	102.46	N/A	N/A
2422.00	64.33	AV	H	28.14	1.81	0.00	94.28	N/A	N/A
2422.00	63.08	PK	V	28.14	1.81	0.00	93.03	N/A	N/A
2422.00	54.43	AV	V	28.14	1.81	0.00	84.38	N/A	N/A
2390.00	38.44	PK	H	28.08	1.80	0.00	68.32	74.00	5.68
2390.00	17.66	AV	H	28.08	1.80	0.00	47.54	54.00	6.46
4844.00	47.44	PK	H	32.99	3.22	37.20	46.45	74.00	27.55
4844.00	35.02	AV	H	32.99	3.22	37.20	34.03	54.00	19.97
7266.00	46.20	PK	H	35.89	4.72	37.31	49.50	74.00	24.50
7266.00	33.68	AV	H	35.89	4.72	37.31	36.98	54.00	17.02
Middle channel: 2437 MHz									
2437.00	71.76	PK	H	28.17	1.82	0.00	101.75	N/A	N/A
2437.00	63.12	AV	H	28.17	1.82	0.00	93.11	N/A	N/A
2437.00	63.64	PK	V	28.17	1.82	0.00	93.63	N/A	N/A
2437.00	55.35	AV	V	28.17	1.82	0.00	85.34	N/A	N/A
4874.00	47.61	PK	H	33.05	3.26	37.21	46.71	74.00	27.29
4874.00	35.22	AV	H	33.05	3.26	37.21	34.32	54.00	19.68
7311.00	36.23	PK	H	36.01	4.64	37.36	39.52	74.00	34.48
7311.00	33.74	AV	H	36.01	4.64	37.36	37.03	54.00	16.97
High Channel: 2452 MHz									
2452.00	71.52	PK	H	28.20	1.83	0.00	101.55	N/A	N/A
2452.00	63.21	AV	H	28.20	1.83	0.00	93.24	N/A	N/A
2452.00	64.29	PK	V	28.20	1.83	0.00	94.32	N/A	N/A
2452.00	55.93	AV	V	28.20	1.83	0.00	85.96	N/A	N/A
2483.50	37.41	PK	H	28.27	1.84	0.00	67.52	74.00	6.48
2483.50	18.43	AV	H	28.27	1.84	0.00	48.54	54.00	5.46
4904.00	47.33	PK	H	33.11	3.30	37.21	46.53	74.00	27.47
4904.00	34.76	AV	H	33.11	3.30	37.21	33.96	54.00	20.04
7356.00	46.12	PK	H	36.13	4.56	37.42	49.39	74.00	24.61
7356.00	33.85	AV	H	36.13	4.56	37.42	37.12	54.00	16.88

BLE

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402.00	67.74	PK	H	28.10	1.80	0.00	97.64	N/A	N/A
2402.00	63.05	AV	H	28.10	1.80	0.00	92.95	N/A	N/A
2402.00	59.92	PK	V	28.10	1.80	0.00	89.82	N/A	N/A
2402.00	55.16	AV	V	28.10	1.80	0.00	85.06	N/A	N/A
2390.00	24.54	PK	H	28.08	1.80	0.00	54.42	74.00	19.58
2390.00	13.24	AV	H	28.08	1.80	0.00	43.12	54.00	10.88
4804.00	47.89	PK	H	32.91	3.17	37.20	46.77	74.00	27.23
4804.00	35.52	AV	H	32.91	3.17	37.20	34.40	54.00	19.60
7206.00	46.10	PK	H	35.74	4.82	37.23	49.43	74.00	24.57
7206.00	33.69	AV	H	35.74	4.82	37.23	37.02	54.00	16.98
Middle Channel: 2440 MHz									
2440.00	68.33	PK	H	28.18	1.82	0.00	98.33	N/A	N/A
2440.00	63.81	AV	H	28.18	1.82	0.00	93.81	N/A	N/A
2440.00	60.64	PK	V	28.18	1.82	0.00	90.64	N/A	N/A
2440.00	56.04	AV	V	28.18	1.82	0.00	86.04	N/A	N/A
4880.00	47.44	PK	H	33.06	3.27	37.21	46.56	74.00	27.44
4880.00	35.10	AV	H	33.06	3.27	37.21	34.22	54.00	19.78
7320.00	46.51	PK	H	36.03	4.62	37.37	49.79	74.00	24.21
7320.00	34.24	AV	H	36.03	4.62	37.37	37.52	54.00	16.48
High Channel: 2480 MHz									
2480.00	66.17	PK	H	28.26	1.84	0.00	96.27	N/A	N/A
2480.00	61.49	AV	H	28.26	1.84	0.00	91.59	N/A	N/A
2480.00	57.84	PK	V	28.26	1.84	0.00	87.94	N/A	N/A
2480.00	53.25	AV	V	28.26	1.84	0.00	83.35	N/A	N/A
2483.50	26.39	PK	H	28.27	1.84	0.00	56.50	74.00	17.50
2483.50	13.81	AV	H	28.27	1.84	0.00	43.92	54.00	10.08
4960.00	47.56	PK	H	33.22	3.23	37.25	46.76	74.00	27.24
4960.00	35.28	AV	H	33.22	3.23	37.25	34.48	54.00	19.52
7440.00	46.37	PK	H	36.34	4.41	37.52	49.60	74.00	24.40
7440.00	33.89	AV	H	36.34	4.41	37.52	37.12	54.00	16.88




Worst plots (802.11b Low Channel)

Horizontal

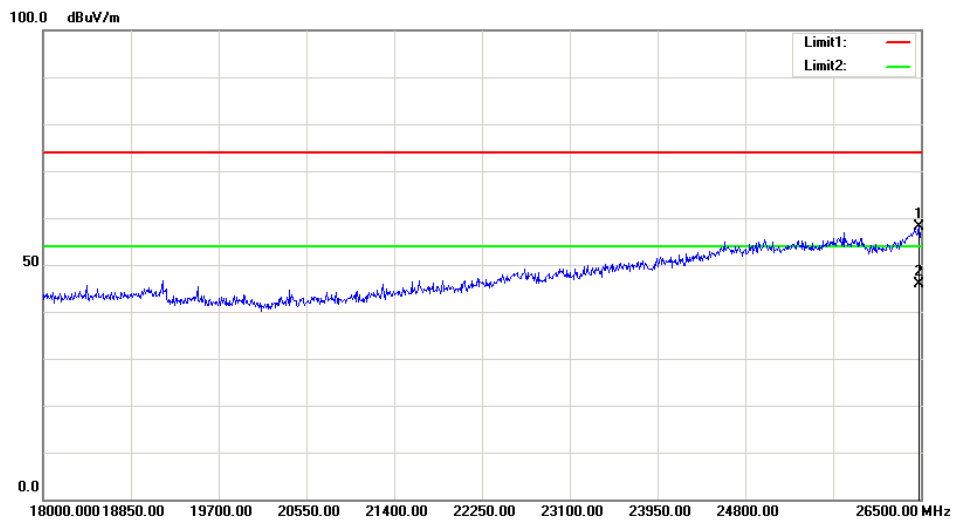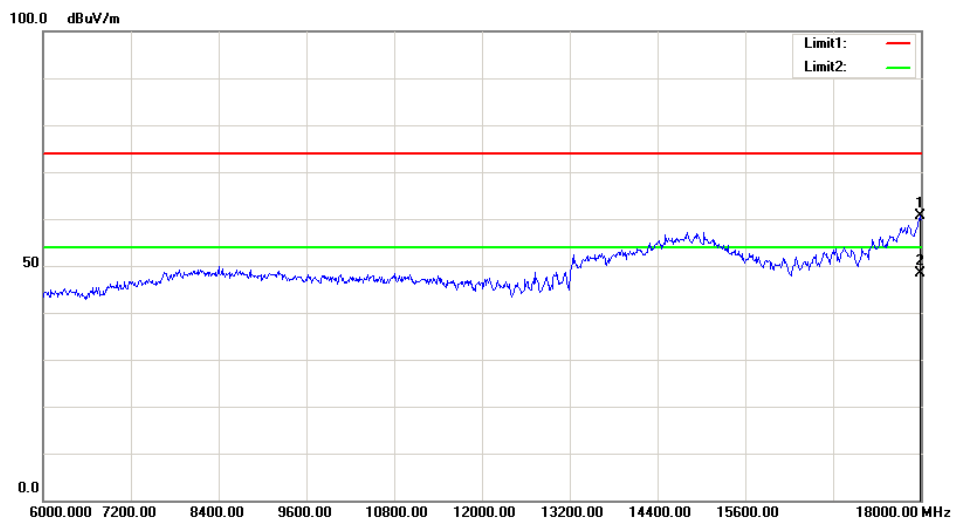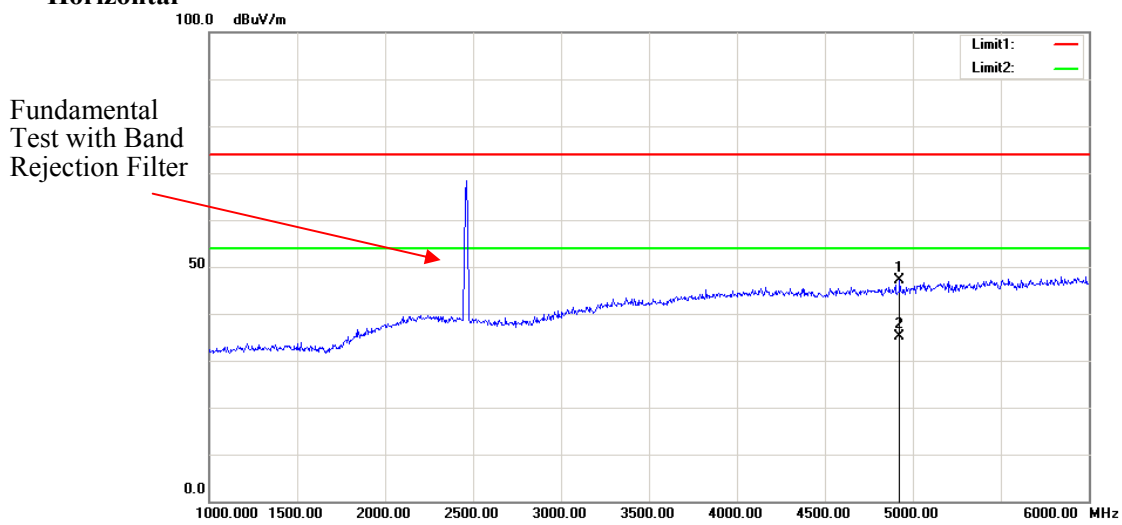

Vertical

Fundamental
Test with Band
Rejection Filter

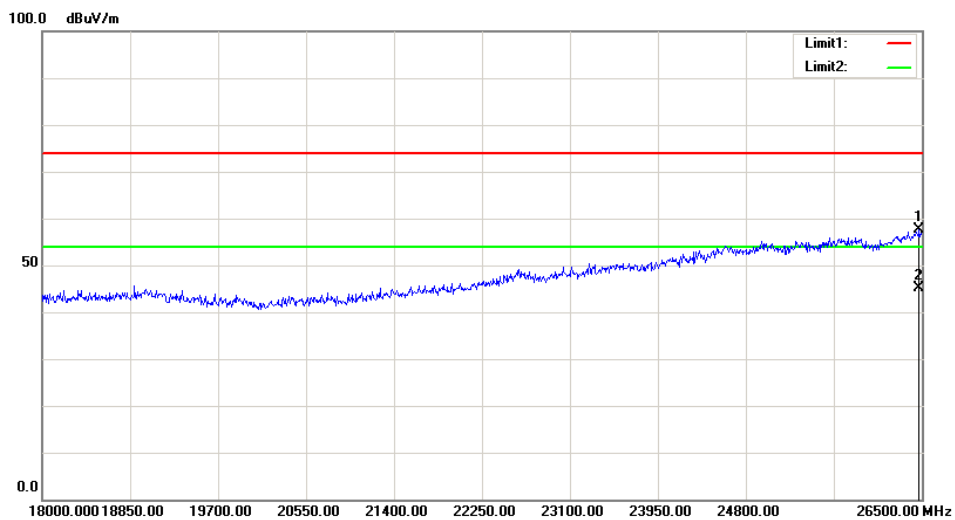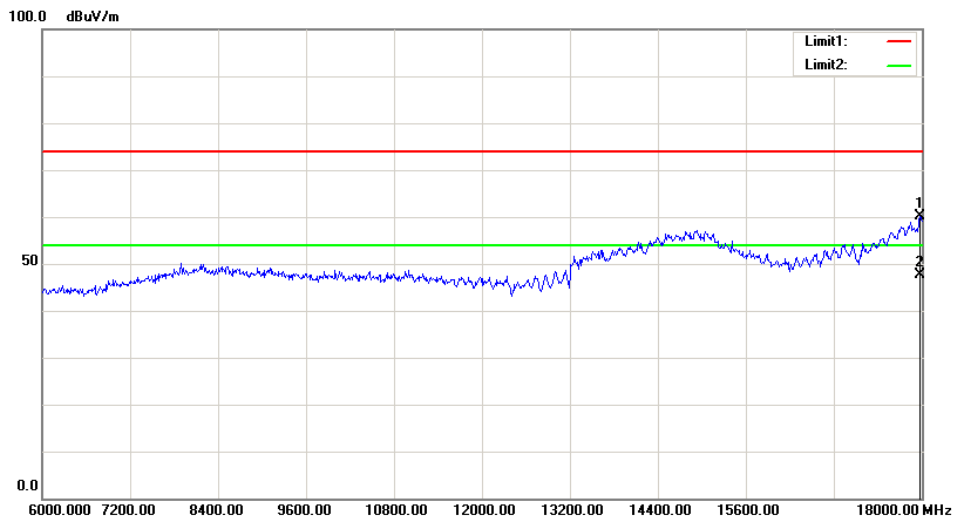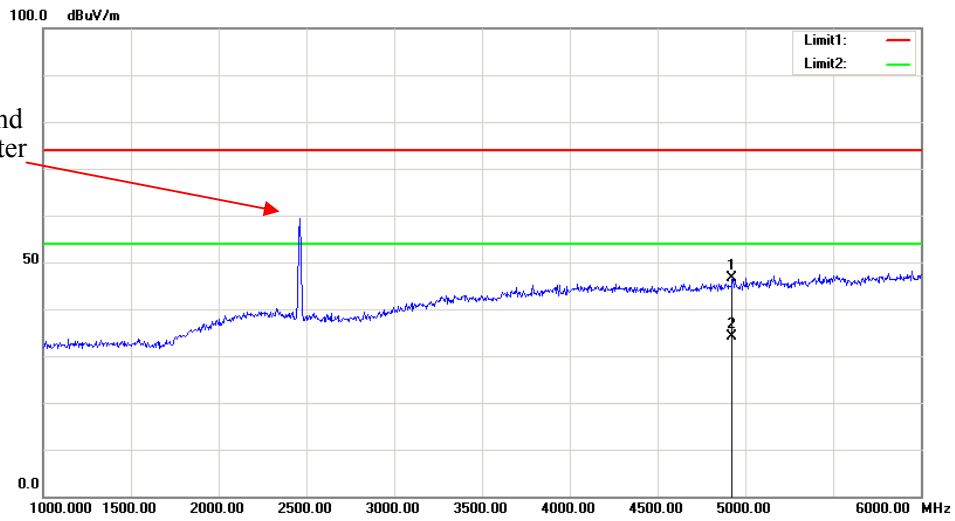

FCC §15.247(a) (2)& RSS-247 §5.2 a) &RSS-247 §5.2 a) &RSS-GEN§6.7 –6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

According to RSS-247 §5.2 a)


The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- h) Measure the 99% bandwidth use OBW test function.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28.8 ~ 28.9 °C
Relative Humidity:	67 ~ 70 %
ATM Pressure:	99.6 ~ 100.6 kPa

The testing was performed by Nami Quan from 2018-07-04 to 2018-07-05.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.13	15.12	≥ 0.5
	Middle	2437	10.19	15.12	≥ 0.5
	High	2462	10.19	15.12	≥ 0.5
802.11g	Low	2412	16.60	17.12	≥ 0.5
	Middle	2437	16.60	17.12	≥ 0.5
	High	2462	16.60	17.12	≥ 0.5
802.11n ht20	Low	2412	17.82	18.16	≥ 0.5
	Middle	2437	17.76	18.16	≥ 0.5
	High	2462	17.76	18.08	≥ 0.5
802.11n ht40	Low	2422	36.67	36.96	≥ 0.5
	Middle	2437	36.67	36.80	≥ 0.5
	High	2452	36.67	36.96	≥ 0.5
BLE	Low	2402	0.69	1.05	≥ 0.5
	Middle	2440	0.71	1.04	≥ 0.5
	High	2480	0.72	1.04	≥ 0.5


6dB Bandwidth:

802.11b Low Channel

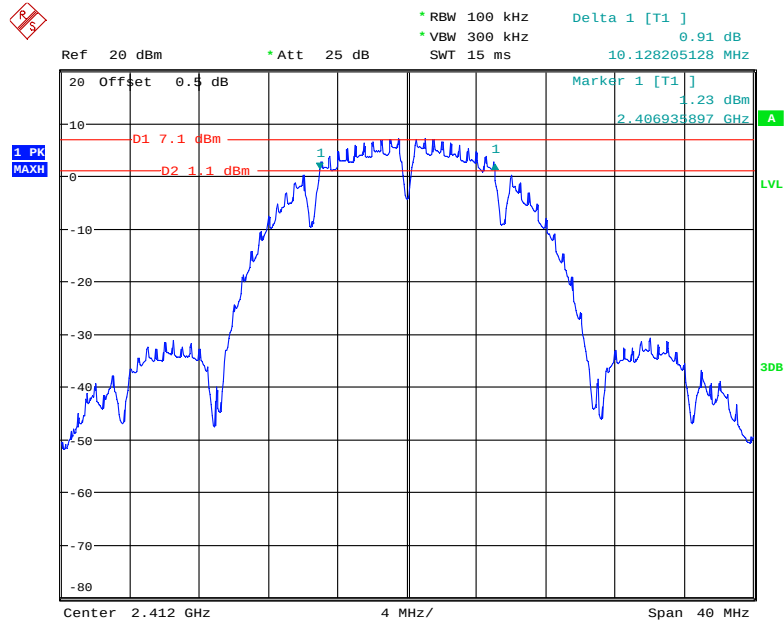


Date: 5.JUL.2018 09:13:52

802.11b Middle Channel

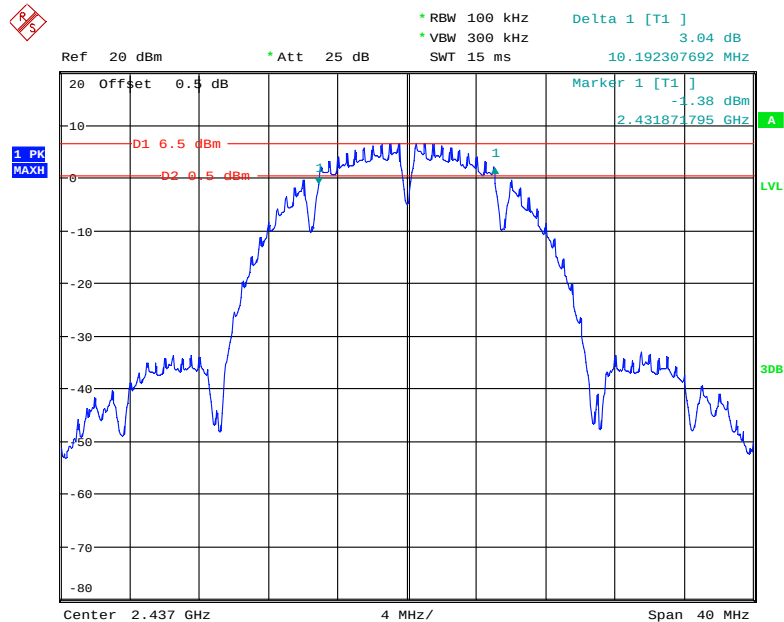


Date: 5.JUL.2018 09:15:09

802.11b High Channel

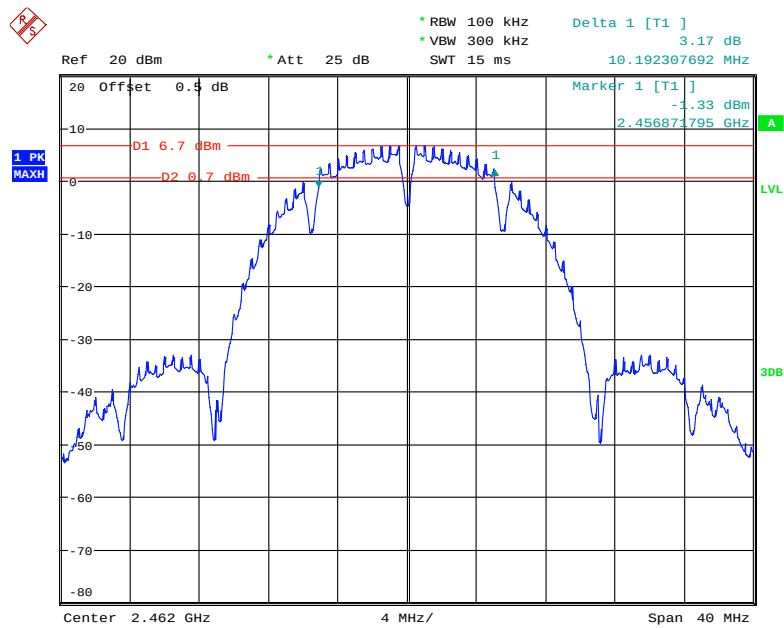


Date: 5.JUL.2018 09:15:55


802.11g Low Channel

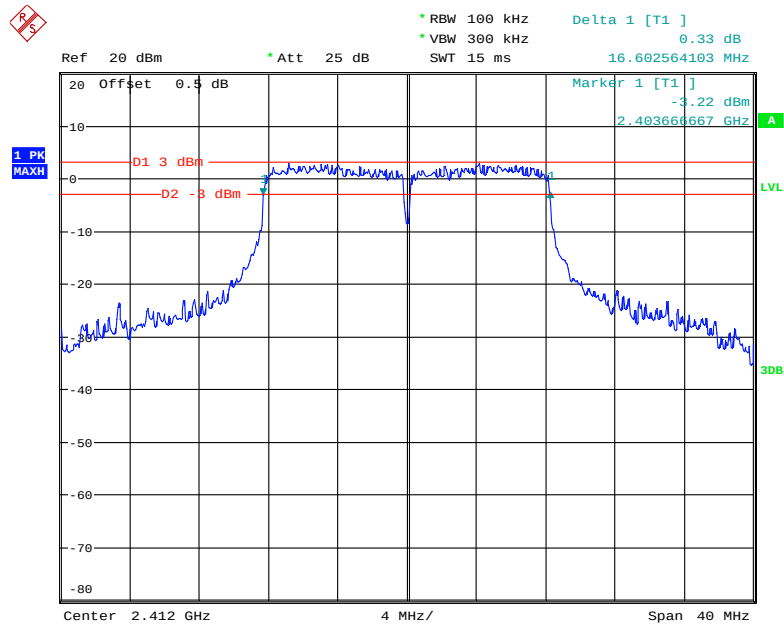

Date: 5.JUL.2018 09:17:08

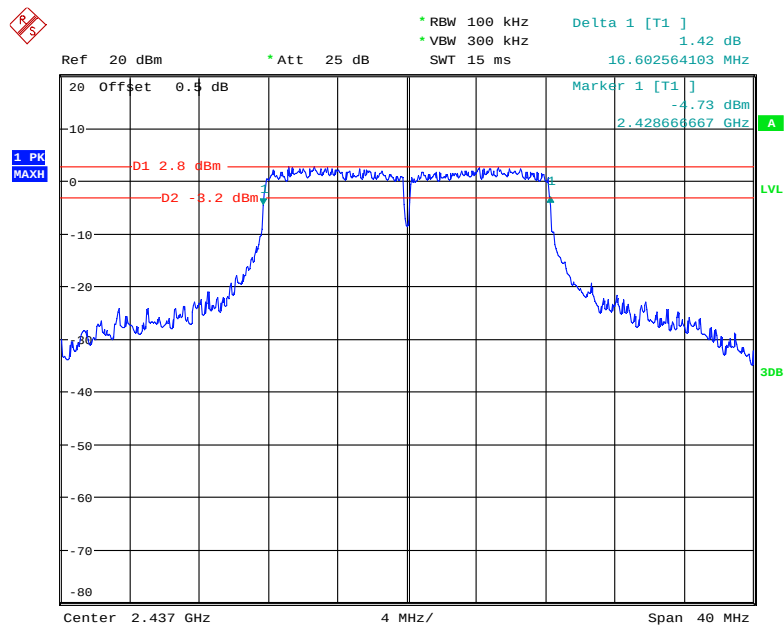
802.11g Middle Channel

Date: 5.JUL.2018 09:17:53

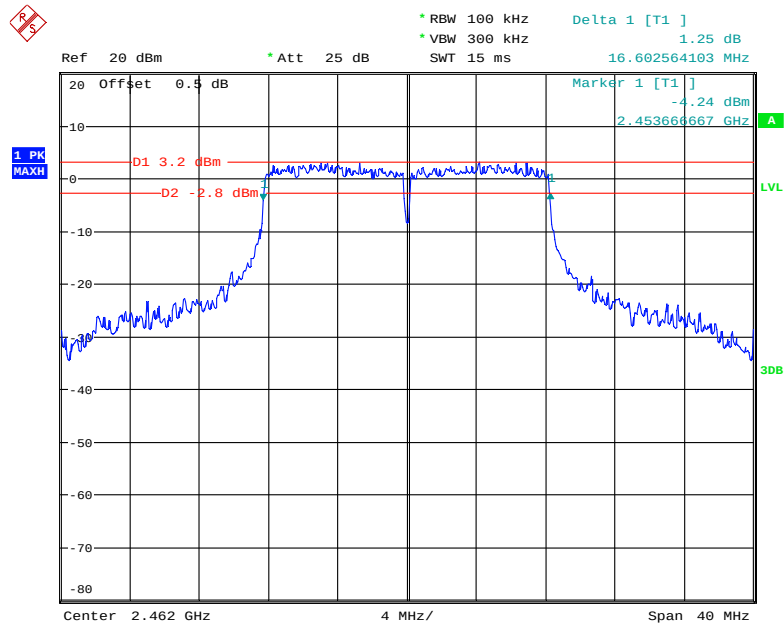802.11g High Channel


Date: 5.JUL.2018 09:18:35

802.11n ht20 Low Channel

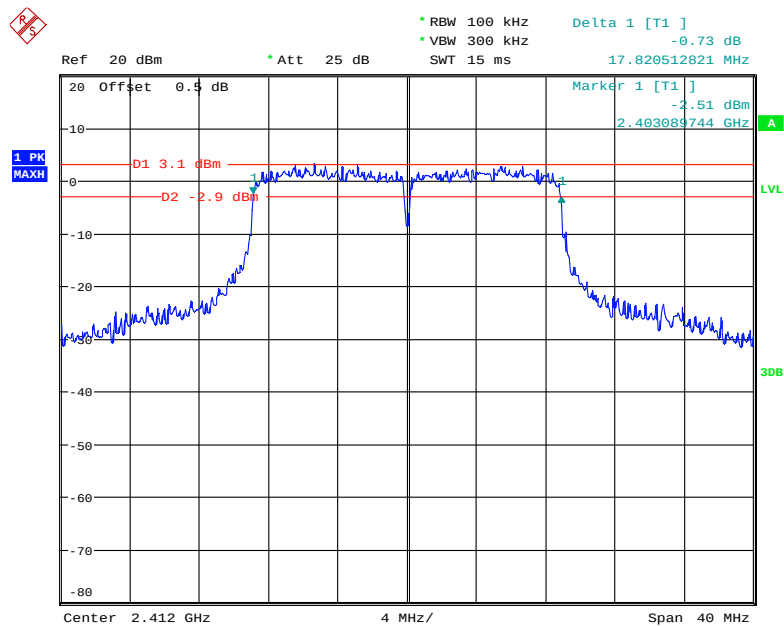


Date: 5.JUL.2018 09:19:18

802.11n ht20 Middle Channel

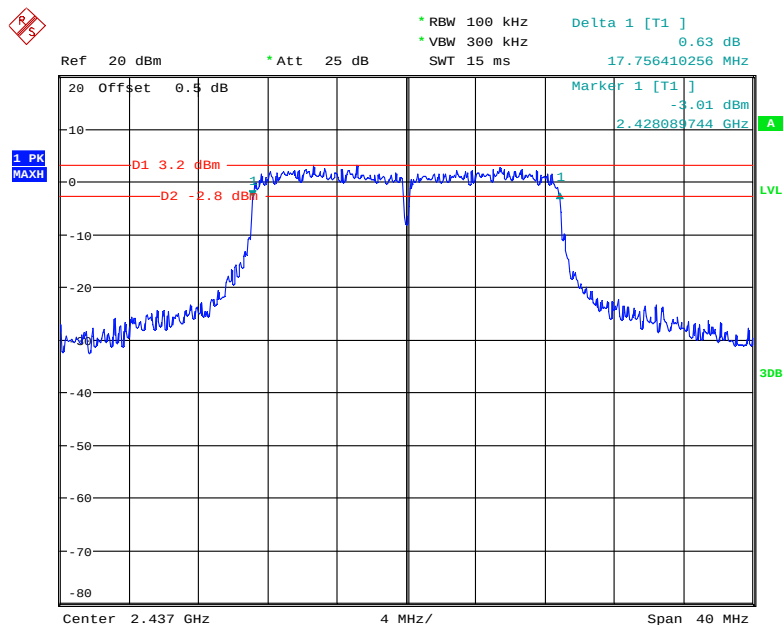


Date: 5.JUL.2018 09:19:55

802.11n ht20 High Channel

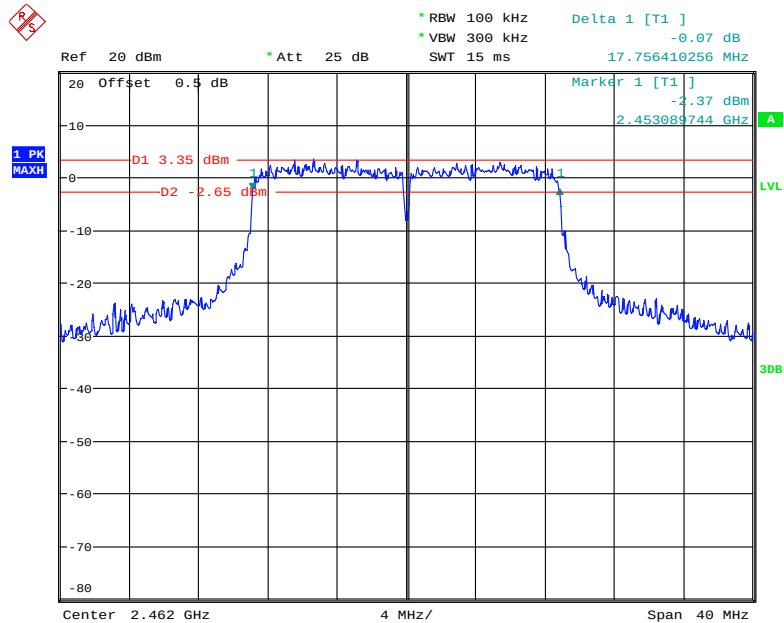


Date: 5.JUL.2018 09:20:35

802.11n ht40 Low Channel

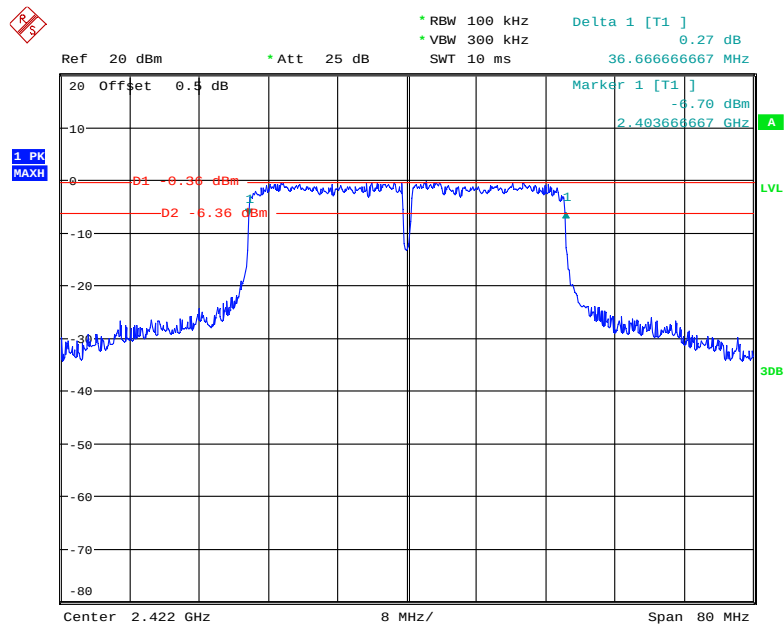


Date: 5.JUL.2018 09:21:20

802.11n ht40 Middle Channel

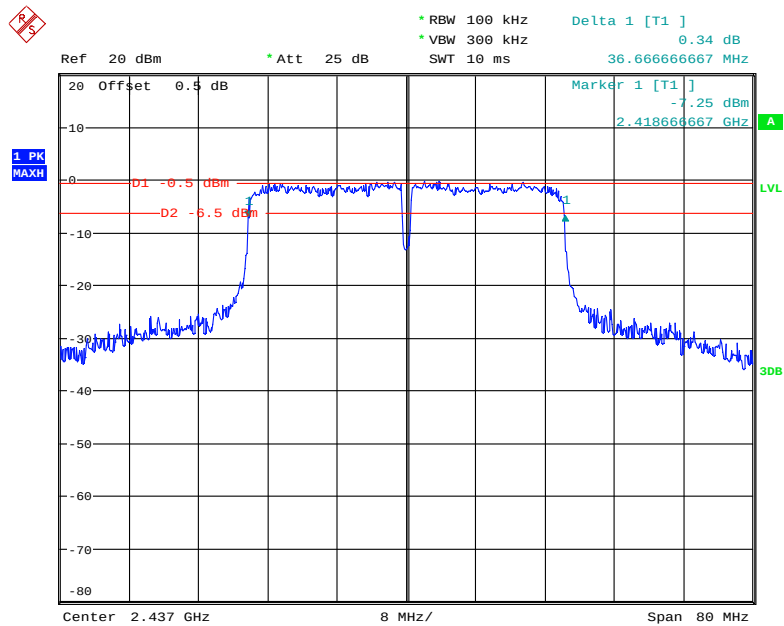


Date: 5.JUL.2018 09:21:56

802.11n ht40 High Channel

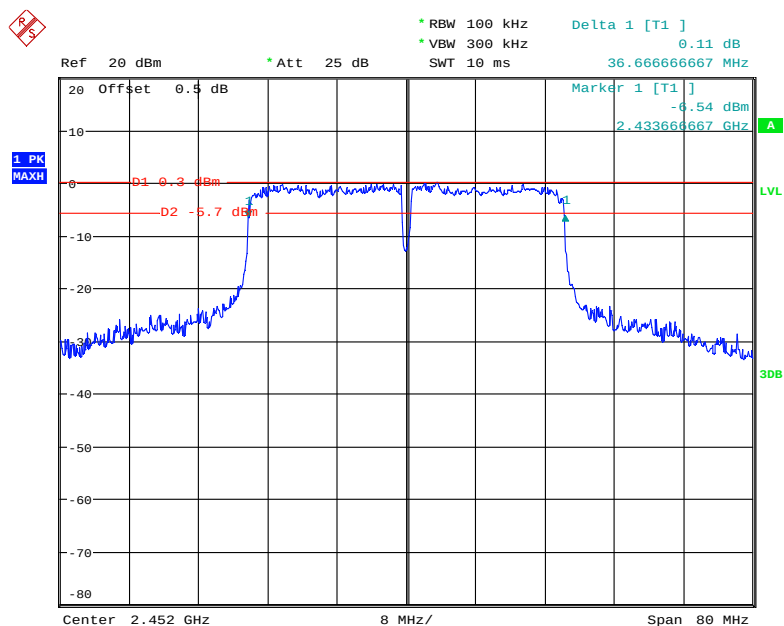


Date: 5.JUL.2018 09:22:39

BLE, Low Channel

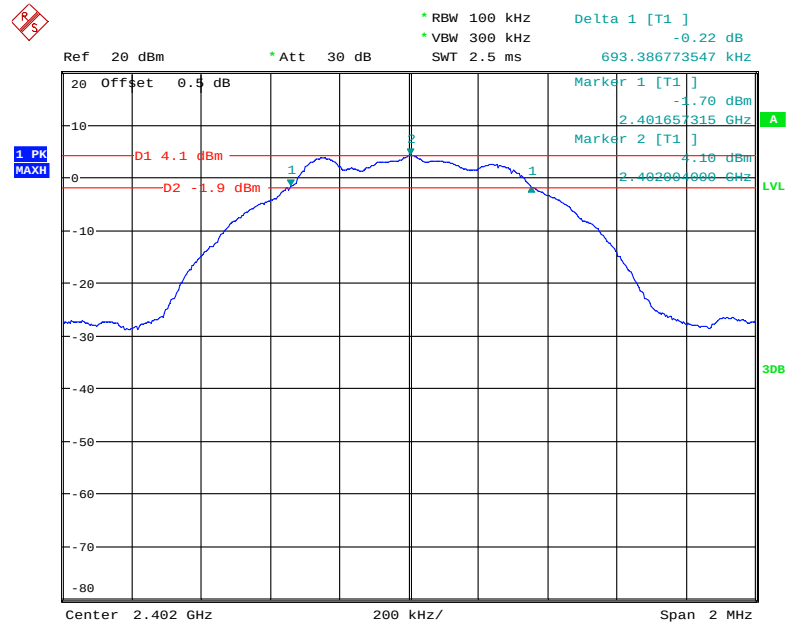


Date: 4.JUL.2018 16:42:53


BLE, Middle Channel

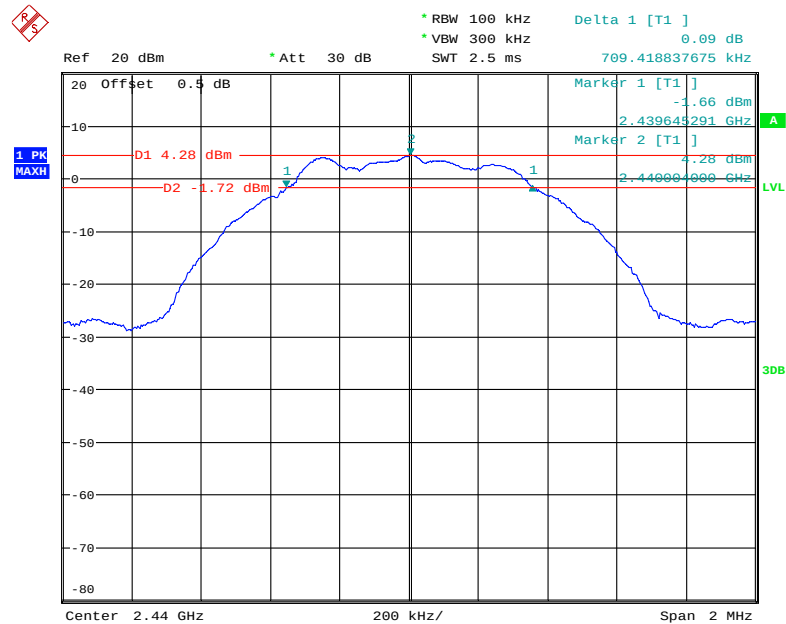

Date: 4.JUL.2018 16:44:58

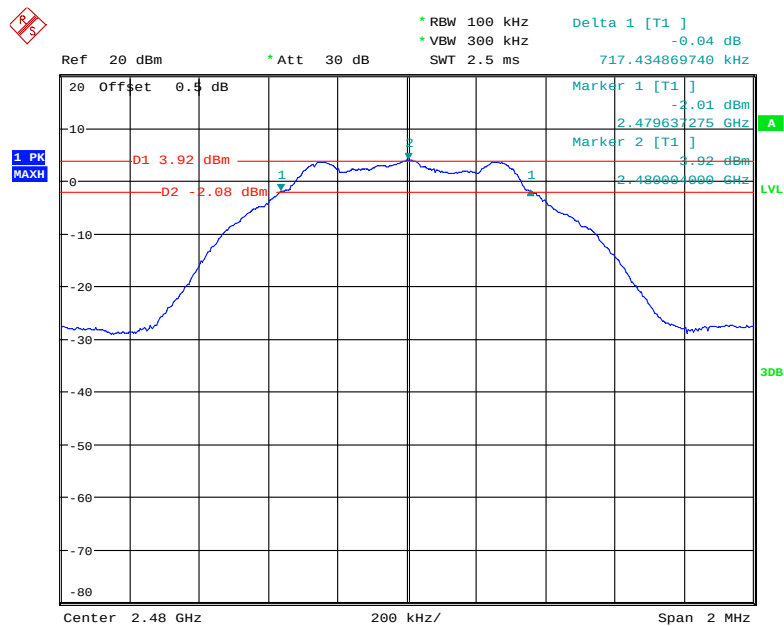
BLE, High Channel

Date: 4.JUL.2018 16:46:49

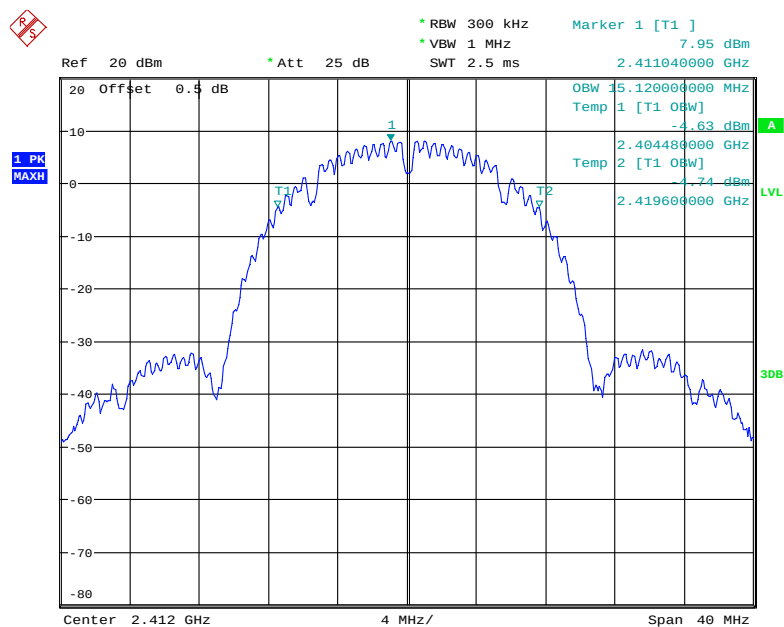99% Occupied Bandwidth:**802.11b Low Channel**


Date: 4.JUL.2018 15:15:15

802.11b Middle Channel

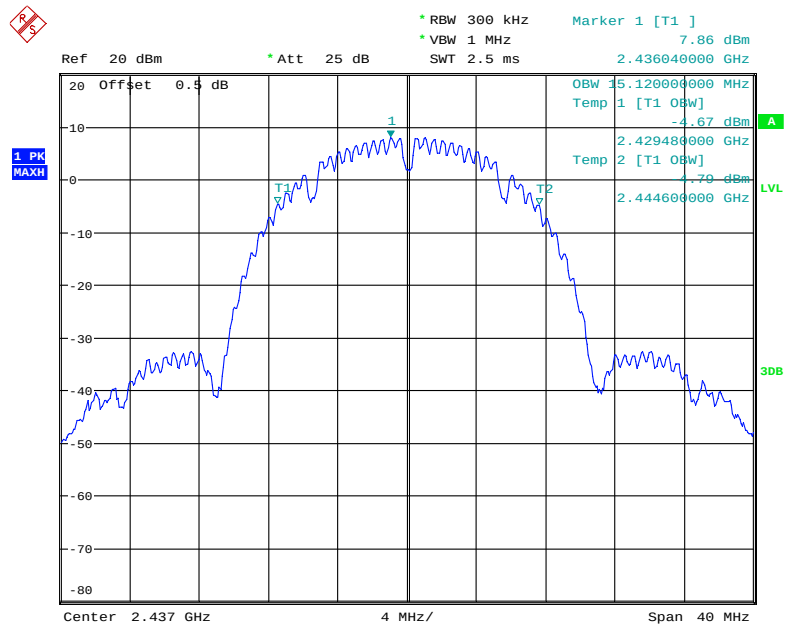


Date: 4.JUL.2018 15:17:04

802.11b High Channel

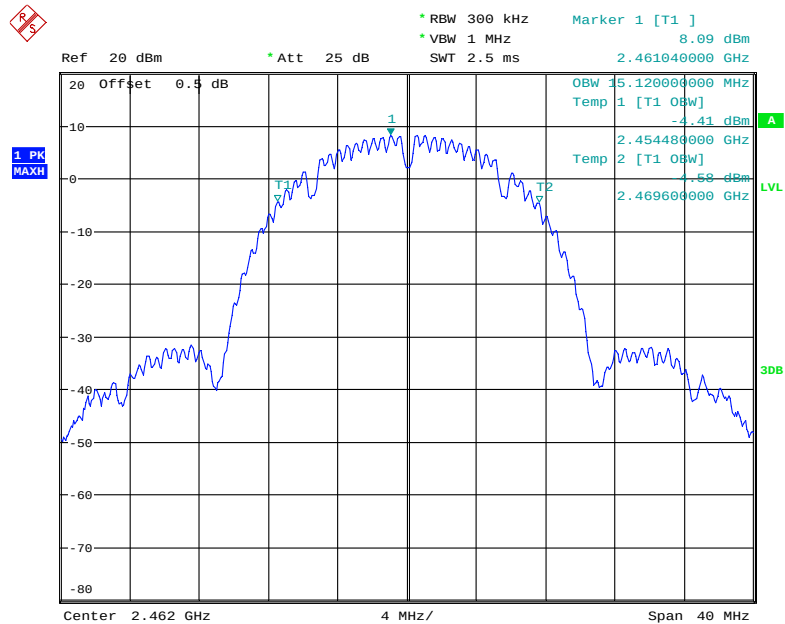


Date: 4.JUL.2018 15:19:08

802.11g Low Channel

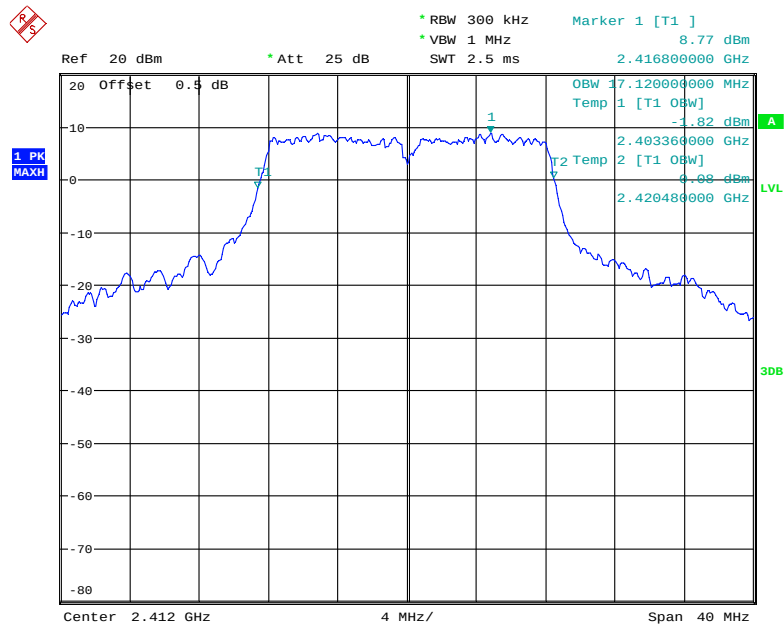


Date: 4.JUL.2018 14:51:38

802.11g Middle Channel

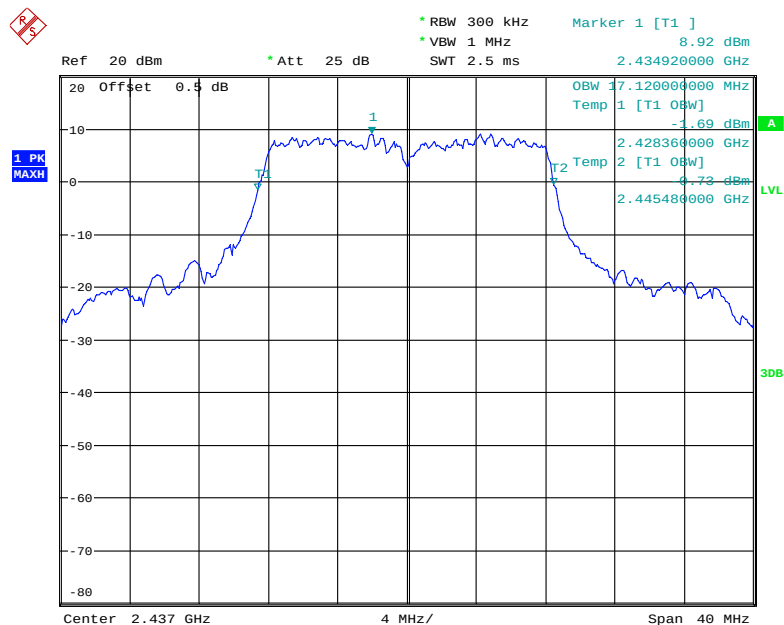


Date: 4.JUL.2018 14:46:33

802.11g High Channel

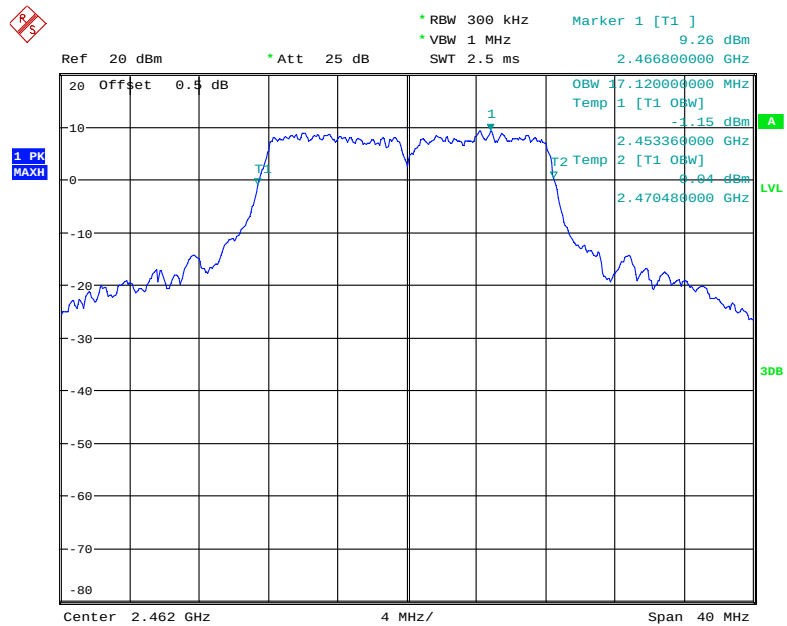


Date: 4.JUL.2018 14:49:07

802.11n ht20 Low Channel

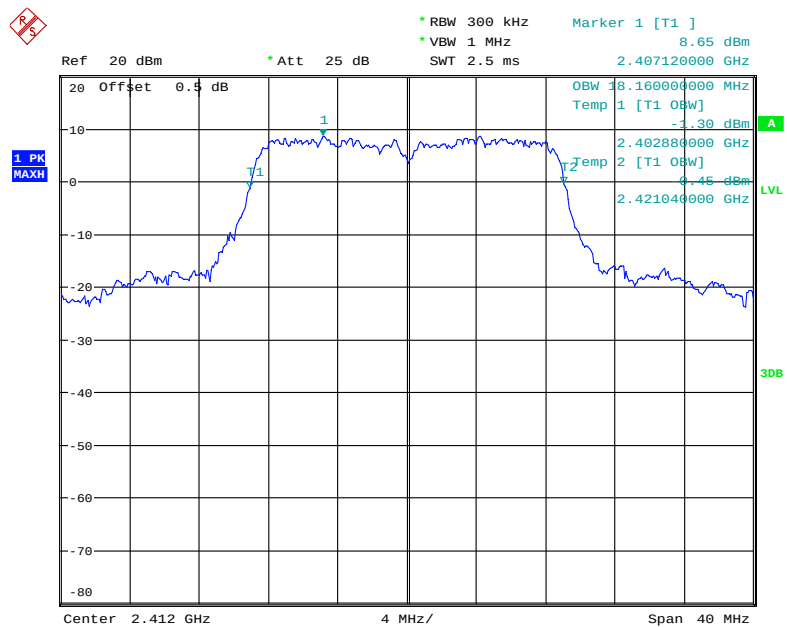


Date: 4.JUL.2018 14:54:14

802.11n ht20 Middle Channel

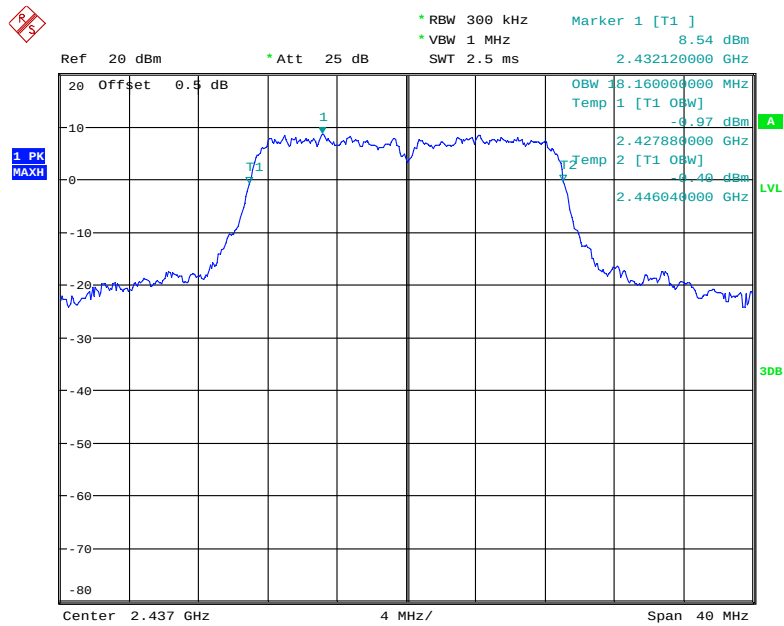


Date: 4.JUL.2018 14:56:50

802.11n ht20 High Channel

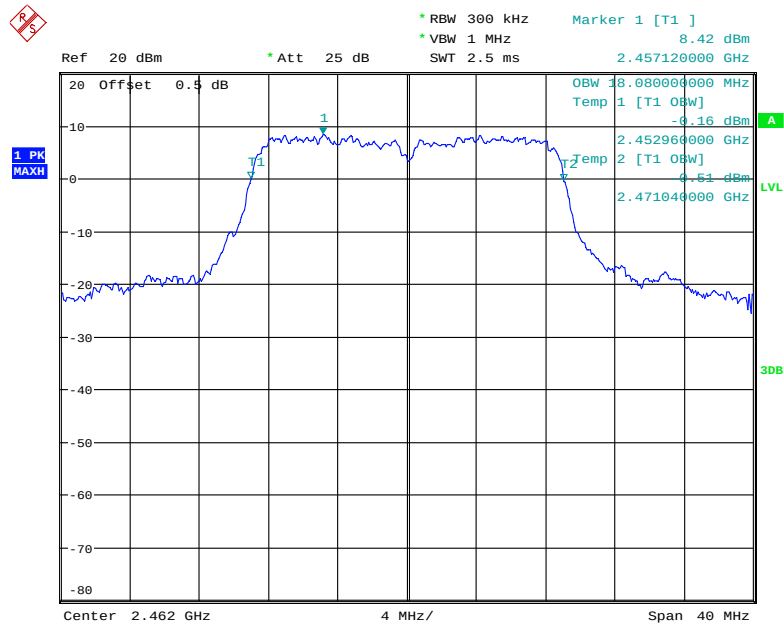


Date: 4.JUL.2018 15:00:23

802.11n ht20 Low Channel

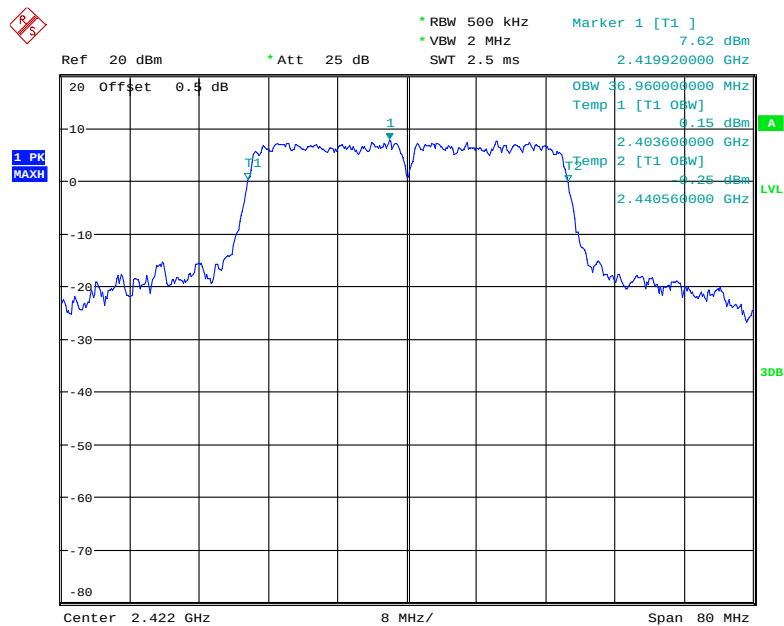


Date: 4.JUL.2018 15:03:28

802.11n ht40 Middle Channel

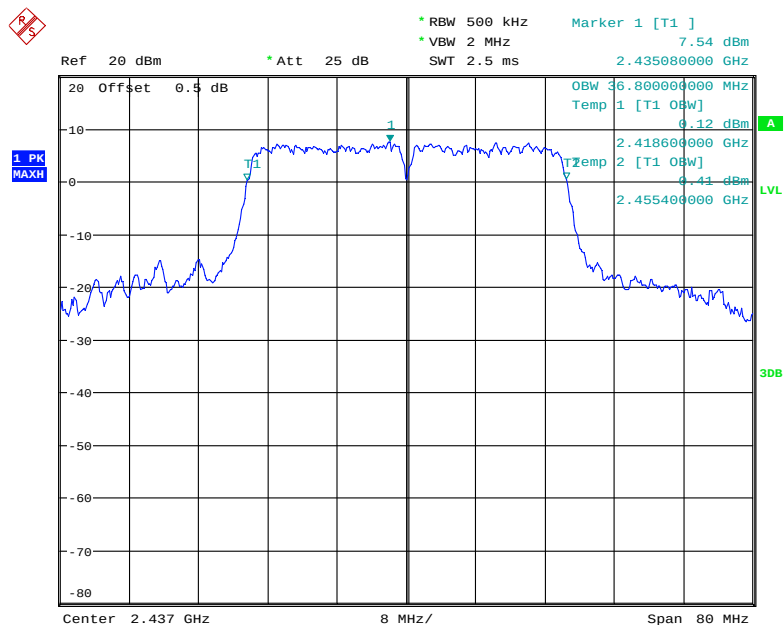


Date: 4.JUL.2018 15:06:55

802.11n ht40 High Channel

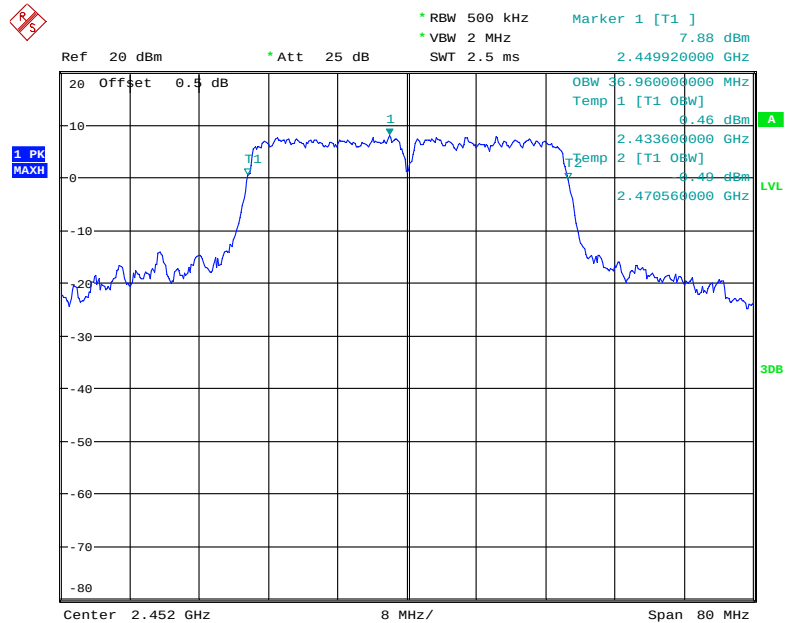


Date: 4.JUL.2018 15:09:47


BLE, Low Channel

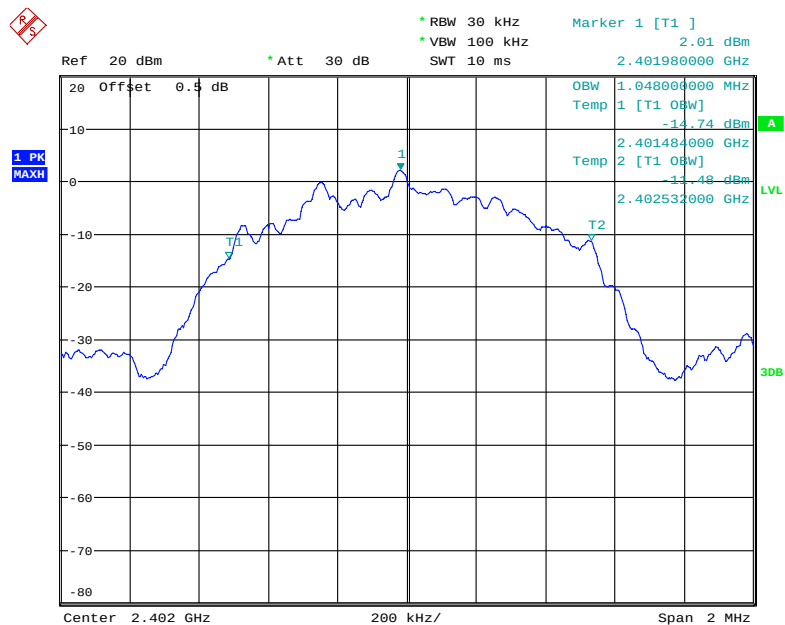

Date: 4.JUL.2018 16:43:06

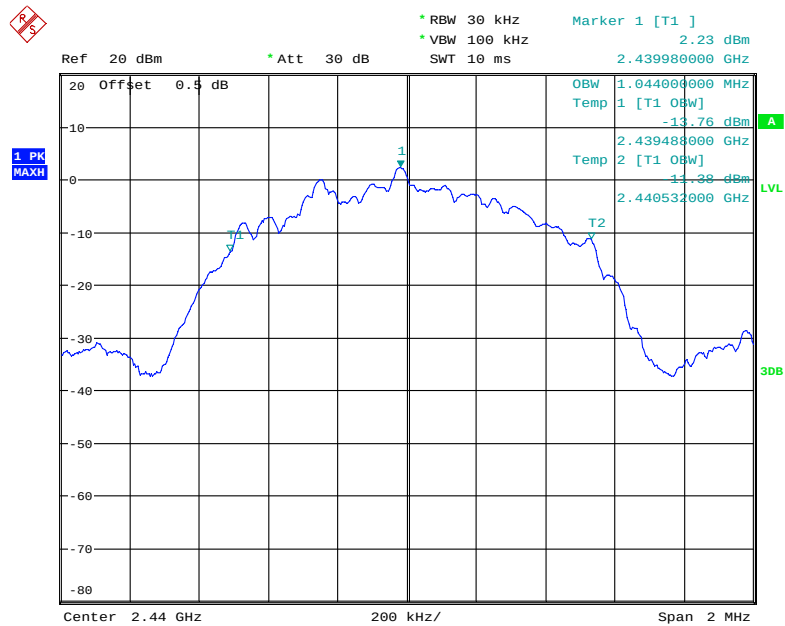BLE, Middle Channel

Date: 4.JUL.2018 16:45:11

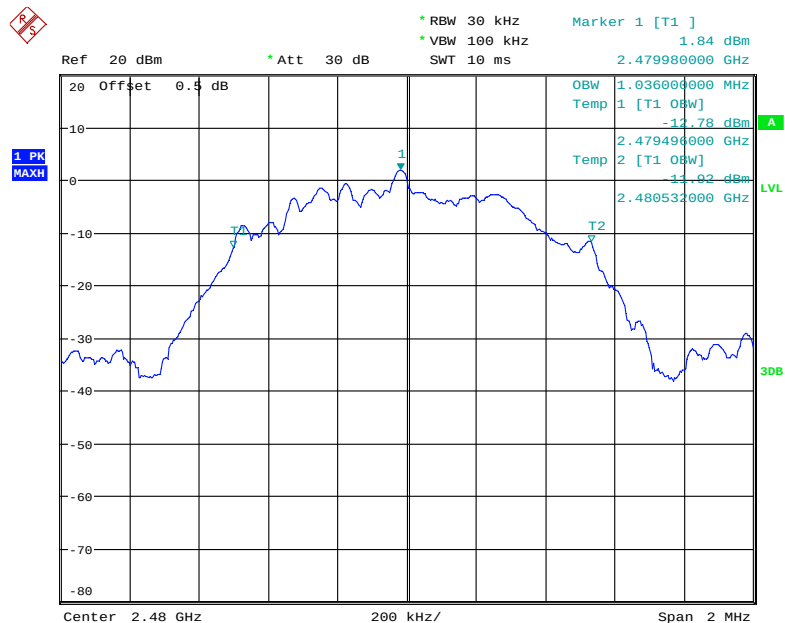BLE, High Channel

Date: 4.JUL.2018 16:47:01

FCC §15.247(b) (3)&RSS-247 §5.4 d) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28.8 °C
Relative Humidity:	67 %
ATM Pressure:	99.6 kPa

The testing was performed by Nami Quan on 2018-07-04.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test Mode	Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)
802.11b	Low	2412	19.14	30
	Middle	2437	19.02	30
	High	2462	19.22	30
802.11g	Low	2412	23.35	30
	Middle	2437	23.37	30
	High	2462	23.26	30
802.11n ht20	Low	2412	22.92	30
	Middle	2437	22.88	30
	High	2462	23.14	30
802.11n ht40	Low	2422	23.27	30
	Middle	2437	23.42	30
	High	2452	23.40	30
BLE	Low	2402	3.47	30
	Middle	2440	3.68	30
	High	2480	3.41	30

FCC §15.247(d)&RSS-247 §5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 §5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	28.8 °C
Relative Humidity:	67 %
ATM Pressure:	99.6 kPa

The testing was performed by Nami Quan on 2018-07-04.

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

802.11b, Band Edge, Left Side

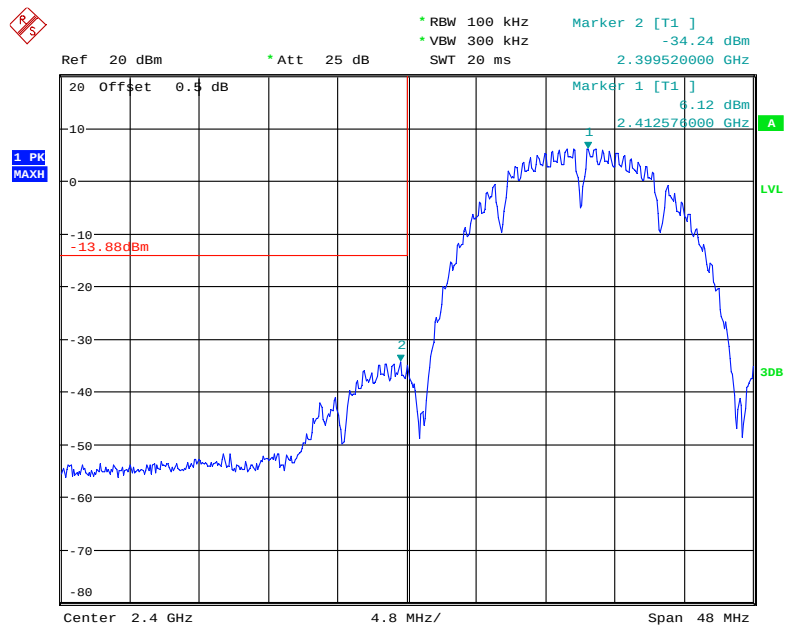


Date: 4.JUL.2018 15:16:26

802.11b, Band Edge, Right Side

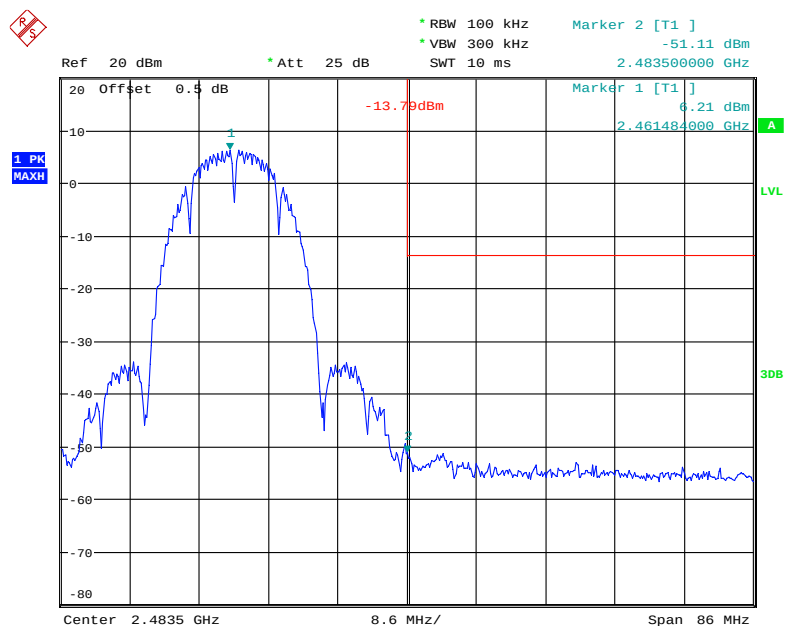


Date: 4.JUL.2018 15:20:21

802.11g, Band Edge, 2412MHz

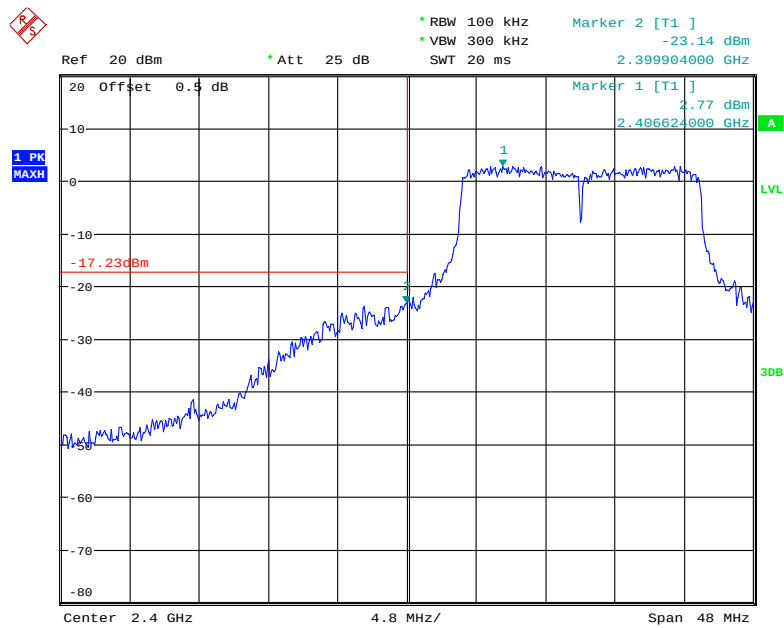


Date: 4.JUL.2018 14:53:21

802.11g, Band Edge, 2462MHz

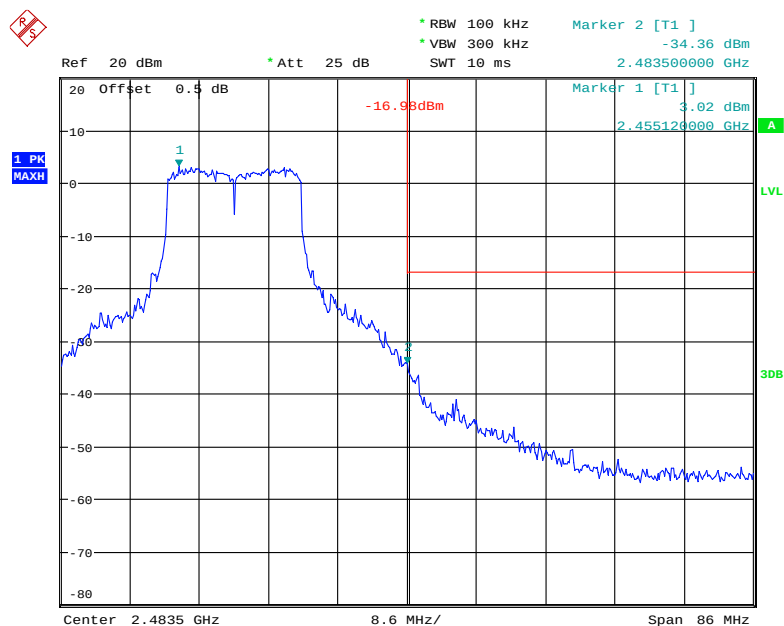


Date: 4.JUL.2018 14:50:22

802.11n ht20, Band Edge, 2412MHz

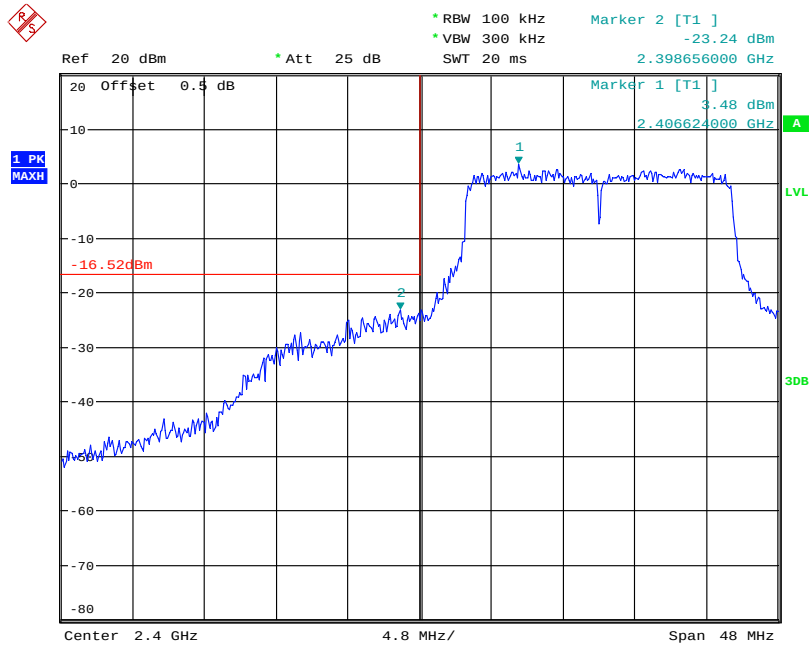


Date: 4.JUL.2018 14:55:51

802.11n ht20, Band Edge, 2462MHz

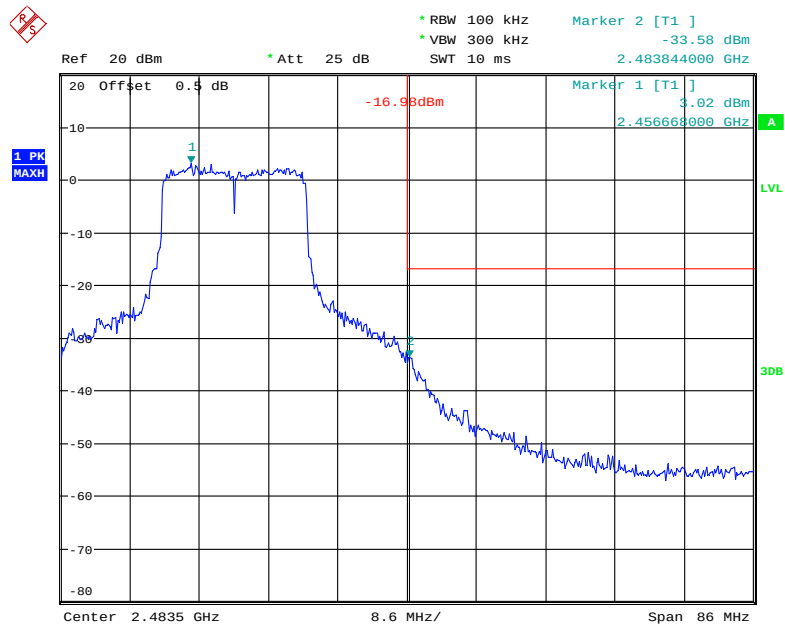


Date: 4.JUL.2018 15:02:04

802.11n ht40, Band Edge, 2422MHz

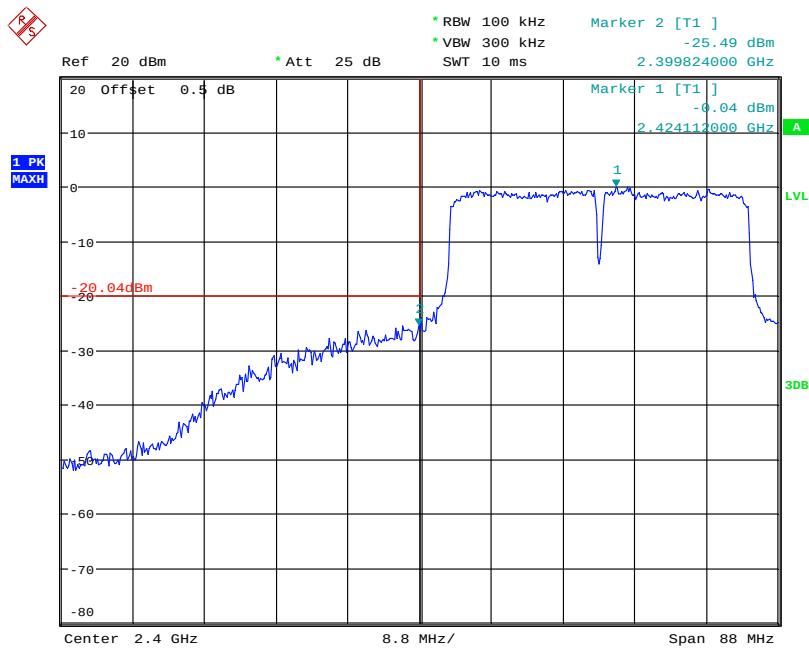


Date: 4.JUL.2018 15:05:42

802.11n ht40, Band Edge, 2452MHz

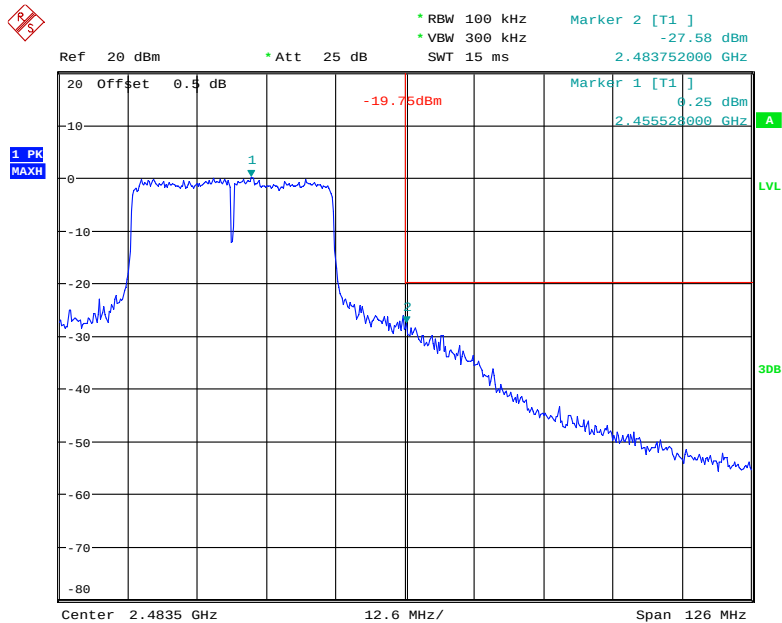


Date: 4.JUL.2018 15:12:01

BLE, Band Edge, Left Side

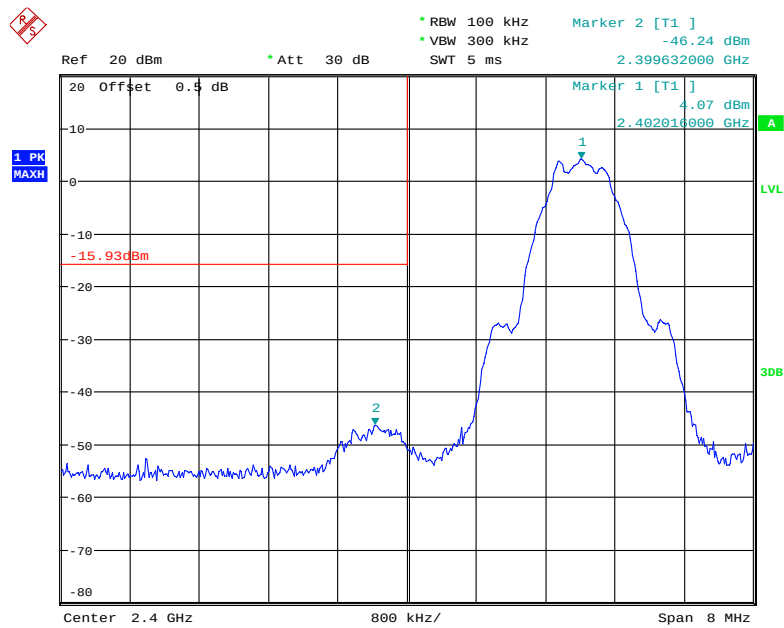

Date: 4.JUL.2018 16:44:03

BLE, Band Edge, Right Side

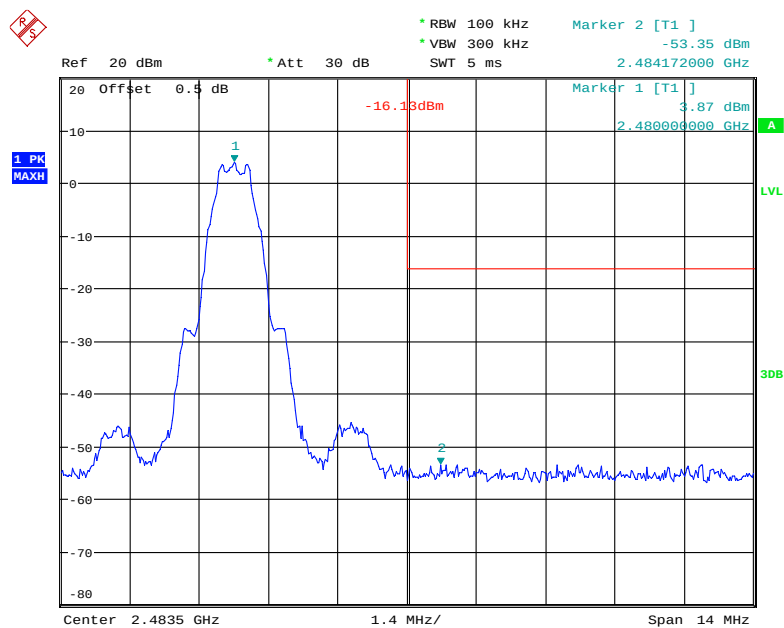

Date: 4.JUL.2018 16:48:09

FCC §15.247(e) & RSS-247 §5.2 b)- POWER SPECTRAL DENSITY**Applicable Standard**

According to FCC§15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §5.2 b):

- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	28.8 ~ 28.9 °C
Relative Humidity:	67 ~ 70 %
ATM Pressure:	99.6 ~ 100.6 kPa

The testing was performed by Nami Quan from 2018-07-04 to 2018-07-05.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-13.67	≤8
	Middle	2437	-13.68	≤8
	High	2462	-13.45	≤8
802.11g	Low	2412	-11.82	≤8
	Middle	2437	-11.82	≤8
	High	2462	-11.00	≤8
802.11n ht20	Low	2412	-11.59	≤8
	Middle	2437	-10.78	≤8
	High	2462	-11.05	≤8
802.11n ht40	Low	2422	-13.58	≤8
	Middle	2437	-12.84	≤8
	High	2452	-13.46	≤8
BLE	Low	2402	-9.59	≤8
	Middle	2440	-10.05	≤8
	High	2480	-10.64	≤8

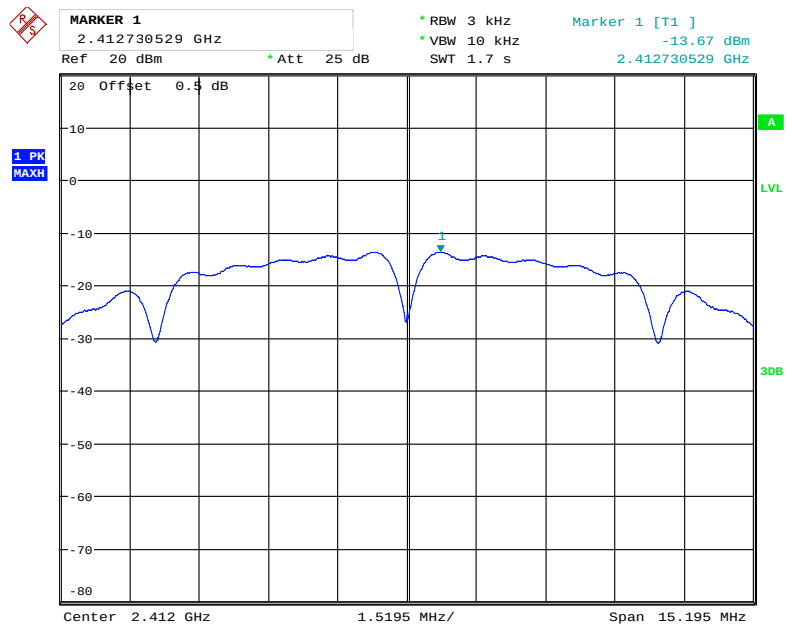
802.11b Low Channel

Date: 5.JUL.2018 09:29:22

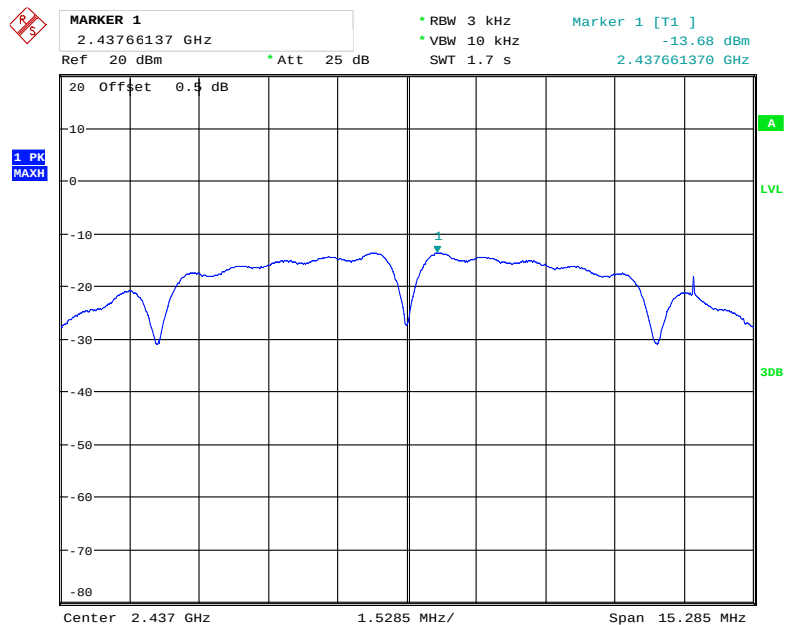802.11b Middle Channel


Date: 5.JUL.2018 09:29:42

802.11b High Channel

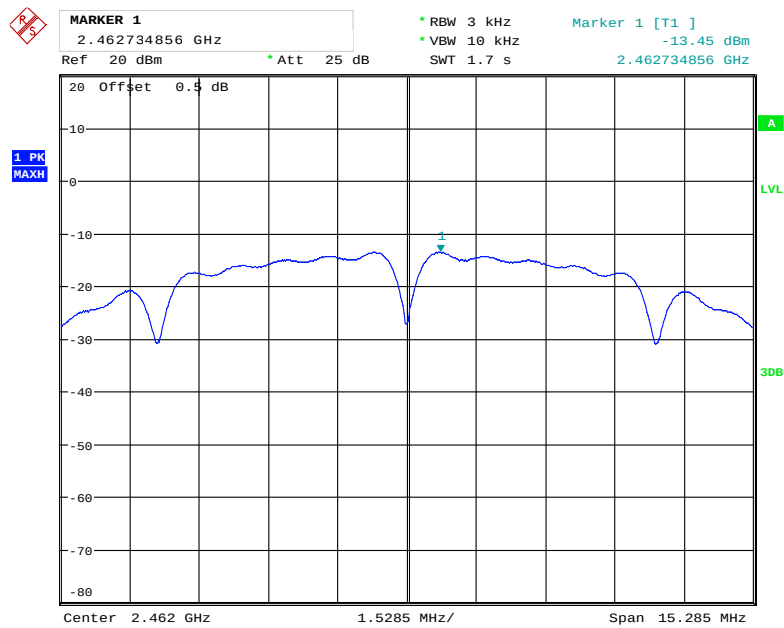


Date: 5.JUL.2018 09:30:11

802.11g Low Channel

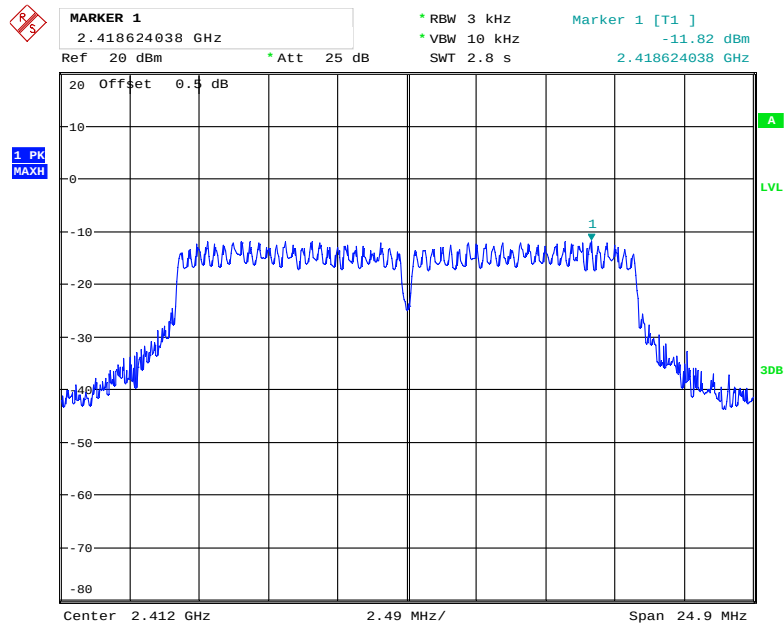


Date: 5.JUL.2018 09:30:48

802.11g Middle Channel

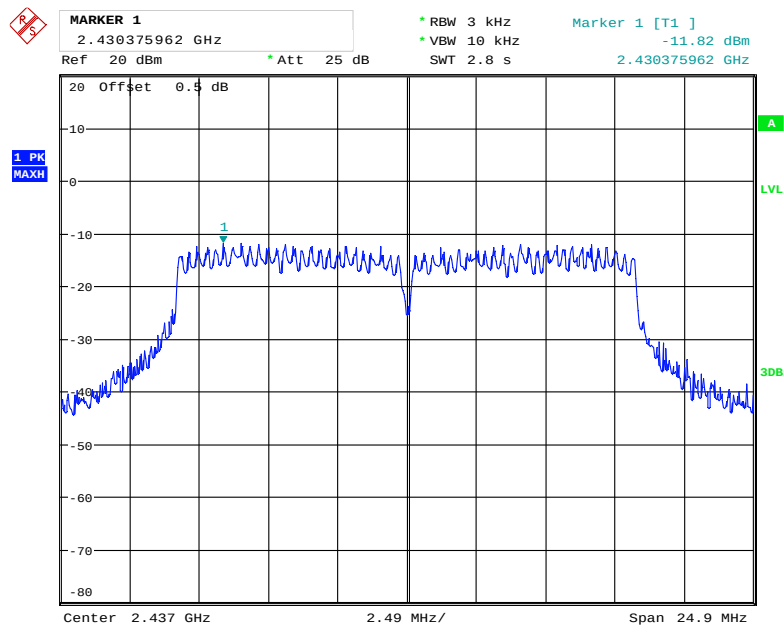


Date: 5.JUL.2018 09:31:06

802.11g High Channel

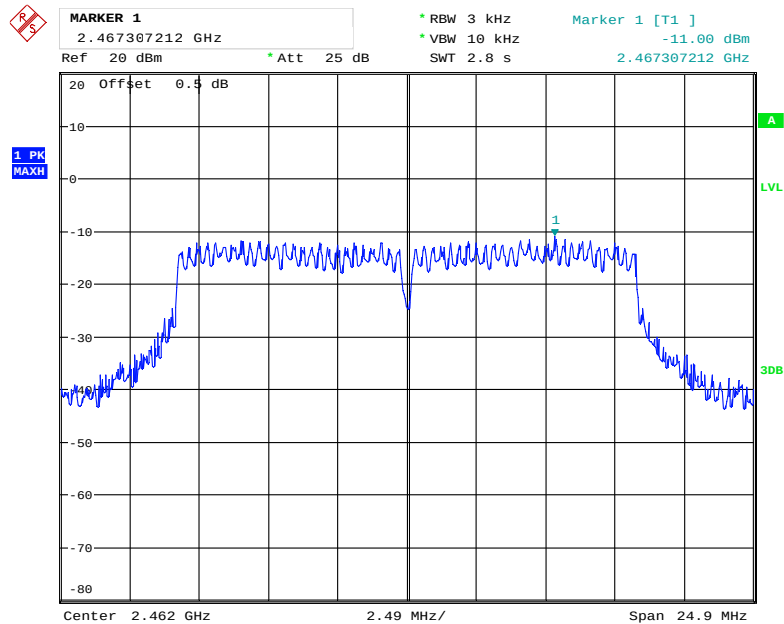


Date: 5.JUL.2018 09:31:23

802.11n ht20 Low Channel

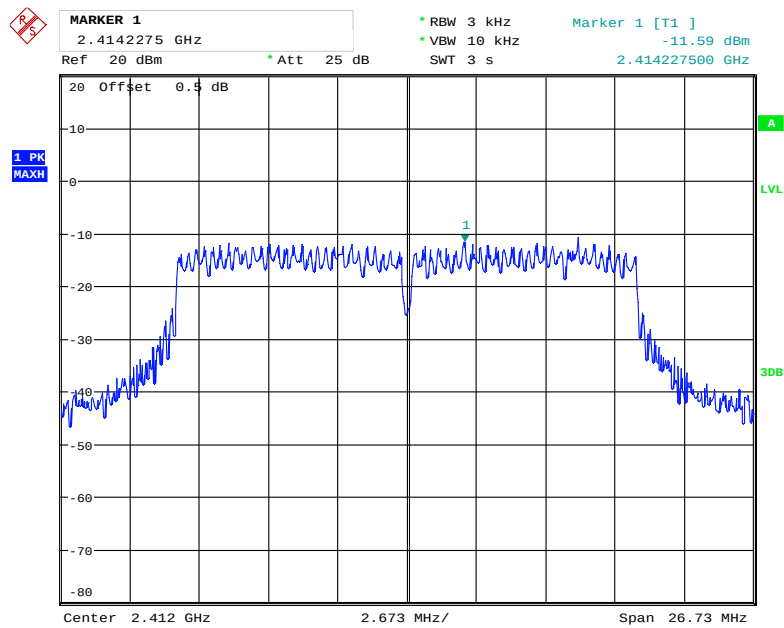


Date: 5.JUL.2018 09:31:52

802.11n ht20 Middle Channel

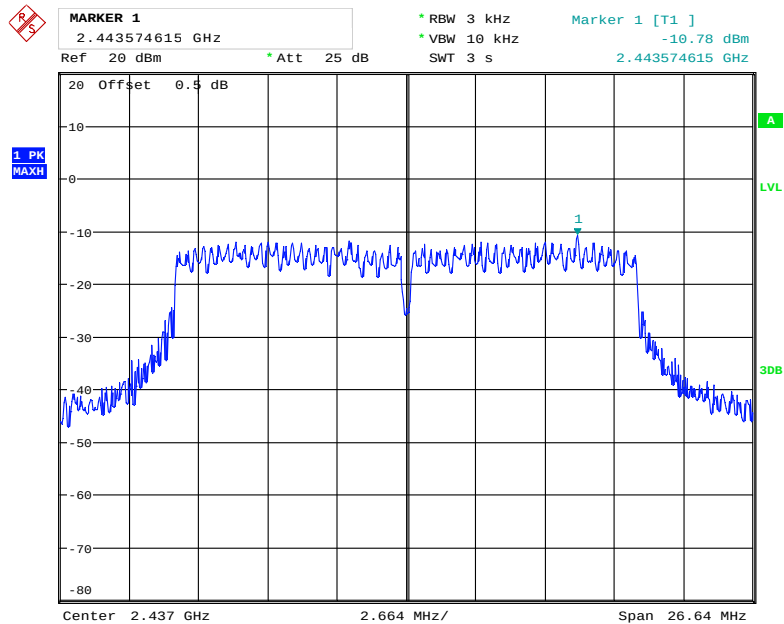


Date: 5.JUL.2018 09:32:17

802.11n ht20 High Channel

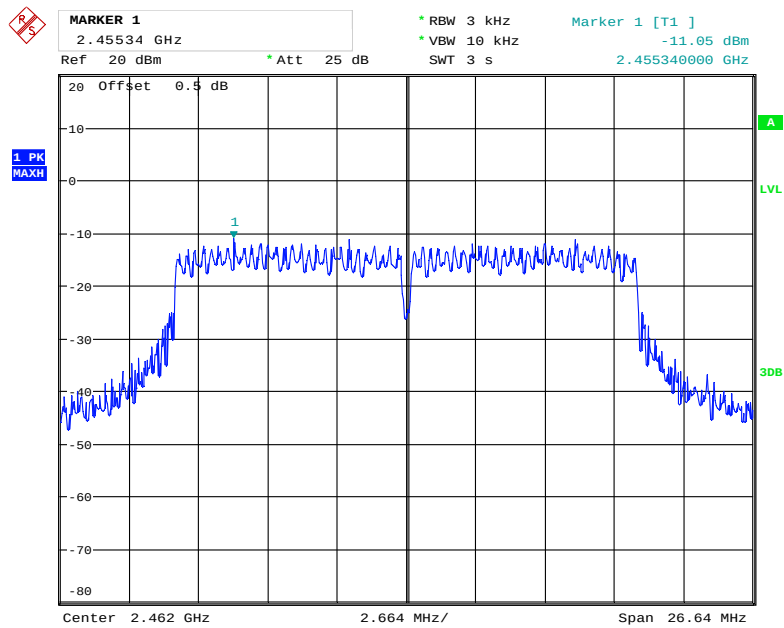


Date: 5.JUL.2018 09:32:54

802.11n ht40 Low Channel

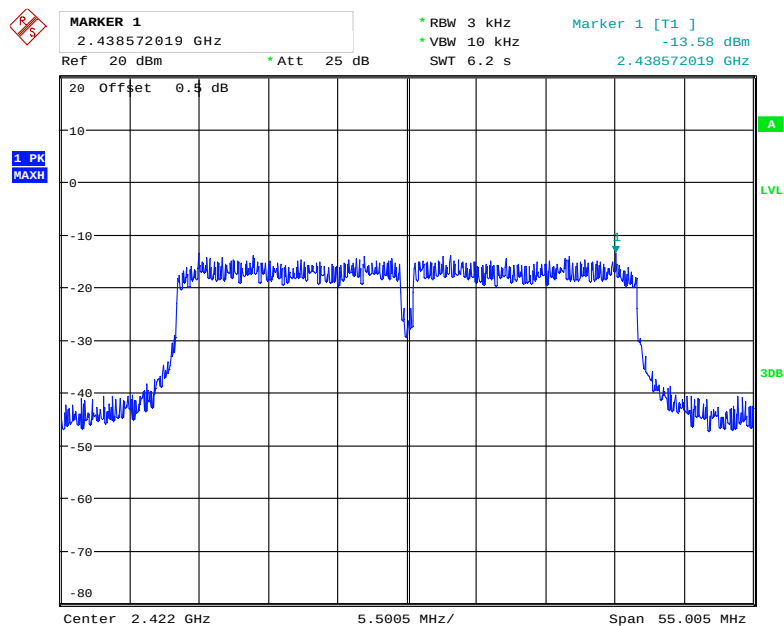


Date: 5.JUL.2018 09:33:46

802.11n ht40 Middle Channel

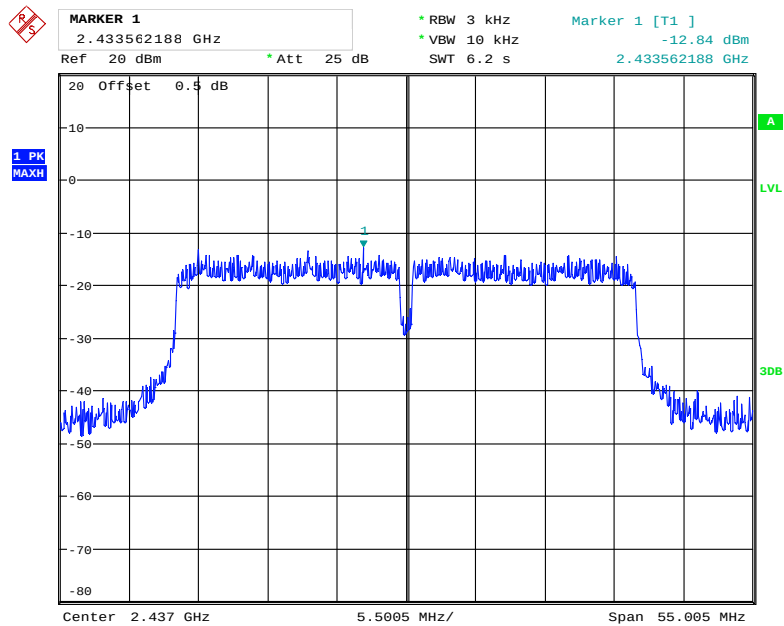


Date: 5.JUL.2018 09:34:08

802.11n ht40 High Channel

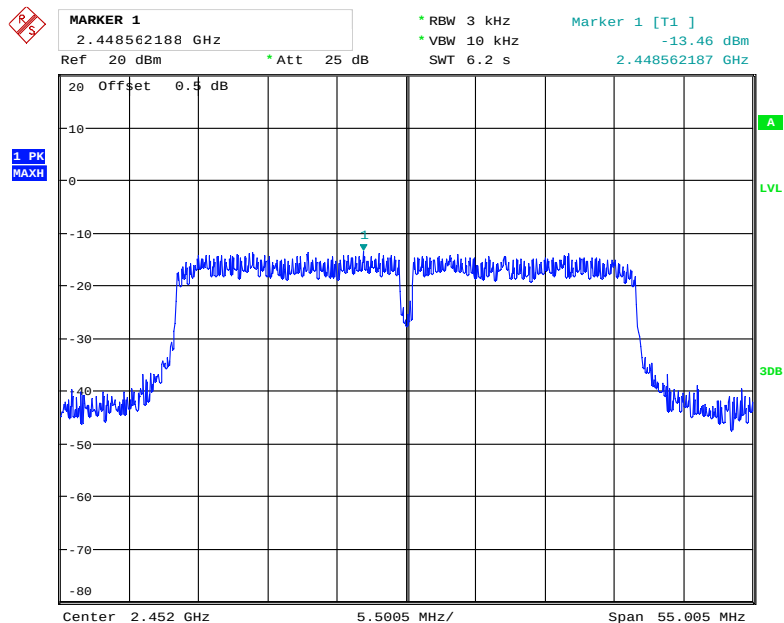


Date: 5.JUL.2018 09:34:52

BLE, Low Channel

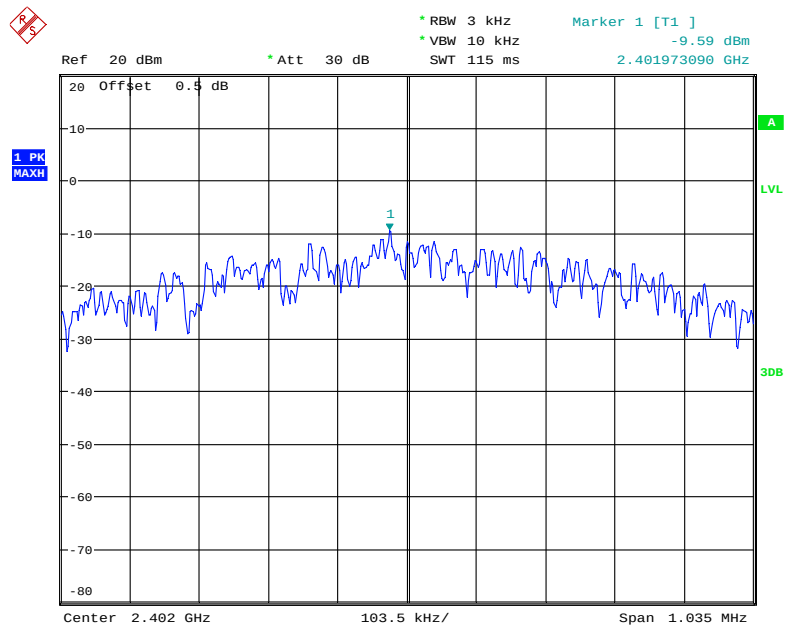


Date: 4.JUL.2018 16:43:27

BLE, Middle Channel

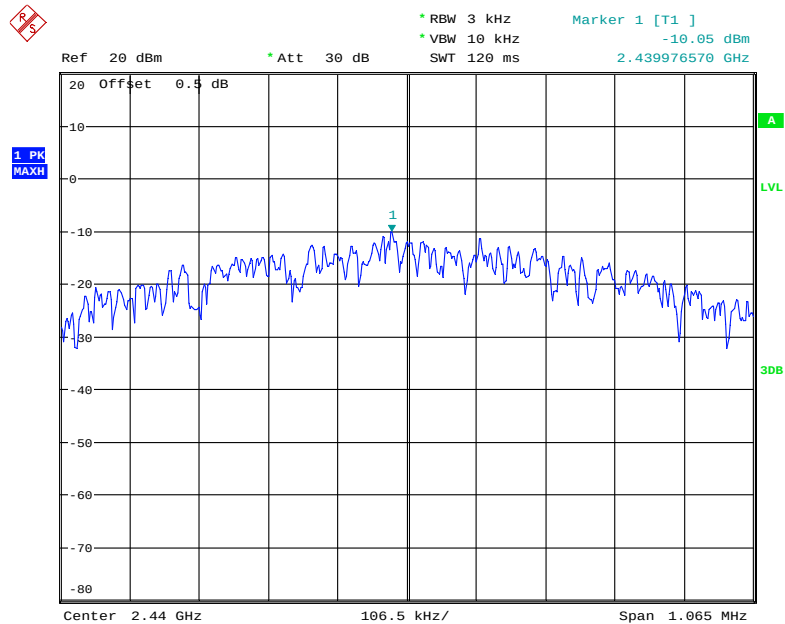

Date: 4.JUL.2018 16:45:35

BLE, High Channel

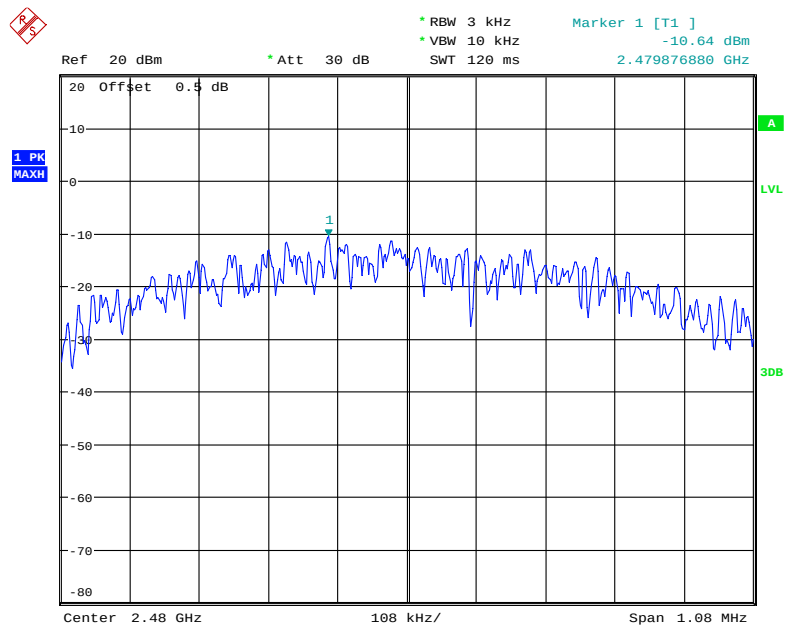

Date: 4.JUL.2018 16:47:23

***** END OF REPORT *****