

# TEST REPORT

Applicant Name : ORAIMO TECHNOLOGY LIMITED  
Address : Flat 39, 8/F., Block D, Wah Lok Industrial Centre, 31-35 Shan Mei Street, Fotan, NT, Hong Kong  
Report Number : SZNS211201-61956E-RF-00A  
FCC ID: 2AXYP-OEB-E108D-L

**Test Standard (s)**


FCC PART 15.247

**Sample Description**

Product Type: True wireless earbuds  
Model No.: OEB-E108D  
Multiple Model(s) No.: N/A  
Trade Mark: oraimo  
Date Received: 2021/11/24  
Date of Test: 2021/12/09~2021/12/24  
Report Date: 2021/12/29

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**

Ting Lv  
EMC Engineer

**Approved By:**

Robert Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION .....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES .....	6
EQUIPMENT MODIFICATIONS .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>FCC§15.247 (I), §1.1307 (B) (I) &amp;§2.1093 – RF EXPOSURE .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
ANTENNA CONNECTOR CONSTRUCTION .....	11
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP .....	12
TEST PROCEDURE .....	12
TRANSD FACTOR & MARGIN CALCULATION .....	13
TEST DATA .....	13
<b>FCC §15.205, §15.209 &amp; §15.247(D) – RADIATED EMISSIONS .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
CORRECTED FACTOR & MARGIN CALCULATION .....	17
TEST DATA .....	17
<b>FCC §15.247(A) (1)-CHANNEL SEPARATION TEST .....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST DATA .....	23
<b>FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH .....</b>	<b>24</b>
APPLICABLE STANDARD .....	24
TEST PROCEDURE .....	24
TEST DATA .....	25

<b>FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST</b> .....	<b>26</b>
APPLICABLE STANDARD .....	26
TEST PROCEDURE .....	26
TEST DATA .....	26
<b>FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME) .....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST DATA .....	27
<b>FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(D) - BAND EDGES TESTING .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>APPENDIX.....</b>	<b>30</b>
APPENDIX A: 20dB EMISSION BANDWIDTH.....	30
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	34
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	38
APPENDIX D: CARRIER FREQUENCY SEPARATION .....	42
APPENDIX E: TIME OF OCCUPANCY .....	44
APPENDIX F: NUMBER OF HOPPING CHANNELS .....	51
APPENDIX G: BAND EDGE MEASUREMENTS .....	53

**GENERAL INFORMATION****Product Description for Equipment under Test (EUT)**

Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 7.60dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	1.5dBi (provided by the applicant)
Voltage Range	DC 3.85V from battery
Sample serial number	SZNS211201-61956E-RF-S1 (Assigned by ATC)
Sample/EUT Status	Good condition

**Objective**

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

**Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082 \times 10^{-7}$
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

**Test Facility**

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

**SYSTEM TEST CONFIGURATION****Description of Test Configuration**

The system was configured for testing in an engineering mode.

**EUT Exercise Software**

“BQB.exe\*” software was used to test, which provided by manufacturer.

The device was tested with the Power level is 3\*.

**Special Accessories**

No special accessory.

**Equipment Modifications**

No modification was made to the EUT tested.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
TECNO	Adapter	U330TSA	Unknown

**External I/O Cable**


Cable Description	Length (m)	From/Port	To
USB cable	0.25	Adapter	EUT

**Block Diagram of Test Setup**

**For Conducted emission:**

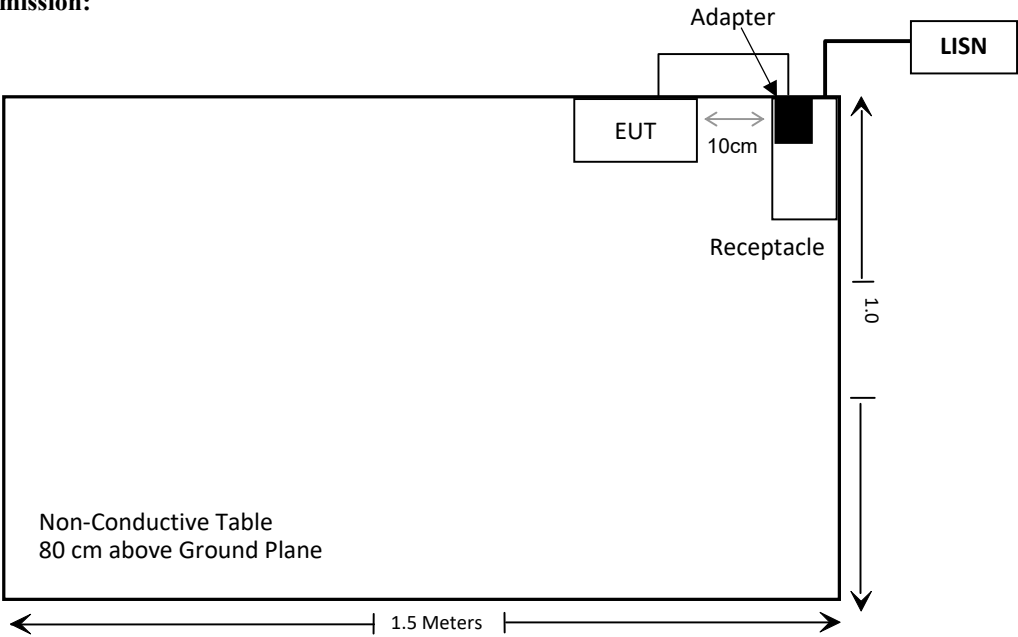

**For Radiated emission:**

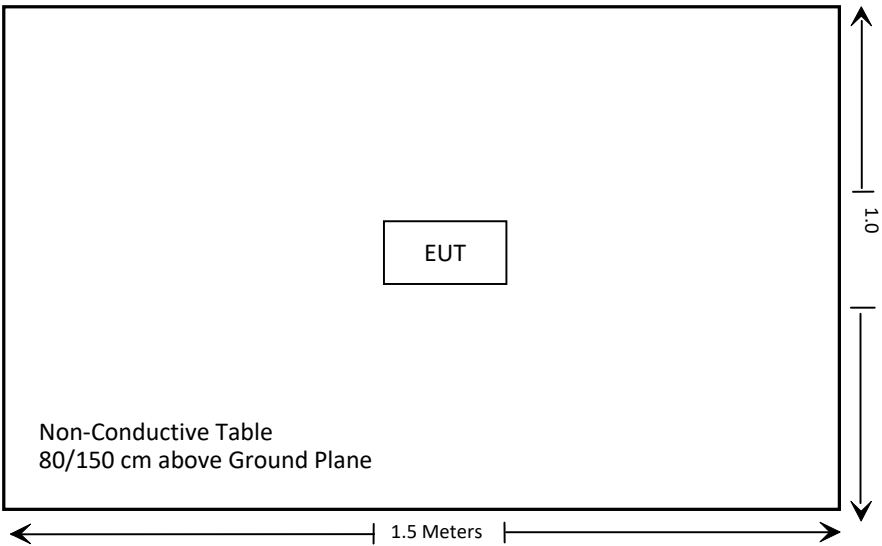

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emissions Test</b>					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Conducted Emission Test Software: e3 19821b (V9)					
<b>Radiated Emissions Test</b>					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
<b>RF Conducted Test</b>					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/13	2021/12/12
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/07/06	2022/07/05

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE****Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

**For worst case:**

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2402-2480	8.0	6.31	5	2.0	3.0	Yes

**Result: No Standalone SAR test is required**

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one internal Antenna arrangement, which was permanently attached and the antenna gain is 1.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

### FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

## EUT Setup



**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

**Transd Factor & Margin Calculation**

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Over Limit} = \text{Result} - \text{Limit}$$

$$\text{Result} = \text{reading level} + \text{Transd Factor}$$


**Test Data****Environmental Conditions**

<b>Temperature:</b>	23°C
<b>Relative Humidity:</b>	60 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Bin Duan on 2021-12-22.*

*EUT operation mode: Charging*


## AC 120V/60 Hz, Line

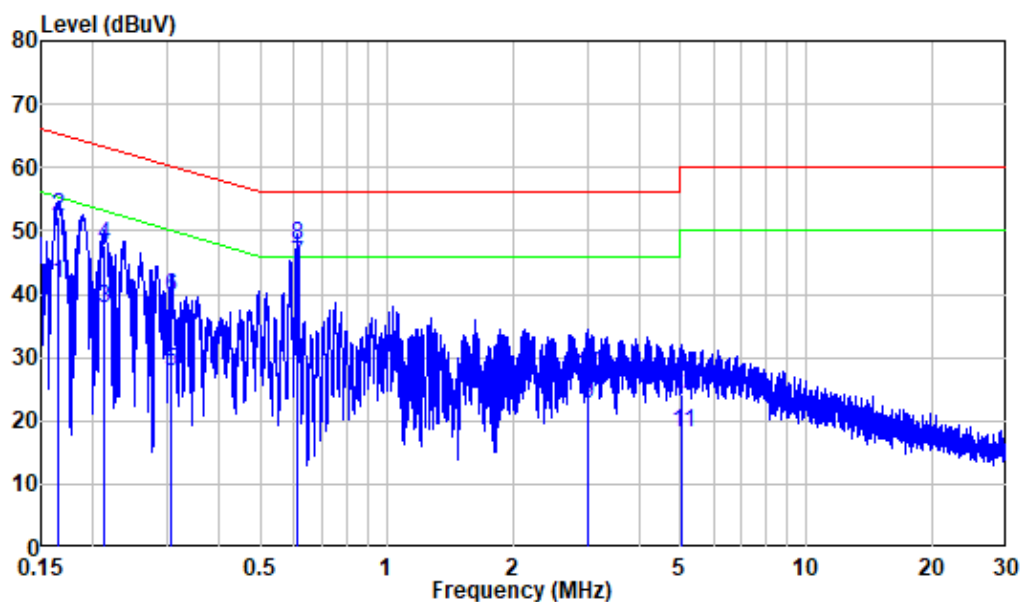

Site : Shielding Room  
 Condition: Line  
 Mode : Charging  
 Model : OEB-E108D  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.165	9.87	31.77	41.64	55.19	-13.55	Average
2	0.165	9.87	42.50	52.37	65.19	-12.82	QP
3	0.212	9.80	27.97	37.77	53.12	-15.35	Average
4	0.212	9.80	37.77	47.57	63.12	-15.55	QP
5	0.308	9.80	18.05	27.85	50.03	-22.18	Average
6	0.308	9.80	29.81	39.61	60.03	-20.42	QP
7	0.612	9.81	35.00	44.81	46.00	-1.19	Average
8	0.612	9.81	38.03	47.84	56.00	-8.16	QP
9	3.015	9.93	12.76	22.69	46.00	-23.31	Average
10	3.015	9.93	17.23	27.16	56.00	-28.84	QP
11	5.065	9.99	8.13	18.12	50.00	-31.88	Average
12	5.065	9.99	14.09	24.08	60.00	-35.92	QP

## AC 120V/60 Hz, Neutral


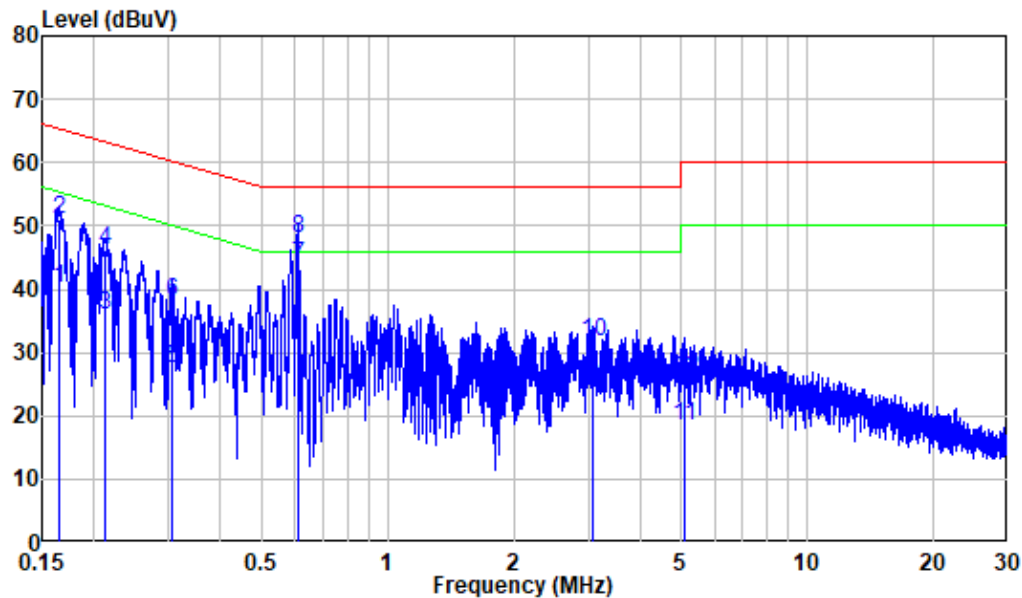


Site : Shielding Room  
 Condition: Neutral  
 Mode : Charging  
 Model : OEB-E108D  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.165	9.93	30.14	40.07	55.21	-15.14	Average
2	0.165	9.93	40.99	50.92	65.21	-14.29	QP
3	0.212	9.99	26.04	36.03	53.15	-17.12	Average
4	0.212	9.99	36.10	46.09	63.15	-17.06	QP
5	0.306	9.95	17.47	27.42	50.08	-22.66	Average
6	0.306	9.95	28.19	38.14	60.08	-21.94	QP
7	0.610	9.91	33.74	43.65	46.00	-2.35	Average
8	0.610	9.91	38.21	48.12	56.00	-7.88	QP
9	3.074	9.99	14.90	24.89	46.00	-21.11	Average
10	3.074	9.99	21.83	31.82	56.00	-24.18	QP
11	5.075	10.05	8.46	18.51	50.00	-31.49	Average
12	5.075	10.05	15.95	26.00	60.00	-34.00	QP

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

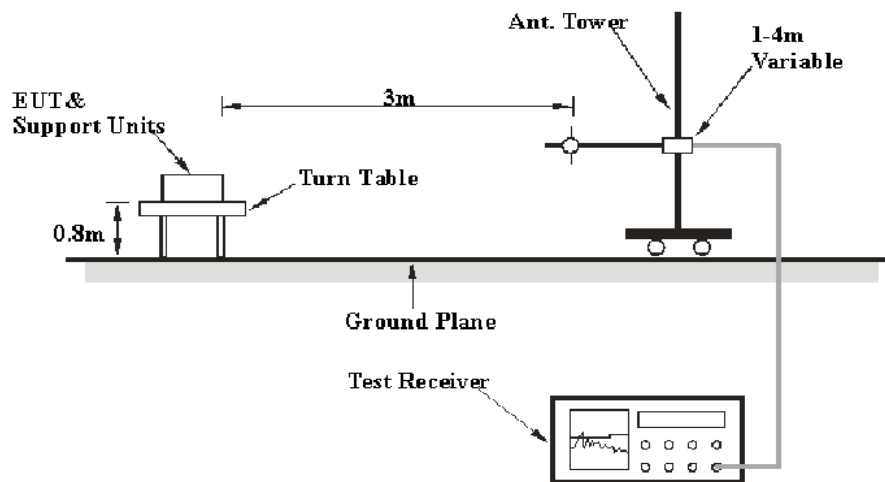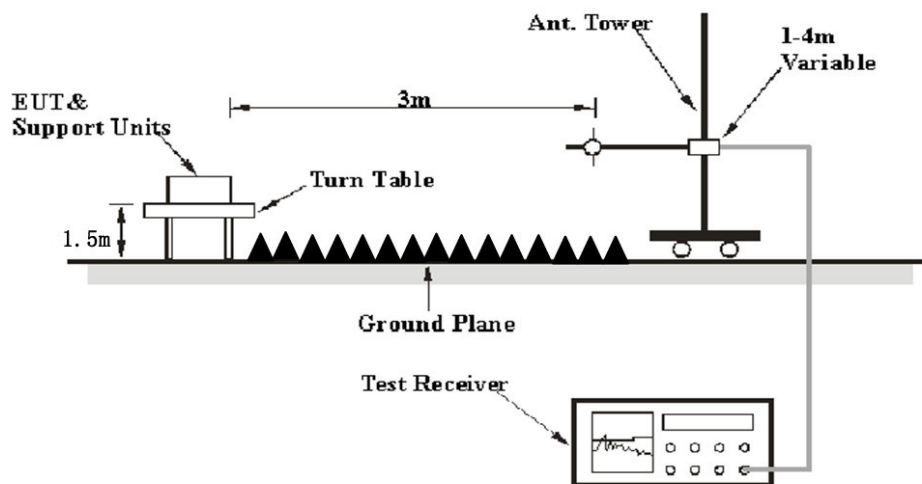**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.



### EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

### Corrected Factor & Margin Calculation

The Corrected Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit or margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Over limit/Margin} &= \text{Result/Corrected Amplitude-Limit} \\ \text{Result/Corrected Amplitude} &= \text{Reading} + \text{Corrected Factor} \end{aligned}$$

### Test Data

#### Environmental Conditions


Temperature:	25~25.8°C
Relative Humidity:	51~64%
ATM Pressure:	101.0 ~101.2kPa

The testing was performed by Bin Deng on 2021-12-24 for below 1GHz and Caro Hu on 2021-12-15 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

30MHz-1GHz: (the worst case is 8DPSK Mode, Low channel)


Horizontal:

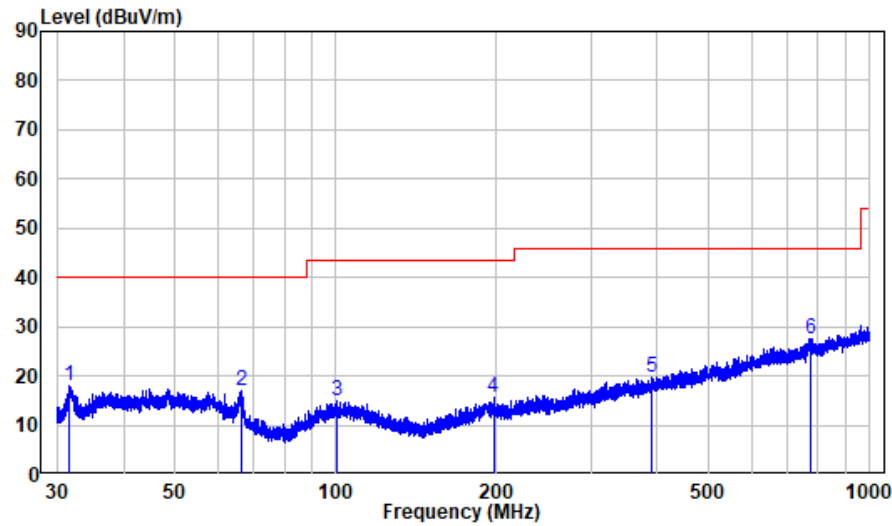

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : SZNS211201-61956E-RF  
Test Mode: BT  
Test By : Left ear

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	31.63	-12.22	30.11	17.89	40.00	-22.11 Peak
2	66.56	-13.15	29.99	16.84	40.00	-23.16 Peak
3	100.45	-11.75	26.64	14.89	43.50	-28.61 Peak
4	197.29	-11.55	27.29	15.74	43.50	-27.76 Peak
5	390.21	-6.89	26.56	19.67	46.00	-26.33 Peak
6	775.52	0.05	27.45	27.50	46.00	-18.50 Peak

## Vertical

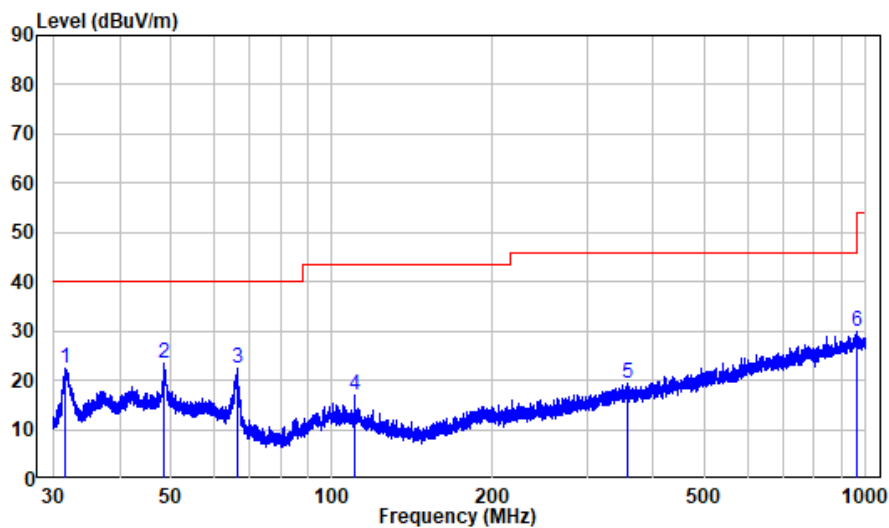

Site : chamber  
Condition: 3m VERTICAL  
Job No. : SZNS211201-61956E-RF  
Test Mode: BT  
Test By : Left ear

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.63	-12.22	34.48	22.26	40.00	-17.74	Peak
2	48.46	-9.98	33.48	23.50	40.00	-16.50	Peak
3	66.64	-13.19	35.71	22.52	40.00	-17.48	Peak
4	110.57	-12.05	29.06	17.01	43.50	-26.49	Peak
5	357.62	-7.58	26.87	19.29	46.00	-26.71	Peak
6	962.58	2.39	27.62	30.01	54.00	-23.99	Peak

**Above 1GHz:** (the worst case is 8DPSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310	68.24	PK	29	1.8	H	-7.25	60.99	74	-13.01
2310	53.43	Ave.	29	1.8	H	-7.25	46.18	54	-7.82
2390	70.49	PK	305	1.1	H	-7.23	63.26	74	-10.74
2390	54.34	Ave.	305	1.1	H	-7.23	47.11	54	-6.89
2310	68.32	PK	344	1.6	V	-7.25	61.07	74	-12.93
2310	53.41	Ave.	344	1.6	V	-7.25	46.16	54	-7.84
2390	70.43	PK	351	1.2	V	-7.23	63.2	74	-10.8
2390	54.38	Ave.	351	1.2	V	-7.23	47.15	54	-6.85
4804	58.56	PK	131	1.5	H	-3.51	55.05	74	-18.95
4804	46.63	Ave.	131	1.5	H	-3.51	43.12	54	-10.88
4804	57.01	PK	90	2.4	V	-3.51	53.5	74	-20.5
4804	44.33	Ave.	90	2.4	V	-3.51	40.82	54	-13.18
Middle Channel (2441 MHz)									
4882	58.16	PK	343	1	H	-3.28	54.88	74	-19.12
4882	46.56	Ave.	343	1	H	-3.28	43.28	54	-10.72
4882	57.62	PK	334	2.3	V	-3.28	54.34	74	-19.66
4882	45.08	Ave.	334	2.3	V	-3.28	41.8	54	-12.2
High Channel (2480 MHz)									
2483.5	68.62	PK	231	1.4	H	-7.18	61.44	74	-12.56
2483.5	54.9	Ave.	231	1.4	H	-7.18	47.72	54	-6.28
2500	70.1	PK	148	1.2	H	-7.18	62.92	74	-11.08
2500	55.95	Ave.	148	1.2	H	-7.18	48.77	54	-5.23
2483.5	68.96	PK	109	1.7	V	-7.18	61.78	74	-12.22
2483.5	54.81	Ave.	109	1.7	V	-7.18	47.63	54	-6.37
2500	70.15	PK	128	1.5	V	-7.18	62.97	74	-11.03
2500	55.84	Ave.	128	1.5	V	-7.18	48.66	54	-5.34
4960	58.58	PK	40	2	H	-3.04	55.54	74	-18.46
4960	46.58	Ave.	40	2	H	-3.04	43.54	54	-10.46
4960	56.96	PK	98	2.2	V	-3.04	53.92	74	-20.08
4960	44.73	Ave.	98	2.2	V	-3.04	41.69	54	-12.31

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak value were recorded.

1-18GHz  
Pre-scan for High Channel

Horizontal:

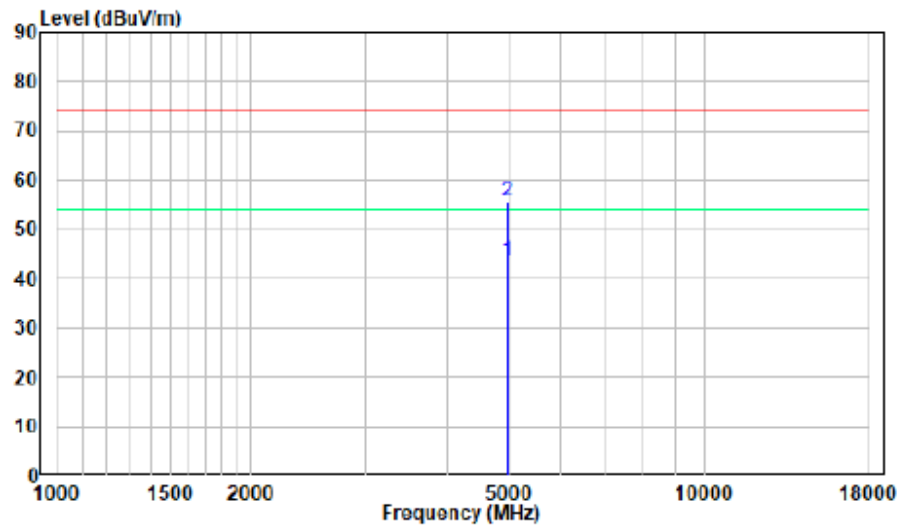


Vertical:

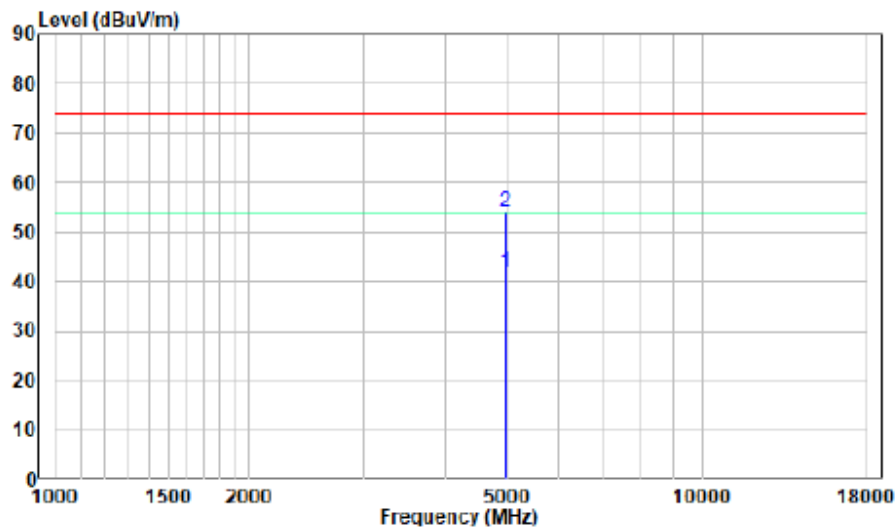


18-25GHz  
Pre-scan for High Channel

Horizontal:

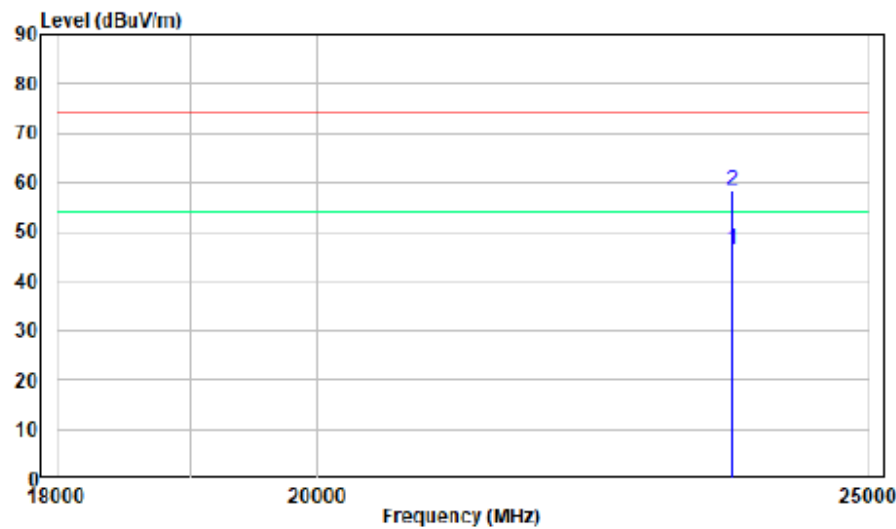

Vertical:

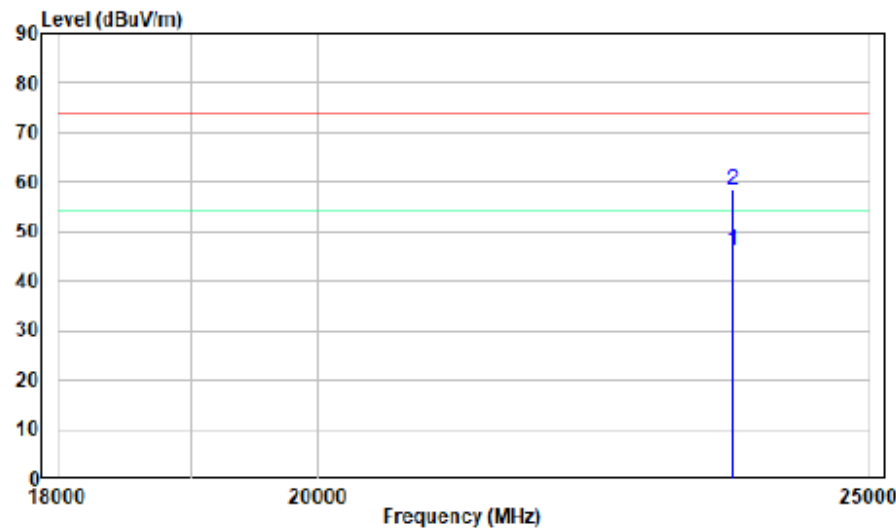

**FCC §15.247(a) (1)-CHANNEL SEPARATION TEST****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

**Test Procedure**

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul Liu on 2021-12-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH****Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


**Test Procedure**

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).





**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul Liu on 2021-12-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul Liu on 2021-12-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

4. The EUT was worked in channel hopping.
5. Set the RBW to: 1MHz.
6. Set the VBW  $\geq 3 \times$  RBW.
7. Set the span to 0Hz.
8. Detector = peak.
9. Sweep time = auto couple.
10. Trace mode = max hold.
11. Allow trace to fully stabilize.
12. Recorded the time of single pulses

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul Liu on 2021-12-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul Liu on 2021-12-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(d) - BAND EDGES TESTING****Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	24°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul Liu on 2021-12-09.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

**APPENDIX****Appendix A: 20dB Emission Bandwidth  
Test Result**

Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.041	---	PASS
		2441	1.038	---	PASS
		2480	1.038	---	PASS
2DH1	Ant1	2402	1.182	---	PASS
		2441	1.182	---	PASS
		2480	1.182	---	PASS
3DH1	Ant1	2402	1.182	---	PASS
		2441	1.176	---	PASS
		2480	1.179	---	PASS

## Test Graphs




## 2DH1 Ant1 2402



## 2DH1 Ant1 2441




## 2DH1 Ant1 2480

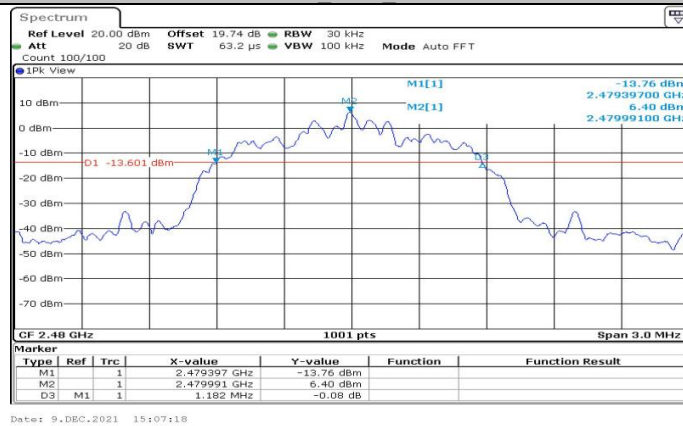





## 3DH1 Ant1 2402

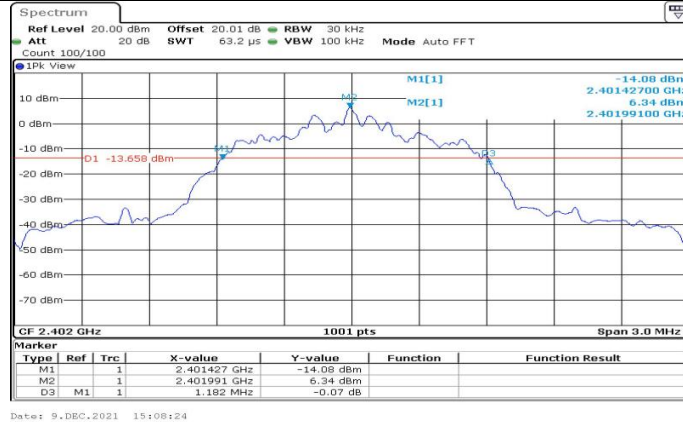

## 3DH1 Ant1 2441

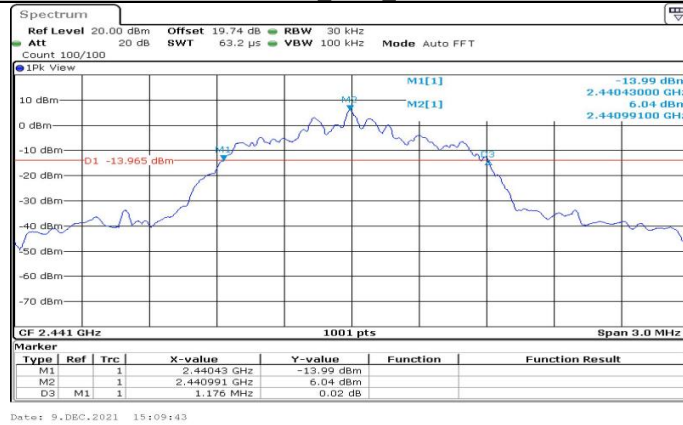

## 3DH1 Ant1 2480

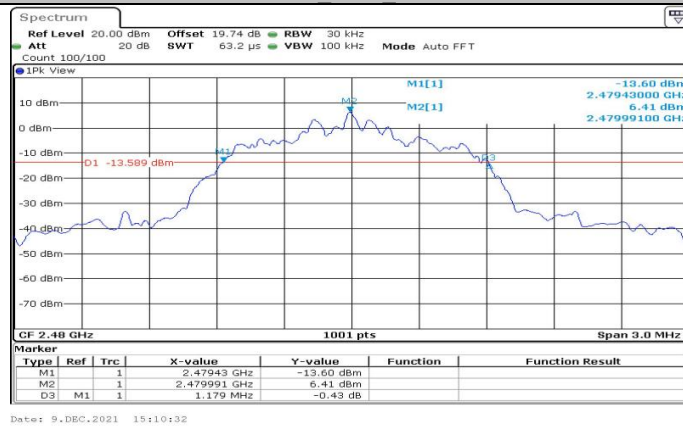

**Appendix B: Occupied Channel Bandwidth  
Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.935	---	PASS
		2441	0.932	---	PASS
		2480	0.935	---	PASS
2DH1	Ant1	2402	1.127	---	PASS
		2441	1.127	---	PASS
		2480	1.127	---	PASS
3DH1	Ant1	2402	1.106	---	PASS
		2441	1.106	---	PASS
		2480	1.112	---	PASS

## Test Graphs




## 2DH1 Ant1 2402




## 2DH1 Ant1 2441



## 2DH1 Ant1 2480

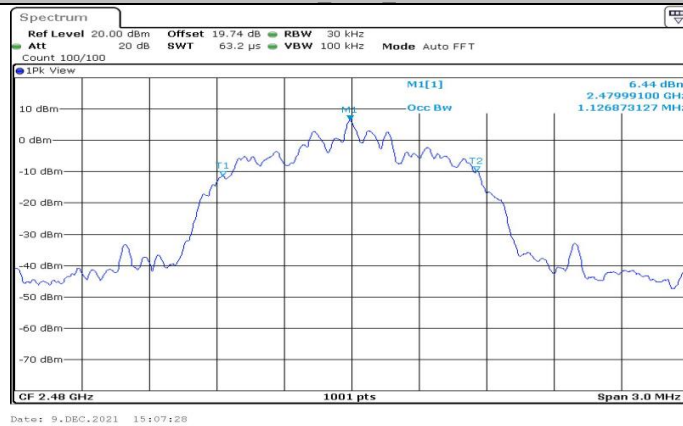


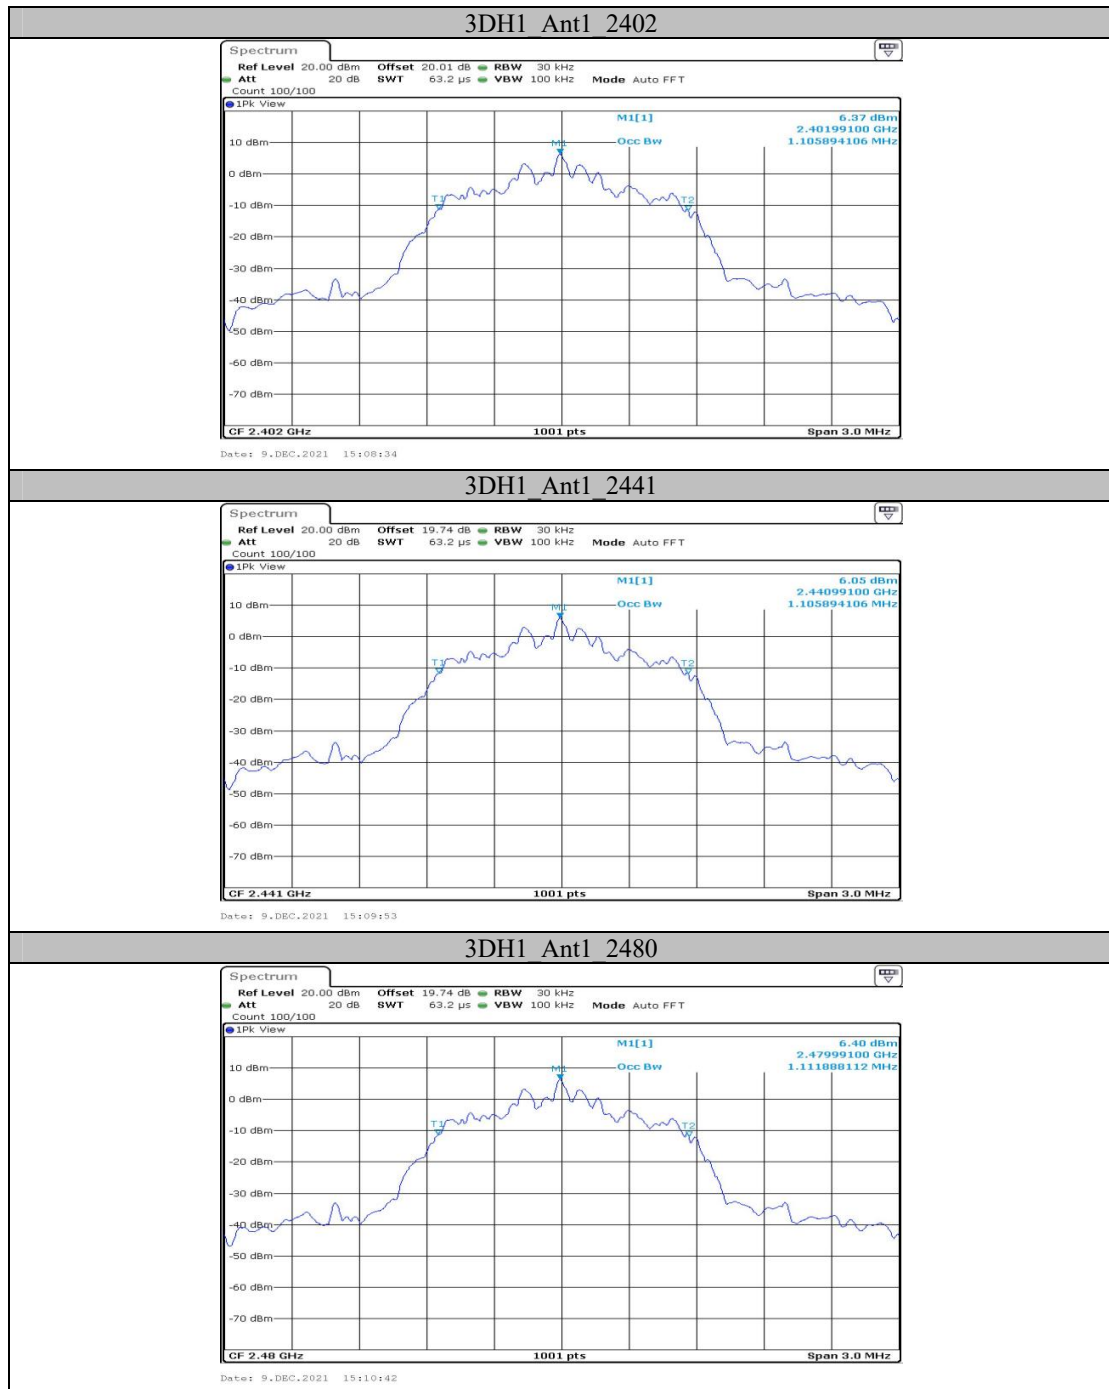

**Appendix C: Maximum conducted Peak output power  
Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	7.47	$\leq 20.97$	PASS
		2441	7.14	$\leq 20.97$	PASS
		2480	7.52	$\leq 20.97$	PASS
2DH1	Ant1	2402	7.52	$\leq 20.97$	PASS
		2441	7.24	$\leq 20.97$	PASS
		2480	7.59	$\leq 20.97$	PASS
3DH1	Ant1	2402	7.55	$\leq 20.97$	PASS
		2441	7.22	$\leq 20.97$	PASS
		2480	7.60	$\leq 20.97$	PASS

## Test Graphs

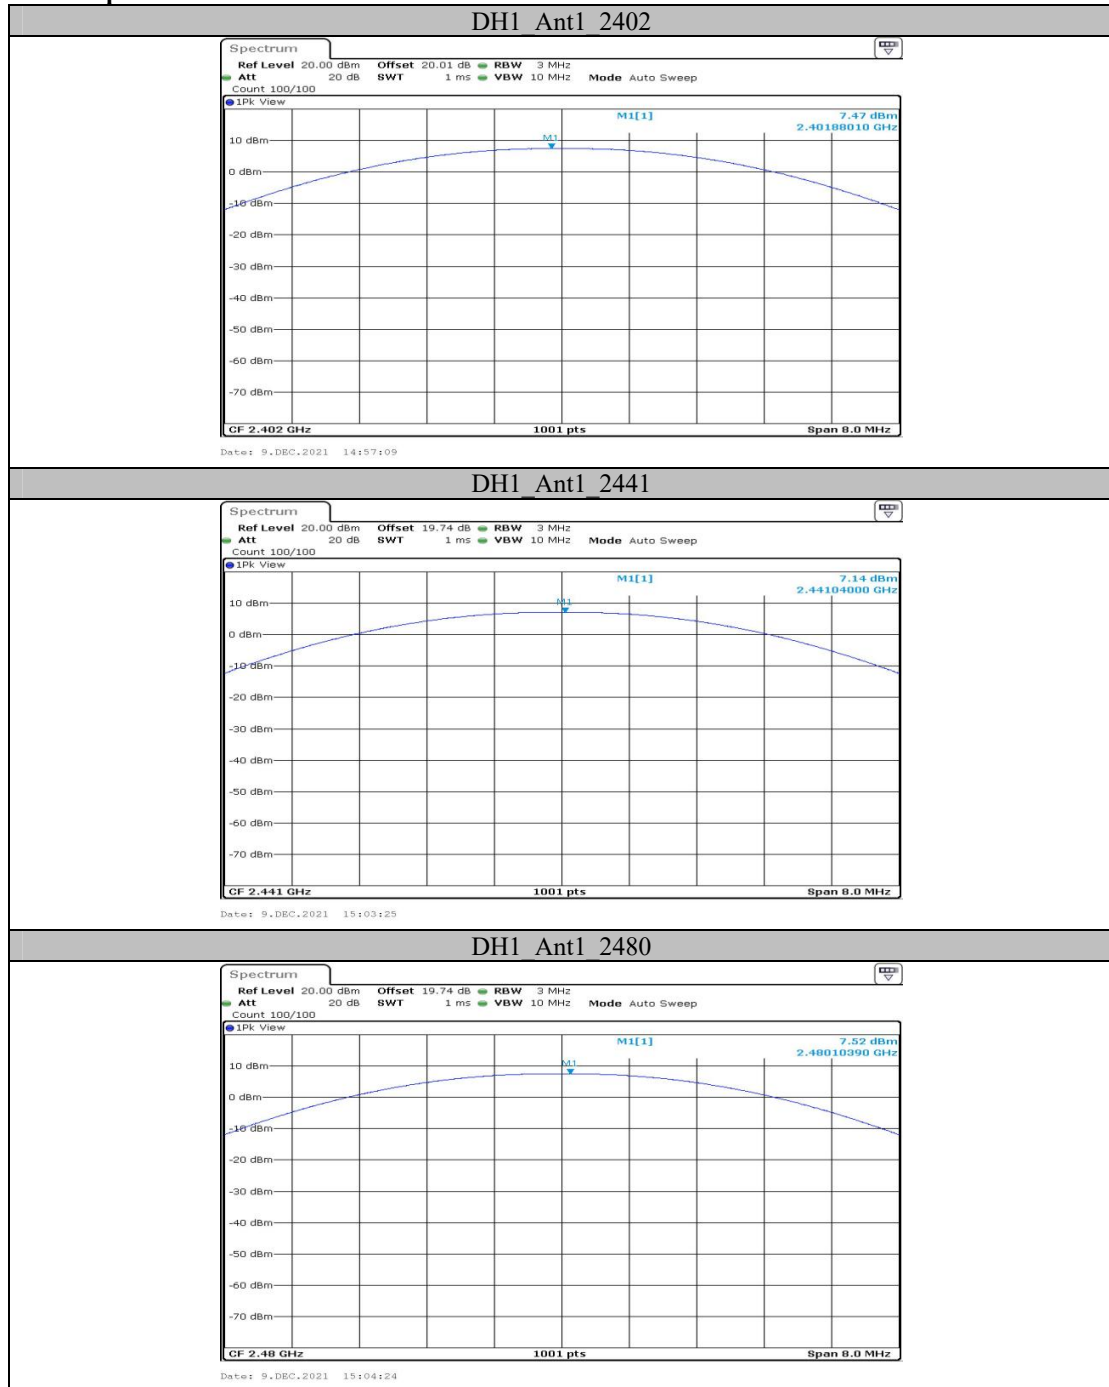








**Appendix D: Carrier frequency separation  
Test Result**

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	$\geq 0.694$	PASS
2DH1	Ant1	Hop	1.003	$\geq 0.788$	PASS
3DH1	Ant1	Hop	1.003	$\geq 0.788$	PASS

## Test Graphs

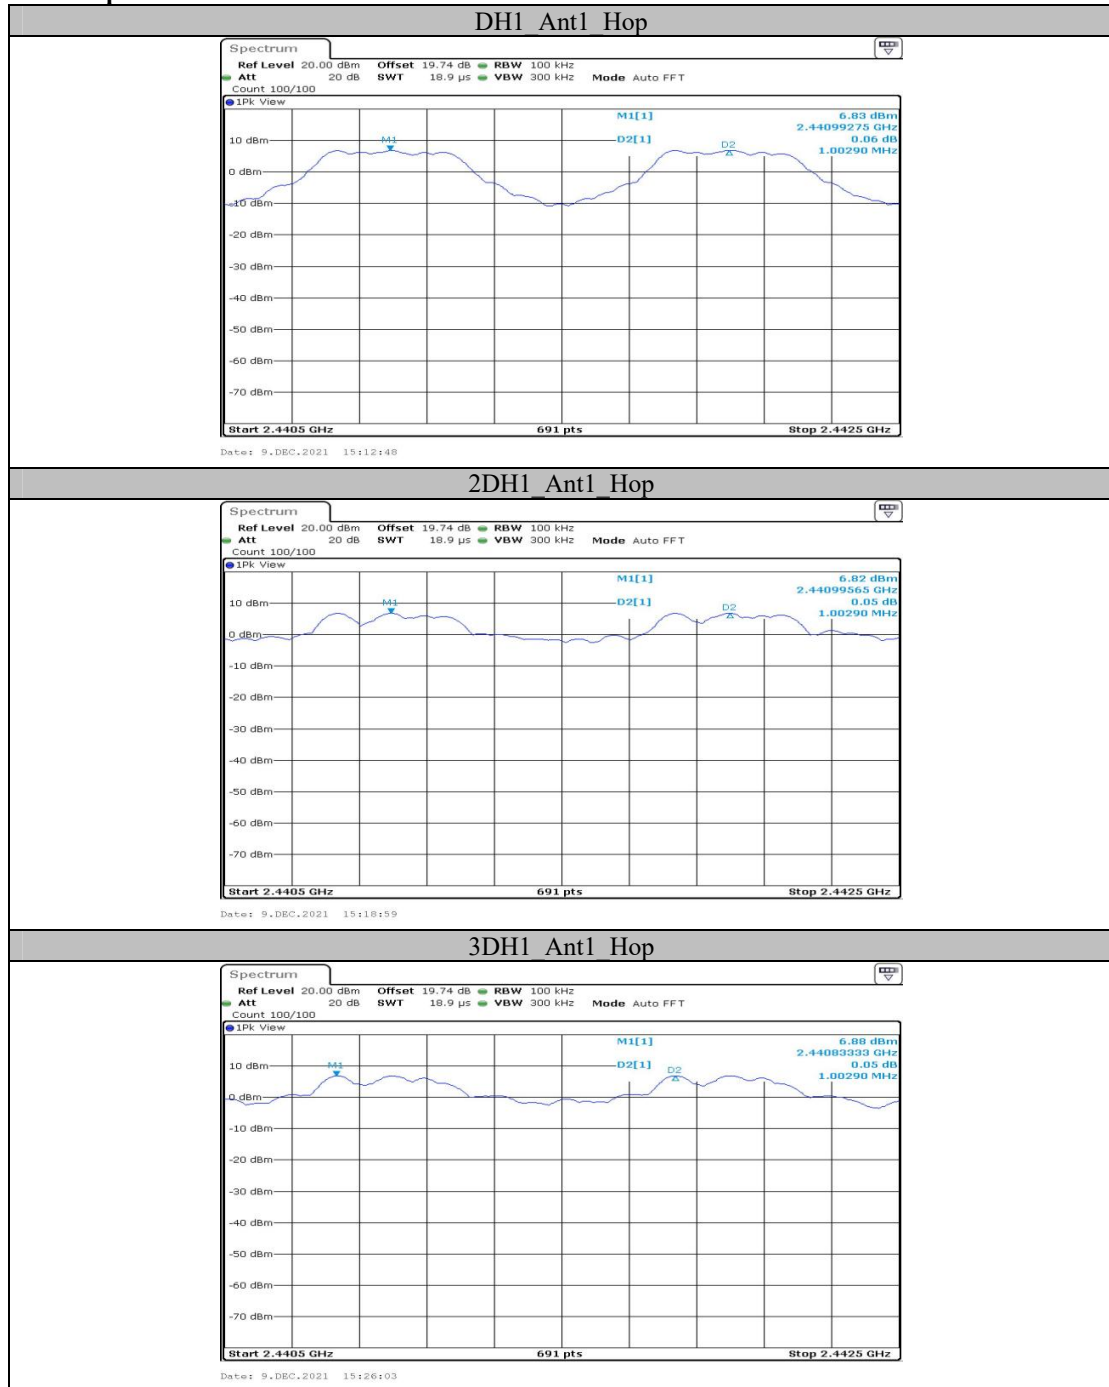

**Appendix E: Time of occupancy****Test Result**


Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.38	150	0.058	≤0.4	PASS
DH3	Ant1	Hop	1.63	150	0.245	≤0.4	PASS
DH5	Ant1	Hop	2.87	120	0.345	≤0.4	PASS
2DH1	Ant1	Hop	0.39	180	0.071	≤0.4	PASS
2DH3	Ant1	Hop	1.64	150	0.246	≤0.4	PASS
2DH5	Ant1	Hop	2.88	110	0.317	≤0.4	PASS
3DH1	Ant1	Hop	0.39	140	0.055	≤0.4	PASS
3DH3	Ant1	Hop	1.64	130	0.213	≤0.4	PASS
3DH5	Ant1	Hop	2.89	120	0.346	≤0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6$ (S), Result=BurstWidth\*Totalhops

Note 2: Totalhops=Hopping Number in  $3.16s \times 10$



Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)

## Test Graphs

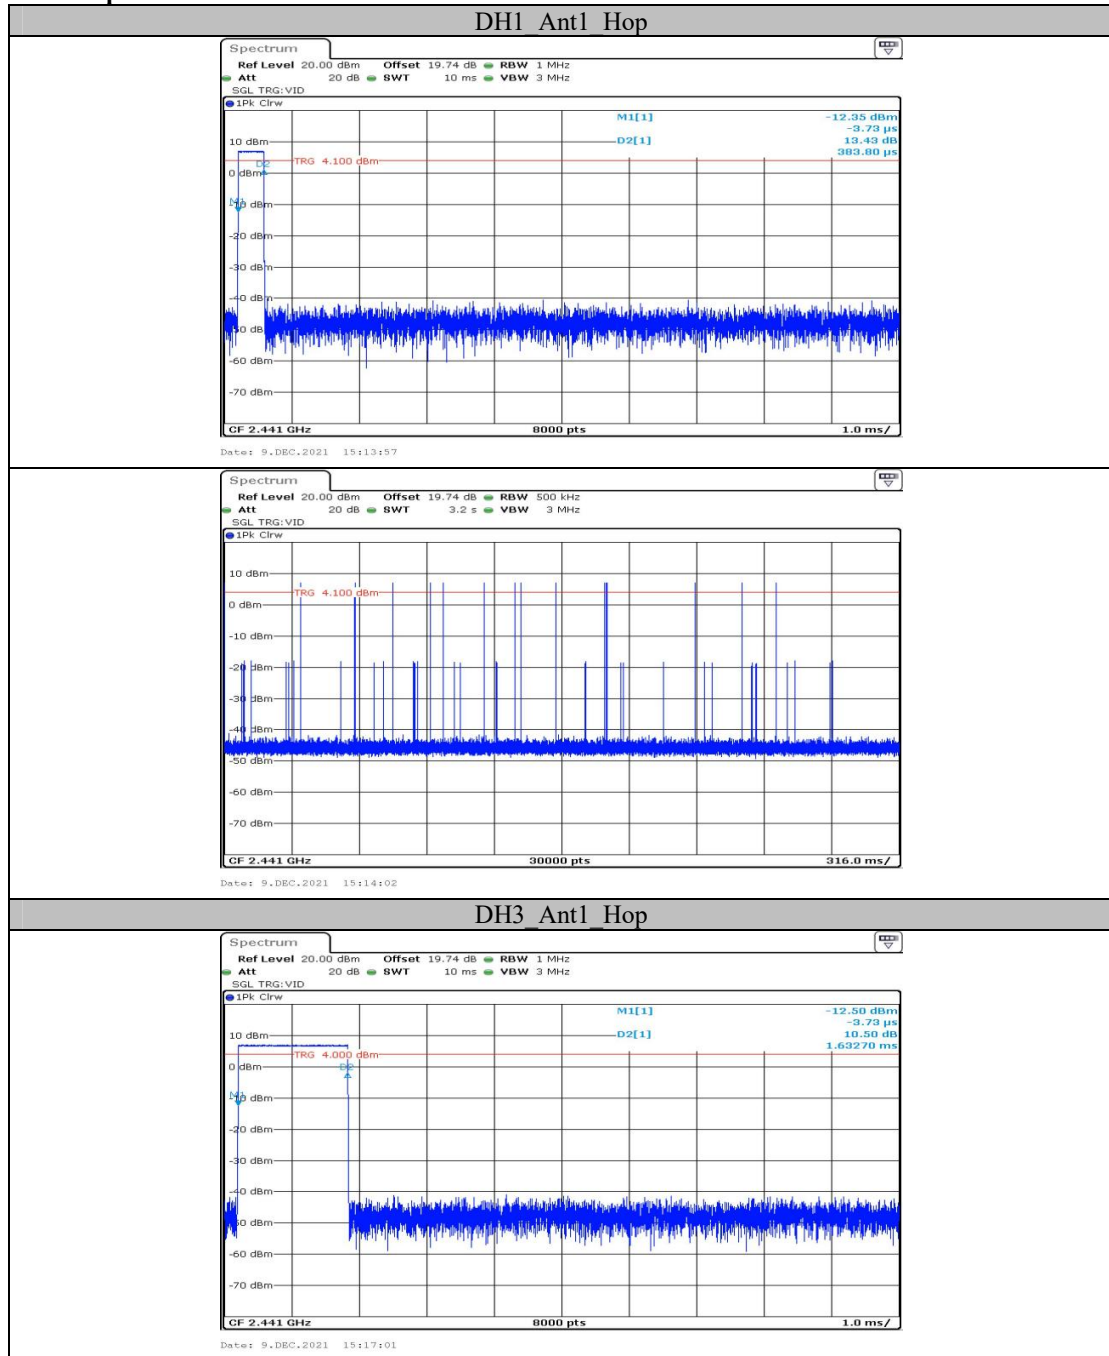


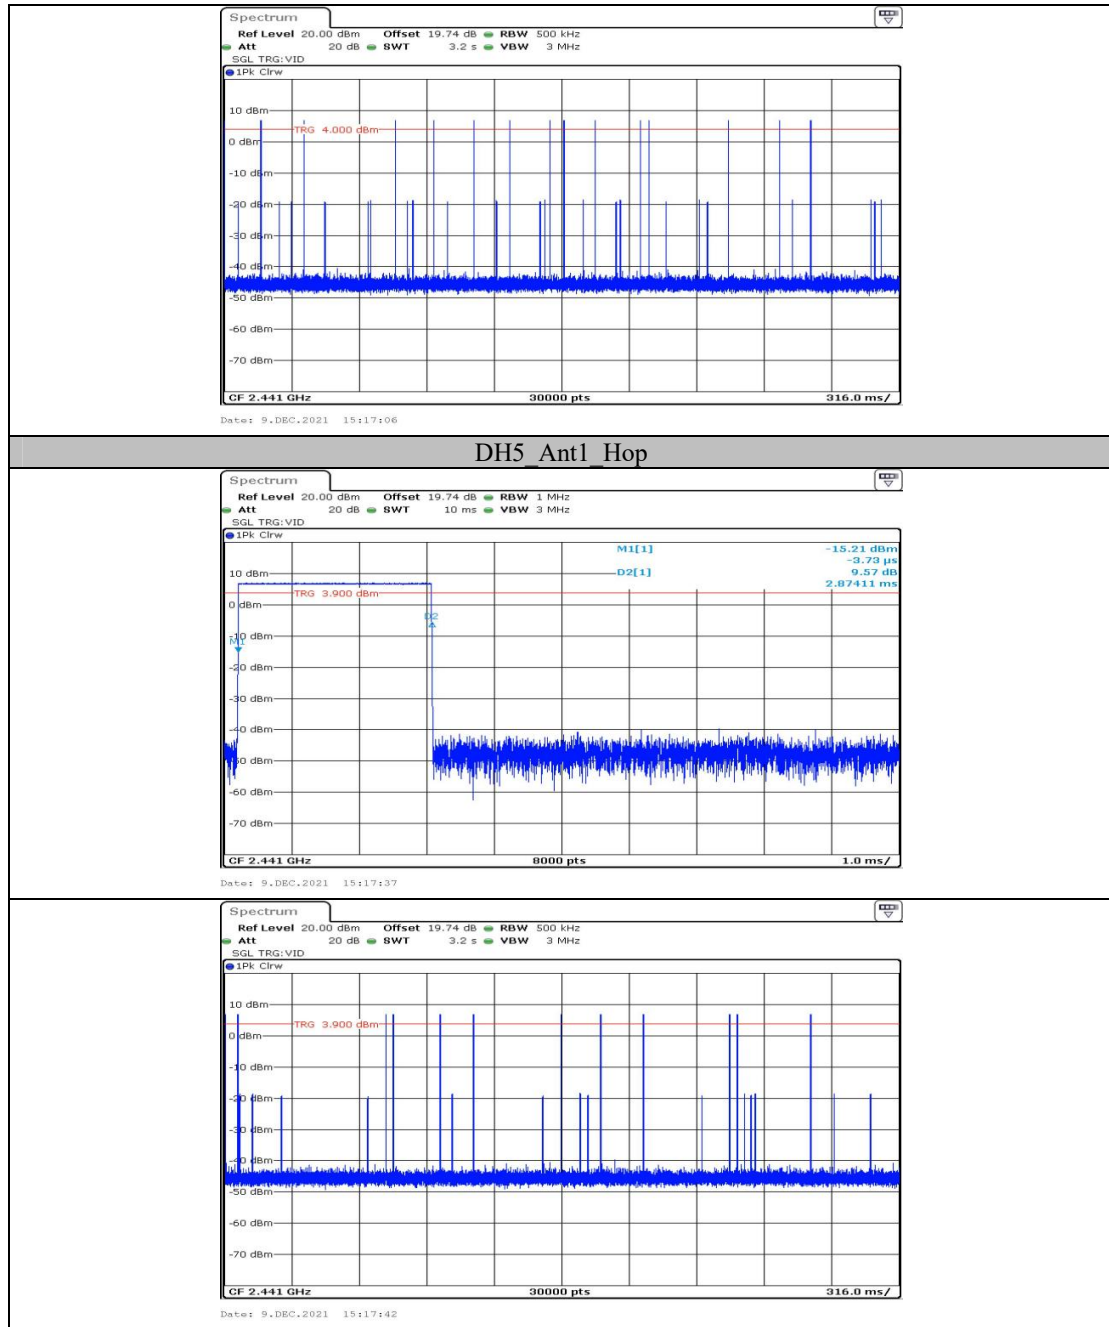


## 2DH1 Ant1 Hop

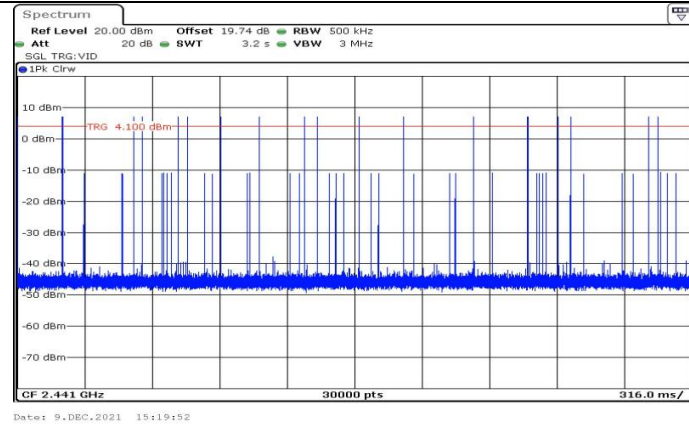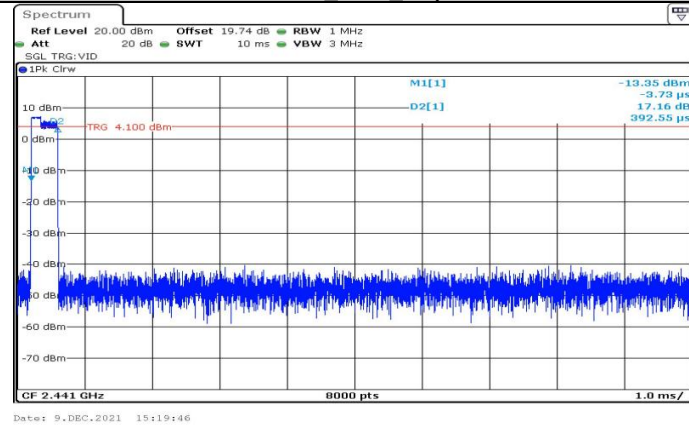



## 2DH3 Ant1 Hop

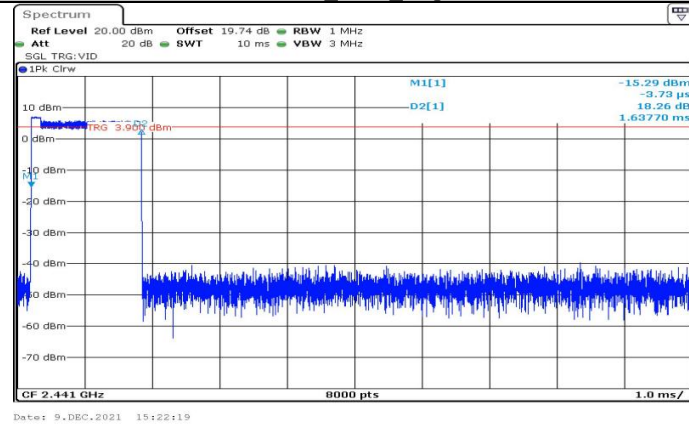

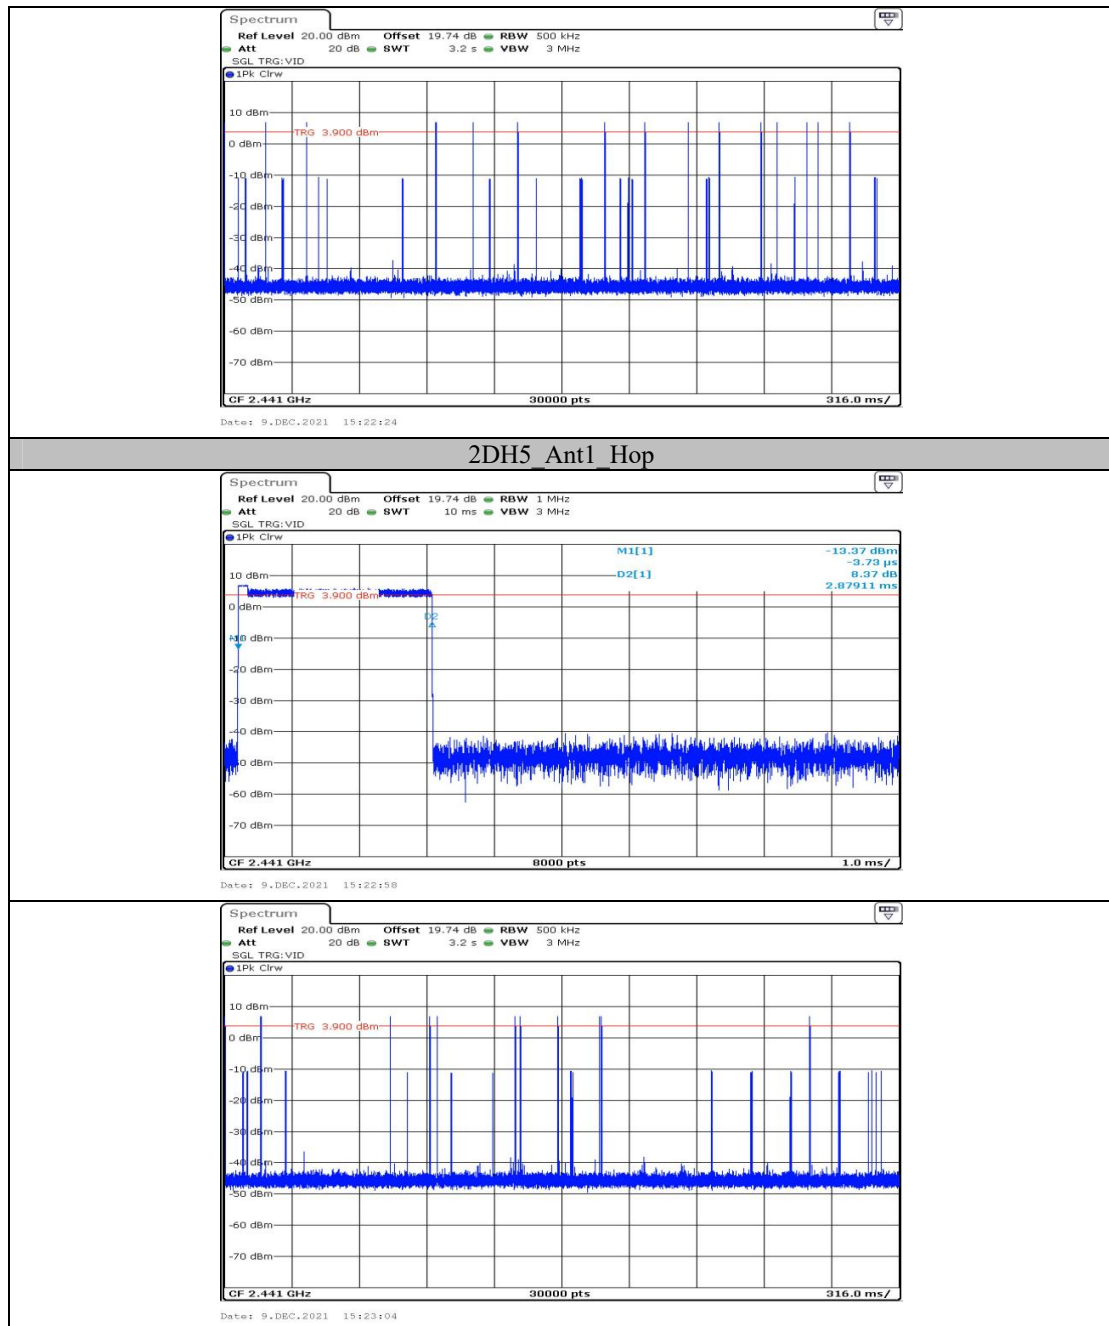





## 3DH1 Ant1 Hop

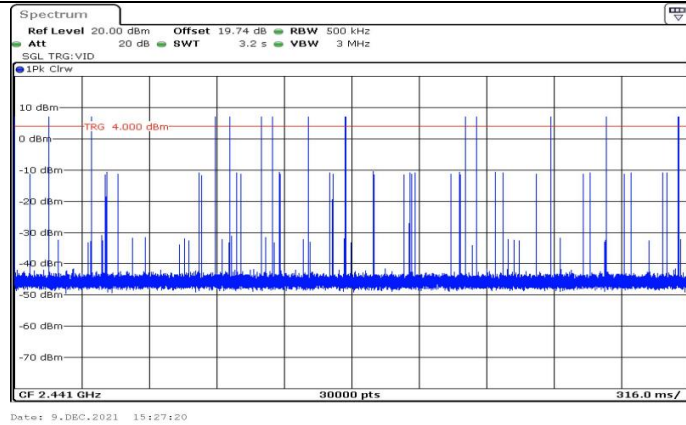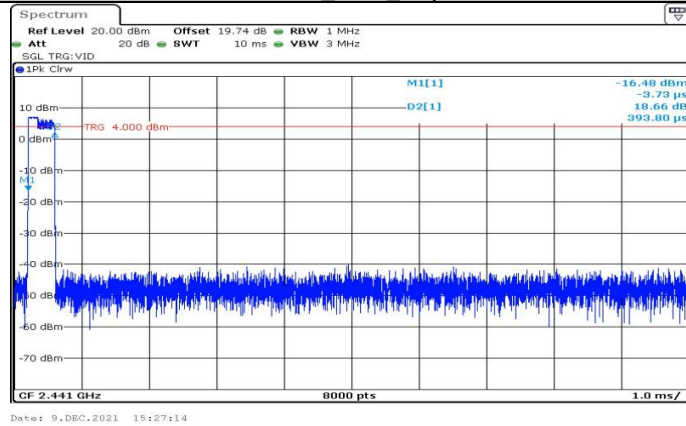

## 3DH3 Ant1 Hop

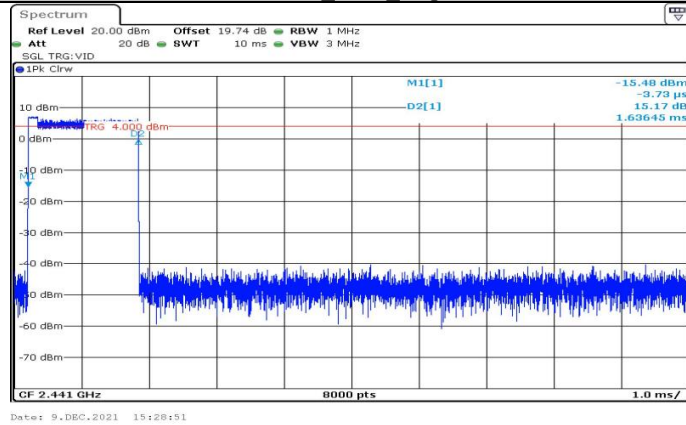


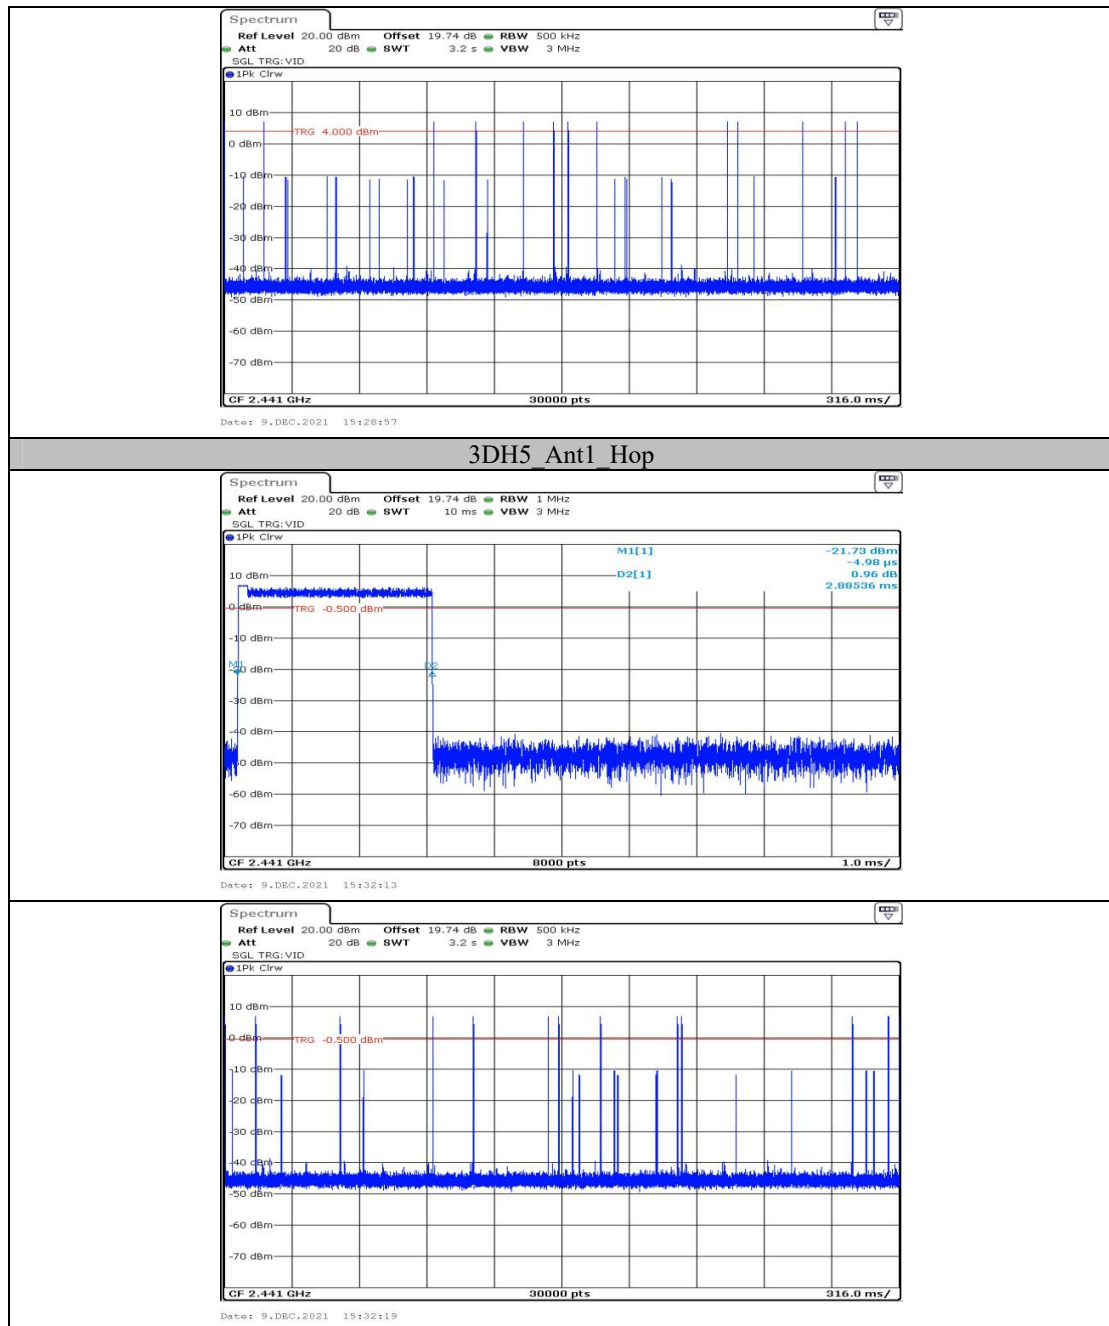

**Appendix F: Number of hopping channels  
Test Result**


Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	$\geq 15$	PASS
2DH1	Ant1	Hop	79	$\geq 15$	PASS
3DH1	Ant1	Hop	79	$\geq 15$	PASS

## Test Graphs

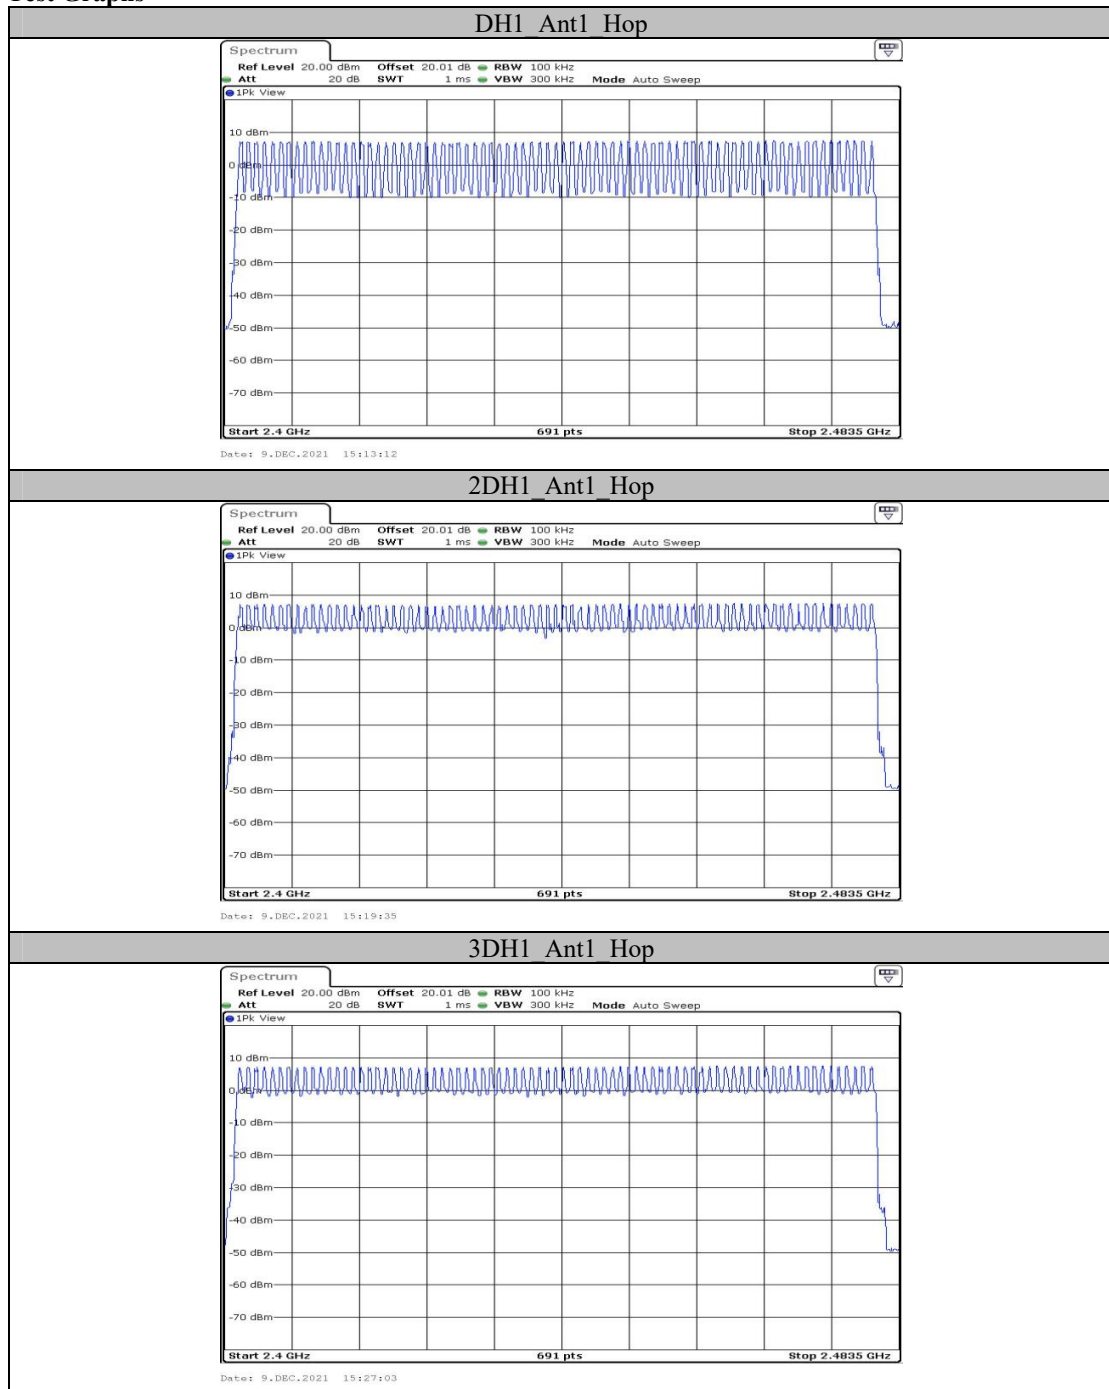


## Appendix G: Band edge measurements

### Test Graphs

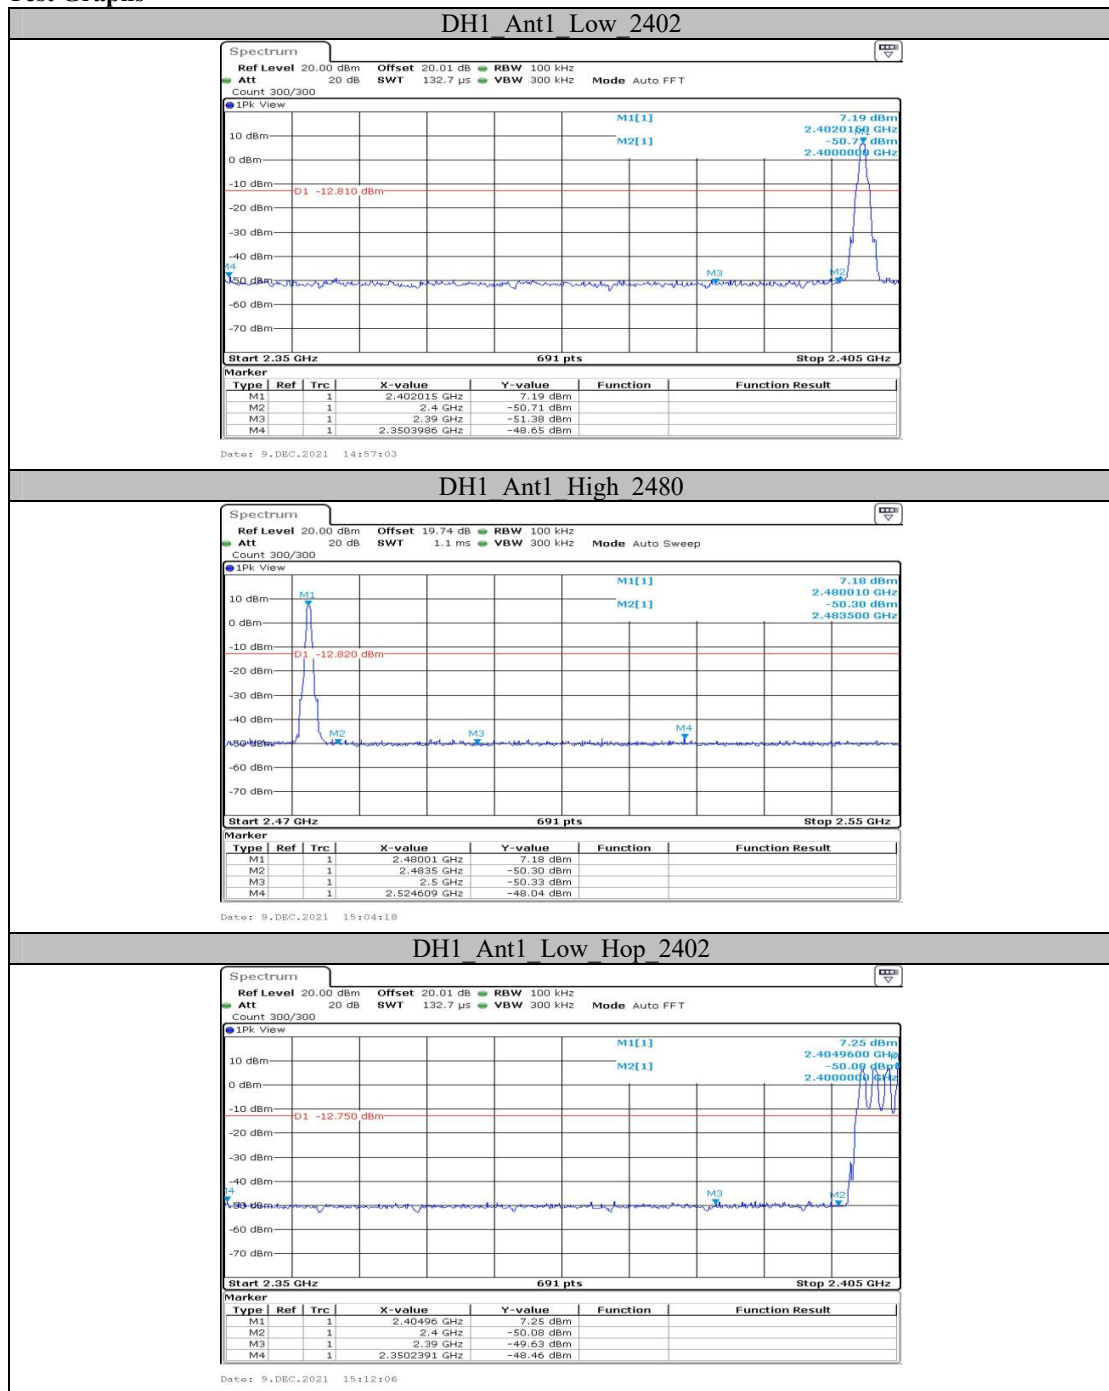


## DH1 Ant1 High Hop 2480

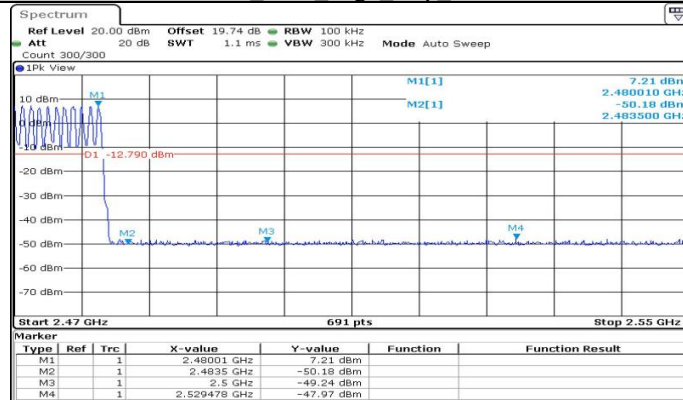


Date: 9.DEC.2021 15:14:46

## 2DH1 Ant1 Low 2402

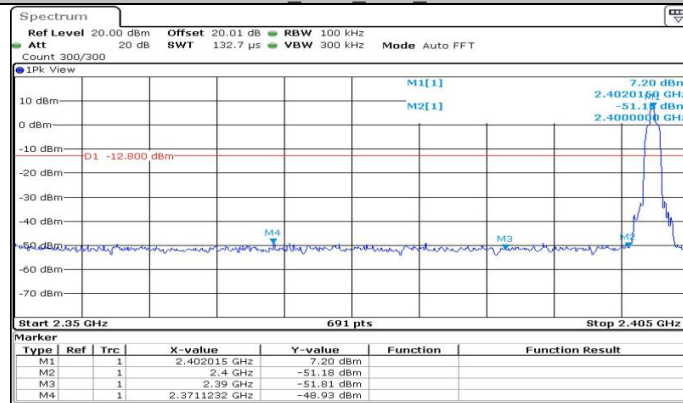


Date: 9.DEC.2021 15:05:30

## 2DH1 Ant1 High 2480

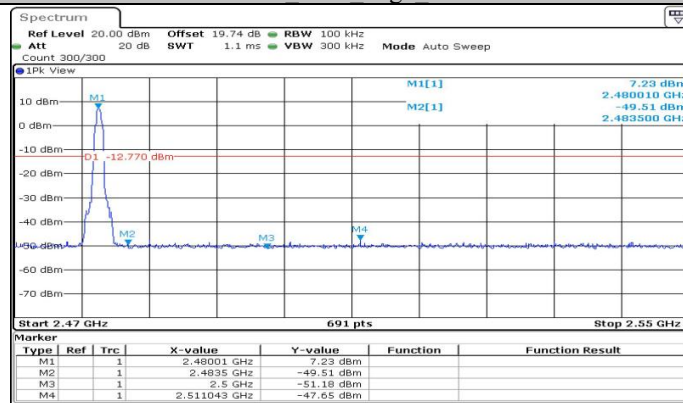


Date: 9.DEC.2021 15:07:36

## 2DH1 Ant1 Low Hop 2402

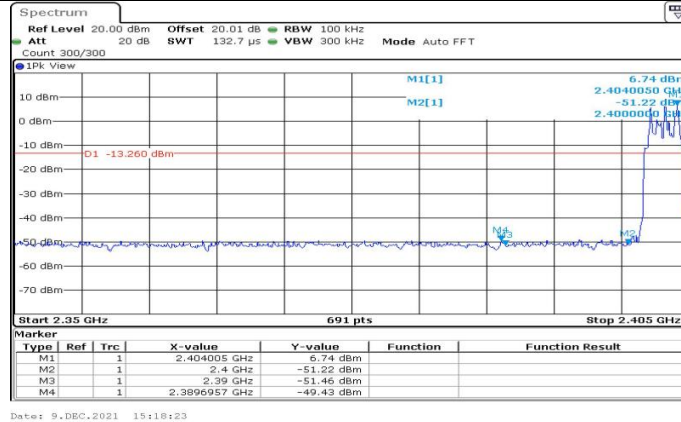


Date: 9.DEC.2021 15:18:23

## 2DH1 Ant1 High Hop 2480

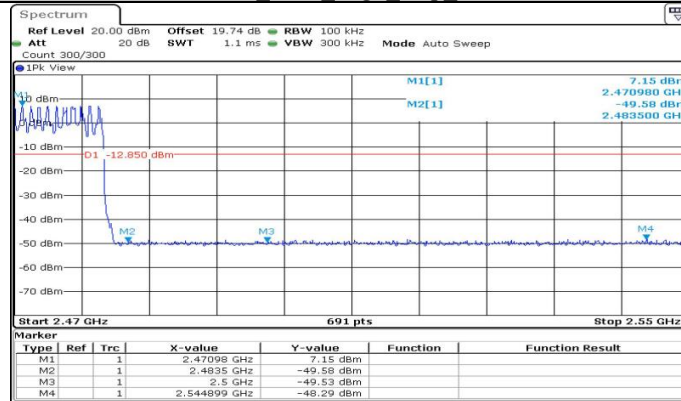


Date: 9.DEC.2021 15:20:05

## 3DH1 Ant1 Low 2402

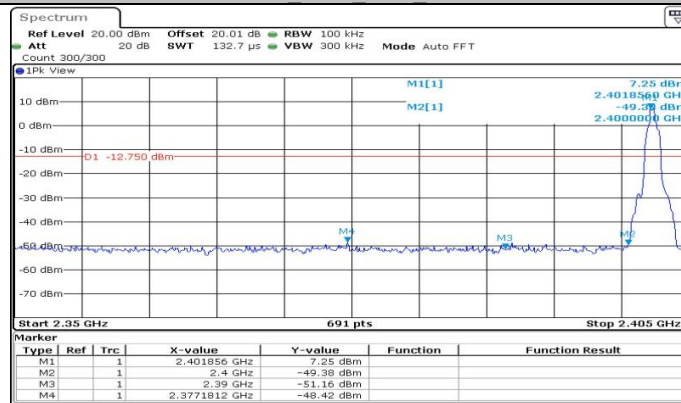


Date: 9.DEC.2021 15:08:42

## 3DH1 Ant1 High 2480

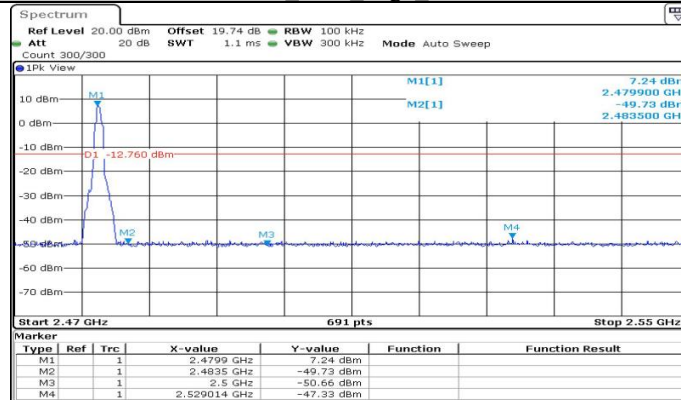


Date: 9.DEC.2021 15:10:51

## 3DH1 Ant1 Low Hop 2402

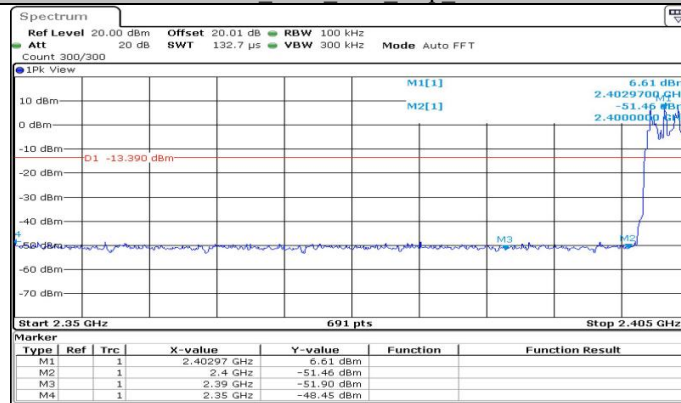

Date: 9.DEC.2021 15:24:13

## 3DH1 Ant1 High Hop 2480

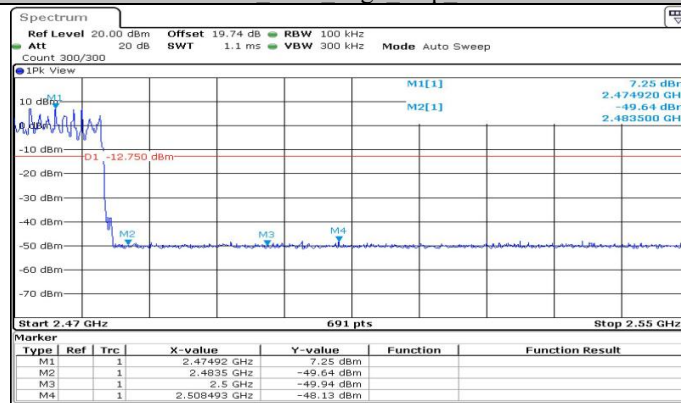

Date: 9.DEC.2021 15:27:29

\*\*\*\*\* END OF REPORT \*\*\*\*\*