

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Report No.:** RFBBQZ-WTW-P21120286

**FCC ID:** PY322100553

**Model No.:** MM32X

**Received Date:** 2022/1/20

**Test Date:** 2022/2/23 ~ 2022/3/11

**Issued Date:** 2022/4/1

**Applicant and  
Manufacturer:** NETGEAR, Inc.

**Address:** 350 East Plumeria Drive San Jose, CA 95134

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**FCC Registration /** 723255 / TW2022

**Designation Number:**

**Approved by:**



**, Date:**

2022/4/1

Clark Lin / Technical Manager

This test report consists of 72 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Cherry Chuo / Specialist

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| <b>Release Control Record .....</b>                                 | <b>4</b>  |
| <b>1 Certificate.....</b>                                           | <b>5</b>  |
| <b>2 Summary of Test Results .....</b>                              | <b>6</b>  |
| 2.1 Measurement Uncertainty .....                                   | 6         |
| 2.2 Supplementary Information .....                                 | 6         |
| <b>3 General Information .....</b>                                  | <b>7</b>  |
| 3.1 General Description .....                                       | 7         |
| 3.2 Antenna Description of EUT .....                                | 8         |
| 3.3 Channel List .....                                              | 9         |
| 3.4 Test Mode Applicability and Tested Channel Detail .....         | 10        |
| 3.5 Duty Cycle of Test Signal .....                                 | 11        |
| 3.6 Test Program Used and Operation Descriptions .....              | 12        |
| 3.7 Connection Diagram of EUT and Peripheral Devices .....          | 12        |
| 3.8 Configuration of Peripheral Devices and Cable Connections ..... | 13        |
| <b>4 Test Instruments .....</b>                                     | <b>14</b> |
| 4.1 RF Output Power .....                                           | 14        |
| 4.2 Power Spectral Density .....                                    | 14        |
| 4.3 6 dB Bandwidth .....                                            | 14        |
| 4.4 Conducted Out of Band Emissions .....                           | 14        |
| 4.5 AC Power Conducted Emissions .....                              | 14        |
| 4.6 Unwanted Emissions below 1 GHz .....                            | 15        |
| 4.7 Unwanted Emissions above 1 GHz .....                            | 16        |
| <b>5 Limits of Test Items.....</b>                                  | <b>17</b> |
| 5.1 RF Output Power .....                                           | 17        |
| 5.2 Power Spectral Density .....                                    | 17        |
| 5.3 6 dB Bandwidth .....                                            | 17        |
| 5.4 Conducted Out of Band Emissions .....                           | 17        |
| 5.5 AC Power Conducted Emissions .....                              | 17        |
| 5.6 Unwanted Emissions below 1 GHz .....                            | 18        |
| 5.7 Unwanted Emissions above 1 GHz .....                            | 18        |
| <b>6 Test Arrangements .....</b>                                    | <b>19</b> |
| 6.1 RF Output Power .....                                           | 19        |
| 6.1.1 Test Setup .....                                              | 19        |
| 6.1.2 Test Procedure .....                                          | 19        |
| 6.2 Power Spectral Density .....                                    | 19        |
| 6.2.1 Test Setup .....                                              | 19        |
| 6.2.2 Test Procedure .....                                          | 19        |
| 6.3 6 dB Bandwidth .....                                            | 20        |
| 6.3.1 Test Setup .....                                              | 20        |
| 6.3.2 Test Procedure .....                                          | 20        |
| 6.4 Conducted Out of Band Emissions .....                           | 20        |
| 6.4.1 Test Setup .....                                              | 20        |
| 6.4.2 Test Procedure .....                                          | 20        |
| 6.5 AC Power Conducted Emissions .....                              | 21        |
| 6.5.1 Test Setup .....                                              | 21        |
| 6.5.2 Test Procedure .....                                          | 21        |
| 6.6 Unwanted Emissions below 1 GHz .....                            | 22        |
| 6.6.1 Test Setup .....                                              | 22        |
| 6.6.2 Test Procedure .....                                          | 23        |
| 6.7 Unwanted Emissions above 1 GHz .....                            | 24        |
| 6.7.1 Test Setup .....                                              | 24        |
| 6.7.2 Test Procedure .....                                          | 24        |
| <b>7 Test Results of Test Item .....</b>                            | <b>25</b> |

|          |                                                      |           |
|----------|------------------------------------------------------|-----------|
| 7.1      | RF Output Power .....                                | 25        |
| 7.2      | Power Spectral Density .....                         | 27        |
| 7.3      | 6 dB Bandwidth .....                                 | 29        |
| 7.4      | Conducted Out of Band Emissions .....                | 31        |
| 7.5      | AC Power Conducted Emissions .....                   | 39        |
| 7.6      | Unwanted Emissions below 1 GHz .....                 | 41        |
| 7.7      | Unwanted Emissions above 1 GHz .....                 | 43        |
| <b>8</b> | <b>Pictures of Test Arrangements .....</b>           | <b>71</b> |
| <b>9</b> | <b>Information of the Testing Laboratories .....</b> | <b>72</b> |

## Release Control Record

| Issue No.            | Description       | Date Issued |
|----------------------|-------------------|-------------|
| RFBBQZ-WTW-P21120286 | Original release. | 2022/4/1    |

## 1 Certificate

**Product:** Wireless Module

**Brand:** NETGEAR

**Test Model:** MM32X

**Sample Status:** Engineering sample

**Applicant and  
Manufacturer:** NETGEAR, Inc.

**Test Date:** 2022/2/23 ~ 2022/3/11

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Measurement  
procedure:** ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02  
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.247) |                                 |        |                                                               |
|------------------------------------------------|---------------------------------|--------|---------------------------------------------------------------|
| Standard / Clause                              | Test Item                       | Result | Remark                                                        |
| 15.247(b)                                      | RF Output Power                 | Pass   | Meet the requirement of limit.                                |
| 15.247(e)                                      | Power Spectral Density          | Pass   | Meet the requirement of limit.                                |
| 15.247(a)(2)                                   | 6 dB Bandwidth                  | Pass   | Meet the requirement of limit.                                |
| 15.247(d)                                      | Conducted Out of Band Emissions | Pass   | Meet the requirement of limit.                                |
| 15.207                                         | AC Power Conducted Emissions    | Pass   | Minimum passing margin is -6.60 dB at 0.36094 MHz             |
| 15.205 /<br>15.209 /<br>15.247(d)              | Unwanted Emissions below 1 GHz  | Pass   | Minimum passing margin is -3.1 dB at 46.13 MHz                |
| 15.205 /<br>15.209 /<br>15.247(d)              | Unwanted Emissions above 1 GHz  | Pass   | Minimum passing margin is -0.1 dB at 2388.25 MHz, 2390.00 MHz |
| 15.203                                         | Antenna Requirement             | Pass   | Antenna connector is ipex(MHF) not a standard connector.      |

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                     | Specification    | Expanded Uncertainty (k=2)<br>(±) |
|---------------------------------|------------------|-----------------------------------|
| Conducted Out of Band Emissions | 9 kHz ~ 40 GHz   | 2.5 dB                            |
| AC Power Conducted Emissions    | 150 kHz ~ 30 MHz | 1.9 dB                            |
| Unwanted Emissions below 1 GHz  | 9 kHz ~ 30 MHz   | 3.1 dB                            |
|                                 | 30 MHz ~ 1 GHz   | 5.4 dB                            |
| Unwanted Emissions above 1 GHz  | 1 GHz ~ 18 GHz   | 5.0 dB                            |
|                                 | 18 GHz ~ 40 GHz  | 5.3 dB                            |

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

|                       |                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Product               | Wireless Module                                                                                                                             |
| Brand                 | NETGEAR                                                                                                                                     |
| Test Model            | MM32X                                                                                                                                       |
| FW Version            | 4.4.154-2.0.1                                                                                                                               |
| Status of EUT         | Engineering sample                                                                                                                          |
| Power Supply Rating   | 12 Vdc                                                                                                                                      |
| Modulation Type       | CCK, DQPSK, DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM<br>256QAM for OFDM in VHT (20/40) mode<br>1024QAM for OFDMA in 11ax HE mode |
| Modulation Technology | DSSS, OFDM, OFDMA                                                                                                                           |
| Transfer Rate         | Up to 573.5 Mbps                                                                                                                            |
| Operating Frequency   | 2412 ~ 2462 MHz                                                                                                                             |
| Number of Channel     | 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11<br>802.11n (HT40), VHT40, 802.11ax (HE40): 7                                   |
| Output Power          | 400.911 mW (26.03 dBm)                                                                                                                      |

Note:

##### 1. Simultaneously transmission condition.

| Condition | Technology  |           |
|-----------|-------------|-----------|
| 1         | WLAN 2.4GHz | WLAN 5GHz |

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

##### 2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

| Antenna NO. | Model             | Antenna Net Gain(dBi) | Frequency range (GHz) | Antenna Type | Connector Type |
|-------------|-------------------|-----------------------|-----------------------|--------------|----------------|
| MC321-Ant0  | 907X00747X22(580) | 1.03                  | 2.4~2.4835            | Dipole       | ipex(MHF)      |
|             |                   | 1.36                  | 5.15~5.25             |              |                |
|             |                   | 1.78                  | 5.725~5.85            |              |                |
| MC321-Ant1  | 907X00747X11(580) | 1.33                  | 2.4~2.4835            | Dipole       | ipex(MHF)      |
|             |                   | 2.22                  | 5.15~5.25             |              |                |
|             |                   | 2.24                  | 5.725~5.85            |              |                |
| MC327-Ant0  | 907X00747X88      | 0.64                  | 2.4~2.4835            | Dipole       | ipex(MHF)      |
|             |                   | 1.24                  | 5.15~5.25             |              |                |
|             |                   | 1.51                  | 5.725~5.85            |              |                |
| MC327-Ant1  | 907X00747X35      | 1.61                  | 2.4~2.4835            | Dipole       | ipex(MHF)      |
|             |                   | 2.03                  | 5.15~5.25             |              |                |
|             |                   | 2.33                  | 5.725~5.85            |              |                |

\*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2. The EUT incorporates a MIMO function:

| 2.4 GHz Band    |                       |     |
|-----------------|-----------------------|-----|
| MODULATION MODE | TX & RX CONFIGURATION |     |
| 802.11b         | 2TX                   | 2RX |
| 802.11g         | 2TX                   | 2RX |
| 802.11n (HT20)  | 2TX                   | 2RX |
| 802.11n (HT40)  | 2TX                   | 2RX |
| VHT20           | 2TX                   | 2RX |
| VHT40           | 2TX                   | 2RX |
| 802.11ax (HE20) | 2TX                   | 2RX |
| 802.11ax (HE40) | 2TX                   | 2RX |

Note:

- The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz) and VHT mode for 20 MHz (40 MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/VHT mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report.



### 3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20 and 802.11ax (HE20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 2412 MHz  | 7       | 2442 MHz  |
| 2       | 2417 MHz  | 8       | 2447 MHz  |
| 3       | 2422 MHz  | 9       | 2452 MHz  |
| 4       | 2427 MHz  | 10      | 2457 MHz  |
| 5       | 2432 MHz  | 11      | 2462 MHz  |
| 6       | 2437 MHz  |         |           |

7 channels are provided for 802.11n (HT40), VHT40 and 802.11ax (HE40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 3       | 2422 MHz  | 7       | 2442 MHz  |
| 4       | 2427 MHz  | 8       | 2447 MHz  |
| 5       | 2432 MHz  | 9       | 2452 MHz  |
| 6       | 2437 MHz  |         |           |

### 3.4 Test Mode Applicability and Tested Channel Detail

|             |                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Worst Case: | Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Following channel(s) was (were) selected for the final test as listed below:

| Test Item                                                                                   | Mode                        | Tested Channel | Modulation | Data Rate Parameter |
|---------------------------------------------------------------------------------------------|-----------------------------|----------------|------------|---------------------|
| AC Power Conducted Emissions                                                                | 802.11b                     | 6              | DBPSK      | 1Mb/s               |
| Unwanted Emissions below 1 GHz                                                              | 802.11b                     | 6              | DBPSK      | 1Mb/s               |
| Unwanted Emissions above 1 GHz                                                              | 802.11b                     | 1, 6, 11       | DBPSK      | 1Mb/s               |
|                                                                                             | 802.11g                     | 1, 6, 11       | BPSK       | 6Mb/s               |
|                                                                                             | 802.11ax (HE20)             | 1, 6, 11       | BPSK       | MCS0                |
|                                                                                             | 802.11ax (HE40)             | 3, 6, 9        | BPSK       | MCS0                |
| RF Output Power / 6 dB Bandwidth / Power Spectral Density / Conducted Out of Band Emissions | 802.11b                     | 1, 6, 11       | DBPSK      | 1Mb/s               |
|                                                                                             | 802.11g                     | 1, 6, 11       | BPSK       | 6Mb/s               |
|                                                                                             | 802.11ax (HE20)             | 1, 6, 11       | BPSK       | MCS0                |
|                                                                                             | 802.11ax (HE40)             | 3, 6, 9        | BPSK       | MCS0                |
| EUT Configure Mode:                                                                         | Use Antenna NO.: MC321-Ant1 |                |            |                     |

### 3.5 Duty Cycle of Test Signal


Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.  
Duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

**802.11b:** Duty cycle =  $8.381 \text{ ms} / 8.423 \text{ ms} = 99.5\%$


**802.11g:** Duty cycle =  $1.39 \text{ ms} / 1.436 \text{ ms} = 96.8\%$ , duty factor =  $10 * \log(1/\text{Duty cycle}) = 0.14 \text{ dB}$

**802.11ax (HE20):** Duty cycle =  $0.537 \text{ ms} / 0.574 \text{ ms} = 93.6\%$ , duty factor =  $10 * \log(1/\text{Duty cycle}) = 0.29 \text{ dB}$


**802.11ax (HE40):** Duty cycle =  $0.07 \text{ ms} / 0.09 \text{ ms} = 77.8\%$ , duty factor =  $10 * \log(1/\text{Duty cycle}) = 1.09 \text{ dB}$

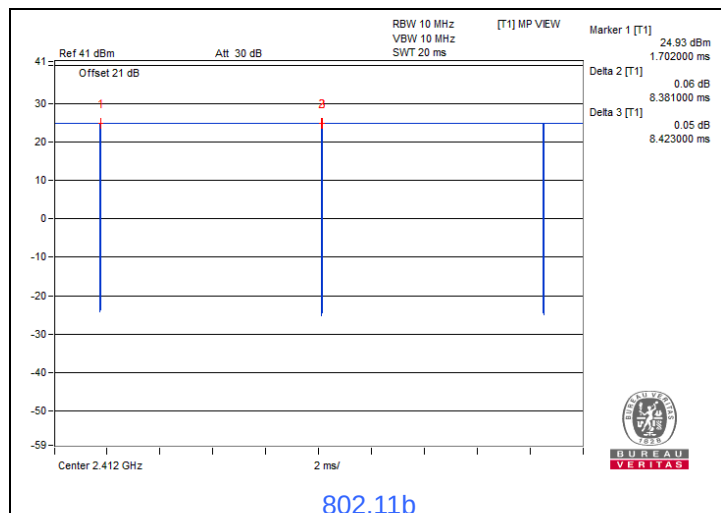


802.11b

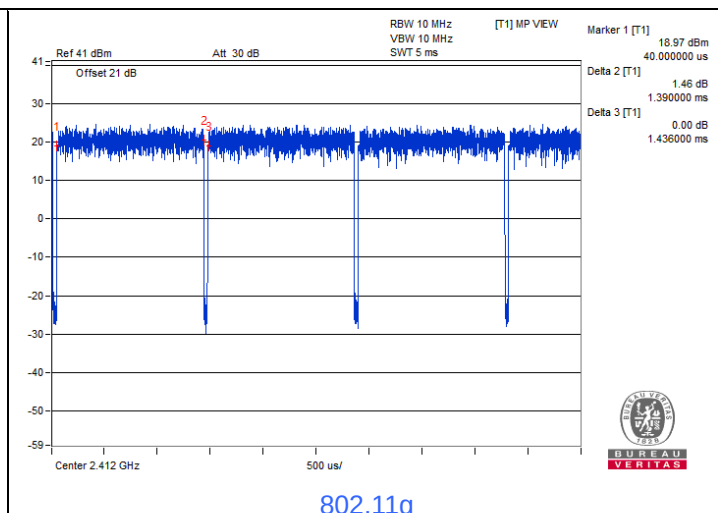

802.11g

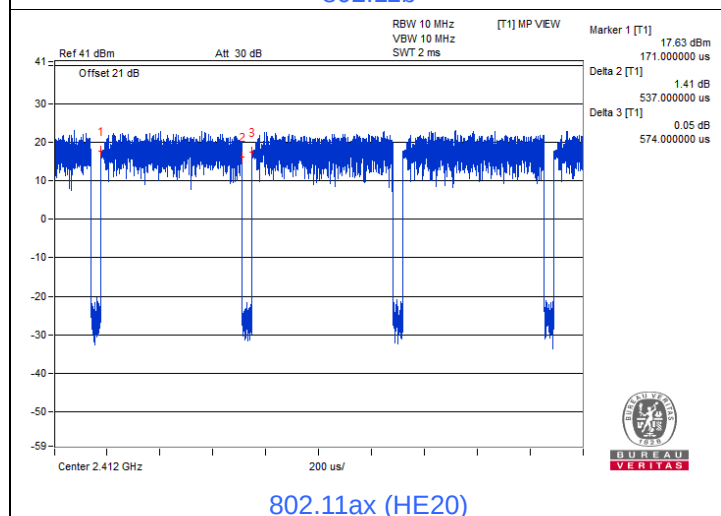

802.11ax (HE20)

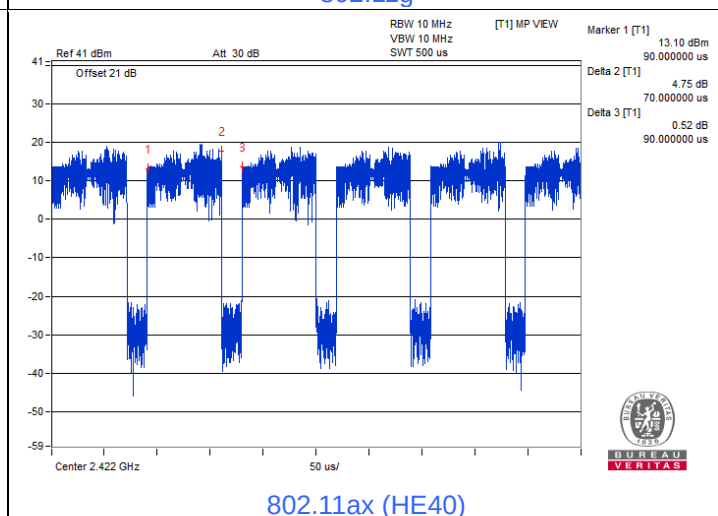


802.11ax (HE40)

### 3.6 Test Program Used and Operation Descriptions


Controlling software (TeraTerm paste cmd.txt command) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

#### For Radiated Emission test

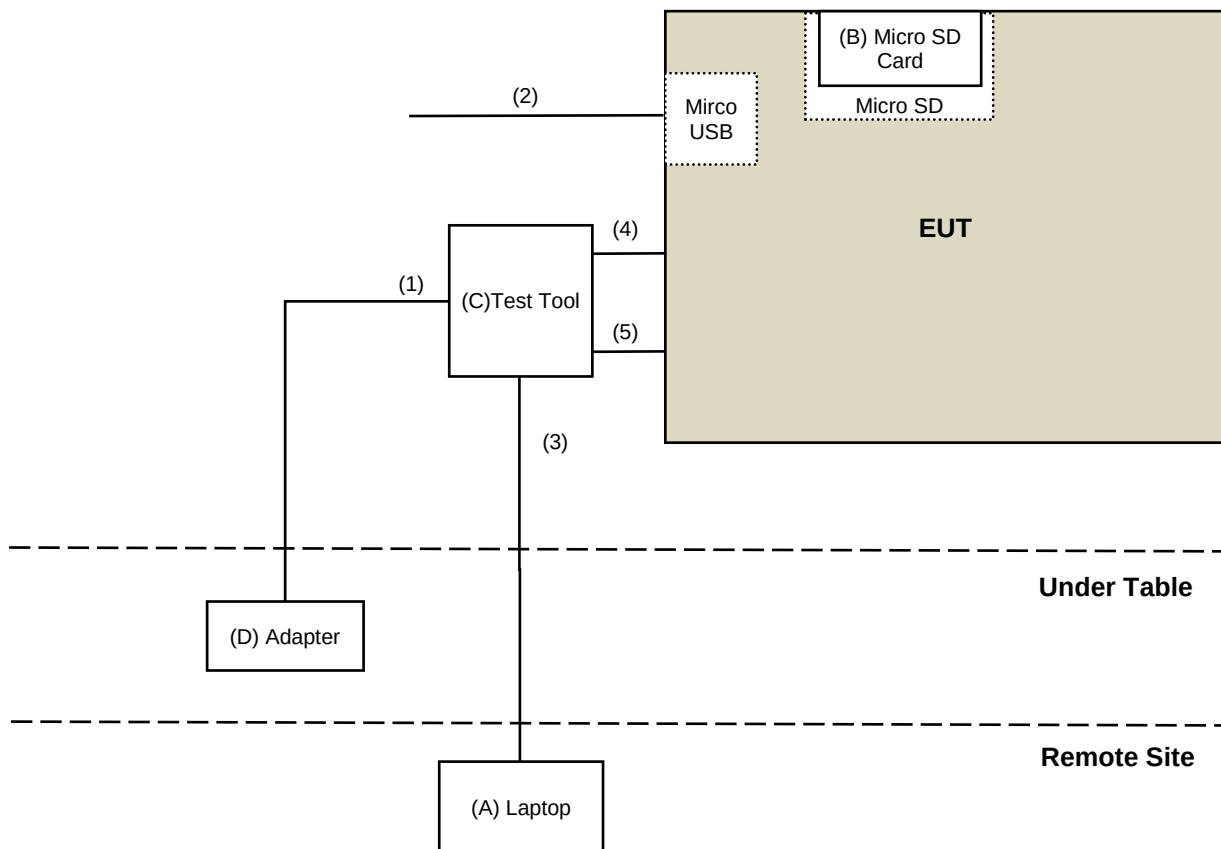

#### For AC Power Conducted Emission test

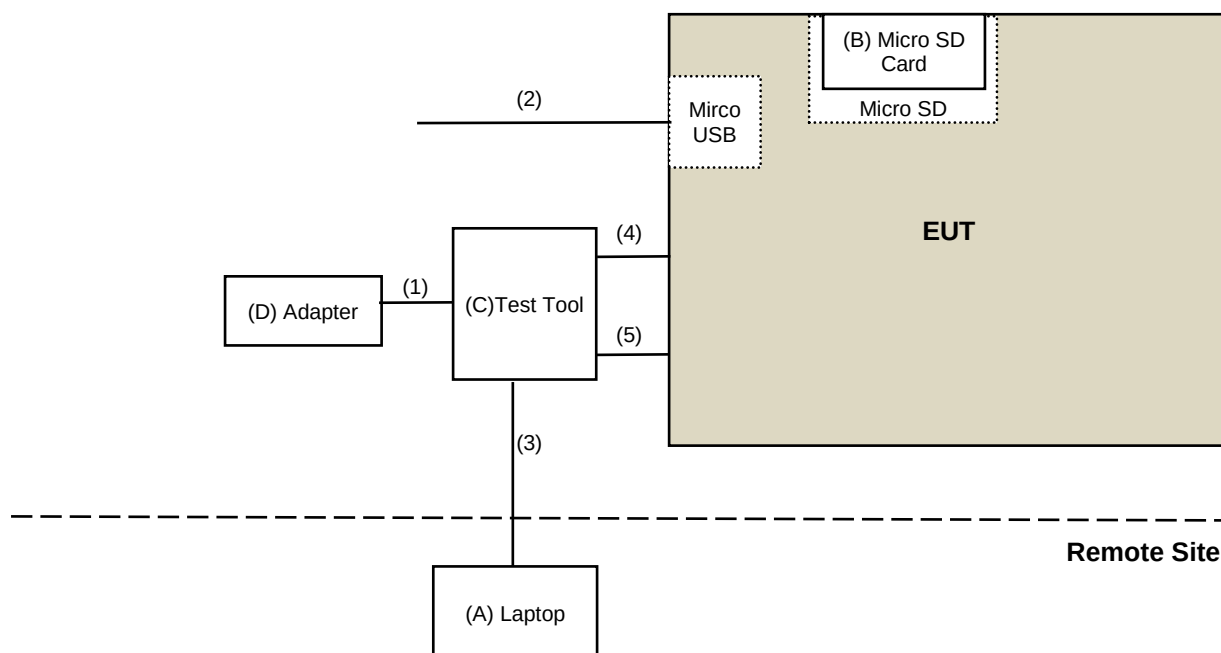

### 3.8 Configuration of Peripheral Devices and Cable Connections

| ID | Product       | Brand   | Model No.              | Serial No. | FCC ID | Remarks               |
|----|---------------|---------|------------------------|------------|--------|-----------------------|
| A  | Laptop        | Lenovo  | 20U5S01X00 L14         | PF-28LKK7  | N/A    | Provided by Lab       |
| B  | Micro SD Card | ADATA   | N/A                    | N/A        | N/A    | Provided by Lab       |
| C  | Test Tool     | Netgear | N/A                    | N/A        | N/A    | Supplied by applicant |
| D  | Adapter       | Netgear | ADS-40FPC-12<br>12030E | N/A        | N/A    | Provided by Lab       |

| ID | Cable Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks               |
|----|--------------------|------|------------|--------------------|--------------|-----------------------|
| 1  | DC Cable           | 1    | 2.5        | No                 | 0            | Supplied by applicant |
| 2  | Micro USB Cable    | 1    | 1          | No                 | 0            | Provided by Lab       |
| 3  | LAN Cable          | 1    | 10         | No                 | 0            | Provided by Lab       |
| 4  | Console Cable      | 1    | 0.5        | No                 | 0            | Supplied by applicant |
| 5  | Console Cable      | 1    | 0.5        | No                 | 0            | Supplied by applicant |

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

| Description<br>Manufacturer   | Model No.                        | Serial No.    | Calibrated<br>Date | Calibrated<br>Until |
|-------------------------------|----------------------------------|---------------|--------------------|---------------------|
| Attenuator<br>WOKEN           | MDCS18N-10                       | MDCS18N-10-01 | 2021/4/13          | 2022/4/12           |
| Power Meter<br>Anritsu        | ML2495A                          | 1529002       | 2021/6/21          | 2022/6/20           |
| Pulse Power Sensor<br>Anritsu | MA2411B                          | 1339443       | 2021/5/31          | 2022/5/30           |
| Software                      | ADT_RF Test Software<br>V6.6.5.4 | N/A           | N/A                | N/A                 |
| Spectrum Analyzer<br>R&S      | FSV40                            | 100964        | 2021/5/31          | 2022/5/30           |

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2022/3/11

### 4.2 Power Spectral Density

Refer to section 4.1 to get information of the instruments.

### 4.3 6 dB Bandwidth

Refer to section 4.1 to get information of the instruments.

### 4.4 Conducted Out of Band Emissions

Refer to section 4.1 to get information of the instruments.

### 4.5 AC Power Conducted Emissions

| Description<br>Manufacturer | Model No.           | Serial No. | Calibrated<br>Date | Calibrated<br>Until |
|-----------------------------|---------------------|------------|--------------------|---------------------|
| 50 ohms Terminator          | 50                  | 3          | 2021/10/27         | 2022/10/26          |
| Fixed attenuator<br>STI     | STI02-2200-10       | 005        | 2021/8/27          | 2022/8/26           |
| LISN<br>R&S                 | ESH3-Z5             | 848773/004 | 2021/10/29         | 2022/10/28          |
| LISN<br>R & S               | ESH3-Z5             | 835239/001 | 2021/3/26          | 2022/3/25           |
| RF Coaxial Cable<br>JYEBO   | 5D-FB               | COCCAB-001 | 2021/9/25          | 2022/9/24           |
| Software<br>BVADT           | BVADT_Cond_V7.3.7.4 | N/A        | N/A                | N/A                 |
| TEST RECEIVER<br>R&S        | ESCS 30             | 847124/029 | 2021/10/13         | 2022/10/12          |

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2022/3/1

#### 4.6 Unwanted Emissions below 1 GHz

| Description<br>Manufacturer             | Model No.            | Serial No.  | Calibrated<br>Date | Calibrated<br>Until |
|-----------------------------------------|----------------------|-------------|--------------------|---------------------|
| Antenna Tower & Turn Table<br>Max-Full  | MF-7802              | MF780208406 | N/A                | N/A                 |
| Fixed attenuator<br>Mini-Circuits       | UNAT-5+              | PAD-3m-3-01 | 2021/9/23          | 2022/9/22           |
| Loop Antenna<br>TESEQ                   | HLA 6121             | 45745       | 2021/7/21          | 2022/7/20           |
| Pre_Amplifier<br>EMCI                   | EMC001340            | 980142      | 2021/5/24          | 2022/5/23           |
| Pre_Amplifier<br>Mini-Circuits          | ZFL-1000VH2          | QA0838008   | 2021/10/19         | 2022/10/18          |
| RF Coaxial Cable<br>JYEBO               | 5D-FB                | LOOPCAB-001 | 2022/1/6           | 2023/1/5            |
|                                         |                      | LOOPCAB-002 | 2022/1/6           | 2023/1/5            |
| RF Coaxial Cable<br>COMMATE/PEWC        | 8D                   | 001         | 2022/2/26          | 2023/2/25           |
|                                         |                      | 966-3-2     | 2021/3/16          | 2022/3/15           |
|                                         |                      | 966-3-3     | 2022/2/26          | 2023/2/25           |
| Software                                | ADT_Radiated_V8.7.08 | N/A         | N/A                | N/A                 |
| Spectrum Analyzer<br>KEYSIGHT           | N9030B               | MY57142938  | 2021/4/26          | 2022/4/25           |
| Test Receiver<br>KEYSIGHT               | N9038A               | MY59050100  | 2021/5/3           | 2022/5/2            |
| Trilog Broadband Antenna<br>Schwarzbeck | VULB 9168            | 9168-361    | 2021/10/26         | 2022/10/25          |

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2022/3/7

#### 4.7 Unwanted Emissions above 1 GHz

| Description<br>Manufacturer                   | Model No.            | Serial No.  | Calibrated<br>Date | Calibrated<br>Until |
|-----------------------------------------------|----------------------|-------------|--------------------|---------------------|
| Antenna Tower & Turn Table<br>Max-Full        | MF-7802              | MF780208406 | N/A                | N/A                 |
| Fix tool for Boresight antenna tower<br>BV    | FBA-01               | FBA_SIP01   | N/A                | N/A                 |
| Horn Antenna<br>Schwarzbeck                   | BBHA9120-D           | 9120D-406   | 2021/11/14         | 2022/11/13          |
|                                               | BBHA 9170            | BBHA9170519 | 2021/11/14         | 2022/11/13          |
| Pre_Amplifier<br>EMCI                         | EMC12630SE           | 980384      | 2022/1/10          | 2023/1/9            |
|                                               | EMC184045SE          | 980387      | 2022/1/10          | 2023/1/9            |
| RF Cable<br>EMCI                              | EMC104-SM-SM-6000    | 210201      | 2021/5/13          | 2022/5/12           |
| RF Cable-Frequency range: 1-<br>40GHz<br>EMCI | EMC102-KM-KM-1200    | 160924      | 2022/1/10          | 2023/1/9            |
| RF Coaxial Cable<br>EMCI                      | EMC104-SM-SM-1500    | 180504      | 2021/4/26          | 2022/4/25           |
|                                               | EMC104-SM-SM-2000    | 180601      | 2021/6/8           | 2022/6/7            |
|                                               | EMC-KM-KM-4000       | 200214      | 2021/3/10          | 2022/3/9            |
|                                               | EMC-KM-KM-4000       | 200214      | 2022/3/8           | 2023/3/7            |
| Software                                      | ADT_Radiated_V8.7.08 | N/A         | N/A                | N/A                 |
| Spectrum Analyzer<br>KEYSIGHT                 | N9030B               | MY57142938  | 2021/4/26          | 2022/4/25           |
| Spectrum Analyzer<br>Keysight                 | N9030A               | MY54490679  | 2021/7/9           | 2022/7/8            |
| Test Receiver<br>KEYSIGHT                     | N9038A               | MY59050100  | 2021/5/3           | 2022/5/2            |

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2022/2/23 ~ 2022/3/10



## 5 Limits of Test Items

### 5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

### 5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

### 5.4 Conducted Out of Band Emissions

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 5.5 AC Power Conducted Emissions

| Frequency (MHz) | Conducted Limit (dBuV) |         |
|-----------------|------------------------|---------|
|                 | Quasi-peak             | Average |
| 0.15 - 0.5      | 66 - 56                | 56 - 46 |
| 0.50 - 5.0      | 56                     | 46      |
| 5.0 - 30.0      | 60                     | 50      |

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

## 5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

## 5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| Above 960         | 500                               | 3                             |


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup




#### 6.1.2 Test Procedure

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 6.2 Power Spectral Density

#### 6.2.1 Test Setup




#### 6.2.2 Test Procedure

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

Note: If Duty cycle  $< 98\%$ , Add  $10 \log(1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 6.3 6 dB Bandwidth

#### 6.3.1 Test Setup




#### 6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4 Conducted Out of Band Emissions

#### 6.4.1 Test Setup



#### 6.4.2 Test Procedure

##### MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

## 6.5 AC Power Conducted Emissions

### 6.5.1 Test Setup

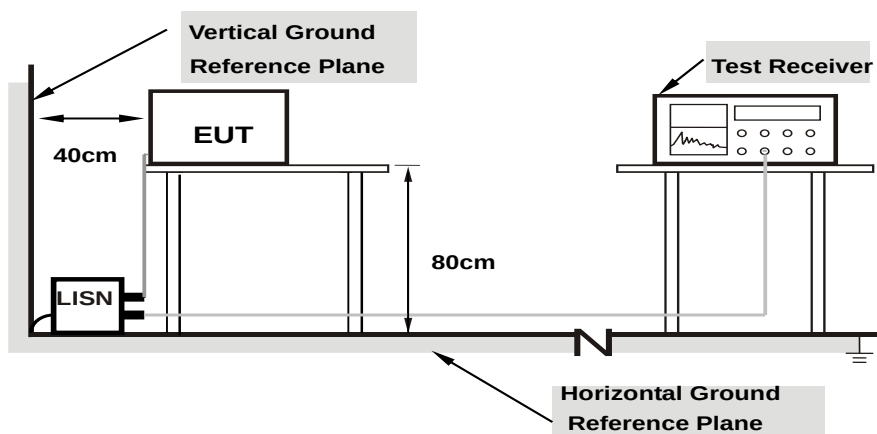

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.5.2 Test Procedure

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


**Note:**

The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.6 Unwanted Emissions below 1 GHz

### 6.6.1 Test Setup

For Radiated emission below 30 MHz

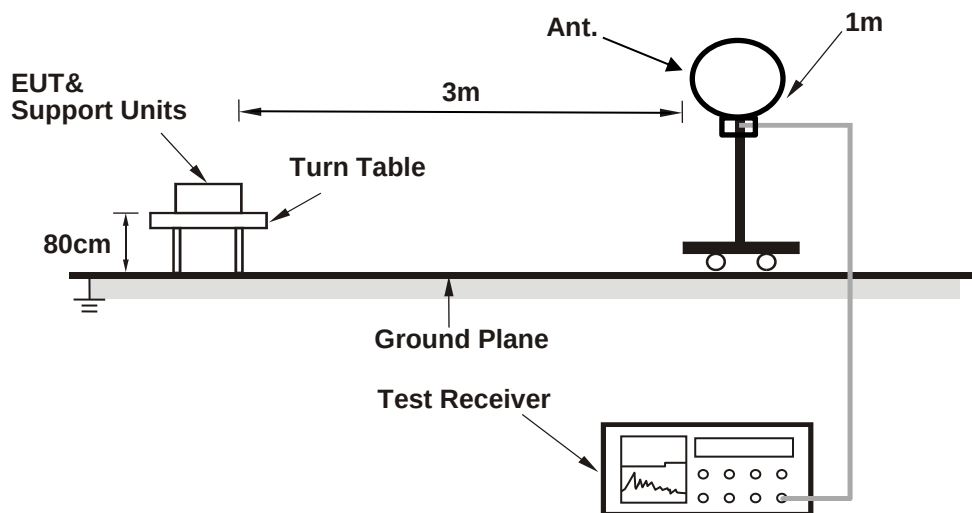

For Radiated emission above 30 MHz

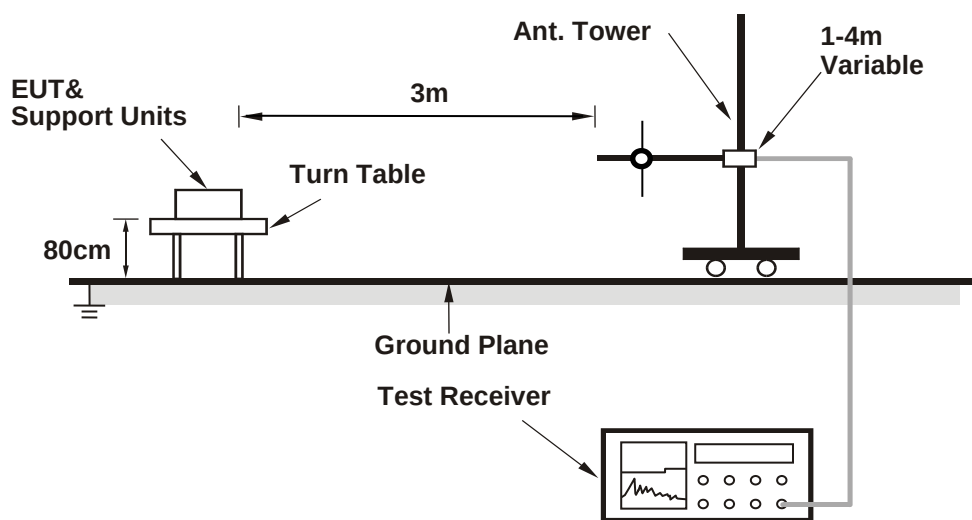

## 6.6.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.


#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.7 Unwanted Emissions above 1 GHz

### 6.7.1 Test Setup

#### For Radiated emission above 1 GHz

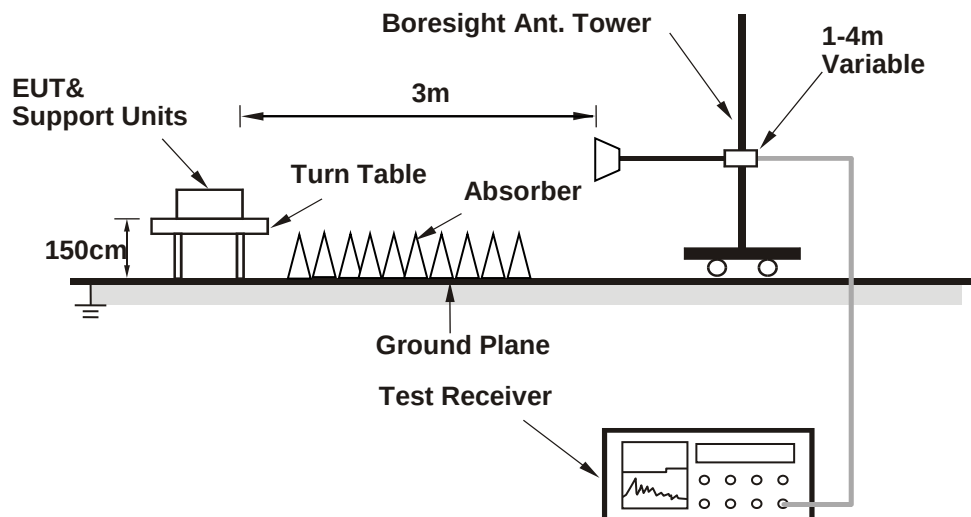

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
  - The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.



## 7 Test Results of Test Item

### 7.1 RF Output Power

|              |        |                           |                |            |           |
|--------------|--------|---------------------------|----------------|------------|-----------|
| Input Power: | 12 Vdc | Environmental Conditions: | 24 °C, 60 % RH | Tested By: | Eric Peng |
|--------------|--------|---------------------------|----------------|------------|-----------|

#### 802.11b

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Test Result |
|-------|-------------------|---------------------|---------|------------------|-------------------|-------------------|-------------|
|       |                   | Chain 0             | Chain 1 |                  |                   |                   |             |
| 1     | 2412              | 22.86               | 23.01   | 393.183          | 25.95             | 30                | Pass        |
| 6     | 2437              | 22.98               | 23.06   | 400.911          | 26.03             | 30                | Pass        |
| 11    | 2462              | 22.51               | 22.03   | 337.826          | 25.29             | 30                | Pass        |

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.33 dBi < 6 dBi, so the output power limit shall not be reduced.

#### 802.11g

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Test Result |
|-------|-------------------|---------------------|---------|------------------|-------------------|-------------------|-------------|
|       |                   | Chain 0             | Chain 1 |                  |                   |                   |             |
| 1     | 2412              | 18.03               | 17.62   | 121.343          | 20.84             | 30                | Pass        |
| 6     | 2437              | 21.04               | 20.92   | 250.652          | 23.99             | 30                | Pass        |
| 11    | 2462              | 18.22               | 18.05   | 130.201          | 21.15             | 30                | Pass        |

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.33 dBi < 6 dBi, so the output power limit shall not be reduced.

#### 802.11ax (HE20)

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Test Result |
|-------|-------------------|---------------------|---------|------------------|-------------------|-------------------|-------------|
|       |                   | Chain 0             | Chain 1 |                  |                   |                   |             |
| 1     | 2412              | 17.11               | 16.75   | 98.719           | 19.94             | 30                | Pass        |
| 6     | 2437              | 20.84               | 21.17   | 252.257          | 24.02             | 30                | Pass        |
| 11    | 2462              | 18.19               | 18.11   | 130.632          | 21.16             | 30                | Pass        |

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.33 dBi < 6 dBi, so the output power limit shall not be reduced.

## 802.11ax (HE40)

| Chan. | Chan. Freq.<br>(MHz) | Average Power (dBm) |         | Total Power<br>(mW) | Total Power<br>(dBm) | Power Limit<br>(dBm) | Test Result |
|-------|----------------------|---------------------|---------|---------------------|----------------------|----------------------|-------------|
|       |                      | Chain 0             | Chain 1 |                     |                      |                      |             |
| 3     | 2422                 | 15.50               | 15.69   | 72.549              | 18.61                | 30                   | Pass        |
| 6     | 2437                 | 18.28               | 18.18   | 133.063             | 21.24                | 30                   | Pass        |
| 9     | 2452                 | 17.30               | 17.16   | 105.703             | 20.24                | 30                   | Pass        |

### Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.33 dBi < 6 dBi, so the output power limit shall not be reduced.

## 7.2 Power Spectral Density

|              |        |                           |                |            |           |
|--------------|--------|---------------------------|----------------|------------|-----------|
| Input Power: | 12 Vdc | Environmental Conditions: | 24 °C, 60 % RH | Tested By: | Eric Peng |
|--------------|--------|---------------------------|----------------|------------|-----------|

### 802.11b

| Chan. | Chan. Freq. (MHz) | PSD (dBm/3kHz) |         | Total PSD (dBm/3kHz) | PSD Limit (dBm/3kHz) | Test Result |
|-------|-------------------|----------------|---------|----------------------|----------------------|-------------|
|       |                   | Chain 0        | Chain 1 |                      |                      |             |
| 1     | 2412              | -8.82          | -9.20   | -6.00                | 8.00                 | Pass        |
| 6     | 2437              | -8.64          | -8.99   | -5.80                | 8.00                 | Pass        |
| 11    | 2462              | -9.28          | -9.49   | -6.37                | 8.00                 | Pass        |

Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.19 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11g

| Chan. | Chan. Freq. (MHz) | PSD w/o Duty Factor (dBm/3kHz) |         | Duty Factor (dB) | Total PSD (dBm/3kHz) | PSD Limit (dBm/3kHz) | Test Result |
|-------|-------------------|--------------------------------|---------|------------------|----------------------|----------------------|-------------|
|       |                   | Chain 0                        | Chain 1 |                  |                      |                      |             |
| 1     | 2412              | -14.38                         | -14.18  | 0.14             | -11.13               | 8.00                 | Pass        |
| 6     | 2437              | -10.85                         | -11.24  | 0.14             | -7.89                | 8.00                 | Pass        |
| 11    | 2462              | -14.56                         | -14.51  | 0.14             | -11.38               | 8.00                 | Pass        |

Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.19 dBi < 6 dBi, so the power density limit shall not be reduced.
- Refer to section 3.x for duty cycle spectrum plot.

### 802.11ax (HE20)

| Chan. | Chan. Freq. (MHz) | PSD w/o Duty Factor (dBm/3kHz) |         | Duty Factor (dB) | Total PSD (dBm/3kHz) | PSD Limit (dBm/3kHz) | Test Result |
|-------|-------------------|--------------------------------|---------|------------------|----------------------|----------------------|-------------|
|       |                   | Chain 0                        | Chain 1 |                  |                      |                      |             |
| 1     | 2412              | -17.48                         | -17.80  | 0.29             | -14.34               | 8.00                 | Pass        |
| 6     | 2437              | -13.03                         | -12.79  | 0.29             | -9.61                | 8.00                 | Pass        |
| 11    | 2462              | -16.23                         | -15.92  | 0.29             | -12.77               | 8.00                 | Pass        |

Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.19 dBi < 6 dBi, so the power density limit shall not be reduced.


## 802.11ax (HE40)

| Chan. | Chan. Freq. (MHz) | PSD w/o Duty Factor (dBm/3kHz) |         | Duty Factor (dB) | Total PSD (dBm/3kHz) | PSD Limit (dBm/3kHz) | Test Result |
|-------|-------------------|--------------------------------|---------|------------------|----------------------|----------------------|-------------|
|       |                   | Chain 0                        | Chain 1 |                  |                      |                      |             |
| 3     | 2422              | -13.67                         | -11.34  | 1.09             | -8.25                | 8.00                 | Pass        |
| 6     | 2437              | -10.80                         | -10.49  | 1.09             | -6.54                | 8.00                 | Pass        |
| 9     | 2452              | -12.68                         | -10.65  | 1.09             | -7.45                | 8.00                 | Pass        |

### Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.19 dBi < 6 dBi, so the power density limit shall not be reduced.

### Spectrum Plot of Maximum Value

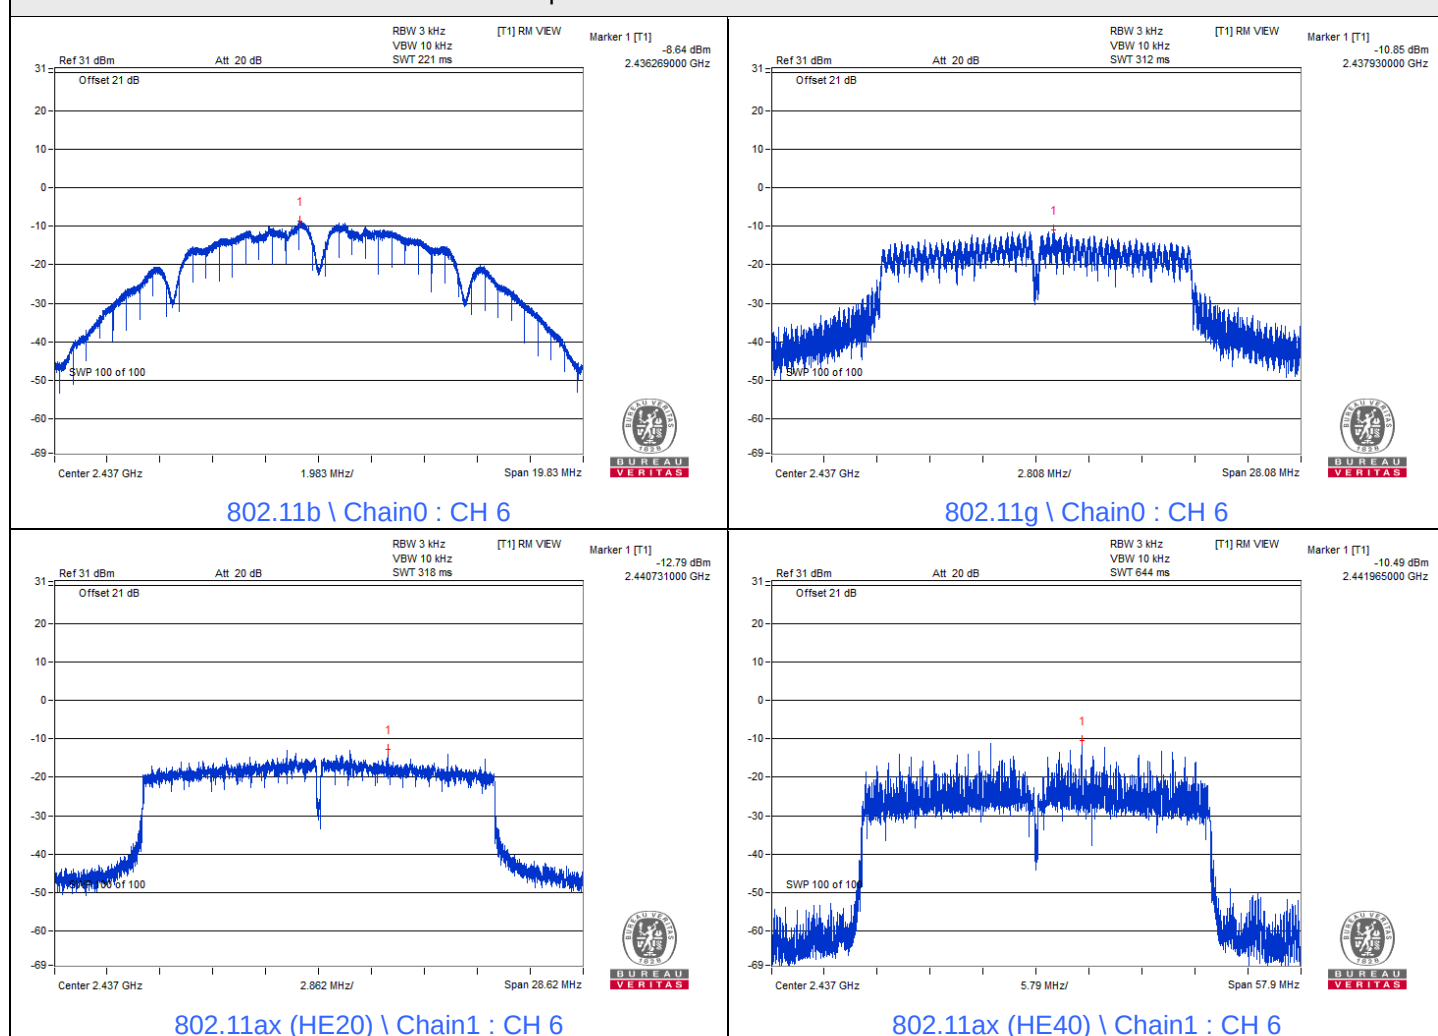

### 7.3 6 dB Bandwidth

|              |        |                           |                |            |           |
|--------------|--------|---------------------------|----------------|------------|-----------|
| Input Power: | 12 Vdc | Environmental Conditions: | 24 °C, 60 % RH | Tested By: | Eric Peng |
|--------------|--------|---------------------------|----------------|------------|-----------|

#### 802.11b

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         | Minimum Limit (MHz) | Test Result |
|---------|-----------------|---------------------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 |                     |             |
| 1       | 2412            | 8.1                 | 8.08    | 0.5                 | Pass        |
| 6       | 2437            | 8.15                | 8.15    | 0.5                 | Pass        |
| 11      | 2462            | 8.12                | 8.1     | 0.5                 | Pass        |

#### 802.11g

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         | Minimum Limit (MHz) | Test Result |
|---------|-----------------|---------------------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 |                     |             |
| 1       | 2412            | 15.19               | 15.18   | 0.5                 | Pass        |
| 6       | 2437            | 15.18               | 16.34   | 0.5                 | Pass        |
| 11      | 2462            | 15.85               | 15.99   | 0.5                 | Pass        |





#### 802.11ax (HE20)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         | Minimum Limit (MHz) | Test Result |
|---------|-----------------|---------------------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 |                     |             |
| 1       | 2412            | 18.12               | 17.24   | 0.5                 | Pass        |
| 6       | 2437            | 18.68               | 18.26   | 0.5                 | Pass        |
| 11      | 2462            | 17.99               | 18.63   | 0.5                 | Pass        |

#### 802.11ax (HE40)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         | Minimum Limit (MHz) | Test Result |
|---------|-----------------|---------------------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 |                     |             |
| 3       | 2422            | 36.51               | 35.39   | 0.5                 | Pass        |
| 6       | 2437            | 35.82               | 36.38   | 0.5                 | Pass        |
| 9       | 2452            | 37.02               | 36.43   | 0.5                 | Pass        |







## Spectrum Plot of Minimum Value



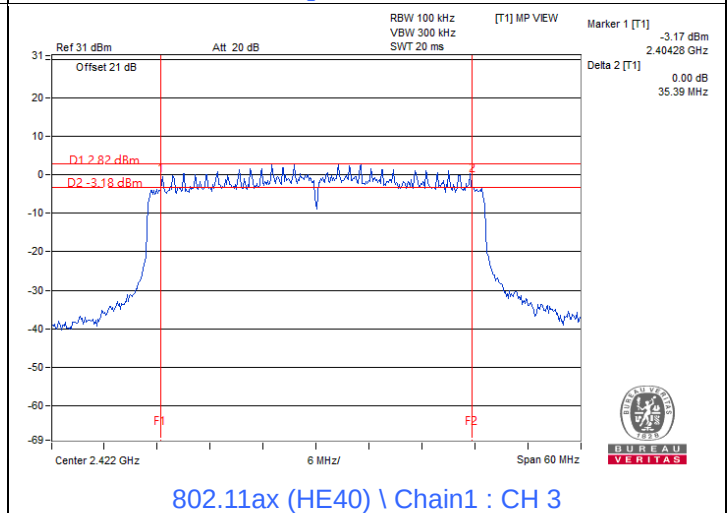
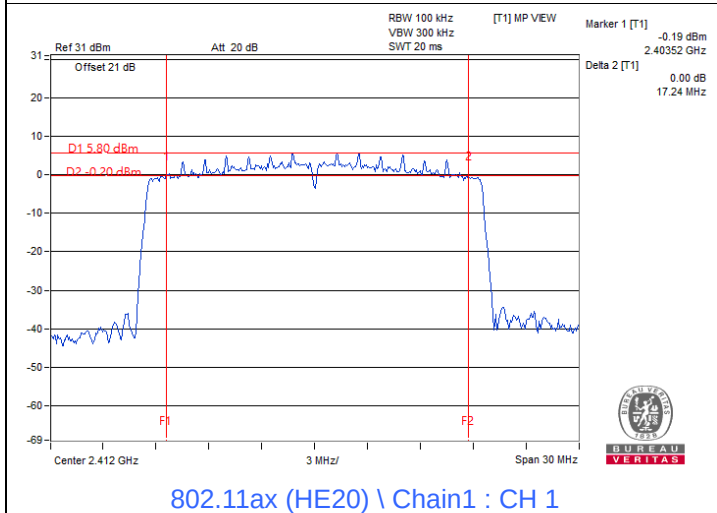
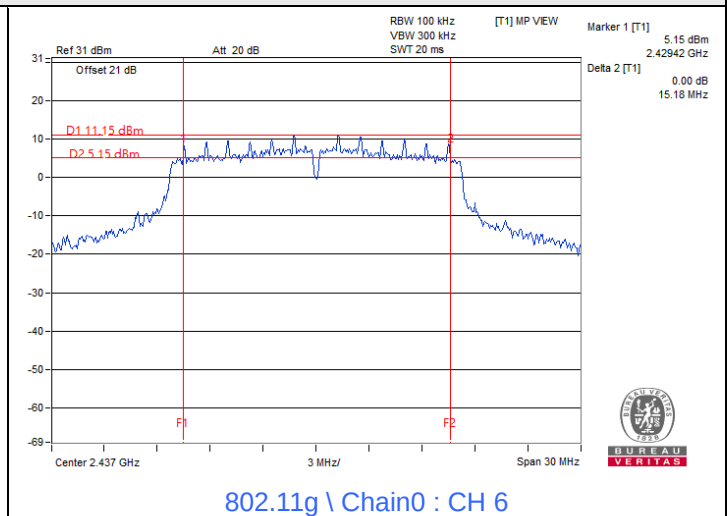
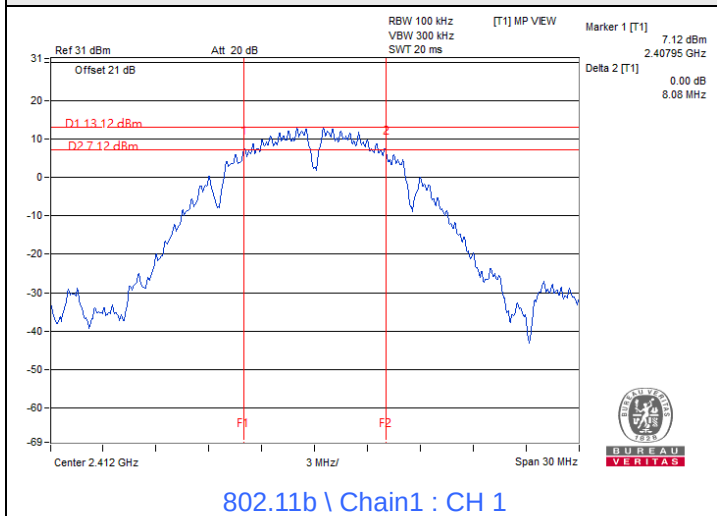


## 7.4 Conducted Out of Band Emissions

|              |        |                           |                |            |           |
|--------------|--------|---------------------------|----------------|------------|-----------|
| Input Power: | 12 Vdc | Environmental Conditions: | 24 °C, 60 % RH | Tested By: | Eric Peng |
|--------------|--------|---------------------------|----------------|------------|-----------|







802.11b

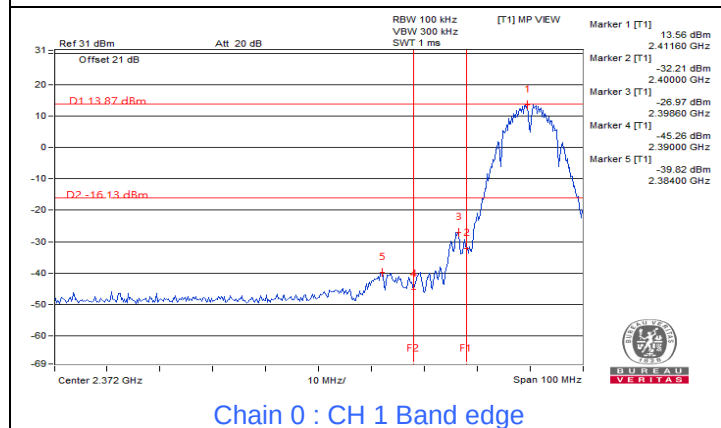

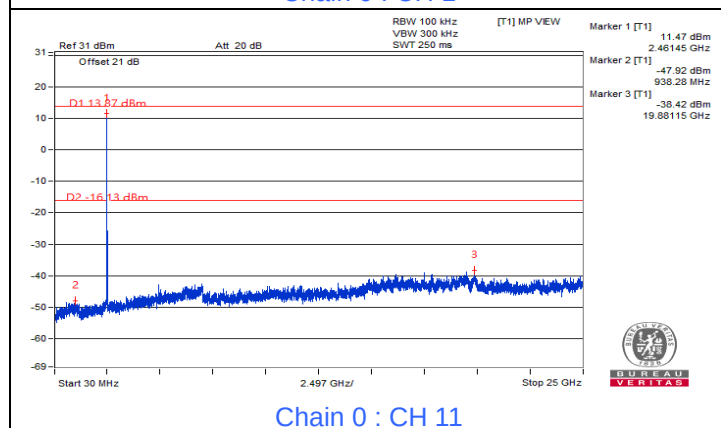
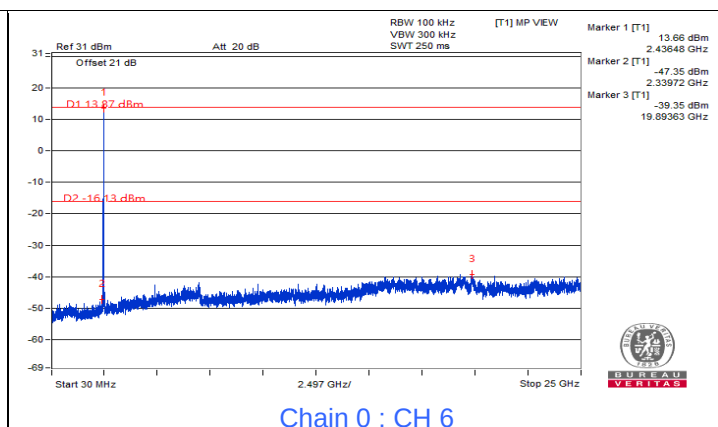
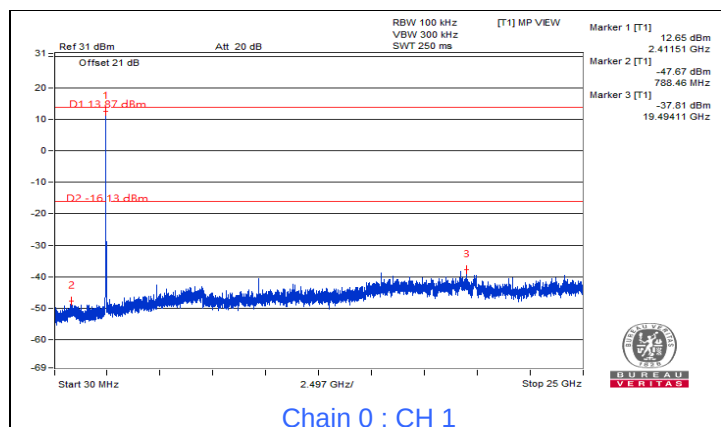
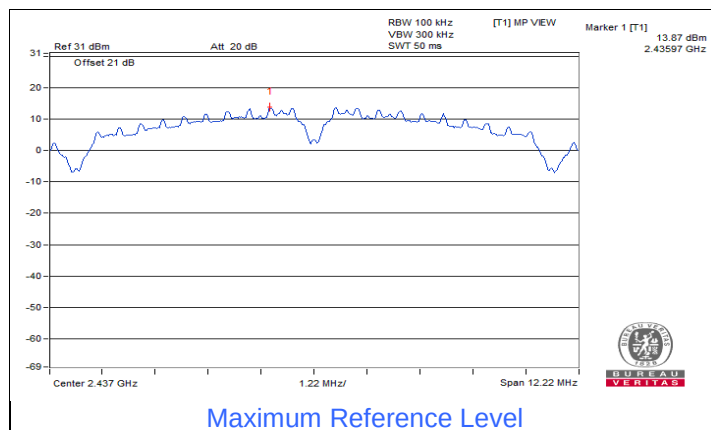


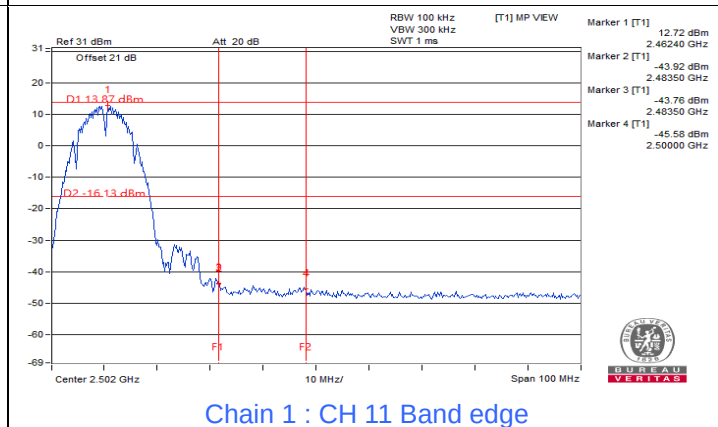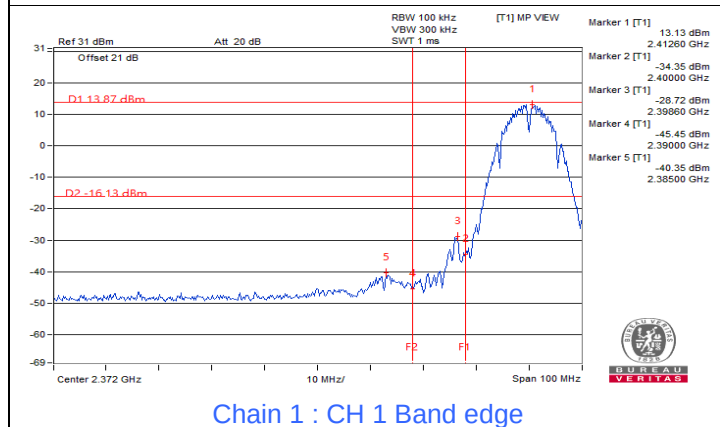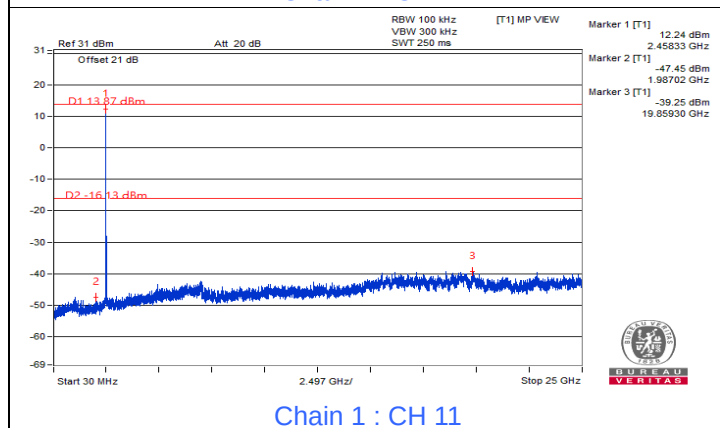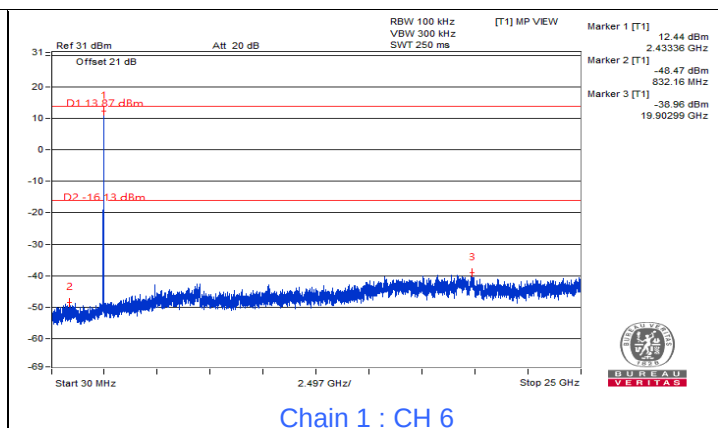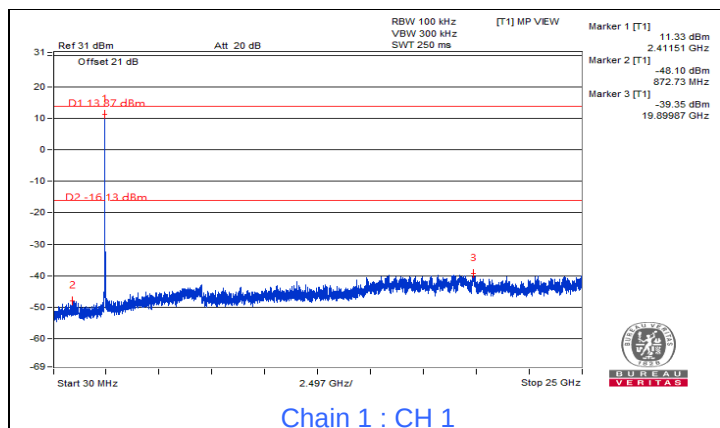















802.11g

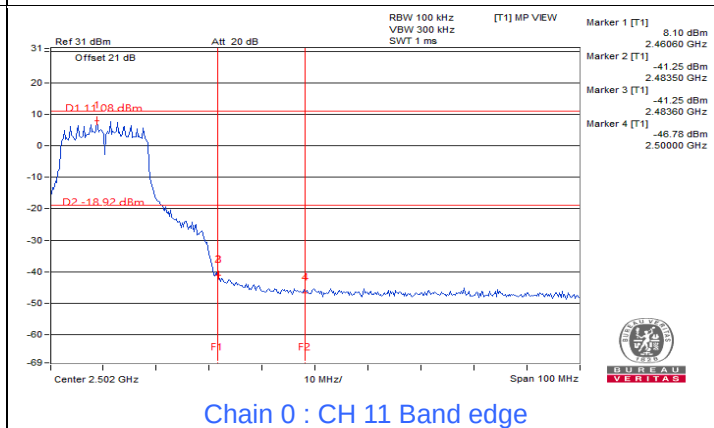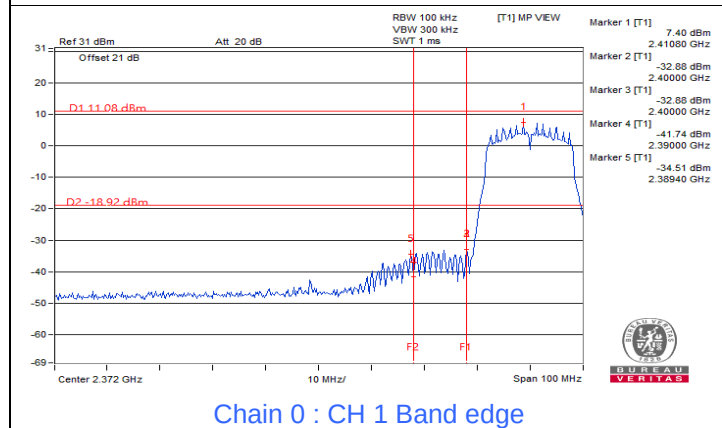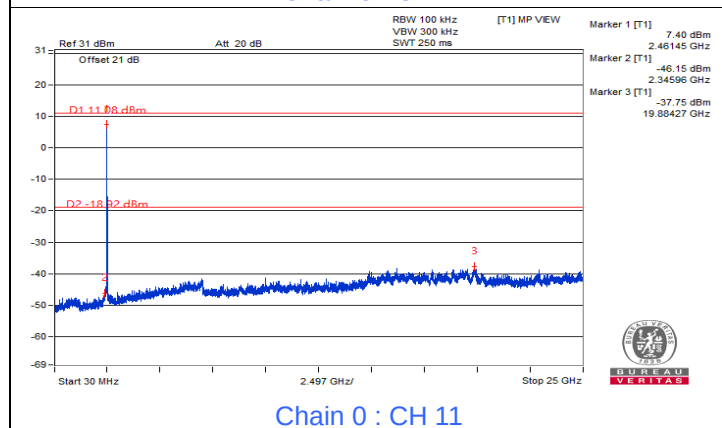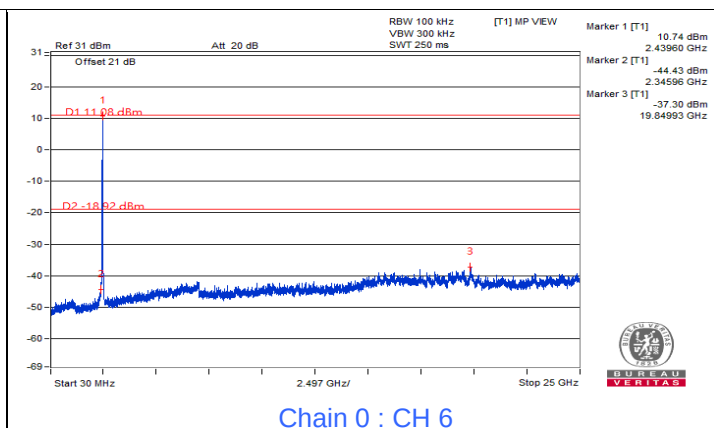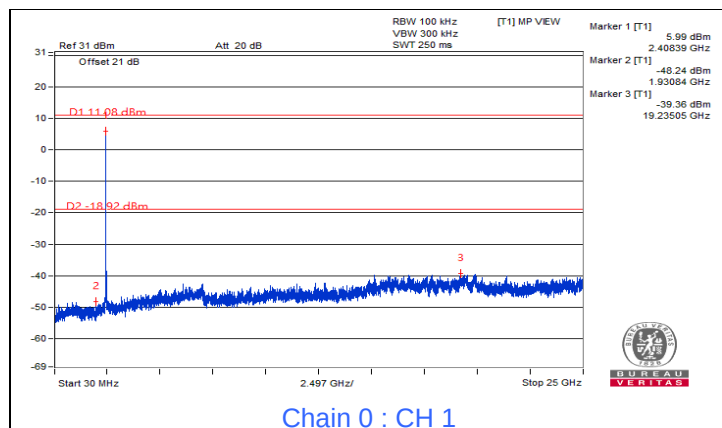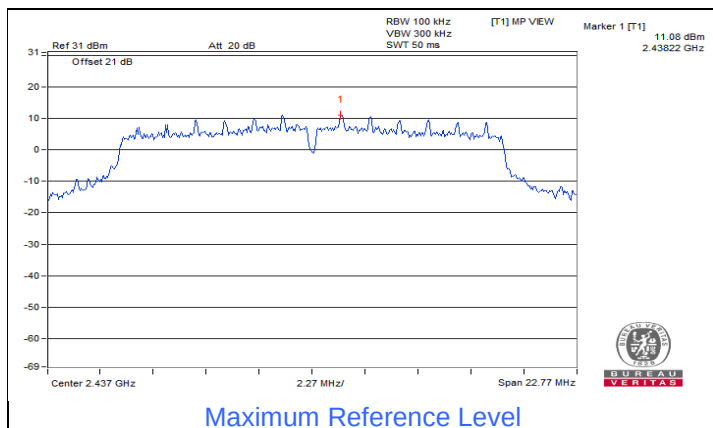

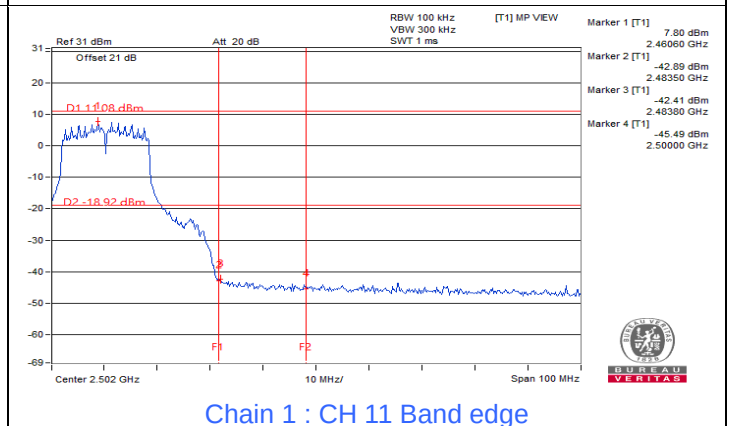
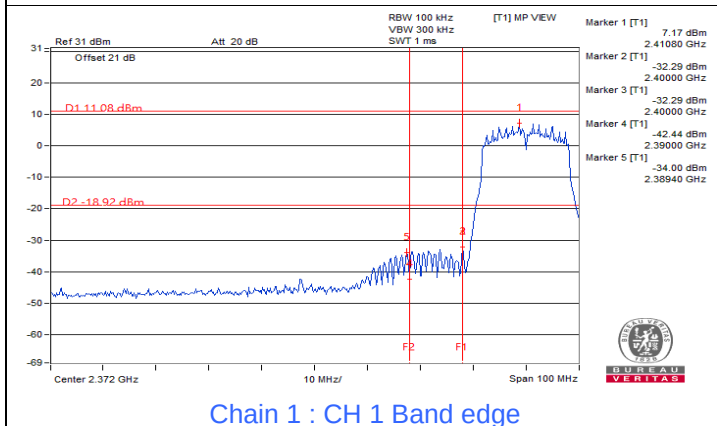

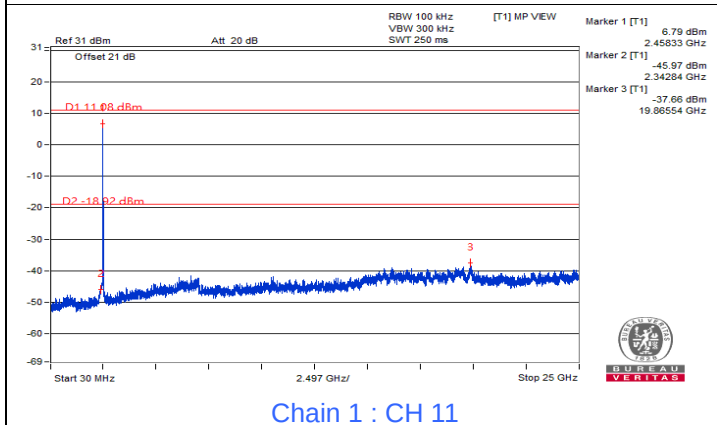
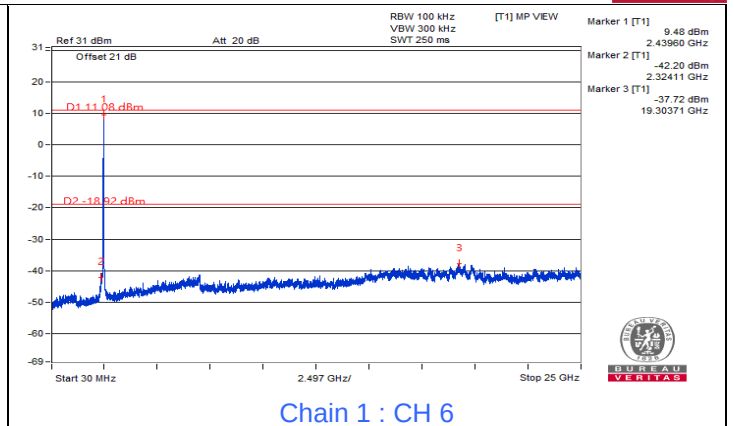
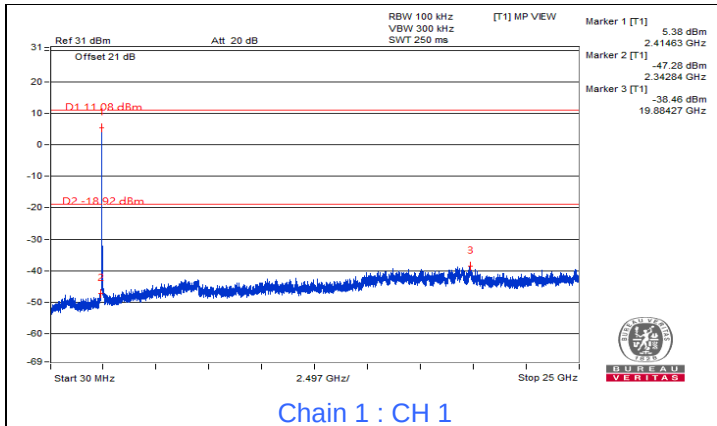







## 802.11ax (HE20)

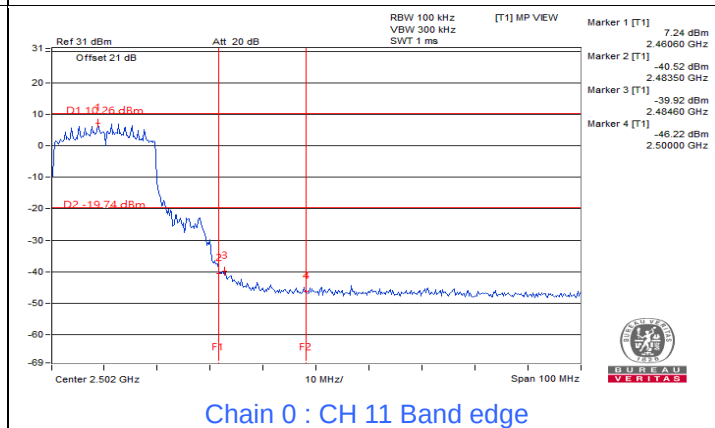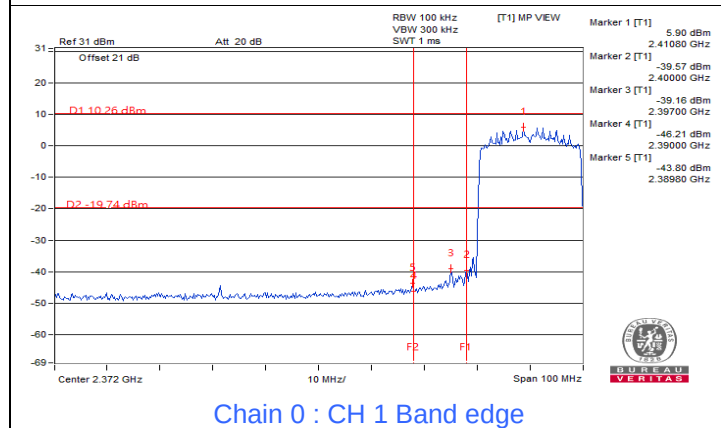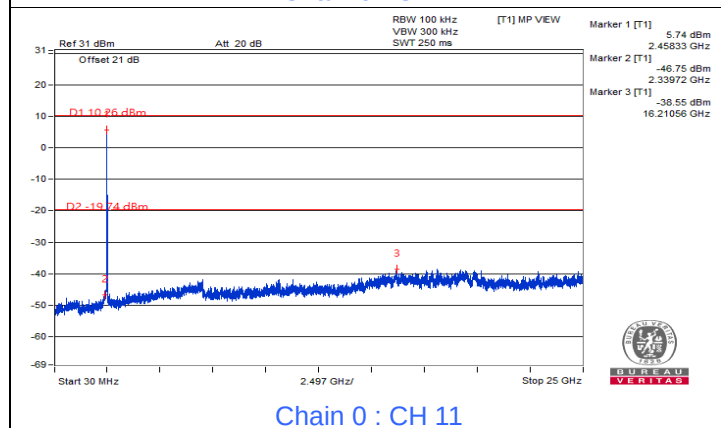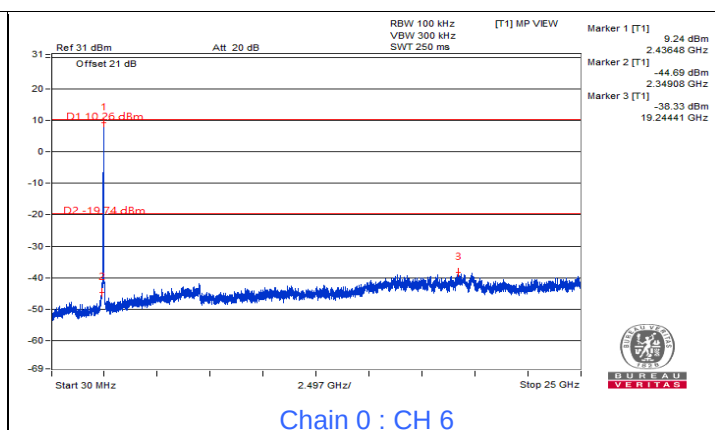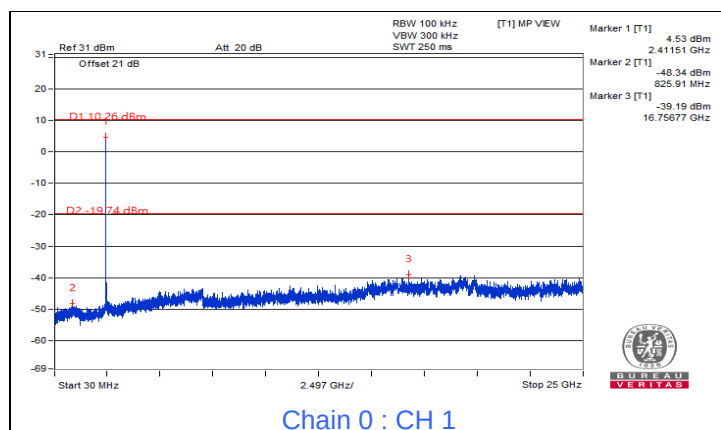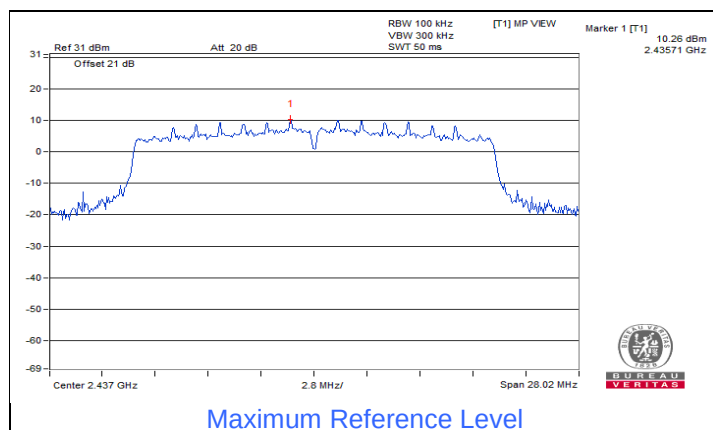

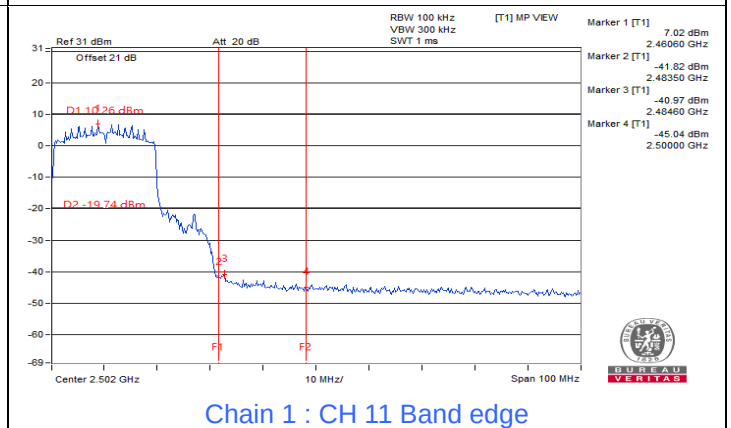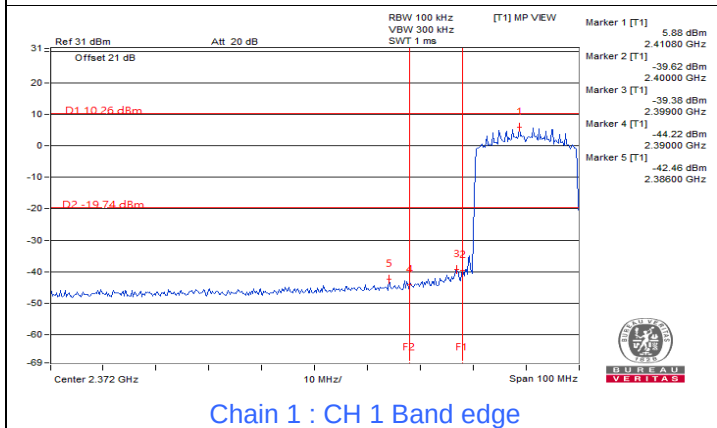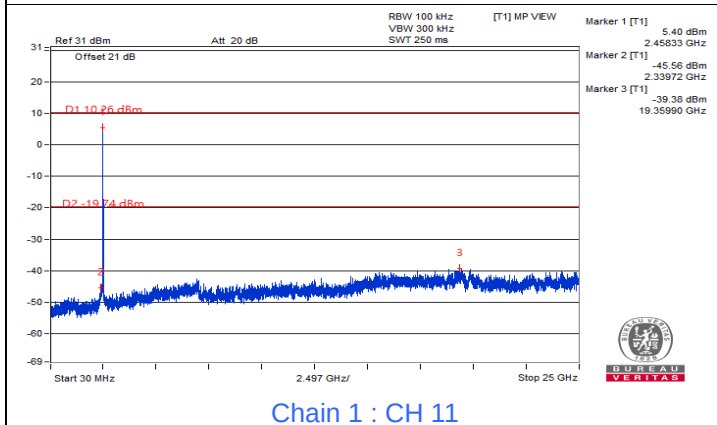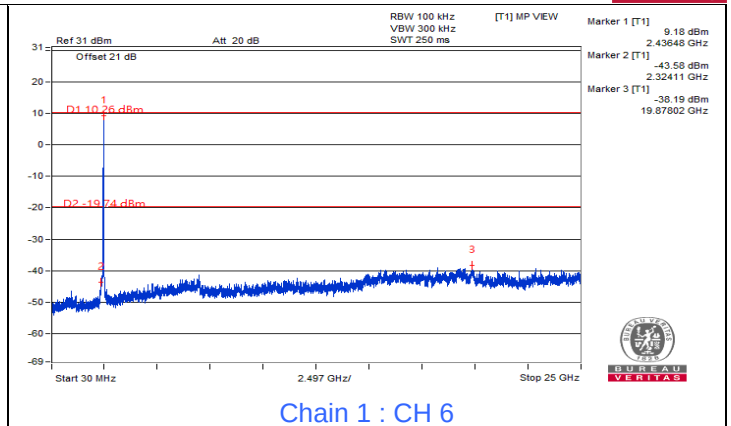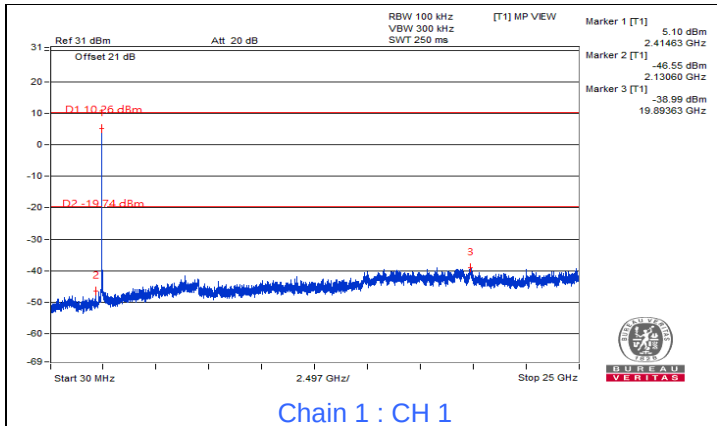

## 802.11ax (HE40)

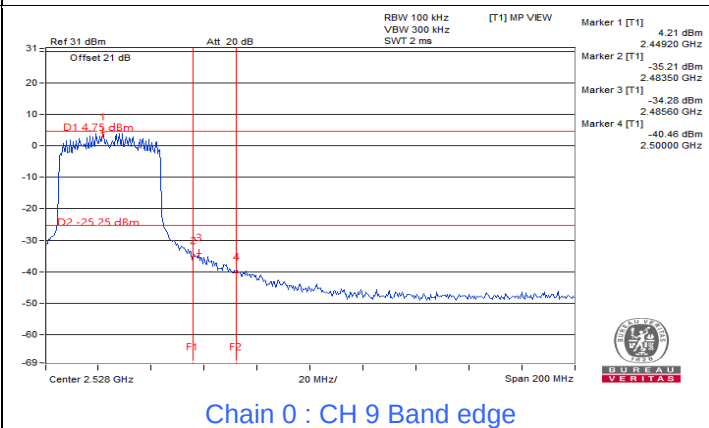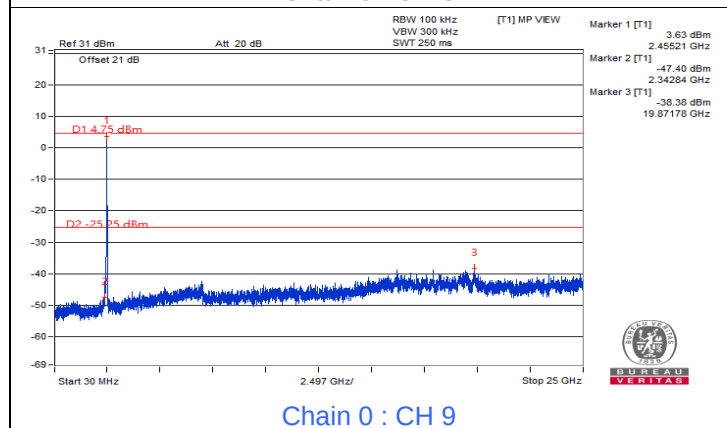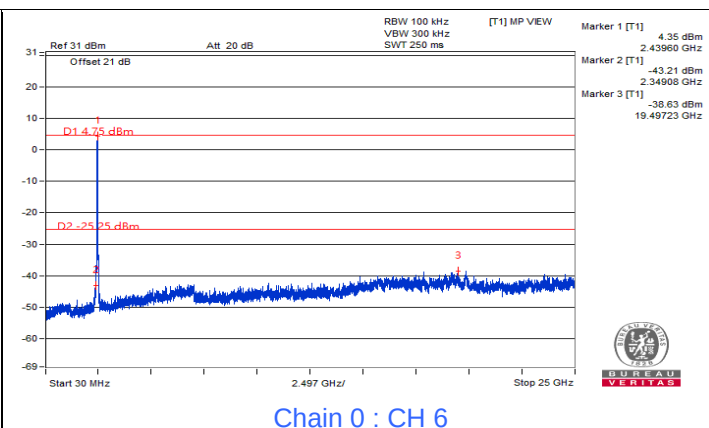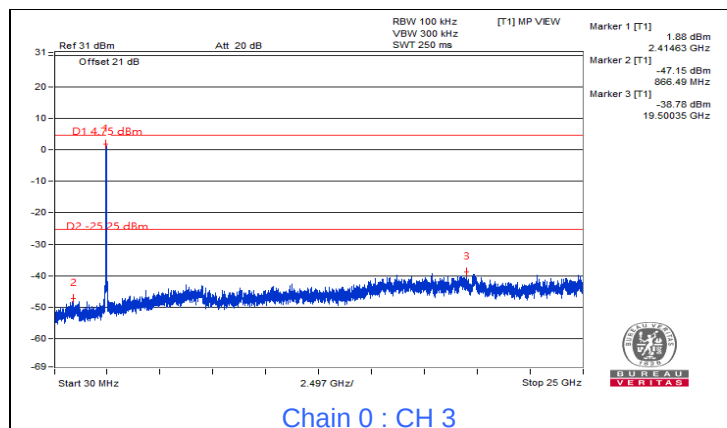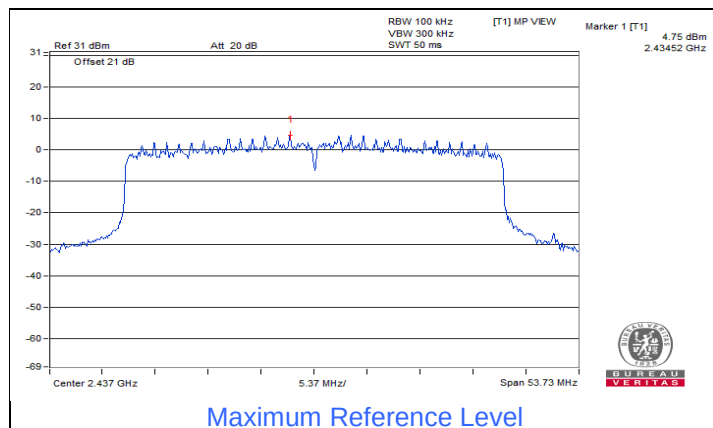

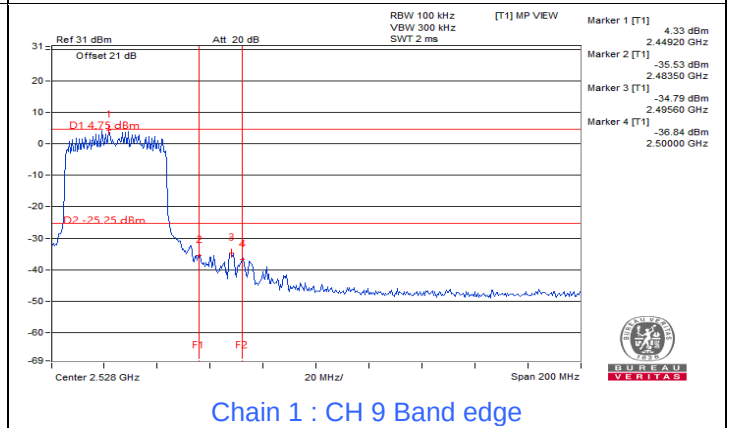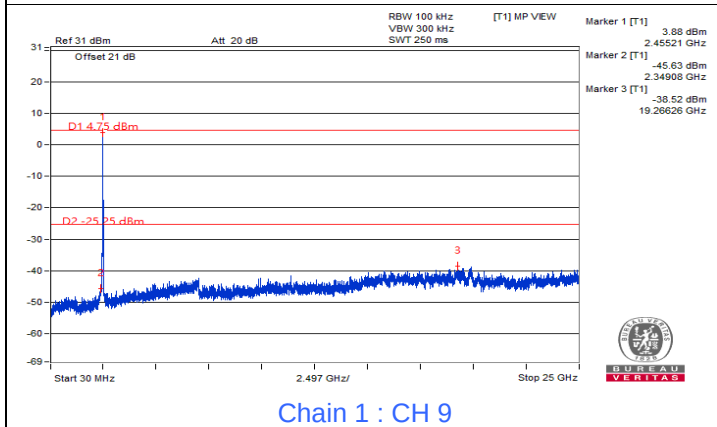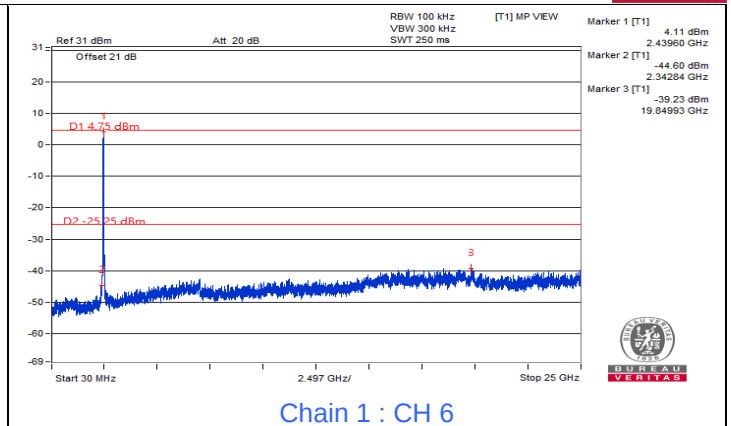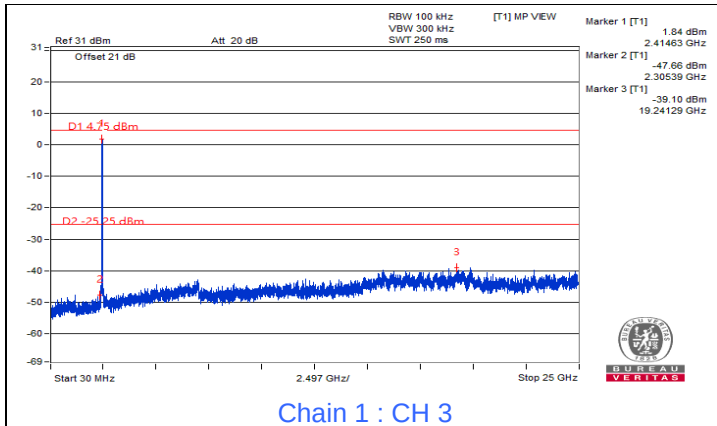


## 7.5 AC Power Conducted Emissions

|                      |                  |                                          |                                       |
|----------------------|------------------|------------------------------------------|---------------------------------------|
| RF Mode              | TX 802.11b       | Channel                                  | CH 6 : 2437 MHz                       |
| Frequency Range      | 150 kHz ~ 30 MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions                 | 25 °C, 68 % RH                        |
| Tested By            | Sampson Chen     |                                          |                                       |

| Phase Of Power : Line (L) |                 |                        |                      |       |                       |       |              |       |             |        |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                        | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                           |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                         | 0.16172         | 10.07                  | 31.40                | 16.34 | 41.47                 | 26.41 | 65.38        | 55.38 | -23.91      | -28.97 |
| 2                         | 0.36094         | 10.10                  | 35.60                | 32.01 | 45.70                 | 42.11 | 58.71        | 48.71 | -13.01      | -6.60  |
| 3                         | 0.54844         | 10.12                  | 21.84                | 17.62 | 31.96                 | 27.74 | 56.00        | 46.00 | -24.04      | -18.26 |
| 4                         | 0.98984         | 10.15                  | 21.02                | 16.67 | 31.17                 | 26.82 | 56.00        | 46.00 | -24.83      | -19.18 |
| 5                         | 1.74219         | 10.19                  | 16.24                | 12.88 | 26.43                 | 23.07 | 56.00        | 46.00 | -29.57      | -22.93 |
| 6                         | 2.97656         | 10.28                  | 13.66                | 9.69  | 23.94                 | 19.97 | 56.00        | 46.00 | -32.06      | -26.03 |

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

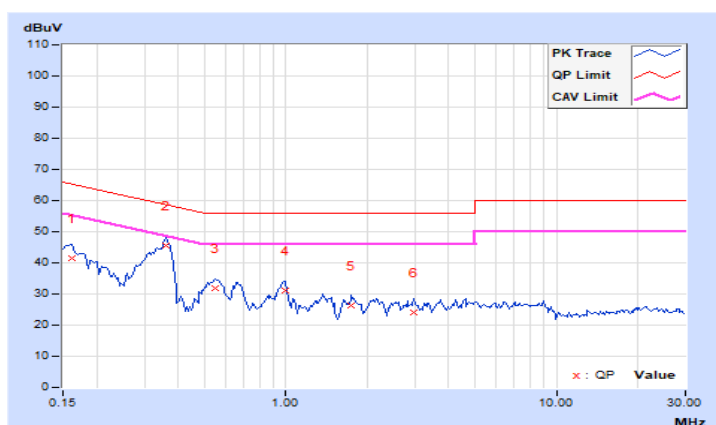


|                      |                  |                                          |                                       |
|----------------------|------------------|------------------------------------------|---------------------------------------|
| RF Mode              | TX 802.11b       | Channel                                  | CH 6 : 2437 MHz                       |
| Frequency Range      | 150 kHz ~ 30 MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions                 | 25 °C, 68 % RH                        |
| Tested By            | Sampson Chen     |                                          |                                       |

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.15391         | 10.05                  | 32.68                | 18.04 | 42.73                 | 28.09 | 65.79        | 55.79 | -23.06      | -27.70 |
| 2                            | 0.36094         | 10.10                  | 33.44                | 29.97 | 43.54                 | 40.07 | 58.71        | 48.71 | -15.17      | -8.64  |
| 3                            | 0.54844         | 10.11                  | 21.06                | 16.75 | 31.17                 | 26.86 | 56.00        | 46.00 | -24.83      | -19.14 |
| 4                            | 0.97813         | 10.14                  | 21.74                | 18.99 | 31.88                 | 29.13 | 56.00        | 46.00 | -24.12      | -16.87 |
| 5                            | 1.37891         | 10.17                  | 18.02                | 15.15 | 28.19                 | 25.32 | 56.00        | 46.00 | -27.81      | -20.68 |
| 6                            | 2.14453         | 10.23                  | 16.84                | 13.66 | 27.07                 | 23.89 | 56.00        | 46.00 | -28.93      | -22.11 |

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

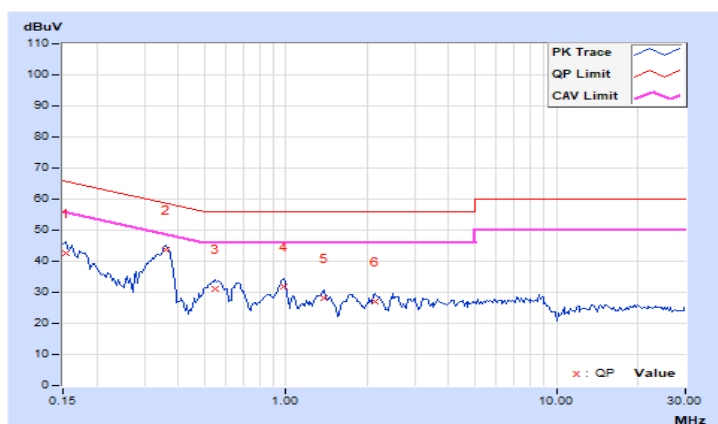




## 7.6 Unwanted Emissions below 1 GHz

|                      |                |                               |                  |
|----------------------|----------------|-------------------------------|------------------|
| RF Mode              | TX 802.11b     | Channel                       | CH 6 : 2437 MHz  |
| Frequency Range      | 9 kHz ~ 1 GHz  | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 25 °C, 66 % RH   |
| Tested By            | Sampson Chen   |                               |                  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 83.23           | 30.9 QP                 | 40.0           | -9.1        | 4.00 H             | 148                  | 44.6             | -13.7                    |
| 2                                                    | 250.02          | 30.7 QP                 | 46.0           | -15.3       | 1.00 H             | 183                  | 40.3             | -9.6                     |
| 3                                                    | 375.00          | 37.8 QP                 | 46.0           | -8.2        | 1.00 H             | 138                  | 43.7             | -5.9                     |
| 4                                                    | 625.02          | 36.4 QP                 | 46.0           | -9.6        | 1.50 H             | 45                   | 36.4             | 0.0                      |
| 5                                                    | 750.01          | 38.1 QP                 | 46.0           | -7.9        | 1.00 H             | 161                  | 35.7             | 2.4                      |
| 6                                                    | 875.02          | 42.2 QP                 | 46.0           | -3.8        | 1.00 H             | 164                  | 38.5             | 3.7                      |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

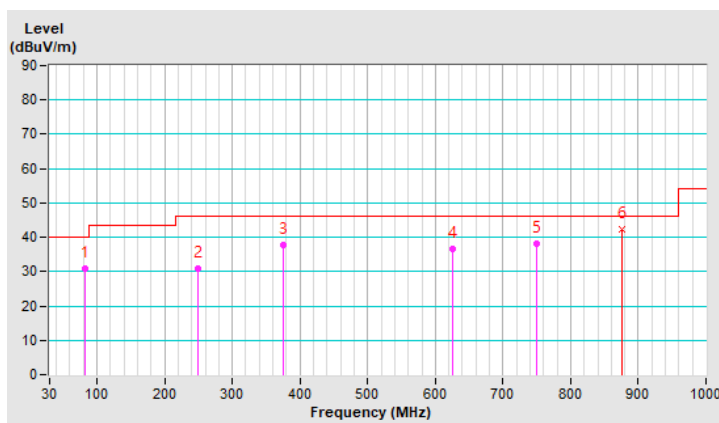


|                      |                |                               |                  |
|----------------------|----------------|-------------------------------|------------------|
| RF Mode              | TX 802.11b     | Channel                       | CH 6 : 2437 MHz  |
| Frequency Range      | 9 kHz ~ 1 GHz  | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 25 °C, 66 % RH   |
| Tested By            | Sampson Chen   |                               |                  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 46.13           | 36.9 QP                 | 40.0           | -3.1        | 1.00 V             | 167                  | 45.2             | -8.3                     |
| 2                                                  | 83.28           | 28.5 QP                 | 40.0           | -11.5       | 2.00 V             | 254                  | 42.2             | -13.7                    |
| 3                                                  | 125.01          | 25.3 QP                 | 43.5           | -18.2       | 1.00 V             | 250                  | 34.9             | -9.6                     |
| 4                                                  | 375.00          | 38.8 QP                 | 46.0           | -7.2        | 1.50 V             | 163                  | 44.7             | -5.9                     |
| 5                                                  | 625.02          | 37.4 QP                 | 46.0           | -8.6        | 1.00 V             | 360                  | 37.4             | 0.0                      |
| 6                                                  | 874.99          | 41.0 QP                 | 46.0           | -5.0        | 1.00 V             | 302                  | 37.3             | 3.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

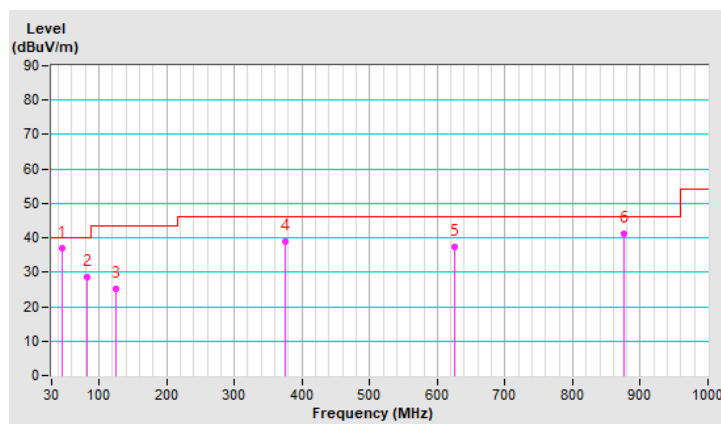


## 7.7 Unwanted Emissions above 1 GHz

|                             |                |                                          |                                                            |
|-----------------------------|----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11b     | <b>Channel</b>                           | CH 1 : 2412 MHz                                            |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng    |                                          |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2385.30         | 58.8 PK                 | 74.0           | -15.2       | 1.46 H             | 176                  | 59.8             | -1.0                     |
| 2                                                    | 2385.30         | 47.6 AV                 | 54.0           | -6.4        | 1.46 H             | 176                  | 48.6             | -1.0                     |
| 3                                                    | *2412.00        | 102.6 PK                |                |             | 1.46 H             | 176                  | 103.7            | -1.1                     |
| 4                                                    | *2412.00        | 100.7 AV                |                |             | 1.46 H             | 176                  | 101.8            | -1.1                     |
| 5                                                    | 4824.00         | 49.4 PK                 | 74.0           | -24.6       | 1.92 H             | 175                  | 45.7             | 3.7                      |
| 6                                                    | 4824.00         | 46.6 AV                 | 54.0           | -7.4        | 1.92 H             | 175                  | 42.9             | 3.7                      |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

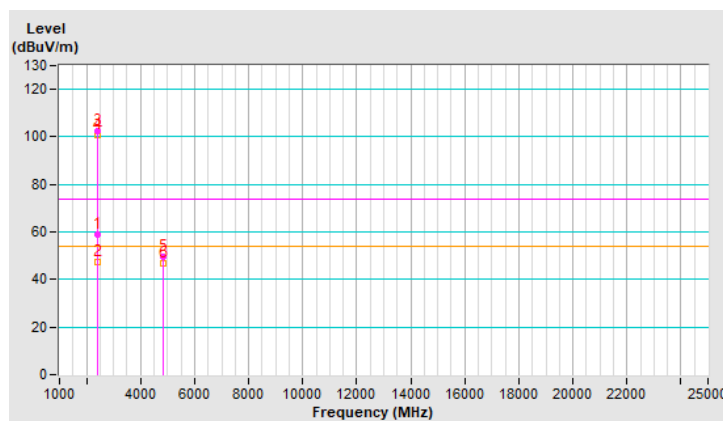


|                             |                |                                          |                                                            |
|-----------------------------|----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11b     | <b>Channel</b>                           | CH 1 : 2412 MHz                                            |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng    |                                          |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2385.30         | 60.4 PK                 | 74.0           | -13.6       | 1.18 V             | 163                  | 61.4             | -1.0                     |
| 2                                                  | 2385.30         | 53.3 AV                 | 54.0           | -0.7        | 1.18 V             | 163                  | 54.3             | -1.0                     |
| 3                                                  | *2412.00        | 114.8 PK                |                |             | 1.18 V             | 163                  | 115.9            | -1.1                     |
| 4                                                  | *2412.00        | 112.2 AV                |                |             | 1.18 V             | 163                  | 113.3            | -1.1                     |
| 5                                                  | 4824.00         | 54.8 PK                 | 74.0           | -19.2       | 3.72 V             | 123                  | 51.1             | 3.7                      |
| 6                                                  | 4824.00         | 53.4 AV                 | 54.0           | -0.6        | 3.72 V             | 123                  | 49.7             | 3.7                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

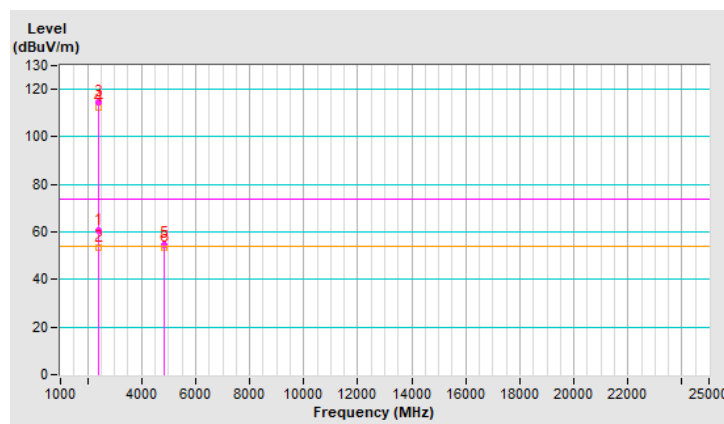


|                      |                |                               |                                                            |
|----------------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode              | TX 802.11b     | Channel                       | CH 6 : 2437 MHz                                            |
| Frequency Range      | 1 GHz ~ 25 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 25 °C, 75 % RH                                             |
| Tested By            | Nelson Teng    |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2390.00         | 57.2 PK                 | 74.0           | -16.8       | 1.17 H             | 6                    | 58.2             | -1.0                     |
| 2                                                    | 2390.00         | 45.3 AV                 | 54.0           | -8.7        | 1.17 H             | 6                    | 46.3             | -1.0                     |
| 3                                                    | *2437.00        | 103.1 PK                |                |             | 1.17 H             | 6                    | 104.2            | -1.1                     |
| 4                                                    | *2437.00        | 101.2 AV                |                |             | 1.17 H             | 6                    | 102.3            | -1.1                     |
| 5                                                    | 2483.50         | 57.0 PK                 | 74.0           | -17.0       | 1.17 H             | 6                    | 58.3             | -1.3                     |
| 6                                                    | 2483.50         | 44.1 AV                 | 54.0           | -9.9        | 1.17 H             | 6                    | 45.4             | -1.3                     |
| 7                                                    | 4874.00         | 49.7 PK                 | 74.0           | -24.3       | 1.91 H             | 198                  | 46.0             | 3.7                      |
| 8                                                    | 4874.00         | 47.1 AV                 | 54.0           | -6.9        | 1.91 H             | 198                  | 43.4             | 3.7                      |
| 9                                                    | 7311.00         | 48.1 PK                 | 74.0           | -25.9       | 1.79 H             | 38                   | 38.4             | 9.7                      |
| 10                                                   | 7311.00         | 39.0 AV                 | 54.0           | -15.0       | 1.79 H             | 38                   | 29.3             | 9.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

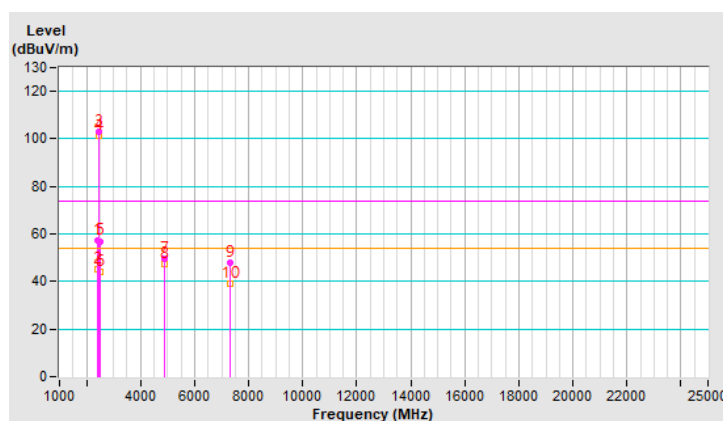


|                             |                |                                          |                                                            |
|-----------------------------|----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11b     | <b>Channel</b>                           | CH 6 : 2437 MHz                                            |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng    |                                          |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2390.00         | 57.9 PK                 | 74.0           | -16.1       | 1.72 V             | 193                  | 58.9             | -1.0                     |
| 2                                                  | 2390.00         | 45.0 AV                 | 54.0           | -9.0        | 1.72 V             | 193                  | 46.0             | -1.0                     |
| 3                                                  | *2437.00        | 115.1 PK                |                |             | 1.72 V             | 193                  | 116.2            | -1.1                     |
| 4                                                  | *2437.00        | 112.9 AV                |                |             | 1.72 V             | 193                  | 114.0            | -1.1                     |
| 5                                                  | 2483.50         | 56.8 PK                 | 74.0           | -17.2       | 1.72 V             | 193                  | 58.1             | -1.3                     |
| 6                                                  | 2483.50         | 44.4 AV                 | 54.0           | -9.6        | 1.72 V             | 193                  | 45.7             | -1.3                     |
| 7                                                  | 4874.00         | 55.4 PK                 | 74.0           | -18.6       | 3.96 V             | 110                  | 51.7             | 3.7                      |
| 8                                                  | 4874.00         | 53.6 AV                 | 54.0           | -0.4        | 3.96 V             | 110                  | 49.9             | 3.7                      |
| 9                                                  | 7311.00         | 50.9 PK                 | 74.0           | -23.1       | 2.64 V             | 360                  | 41.2             | 9.7                      |
| 10                                                 | 7311.00         | 44.6 AV                 | 54.0           | -9.4        | 2.64 V             | 360                  | 34.9             | 9.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

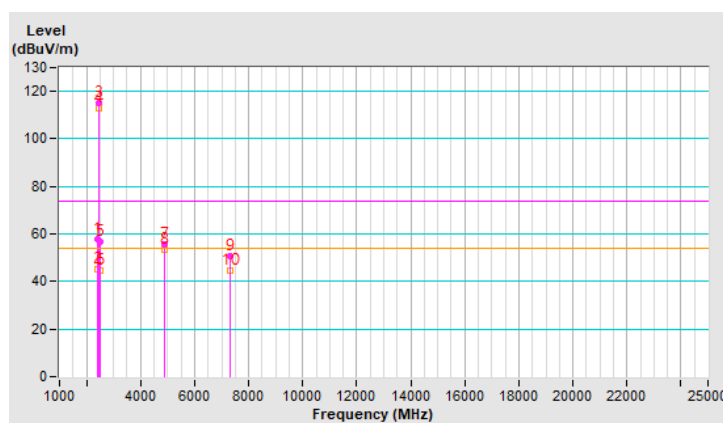


|                             |                |                                          |                                                            |
|-----------------------------|----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11b     | <b>Channel</b>                           | CH 11 : 2462 MHz                                           |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng    |                                          |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2462.00        | 103.0 PK                |                |             | 1.18 H             | 4                    | 104.2            | -1.2                     |
| 2                                                    | *2462.00        | 100.8 AV                |                |             | 1.18 H             | 4                    | 102.0            | -1.2                     |
| 3                                                    | 2483.50         | 58.5 PK                 | 74.0           | -15.5       | 1.18 H             | 4                    | 59.8             | -1.3                     |
| 4                                                    | 2483.50         | 47.4 AV                 | 54.0           | -6.6        | 1.18 H             | 4                    | 48.7             | -1.3                     |
| 5                                                    | 4924.00         | 49.3 PK                 | 74.0           | -24.7       | 1.88 H             | 185                  | 45.5             | 3.8                      |
| 6                                                    | 4924.00         | 46.7 AV                 | 54.0           | -7.3        | 1.88 H             | 185                  | 42.9             | 3.8                      |
| 7                                                    | 7386.00         | 48.7 PK                 | 74.0           | -25.3       | 1.81 H             | 38                   | 38.8             | 9.9                      |
| 8                                                    | 7386.00         | 39.2 AV                 | 54.0           | -14.8       | 1.81 H             | 38                   | 29.3             | 9.9                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

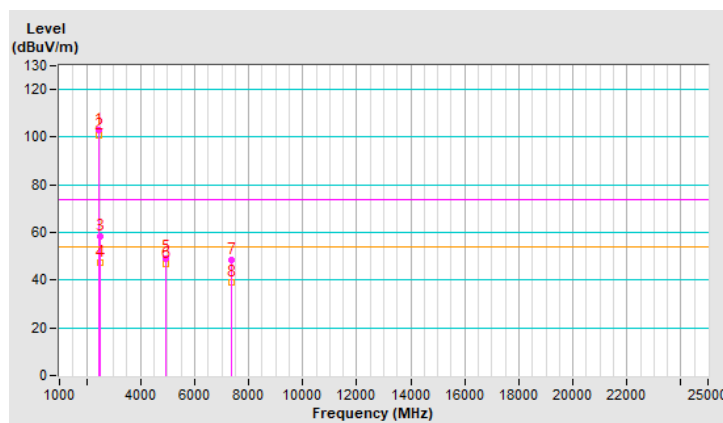


|                      |                |                               |                                                            |
|----------------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode              | TX 802.11b     | Channel                       | CH 11 : 2462 MHz                                           |
| Frequency Range      | 1 GHz ~ 25 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 10 Hz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 25 °C, 75 % RH                                             |
| Tested By            | Nelson Teng    |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *2462.00        | 115.2 PK                |                |             | 1.43 V             | 338                  | 116.4            | -1.2                     |
| 2                                                  | *2462.00        | 112.8 AV                |                |             | 1.43 V             | 338                  | 114.0            | -1.2                     |
| 3                                                  | 2483.50         | 60.3 PK                 | 74.0           | -13.7       | 1.43 V             | 338                  | 61.6             | -1.3                     |
| 4                                                  | 2483.50         | 52.6 AV                 | 54.0           | -1.4        | 1.43 V             | 338                  | 53.9             | -1.3                     |
| 5                                                  | 4924.00         | 50.4 PK                 | 74.0           | -23.6       | 3.80 V             | 99                   | 46.6             | 3.8                      |
| 6                                                  | 4924.00         | 48.1 AV                 | 54.0           | -5.9        | 3.80 V             | 99                   | 44.3             | 3.8                      |
| 7                                                  | 7386.00         | 56.4 PK                 | 74.0           | -17.6       | 3.53 V             | 109                  | 46.5             | 9.9                      |
| 8                                                  | 7386.00         | 53.7 AV                 | 54.0           | -0.3        | 3.53 V             | 109                  | 43.8             | 9.9                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

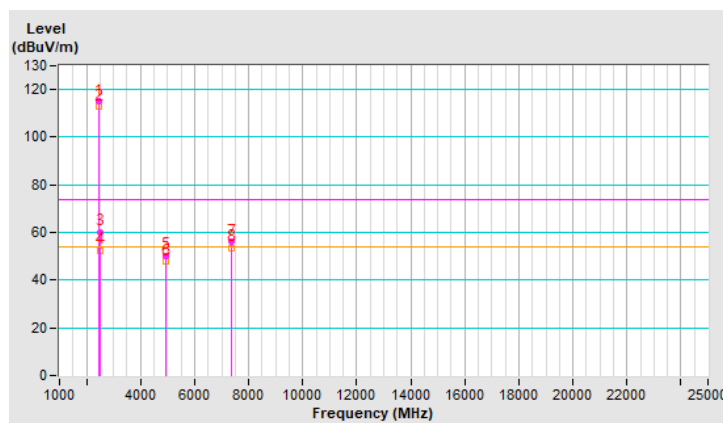




|                      |                |                               |                                                            |
|----------------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode              | TX 802.11g     | Channel                       | CH 1 : 2412 MHz                                            |
| Frequency Range      | 1 GHz ~ 25 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 1 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 25 °C, 75 % RH                                             |
| Tested By            | Nelson Teng    |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2388.24         | 64.0 PK                 | 74.0           | -10.0       | 2.07 H             | 2                    | 65.0             | -1.0                     |
| 2                                                    | 2388.24         | 48.1 AV                 | 54.0           | -5.9        | 2.07 H             | 2                    | 49.1             | -1.0                     |
| 3                                                    | *2412.00        | 103.3 PK                |                |             | 2.07 H             | 2                    | 104.4            | -1.1                     |
| 4                                                    | *2412.00        | 95.9 AV                 |                |             | 2.07 H             | 2                    | 97.0             | -1.1                     |
| 5                                                    | 4824.00         | 42.3 PK                 | 74.0           | -31.7       | 1.95 H             | 168                  | 38.6             | 3.7                      |
| 6                                                    | 4824.00         | 31.6 AV                 | 54.0           | -22.4       | 1.95 H             | 168                  | 27.9             | 3.7                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

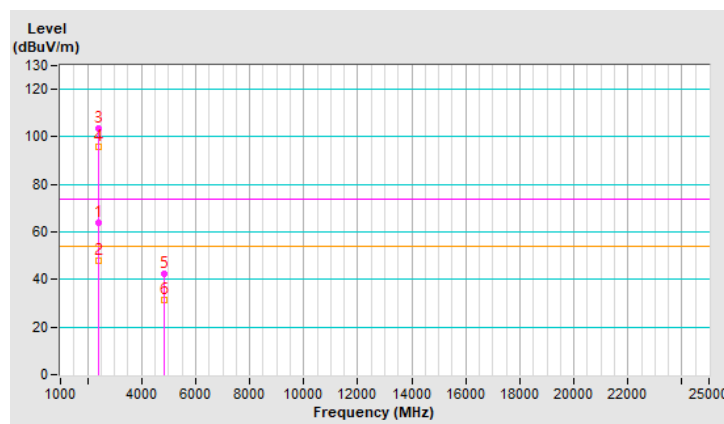


|                             |                |                                          |                                                            |
|-----------------------------|----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11g     | <b>Channel</b>                           | CH 1 : 2412 MHz                                            |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 1 kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng    |                                          |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2388.24         | 73.8 PK                 | 74.0           | -0.2        | 1.79 V             | 132                  | 74.8             | -1.0                     |
| 2                                                  | 2388.24         | 49.0 AV                 | 54.0           | -5.0        | 1.79 V             | 132                  | 50.0             | -1.0                     |
| 3                                                  | *2412.00        | 111.5 PK                |                |             | 1.79 V             | 132                  | 112.6            | -1.1                     |
| 4                                                  | *2412.00        | 102.9 AV                |                |             | 1.79 V             | 132                  | 104.0            | -1.1                     |
| 5                                                  | 4824.00         | 42.4 PK                 | 74.0           | -31.6       | 3.73 V             | 114                  | 38.7             | 3.7                      |
| 6                                                  | 4824.00         | 31.8 AV                 | 54.0           | -22.2       | 3.73 V             | 114                  | 28.1             | 3.7                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

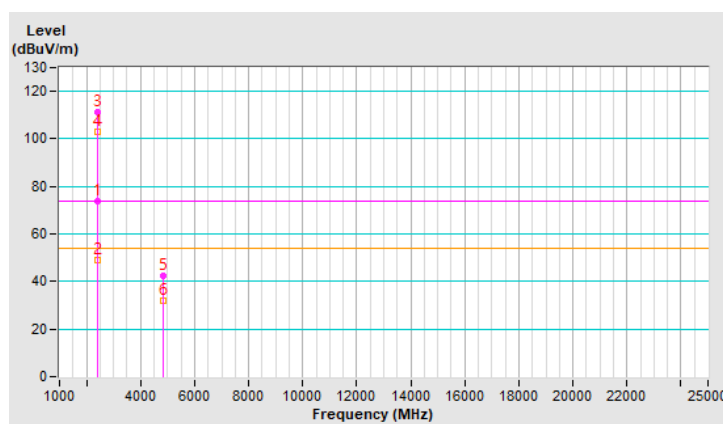


|                      |                |                               |                                                            |
|----------------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode              | TX 802.11g     | Channel                       | CH 6 : 2437 MHz                                            |
| Frequency Range      | 1 GHz ~ 25 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 1 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 25 °C, 75 % RH                                             |
| Tested By            | Nelson Teng    |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2390.00         | 62.5 PK                 | 74.0           | -11.5       | 2.02 H             | 4                    | 63.5             | -1.0                     |
| 2                                                    | 2390.00         | 50.3 AV                 | 54.0           | -3.7        | 2.02 H             | 4                    | 51.3             | -1.0                     |
| 3                                                    | *2437.00        | 107.8 PK                |                |             | 2.02 H             | 4                    | 108.9            | -1.1                     |
| 4                                                    | *2437.00        | 100.2 AV                |                |             | 2.02 H             | 4                    | 101.3            | -1.1                     |
| 5                                                    | 2483.50         | 61.9 PK                 | 74.0           | -12.1       | 2.02 H             | 4                    | 63.2             | -1.3                     |
| 6                                                    | 2483.50         | 48.6 AV                 | 54.0           | -5.4        | 2.02 H             | 4                    | 49.9             | -1.3                     |
| 7                                                    | 4874.00         | 46.3 PK                 | 74.0           | -27.7       | 1.89 H             | 210                  | 42.6             | 3.7                      |
| 8                                                    | 4874.00         | 34.1 AV                 | 54.0           | -19.9       | 1.89 H             | 210                  | 30.4             | 3.7                      |
| 9                                                    | 7311.00         | 56.4 PK                 | 74.0           | -17.6       | 1.75 H             | 52                   | 46.7             | 9.7                      |
| 10                                                   | 7311.00         | 43.2 AV                 | 54.0           | -10.8       | 1.75 H             | 52                   | 33.5             | 9.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

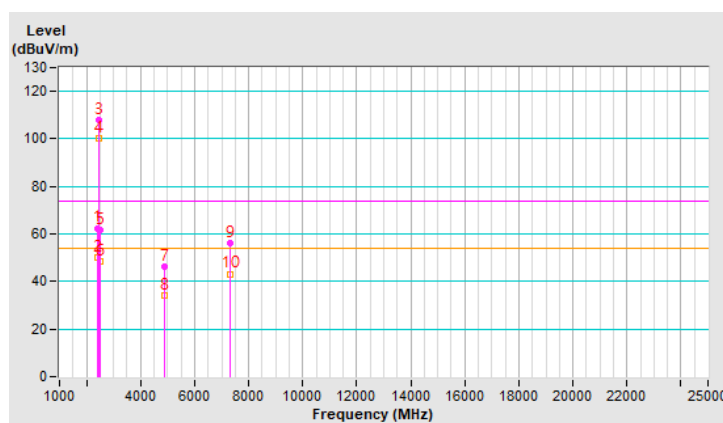


|                      |                |                               |                                                            |
|----------------------|----------------|-------------------------------|------------------------------------------------------------|
| RF Mode              | TX 802.11g     | Channel                       | CH 6 : 2437 MHz                                            |
| Frequency Range      | 1 GHz ~ 25 GHz | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 1 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 25 °C, 75 % RH                                             |
| Tested By            | Nelson Teng    |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2390.00         | 65.6 PK                 | 74.0           | -8.4        | 1.78 V             | 129                  | 66.6             | -1.0                     |
| 2                                                  | 2390.00         | 53.6 AV                 | 54.0           | -0.4        | 1.78 V             | 129                  | 54.6             | -1.0                     |
| 3                                                  | *2437.00        | 115.6 PK                |                |             | 1.78 V             | 129                  | 116.7            | -1.1                     |
| 4                                                  | *2437.00        | 106.5 AV                |                |             | 1.78 V             | 129                  | 107.6            | -1.1                     |
| 5                                                  | 2483.50         | 63.5 PK                 | 74.0           | -10.5       | 1.78 V             | 129                  | 64.8             | -1.3                     |
| 6                                                  | 2483.50         | 51.0 AV                 | 54.0           | -3.0        | 1.78 V             | 129                  | 52.3             | -1.3                     |
| 7                                                  | 4874.00         | 48.7 PK                 | 74.0           | -25.3       | 3.99 V             | 12                   | 45.0             | 3.7                      |
| 8                                                  | 4874.00         | 35.5 AV                 | 54.0           | -18.5       | 3.99 V             | 12                   | 31.8             | 3.7                      |
| 9                                                  | 7311.00         | 58.5 PK                 | 74.0           | -15.5       | 3.48 V             | 101                  | 48.8             | 9.7                      |
| 10                                                 | 7311.00         | 45.8 AV                 | 54.0           | -8.2        | 3.48 V             | 101                  | 36.1             | 9.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

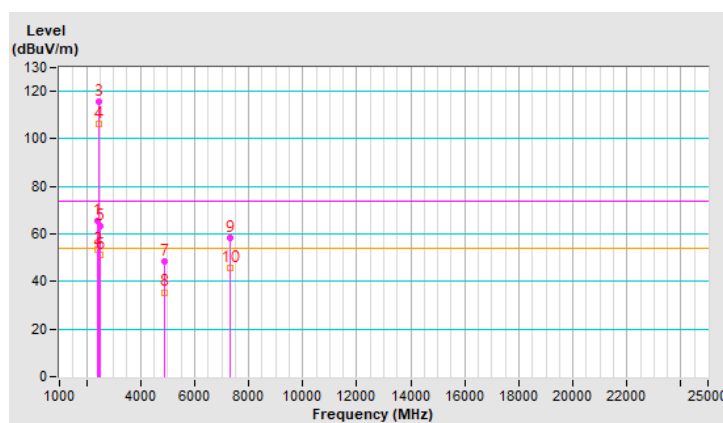


|                             |                |                                          |                                                            |
|-----------------------------|----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11g     | <b>Channel</b>                           | CH 11 : 2462 MHz                                           |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 1 kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng    |                                          |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2462.00        | 104.9 PK                |                |             | 1.15 H             | 3                    | 106.1            | -1.2                     |
| 2                                                    | *2462.00        | 97.2 AV                 |                |             | 1.15 H             | 3                    | 98.4             | -1.2                     |
| 3                                                    | 2485.24         | 61.5 PK                 | 74.0           | -12.5       | 1.15 H             | 3                    | 62.8             | -1.3                     |
| 4                                                    | 2485.24         | 48.9 AV                 | 54.0           | -5.1        | 1.15 H             | 3                    | 50.2             | -1.3                     |
| 5                                                    | 4924.00         | 42.8 PK                 | 74.0           | -31.2       | 2.00 H             | 166                  | 39.0             | 3.8                      |
| 6                                                    | 4924.00         | 32.2 AV                 | 54.0           | -21.8       | 2.00 H             | 166                  | 28.4             | 3.8                      |
| 7                                                    | 7386.00         | 53.9 PK                 | 74.0           | -20.1       | 1.84 H             | 33                   | 44.0             | 9.9                      |
| 8                                                    | 7386.00         | 41.3 AV                 | 54.0           | -12.7       | 1.84 H             | 33                   | 31.4             | 9.9                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

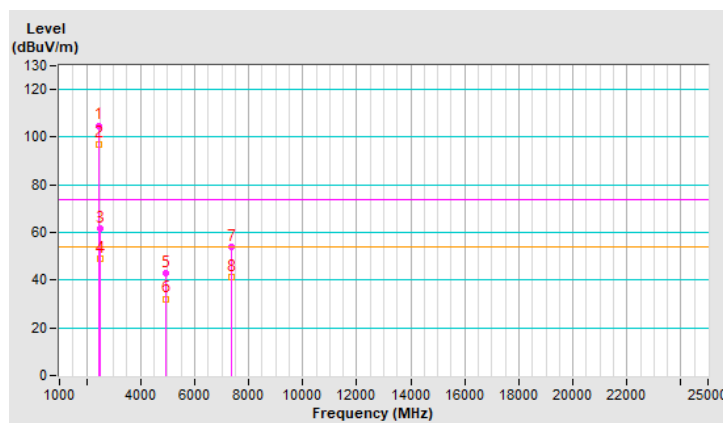


|                             |                |                                          |                                                            |
|-----------------------------|----------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11g     | <b>Channel</b>                           | CH 11 : 2462 MHz                                           |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 1 kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng    |                                          |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *2462.00        | 113.3 PK                |                |             | 1.82 V             | 330                  | 114.5            | -1.2                     |
| 2                                                  | *2462.00        | 103.9 AV                |                |             | 1.82 V             | 330                  | 105.1            | -1.2                     |
| 3                                                  | 2485.24         | 69.5 PK                 | 74.0           | -4.5        | 1.82 V             | 330                  | 70.8             | -1.3                     |
| 4                                                  | 2485.24         | 53.5 AV                 | 54.0           | -0.5        | 1.82 V             | 330                  | 54.8             | -1.3                     |
| 5                                                  | 4924.00         | 43.5 PK                 | 74.0           | -30.5       | 3.76 V             | 118                  | 39.7             | 3.8                      |
| 6                                                  | 4924.00         | 32.4 AV                 | 54.0           | -21.6       | 3.76 V             | 118                  | 28.6             | 3.8                      |
| 7                                                  | 7386.00         | 55.1 PK                 | 74.0           | -18.9       | 3.46 V             | 110                  | 45.2             | 9.9                      |
| 8                                                  | 7386.00         | 42.5 AV                 | 54.0           | -11.5       | 3.46 V             | 110                  | 32.6             | 9.9                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

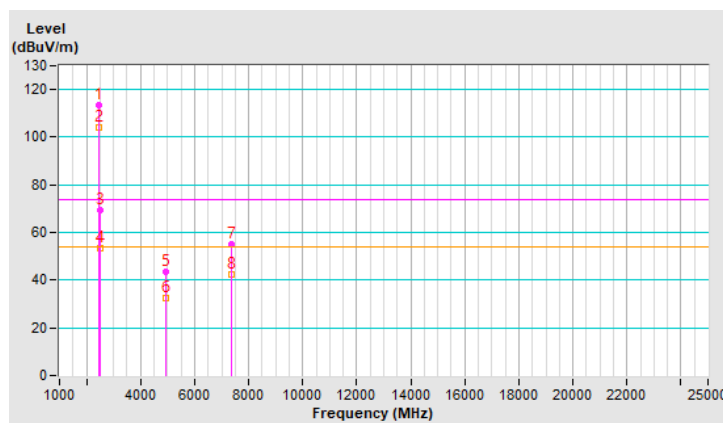


|                             |                    |                                          |                                                            |
|-----------------------------|--------------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11ax (HE20) | <b>Channel</b>                           | CH 1 : 2412 MHz                                            |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz     | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 2 kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz     | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng        |                                          |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2390.00         | 56.1 PK                 | 74.0           | -17.9       | 1.46 H             | 47                   | 57.1             | -1.0                     |
| 2                                                    | 2390.00         | 44.5 AV                 | 54.0           | -9.5        | 1.46 H             | 47                   | 45.5             | -1.0                     |
| 3                                                    | *2412.00        | 99.7 PK                 |                |             | 1.46 H             | 47                   | 100.8            | -1.1                     |
| 4                                                    | *2412.00        | 90.7 AV                 |                |             | 1.46 H             | 47                   | 91.8             | -1.1                     |
| 5                                                    | 4824.00         | 41.8 PK                 | 74.0           | -32.2       | 2.01 H             | 166                  | 38.1             | 3.7                      |
| 6                                                    | 4824.00         | 31.2 AV                 | 54.0           | -22.8       | 2.01 H             | 166                  | 27.5             | 3.7                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

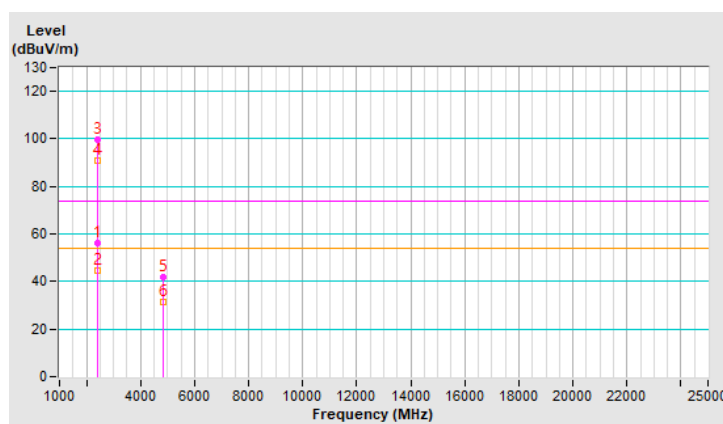


|                             |                    |                                          |                                                            |
|-----------------------------|--------------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11ax (HE20) | <b>Channel</b>                           | CH 1 : 2412 MHz                                            |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz     | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 2 kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz     | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng        |                                          |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2390.00         | 73.9 PK                 | 74.0           | -0.1        | 1.46 V             | 296                  | 74.9             | -1.0                     |
| 2                                                  | 2390.00         | 53.9 AV                 | 54.0           | -0.1        | 1.46 V             | 296                  | 54.9             | -1.0                     |
| 3                                                  | *2412.00        | 111.3 PK                |                |             | 1.46 V             | 296                  | 112.4            | -1.1                     |
| 4                                                  | *2412.00        | 102.7 AV                |                |             | 1.46 V             | 296                  | 103.8            | -1.1                     |
| 5                                                  | 4824.00         | 42.3 PK                 | 74.0           | -31.7       | 3.72 V             | 108                  | 38.6             | 3.7                      |
| 6                                                  | 4824.00         | 31.9 AV                 | 54.0           | -22.1       | 3.72 V             | 108                  | 28.2             | 3.7                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

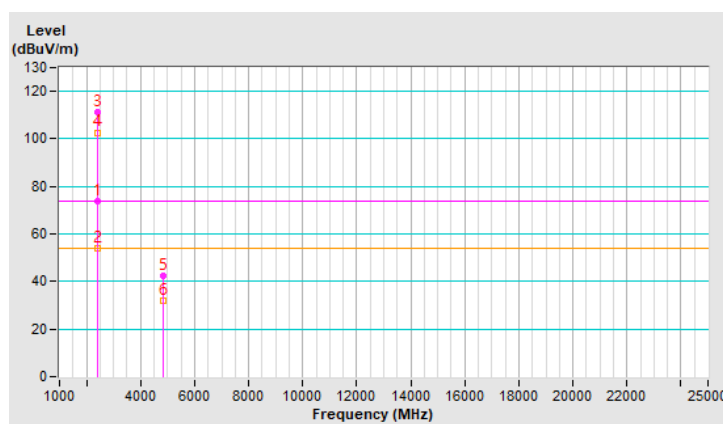




|                      |                    |                               |                                                            |
|----------------------|--------------------|-------------------------------|------------------------------------------------------------|
| RF Mode              | TX 802.11ax (HE20) | Channel                       | CH 6 : 2437 MHz                                            |
| Frequency Range      | 1 GHz ~ 25 GHz     | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz     | Environmental Conditions      | 25 °C, 75 % RH                                             |
| Tested By            | Nelson Teng        |                               |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2390.00         | 58.5 PK                 | 74.0           | -15.5       | 1.49 H             | 60                   | 59.5             | -1.0                     |
| 2                                                    | 2390.00         | 46.3 AV                 | 54.0           | -7.7        | 1.49 H             | 60                   | 47.3             | -1.0                     |
| 3                                                    | *2437.00        | 102.9 PK                |                |             | 1.49 H             | 60                   | 104.0            | -1.1                     |
| 4                                                    | *2437.00        | 94.3 AV                 |                |             | 1.49 H             | 60                   | 95.4             | -1.1                     |
| 5                                                    | 2483.50         | 57.9 PK                 | 74.0           | -16.1       | 1.49 H             | 60                   | 59.2             | -1.3                     |
| 6                                                    | 2483.50         | 46.1 AV                 | 54.0           | -7.9        | 1.49 H             | 60                   | 47.4             | -1.3                     |
| 7                                                    | 4874.00         | 46.0 PK                 | 74.0           | -28.0       | 1.93 H             | 224                  | 42.3             | 3.7                      |
| 8                                                    | 4874.00         | 34.0 AV                 | 54.0           | -20.0       | 1.93 H             | 224                  | 30.3             | 3.7                      |
| 9                                                    | 7311.00         | 55.9 PK                 | 74.0           | -18.1       | 1.73 H             | 56                   | 46.2             | 9.7                      |
| 10                                                   | 7311.00         | 42.7 AV                 | 54.0           | -11.3       | 1.73 H             | 56                   | 33.0             | 9.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

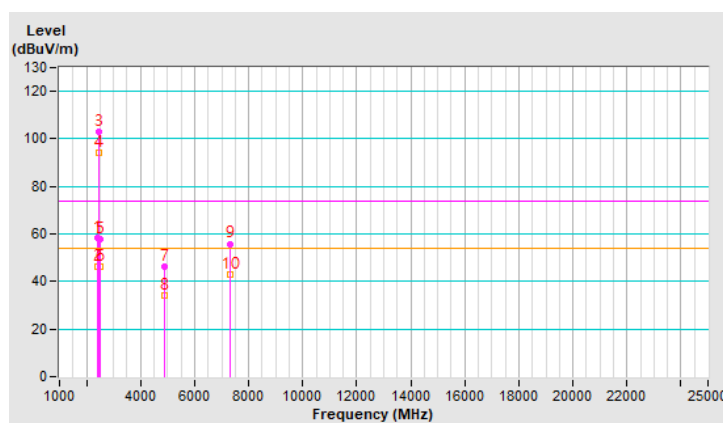


|                      |                    |                               |                                                            |
|----------------------|--------------------|-------------------------------|------------------------------------------------------------|
| RF Mode              | TX 802.11ax (HE20) | Channel                       | CH 6 : 2437 MHz                                            |
| Frequency Range      | 1 GHz ~ 25 GHz     | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz     | Environmental Conditions      | 25 °C, 75 % RH                                             |
| Tested By            | Nelson Teng        |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2390.00         | 68.1 PK                 | 74.0           | -5.9        | 1.88 V             | 133                  | 69.1             | -1.0                     |
| 2                                                  | 2390.00         | 53.3 AV                 | 54.0           | -0.7        | 1.88 V             | 133                  | 54.3             | -1.0                     |
| 3                                                  | *2437.00        | 114.9 PK                |                |             | 1.83 V             | 147                  | 116.0            | -1.1                     |
| 4                                                  | *2437.00        | 105.7 AV                |                |             | 1.83 V             | 147                  | 106.8            | -1.1                     |
| 5                                                  | 2483.50         | 63.1 PK                 | 74.0           | -10.9       | 1.88 V             | 133                  | 64.4             | -1.3                     |
| 6                                                  | 2483.50         | 50.1 AV                 | 54.0           | -3.9        | 1.88 V             | 133                  | 51.4             | -1.3                     |
| 7                                                  | 4874.00         | 49.1 PK                 | 74.0           | -24.9       | 3.96 V             | 13                   | 45.4             | 3.7                      |
| 8                                                  | 4874.00         | 35.9 AV                 | 54.0           | -18.1       | 3.96 V             | 13                   | 32.2             | 3.7                      |
| 9                                                  | 7311.00         | 58.8 PK                 | 74.0           | -15.2       | 3.50 V             | 110                  | 49.1             | 9.7                      |
| 10                                                 | 7311.00         | 45.9 AV                 | 54.0           | -8.1        | 3.50 V             | 110                  | 36.2             | 9.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

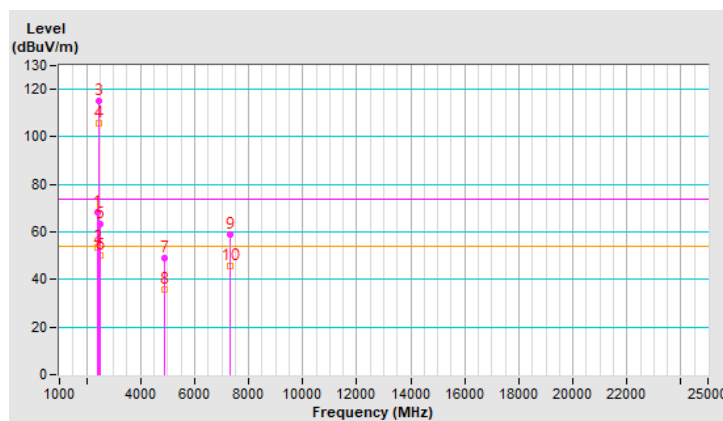


|                             |                    |                                          |                                                            |
|-----------------------------|--------------------|------------------------------------------|------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11ax (HE20) | <b>Channel</b>                           | CH 11 : 2462 MHz                                           |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz     | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 2 kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz     | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                             |
| <b>Tested By</b>            | Nelson Teng        |                                          |                                                            |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2462.00        | 102.1 PK                |                |             | 1.45 H             | 6                    | 103.3            | -1.2                     |
| 2                                                    | *2462.00        | 91.4 AV                 |                |             | 1.45 H             | 6                    | 92.6             | -1.2                     |
| 3                                                    | 2486.25         | 57.2 PK                 | 74.0           | -16.8       | 1.45 H             | 6                    | 58.5             | -1.3                     |
| 4                                                    | 2486.25         | 44.7 AV                 | 54.0           | -9.3        | 1.45 H             | 6                    | 46.0             | -1.3                     |
| 5                                                    | 4924.00         | 46.3 PK                 | 74.0           | -27.7       | 1.91 H             | 211                  | 42.5             | 3.8                      |
| 6                                                    | 4924.00         | 34.3 AV                 | 54.0           | -19.7       | 1.91 H             | 211                  | 30.5             | 3.8                      |
| 7                                                    | 7386.00         | 55.2 PK                 | 74.0           | -18.8       | 1.71 H             | 63                   | 45.3             | 9.9                      |
| 8                                                    | 7386.00         | 42.3 AV                 | 54.0           | -11.7       | 1.71 H             | 63                   | 32.4             | 9.9                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

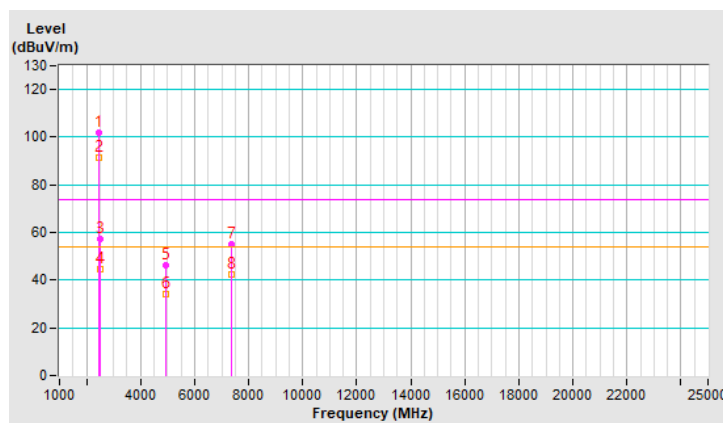


|                      |                    |                               |                                                            |
|----------------------|--------------------|-------------------------------|------------------------------------------------------------|
| RF Mode              | TX 802.11ax (HE20) | Channel                       | CH 11 : 2462 MHz                                           |
| Frequency Range      | 1 GHz ~ 25 GHz     | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 2 kHz |
| Input Power (System) | 120 Vac, 60 Hz     | Environmental Conditions      | 25 °C, 75 % RH                                             |
| Tested By            | Nelson Teng        |                               |                                                            |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *2462.00        | 111.8 PK                |                |             | 1.51 V             | 331                  | 113.0            | -1.2                     |
| 2                                                  | *2462.00        | 102.2 AV                |                |             | 1.51 V             | 331                  | 103.4            | -1.2                     |
| 3                                                  | 2489.84         | 71.3 PK                 | 74.0           | -2.7        | 1.51 V             | 331                  | 72.6             | -1.3                     |
| 4                                                  | 2489.84         | 53.3 AV                 | 54.0           | -0.7        | 1.51 V             | 331                  | 54.6             | -1.3                     |
| 5                                                  | 4924.00         | 48.9 PK                 | 74.0           | -25.1       | 3.98 V             | 28                   | 45.1             | 3.8                      |
| 6                                                  | 4924.00         | 36.0 AV                 | 54.0           | -18.0       | 3.98 V             | 28                   | 32.2             | 3.8                      |
| 7                                                  | 7386.00         | 58.5 PK                 | 74.0           | -15.5       | 3.45 V             | 118                  | 48.6             | 9.9                      |
| 8                                                  | 7386.00         | 45.7 AV                 | 54.0           | -8.3        | 3.45 V             | 118                  | 35.8             | 9.9                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

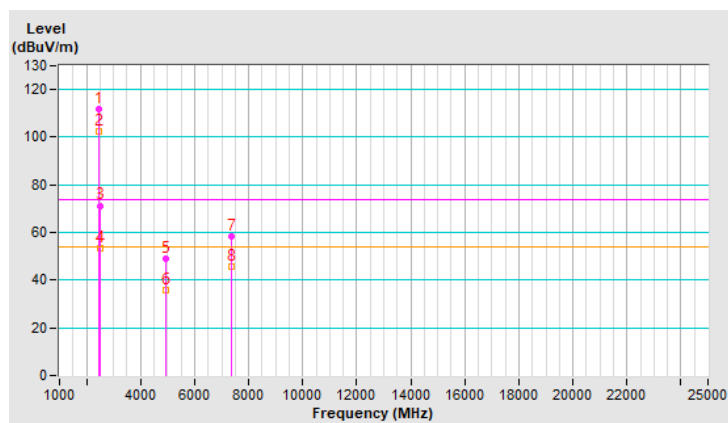


|                      |                    |                               |                                                             |
|----------------------|--------------------|-------------------------------|-------------------------------------------------------------|
| RF Mode              | TX 802.11ax (HE40) | Channel                       | CH 3 : 2422 MHz                                             |
| Frequency Range      | 1 GHz ~ 25 GHz     | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 20 kHz |
| Input Power (System) | 120 Vac, 60 Hz     | Environmental Conditions      | 25 °C, 75 % RH                                              |
| Tested By            | Nelson Teng        |                               |                                                             |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2390.00         | 57.5 PK                 | 74.0           | -16.5       | 1.44 H             | 48                   | 58.5             | -1.0                     |
| 2                                                    | 2390.00         | 45.5 AV                 | 54.0           | -8.5        | 1.44 H             | 48                   | 46.5             | -1.0                     |
| 3                                                    | *2422.00        | 96.2 PK                 |                |             | 1.44 H             | 48                   | 97.3             | -1.1                     |
| 4                                                    | *2422.00        | 87.7 AV                 |                |             | 1.44 H             | 48                   | 88.8             | -1.1                     |
| 5                                                    | 4844.00         | 46.0 PK                 | 74.0           | -28.0       | 1.90 H             | 210                  | 42.3             | 3.7                      |
| 6                                                    | 4844.00         | 33.9 AV                 | 54.0           | -20.1       | 1.90 H             | 210                  | 30.2             | 3.7                      |
| 7                                                    | 7266.00         | 55.3 PK                 | 74.0           | -18.7       | 1.73 H             | 70                   | 45.7             | 9.6                      |
| 8                                                    | 7266.00         | 42.6 AV                 | 54.0           | -11.4       | 1.73 H             | 70                   | 33.0             | 9.6                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.

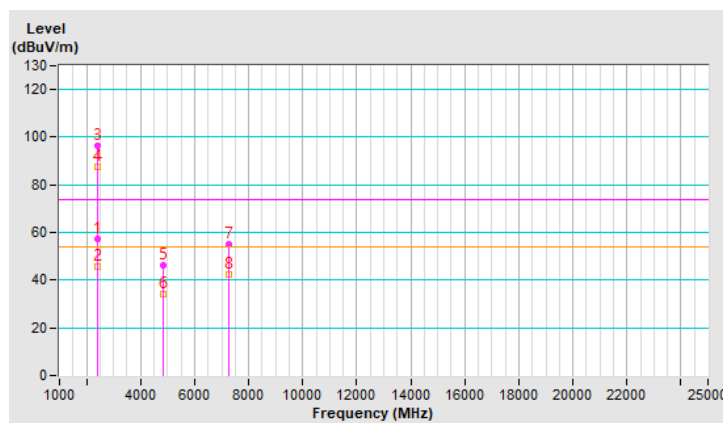


|                      |                    |                               |                                                             |
|----------------------|--------------------|-------------------------------|-------------------------------------------------------------|
| RF Mode              | TX 802.11ax (HE40) | Channel                       | CH 3 : 2422 MHz                                             |
| Frequency Range      | 1 GHz ~ 25 GHz     | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 20 kHz |
| Input Power (System) | 120 Vac, 60 Hz     | Environmental Conditions      | 25 °C, 75 % RH                                              |
| Tested By            | Nelson Teng        |                               |                                                             |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2384.46         | 71.4 PK                 | 74.0           | -2.6        | 2.05 V             | 118                  | 72.4             | -1.0                     |
| 2                                                  | 2384.46         | 51.3 AV                 | 54.0           | -2.7        | 2.05 V             | 118                  | 52.3             | -1.0                     |
| 3                                                  | 2388.25         | 65.0 PK                 | 74.0           | -9.0        | 2.05 V             | 118                  | 66.0             | -1.0                     |
| 4                                                  | 2388.25         | 53.9 AV                 | 54.0           | -0.1        | 2.05 V             | 118                  | 54.9             | -1.0                     |
| 5                                                  | *2422.00        | 107.3 PK                |                |             | 2.05 V             | 118                  | 108.4            | -1.1                     |
| 6                                                  | *2422.00        | 99.8 AV                 |                |             | 2.05 V             | 118                  | 100.9            | -1.1                     |
| 7                                                  | 4844.00         | 48.8 PK                 | 74.0           | -25.2       | 4.00 V             | 41                   | 45.1             | 3.7                      |
| 8                                                  | 4844.00         | 36.0 AV                 | 54.0           | -18.0       | 4.00 V             | 41                   | 32.3             | 3.7                      |
| 9                                                  | 7266.00         | 58.7 PK                 | 74.0           | -15.3       | 3.44 V             | 113                  | 49.1             | 9.6                      |
| 10                                                 | 7266.00         | 45.8 AV                 | 54.0           | -8.2        | 3.44 V             | 113                  | 36.2             | 9.6                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

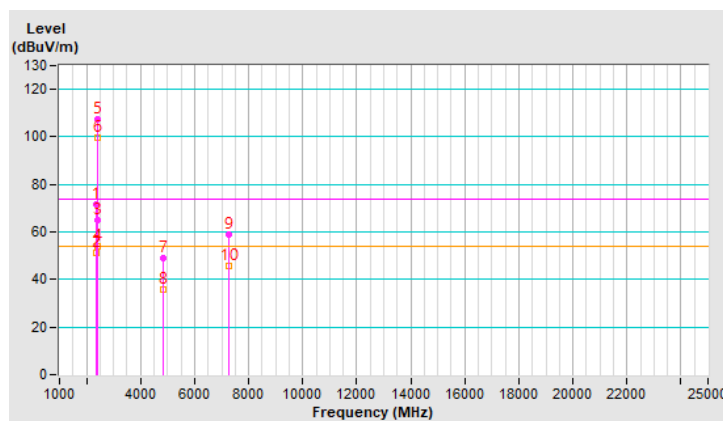


|                      |                    |                               |                                                             |
|----------------------|--------------------|-------------------------------|-------------------------------------------------------------|
| RF Mode              | TX 802.11ax (HE40) | Channel                       | CH 6 : 2437 MHz                                             |
| Frequency Range      | 1 GHz ~ 25 GHz     | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 20 kHz |
| Input Power (System) | 120 Vac, 60 Hz     | Environmental Conditions      | 25 °C, 75 % RH                                              |
| Tested By            | Nelson Teng        |                               |                                                             |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 2380.77         | 59.1 PK                 | 74.0           | -14.9       | 1.52 H             | 7                    | 60.1             | -1.0                     |
| 2                                                    | 2380.77         | 45.5 AV                 | 54.0           | -8.5        | 1.52 H             | 7                    | 46.5             | -1.0                     |
| 3                                                    | *2437.00        | 98.7 PK                 |                |             | 1.52 H             | 7                    | 99.8             | -1.1                     |
| 4                                                    | *2437.00        | 90.1 AV                 |                |             | 1.52 H             | 7                    | 91.2             | -1.1                     |
| 5                                                    | 2485.55         | 58.3 PK                 | 74.0           | -15.7       | 1.52 H             | 7                    | 59.6             | -1.3                     |
| 6                                                    | 2485.55         | 44.9 AV                 | 54.0           | -9.1        | 1.52 H             | 7                    | 46.2             | -1.3                     |
| 7                                                    | 4874.00         | 45.9 PK                 | 74.0           | -28.1       | 1.87 H             | 221                  | 42.2             | 3.7                      |
| 8                                                    | 4874.00         | 34.0 AV                 | 54.0           | -20.0       | 1.87 H             | 221                  | 30.3             | 3.7                      |
| 9                                                    | 7311.00         | 55.0 PK                 | 74.0           | -19.0       | 1.69 H             | 78                   | 45.3             | 9.7                      |
| 10                                                   | 7311.00         | 41.9 AV                 | 54.0           | -12.1       | 1.69 H             | 78                   | 32.2             | 9.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

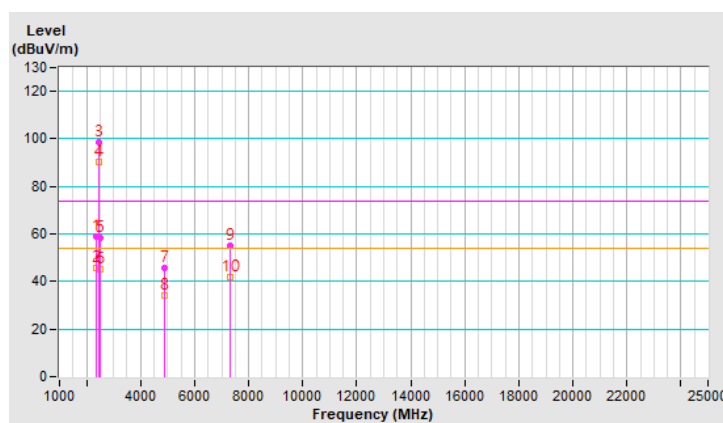


|                      |                    |                               |                                                             |
|----------------------|--------------------|-------------------------------|-------------------------------------------------------------|
| RF Mode              | TX 802.11ax (HE40) | Channel                       | CH 6 : 2437 MHz                                             |
| Frequency Range      | 1 GHz ~ 25 GHz     | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 20 kHz |
| Input Power (System) | 120 Vac, 60 Hz     | Environmental Conditions      | 25 °C, 75 % RH                                              |
| Tested By            | Nelson Teng        |                               |                                                             |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 2388.63         | 71.4 PK                 | 74.0           | -2.6        | 1.73 V             | 132                  | 72.4             | -1.0                     |
| 2                                                  | 2388.63         | 53.3 AV                 | 54.0           | -0.7        | 1.73 V             | 132                  | 54.3             | -1.0                     |
| 3                                                  | *2437.00        | 109.3 PK                |                |             | 1.73 V             | 132                  | 110.4            | -1.1                     |
| 4                                                  | *2437.00        | 101.5 AV                |                |             | 1.73 V             | 132                  | 102.6            | -1.1                     |
| 5                                                  | 2485.55         | 70.7 PK                 | 74.0           | -3.3        | 1.73 V             | 132                  | 72.0             | -1.3                     |
| 6                                                  | 2485.55         | 51.1 AV                 | 54.0           | -2.9        | 1.73 V             | 132                  | 52.4             | -1.3                     |
| 7                                                  | 4874.00         | 49.3 PK                 | 74.0           | -24.7       | 3.94 V             | 40                   | 45.6             | 3.7                      |
| 8                                                  | 4874.00         | 36.1 AV                 | 54.0           | -17.9       | 3.94 V             | 40                   | 32.4             | 3.7                      |
| 9                                                  | 7311.00         | 58.9 PK                 | 74.0           | -15.1       | 3.42 V             | 106                  | 49.2             | 9.7                      |
| 10                                                 | 7311.00         | 45.9 AV                 | 54.0           | -8.1        | 3.42 V             | 106                  | 36.2             | 9.7                      |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

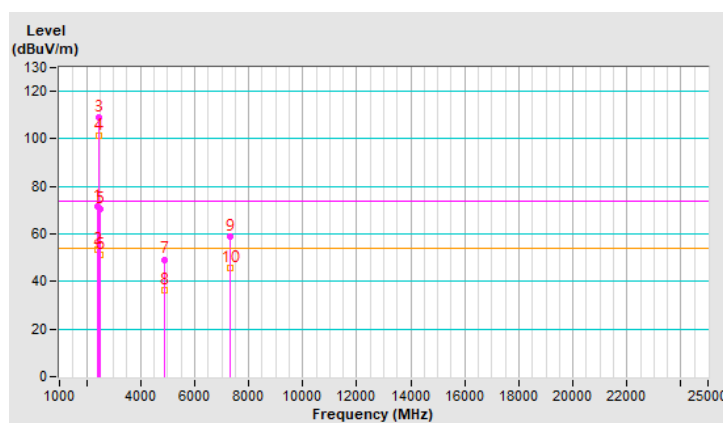




|                             |                    |                                          |                                                             |
|-----------------------------|--------------------|------------------------------------------|-------------------------------------------------------------|
| <b>RF Mode</b>              | TX 802.11ax (HE40) | <b>Channel</b>                           | CH 9 : 2452 MHz                                             |
| <b>Frequency Range</b>      | 1 GHz ~ 25 GHz     | <b>Detector Function &amp; Bandwidth</b> | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 20 kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz     | <b>Environmental Conditions</b>          | 25 °C, 75 % RH                                              |
| <b>Tested By</b>            | Nelson Teng        |                                          |                                                             |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *2452.00        | 97.8 PK                 |                |             | 1.50 H             | 2                    | 99.0             | -1.2                     |
| 2                                                    | *2452.00        | 88.9 AV                 |                |             | 1.50 H             | 2                    | 90.1             | -1.2                     |
| 3                                                    | 2486.29         | 63.5 PK                 | 74.0           | -10.5       | 1.50 H             | 2                    | 64.8             | -1.3                     |
| 4                                                    | 2486.29         | 46.2 AV                 | 54.0           | -7.8        | 1.50 H             | 2                    | 47.5             | -1.3                     |
| 5                                                    | 4904.00         | 46.4 PK                 | 74.0           | -27.6       | 1.88 H             | 197                  | 42.7             | 3.7                      |
| 6                                                    | 4904.00         | 34.1 AV                 | 54.0           | -19.9       | 1.88 H             | 197                  | 30.4             | 3.7                      |
| 7                                                    | 7356.00         | 54.8 PK                 | 74.0           | -19.2       | 1.75 H             | 73                   | 45.0             | 9.8                      |
| 8                                                    | 7356.00         | 42.1 AV                 | 54.0           | -11.9       | 1.75 H             | 73                   | 32.3             | 9.8                      |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

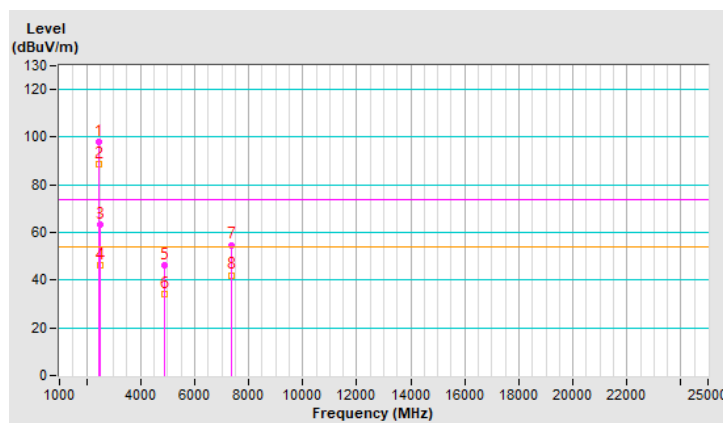


|                      |                    |                               |                                                             |
|----------------------|--------------------|-------------------------------|-------------------------------------------------------------|
| RF Mode              | TX 802.11ax (HE40) | Channel                       | CH 9 : 2452 MHz                                             |
| Frequency Range      | 1 GHz ~ 25 GHz     | Detector Function & Bandwidth | (PK) RB = 1 MHz, VB = 3 MHz<br>(AV) RB = 1 MHz, VB = 20 kHz |
| Input Power (System) | 120 Vac, 60 Hz     | Environmental Conditions      | 25 °C, 75 % RH                                              |
| Tested By            | Nelson Teng        |                               |                                                             |


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *2452.00        | 108.8 PK                |                |             | 1.88 V             | 333                  | 110.0            | -1.2                     |
| 2                                                  | *2452.00        | 99.5 AV                 |                |             | 1.88 V             | 333                  | 100.7            | -1.2                     |
| 3                                                  | 2484.84         | 72.2 PK                 | 74.0           | -1.8        | 1.88 V             | 333                  | 73.5             | -1.3                     |
| 4                                                  | 2484.84         | 53.2 AV                 | 54.0           | -0.8        | 1.88 V             | 333                  | 54.5             | -1.3                     |
| 5                                                  | 4904.00         | 49.4 PK                 | 74.0           | -24.6       | 3.95 V             | 31                   | 45.7             | 3.7                      |
| 6                                                  | 4904.00         | 36.4 AV                 | 54.0           | -17.6       | 3.95 V             | 31                   | 32.7             | 3.7                      |
| 7                                                  | 7356.00         | 59.1 PK                 | 74.0           | -14.9       | 3.42 V             | 131                  | 49.3             | 9.8                      |
| 8                                                  | 7356.00         | 46.1 AV                 | 54.0           | -7.9        | 3.42 V             | 131                  | 36.3             | 9.8                      |


#### Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

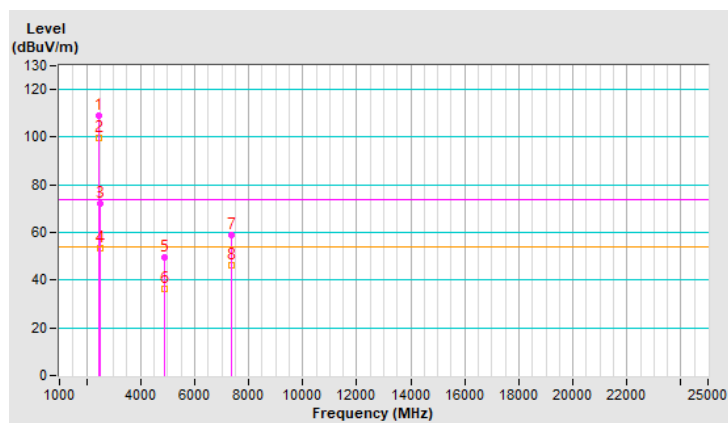


## Plot of Band Edge

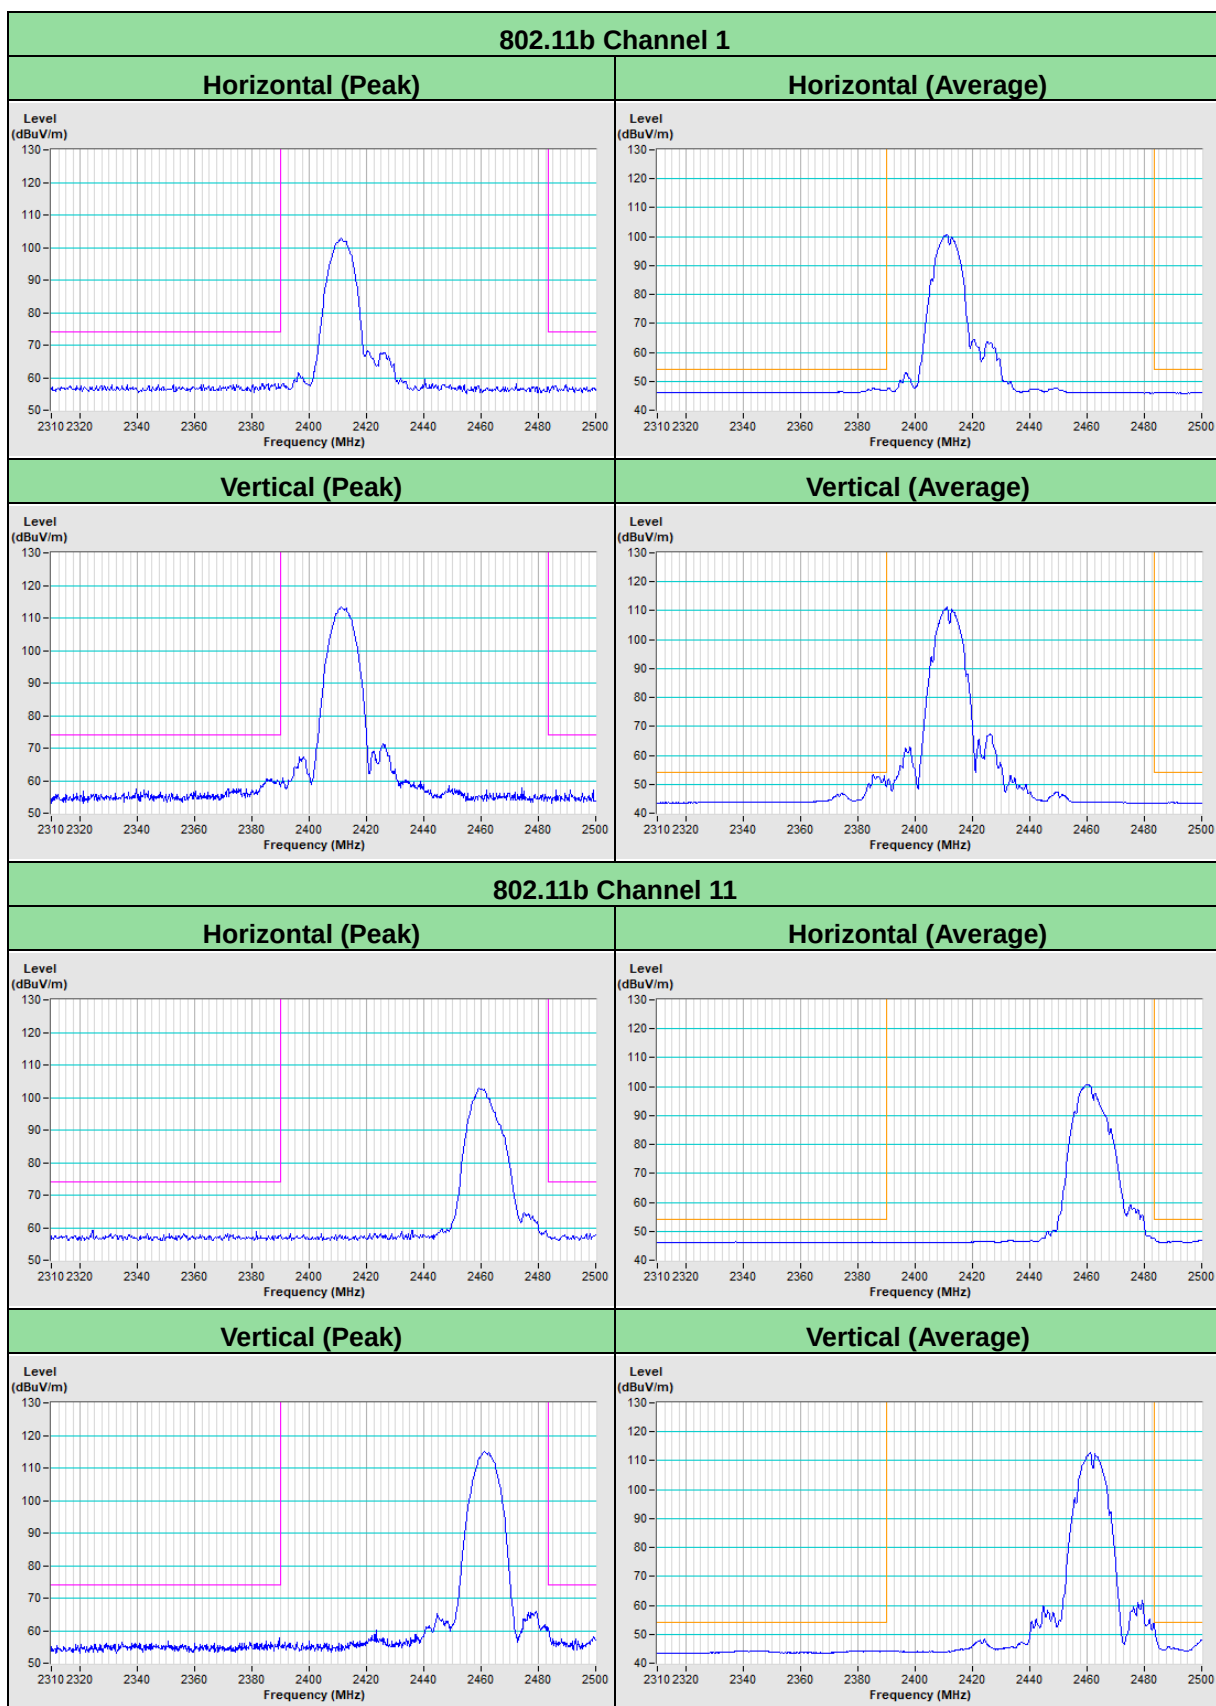

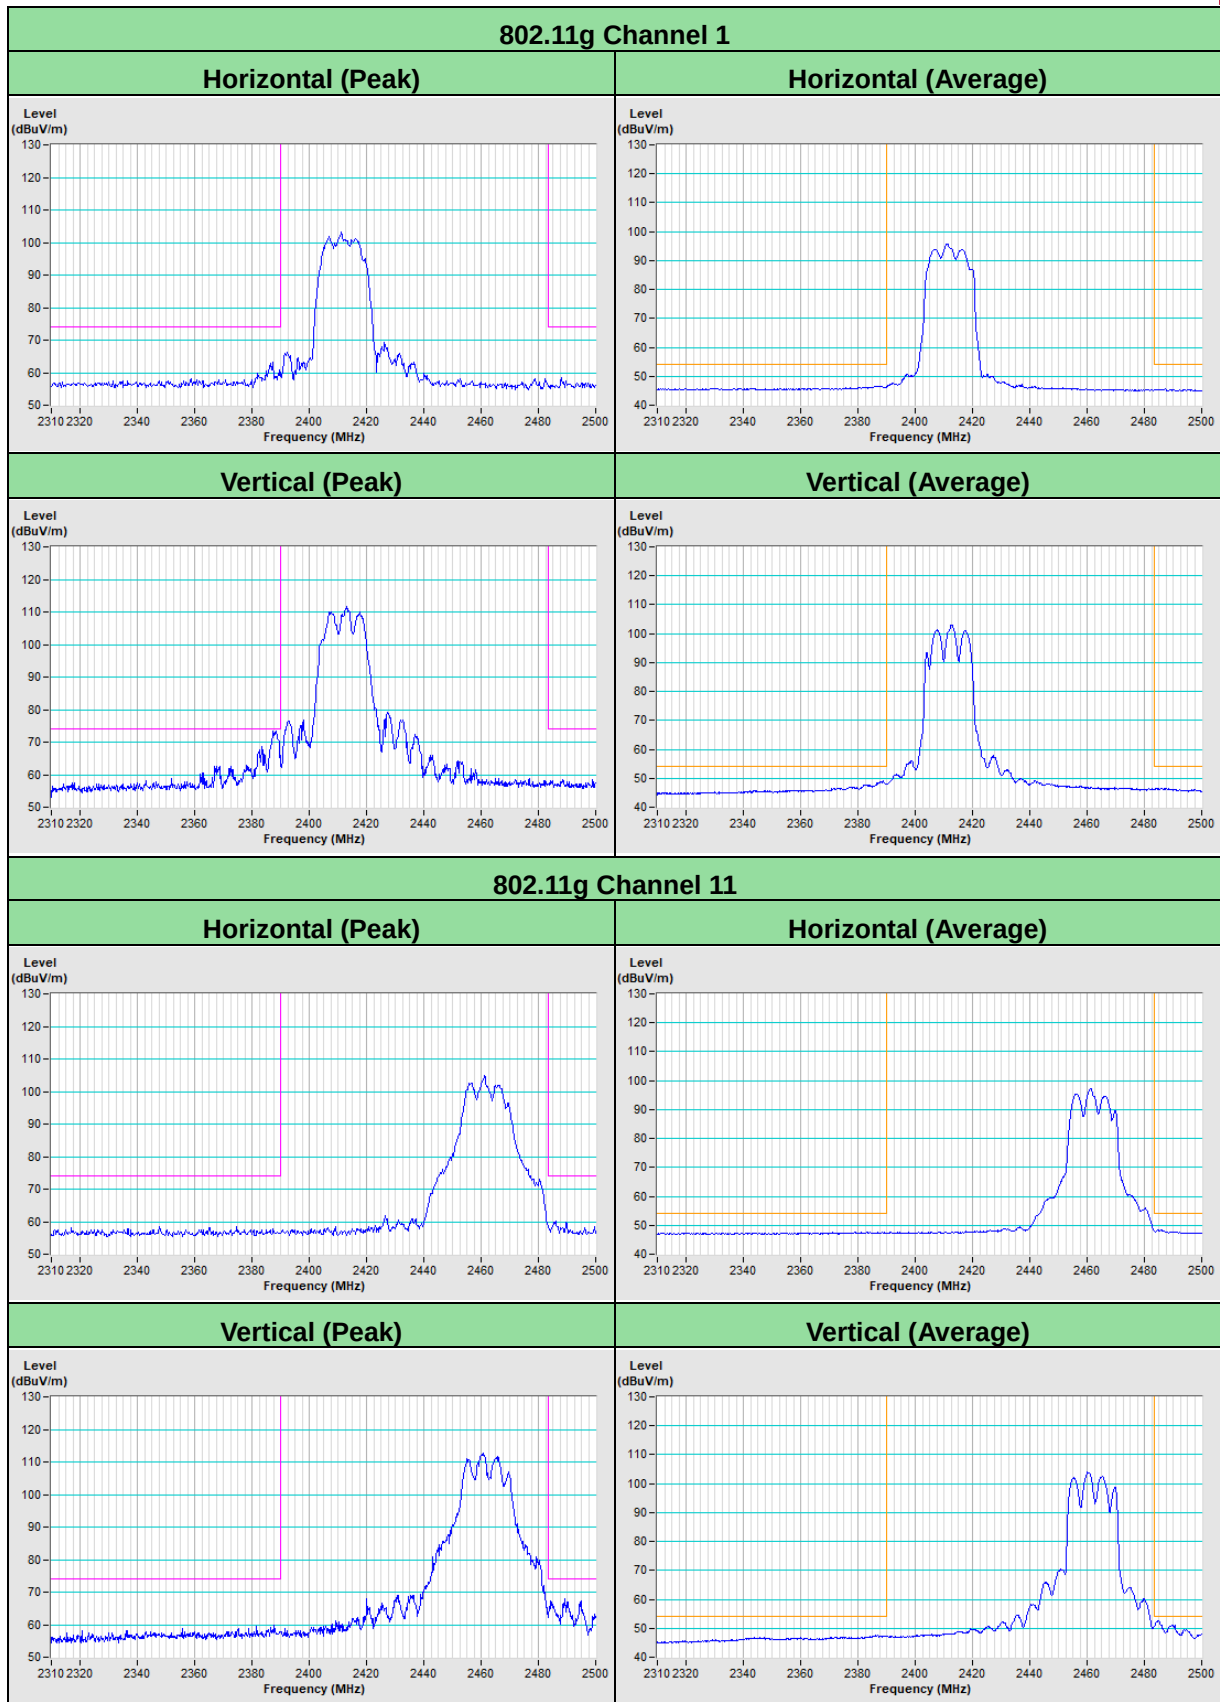

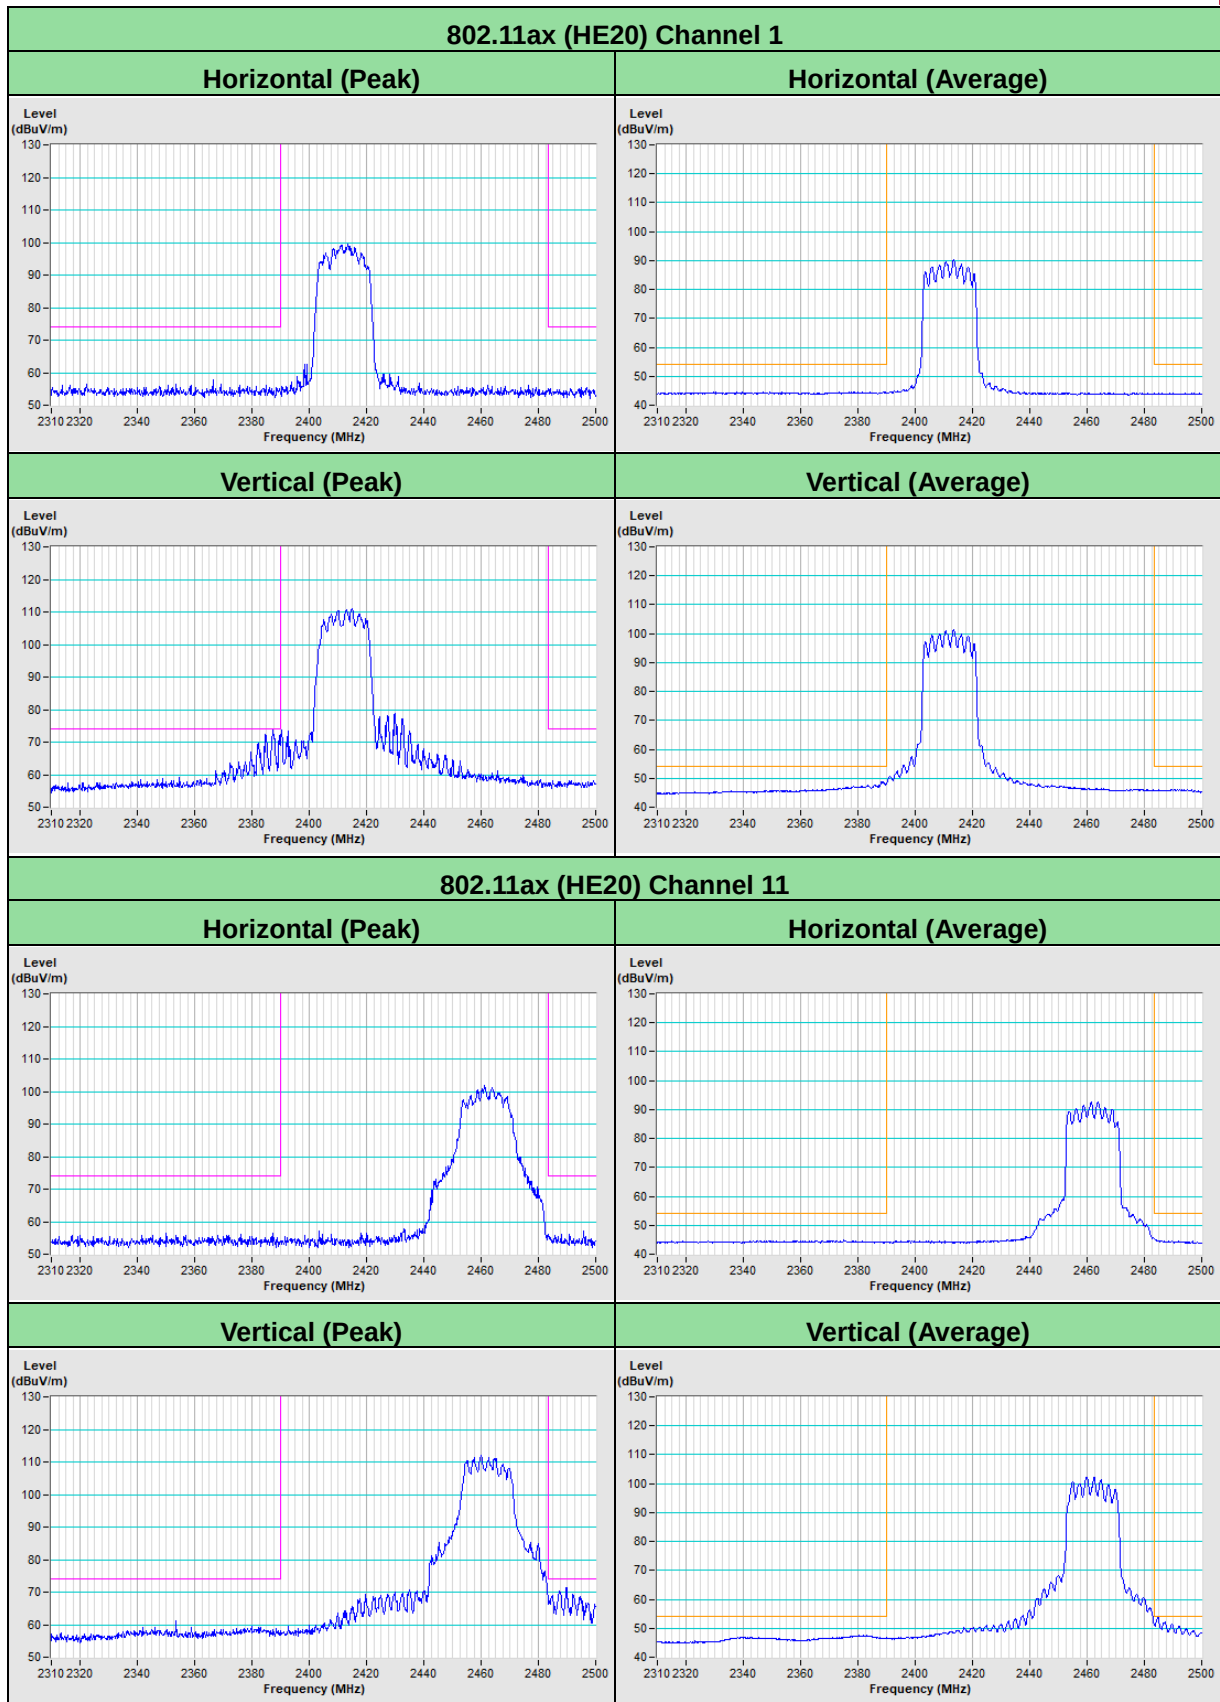

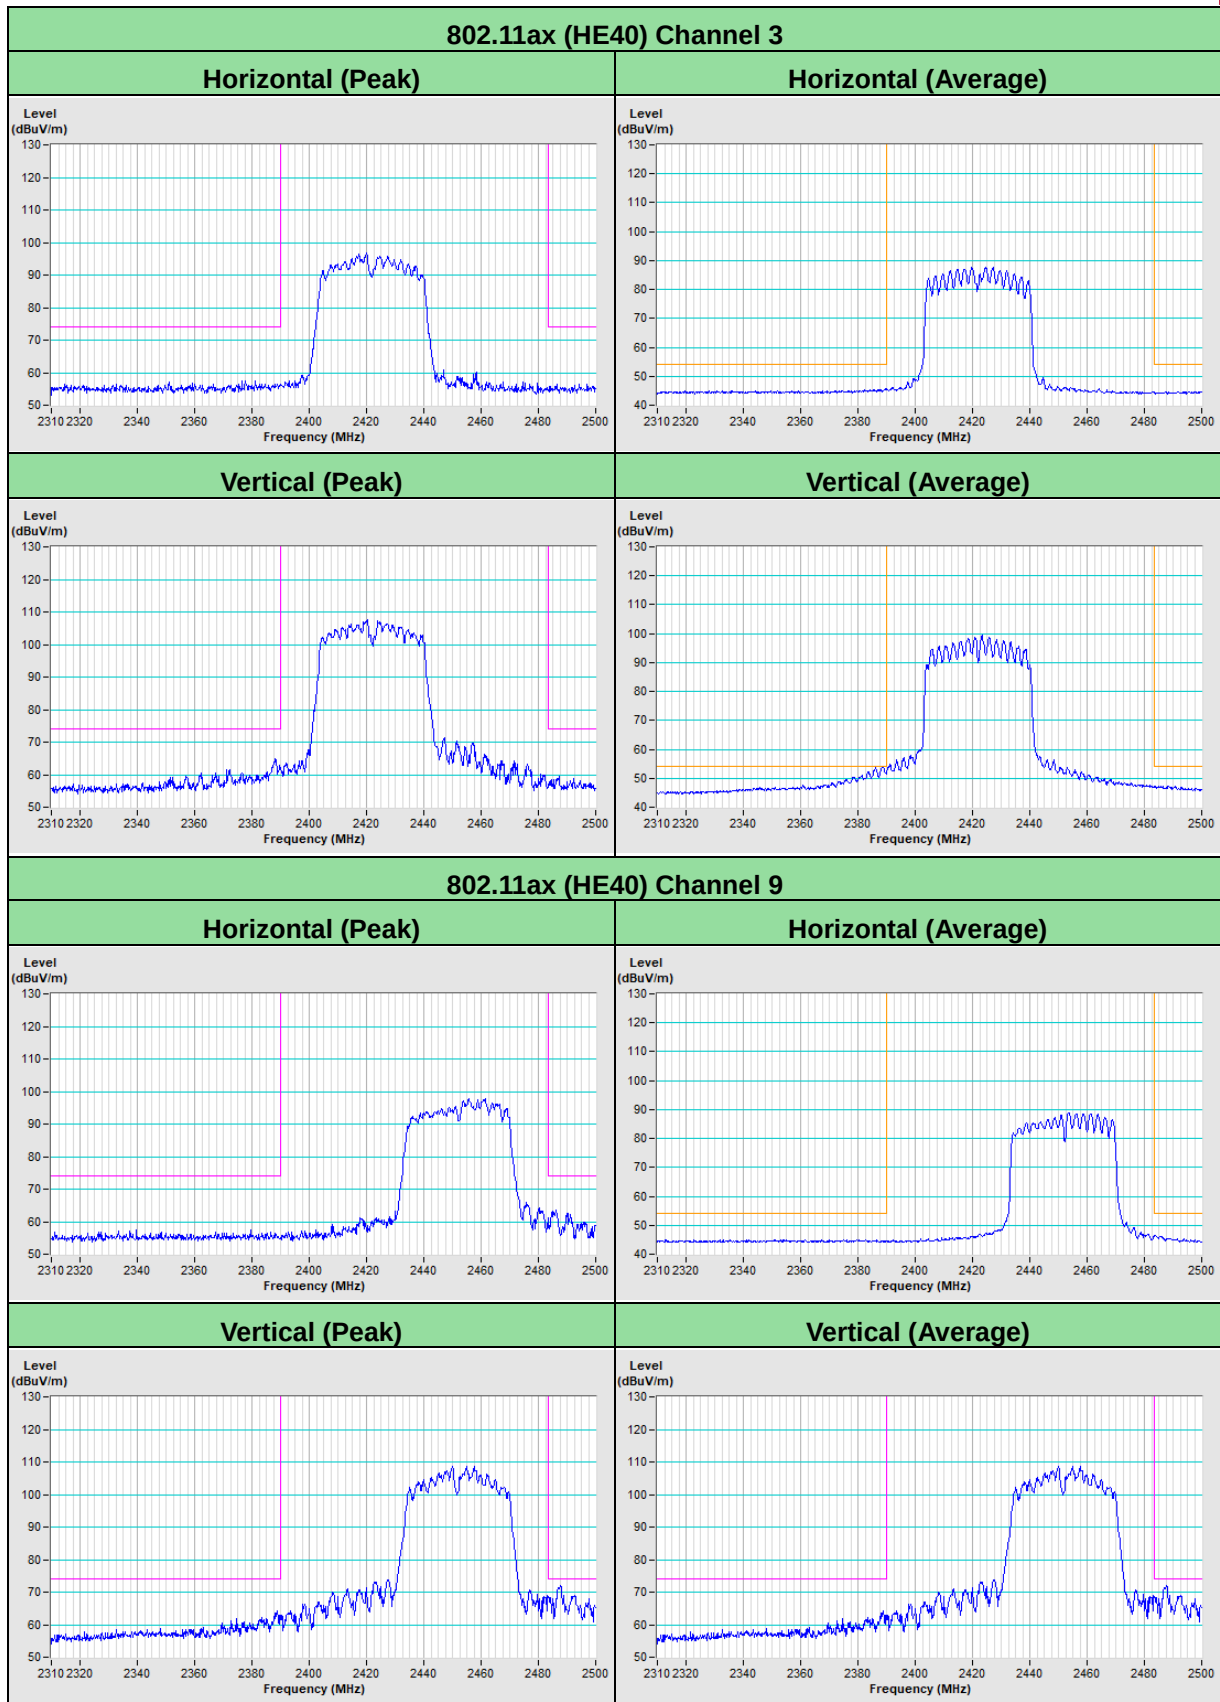

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---