

HEARING AID COMPATIBILITY

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro, Maetan dong,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do 16677, Korea

Date of Testing:
 4/19/2021 - 5/6/2021
Test Site/Location:
 PCTEST, Columbia, MD, USA
Test Report Serial No.:
 1M2104070032-20-R2.A3L
Date of Issue:
 6/8/2021

FCC ID:	A3LSMF711U
APPLICANT:	SAMSUNG ELECTRONICS CO., LTD.

Scope of Test: Audio Band Magnetic Testing (T-Coil)
Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011
 285076 D01 HAC Guidance v05
 285076 D02 T-Coil testing for CMRS IP v03
DUT Type: Portable Handset
Model: SM-F711U
Additional Model(s): SM-F711U1
Test Device Serial No.: Pre-Production Sample [S/N: 0187M, 0584S]

C63.19-2011 HAC Category:	T3 (SIGNAL TO NOISE CATEGORY)
----------------------------------	--------------------------------------

Note: This revised Test Report (S/N: 1M2104070032-20-R2.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President



FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 1 of 111	

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION.....	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	18
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	23
7.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	32
8.	FCC 3G MEASUREMENTS	40
9.	T-COIL TEST SUMMARY	42
10.	MEASUREMENT UNCERTAINTY	62
11.	EQUIPMENT LIST	63
12.	TEST DATA	64
13.	CALIBRATION CERTIFICATES.....	99
14.	CONCLUSION.....	106
15.	REFERENCES	107
16.	TEST SETUP PHOTOGRAPHS	109

FCC ID: A3LSMF711U	 <small>Head to the point of delivery</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 2 of 111	

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.

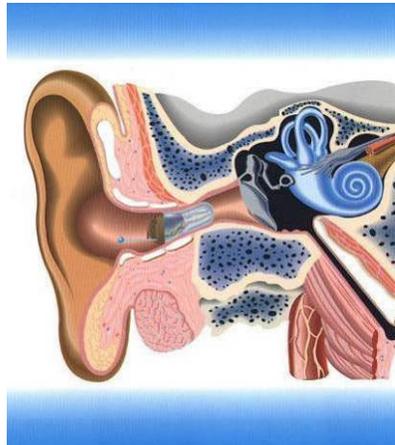


Figure 1-1 Hearing Aid *in-vitu*

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 3 of 111	

2. DUT DESCRIPTION



FCC ID: A3LSMF711U
Applicant: Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 16677, Korea
Model: SM-F711U
Additional Model(s): SM-F711U1
Serial Number: 0187M, 0584S
HW Version: REV0.0, REV1.0
SW Version: F711USQU0AUD5, F711USQU0AUE1
Antenna: Internal Antenna
DUT Type: Portable Handset

I. LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B4 & B66 and B38 & B41. Each pair of LTE bands has the same target power and shares the same transmission path. Since the supported frequency spans for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B66 and B41) were evaluated for hearing-aid compliance. LTE B5 and B2 are LTE anchor bands for dual connectivity (EN DC) scenarios between LTE and NR so they were additionally evaluated as independent LTE bands.

II. NR Band Selection

This device supports the following pair of NR bands with similar frequencies: NR n25 & n2. This pair of NR bands have the same target power and shares the same transmission path. Since the supported frequency span for the smaller NR band is completely covered by the larger NR band, only the larger NR band (n25) was evaluated for hearing-aid compliance.

III. Device Serial Numbers

Several samples were used to support HAC testing. There are two variants of the WIFI chipset, and both were evaluated for FCC HAC regulations. WIFI Variants are labeled as 'Variant N' or 'Variant Q' for reference. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 9.

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 4 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Table 2-1
A3LSMF711U HAC Air Interfaces

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated
CDMA	835	VO	Yes	Yes: WIFI or BT	CMRS Voice ¹	EVRC
	1900					
GSM	EvDO	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	850	VO	Yes	Yes: WIFI or BT	CMRS Voice ¹	EFR
	1900					
UMTS	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	850	VD	Yes	Yes: WIFI or BT	CMRS Voice ¹	NB AMR
	1700					
	1900	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
HSPA						
LTE (FDD)	680 (B71)	VD	Yes ³	Yes: WIFI or BT	VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS
	700 (B12)					
	780 (B13)					
	790 (B14)					
	850 (B5)					
	850 (B26)					
	1700 (B4)					
	1700 (B66)					
	1900 (B2)					
	1900 (B25)					
	2300 (B30)					
2500 (B7)						
LTE (TDD)	2600 (B38)	VD	Yes	Yes: WIFI or BT	VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS
	2600 (B41)					
	3600 (B48)					
NR (FDD)	680 (n71)	VD	Yes ^{3,4}	Yes: WIFI or BT	Google Duo ²	OPUS
	700 (n12)					
	850 (n5)					
	1700 (n66)					
	1900 (n25)					
	1900 (n2)					
2300 (n30)						
NR (TDD)	2600 (n41)	VD	Yes ⁴	Yes: WIFI or BT	Google Duo ²	OPUS
	3500 (n77, DOD)					
	3800 (n77)					
	28000 (n261)					
	39000 (n260)					
WIFI	2450	VD	Yes	Yes: CDMA, GSM, UMTS, LTE, or NR	VoWIFI ² , Google Duo ²	VoWIFI: NB AMR, WB AMR, EVS Google Duo: OPUS
	5200 (U-NII 1)					
	5300 (U-NII 2A)					
	5500 (U-NII 2C)					
	5800 (U-NII 3)					
BT	2450	DT	No	Yes: CDMA, GSM, UMTS, LTE, or NR	N/A	N/A
Type Transport VO = Voice Only DT = Digital Data - Not intended for Voice Services VD = CMRS and/or IP Voice over Data Transport			Notes: 1. Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and July 2012 C63 VoLTE Interpretation. 2. Reference level is -20dBm0 in accordance with FCC KDB 285076 D02 3. LTE B71 and NR n71, while outside the scope of ANSI C63.19 and FCC HAC regulations, were additionally tested according to the existing HAC procedures with currently available test equipment. 4. NR was evaluated using an interim procedure outlined in Section 7.11.5. 5. n260 and n261 are currently outside the scope of ANSI C63.19 and FCC HAC regulations therefore they were not evaluated.			

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 5 of 111	

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be ≥ -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

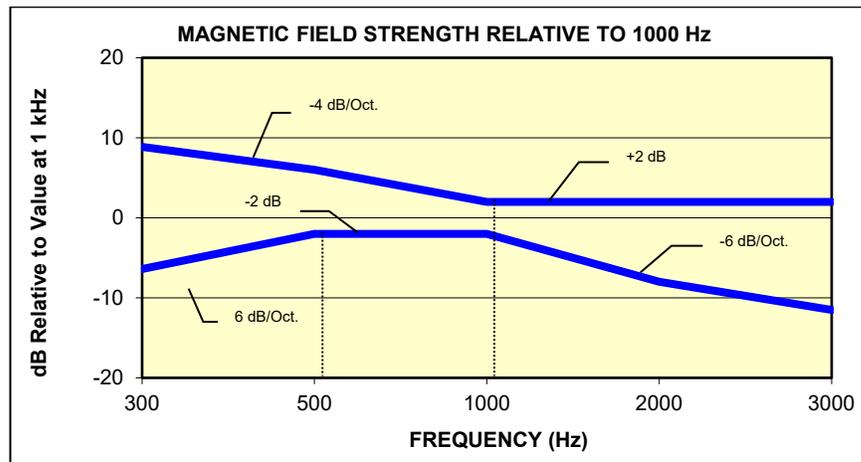


Figure 3-1
Magnetic field frequency response for Wireless Devices with an axial field ≤ -15 dB(A/m) at 1 kHz

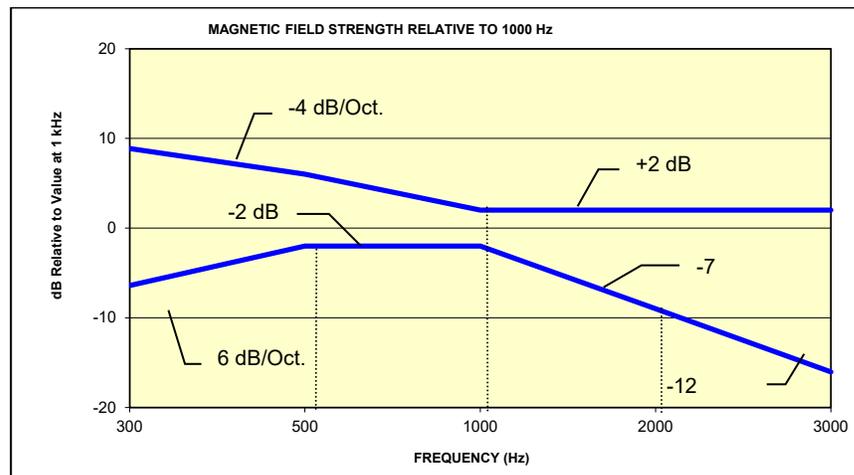


Figure 3-2
Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT	 Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 6 of 111

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters
	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]
T1	0 to 10 dB
T2	10 to 20 dB
T3	20 to 30 dB
T4	> 30 dB

Table 3-1
Magnetic Coupling Parameters

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: A3LSMF711U	 PCTEST Head to the point of destination	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 7 of 111

4. METHOD OF MEASUREMENT

I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

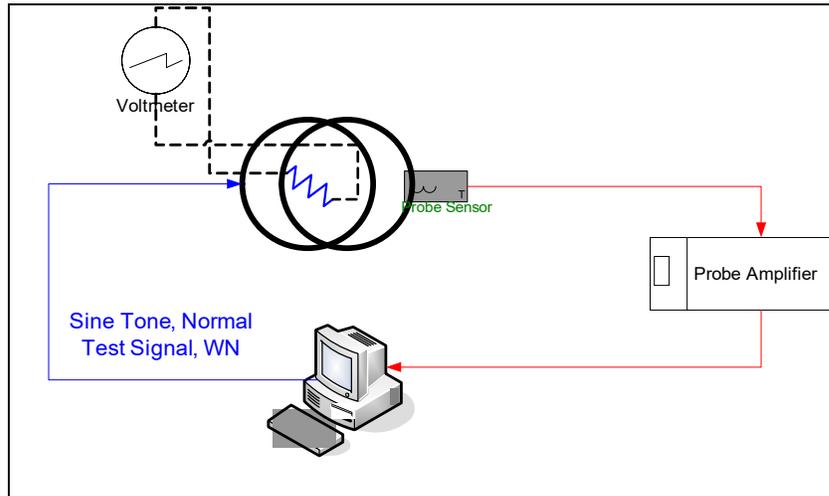


Figure 4-1
Validation Setup with Helmholtz Coil

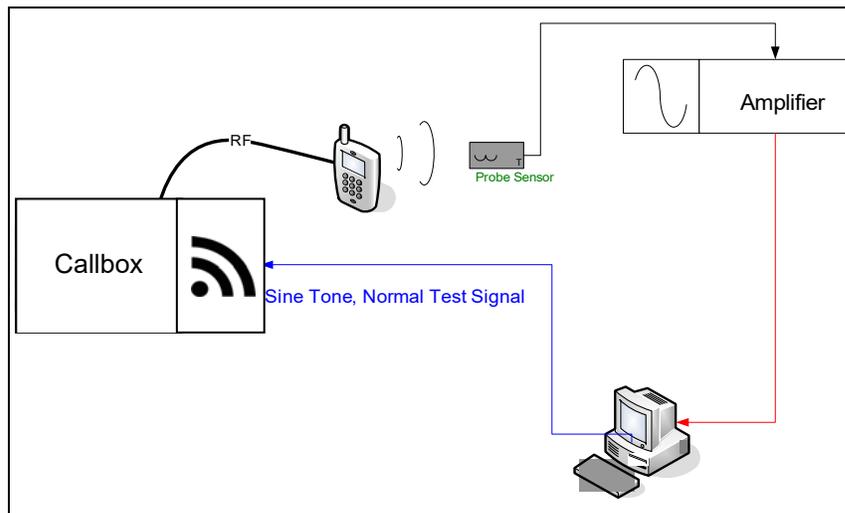


Figure 4-2
T-Coil Test Setup

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 8 of 111

II. Scanning Mechanism

Manufacturer:	TEM
Accuracy:	± 0.83 cm/meter
Minimum Step Size:	0.1 mm
Maximum speed	6.1 cm/sec
Line Voltage:	115 VAC
Line Frequency:	60 Hz
Material Composite:	Delrin (Acetal)
Data Control:	Parallel Port
Dynamic Range (X-Y-Z):	45 x 31.75 x 47 cm
Dimensions:	36" x 25" x 38"
Operating Area:	36" x 49" x 55"
Reflections:	< -20 dB (in anechoic chamber)




Figure 4-3
RF Near-Field Scanner

III. 3GPP2 Normal Test Signal (Speech)

Manufacturer:	3GPP2 (TIA 1042 §3.3.1)
	Modified-IRS weighted, multi-talker speech signal, 4 Male and 4
Stimulus Type:	Female speakers (alternating)
Single Sample Duration:	51.62 seconds
Activity Level:	77.4%

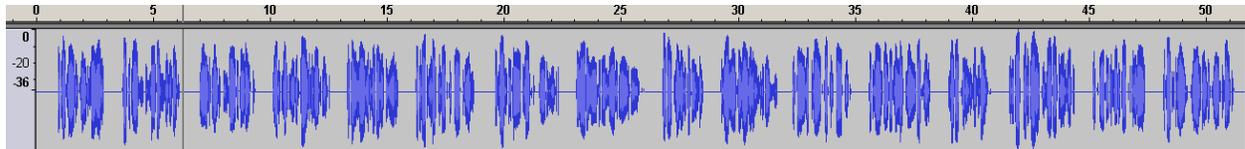


Figure 4-4
Temporal Characteristic of Normal Test Signal


FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 9 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

ABM1 Measurement Block Diagram:



ABM2 Measurement Block Diagram:




Figure 4-5 Magnetic Measurement Processing Steps

IV. Test Procedure

1. Ambient Noise Check per C63.19 §7.3.1
 - a. Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - b. “A-weighting” and Half-Band Integration was applied to the measurements.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

$$-18 - 30 - 10 = -58 \text{ dBA/m}$$
2. Measurement System Validation (See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - b. ABM1 Validation
 The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N\left(\frac{V}{R}\right)}{r\sqrt{1.25^3}}$$

Where H_c = magnetic field strength in amperes per meter
 N = number of turns per coil
 For the Helmholtz Coil, $N=20$; $r=0.08\text{m}$; $R=10.2\Omega$ and using $V=18\text{mV}$:

$$H_c = \frac{20 \cdot \left(\frac{0.018}{10.2}\right)}{0.08 \cdot \sqrt{1.25^3}} = 0.316 \text{ A/m} \approx -10 \text{ dB(A/m)}$$

Therefore a pure tone of 1kHz was applied into the coils such that 18mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 10 of 111

measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Page 60).

c. Frequency Response Validation

The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the Normal signal as shown below:




Figure 4-6 Frequency Response Validation

d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

**Table 4-1
ABM2 Frequency Response Validation**

f (Hz)	HBI, A - Measured (dB re 1kHz)	HBI, A - Theoretical (dB re 1kHz)	dB Var.
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 11 of 111

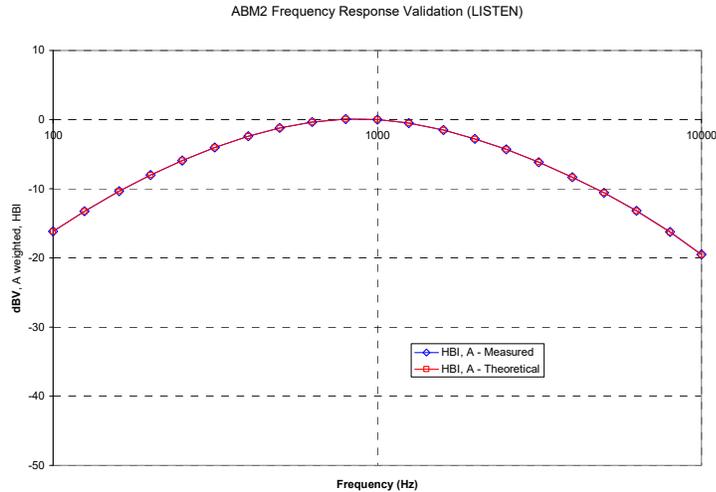


Figure 4-7
ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-8). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:

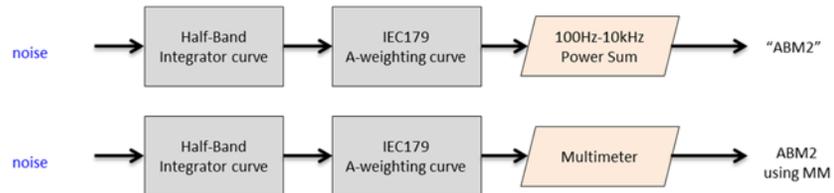


Figure 4-8
ABM2 Validation Block Diagram

The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2
ABM2 Power Sum Validation

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.36	-60.2	0.16
-50	-50.19	-50.13	0.06
-40	-40.14	-40.03	0.11
-30	-30.13	-30.01	0.12
-20	-20.12	-20	0.12
-10	-10.14	-10	0.14

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 12 of 111

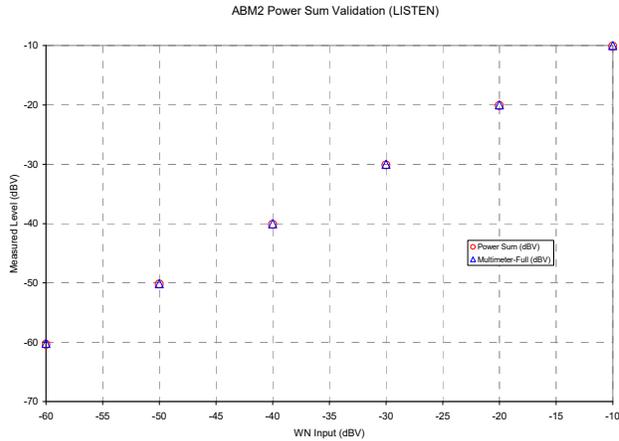


Figure 4-9
ABM2 Power Sum Validation

3. Measurement Test Setup

a. Fine scan above the WD (TEM)

- i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-11, the grid is not to scale but merely a graphical representation of the coordinate system in use):

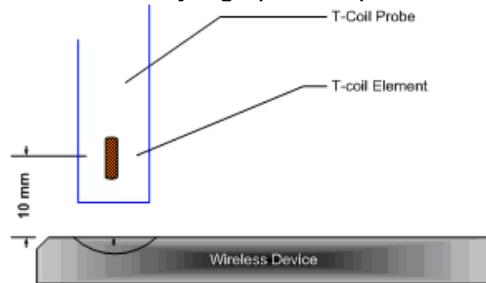


Figure 4-10
Measurement Distance




Figure 4-11
Measurement Grid

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
 - iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-13 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
- i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
IDEN™	TDMA (22 and 11 Hz)	-18

FCC ID: A3LSMF711U	PCTEST Proud to be part of	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 13 of 111

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
 - iii. See Section 7 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
 - c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
 - d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 8 for more information regarding worst-case configurations for CDMA and UMTS. LTE configuration information can be found in Section 5 and 7. NR configuration information can be found in Section 7. WIFI configuration information can be found in Section 6 and 7.)
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 – 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-6. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz – 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 14 of 111	

V. Test Setup

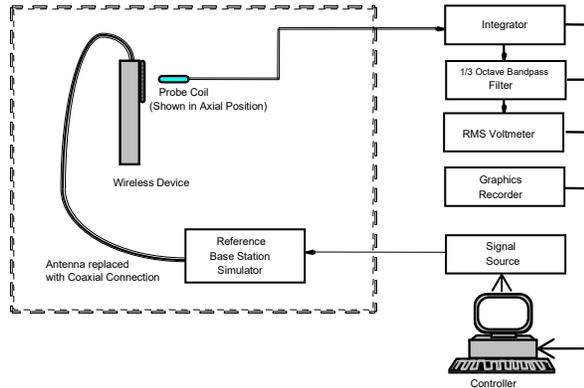


Figure 4-12
Audio Magnetic Field Test Setup

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 15 of 111

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes.

**Table 4-3
Center Channels and Frequencies**

Test frequencies & associated channels	
Channel	Frequency (MHz)
Cellular 850	
384 (CDMA)	836.52
190 (GSM)	836.60
4183 (UMTS)	836.60
AWS 1750	
1412 (UMTS)	1730.40
PCS 1900	
600 (CDMA)	1880
661 (GSM)	1880
9400 (UMTS)	1880

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for LTE TDD. The middle channel and supported bandwidths from the worst-case bands according to Table 7-7, and 7-8 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 9-5 to 9-18, and Tables 9-32 and 9-33 for LTE bandwidths and channels.

3. 5G (NR) Modes

The middle channel and supported bandwidths from the worst-case NR FDD band and NR TDD band according to Tables 7-13 & 7-14 was evaluated with OTT VoIP for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for NR TDD. See Tables 9-34 and 9-36 for NR bandwidths and channels.


4. WIFI

The middle channel for each IEEE 802.11 standard was tested for each probe orientation. The 2.4GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. The 5GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested on higher U-NII bands as well as applicable low and high channels. See Tables 9-19 to 9-28, and Tables 9-38 to 9-47 for WIFI standards and channels.

FCC ID: A3LSMF711U	 PCTEST Proud to be part of  Samsung	HAC (T-COIL) TEST REPORT	 Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 16 of 111

IX. Test Flow

The flow diagram below was followed (From C63.19):

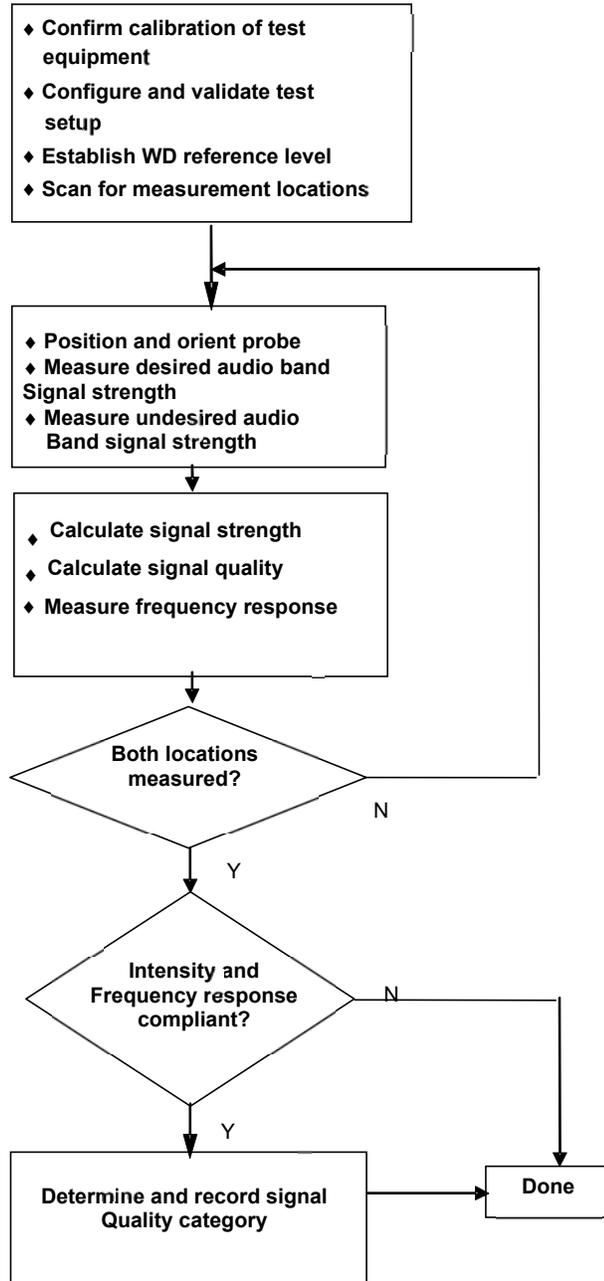

**Figure 4-13
C63.19 T-Coil Signal Test Process**

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 17 of 111

5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

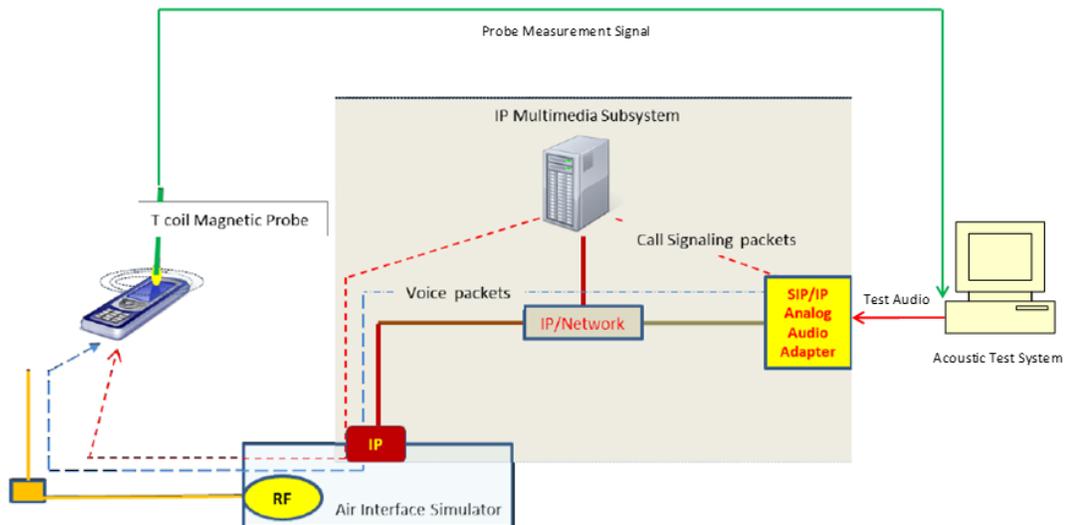


Figure 5-1
Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: A3LSMF711U	 <small>Head to the point of service</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 18 of 111	

II. DUT Configuration for VoLTE over IMS T-coil Testing

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 50%RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

Table 5-1
VoLTE over IMS SNNR by Radio Configuration

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
66	1745.0	132322	20	QPSK	1	0	5.74	-42.64	48.38
66	1745.0	132322	20	QPSK	1	50	5.73	-42.43	48.16
66	1745.0	132322	20	QPSK	1	99	5.76	-42.59	48.35
66	1745.0	132322	20	QPSK	50	0	5.76	-48.24	54.00
66	1745.0	132322	20	QPSK	50	25	5.79	-47.85	53.64
66	1745.0	132322	20	QPSK	50	50	5.59	-48.30	53.89
66	1745.0	132322	20	QPSK	100	0	5.79	-46.31	52.10
66	1745.0	132322	20	16QAM	1	0	5.59	-36.53	42.12
66	1745.0	132322	20	16QAM	1	50	5.53	-36.12	41.65
66	1745.0	132322	20	16QAM	1	99	5.55	-36.61	42.16
66	1745.0	132322	20	16QAM	50	0	5.65	-47.04	52.69
66	1745.0	132322	20	16QAM	50	25	5.80	-46.87	52.67
66	1745.0	132322	20	16QAM	50	50	5.57	-46.87	52.44
66	1745.0	132322	20	16QAM	100	0	5.57	-46.60	52.17
66	1745.0	132322	20	64QAM	1	0	5.56	-38.69	44.25
66	1745.0	132322	20	64QAM	1	50	5.59	-39.15	44.74
66	1745.0	132322	20	64QAM	1	99	5.71	-39.21	44.92
66	1745.0	132322	20	64QAM	50	0	5.59	-47.64	53.23
66	1745.0	132322	20	64QAM	50	25	5.67	-47.66	53.33
66	1745.0	132322	20	64QAM	50	50	5.64	-47.41	53.05
66	1745.0	132322	20	64QAM	100	0	5.78	-47.04	52.82
66	1745.0	132322	20	256QAM	1	0	5.76	-42.57	48.33
66	1745.0	132322	20	256QAM	1	50	5.65	-42.53	48.18
66	1745.0	132322	20	256QAM	1	99	5.48	-43.09	48.57
66	1745.0	132322	20	256QAM	50	0	5.86	-48.02	53.88
66	1745.0	132322	20	256QAM	50	25	5.59	-48.15	53.74
66	1745.0	132322	20	256QAM	50	50	5.73	-47.84	53.57
66	1745.0	1323222	20	256QAM	100	0	5.74	-47.69	53.43

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 19 of 111

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

Table 5-2
AMR Codec Investigation – VoLTE over IMS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	6.70	5.76	9.80	8.45	Axial	LTE Band 66 20MHz	132322
ABM2 (dBA/m)	-36.24	-36.94	-37.41	-36.87			
Frequency Response	Pass	Pass	Pass	Pass			
S+N/N (dB)	42.94	42.70	47.21	45.32			

Table 5-3
EVS Codec Investigation - VoLTE over IMS

Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps	EVS Primary WB 5.9kbps	EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	8.66	8.01	6.83	6.56	9.46	8.91	Axial	LTE Band 66 20MHz	132322
ABM2 (dBA/m)	-36.78	-36.68	-36.88	-37.13	-37.57	-37.59			
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass			
S+N/N (dB)	45.44	44.69	43.71	43.69	47.03	46.50			

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = “Max Power”




Figure 5-2
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 20 of 111

3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length $T_f = 307200 \cdot T_s = 10$ ms, where T_s is a number of time units equal to $1/(15000 \times 2048)$ seconds. Additionally, each radio frame consists of 10 subframes, each of length $30720 \cdot T_s = 1$ ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is $2192 \cdot T_s$ which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Table 5-4
Uplink-Downlink Configurations for Type 2 Frame Structures

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number										Calculated Transmission Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

a. Power Class 3 Uplink-Downlink Configuration Investigation

Power Class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 50%RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 0 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-5
Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	50	0	5.68	-32.35	38.03
2593.0	40620	20	16QAM	1	50	1	5.88	-33.12	39.00
2593.0	40620	20	16QAM	1	50	2	5.91	-34.33	40.24
2593.0	40620	20	16QAM	1	50	3	5.81	-36.27	42.08
2593.0	40620	20	16QAM	1	50	4	5.89	-36.90	42.79
2593.0	40620	20	16QAM	1	50	5	5.84	-35.08	40.92
2593.0	40620	20	16QAM	1	50	6	5.70	-32.86	38.56

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 21 of 111

b. Power Class 2 Uplink-Downlink Configuration Investigation

Power Class 2 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 50%RB Offset. For Power Class 2, configurations 1-5 are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 2 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

**Table 5-6
Power Class 2 VoLTE over IMS SNNR by UL-DL Configuration**

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	50	1	5.51	-28.38	33.89
2593.0	40620	20	16QAM	1	50	2	5.49	-29.58	35.07
2593.0	40620	20	16QAM	1	50	3	5.96	-30.99	36.95
2593.0	40620	20	16QAM	1	50	4	5.71	-31.54	37.25
2593.0	40620	20	16QAM	1	50	5	5.59	-31.93	37.52

Note: LTE TDD B41 Power Class 2 only supports UL-DL configurations 1-5, not 0 or 6.

c. Conclusion

Per the investigations above, UL-DL Configuration 0 was used to evaluate Power Class 3 VoLTE over IMS and UL-DL Configuration 1 was used to evaluate Power Class 2 VoLTE over IMS.

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of delivery</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 22 of 111

6. VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoWIFI over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

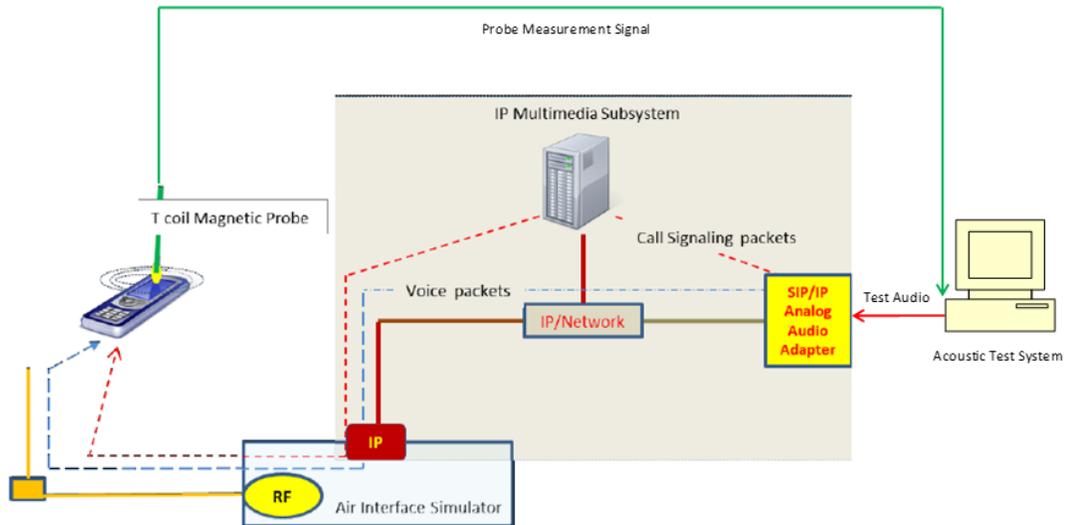


Figure 6-1
Test Setup for VoWIFI over IMS T-Coil Measurements

2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level². The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

² FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 23 of 111

II. DUT Configuration for VoWiFi over IMS T-coil Testing

1. Radio Configuration (Variant N)

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

Table 6-1
IEEE 802.11b SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11b	6	DSSS	1	1.76	-33.66	35.42
IEEE 802.11b	6	DSSS	2	1.81	-33.68	35.49
IEEE 802.11b	6	CCK	5.5	2.04	-34.32	36.36
IEEE 802.11b	6	CCK	11	1.70	-33.27	34.97

Table 6-2
IEEE 802.11g/a SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11g	6	BPSK	6	1.61	-33.10	34.71
IEEE 802.11g	6	BPSK	9	1.57	-34.17	35.74
IEEE 802.11g	6	QPSK	12	1.62	-33.85	35.47
IEEE 802.11g	6	QPSK	18	1.58	-34.37	35.95
IEEE 802.11g	6	16QAM	24	1.66	-34.60	36.26
IEEE 802.11g	6	16QAM	36	1.57	-33.00	34.57
IEEE 802.11g	6	64QAM	48	1.57	-33.45	35.02
IEEE 802.11g	6	64QAM	54	1.64	-33.20	34.84

Table 6-3
IEEE 802.11n/ac 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	20	40	BPSK	0	1.95	-33.92	35.87
IEEE 802.11n	20	40	QPSK	1	1.82	-33.08	34.90
IEEE 802.11n	20	40	QPSK	2	2.15	-34.45	36.60
IEEE 802.11n	20	40	16QAM	3	1.87	-32.81	34.68
IEEE 802.11n	20	40	16QAM	4	1.86	-34.04	35.90
IEEE 802.11n	20	40	64QAM	5	2.11	-33.97	36.08
IEEE 802.11n	20	40	64QAM	6	1.71	-34.33	36.04
IEEE 802.11n	20	40	64QAM	7	2.00	-34.86	36.86
IEEE 802.11ac	20	40	256QAM	8	1.92	-34.50	36.42

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 24 of 111

Table 6-4
IEEE 802.11ax SU 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax SU	20	40	BPSK	0	1.95	-33.60	35.55
IEEE 802.11ax SU	20	40	QPSK	1	1.91	-33.82	35.73
IEEE 802.11ax SU	20	40	QPSK	2	1.81	-33.51	35.32
IEEE 802.11ax SU	20	40	16QAM	3	1.85	-33.73	35.58
IEEE 802.11ax SU	20	40	16QAM	4	1.97	-34.04	36.01
IEEE 802.11ax SU	20	40	64QAM	5	2.03	-33.99	36.02
IEEE 802.11ax SU	20	40	64QAM	6	1.79	-32.92	34.71
IEEE 802.11ax SU	20	40	64QAM	7	2.03	-33.92	35.95
IEEE 802.11ax SU	20	40	256QAM	8	2.16	-33.76	35.92
IEEE 802.11ax SU	20	40	256QAM	9	2.15	-33.84	35.99
IEEE 802.11ax SU	20	40	1024QAM	10	2.14	-33.97	36.11
IEEE 802.11ax SU	20	40	1024QAM	11	2.12	-34.10	36.22

Table 6-5
IEEE 802.11ax RU 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	RU Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax RU	20	40	64QAM	6	0	1.99	-34.15	36.14
IEEE 802.11ax RU	20	40	64QAM	6	8	2.00	-34.19	36.19
IEEE 802.11ax RU	20	40	64QAM	6	37	2.00	-34.26	36.26
IEEE 802.11ax RU	20	40	64QAM	6	40	2.08	-33.12	35.20
IEEE 802.11ax RU	20	40	64QAM	6	53	1.90	-33.94	35.84
IEEE 802.11ax RU	20	40	64QAM	6	54	2.00	-33.51	35.51
IEEE 802.11ax RU	20	40	64QAM	6	61	1.98	-33.05	35.03

Table 6-6
IEEE 802.11n/ac 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	40	38	BPSK	0	2.02	-34.28	36.30
IEEE 802.11n	40	38	QPSK	1	2.03	-33.89	35.92
IEEE 802.11n	40	38	QPSK	2	2.07	-34.39	36.46
IEEE 802.11n	40	38	16QAM	3	1.99	-34.20	36.19
IEEE 802.11n	40	38	16QAM	4	1.91	-34.54	36.45
IEEE 802.11n	40	38	64QAM	5	2.05	-32.33	34.38
IEEE 802.11n	40	38	64QAM	6	2.11	-34.24	36.35
IEEE 802.11n	40	38	64QAM	7	1.96	-35.34	37.30
IEEE 802.11ac	40	38	256QAM	8	2.00	-33.90	35.90
IEEE 802.11ac	40	38	256QAM	9	1.83	-34.33	36.16

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of delivery</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 25 of 111

Table 6-7
IEEE 802.11ax SU 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax SU	40	38	BPSK	0	2.07	-33.73	35.80
IEEE 802.11ax SU	40	38	QPSK	1	1.85	-34.08	35.93
IEEE 802.11ax SU	40	38	QPSK	2	1.67	-34.07	35.74
IEEE 802.11ax SU	40	38	16QAM	3	1.72	-33.74	35.46
IEEE 802.11ax SU	40	38	16QAM	4	2.08	-33.94	36.02
IEEE 802.11ax SU	40	38	64QAM	5	1.99	-32.41	34.40
IEEE 802.11ax SU	40	38	64QAM	6	1.80	-33.08	34.88
IEEE 802.11ax SU	40	38	64QAM	7	2.06	-32.69	34.75
IEEE 802.11ax SU	40	38	256QAM	8	1.97	-33.30	35.27
IEEE 802.11ax SU	40	38	256QAM	9	1.89	-34.13	36.02
IEEE 802.11ax SU	40	38	1024QAM	10	1.63	-33.33	34.96
IEEE 802.11ax SU	40	38	1024QAM	11	1.77	-34.62	36.39

Table 6-8
IEEE 802.11ax RU 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	RU Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax RU	40	38	64QAM	5	0	1.87	-34.08	35.95
IEEE 802.11ax RU	40	38	64QAM	5	17	2.03	-33.24	35.27
IEEE 802.11ax RU	40	38	64QAM	5	37	1.92	-34.69	36.61
IEEE 802.11ax RU	40	38	64QAM	5	44	1.52	-33.79	35.31
IEEE 802.11ax RU	40	38	64QAM	5	53	1.92	-33.77	35.69
IEEE 802.11ax RU	40	38	64QAM	5	56	1.74	-34.30	36.04
IEEE 802.11ax RU	40	38	64QAM	5	61	1.95	-33.69	35.64
IEEE 802.11ax RU	40	38	64QAM	5	62	2.02	-33.81	35.83
IEEE 802.11ax RU	40	38	64QAM	5	65	1.85	-33.91	35.76

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of delivery</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 26 of 111

2. Codec Configuration (Variant N)

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

Table 6-9
AMR Codec Investigation – VoWIFI over IMS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	2.86	1.72	5.79	4.63	Axial	2.4GHz	IEEE 802.11b	6
ABM2 (dBA/m)	-34.09	-33.78	-33.65	-33.90				
Frequency Response	Pass	Pass	Pass	Pass				
S+N/N (dB)	36.95	35.50	39.44	38.53				

Table 6-10
EVS Codec Investigation – VoWIFI over IMS

Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps	EVS Primary WB 5.9kbps	EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	4.88	4.17	3.05	2.79	5.58	4.35	Axial	2.4GHz	IEEE 802.11b	6
ABM2 (dBA/m)	-33.77	-34.12	-34.05	-34.25	-33.54	-33.93				
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass				
S+N/N (dB)	38.65	38.29	37.10	37.04	39.12	38.28				

- Mute on; Backlight off; Max Volume; Max Contrast




Figure 6-2
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 27 of 111

3. Radio Configuration (Variant Q)

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

Table 6-11
IEEE 802.11b SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11b	6	DSSS	1	1.60	-34.05	35.65
IEEE 802.11b	6	DSSS	2	1.51	-33.65	35.16
IEEE 802.11b	6	CCK	5.5	1.53	-32.48	34.01
IEEE 802.11b	6	CCK	11	1.55	-35.22	36.77

Table 6-12
IEEE 802.11g/a SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11g	6	BPSK	6	1.61	-34.62	36.23
IEEE 802.11g	6	BPSK	9	1.66	-35.16	36.82
IEEE 802.11g	6	QPSK	12	1.46	-34.88	36.34
IEEE 802.11g	6	QPSK	18	1.69	-34.11	35.80
IEEE 802.11g	6	16QAM	24	1.95	-34.17	36.12
IEEE 802.11g	6	16QAM	36	1.89	-36.58	38.47
IEEE 802.11g	6	64QAM	48	1.74	-34.24	35.98
IEEE 802.11g	6	64QAM	54	1.80	-34.38	36.18

Table 6-13
IEEE 802.11n/ac 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	20	40	BPSK	0	1.45	-35.81	37.26
IEEE 802.11n	20	40	QPSK	1	1.69	-34.40	36.09
IEEE 802.11n	20	40	QPSK	2	1.75	-34.64	36.39
IEEE 802.11n	20	40	16QAM	3	1.54	-34.82	36.36
IEEE 802.11n	20	40	16QAM	4	1.54	-34.51	36.05
IEEE 802.11n	20	40	64QAM	5	1.71	-34.85	36.56
IEEE 802.11n	20	40	64QAM	6	1.69	-35.34	37.03
IEEE 802.11n	20	40	64QAM	7	1.73	-35.33	37.06
IEEE 802.11ac	20	40	256QAM	8	1.59	-35.80	37.39

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 28 of 111

Table 6-14
IEEE 802.11ax SU 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax SU	20	40	BPSK	0	1.77	-35.31	37.08
IEEE 802.11ax SU	20	40	QPSK	1	1.74	-34.18	35.92
IEEE 802.11ax SU	20	40	QPSK	2	1.41	-35.09	36.50
IEEE 802.11ax SU	20	40	16QAM	3	1.72	-34.50	36.22
IEEE 802.11ax SU	20	40	16QAM	4	1.80	-35.05	36.85
IEEE 802.11ax SU	20	40	64QAM	5	1.58	-35.05	36.63
IEEE 802.11ax SU	20	40	64QAM	6	1.54	-35.37	36.91
IEEE 802.11ax SU	20	40	64QAM	7	1.60	-34.98	36.58
IEEE 802.11ax SU	20	40	256QAM	8	1.55	-34.76	36.31
IEEE 802.11ax SU	20	40	256QAM	9	1.57	-35.13	36.70
IEEE 802.11ax SU	20	40	1024QAM	10	1.71	-35.08	36.79
IEEE 802.11ax SU	20	40	1024QAM	11	1.67	-35.35	37.02

Table 6-15
IEEE 802.11ax RU 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	RU Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax RU	20	40	QPSK	1	0	1.73	-34.86	36.59
IEEE 802.11ax RU	20	40	QPSK	1	8	1.62	-34.70	36.32
IEEE 802.11ax RU	20	40	QPSK	1	37	1.57	-34.34	35.91
IEEE 802.11ax RU	20	40	QPSK	1	40	1.60	-34.87	36.47
IEEE 802.11ax RU	20	40	QPSK	1	53	1.84	-34.90	36.74
IEEE 802.11ax RU	20	40	QPSK	1	54	1.67	-34.35	36.02
IEEE 802.11ax RU	20	40	QPSK	1	61	1.59	-34.52	36.11

Table 6-16
IEEE 802.11n/ac 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	40	38	BPSK	0	1.64	-34.17	35.81
IEEE 802.11n	40	38	QPSK	1	1.57	-34.50	36.07
IEEE 802.11n	40	38	QPSK	2	1.62	-33.84	35.46
IEEE 802.11n	40	38	16QAM	3	1.53	-34.30	35.83
IEEE 802.11n	40	38	16QAM	4	1.68	-34.63	36.31
IEEE 802.11n	40	38	64QAM	5	1.61	-34.07	35.68
IEEE 802.11n	40	38	64QAM	6	1.65	-35.02	36.67
IEEE 802.11n	40	38	64QAM	7	1.40	-34.63	36.03
IEEE 802.11ac	40	38	256QAM	8	1.44	-34.96	36.40
IEEE 802.11ac	40	38	256QAM	9	1.79	-34.85	36.64

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 29 of 111

Table 6-17
IEEE 802.11ax SU 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax SU	40	38	BPSK	0	1.77	-34.75	36.52
IEEE 802.11ax SU	40	38	QPSK	1	1.56	-34.97	36.53
IEEE 802.11ax SU	40	38	QPSK	2	1.55	-35.12	36.67
IEEE 802.11ax SU	40	38	16QAM	3	1.52	-34.70	36.22
IEEE 802.11ax SU	40	38	16QAM	4	1.59	-35.31	36.90
IEEE 802.11ax SU	40	38	64QAM	5	1.53	-35.35	36.88
IEEE 802.11ax SU	40	38	64QAM	6	1.81	-34.96	36.77
IEEE 802.11ax SU	40	38	64QAM	7	1.81	-35.01	36.82
IEEE 802.11ax SU	40	38	256QAM	8	1.89	-35.20	37.09
IEEE 802.11ax SU	40	38	256QAM	9	1.86	-35.05	36.91
IEEE 802.11ax SU	40	38	1024QAM	10	1.86	-35.31	37.17
IEEE 802.11ax SU	40	38	1024QAM	11	1.80	-35.74	37.54

Table 6-18
IEEE 802.11ax RU 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	RU Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax RU	40	38	16QAM	3	0	1.82	-35.04	36.86
IEEE 802.11ax RU	40	38	16QAM	3	17	1.85	-34.40	36.25
IEEE 802.11ax RU	40	38	16QAM	3	37	1.82	-34.94	36.76
IEEE 802.11ax RU	40	38	16QAM	3	44	1.81	-35.01	36.82
IEEE 802.11ax RU	40	38	16QAM	3	53	1.83	-34.67	36.50
IEEE 802.11ax RU	40	38	16QAM	3	56	1.85	-34.74	36.59
IEEE 802.11ax RU	40	38	16QAM	3	61	1.85	-34.24	36.09
IEEE 802.11ax RU	40	38	16QAM	3	62	1.89	-34.61	36.50
IEEE 802.11ax RU	40	38	16QAM	3	65	1.87	-35.31	37.18

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of delivery</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 30 of 111

4. Codec Configuration (Variant Q)

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoWiFi over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

Table 6-19
AMR Codec Investigation – VoWiFi over IMS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	2.55	1.55	4.99	5.07	Axial	2.4GHz	IEEE 802.11b	6
ABM2 (dBA/m)	-34.08	-34.02	-34.17	-34.19				
Frequency Response	Pass	Pass	Pass	Pass				
S+N/N (dB)	36.63	35.57	39.16	39.26				

Table 6-20
EVS Codec Investigation – VoWiFi over IMS

Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps	EVS Primary WB 5.9kbps	EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	4.44	3.74	2.43	2.21	5.10	4.02	Axial	2.4GHz	IEEE 802.11b	6
ABM2 (dBA/m)	-33.89	-33.93	-34.33	-34.40	-34.06	-34.65				
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass				
S+N/N (dB)	38.33	37.67	36.76	36.61	39.16	38.67				

- Mute on; Backlight off; Max Volume; Max Contrast




Figure 6-3
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 31 of 111

7. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation³. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

II. DUT Configuration for OTT VoIP T-Coil Testing

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

**Table 7-1
Codec Investigation – OTT VoIP (EvDO)**

Codec Setting:	75kbps	6kbps	Orientation	Channel
ABM1 (dBA/m)	16.51	16.39	Axial	600
ABM2 (dBA/m)	-37.89	-37.49		
Frequency Response	Pass	Pass		
S+N/N (dB)	54.40	53.88		

³ FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 32 of 111

Table 7-2
Codec Investigation – OTT VoIP (EDGE)

Codec Setting:	75kbps	6kbps	Orientation	Channel
ABM1 (dBA/m)	16.18	16.13	Axial	661
ABM2 (dBA/m)	-25.19	-23.98		
Frequency Response	Pass	Pass		
S+N/N (dB)	41.37	40.11		

Table 7-3
Codec Investigation – OTT VoIP (HSPA)

Codec Setting:	75kbps	6kbps	Orientation	Channel
ABM1 (dBA/m)	16.23	16.10	Axial	9400
ABM2 (dBA/m)	-38.30	-37.28		
Frequency Response	Pass	Pass		
S+N/N (dB)	54.53	53.38		

Table 7-4
Codec Investigation – OTT VoIP (LTE)

Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	16.23	16.09	Axial	LTE Band 66 20MHz	132322
ABM2 (dBA/m)	-35.46	-34.73			
Frequency Response	Pass	Pass			
S+N/N (dB)	51.69	50.82			

Table 7-5
Codec Investigation – OTT VoIP (WIFI – Variant N)

Codec Setting:	75kbps	6kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	16.54	16.18	Axial	2.4GHz	IEEE 802.11b	6
ABM2 (dBA/m)	-34.13	-34.30				
Frequency Response	Pass	Pass				
S+N/N (dB)	50.67	50.48				

Table 7-6
Codec Investigation – OTT VoIP (WIFI – Variant Q)

Codec Setting:	75kbps	6kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	16.58	16.38	Axial	2.4GHz	IEEE 802.11b	6
ABM2 (dBA/m)	-35.10	-33.96				
Frequency Response	Pass	Pass				
S+N/N (dB)	51.68	50.34				

- Mute on; Backlight off; Max Volume; Max Contrast
- Radio Configurations can be found in Section 9.II.1




Figure 7-1
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMF711U	PCTEST Proud to be part of Samsung	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 33 of 111

2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 71 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE FDD bands:

Table 7-7
OTT VoIP (LTE FDD) SNNR by LTE Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
71	680.5	133297	20	16QAM	1	50	16.09	-33.50	49.59
12	707.5	23095	10	16QAM	1	50	16.07	-35.91	51.98
13	782.0	23230	10	16QAM	1	50	16.16	-34.70	50.86
14	793.0	23330	10	16QAM	1	50	15.98	-33.69	49.67
26	831.5	26865	15	16QAM	1	50	16.12	-36.39	52.51
5	836.5	20525	10	16QAM	1	50	16.26	-36.14	52.40
66	1745.0	132322	20	16QAM	1	50	16.21	-34.92	51.13
2	1880.0	18900	20	16QAM	1	50	16.09	-34.90	50.99
25	1882.5	26365	20	16QAM	1	50	16.17	-34.54	50.71
30	2310.0	27710	10	16QAM	1	50	16.24	-35.44	51.68
7	2535.0	21100	20	16QAM	1	50	16.16	-34.91	51.07

An investigation was performed to determine the worst-case LTE TDD band to be used for OTT VoIP testing. LTE TDD Band 41 (PC2) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE TDD bands:

Table 7-8
OTT VoIP (LTE TDD) SNNR by LTE Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
41 (PC3)	2593.0	40620	20	16QAM	1	50	16.15	-33.34	49.49
41 (PC2)	2593.0	40620	20	16QAM	1	50	15.79	-29.56	45.35
48	3625.0	55990	20	16QAM	1	50	16.10	-31.26	47.36

3. LTE FDD Uplink Carrier Aggregation for OTT VoIP

LTE FDD ULCA was evaluated to ensure LTE FDD standalone was the worst-case scenario. The configurations in Table 7-9 were determined from Table 7-7 and satisfy the configuration requirements as defined in 3GPP 36.101.

Table 7-9
LTE FDD SNNR for OTT VoIP Uplink Carrier Aggregation

Combination	PCC							SCC							ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset			
CA_5B	LTE B5	10	20525	836.5	16QAM	1	0	LTE B5	5	20453	829.3	16QAM	1	24	16.14	-36.53	52.67
CA_66B	LTE B66	10	132322	1745.0	16QAM	1	0	LTE B66	10	132223	1735.1	16QAM	1	49	16.21	-35.14	51.35
CA_66C	LTE B66	20	132322	1745.0	16QAM	1	0	LTE B66	20	132124	1725.5	16QAM	1	99	16.20	-35.40	51.60

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 34 of 111

4. LTE TDD Uplink Carrier Aggregation for OTT VoIP

LTE TDD ULCA was evaluated to ensure LTE TDD standalone was the worst-case scenario. The configurations in Table 7-10 were determined from Table 7-8 and satisfy the configuration requirements as defined in 3GPP 36.101.

Table 7-10
LTE TDD SNNR for OTT VoIP Uplink Carrier Aggregation

Combination	PCC							SCC							ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset			
CA_41C (PC3)	LTE B41	20	40620	2593.0	16QAM	1	0	LTE B41	20	40422	2573.2	16QAM	1	99	16.11	-35.22	51.33
CA_41C (PC2)	LTE B41	20	40620	2593.0	16QAM	1	0	LTE B41	20	40422	2573.2	16QAM	1	99	16.29	-29.36	45.65
CA_48C	LTE B48	20	55990	3625.0	16QAM	1	0	LTE B48	20	55792	3605.2	16QAM	1	99	16.00	-31.90	47.90

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 35 of 111	

5. Interim Procedure for evaluation OTT VoIP (NR)

The following procedure is used to evaluate OTT VoIP (NR) given equipment limitations.

- a. This procedure is applicable for OTT VoIP (NR) voice calls that use the same protocol, codec(s), and reference level as OTT VoIP (LTE) (i.e. -20dBm0).
- b. Establish the $ABM1_{NR}$ value by using the $ABM1_{LTE}$ magnetic intensity for an LTE call using a correlating LTE band through existing procedures and test equipment.
- c. Establish an $ABM2_{NR}$ value using factory test mode (FTM) to simulate a NR connection for the desired NR band and channel under test.
- d. The following information is documented in Section 9:
 - i. $ABM2_{LTE}$ and $ABM2_{NR}$ for respective tests.
 - ii. Calculate SNNR:
 1. $ABM1 = ABM1_{LTE}$
 2. $ABM2 = ABM2_{NR}$
 3. $SNNR_{NR} = [ABM1_{LTE} - ABM2_{NR}] - 3dB$
 - a. A 3dB margin is built in to ensure conservative results with this interim procedure.

The above is only applicable for OTT VoIP scenarios, this device does not support VoNR over IMS.

The manufacturer has confirmed the handset as designed is expected to exhibit similar audio intensity levels between an OTT VoIP call placed over a 4G LTE and a 5G Sub-6GHz data connection.

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 36 of 111	

6. Radio Configuration for OTT VoIP (NR)

An investigation was performed to determine the waveform, modulation, and RB configuration to be used for testing. Due to equipment limitations, the procedure outlined in 7.II.5 was used to evaluate the SNNR for each radio configuration below. DFT-s-OFDM 64QAM, 1RB, 99%RB offset was determined to be the worst-case configuration for the handset and will be used for full testing in Section 9.

**Table 7-11
NR OTT VoIP SNNR by Radio Configuration (CP-OFDM)**

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM _{1LTE} [dB(A/m)]	ABM _{2NR} [dB(A/m)]	SNNR _{NR} [dB]
n5	836.5	167300	20	CP-OFDM	QPSK	1	1	16.26	-40.79	57.05
n5	836.5	167300	20	CP-OFDM	QPSK	1	53	16.26	-40.51	56.77
n5	836.5	167300	20	CP-OFDM	QPSK	1	104	16.26	-40.72	56.98
n5	836.5	167300	20	CP-OFDM	QPSK	53	0	16.26	-44.18	60.44
n5	836.5	167300	20	CP-OFDM	QPSK	53	26	16.26	-44.47	60.73
n5	836.5	167300	20	CP-OFDM	QPSK	53	53	16.26	-44.46	60.72
n5	836.5	167300	20	CP-OFDM	QPSK	106	0	16.26	-44.09	60.35
n5	836.5	167300	20	CP-OFDM	16QAM	1	1	16.26	-40.62	56.88
n5	836.5	167300	20	CP-OFDM	16QAM	1	53	16.26	-40.54	56.80
n5	836.5	167300	20	CP-OFDM	16QAM	1	104	16.26	-40.08	56.34
n5	836.5	167300	20	CP-OFDM	16QAM	53	0	16.26	-43.77	60.03
n5	836.5	167300	20	CP-OFDM	16QAM	53	26	16.26	-43.66	59.92
n5	836.5	167300	20	CP-OFDM	16QAM	53	53	16.26	-43.79	60.05
n5	836.5	167300	20	CP-OFDM	16QAM	106	0	16.26	-43.77	60.03
n5	836.5	167300	20	CP-OFDM	64QAM	1	1	16.26	-40.56	56.82
n5	836.5	167300	20	CP-OFDM	64QAM	1	53	16.26	-39.71	55.97
n5	836.5	167300	20	CP-OFDM	64QAM	1	104	16.26	-39.85	56.11
n5	836.5	167300	20	CP-OFDM	64QAM	53	0	16.26	-43.58	59.84
n5	836.5	167300	20	CP-OFDM	64QAM	53	26	16.26	-43.78	60.04
n5	836.5	167300	20	CP-OFDM	64QAM	53	53	16.26	-43.72	59.98
n5	836.5	167300	20	CP-OFDM	64QAM	106	0	16.26	-43.63	59.89
n5	836.5	167300	20	CP-OFDM	256QAM	1	1	16.26	-40.00	56.26
n5	836.5	167300	20	CP-OFDM	256QAM	1	53	16.26	-39.95	56.21
n5	836.5	167300	20	CP-OFDM	256QAM	1	104	16.26	-40.54	56.80
n5	836.5	167300	20	CP-OFDM	256QAM	53	0	16.26	-44.36	60.62
n5	836.5	167300	20	CP-OFDM	256QAM	53	26	16.26	-43.96	60.22
n5	836.5	167300	20	CP-OFDM	256QAM	53	53	16.26	-44.02	60.28
n5	836.5	167300	20	CP-OFDM	256QAM	106	0	16.26	-44.39	60.65

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 37 of 111

Table 7-12
NR OTT VoIP SNNR by Radio Configuration (DFT-s-OFDM)

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB/(A/m)]	ABM2 _{NR} [dB/(A/m)]	SNNR _{NR} [dB]
n5	836.5	167300	20	DFT-s-OFDM	$\pi/2$ -BPSK	1	1	16.26	-42.73	58.99
n5	836.5	167300	20	DFT-s-OFDM	$\pi/2$ -BPSK	1	53	16.26	-42.59	58.85
n5	836.5	167300	20	DFT-s-OFDM	$\pi/2$ -BPSK	1	104	16.26	-42.70	58.96
n5	836.5	167300	20	DFT-s-OFDM	$\pi/2$ -BPSK	50	0	16.26	-44.43	60.69
n5	836.5	167300	20	DFT-s-OFDM	$\pi/2$ -BPSK	50	28	16.26	-44.30	60.56
n5	836.5	167300	20	DFT-s-OFDM	$\pi/2$ -BPSK	50	56	16.26	-44.55	60.81
n5	836.5	167300	20	DFT-s-OFDM	$\pi/2$ -BPSK	100	0	16.26	-44.33	60.59
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	1	16.26	-42.62	58.88
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	53	16.26	-42.32	58.58
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	104	16.26	-42.39	58.65
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	0	16.26	-43.31	59.57
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	28	16.26	-43.08	59.34
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	56	16.26	-43.99	60.25
n5	836.5	167300	20	DFT-s-OFDM	QPSK	100	0	16.26	-42.89	59.15
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	1	16.26	-42.42	58.68
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	53	16.26	-41.61	57.87
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	104	16.26	-41.70	57.96
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	0	16.26	-42.84	59.10
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	28	16.26	-43.78	60.04
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	56	16.26	-42.74	59.00
n5	836.5	167300	20	DFT-s-OFDM	16QAM	100	0	16.26	-43.69	59.95
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	1	16.26	-39.96	56.22
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	53	16.26	-39.15	55.41
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	104	16.26	-38.82	55.08
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	0	16.26	-44.13	60.39
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	28	16.26	-44.14	60.40
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	56	16.26	-44.32	60.58
n5	836.5	167300	20	DFT-s-OFDM	64QAM	100	0	16.26	-44.24	60.50
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	1	16.26	-40.59	56.85
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	53	16.26	-40.45	56.71
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	104	16.26	-39.77	56.03
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	0	16.26	-44.35	60.61
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	28	16.26	-44.28	60.54
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	56	16.26	-44.29	60.55
n5	836.5	1673000	20	DFT-s-OFDM	256QAM	100	0	16.26	-44.34	60.60

An investigation was performed to determine the worst-case NR FDD band to be used for OTT VoIP testing. NR n71 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR FDD bands:

Table 7-13
OTT VoIP (NR FDD) SNNR by Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB/(A/m)]	ABM2 _{NR} [dB/(A/m)]	SNNR _{NR} [dB]
n71	680.5	136100	20	DFT-s-OFDM	64QAM	1	104	16.09	-36.72	52.81
n12	707.5	141500	15	DFT-s-OFDM	64QAM	1	77	16.07	-37.93	54.00
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	104	16.26	-38.73	54.99
n66 (Ant A)	1745.0	349000	40	DFT-s-OFDM	64QAM	1	214	16.21	-39.33	55.54
n66 (Ant I)	1745.0	349000	40	DFT-s-OFDM	64QAM	1	214	16.21	-38.37	54.58
n25 (Ant A)	1882.5	376500	40	DFT-s-OFDM	64QAM	1	214	16.17	-38.61	54.78
n25 (Ant I)	1882.5	376500	40	DFT-s-OFDM	64QAM	1	214	16.17	-37.53	53.70
n30	2310.0	462000	10	DFT-s-OFDM	64QAM	1	50	16.24	-39.10	55.34

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT			Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 38 of 111	

An investigation was performed to determine the worst-case NR TDD band to be used for OTT VoIP testing. NR n77 (DoD, PC2) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR TDD bands:

Table 7-14
OTT VoIP (NR TDD) SNNR by Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	SNNR _{NR} [dB]
n41 (PC3)	2592.99	518598	100	DFT-s-OFDM	64QAM	1	271	16.15	-34.52	50.67
n41 (PC2)	2592.99	518598	100	DFT-s-OFDM	64QAM	1	271	15.79	-34.23	50.02
n77 (DoD, PC3)	3500.0	633334	100	DFT-s-OFDM	64QAM	1	271	16.10	-28.47	44.57
n77 (DoD, PC2)	3500.0	633334	100	DFT-s-OFDM	64QAM	1	271	16.10	-27.53	43.63
n77 (PC3)	3840.0	656000	100	DFT-s-OFDM	64QAM	1	271	16.10	-28.47	44.57
n77 (PC2)	3840.0	656000	100	DFT-s-OFDM	64QAM	1	271	16.10	-28.38	44.48

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 39 of 111

8. FCC 3G MEASUREMENTS

I. CDMA Test Configurations

Radio Configuration 1, Service Option 3 (thick, green data curve) was used for the testing as the worst-case configuration for the handset due to vocoder gating from the EVRC logic. See below plot for ABM noise comparison between operational field service options and radio configurations for a CDMA2000 handset:

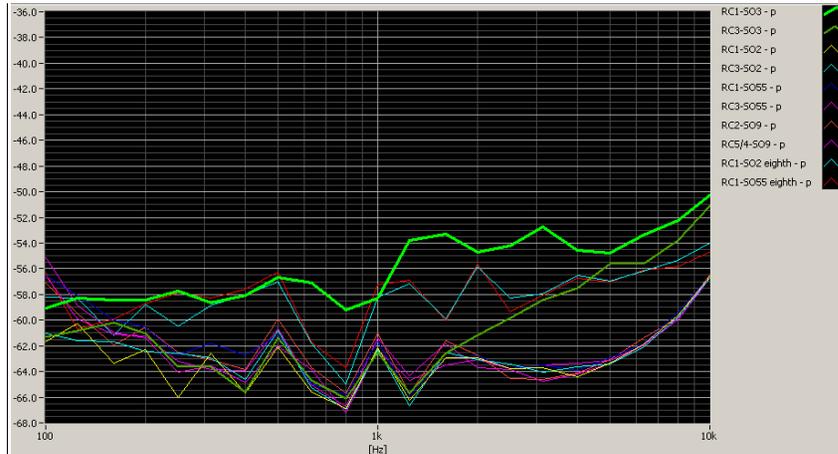


Figure 8-1
CDMA Audio Band Magnetic Noise

Table 8-1
FCC 3G ABM Measurements for A3LSMF711U (CDMA)

Configuration:	RC1/SO3	RC3/SO3	RC4/SO3	Orientation	Channel
ABM1 (dBA/m)	8.04	7.73	7.97	Axial	600
ABM2 (dBA/m)	-41.78	-47.05	-46.93		
Frequency Response	Pass	Pass	Pass		
S+N/N (dB)	49.82	54.78	54.90		

- Mute on; Backlight off; Max Volume; Max Contrast
- Power Control Bits = "All Up"




Figure 8-2
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMF711U	PCTEST Proud to be part of Samsung	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 40 of 111

II. UMTS Test Configurations

WB AMR at 6.60kbps was used for the testing as the worst-case configuration for the handset. See below for ABM noise comparison between vocoder rates:

Table 8-2
Codec Investigation - UMTS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Channel
ABM1 (dBA/m)	6.76	6.32	9.03	8.97	Axial	9400
ABM2 (dBA/m)	-48.89	-48.98	-48.92	-49.07		
Frequency Response	Pass	Pass	Pass	Pass		
S+N/N (dB)	55.65	55.30	57.95	58.04		

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC="All 1s"




Figure 8-3
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMF711U	 PCTEST Proud to be part of Samsung	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 41 of 111

9. T-COIL TEST SUMMARY

**Table 9-1
Consolidated Tabled Results**

		Freq. Response Margin		Magnetic Intensity Verdict		FCC SNNR Verdict		Margin from FCC Limit (dB)	C63.19-2011 Rating
		8.3.2		8.3.1		8.3.4			
		Axial	Radial	Axial	Radial	Axial	Radial		
CDMA	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-15.57	T4
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
EvDO (OTT VoIP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-24.50	T4
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-3.30	T3
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
EDGE (OTT VoIP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-10.11	T4
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
UMTS	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-24.94	T4
	AWS	PASS	NA	PASS	PASS	PASS	PASS		
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
HSPA (OTT VoIP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-28.08	T4
	AWS	PASS	NA	PASS	PASS	PASS	PASS		
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD	B71	PASS	NA	PASS	PASS	PASS	PASS	-13.13	T4
	B12	PASS	NA	PASS	PASS	PASS	PASS		
	B13	PASS	NA	PASS	PASS	PASS	PASS		
	B14	PASS	NA	PASS	PASS	PASS	PASS		
	B26	PASS	NA	PASS	PASS	PASS	PASS		
	B5	PASS	NA	PASS	PASS	PASS	PASS		
	B66	PASS	NA	PASS	PASS	PASS	PASS		
	B2	PASS	NA	PASS	PASS	PASS	PASS		
	B25	PASS	NA	PASS	PASS	PASS	PASS		
	B30	PASS	NA	PASS	PASS	PASS	PASS		
B7	PASS	NA	PASS	PASS	PASS	PASS			
LTE FDD (OTT VoIP)	B71	PASS	NA	PASS	PASS	PASS	PASS	-20.24	T4
LTE TDD	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS	-7.40	T3
	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS		
	B48	PASS	NA	PASS	PASS	PASS	PASS		
LTE TDD (OTT VoIP)	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-18.58	T4
NR FDD (OTT VoIP)	n71	NA	NA	PASS	PASS	PASS	PASS	-21.34	T4
NR TDD (OTT VoIP)	n77 (DoD, PC2)	NA	NA	PASS	PASS	PASS	PASS	-9.50	T3

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 42 of 111	

		Freq. Response Margin		Magnetic Intensity Verdict		FCC SNNR Verdict		Margin from FCC Limit (dB)	C63.19-2011 Rating	
		8.3.2		8.3.1		8.3.4				
C63.19 Section		Axial	Radial	Axial	Radial	Axial	Radial			
Variant - N	WLAN	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS	-6.93	T3
		IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
	WLAN (OTT VoIP)	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS	-24.12	T4
		IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
	U-NII	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS	-8.20	T3
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
	U-NII (OTT VoIP)	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS	-22.48	T4
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
Variant - Q	WLAN	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS	-5.91	T3
		IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
	WLAN (OTT VoIP)	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS	-21.16	T4
		IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
	U-NII	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS	-8.10	T3
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
	U-NII (OTT VoIP)	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS	-23.18	T4
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
		IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 43 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

I. Raw Handset Data

Table 9-2
Raw Data Results for CDMA

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
Cellular	Axial	1013	0187M	7.76	-34.52	-64.55	2.00	42.28	20.00	-22.28	T4	1.8, 1.6
		384	0187M	7.83	-34.46		2.00	42.29	20.00	-22.29	T4	
		777	0187M	8.19	-33.89		2.00	42.08	20.00	-22.08	T4	
	Radial	1013	0187M	-0.29	-36.57	-63.48	N/A	36.28	20.00	-16.28	T4	1.8, 2.2
		384	0187M	-0.26	-36.62			36.36	20.00	-16.36	T4	
		777	0187M	-0.48	-36.05			35.57	20.00	-15.57	T4	
PCS	Axial	25	0187M	8.11	-40.90	-64.55	2.00	49.01	20.00	-29.01	T4	1.8, 1.6
		600	0187M	7.71	-41.76		2.00	49.47	20.00	-29.47	T4	
		1175	0187M	7.75	-41.55		1.89	49.30	20.00	-29.30	T4	
	Radial	25	0187M	-0.56	-44.38	-63.48	N/A	43.82	20.00	-23.82	T4	1.8, 2.2
		600	0187M	-0.25	-44.75			44.50	20.00	-24.50	T4	
		1175	0187M	-0.37	-45.27			44.90	20.00	-24.90	T4	

Table 9-3
Raw Data Results for GSM

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
GSM850	Axial	128	0187M	10.40	-19.42	-64.55	2.00	29.82	20.00	-9.82	T3	1.8, 1.6
		190	0187M	10.58	-17.21		2.00	27.79	20.00	-7.79	T3	
		251	0187M	10.44	-18.16		2.00	28.60	20.00	-8.60	T3	
	Radial	128	0187M	2.17	-24.25	-64.01	N/A	26.42	20.00	-6.42	T3	1.8, 0.6
		190	0187M	2.19	-21.11			23.30	20.00	-3.30	T3	
		251	0187M	2.16	-22.15			24.31	20.00	-4.31	T3	
GSM1900	Axial	512	0187M	10.42	-24.78	-64.55	2.00	35.20	20.00	-15.20	T4	1.8, 1.6
		661	0187M	10.39	-24.58		2.00	34.97	20.00	-14.97	T4	
		810	0187M	10.38	-24.70		2.00	35.08	20.00	-15.08	T4	
	Radial	512	0187M	2.74	-37.13	-64.01	N/A	39.87	20.00	-19.87	T4	1.8, 2.2
		661	0187M	2.68	-36.59			39.27	20.00	-19.27	T4	
		810	0187M	2.67	-36.73			39.40	20.00	-19.40	T4	

Table 9-4
Raw Data Results for UMTS

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
UMTS V	Axial	4132	0187M	5.94	-49.99	-64.55	2.00	55.93	20.00	-35.93	T4	1.8, 1.6
		4183	0187M	5.89	-49.73		1.90	55.62	20.00	-35.62	T4	
		4233	0187M	5.90	-49.74		2.00	55.64	20.00	-35.64	T4	
	Radial	4132	0187M	-2.18	-47.26	-63.48	N/A	45.08	20.00	-25.08	T4	1.8, 2.2
		4183	0187M	-2.24	-47.40			45.16	20.00	-25.16	T4	
		4233	0187M	-1.90	-47.30			45.40	20.00	-25.40	T4	
UMTS IV	Axial	1312	0187M	6.00	-48.80	-64.55	2.00	54.80	20.00	-34.80	T4	1.8, 1.6
		1412	0187M	6.20	-49.05		2.00	55.25	20.00	-35.25	T4	
		1513	0187M	6.05	-49.11		2.00	55.16	20.00	-35.16	T4	
	Radial	1312	0187M	-2.23	-47.23	-63.48	N/A	45.00	20.00	-25.00	T4	1.8, 2.2
		1412	0187M	-2.21	-47.26			45.05	20.00	-25.05	T4	
		1513	0187M	-2.23	-47.75			45.52	20.00	-25.52	T4	
UMTS II	Axial	9262	0187M	6.36	-48.25	-64.55	2.00	54.61	20.00	-34.61	T4	1.8, 1.6
		9400	0187M	6.33	-48.61		2.00	54.94	20.00	-34.94	T4	
		9538	0187M	6.22	-48.84		2.00	55.06	20.00	-35.06	T4	
	Radial	9262	0187M	-2.15	-47.09	-63.48	N/A	44.94	20.00	-24.94	T4	1.8, 2.2
		9400	0187M	-2.15	-47.54			45.39	20.00	-25.39	T4	
		9538	0187M	-2.09	-47.27			45.18	20.00	-25.18	T4	

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 44 of 111

Table 9-5
Raw Data Results for LTE B71

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 71	Axial	20MHz	133297	0187M	5.70	-34.09	-64.55	2.00	39.79	20.00	-19.79	T4	1.8, 1.6
		15MHz	133297	0187M	5.96	-34.06		2.00	40.02	20.00	-20.02	T4	
		10MHz	133297	0187M	5.59	-34.25		1.96	39.84	20.00	-19.84	T4	
		5MHz	133447	0187M	5.80	-31.56		1.85	37.36	20.00	-17.36	T4	
		5MHz	133297	0187M	5.65	-34.11		2.00	39.76	20.00	-19.76	T4	
	5MHz	133147	0187M	5.67	-33.68	2.00	39.35	20.00	-19.35	T4			
	Radial	20MHz	133297	0187M	-2.30	-36.09	-63.48	N/A	33.79	20.00	-13.79	T4	1.8, 2.2
		15MHz	133397	0187M	-2.52	-35.65		33.13	20.00	-13.13	T4		
		15MHz	133297	0187M	-2.45	-35.80		33.35	20.00	-13.35	T4		
		15MHz	133197	0187M	-2.38	-38.02		35.64	20.00	-15.64	T4		
10MHz		133297	0187M	-2.24	-35.82	33.58		20.00	-13.58	T4			
5MHz	133297	0187M	-2.35	-35.90	33.55	20.00	-13.55	T4					

Table 9-6
Raw Data Results for LTE B12

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 12	Axial	10MHz	23095	0187M	5.95	-37.55	-64.55	2.00	43.50	20.00	-23.50	T4	1.8, 1.6
		5MHz	23095	0187M	5.74	-37.42		2.00	43.16	20.00	-23.16	T4	
		3MHz	23095	0187M	5.70	-38.27		1.94	43.97	20.00	-23.97	T4	
		1.4MHz	23095	0187M	6.09	-37.71		1.96	43.80	20.00	-23.80	T4	
	Radial	10MHz	23095	0187M	-2.36	-40.22	-63.48	N/A	37.86	20.00	-17.86	T4	1.8, 2.2
		5MHz	23095	0187M	-2.32	-39.30		36.98	20.00	-16.98	T4		
		3MHz	23095	0187M	-2.44	-40.33		37.89	20.00	-17.89	T4		
1.4MHz	23095	0187M	-2.10	-40.58	38.48	20.00	-18.48	T4					

Table 9-7
Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 13	Axial	10MHz	23230	0187M	5.77	-35.52	-64.55	1.97	41.29	20.00	-21.29	T4	1.8, 1.6
		5MHz	23230	0187M	5.90	-34.21		2.00	40.11	20.00	-20.11	T4	
	Radial	10MHz	23230	0187M	-2.31	-37.89	-63.48	N/A	35.58	20.00	-15.58	T4	1.8, 2.2
		5MHz	23230	0187M	-2.25	-36.54		34.29	20.00	-14.29	T4		

Table 9-8
Raw Data Results for LTE B14

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 14	Axial	10MHz	23330	0187M	5.67	-35.80	-64.55	2.00	41.47	20.00	-21.47	T4	1.8, 1.6
		5MHz	23330	0187M	5.58	-36.94		1.89	42.52	20.00	-22.52	T4	
	Radial	10MHz	23330	0187M	-2.43	-38.17	-63.48	N/A	35.74	20.00	-15.74	T4	1.8, 2.2
		5MHz	23330	0187M	-2.45	-39.73		37.28	20.00	-17.28	T4		

Table 9-9
Raw Data Results for LTE B26

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 26	Axial	15MHz	26865	0187M	5.78	-37.99	-64.55	2.00	43.77	20.00	-23.77	T4	1.8, 1.6
		10MHz	26865	0187M	6.10	-38.00		1.91	44.10	20.00	-24.10	T4	
		5MHz	26865	0187M	6.02	-37.79		1.90	43.81	20.00	-23.81	T4	
		3MHz	26865	0187M	5.89	-38.23		1.84	44.12	20.00	-24.12	T4	
		1.4MHz	26865	0187M	6.01	-38.67		2.00	44.68	20.00	-24.68	T4	
	Radial	15MHz	26865	0187M	-2.25	-40.19	-63.48	N/A	37.94	20.00	-17.94	T4	1.8, 2.2
		10MHz	26865	0187M	-2.08	-39.52		37.44	20.00	-17.44	T4		
		5MHz	26865	0187M	-2.30	-39.14		36.84	20.00	-16.84	T4		
		3MHz	26865	0187M	-2.15	-40.12		37.97	20.00	-17.97	T4		
		1.4MHz	26865	0187M	-2.39	-40.58		38.19	20.00	-18.19	T4		

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 45 of 111

Table 9-10
Raw Data Results for LTE B5

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 5	Axial	10MHz	20525	0187M	5.70	-38.75	-64.55	2.00	44.45	20.00	-24.45	T4	1.8, 1.6
		5MHz	20525	0187M	5.99	-37.91		2.00	43.90	20.00	-23.90	T4	
		3MHz	20525	0187M	5.78	-38.20		2.00	43.98	20.00	-23.98	T4	
		1.4MHz	20525	0187M	5.74	-38.26		1.99	44.00	20.00	-24.00	T4	
	Radial	10MHz	20525	0187M	-2.20	-39.43	-63.48	N/A	37.23	20.00	-17.23	T4	1.8, 2.2
		5MHz	20525	0187M	-2.19	-40.24			38.05	20.00	-18.05	T4	
		3MHz	20525	0187M	-2.14	-40.16			38.02	20.00	-18.02	T4	
		1.4MHz	20525	0187M	-2.04	-38.86			36.82	20.00	-16.82	T4	

Table 9-11
Raw Data Results for LTE B66

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 66	Axial	20MHz	132322	0187M	5.93	-37.34	-64.55	2.00	43.27	20.00	-23.27	T4	1.8, 1.6
		15MHz	132322	0187M	5.61	-37.42		1.95	43.03	20.00	-23.03	T4	
		10MHz	132322	0187M	5.76	-37.75		2.00	43.51	20.00	-23.51	T4	
		5MHz	132322	0187M	5.76	-37.64		2.00	43.40	20.00	-23.40	T4	
		3MHz	132322	0187M	5.76	-37.38		1.91	43.14	20.00	-23.14	T4	
		1.4MHz	132322	0187M	5.70	-37.66		2.00	43.36	20.00	-23.36	T4	
	Radial	20MHz	132322	0187M	-2.38	-39.81	-63.48	N/A	37.43	20.00	-17.43	T4	1.8, 2.2
		15MHz	132322	0187M	-2.15	-40.35			38.20	20.00	-18.20	T4	
		10MHz	132322	0187M	-2.53	-40.15			37.62	20.00	-17.62	T4	
		5MHz	132322	0187M	-2.33	-40.03			37.70	20.00	-17.70	T4	
		3MHz	132322	0187M	-2.37	-40.39			38.02	20.00	-18.02	T4	
		1.4MHz	132322	0187M	-2.35	-40.11			37.76	20.00	-17.76	T4	

Table 9-12
Raw Data Results for LTE B25

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 25	Axial	20MHz	26365	0187M	5.63	-35.51	-64.55	2.00	41.14	20.00	-21.14	T4	1.8, 1.6
		15MHz	26365	0187M	5.70	-36.06		2.00	41.76	20.00	-21.76	T4	
		10MHz	26365	0187M	6.00	-36.19		2.00	42.19	20.00	-22.19	T4	
		5MHz	26365	0187M	5.61	-36.25		2.00	41.86	20.00	-21.86	T4	
		3MHz	26365	0187M	5.59	-36.19		2.00	41.78	20.00	-21.78	T4	
		1.4MHz	26365	0187M	5.70	-37.03		1.94	42.73	20.00	-22.73	T4	
	Radial	20MHz	26365	0187M	-2.46	-39.36	-63.48	N/A	36.90	20.00	-16.90	T4	1.8, 2.2
		15MHz	26365	0187M	-2.48	-39.64			37.16	20.00	-17.16	T4	
		10MHz	26365	0187M	-2.49	-39.52			37.03	20.00	-17.03	T4	
		5MHz	26365	0187M	-2.44	-38.99			36.55	20.00	-16.55	T4	
		3MHz	26365	0187M	-2.43	-39.91			37.48	20.00	-17.48	T4	
		1.4MHz	26365	0187M	-2.47	-39.75			37.28	20.00	-17.28	T4	

Table 9-13
Raw Data Results for LTE B2

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 2	Axial	20MHz	18900	0187M	5.71	-36.89	-64.55	2.00	42.60	20.00	-22.60	T4	1.8, 1.6
		15MHz	18900	0187M	6.03	-37.00		2.00	43.03	20.00	-23.03	T4	
		10MHz	18900	0187M	5.56	-36.73		2.00	42.29	20.00	-22.29	T4	
		5MHz	18900	0187M	5.50	-36.49		2.00	41.99	20.00	-21.99	T4	
		3MHz	18900	0187M	5.66	-36.42		2.00	42.08	20.00	-22.08	T4	
		1.4MHz	18900	0187M	5.64	-36.67		1.91	42.31	20.00	-22.31	T4	
	Radial	20MHz	18900	0187M	-2.34	-39.19	-63.48	N/A	36.85	20.00	-16.85	T4	1.8, 2.2
		15MHz	18900	0187M	-2.21	-39.98			37.77	20.00	-17.77	T4	
		10MHz	18900	0187M	-2.21	-39.91			37.70	20.00	-17.70	T4	
		5MHz	18900	0187M	-2.33	-39.59			37.26	20.00	-17.26	T4	
		3MHz	18900	0187M	-2.36	-39.90			37.54	20.00	-17.54	T4	
		1.4MHz	18900	0187M	-2.37	-40.17			37.80	20.00	-17.80	T4	

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 46 of 111

Table 9-14
Raw Data Results for LTE B30

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 30	Axial	10MHz	27710	0187M	5.73	-37.70	-64.55	2.00	43.43	20.00	-23.43	T4	1.8, 1.6
		5MHz	27710	0187M	5.94	-38.23		1.93	44.17	20.00	-24.17	T4	
	Radial	10MHz	27710	0187M	-2.32	-41.31	-63.48	N/A	38.99	20.00	-18.99	T4	
		5MHz	27710	0187M	-2.53	-40.56		38.03	20.00	-18.03	T4		

Table 9-15
Raw Data Results for LTE B7

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 7	Axial	20MHz	21100	0187M	6.05	-37.31	-64.55	2.00	43.36	20.00	-23.36	T4	1.8, 1.6
		15MHz	21100	0187M	5.84	-37.92		1.86	43.76	20.00	-23.76	T4	
		10MHz	21100	0187M	5.62	-37.72		2.00	43.34	20.00	-23.34	T4	
		5MHz	21100	0187M	6.02	-38.23		2.00	44.25	20.00	-24.25	T4	
	Radial	20MHz	21100	0187M	-2.37	-41.80	-63.48	N/A	39.43	20.00	-19.43	T4	1.8, 2.2
		15MHz	21100	0187M	-2.13	-41.91		39.78	20.00	-19.78	T4		
		10MHz	21100	0187M	-2.39	-42.08		39.69	20.00	-19.69	T4		
		5MHz	21100	0187M	-2.32	-42.32		40.00	20.00	-20.00	T4		

Table 9-16
Raw Data Results for LTE B41 Power Class 3

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 41 (PC3)	Axial	20MHz	40620	0187M	5.63	-32.74	-64.55	1.81	38.37	20.00	-18.37	T4	1.8, 1.6
		15MHz	40620	0187M	5.66	-32.51		2.00	38.17	20.00	-18.17	T4	
		10MHz	40620	0187M	5.61	-32.65		2.00	38.26	20.00	-18.26	T4	
		5MHz	40620	0187M	5.65	-32.97		2.00	38.62	20.00	-18.62	T4	
	Radial	20MHz	40620	0187M	-2.44	-38.97	-63.48	N/A	36.53	20.00	-16.53	T4	1.8, 2.2
		15MHz	40620	0187M	-2.47	-37.88		35.41	20.00	-15.41	T4		
		10MHz	40620	0187M	-2.46	-38.05		35.59	20.00	-15.59	T4		
		5MHz	40620	0187M	-2.12	-38.52		36.40	20.00	-16.40	T4		

Table 9-17
Raw Data Results for LTE B41 Power Class 2

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 41 (PC2)	Axial	20MHz	40620	0187M	5.55	-28.62	-64.55	2.00	34.17	20.00	-14.17	T4	1.8, 1.6
		15MHz	40620	0187M	5.80	-28.35		2.00	34.15	20.00	-14.15	T4	
		10MHz	40620	0187M	5.61	-28.28		2.00	33.89	20.00	-13.89	T4	
		5MHz	41490	0187M	5.64	-27.10		2.00	32.74	20.00	-12.74	T4	
		5MHz	41055	0187M	5.63	-27.69		2.00	33.32	20.00	-13.32	T4	
		5MHz	40620	0187M	5.59	-28.00		2.00	33.59	20.00	-13.59	T4	
		5MHz	40185	0187M	5.52	-28.46		2.00	33.98	20.00	-13.98	T4	
		5MHz	39750	0187M	5.51	-28.20		2.00	33.71	20.00	-13.71	T4	
	Radial	20MHz	40620	0187M	-2.44	-32.86	-63.48	N/A	30.42	20.00	-10.42	T4	1.8, 2.2
		15MHz	40620	0187M	-2.56	-32.40		29.84	20.00	-9.84	T3		
		10MHz	40620	0187M	-2.37	-32.35		29.98	20.00	-9.98	T3		
		5MHz	40620	0187M	-2.42	-32.87		30.45	20.00	-10.45	T4		

Table 9-18
Raw Data Results for LTE B48

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 48	Axial	20MHz	55990	0187M	5.55	-30.12	-64.55	2.00	35.67	20.00	-15.67	T4	1.8, 1.6
		15MHz	55990	0187M	5.51	-30.36		2.00	35.87	20.00	-15.87	T4	
		10MHz	55990	0187M	5.96	-30.55		1.93	36.51	20.00	-16.51	T4	
		5MHz	55990	0187M	5.74	-33.15		2.00	38.89	20.00	-18.89	T4	
	Radial	20MHz	55990	0187M	-2.44	-30.31	-63.48	N/A	27.87	20.00	-7.87	T3	1.8, 2.2
		15MHz	55990	0187M	-2.54	-29.97		27.43	20.00	-7.43	T3		
		10MHz	55990	0187M	-2.41	-29.96		27.55	20.00	-7.55	T3		
		5MHz	56715	0187M	-2.13	-31.77		29.64	20.00	-9.64	T3		
		5MHz	55990	0187M	-2.50	-29.90		27.40	20.00	-7.40	T3		
		5MHz	55265	0187M	-2.37	-30.79		28.42	20.00	-8.42	T3		

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT	Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 47 of 111

Table 9-19
Raw Data Results for 2.4GHz WIFI – N

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11b	Axial	6	0187M	1.98	-33.21	-64.43	2.00	35.19	20.00	-15.19	T4	1.8, 1.6
	Radial	6	0187M	-6.58	-35.06	-63.17	N/A	28.48	20.00	-8.48	T3	1.8, 2.2
IEEE 802.11g	Axial	1	0187M	1.78	-34.07	-64.43	2.00	35.85	20.00	-15.85	T4	1.8, 1.6
		6	0187M	1.62	-33.11		2.00	34.73	20.00	-14.73	T4	
		11	0187M	1.70	-33.31		2.00	35.01	20.00	-15.01	T4	
	Radial	1	0187M	-6.90	-34.76	-63.17	N/A	27.86	20.00	-7.86	T3	1.8, 2.2
		6	0187M	-6.41	-33.34		N/A	26.93	20.00	-6.93	T3	
		11	0187M	-6.57	-33.90		N/A	27.33	20.00	-7.33	T3	
IEEE 802.11n	Axial	6	0187M	1.58	-34.38	-64.43	2.00	35.96	20.00	-15.96	T4	1.8, 1.6
	Radial	6	0187M	-6.53	-35.92	-63.17	N/A	29.39	20.00	-9.39	T3	1.8, 2.2
IEEE 802.11ax SU	Axial	6	0187M	1.58	-33.91	-64.43	2.00	35.49	20.00	-15.49	T4	1.8, 1.6
	Radial	6	0187M	-6.58	-35.72	-63.17	N/A	29.14	20.00	-9.14	T3	1.8, 2.2
IEEE 802.11ax RU	Axial	6	0187M	1.54	-33.60	-64.43	2.00	35.14	20.00	-15.14	T4	1.8, 1.6
	Radial	6	0187M	-6.56	-34.60	-63.17	N/A	28.04	20.00	-8.04	T3	1.8, 2.2

Table 9-20
Raw Data Results for 5GHz WIFI IEEE 802.11a – N

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11a	Axial	20MHz	1	40	0187M	1.68	-34.24	-64.43	2.00	35.92	20.00	-15.92	T4	1.8, 1.6
	Radial	20MHz	1	40	0187M	-6.61	-35.82	-63.17	N/A	29.21	20.00	-9.21	T3	1.8, 2.2

Table 9-21
Raw Data Results for 5GHz WIFI IEEE 802.11n – N

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11n	Axial	40MHz	1	38	0187M	1.62	-32.77	-64.43	2.00	34.39	20.00	-14.39	T4	1.8, 1.6
		40MHz	1	46	0187M	1.69	-34.17		2.00	35.86	20.00	-15.86	T4	
		20MHz	1	40	0187M	1.76	-33.30		2.00	35.06	20.00	-15.06	T4	
		40MHz	2A	54	0187M	1.71	-34.15		2.00	35.86	20.00	-15.86	T4	
		20MHz	2A	56	0187M	1.75	-33.60		2.00	35.35	20.00	-15.35	T4	
		40MHz	2C	118	0187M	1.62	-33.58		2.00	35.20	20.00	-15.20	T4	
		20MHz	2C	120	0187M	1.68	-33.07		2.00	34.75	20.00	-14.75	T4	
		40MHz	3	151	0187M	1.63	-34.68		2.00	36.31	20.00	-16.31	T4	
		20MHz	3	157	0187M	1.77	-33.45		2.00	35.22	20.00	-15.22	T4	
	Radial	40MHz	1	38	0187M	-6.73	-34.93	-63.17	N/A	28.20	20.00	-8.20	T3	1.8, 2.2
		40MHz	1	46	0187M	-6.65	-35.27		N/A	28.62	20.00	-8.62	T3	
		20MHz	1	40	0187M	-6.48	-35.20		N/A	28.72	20.00	-8.72	T3	
		40MHz	2A	54	0187M	-6.41	-36.30		N/A	29.89	20.00	-9.89	T3	
		20MHz	2A	56	0187M	-6.44	-35.84		N/A	29.40	20.00	-9.40	T3	
		40MHz	2C	118	0187M	-6.87	-35.20		N/A	28.33	20.00	-8.33	T3	
		20MHz	2C	120	0187M	-6.53	-34.92		N/A	28.39	20.00	-8.39	T3	
		40MHz	3	151	0187M	-6.44	-36.32		N/A	29.88	20.00	-9.88	T3	
		20MHz	3	157	0187M	-6.49	-35.38		N/A	28.89	20.00	-8.89	T3	

Table 9-22
Raw Data Results for 5GHz WIFI IEEE 802.11ac – N

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11ac	Axial	40MHz	1	38	0187M	1.75	-33.45	-64.43	2.00	35.20	20.00	-15.20	T4	1.8, 1.6
		20MHz	1	40	0187M	1.85	-33.78		2.00	35.63	20.00	-15.63	T4	
	Radial	40MHz	1	38	0187M	-6.59	-36.54	-63.17	N/A	29.95	20.00	-9.95	T3	1.8, 2.2
		20MHz	1	40	0187M	-6.63	-36.23		N/A	29.60	20.00	-9.60	T3	

FCC ID: A3LSMF711U	 PCTEST Proud to be part of Samsung	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 48 of 111

Table 9-23
Raw Data Results for 5GHz WIFI IEEE 802.11ax – N

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11ax SU	Axial	40MHz	1	38	0187M	1.71	-33.26	-64.43	2.00	34.97	20.00	-14.97	T4	1.8, 1.6
		20MHz	1	40	0187M	1.68	-33.66		2.00	35.34	20.00	-15.34	T4	
	Radial	40MHz	1	38	0187M	-6.74	-35.00	-63.17	N/A	28.26	20.00	-8.26	T3	
		20MHz	1	40	0187M	-6.38	-36.49			30.11	20.00	-10.11	T4	
IEEE 802.11ax RU	Axial	40MHz	1	38	0187M	1.58	-33.66	-64.43	2.00	35.24	20.00	-15.24	T4	1.8, 1.6
		20MHz	1	40	0187M	1.66	-33.69		2.00	35.35	20.00	-15.35	T4	
	Radial	40MHz	1	38	0187M	-6.40	-36.34	-63.17	N/A	29.94	20.00	-9.94	T3	
		20MHz	1	40	0187M	-6.31	-36.27			29.96	20.00	-9.96	T3	

Table 9-24
Raw Data Results for 2.4GHz WIFI – Q

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11b	Axial	1	0584S	1.53	-33.40	-64.43	2.00	34.93	20.00	-14.93	T4	1.8, 1.6
		6	0584S	1.73	-32.58		2.00	34.31	20.00	-14.31	T4	
		11	0584S	1.55	-32.78		2.00	34.33	20.00	-14.33	T4	
	Radial	6	0584S	-6.33	-34.77	-63.17	N/A	28.44	20.00	-8.44	T3	1.8, 2.2
IEEE 802.11g	Axial	6	0584S	1.52	-34.37	-64.43	2.00	35.89	20.00	-15.89	T4	1.8, 1.6
	Radial	1	0584S	-6.42	-32.33	-63.17	N/A	25.91	20.00	-5.91	T3	1.8, 2.2
		6	0584S	-6.64	-33.99			27.35	20.00	-7.35	T3	
		11	0584S	-6.52	-34.98			28.46	20.00	-8.46	T3	
IEEE 802.11n	Axial	6	0584S	1.53	-34.76	-64.43	2.00	36.29	20.00	-16.29	T4	1.8, 1.6
	Radial	6	0584S	-6.36	-33.90	-63.17	N/A	27.54	20.00	-7.54	T3	1.8, 2.2
IEEE 802.11ax SU	Axial	6	0584S	1.56	-33.17	-64.43	2.00	34.73	20.00	-14.73	T4	1.8, 1.6
	Radial	6	0584S	-6.60	-35.18	-63.17	N/A	28.58	20.00	-8.58	T3	1.8, 2.2
IEEE 802.11ax RU	Axial	6	0584S	1.58	-34.24	-64.43	2.00	35.82	20.00	-15.82	T4	1.8, 1.6
	Radial	6	0584S	-6.64	-34.22	-63.17	N/A	27.58	20.00	-7.58	T3	1.8, 2.2

Table 9-25
Raw Data Results for 5GHz WIFI IEEE 802.11a – Q

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11a	Axial	20MHz	1	40	0584S	1.51	-34.43	-64.43	2.00	35.94	20.00	-15.94	T4	1.8, 1.6
	Radial	20MHz	1	36	0584S	-6.28	-34.68	-63.17	N/A	28.40	20.00	-8.40	T3	1.8, 2.2
		20MHz	1	40	0584S	-6.02	-34.12			28.10	20.00	-8.10	T3	
		20MHz	1	48	0584S	-6.08	-35.39			29.31	20.00	-9.31	T3	
		20MHz	2A	56	0584S	-6.40	-35.09			28.69	20.00	-8.69	T3	
		20MHz	2C	120	0584S	-6.10	-35.28			29.18	20.00	-9.18	T3	
		20MHz	3	157	0584S	-6.58	-34.95			28.37	20.00	-8.37	T3	

Table 9-26
Raw Data Results for 5GHz WIFI IEEE 802.11n – Q

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11n	Axial	40MHz	1	38	0584S	1.80	-33.73	-64.43	2.00	35.53	20.00	-15.53	T4	1.8, 1.6
		20MHz	1	40	0584S	1.62	-34.40		2.00	36.02	20.00	-16.02	T4	
	Radial	40MHz	1	38	0584S	-6.38	-35.63	-63.17	N/A	29.25	20.00	-9.25	T3	1.8, 2.2
		20MHz	1	40	0584S	-6.31	-36.12			29.81	20.00	-9.81	T3	

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 49 of 111	

Table 9-27
Raw Data Results for 5GHz WIFI IEEE 802.11ac – Q

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11ac	Axial	40MHz	1	38	0584S	1.67	-33.81	-64.43	2.00	35.48	20.00	-15.48	T4	1.8, 1.6
		40MHz	1	46	0584S	1.54	-34.93		2.00	36.47	20.00	-16.47	T4	
		20MHz	1	40	0584S	1.67	-34.46		2.00	36.13	20.00	-16.13	T4	
		40MHz	2A	54	0584S	1.58	-34.32		2.00	35.90	20.00	-15.90	T4	
		20MHz	2A	56	0584S	1.55	-34.69		2.00	36.24	20.00	-16.24	T4	
		40MHz	2C	118	0584S	1.62	-33.91		2.00	35.53	20.00	-15.53	T4	
		20MHz	2C	120	0584S	1.58	-34.30		2.00	35.88	20.00	-15.88	T4	
		40MHz	3	151	0584S	1.59	-34.63		2.00	36.22	20.00	-16.22	T4	
		20MHz	3	157	0584S	1.54	-34.36		2.00	35.90	20.00	-15.90	T4	
		Radial	40MHz	1	38	0584S	-6.16		-35.82	-63.17	N/A	29.66	20.00	
	20MHz		1	40	0584S	-6.33	-35.39	N/A	29.06		20.00	-9.06	T3	

Table 9-28
Raw Data Results for 5GHz WIFI IEEE 802.11ax – Q

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11ax SU	Axial	40MHz	1	38	0584S	1.60	-34.74	-64.43	2.00	36.34	20.00	-16.34	T4	1.8, 1.6
		20MHz	1	40	0584S	1.64	-34.46		2.00	36.10	20.00	-16.10	T4	
	Radial	40MHz	1	38	0584S	-6.09	-35.43	-63.17	N/A	29.34	20.00	-9.34	T3	1.8, 2.2
		20MHz	1	40	0584S	-6.11	-36.51		N/A	30.40	20.00	-10.40	T4	
IEEE 802.11ax RU	Axial	40MHz	1	38	0584S	1.63	-34.61	-64.43	2.00	36.24	20.00	-16.24	T4	1.8, 1.6
		20MHz	1	40	0584S	1.45	-34.27		2.00	35.72	20.00	-15.72	T4	
	Radial	40MHz	1	38	0584S	-6.51	-35.40	-63.17	N/A	28.89	20.00	-8.89	T3	1.8, 2.2
		20MHz	1	40	0584S	-6.03	-35.69		N/A	29.66	20.00	-9.66	T3	

Table 9-29
Raw Data Results for EvDO (OTT VoIP)

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
Cellular EvDO	Axial	384	0187M	16.37	-35.37	-64.55	1.89	51.74	20.00	-31.74	T4	1.8, 1.6
	Radial	384	0187M	8.25	-36.25	-63.48	N/A	44.50	20.00	-24.50	T4	1.8, 2.2
PCS EvDO	Axial	600	0187M	16.36	-37.66	-64.55	2.00	54.02	20.00	-34.02	T4	1.8, 1.6
	Radial	600	0187M	8.12	-40.00	-63.48	N/A	48.12	20.00	-28.12	T4	1.8, 2.2

Table 9-30
Raw Data Results for EDGE (OTT VoIP)

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
EDGE850	Axial	190	0187M	16.00	-17.52	-64.55	2.00	33.52	20.00	-13.52	T4	1.8, 1.6
	Radial	190	0187M	8.19	-21.92	-63.48	N/A	30.11	20.00	-10.11	T4	1.8, 2.2
EDGE1900	Axial	661	0187M	16.00	-24.01	-64.55	2.00	40.01	20.00	-20.01	T4	1.8, 1.6
	Radial	661	0187M	8.24	-35.60	-63.48	N/A	43.84	20.00	-23.84	T4	1.8, 2.2

Table 9-31
Raw Data Results for HSPA (OTT VoIP)

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	0187M	16.09	-37.57	-64.55	2.00	53.66	20.00	-33.66	T4	1.8, 1.6
	Radial	4183	0187M	8.51	-40.29	-63.48	N/A	48.80	20.00	-28.80	T4	1.8, 2.2
HSPA IV	Axial	1412	0187M	16.02	-37.89	-64.55	2.00	53.91	20.00	-33.91	T4	1.8, 1.6
	Radial	1412	0187M	8.51	-40.48	-63.48	N/A	48.99	20.00	-28.99	T4	1.8, 2.2
HSPA II	Axial	9400	0187M	16.12	-37.32	-64.55	2.00	53.44	20.00	-33.44	T4	1.8, 1.6
	Radial	9400	0187M	8.61	-39.47	-63.48	N/A	48.08	20.00	-28.08	T4	1.8, 2.2

FCC ID: A3LSMF711U	 PCTEST Head to the point of delivery	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 50 of 111

Table 9-32
Raw Data Results for LTE B71 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 71	Axial	20MHz	133297	0187M	16.14	-33.24	-64.52	2.00	49.38	20.00	-29.38	T4	1.8, 1.6
		15MHz	133297	0187M	16.03	-33.59		2.00	49.62	20.00	-29.62	T4	
		10MHz	133297	0187M	15.74	-33.53		2.00	49.27	20.00	-29.27	T4	
		5MHz	133447	0187M	15.79	-31.74		2.00	47.53	20.00	-27.53	T4	
		5MHz	133297	0187M	15.93	-33.32		2.00	49.25	20.00	-29.25	T4	
		5MHz	133147	0187M	15.87	-33.93		2.00	49.80	20.00	-29.80	T4	
	Radial	20MHz	133297	0187M	8.27	-33.80	-63.48	N/A	42.07	20.00	-22.07	T4	1.8, 2.2
		15MHz	133297	0187M	8.14	-33.99			42.13	20.00	-22.13	T4	
		10MHz	133297	0187M	8.23	-34.16			42.39	20.00	-22.39	T4	
		5MHz	133447	0187M	8.18	-32.06			40.24	20.00	-20.24	T4	
		5MHz	133297	0187M	8.23	-33.81			42.04	20.00	-22.04	T4	
		5MHz	133147	0187M	8.14	-34.43			42.57	20.00	-22.57	T4	

Table 9-33
Raw Data Results for LTE B41 PC2 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 41 (PC2)	Axial	20MHz	40620	0187M	15.71	-29.41	-64.52	2.00	45.12	20.00	-25.12	T4	1.8, 1.6
		15MHz	40620	0187M	15.70	-29.21		2.00	44.91	20.00	-24.91	T4	
		10MHz	41490	0187M	15.96	-28.66		2.00	44.62	20.00	-24.62	T4	
		10MHz	41055	0187M	15.98	-28.22		2.00	44.20	20.00	-24.20	T4	
		10MHz	40620	0187M	15.64	-29.20		2.00	44.84	20.00	-24.84	T4	
		10MHz	40185	0187M	15.88	-29.88		2.00	45.76	20.00	-25.76	T4	
		10MHz	39750	0187M	16.01	-30.20		2.00	46.21	20.00	-26.21	T4	
		5MHz	40620	0187M	15.62	-29.52		2.00	45.14	20.00	-25.14	T4	
		Radial	20MHz	40620	0187M	8.16		-31.13	-63.48	N/A	39.29	20.00	
	15MHz		40620	0187M	8.26	-30.45	38.71	20.00			-18.71	T4	
	10MHz		41490	0187M	8.15	-31.25	39.40	20.00			-19.40	T4	
	10MHz		41055	0187M	8.25	-31.41	39.66	20.00			-19.66	T4	
	10MHz		40620	0187M	8.20	-30.38	38.58	20.00			-18.58	T4	
	10MHz		40185	0187M	8.17	-31.38	39.55	20.00			-19.55	T4	
	10MHz		39750	0187M	8.23	-31.83	40.06	20.00			-20.06	T4	
	5MHz		40620	0187M	8.10	-30.92	39.02	20.00			-19.02	T4	

Table 9-34
Raw Data Results for NR FDD n71 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	ABM2 _{LTE} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N _{NR} (dB)	S+N _{NR} -3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
NR n71	Axial	20MHz	136100	0187M	16.08	-36.76	-33.46	-64.52	N/A	52.84	49.84	20.00	-29.84	T4	1.8, 1.6
		15MHz	136100	0187M	16.08	-36.43	-33.46			52.51	49.51	20.00	-29.51	T4	
		10MHz	136100	0187M	16.08	-36.24	-33.46			52.32	49.32	20.00	-29.32	T4	
		5MHz	139100	0187M	16.08	-33.74	-33.46			49.82	46.82	20.00	-26.82	T4	
		5MHz	136100	0187M	16.08	-35.95	-33.46			52.03	49.03	20.00	-29.03	T4	
		5MHz	133100	0187M	16.08	-35.34	-33.46			51.42	48.42	20.00	-28.42	T4	
	Radial	20MHz	136100	0187M	8.03	-37.48	-34.02	-63.48	N/A	45.51	42.51	20.00	-22.51	T4	1.8, 2.2
		15MHz	138100	0187M	8.03	-37.01	-34.02			45.04	42.04	20.00	-22.04	T4	
		15MHz	136100	0187M	8.03	-36.81	-34.02			44.84	41.84	20.00	-21.84	T4	
		15MHz	134100	0187M	8.03	-36.31	-34.02			44.34	41.34	20.00	-21.34	T4	
		10MHz	136100	0187M	8.03	-36.83	-34.02			44.86	41.86	20.00	-21.86	T4	
		5MHz	136100	0187M	8.03	-37.06	-34.02			45.09	42.09	20.00	-22.09	T4	

Table 9-35
Raw Data Results for LTE B71 (OTT VoIP – Additional Measurements for NR FDD)

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	ABM2 _{LTE} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N _{NR} (dB)	S+N _{NR} -3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 71	Axial	20MHz	133297	0187M	16.08	N/A	-33.46	-64.52	N/A	49.54	N/A	20.00	-29.54	T4	1.8, 1.6
	Radial	20MHz	133297	0187M	8.03	N/A	-34.02	-63.48		42.05	N/A	20.00	-22.05	T4	1.8, 2.2

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT	Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 51 of 111

Table 9-36
Raw Data Results for NR TDD n77 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 _{LTE} [dB(A/m)]	ABM2 _{Ver} [dB(A/m)]	ABM2 _{TE} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N _{Ver} (dB)	S+N/N _{Ver} - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
NR n77 (DoD, PC2)	Axial	100MHz	633334	0187M	15.86	-27.55	-31.26	-64.52	N/A	43.41	40.41	20.00	-20.41	T4	1.8, 1.6
		90MHz	633334	0187M	15.86	-27.54	-31.26			43.40	40.40	20.00	-20.40	T4	
		80MHz	634000	0187M	15.86	-27.83	-31.26			43.69	40.69	20.00	-20.69	T4	
		80MHz	633666	0187M	15.86	-27.00	-31.26			42.86	39.86	20.00	-19.86	T4	
		80MHz	633334	0187M	15.86	-27.34	-31.26			43.20	40.20	20.00	-20.20	T4	
		80MHz	633000	0187M	15.86	-27.05	-31.26			42.91	39.91	20.00	-19.91	T4	
		80MHz	632666	0187M	15.86	-27.07	-31.26			42.93	39.93	20.00	-19.93	T4	
		70MHz	633334	0187M	15.86	-27.69	-31.26			43.55	40.55	20.00	-20.55	T4	
		60MHz	633334	0187M	15.86	-27.82	-31.26			43.68	40.68	20.00	-20.68	T4	
		50MHz	633334	0187M	15.86	-28.54	-31.26			44.40	41.40	20.00	-21.40	T4	
	40MHz	633334	0187M	15.86	-32.70	-31.26	48.56	45.56	20.00	-25.56	T4				
	30MHz	633334	0187M	15.86	-32.63	-31.26	48.49	45.49	20.00	-25.49	T4				
	20MHz	633334	0187M	15.86	-34.39	-31.26	50.25	47.25	20.00	-27.25	T4				
	100MHz	633334	0187M	8.29	-26.01	-29.07	34.30	31.30	20.00	-11.30	T4	1.8, 2.2			
	90MHz	633334	0187M	8.29	-25.72	-29.07	34.01	31.01	20.00	-11.01	T4				
	80MHz	633334	0187M	8.29	-25.49	-29.07	33.78	30.78	20.00	-10.78	T4				
	70MHz	633334	0187M	8.29	-25.43	-29.07	33.72	30.72	20.00	-10.72	T4				
	60MHz	633334	0187M	8.29	-25.24	-29.07	33.53	30.53	20.00	-10.53	T4				
	50MHz	635000	0187M	8.29	-26.46	-29.07	34.75	31.75	20.00	-11.75	T4				
	50MHz	634166	0187M	8.29	-26.41	-29.07	34.70	31.70	20.00	-11.70	T4				
50MHz	633334	0187M	8.29	-24.21	-29.07	32.50	29.50	20.00	-9.50	T3					
50MHz	632500	0187M	8.29	-25.88	-29.07	34.17	31.17	20.00	-11.17	T4					
50MHz	631666	0187M	8.29	-26.58	-29.07	34.87	31.87	20.00	-11.87	T4					
40MHz	633334	0187M	8.29	-25.51	-29.07	33.80	30.80	20.00	-10.80	T4					
30MHz	633334	0187M	8.29	-26.17	-29.07	34.46	31.46	20.00	-11.46	T4					
20MHz	633334	0187M	8.29	-26.57	-29.07	34.86	31.86	20.00	-11.86	T4					

Table 9-37
Raw Data Results for LTE B48 (OTT VoIP – Additional Measurements for NR TDD)

Mode	Orientation	Bandwidth	Channel	Device SN	ABM1 _{LTE} [dB(A/m)]	ABM2 _{Ver} [dB(A/m)]	ABM2 _{TE} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N _{TE} (dB)	S+N/N _{Ver} - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band 48	Axial	20MHz	55990	0187M	15.86	N/A	-31.26	-64.52	N/A	46.99	N/A	20.00	-26.99	T4	1.8, 1.6
	Radial	20MHz	55990	0187M	8.29	N/A	-29.07	-63.48	N/A	37.36	N/A	20.00	-17.36	T4	1.8, 2.2

Table 9-38
Raw Data Results for 2.4GHz WIFI – N (OTT VoIP)

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11b	Axial	6	0187M	16.10	-34.71	-64.43	2.00	50.81	20.00	-30.81	T4	1.8, 1.6
	Radial	6	0187M	8.27	-35.89	-63.17	N/A	44.16	20.00	-24.16	T4	1.8, 2.2
IEEE 802.11g	Axial	1	0187M	16.06	-35.05	-64.43	2.00	51.11	20.00	-31.11	T4	1.8, 1.6
		6	0187M	16.18	-32.01			48.19	20.00	-28.19	T4	
		11	0187M	16.37	-33.64			50.01	20.00	-30.01	T4	
	Radial	1	0187M	8.25	-37.40	-63.17	N/A	45.65	20.00	-25.65	T4	
		6	0187M	8.17	-35.95			44.12	20.00	-24.12	T4	
11	0187M	8.16	-37.00	45.16	20.00	-25.16	T4					
IEEE 802.11n	Axial	6	0187M	16.15	-35.96	-64.43	2.00	52.11	20.00	-32.11	T4	1.8, 1.6
	Radial	6	0187M	8.23	-37.49	-63.17	N/A	45.72	20.00	-25.72	T4	1.8, 2.2
IEEE 802.11ax SU	Axial	6	0187M	16.28	-35.40	-64.43	2.00	51.68	20.00	-31.68	T4	1.8, 1.6
	Radial	6	0187M	8.04	-38.36	-63.17	N/A	46.40	20.00	-26.40	T4	1.8, 2.2
IEEE 802.11ax RU	Axial	6	0187M	16.21	-35.70	-64.43	1.88	51.91	20.00	-31.91	T4	1.8, 1.6
	Radial	6	0187M	8.18	-38.10	-63.17	N/A	46.28	20.00	-26.28	T4	1.8, 2.2

Table 9-39
Raw Data Results for 5GHz WIFI IEEE 802.11a – N (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11a	Axial	20MHz	1	40	0187M	16.17	-35.34	-64.43	2.00	51.51	20.00	-31.51	T4	1.8, 1.6
	Radial	20MHz	1	40	0187M	8.10	-38.39	-63.17	N/A	46.49	20.00	-26.49	T4	1.8, 2.2

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 52 of 111

Table 9-40
Raw Data Results for 5GHz WIFI IEEE 802.11n – N (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11n	Axial	40MHz	1	38	0187M	16.43	-34.63	-64.43	2.00	51.06	20.00	-31.06	T4	1.8, 1.6
		40MHz	1	46	0187M	16.24	-35.12		2.00	51.36	20.00	-31.36	T4	
		20MHz	1	40	0187M	16.24	-36.09		2.00	52.33	20.00	-32.33	T4	
		40MHz	2A	54	0187M	16.28	-35.03		2.00	51.31	20.00	-31.31	T4	
		20MHz	2A	56	0187M	16.35	-35.65		1.81	52.00	20.00	-32.00	T4	
		40MHz	2C	118	0187M	16.09	-35.77		2.00	51.86	20.00	-31.86	T4	
		20MHz	2C	120	0187M	16.25	-35.24		1.99	51.49	20.00	-31.49	T4	
		40MHz	3	151	0187M	16.19	-36.06		1.95	52.25	20.00	-32.25	T4	
		20MHz	3	157	0187M	16.34	-35.70		2.00	52.04	20.00	-32.04	T4	
	Radial	40MHz	1	38	0187M	7.95	-34.53	-63.17	N/A	42.48	20.00	-22.48	T4	1.8, 2.2
		40MHz	1	46	0187M	7.98	-34.82			42.80	20.00	-22.80	T4	
		20MHz	1	40	0187M	8.13	-34.54			42.67	20.00	-22.67	T4	
		40MHz	2A	54	0187M	7.97	-36.51			44.48	20.00	-24.48	T4	
		20MHz	2A	56	0187M	8.09	-34.79			42.88	20.00	-22.88	T4	
		40MHz	2C	118	0187M	8.06	-37.58			45.64	20.00	-25.64	T4	
		20MHz	2C	120	0187M	8.18	-37.50			45.68	20.00	-25.68	T4	
		40MHz	3	151	0187M	8.02	-39.06			47.08	20.00	-27.08	T4	
		20MHz	3	157	0187M	8.18	-36.82			45.00	20.00	-25.00	T4	

Table 9-41
Raw Data Results for 5GHz WIFI IEEE 802.11ac – N (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11ac	Axial	40MHz	1	38	0187M	16.21	-35.47	-64.43	2.00	51.68	20.00	-31.68	T4	1.8, 1.6
		20MHz	1	40	0187M	16.26	-35.40		2.00	51.66	20.00	-31.66	T4	
	Radial	40MHz	1	38	0187M	7.91	-37.75	-63.17	N/A	45.66	20.00	-25.66	T4	1.8, 2.2
		20MHz	1	40	0187M	7.75	-37.74			45.49	20.00	-25.49	T4	

Table 9-42
Raw Data Results for 5GHz WIFI IEEE 802.11ax – N (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11ax SU	Axial	40MHz	1	38	0187M	16.37	-35.47	-64.43	2.00	51.84	20.00	-31.84	T4	1.8, 1.6
		20MHz	1	40	0187M	16.28	-35.39		2.00	51.67	20.00	-31.67	T4	
	Radial	40MHz	1	38	0187M	8.16	-37.34	-63.17	N/A	45.50	20.00	-25.50	T4	1.8, 2.2
		20MHz	1	40	0187M	7.92	-37.87			45.79	20.00	-25.79	T4	
IEEE 802.11ax RU	Axial	40MHz	1	38	0187M	16.22	-35.25	-64.43	2.00	51.47	20.00	-31.47	T4	1.8, 1.6
		20MHz	1	40	0187M	16.07	-35.22		2.00	51.29	20.00	-31.29	T4	
	Radial	40MHz	1	38	0187M	8.01	-39.19	-63.17	N/A	47.20	20.00	-27.20	T4	1.8, 2.2
		20MHz	1	40	0187M	7.99	-38.37			46.36	20.00	-26.36	T4	

Table 9-43
Raw Data Results for 2.4GHz WIFI – Q (OTT VoIP)

Mode	Orientation	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11b	Axial	1	0584S	15.95	-33.94	-64.43	2.00	49.89	20.00	-29.89	T4	1.8, 1.6
		6	0584S	15.98	-33.57		2.00	49.55	20.00	-29.55	T4	
		11	0584S	15.94	-34.82		2.00	50.76	20.00	-30.76	T4	
	Radial	1	0584S	7.82	-33.34	-63.17	N/A	41.16	20.00	-21.16	T4	1.8, 2.2
		6	0584S	7.75	-36.14			43.89	20.00	-23.89	T4	
		11	0584S	7.82	-34.87			42.69	20.00	-22.69	T4	
IEEE 802.11g	Axial	6	0584S	16.08	-33.77	-64.43	2.00	49.85	20.00	-29.85	T4	1.8, 1.6
	Radial	6	0584S	8.13	-37.20	-63.17	N/A	45.33	20.00	-25.33	T4	1.8, 2.2
IEEE 802.11n	Axial	6	0584S	16.12	-35.60	-64.43	2.00	51.72	20.00	-31.72	T4	1.8, 1.6
	Radial	6	0584S	7.85	-36.36	-63.17	N/A	44.21	20.00	-24.21	T4	1.8, 2.2
IEEE 802.11ax SU	Axial	6	0584S	16.02	-33.86	-64.43	2.00	49.88	20.00	-29.88	T4	1.8, 1.6
	Radial	6	0584S	8.06	-36.93	-63.17	N/A	44.99	20.00	-24.99	T4	1.8, 2.2
IEEE 802.11ax RU	Axial	6	0584S	16.00	-35.14	-64.43	2.00	51.14	20.00	-31.14	T4	1.8, 1.6
	Radial	6	0584S	7.79	-36.34	-63.17	N/A	44.13	20.00	-24.13	T4	1.8, 2.2

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 53 of 111

Table 9-44
Raw Data Results for 5GHz WIFI IEEE 802.11a – Q (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11a	Axial	20MHz	1	40	0584S	16.13	-36.79	-64.43	2.00	52.92	20.00	-32.92	T4	1.8, 1.6
	Radial	20MHz	1	40	0584S	7.80	-37.98	-63.17	N/A	45.78	20.00	-25.78	T4	1.8, 2.2

Table 9-45
Raw Data Results for 5GHz WIFI IEEE 802.11n – Q (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11n	Axial	40MHz	1	38	0584S	15.91	-36.12	-64.43	2.00	52.03	20.00	-32.03	T4	1.8, 1.6
		20MHz	1	40	0584S	15.87	-37.25		2.00	53.12	20.00	-33.12	T4	
	Radial	40MHz	1	38	0584S	7.80	-37.95	-63.17	N/A	45.75	20.00	-25.75	T4	1.8, 2.2
		20MHz	1	40	0584S	7.71	-36.58			44.29	20.00	-24.29	T4	
		40MHz	2A	54	0584S	7.81	-38.03			45.84	20.00	-25.84	T4	
		20MHz	2A	56	0584S	7.97	-37.08			45.05	20.00	-25.05	T4	
		40MHz	2C	118	0584S	7.75	-37.80			45.55	20.00	-25.55	T4	
		20MHz	2C	100	0584S	7.79	-37.21			45.00	20.00	-25.00	T4	
		20MHz	2C	120	0584S	7.87	-35.31			43.18	20.00	-23.18	T4	
		20MHz	2C	144	0584S	7.68	-35.66			43.34	20.00	-23.34	T4	
		40MHz	3	151	0584S	7.73	-37.66			45.39	20.00	-25.39	T4	
		20MHz	3	157	0584S	7.56	-37.60			45.16	20.00	-25.16	T4	

Table 9-46
Raw Data Results for 5GHz WIFI IEEE 802.11ac – Q (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE 802.11ac	Axial	40MHz	1	38	0584S	16.04	-36.24	-64.43	2.00	52.28	20.00	-32.28	T4	1.8, 1.6
		20MHz	1	40	0584S	16.02	-36.69		2.00	52.71	20.00	-32.71	T4	
	Radial	40MHz	1	38	0584S	7.85	-38.03	-63.17	N/A	45.88	20.00	-25.88	T4	1.8, 2.2
		20MHz	1	40	0584S	7.77	-38.95			46.72	20.00	-26.72	T4	

Table 9-47
Raw Data Results for 5GHz WIFI IEEE 802.11ax – Q (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	Device SN	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates			
IEEE 802.11ax SU	Axial	40MHz	1	38	0584S	16.13	-36.59	-64.43	2.00	52.72	20.00	-32.72	T4	1.8, 1.6			
		20MHz	1	40	0584S	15.98	-35.74		2.00	51.72	20.00	-31.72	T4				
		40MHz	2A	54	0584S	16.16	-35.85		2.00	52.01	20.00	-32.01	T4				
		20MHz	2A	56	0584S	16.20	-36.70		2.00	52.90	20.00	-32.90	T4				
		40MHz	2C	118	0584S	16.02	-35.68		2.00	51.70	20.00	-31.70	T4				
		20MHz	2C	100	0584S	16.13	-34.58		2.00	50.71	20.00	-30.71	T4				
		20MHz	2C	120	0584S	16.10	-35.13		2.00	51.23	20.00	-31.23	T4				
		20MHz	2C	144	0584S	16.11	-34.91		2.00	51.02	20.00	-31.02	T4				
		40MHz	3	151	0584S	15.91	-36.25		2.00	52.16	20.00	-32.16	T4				
		20MHz	3	157	0584S	15.99	-36.20		2.00	52.19	20.00	-32.19	T4				
		Radial	40MHz	1	38	0584S	7.64		-38.00	-63.17	N/A	45.64	20.00		-25.64	T4	1.8, 2.2
			20MHz	1	40	0584S	7.68		-38.11			45.79	20.00		-25.79	T4	
	IEEE 802.11ax RU	Axial	40MHz	1	38	0584S	15.84	-37.43	-64.43	2.00	53.27	20.00	-33.27	T4	1.8, 1.6		
			20MHz	1	40	0584S	15.83	-36.25		2.00	52.08	20.00	-32.08	T4			
Radial		40MHz	1	38	0584S	7.65	-37.24	-63.17	N/A	44.89	20.00	-24.89	T4	1.8, 2.2			
		20MHz	1	40	0584S	7.68	-37.60			45.28	20.00	-25.28	T4				

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 54 of 111

II. Test Notes

A. General

1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
2. 'Radial' orientation refers to radial transverse.
3. Hearing Aid Mode (**Phone→Call Settings→ Other Call Settings→Hearing Aid Compatibility**) was set to ON for Frequency Response compliance
4. Speech Signal: 3GPP2 Normal Test Signal
5. Bluetooth and WIFI were disabled while testing 2G/3G/4G/5G modes.
6. Licensed data modes and Bluetooth were disabled while testing WIFI modes.
7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

B. CDMA

1. Power Configuration: Power Control Bits = "All Up"
2. Vocoder Configuration: RC1/SO3 (CDMA – EVRC)

C. GSM

1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
2. Vocoder Configuration: EFR (GSM);

D. UMTS

1. Power Configuration: TPC= "All 1s";
2. Vocoder Configuration: WB AMR 6.60 kbps (UMTS);

E. LTE FDD

1. Power Configuration: TPC = "Max Power"
2. Radio Configuration: 16QAM, 1RB, 50%RB offset
3. Vocoder Configuration: WB AMR 6.60kbps
4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 71 at 5MHz is the worst-case for the Axial probe orientation. LTE Band 71 at 15MHz bandwidth is the worst-case for the Radial probe orientation.

F. LTE TDD

1. Power Configuration: TPC = "Max Power"
2. Radio Configuration: 16QAM, 1RB, 50%RB offset
3. Power Class 3 Uplink-Downlink configuration: 0
4. Power Class 2 Uplink-Downlink configuration: 1
5. Vocoder Configuration: WB AMR 6.60kbps
6. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 5MHz is the worst-case for the Axial probe orientation. LTE Band 48 at 5MHz is the worst-case for the Radial probe orientation.

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of service</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 55 of 111

G. WIFI (Variant N)

1. Radio Configuration
 - a. IEEE 802.11b: CCK, 11Mbps
 - b. IEEE 802.11g/a: 16QAM 36Mbps
 - c. IEEE 802.11n/ac 20MHz: 16QAM, MCS 3
 - d. IEEE 802.11ax SU 20MHz: 64QAM, MCS 6
 - e. IEEE 802.11n/ac 40MHz: 64QAM, MCS 5
 - f. IEEE 802.11ax SU 40MHz: 64QAM, MCS 5
2. RU Index
 - a. IEEE 802.11ax RU 20MHz: 61
 - b. IEEE 802.11ax RU 40MHz: 17
3. Vocoder Configuration: WB AMR 6.60kbps
4. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11g is the worst-case for both Axial and Radial probe orientations.
5. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11n 40MHz (U-NII 1) is the worst-case for both Axial and Radial probe orientations.

H. WIFI (Variant Q)

1. Radio Configuration
 - a. IEEE 802.11b: CCK, 5.5Mbps
 - b. IEEE 802.11g/a: QPSK 18Mbps
 - c. IEEE 802.11n/ac 20MHz: 16QAM, MCS 4
 - d. IEEE 802.11ax SU 20MHz: QPSK, MCS 1
 - e. IEEE 802.11n/ac 40MHz: QPSK, MCS 2
 - f. IEEE 802.11ax SU 40MHz: 16QAM, MCS 3
2. RU Index
 - a. IEEE 802.11ax RU 20MHz: 37
 - b. IEEE 802.11ax RU 40MHz: 61
3. Vocoder Configuration: WB AMR 6.60kbps
4. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for the Axial probe orientation. IEEE 802.11g is the worst-case for the Radial probe orientation.
5. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11ac 40MHz (U-NII 1) is the worst-case for the Axial probe orientation. IEEE 802.11a (U-NII 1) is the worst-case for the Radial probe orientation.

I. OTT VoIP

1. Vocoder Configuration: 6kbps
2. EvDO Configuration
 - a. Revision: A
3. EDGE Configuration
 - a. MCS Index: 7
 - b. Number of TX slots: 2
4. HSPA Configuration:
 - a. Release: 6
 - b. 3GPP 34.121 Subtest 1
5. LTE FDD Configuration:
 - a. Power Configuration: TPC = "Max Power"

FCC ID: A3LSMF711U	 PCTEST Proud to be part of 	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 56 of 111


- b. Radio Configuration: 16QAM, 1RB, 50%RB offset
 - c. LTE Band 71 was the worst-case band from Table 7-7 and was used to test both Axial and Radial probe orientations.
 - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 71 at 5MHz is the worst-case for both the Axial and Radial probe orientations.
6. LTE TDD Configuration:
- a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 50%RB offset
 - c. Power Class 2 Uplink-Downlink configuration: 1
 - d. LTE Band 41 (PC2) was the worst-case band from Table 7-8 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 10MHz is the worst-case for both Axial and Radial probe orientations.
7. NR FDD Configuration
- a. Power Configuration: TxAGC is set such that the DUT operates at max power.
 - b. Radio Configuration: DFT-s-OFDM, 16QAM, 1RB, 99% RB Offset
 - c. Due to equipment limitations, ABM1 measurements were not possible. Therefore, the procedure outlined in Section 7.II.5 was followed to obtain SNNR values. Additionally, Frequency Response measurements were not possible due to equipment limitations.
 - d. NR Band n71 was the worst-case band from Table 7-13 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. NR n71 at 5MHz is the worst-case for the Axial probe orientation. NR n71 at 15MHz bandwidth is the worst-case for the Radial probe orientation.
8. NR TDD Configuration
- a. Power Configuration: TxAGC is set such that the DUT operates at max power.
 - b. Radio Configuration: DFT-s-OFDM, 16QAM, 1RB, 99% RB Offset
 - c. Due to equipment limitations, ABM1 measurements were not possible. Therefore, the procedure outlined in Section 7.II.5 was followed to obtain SNNR values. Additionally, Frequency Response measurements were not possible due to equipment limitations.
 - d. NR Band n77 (DoD, PC2) was the worst-case band from Table 7-14 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. NR n77 (DoD, PC2) at 80MHz is the worst-case for the Axial probe orientation. NR n77 (DoD, PC2) at 50MHz bandwidth is the worst-case for the Radial probe orientation.
9. WIFI Configuration (Variant N):
- a. Radio Configuration
 - i. IEEE 802.11b: CCK, 11Mbps
 - ii. IEEE 802.11g/a: 16QAM 36Mbps
 - iii. IEEE 802.11n/ac 20MHz: 16QAM, MCS 3
 - iv. IEEE 802.11ax SU 20MHz: 64QAM, MCS 6
 - v. IEEE 802.11n/ac 40MHz: 64QAM, MCS 5
 - vi. IEEE 802.11ax SU 40MHz: 64QAM, MCS 5
 - b. RU Index
 - i. IEEE 802.11ax RU 20MHz: 61
 - ii. IEEE 802.11ax RU 40MHz: 17
 - c. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11g is the worst-case for both Axial and Radial probe orientations.

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 57 of 111	



- d. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11n 40MHz (U-NII 1) is the worst-case for both Axial and Radial probe orientations.
10. WIFI Configuration (Variant Q):
- a. Radio Configuration
 - i. IEEE 802.11b: CCK, 5.5Mbps
 - ii. IEEE 802.11g/a: QPSK 18Mbps
 - iii. IEEE 802.11n/ac 20MHz: 16QAM, MCS 4
 - iv. IEEE 802.11ax SU 20MHz: QPSK, MCS 1
 - v. IEEE 802.11n/ac 40MHz: QPSK, MCS 2
 - vi. IEEE 802.11ax SU 40MHz: 16QAM, MCS 3
 - b. RU Index
 - i. IEEE 802.11ax RU 20MHz: 37
 - ii. IEEE 802.11ax RU 40MHz: 61
 - c. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for both Axial and Radial probe orientations.
 - d. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11ax SU 20MHz (U-NII 2C) is the worst-case for the Axial probe orientation. IEEE 802.11n 20MHz (U-NII 2C) is the worst-case for the Radial probe orientation.

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of delivery</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 58 of 111	



III. 1 kHz Vocoder Application Check

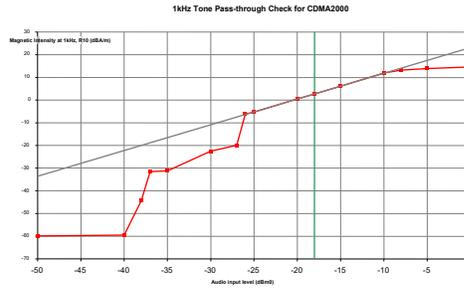

This model was verified to be within the linear region for ABM1 measurements at -18 dBm₀ for CDMA. This measurement was taken in the axial configuration above the maximum location.

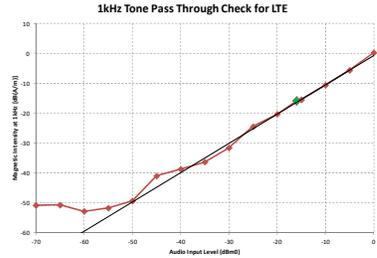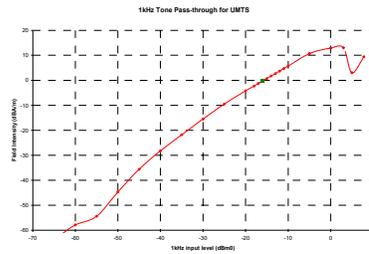

This model was verified to be within the linear region for ABM1 measurements at -16 dBm₀ for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.

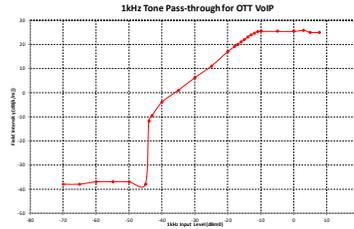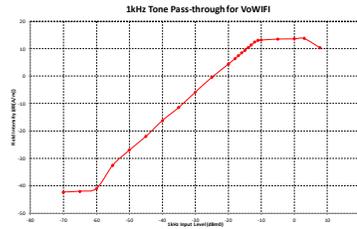

This model was verified to be within the linear region for ABM1 measurements at -20 dBm₀ for VoWiFi over IMS and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 59 of 111

IV. T-Coil Validation Test Results

**Table 9-48
Helmholtz Coil Validation Table of Results - 4/19/2021**

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.148	PASS
Environmental Noise	< -58 dBA/m	-64.55	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.094	PASS
Environmental Noise	< -58 dBA/m	-64.01	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

**Table 9-49
Helmholtz Coil Validation Table of Results - 4/26/2021**


Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.404	PASS
Environmental Noise	< -58 dBA/m	-64.52	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.326	PASS
Environmental Noise	< -58 dBA/m	-63.48	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

**Table 9-50
Helmholtz Coil Validation Table of Results - 5/3/2021**

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.238	PASS
Environmental Noise	< -58 dBA/m	-64.43	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.161	PASS
Environmental Noise	< -58 dBA/m	-63.17	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

FCC ID: A3LSMF711U	 PCTEST Proud to be part of Samsung	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 60 of 111

V. ABM1 Magnetic Field Distribution Scan Overlays

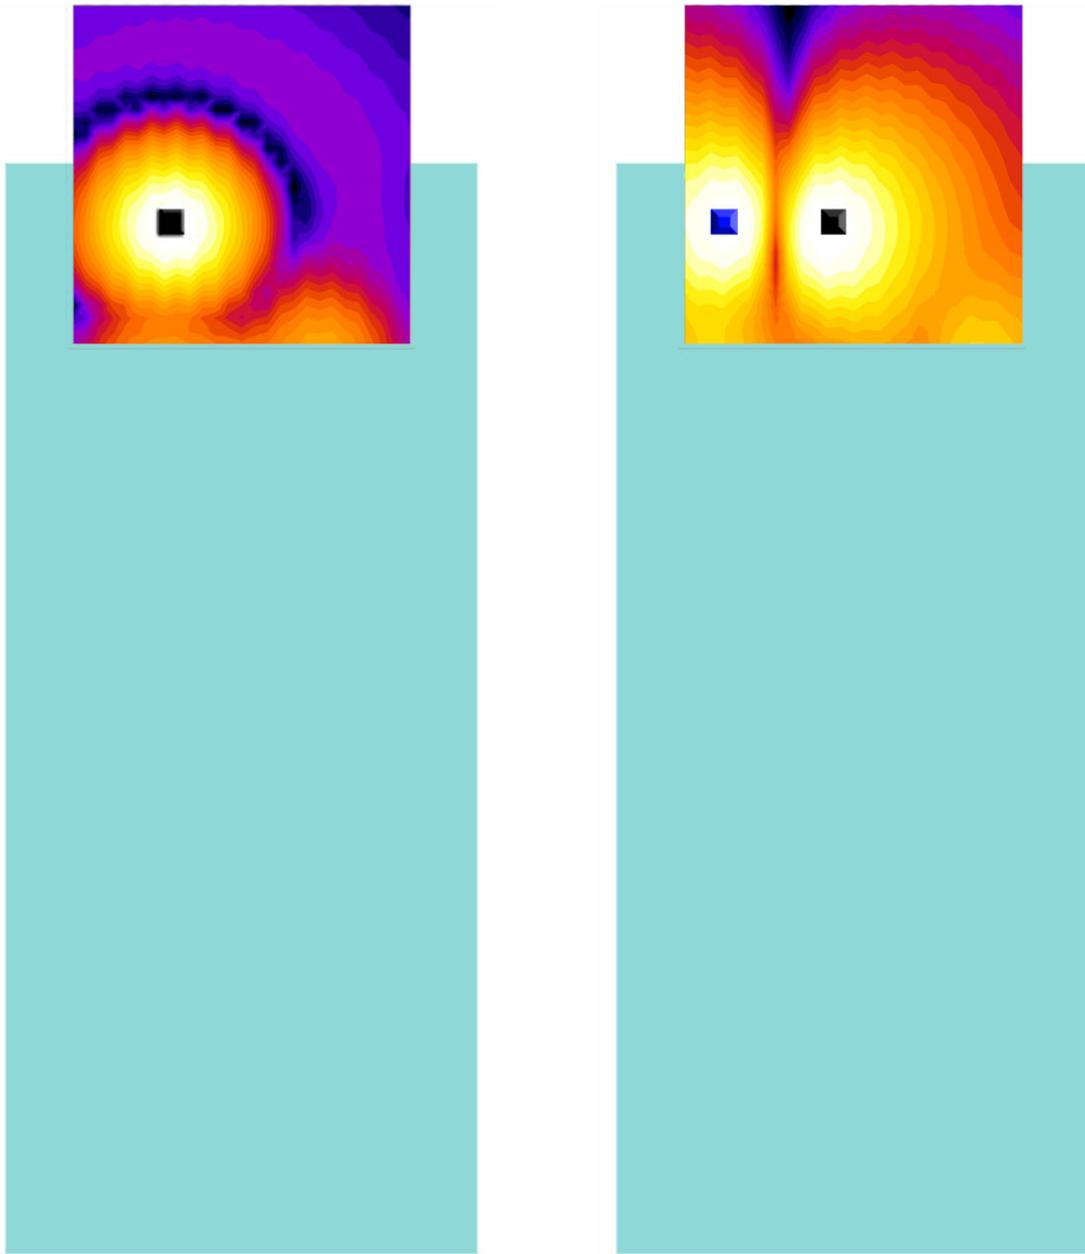

Axial

Radial (Transverse)

Figure 9-1
T-Coil Scan Overlay Magnetic Field Distributions

Notes:

1. Final measurement locations are indicated by a cursor on the contour plots. The GSM 850 radial measurement location is indicated by a blue cursor.
2. See Test Setup Photographs for actual WD overlay.

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 61 of 111	

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

10. MEASUREMENT UNCERTAINTY

**Table 10-1
Uncertainty Estimation Table**

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)						17.7%	0.71
Expanded uncertainty (k=2), 95% confidence level						35.3%	1.31

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
2. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 62 of 111	

11. EQUIPMENT LIST

**Table 11-1
Equipment List**

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Temperature / Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291470
Listen	Fireface UC	Acoustic Analyzer External Audio Interface	3/29/2021	Biennial	3/29/2023	23857555
Listen	SoundConnect	Microphone Power Supply	3/29/2021	Biennial	3/29/2023	PS3099
Rohde & Schwarz	CMW500	Radio Communication tester	9/4/2020	Annual	9/4/2021	140144
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	3/22/2021	Annual	3/22/2022	162125
Seekonk	NC-100	Torque Wrench (8" lb)	8/4/2020	Biennial	8/4/2022	N/A
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM		HAC Positioner	N/A		N/A	N/A
TEM	Helmholtz Coil	Helmholtz Coil	3/29/2021	Biennial	3/29/2023	925
TEM	Axial T-Coil Probe	Axial T-Coil Probe	3/29/2021	Biennial	3/29/2023	TEM-1139
TEM	Radial T-Coil Probe	Radial T-Coil Probe	3/29/2021	Biennial	3/29/2023	TEM-1133

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of demand</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 63 of 111	

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

12. TEST DATA

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of demand</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 64 of 111	

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil – SN: 925


Type: HH Coil
Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021
- Helmholtz Coil – SN: 925; Calibrated: 3/29/2021

Noise Spectrum

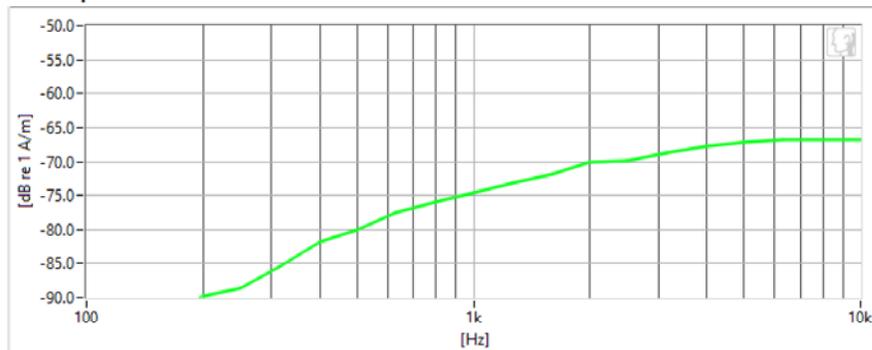

Frequency Response

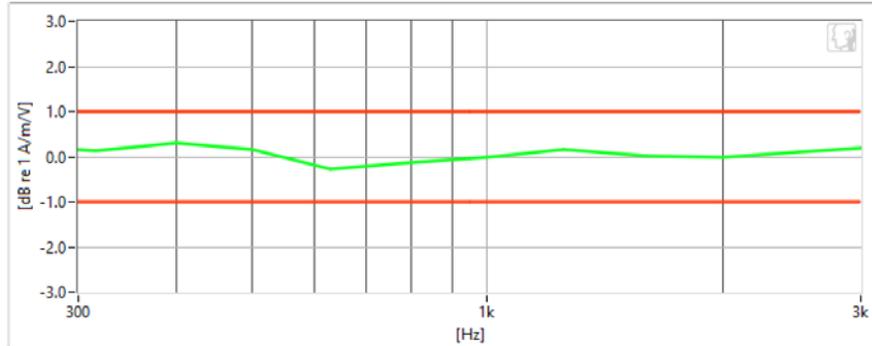

Results

Verification 1kHz Intensity	-10.148 dB	✓	Max/Min	-9.5/-10.5
Verification ABM2	-64.55 dB	✓	Maximum	-58.0
Frequency Response Margin	700m dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 65 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil – SN: 925


Type: HH Coil
Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021
- Helmholtz Coil – SN: 925; Calibrated: 3/29/2021

Noise Spectrum

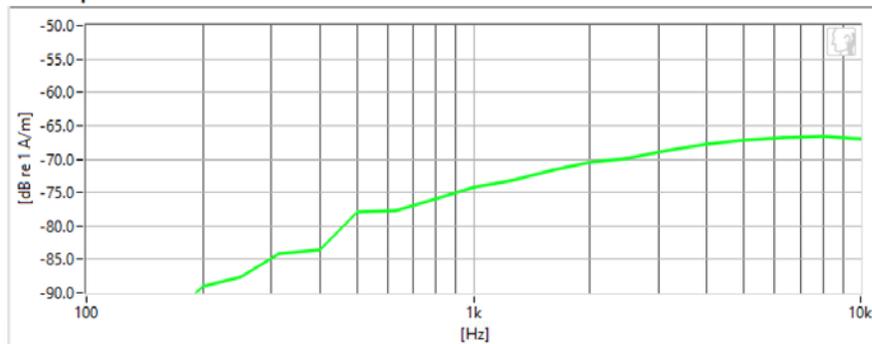

Frequency Response

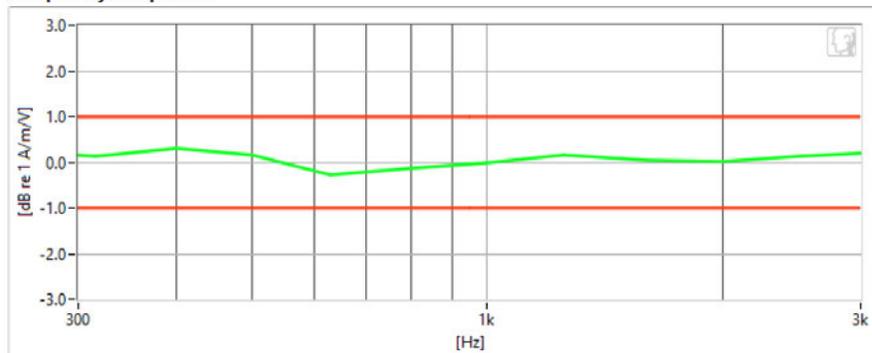

Results

Verification 1kHz Intensity	-10.404 dB	✓	Max/Min	-9.5/-10.5
Verification ABM2	-64.52 dB	✓	Maximum	-58.0
Frequency Response Margin	700m dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 66 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil – SN: 925


Type: HH Coil
Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021
- Helmholtz Coil – SN: 925; Calibrated: 3/29/2021

Noise Spectrum

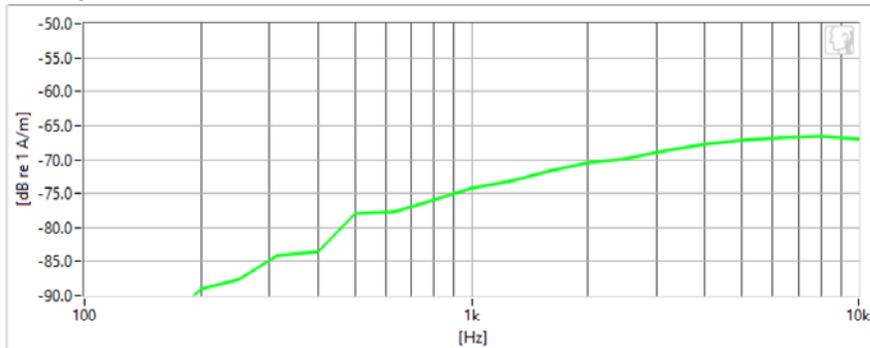

Frequency Response

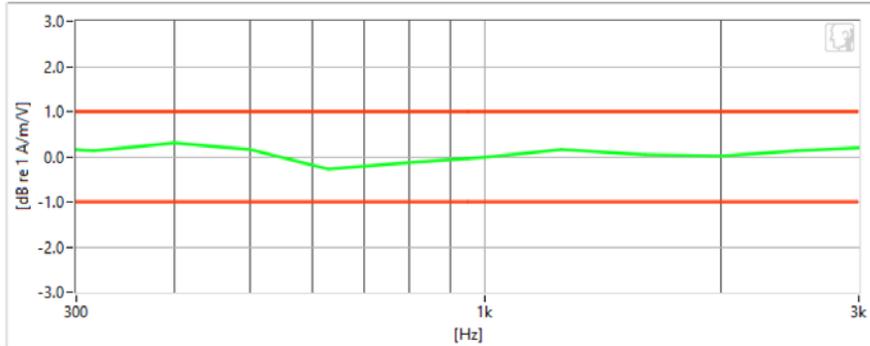

Results

Verification 1kHz Intensity	-10.238 dB	✓	Max/Min	-9.5/-10.5
Verification ABM2	-64.43 dB	✓	Maximum	-58.0
Frequency Response Margin	700m dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 67 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil – SN: 925


Type: HH Coil
Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021
- Helmholtz Coil – SN: 925; Calibrated: 3/29/2021

Noise Spectrum

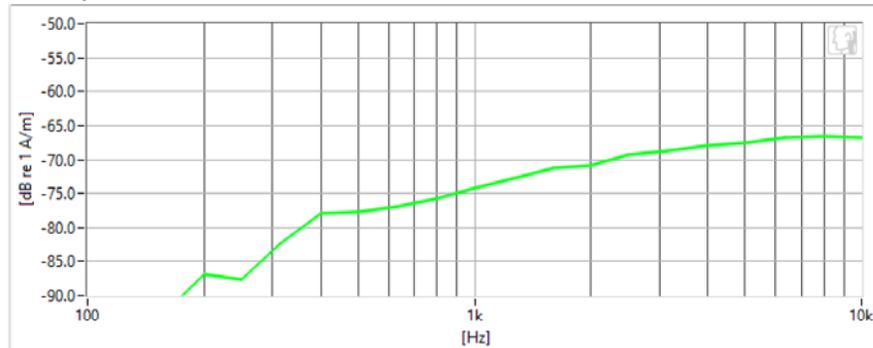

Frequency Response

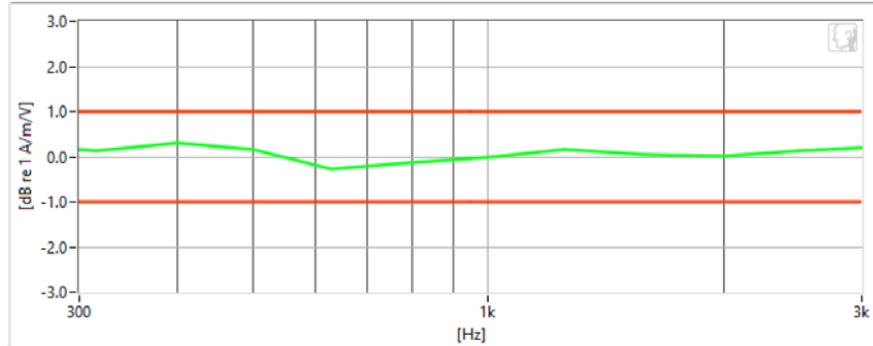

Results

Verification 1kHz Intensity	-10.094 dB	✓	Max/Min	-9.5/-10.5
Verification ABM2	-64.01 dB	✓	Maximum	-58.0
Frequency Response Margin	700m dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 68 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil – SN: 925


Type: HH Coil
Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021
- Helmholtz Coil – SN: 925; Calibrated: 3/29/2021

Noise Spectrum

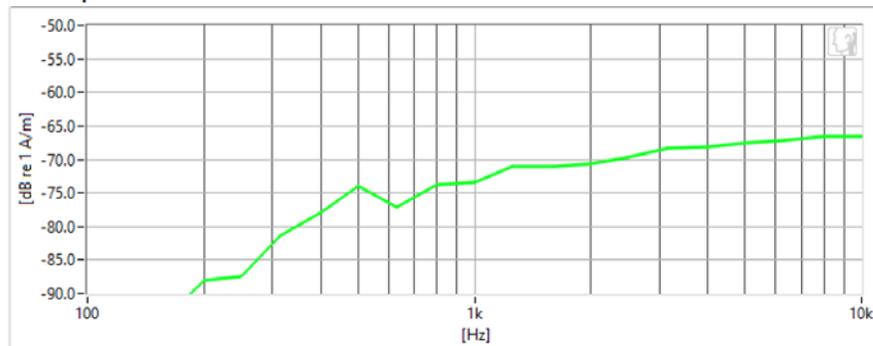

Frequency Response

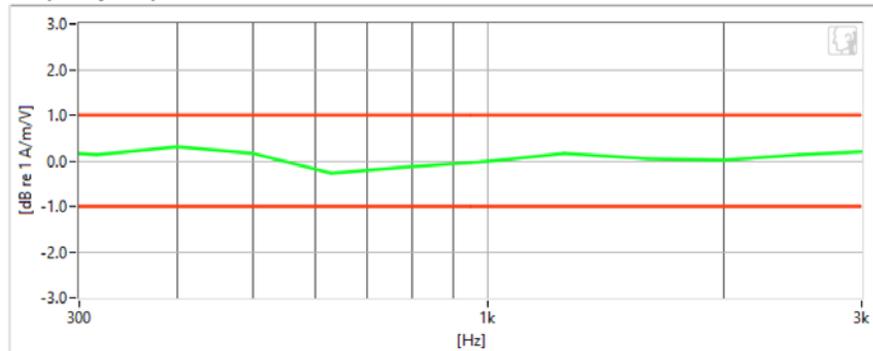

Results

Verification 1kHz Intensity	-10.326 dB	✓	Max/Min	-9.5/-10.5
Verification ABM2	-63.48 dB	✓	Maximum	-58.0
Frequency Response Margin	700m dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 69 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil – SN: 925


Type: HH Coil
Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021
- Helmholtz Coil – SN: 925; Calibrated: 3/29/2021

Noise Spectrum

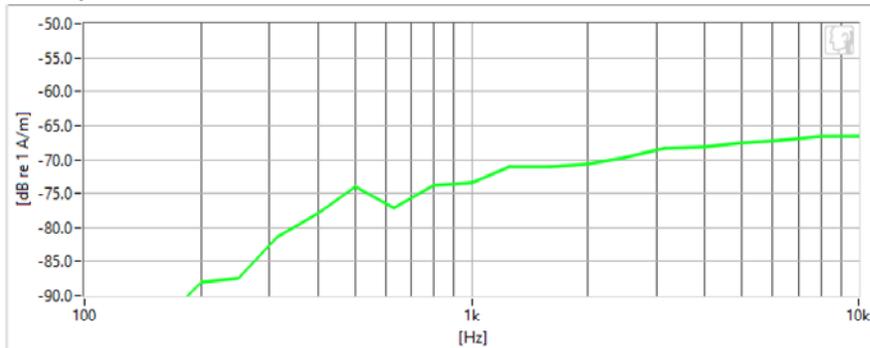

Frequency Response

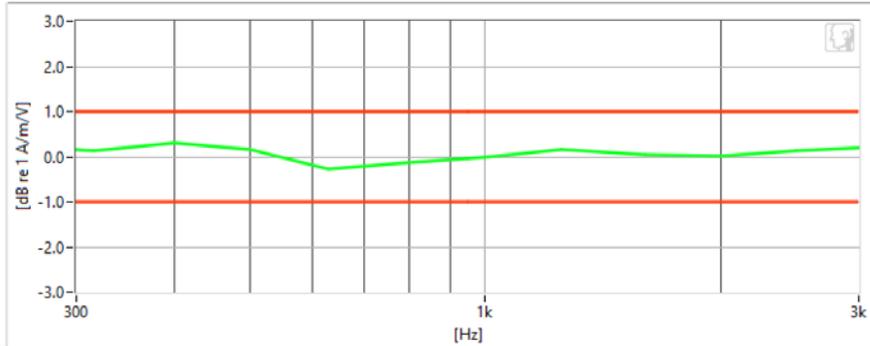

Results

Verification 1kHz Intensity	-10.161 dB	✓	Max/Min	-9.5/-10.5
Verification ABM2	-63.17 dB	✓	Maximum	-58.0
Frequency Response Margin	700m dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 70 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: Cellular CDMA
- Channel: 777
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

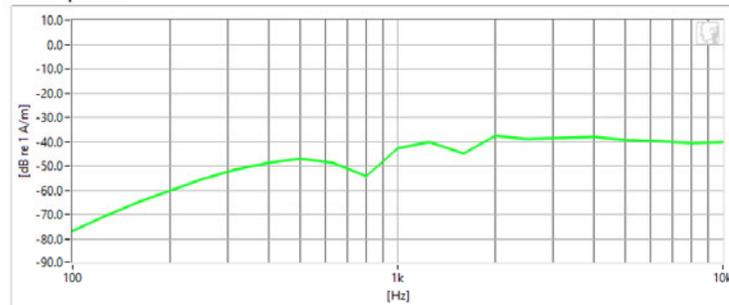

Frequency Response

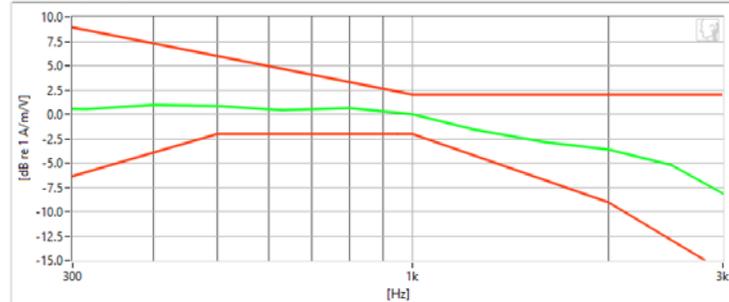

Results

ABM1	8.19 dB	✓	Minimum	-18.0
ABM2	-33.89 dB	✓	Maximum	0.0
SNNR	42.08 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 71 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: PCS CDMA
- Channel: 25
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

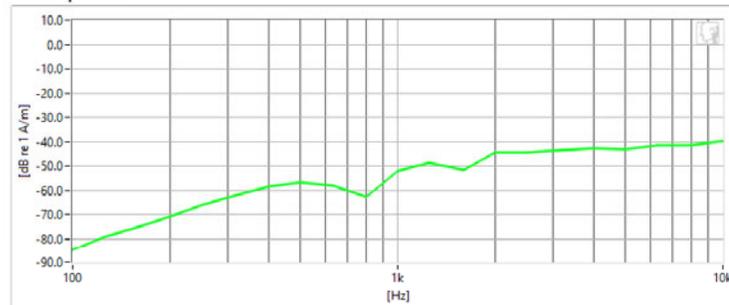

Frequency Response

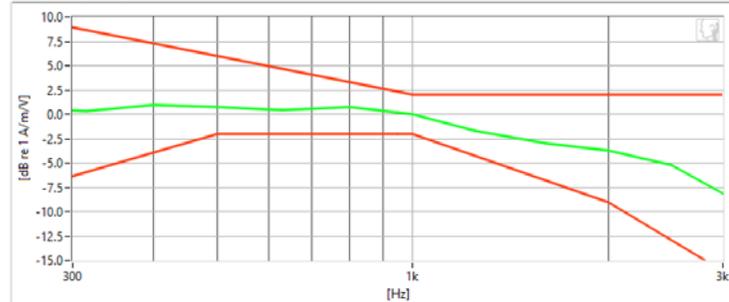

Results

ABM1	8.11 dB	✓	Minimum	-18.0
ABM2	-40.9 dB	✓	Maximum	0.0
SNNR	49.01 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 72 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: GSM850
- Channel: 190
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

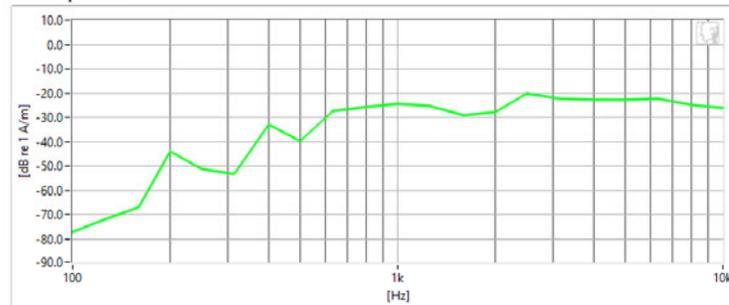

Frequency Response

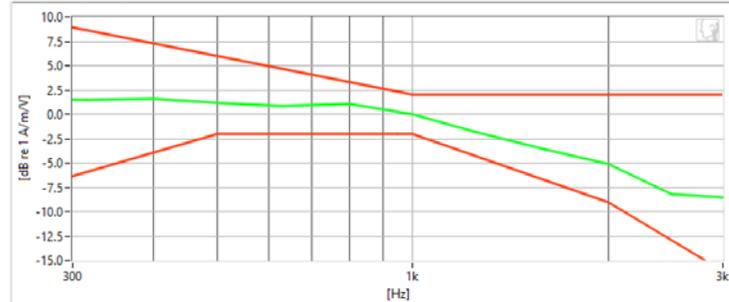

Results

ABM1	10.58 dB	✓	Minimum	-18.0
ABM2	-17.21 dB	✓	Maximum	0
SNNR	27.79 dB	✓	Minimum	20
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 73 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: GSM1900
- Channel: 661
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

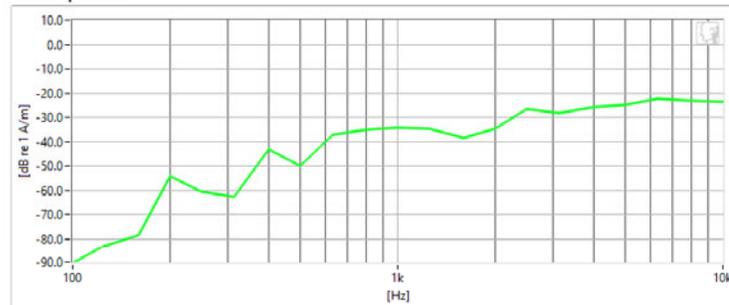

Frequency Response

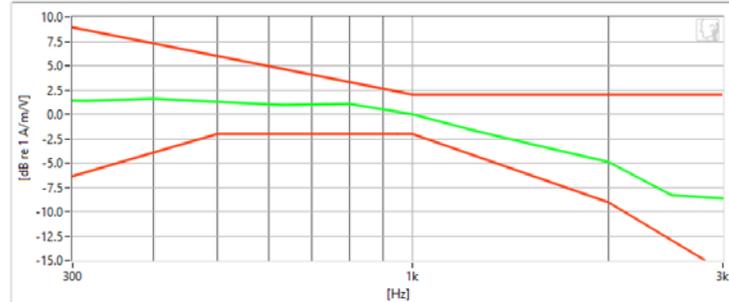

Results

ABM1	10.39 dB	✓	Minimum	-18.0
ABM2	-24.57 dB	✓	Maximum	0.0
SNNR	34.97 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 74 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: UMTS V
- Channel: 4183
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

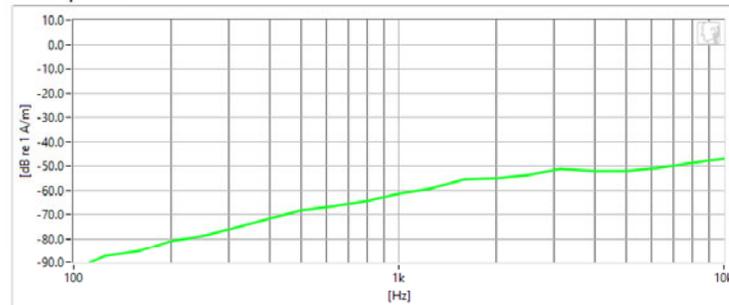

Frequency Response

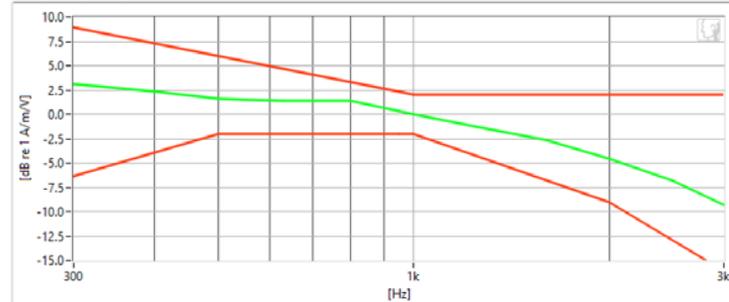

Results

ABM1	5.89 dB	✓	Minimum	-18.0
ABM2	-49.72 dB	✓	Maximum	0.0
SNNR	55.62 dB	✓	Minimum	20.0
Aligned Response - Normal	1.9 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 75 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: UMTS IV
- Channel: 1312
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

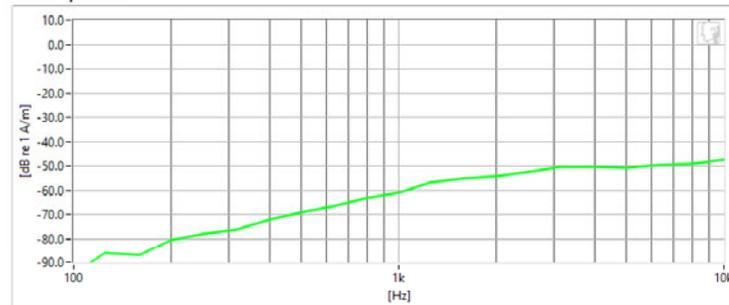

Frequency Response

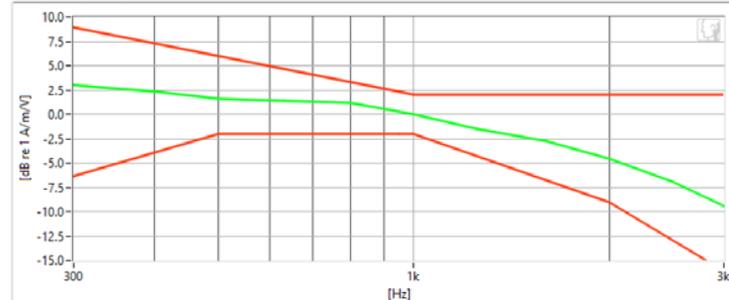

Results

ABM1	6 dB	✓	Minimum	-18.0
ABM2	-48.81 dB	✓	Maximum	0.0
SNNR	54.8 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 76 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: UMTS II
- Channel: 9262
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

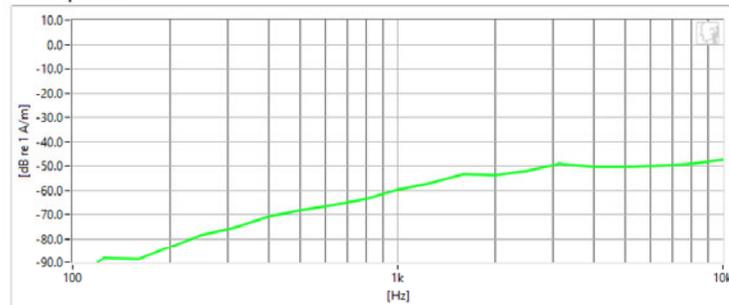

Frequency Response

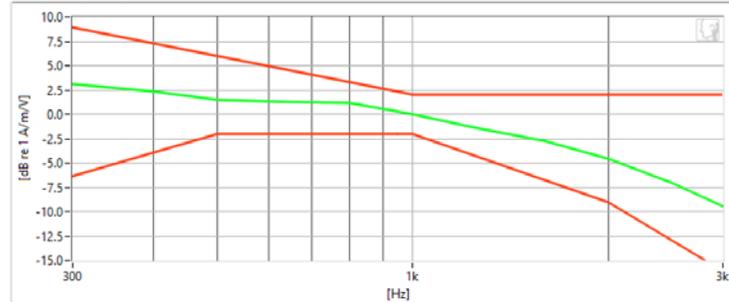

Results

ABM1	6.36 dB	✓	Minimum	-18.0
ABM2	-48.25 dB	✓	Maximum	0.0
SNNR	54.61 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 77 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: LTE FDD Band 71
- Bandwidth: 5MHz
- Channel: 133447
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

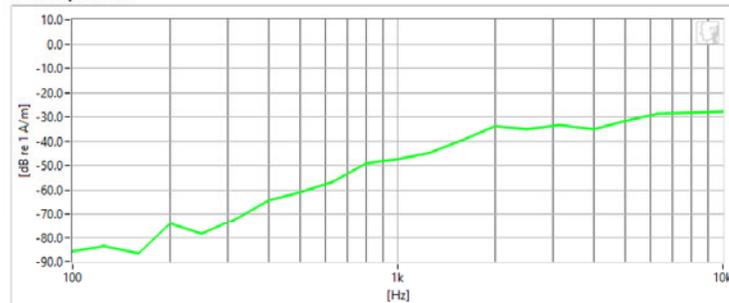

Frequency Response

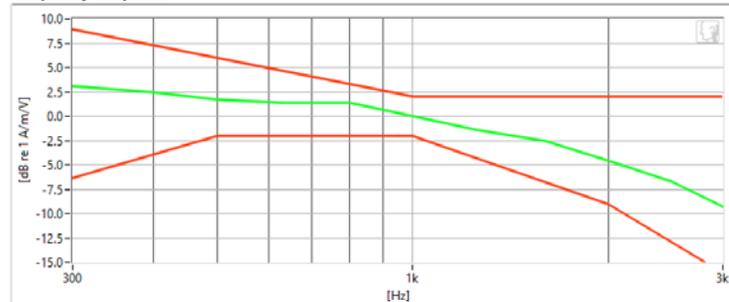

Results

ABM1	5.8 dB	✓	Minimum	-18.0
ABM2	-31.57 dB	✓	Maximum	0.0
SNNR	37.36 dB	✓	Minimum	20.0
Aligned Response - Normal	1.85 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 78 of 111



PCTEST[®]

 Proud to be part of 

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: LTE TDD Band 41 (PC2)
- Bandwidth: 5MHz
- Channel: 41490
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

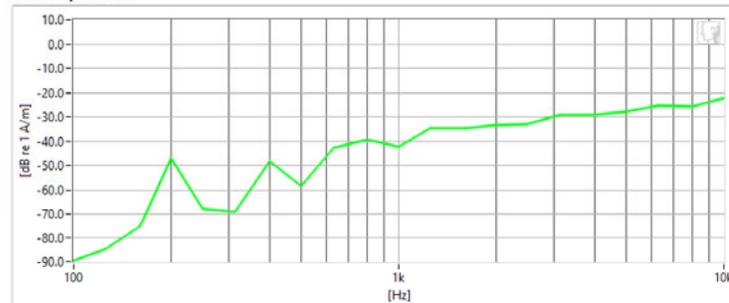

Frequency Response

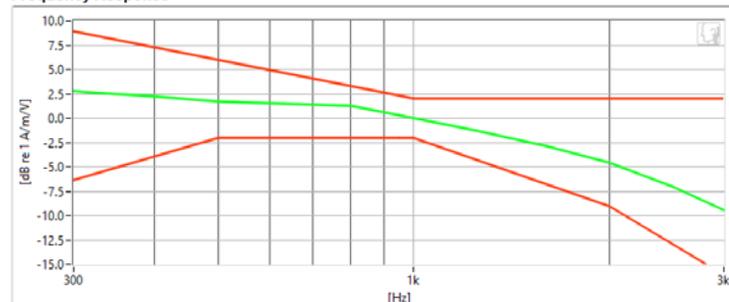

Results

ABM1	5.64 dB	✓	Minimum	-18.0
ABM2	-27.1 dB	✓	Maximum	0.0
SNNR	32.74 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 79 of 111

© 2021 PCTEST

REV 3.5.M

8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



Proud to be part of 

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: 2.4GHz WLAN
- Standard: IEEE 802.11g
- Channel: 6
- Speech Signal: 3GPP2 Normal Test Signal
- WIFI Variant: N

Noise Spectrum

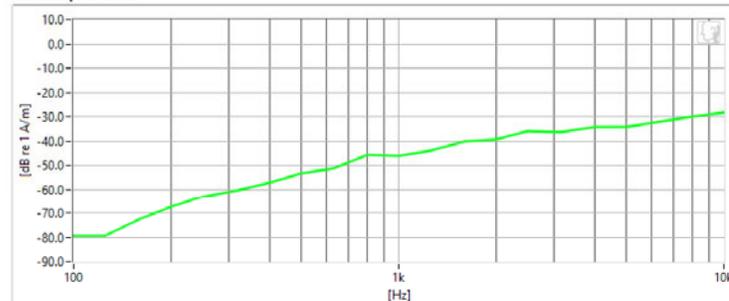

Frequency Response

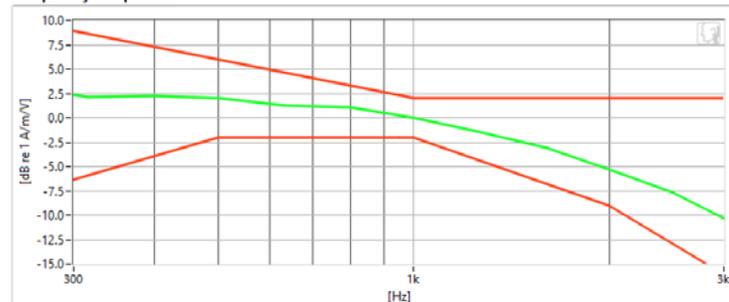

Results

ABM1	1.62 dB	✓	Minimum	-18.0
ABM2	-33.11 dB	✓	Maximum	0.0
SNNR	34.73 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 80 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020



PCTEST®

 Proud to be part of  element

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0584S

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: 2.4GHz WLAN
- Standard: IEEE 802.11b
- Channel: 6
- Speech Signal: 3GPP2 Normal Test Signal
- WIFI Variant: Q

Noise Spectrum

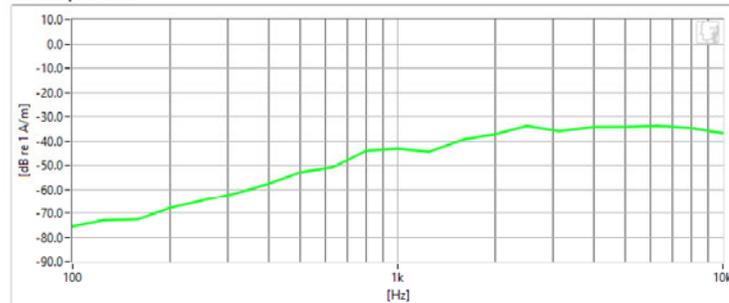

Frequency Response

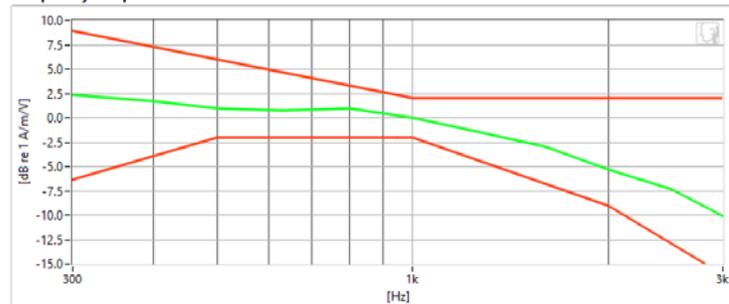

Results

ABM1	1.73 dB	✓	Minimum	-18.0
ABM2	-32.58 dB	✓	Maximum	0
SNNR	34.31 dB	✓	Minimum	20
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 81 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: 5GHz WLAN
- Standard: IEEE 802.11n
- Bandwidth: 40MHz
- Channel: 38
- Speech Signal: 3GPP2 Normal Test Signal
- WIFI Variant: N

Noise Spectrum

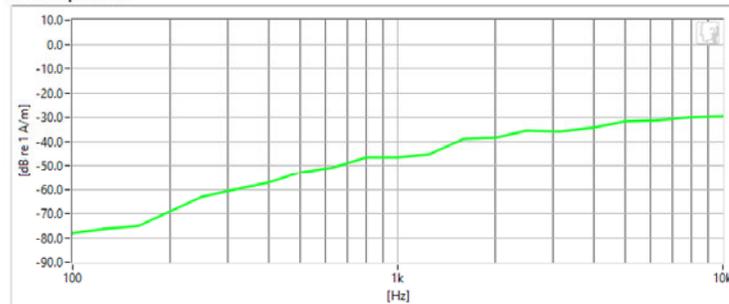

Frequency Response

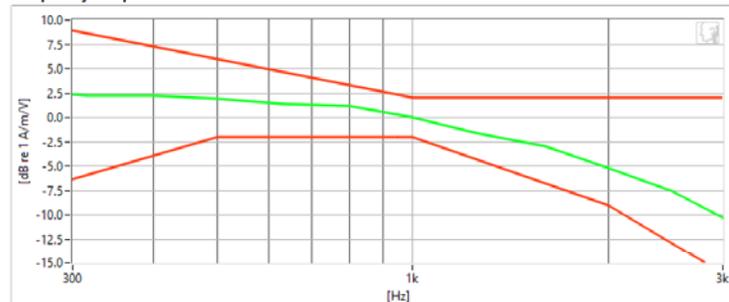

Results

ABM1	1.62 dB	✓	Minimum	-18.0
ABM2	-32.77 dB	✓	Maximum	0.0
SNNR	34.39 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 82 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0584S

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- Mode: 5GHz WLAN
- Standard: IEEE 802.11ac
- Bandwidth: 40MHz
- Channel: 38
- Speech Signal: 3GPP2 Normal Test Signal
- WIFI Variant: Q

Noise Spectrum

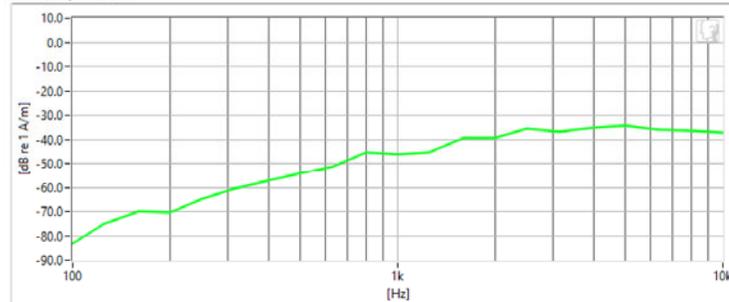

Frequency Response

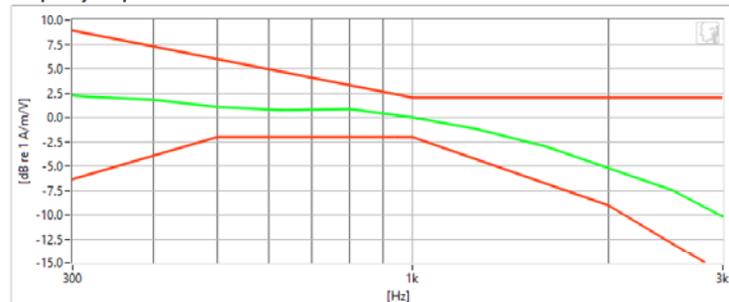

Results

ABM1	1.67 dB	✓	Minimum	-18.0
ABM2	-33.81 dB	✓	Maximum	0.0
SNNR	35.48 dB	✓	Minimum	20.0
Aligned Response - Normal	2 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 83 of 111	



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe – SN: TEM-1139; Calibrated: 3/29/2021


Test Configuration:

- VoIP Application: Google Duo
- Mode: EDGE850
- Channel: 190
- Speech Signal: 3GPP2 Normal Test Signal

Noise Spectrum

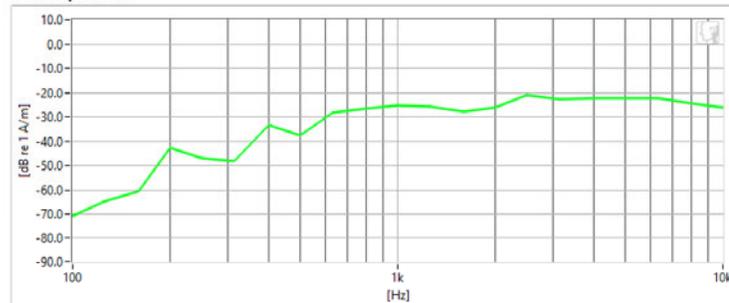

Frequency Response

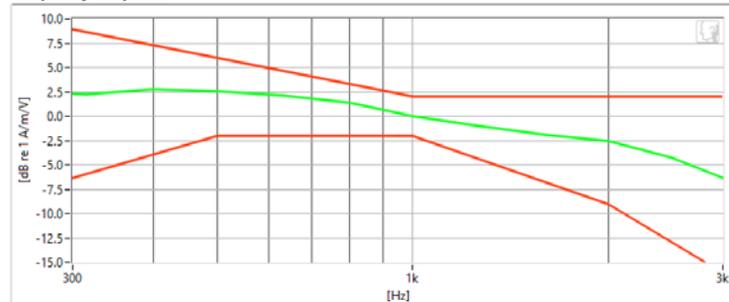

Results

ABM1	16 dB	✓	Minimum	-18.0
ABM2	-17.52 dB	✓	Maximum	0.0
SNNR	33.52 dB	✓	Minimum	20.0
Aligned Response - Normal	1.89 dB	✓	Tolerance curves	Aligned Data

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 84 of 111



PCTEST[®]

 Proud to be part of 

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: Cellular CDMA
- Channel: 777

Noise Spectrum

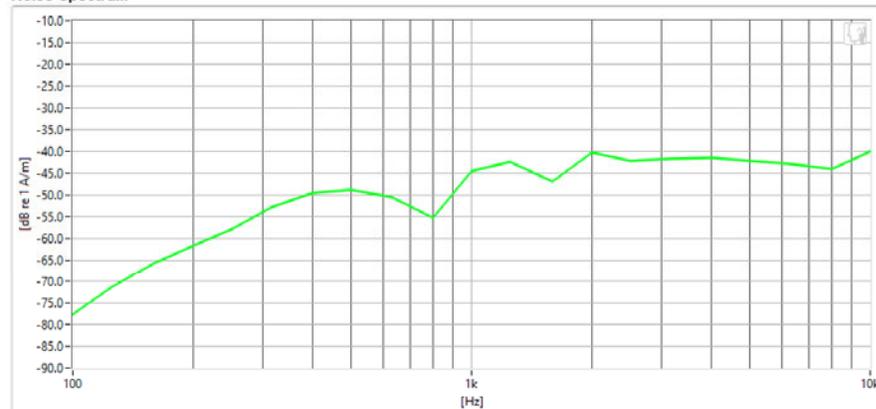

Results

ABM1	-480m dB	✓	Minimum	-18.0
ABM2	-36.05 dB	✓	Maximum	0.0
SNNR	35.57 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 85 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: PCS CDMA
- Channel: 25

Noise Spectrum

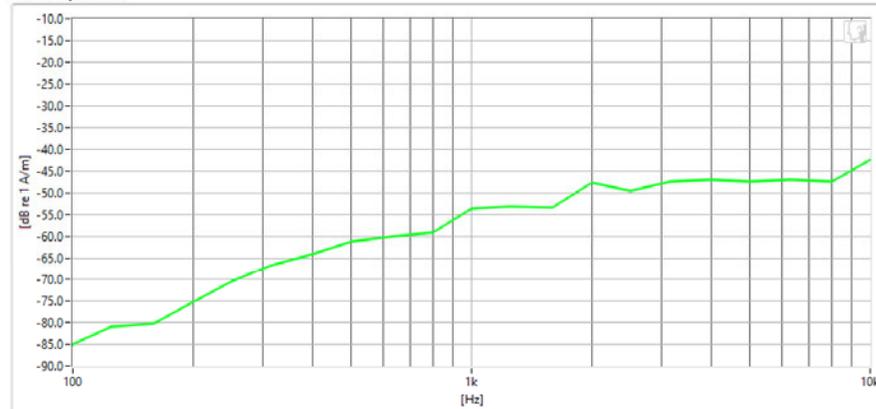

Results

ABM1	-560m dB	✓	Minimum	-18.0
ABM2	-44.39 dB	✓	Maximum	0
SNNR	43.82 dB	✓	Minimum	20

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 86 of 111



PCTEST[®]

 Proud to be part of 

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: GSM850
- Channel: 190

Noise Spectrum

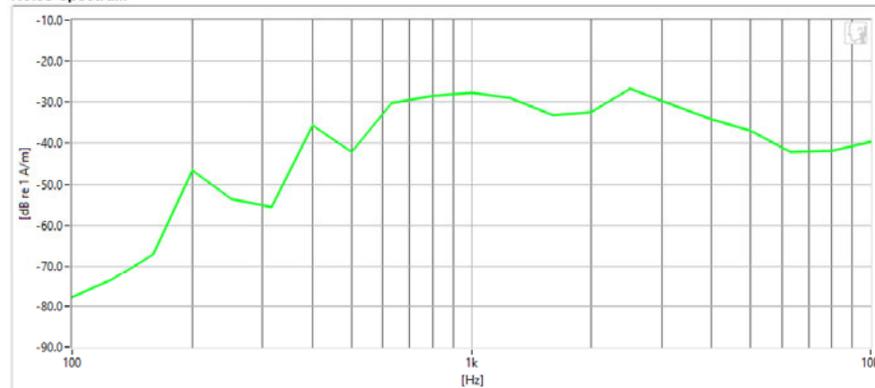

Results

ABM1	2.19 dB	✓	Minimum	-18.0
ABM2	-21.11 dB	✓	Maximum	0.0
SNNR	23.3 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 87 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST[®]

Proud to be part of  element

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: GSM1900
- Channel: 661

Noise Spectrum

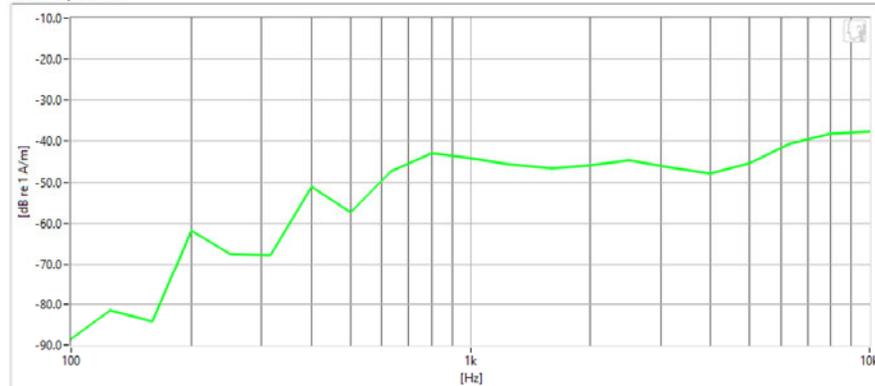

Results

ABM1	2.68 dB	✓	Minimum	-18.0
ABM2	-36.6 dB	✓	Maximum	0.0
SNNR	39.27 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 88 of 111	

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: UMTS V
- Channel: 4132

Noise Spectrum

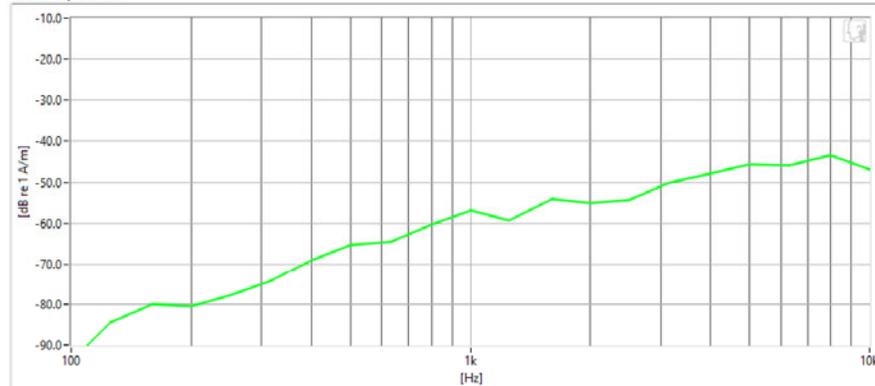

Results

ABM1	-2.18 dB	✓	Minimum	-18.0
ABM2	-47.26 dB	✓	Maximum	0.0
SNNR	45.08 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U	PCTEST Proud to be part of element	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 89 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: UMTS IV
- Channel: 1312

Noise Spectrum

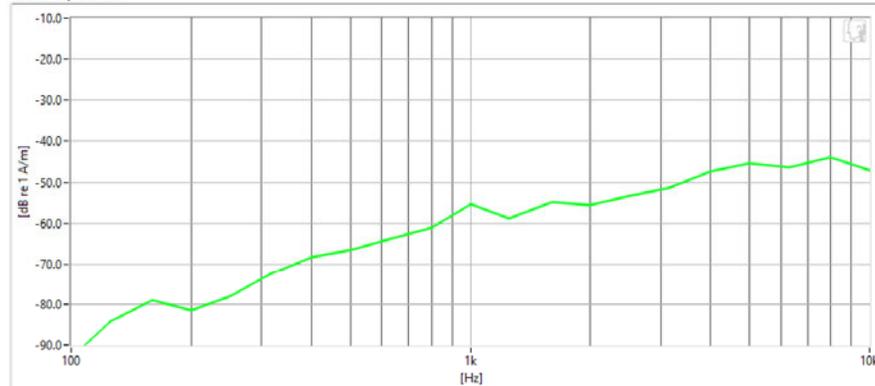

Results

ABM1	-2.23 dB	✓	Minimum	-18.0
ABM2	-47.24 dB	✓	Maximum	0.0
SNNR	45 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 90 of 111	



PCTEST[®]

Proud to be part of  element

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: UMTS II
- Channel: 9262

Noise Spectrum

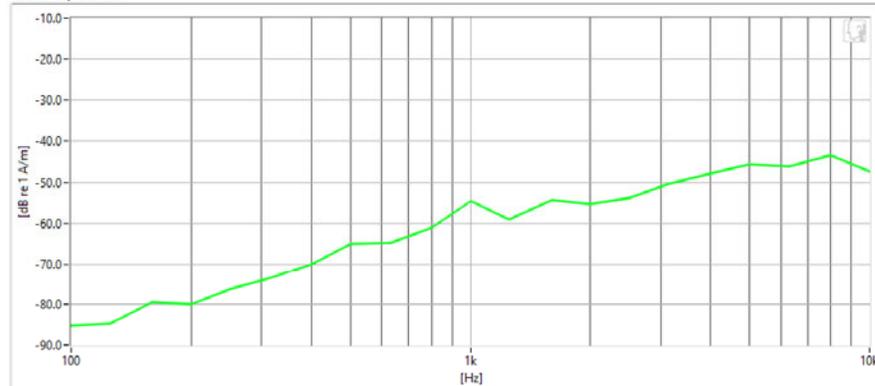

Results

ABM1	-2.15 dB	✓	Minimum	-18.0
ABM2	-47.08 dB	✓	Maximum	0
SNNR	44.94 dB	✓	Minimum	20

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 91 of 111	

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST[®]

 Proud to be part of  element

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: LTE FDD Band 71
- Bandwidth: 15MHz
- Channel: 133397

Noise Spectrum

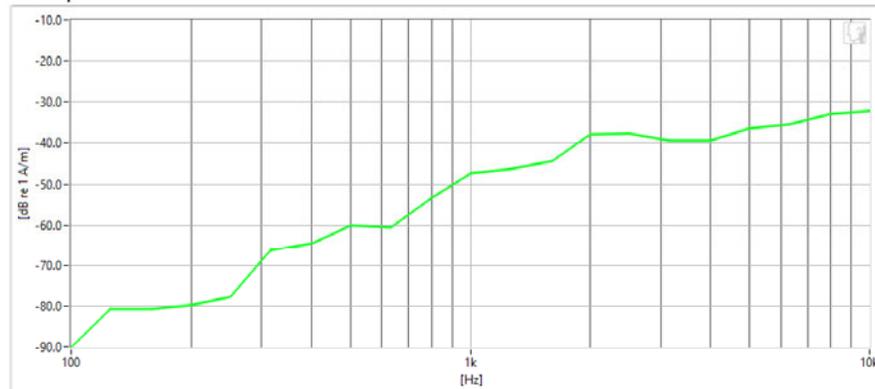

Results

ABM1	-2.52 dB	✓	Minimum	-18.0
ABM2	-35.65 dB	✓	Maximum	0.0
SNNR	33.13 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 92 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST[®]

 Proud to be part of 

PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: LTE TDD Band 48
- Bandwidth: 5MHz
- Channel: 55990

Noise Spectrum

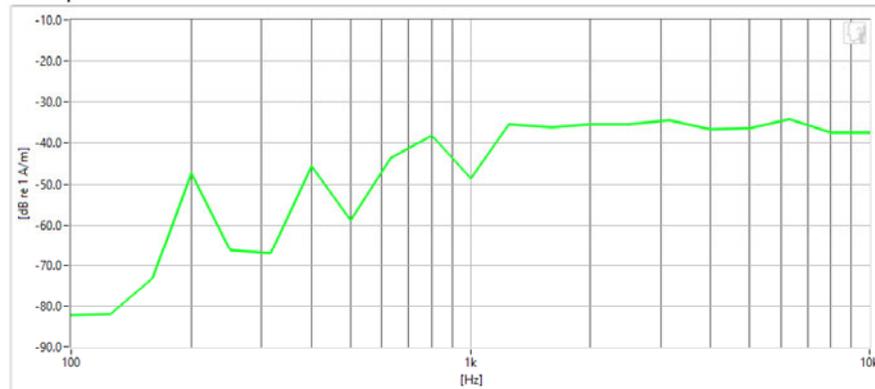

Results

ABM1	-2.5 dB	✓	Minimum	-18.0
ABM2	-29.89 dB	✓	Maximum	0.0
SNNR	27.4 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 93 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: 2.4GHz WLAN
- Standard: IEEE 802.11g
- Channel: 6
- WIFI Variant: N

Noise Spectrum

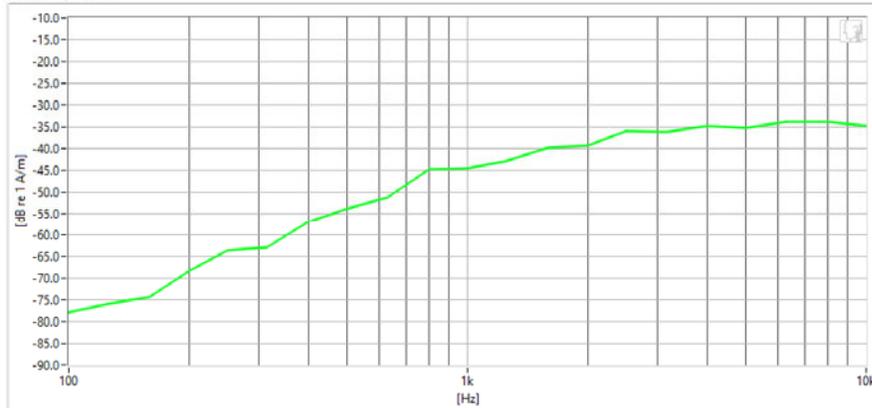

Results

ABM1	-6.41 dB	✓	Minimum	-18.0
ABM2	-33.34 dB	✓	Maximum	0.0
SNNR	26.93 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 94 of 111	

© 2021 PCTEST

REV 3.5.M
8/18/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0584S

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: 2.4GHz WLAN
- Standard: IEEE 802.11g
- Channel: 1
- WIFI Variant: Q

Noise Spectrum

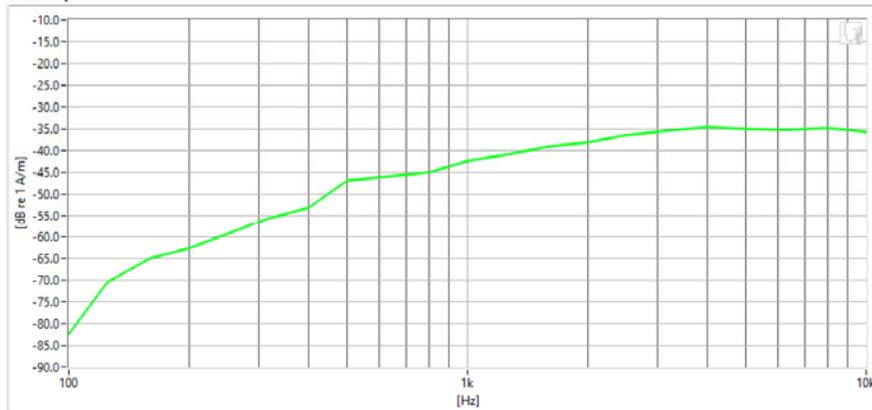

Results

ABM1	-6.42 dB	✓	Minimum	-18.0
ABM2	-32.33 dB	✓	Maximum	0.0
SNNR	25.91 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 95 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: 5GHz WLAN
- Standard: IEEE 802.11n
- Bandwidth: 40MHz
- Channel: 38
- WIFI Variant: N

Noise Spectrum

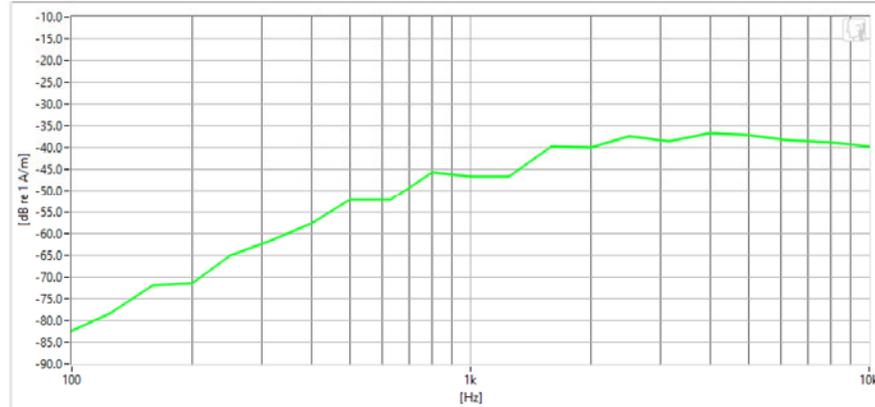

Results

ABM1	-6.73 dB	✓	Minimum	-18.0
ABM2	-34.93 dB	✓	Maximum	0.0
SNNR	28.2 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 96 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0584S

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- Mode: 5GHz WLAN
- Standard: IEEE 802.11a
- Channel: 40
- WIFI Variant: Q

Noise Spectrum

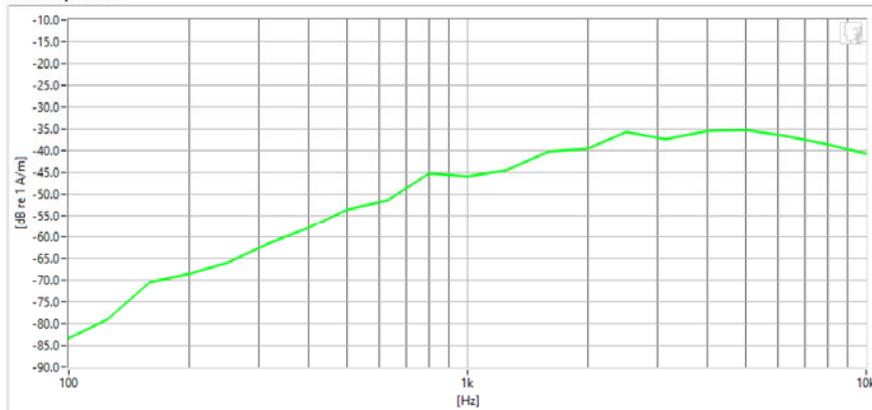

Results

ABM1	-6.02 dB	✓	Minimum	-18.0
ABM2	-34.12 dB	✓	Maximum	0.0
SNNR	28.1 dB	✓	Minimum	20.0

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 97 of 111



PCTEST Hearing-Aid Compatibility Facility

DUT: A3LSMF711U

Type: Portable Handset
Serial: 0187M

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe – SN: TEM-1133; Calibrated: 3/29/2021

Test Configuration:

- VoIP Application: Google Duo
- Mode: NR TDD n77 (DoD, PC2)
- Bandwidth: 50MHz
- Channel: 633334

Noise Spectrum

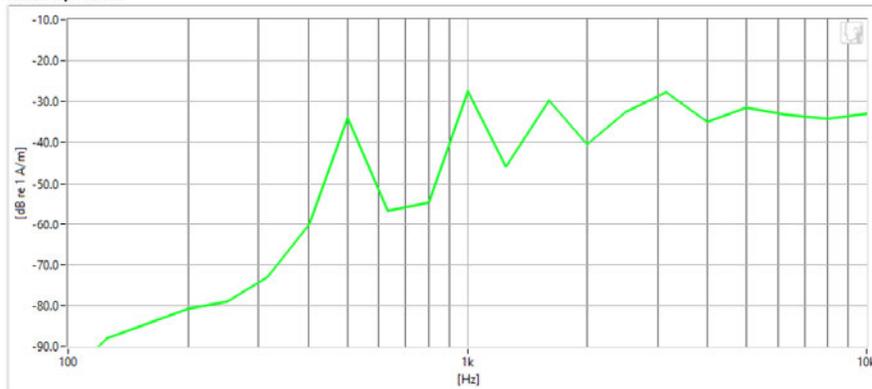

Results

ABM2	-24.21 dB	✓	Maximum	0.0
------	-----------	---	---------	-----

PCTEST 2021

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 98 of 111	

13. CALIBRATION CERTIFICATES

FCC ID: A3LSMF711U	 PCTEST <small>Head to the point of demand</small>	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 99 of 111	

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

West Caldwell Calibration Laboratories Inc.

Certificate of Calibration

for

AXIAL T COIL PROBE

Manufactured by: TEM CONSULTING, LP
 Model No: AXIAL T COIL PROBE
 Serial No: TEM-1139
 Calibration Recall No: 31813

vaA
4/7/2021

Submitted By:

Customer: ANDREW HARWELL

Company: PCTEST ENGINEERING LAB
 Address: 7185 OAKLAND MILLS ROAD
 COLUMBIA MD 21046

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No. AXIAL T C TEM C

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above and statement of conformance for ALL given specifications and standards fall under the decision rule: $A = (L - (U95) * M)$, where A is acceptance limit, L is manufacturer specifications, U95 is confidence level of 95% at $k=2$, and M is managed guard-band multiplier. The guard-band multiplier increases false-accept risk in favor of decreasing false-reject risk. Although the false accept risk increases, it is still below the Z540.3 2% risk requirement. The decision rule has been communicated and approved by customer during contract review.

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

Note: With this Certificate, Report of Calibration is included.

Approved by:



James Zhu

Quality Manager
 ISO/IEC 17025:2017

Calibration Date: 29-Mar-21

Certificate No: 31813 - 3

QA Doc. #1051 Rev. 3.0 5/29/20


Certificate Page 1 of 1

West Caldwell Calibration Laboratories, Inc.
 uncompromised calibration
 1575 State Route 96, Victor, NY 14564, U.S.A.



Calibration Lab. Cert. # 1533.01

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 100 of 111



REPORT OF CALIBRATION

for


TEM Consulting LP Axial T Coil Probe
Company: PCTest Engineering Lab

Model No.: Axial T Coil Probe

Serial No.: TEM-1139
I. D. No.: XXXX

Calibration results:			
Probe Sensitivity measured with Helmholtz Coil		Before & after data same: ...X...	
<i>Helmholtz Coil;</i>			
the number of turns on each coil;	10	No.	
the radius of each coil, in meters;	0.204	m	
the current in the coils, in amperes.;	0.08	A	
<i>Helmholtz Coil Constant;</i>			
	7.09	A/m/V	
<i>Helmholtz Coil magnetic field;</i>			
	5.92	A/m	
Probe Sensitivity at	1000	Hz.	
was	-60.26	dBV/A/m	
	0.970	mV/A/m	
Probe resistance	873	Ohms	
Laboratory Environment:			
Ambient Temperature:	20.4	°C	
Ambient Humidity:	29.3	% RH	
Ambient Pressure:	99.394	kPa	
Calibration Date:	29-Mar-2021		
Calibration Due:			
Report Number:	31813 -3		
Control Number:	31813		
The above listed instrument meets or exceeds the tested manufacturer's specifications.			
This Calibration is traceable through NIST test numbers: 684.07/O-0000001126-20			
The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.			

Graph represents Probes Frequency Response.

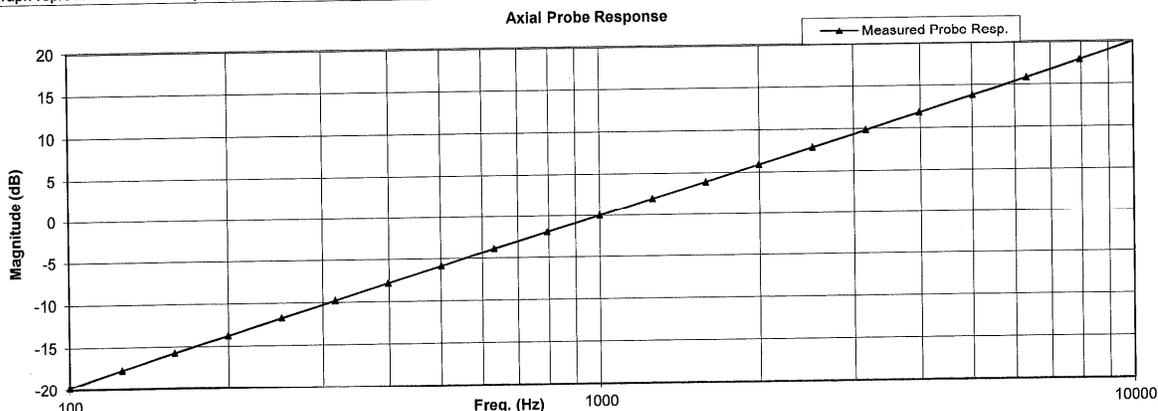

The above listed instrument was checked using calibration procedure documented in West Caldwell Calibration Laboratories Inc. procedure : Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC
 Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSS Z540-1, (MIL-STD-45662A) and ISO 9001:2015, ISO 17025

Cal. Date: 29-Mar-2021
 Calibrated on WCCL system type 9700

Measurements performed by: *James Zhu*
James Zhu

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 101 of 111

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564
Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe
Company: PCTest Engineering Lab

for
Model No.: Axial T Coil Probe

Serial No.: TEM-1139

Test	Function	Tolerance		Measured values		
				Before	Out	Remarks
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.26		
2.0	Probe Level Linearity	Ref. (0 dB)	dB			
			6	5.94		
			0	0.00		
			-6	-6.03		
			-12	-12.04		
3.0	Probe Frequency Response	Ref. (0 dB)	Hz			
			100	-19.8		
			126	-17.8		
			158	-15.7		
			200	-13.8		
			251	-11.8		
			316	-9.8		
			398	-7.8		
			501	-5.9		
			631	-3.9		
			794	-2.0		
			1000	0.0		
			1259	2.0		
			1585	3.9		
			1995	5.9		
			2512	7.9		
			3162	9.8		
3981	11.8					
5012	13.8					
6310	15.8					
7943	17.9					
10000	20.0					

Instruments used for calibration:		S/N	Date of Cal.	Traceability No.	Due Date
HP	34401A	US360641	2-Jul-2020	,610119	2-Jul-2021
HP	34401A	US361024	2-Jul-2020	,610119	2-Jul-2021
HP	33120A	US360437	2-Jul-2020	,610119	2-Jul-2021
B&K	2133	1583254	1-Jul-2020	684.07/O-0000001126-20	1-Jul-2021

Cal. Date: 29-Mar-2021
Calibrated on WCCL system type 9700

Tested by: James Zhu

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 102 of 111

West Caldwell Calibration Laboratories Inc.

Certificate of Calibration

for

RADIAL T COIL PROBE

Manufactured by: TEM CONSULTING, LP
Model No: RADIAL T COIL PROBE
Serial No: TEM-1133
Calibration Recall No: 31813

Submitted By:

Customer: ANDREW HARWELL

Company: PCTEST ENGINEERING LAB
Address: 7185 OAKLAND MILLS ROAD
COLUMBIA

MD 21046

Handwritten: 4/7/2021

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No. RADIAL T TEM C

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above and statement of conformance for ALL given specifications and standards fall under the decision rule: $A = (L - (U95) * M)$, where A is acceptance limit, L is manufacturer specifications, U95 is confidence level of 95% at $k=2$, and M is managed guard-band multiplier. The guard-band multiplier increases false-accept risk in favor of decreasing false-reject risk. Although the false accept risk increases, it is still below the Z540.3 2% risk requirement. The decision rule has been communicated and approved by customer during contract review.

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NC SL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

Note: With this Certificate, Report of Calibration is included.

Approved by:

James Zhu

Calibration Date: 29-Mar-21

Quality Manager
ISO/IEC 17025:2017

Certificate No: 31813 - 2

QA Doc. #1051 Rev. 3.0 5/29/20

Certificate Page 1 of 1


uncompromised calibration
1575 State Route 96, Victor, NY 14564, U.S.A.

**West Caldwell
Calibration
Laboratories, Inc.**



Calibration Lab. Cert. # 1533.01

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 103 of 111



REPORT OF CALIBRATION

for

TEM Consulting LP Radial T Coil Probe
Company: PCTest Engineering Lab


Model No.: Radial T Coil Probe

Serial No.: TEM-1133
I. D. No.: XXXX

Calibration results:		Probe Sensitivity measured with Helmholtz Coil		Before & after data same: ...X...	
Helmholtz Coil;				Laboratory Environment:	
the number of turns on each coil;	10	No.		Ambient Temperature:	20.4 °C
the radius of each coil, in meters;	0.204	m		Ambient Humidity:	29.3 % RH
the current in the coils, in amperes.;	0.09	A		Ambient Pressure:	99.394 kPa
Helmholtz Coil Constant;	7.09	A/m/V		Calibration Date:	29-Mar-2021
Helmholtz Coil magnetic field;	5.97	A/m		Re-calibration Due:	
Probe Sensitivity at	1000	Hz.		Report Number:	31813 -2
was	-60.18	dBV/A/m		Control Number:	31813
	0.980	mV/A/m			
Probe resistance	896	Ohms			

The above listed instrument meets or exceeds the tested manufacturer's specifications.
This Calibration is traceable through NIST test numbers: 684.07/O-0000001126-20
The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

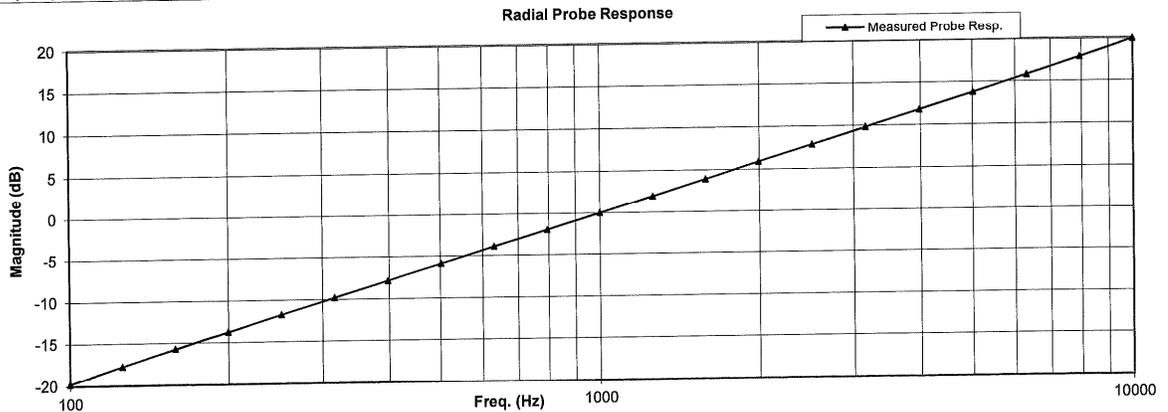

The above listed instrument was checked using calibration procedure documented in West Caldwell Calibration Laboratories Inc. procedure : Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC
Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015, ISO 17025

Cal. Date: 29-Mar-2021
Calibrated on WCCL system type 9700

Measurements performed by: James Zhu

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 104 of 111

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564
Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe for Model No.: Radial T Coil Probe Serial No.: TEM-1133
Company: PCTest Engineering Lab

Test	Function	Tolerance	Measured values			
			Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz. dBV/A/m	-60.18			
2.0	Probe Level Linearity	dB	6.04			
		Ref. (0 dB)	0			
			-6			
			-12			
3.0	Probe Frequency Response	Hz				
		100	-19.8			
		126	-17.8			
		158	-15.7			
		200	-13.8			
		251	-11.8			
		316	-9.8			
		398	-7.8			
		501	-5.9			
		631	-3.9			
		794	-2.0			
		Ref. (0 dB)	1000	0.0		
			1259	2.0		
			1585	3.9		
			1995	5.9		
			2512	7.8		
			3162	9.8		
	3981	11.8				
	5012	13.8				
	6310	15.8				
	7943	17.8				
	10000	20.0				

Instruments used for calibration:			Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	2-Jul-2020	,610119	2-Jul-2021
HP	34401A	S/N US361024	2-Jul-2020	,610119	2-Jul-2021
HP	33120A	S/N US360437	2-Jul-2020	,610119	2-Jul-2021
B&K	2133	S/N 1583254	1-Jul-2020	684.07/O-0000001126-20	1-Jul-2021

Cal. Date: 29-Mar-2021
Calibrated on WCCL system type 9700

Tested by: James Zhu

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 105 of 111

14. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: A3LSMF711U	 PCTEST Head to the point of the device	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset	Page 106 of 111	

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

15. REFERENCES

1. ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids., New York, NY, IEEE, May 2011
2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
4. FCC Public Notice DA 06-1215, *Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard*, June 6, 2006
5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," *Wireless Telephones and Hearing Aids: New Challenges for Audiology*, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
9. Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
10. Byrne, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
11. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
19. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
20. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Construction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

FCC ID: A3LSMF711U		HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 107 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
25. Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: A3LSMF711U	 PCTEST Head to the point of demand	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename: 1M2104070032-20-R2.A3L	Test Dates: 4/19/2021 - 5/6/2021	DUT Type: Portable Handset		Page 108 of 111

© 2021 PCTEST

REV 3.5.M
8/18/2020

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.