



REPORT No.: SZ22070100W01

TEST REPORT

APPLICANT : Sveaverken Svea Agri AB

PRODUCT NAME : Smart Neck-Tag

MODEL NAME : SCN100

BRAND NAME : Sveaverken

FCC ID : 2A3NS-SCN100

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2022-07-12

TEST DATE : 2022-07-19 to 2022-08-24

ISSUE DATE : 2022-08-29

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. The Channel Number and Frequency	4
1.4. Test Standards and Results	5
1.5. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Antenna Requirement	7
2.2. Hopping Mechanism	7
2.3. Number of Hopping Frequency	8
2.4. Duty Cycle of Test Signal	10
2.5. Maximum Peak Conducted Output Power	11
2.6. Maximum Average Conducted Output Power	14
2.7. 20 dB Bandwidth	15
2.8. Carried Frequency Separation	18
2.9. Time of Occupancy (Dwell time)	20
2.10. Conducted Spurious Emissions	23
2.11. Conducted Emission	28
2.12. Radiated Emission	30
Annex A Test Uncertainty	37
Annex B Testing Laboratory Information	38

Change History		
Version	Date	Reason for change
1.0	2022-08-29	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Sveaverken Svea Agri AB
Applicant Address:	Hogmossevägen 11, SE-641 39 Katrineholm, Sweden
Manufacturer:	Sveaverken Intelligent Technology (shenzhen) Co., Ltd
Manufacturer Address:	5/F, Building 13, Nangang Second Industrial Zone, 1026 Songbai Road, Nanshan District, Shenzhen

1.2. Equipment Under Test (EUT) Description

Product Name:	Smart Neck-Tag	
Sample No.:	8#	
Hardware Version:	V1112	
Software Version:	V4.0	
Modulation Technology:	FHSS	
Equipment Type:	LoRa	
Operating Frequency Range:	902.3MHz–926.8MHz	
Antenna Type:	FPCB Antenna	
Antenna Gain:	4.00dBi	
Accessory Information:	Battery	
	Brand Name:	N/A
	Model No.:	ER14505
	Serial No.:	N/A
	Capacity:	2400*2mAh
	Rated Voltage:	3.6V AAA
	Charge Limit:	N/A
	Manufacturer:	EVE ENERGY CO., LTD

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.3	32	908.5	63	914.7	94	921
2	902.5	33	908.7	64	914.9	95	921.2
3	902.7	34	908.9	65	915.2	96	921.4
4	902.9	35	909.1	66	915.4	97	921.6
5	903.1	36	909.3	67	915.6	98	921.8
6	903.3	37	909.5	68	915.8	99	922
7	903.5	38	909.7	69	916	100	922.2
8	903.7	39	909.9	70	916.2	101	922.4
9	903.9	40	910.1	71	916.4	102	922.6
10	904.1	41	910.3	72	916.6	103	922.8
11	904.3	42	910.5	73	916.8	104	923
12	904.5	43	910.7	74	917	105	923.2
13	904.7	44	910.9	75	917.2	106	923.4
14	904.9	45	911.1	76	917.4	107	923.6
15	905.1	46	911.3	77	917.6	108	923.8
16	905.3	47	911.5	78	917.8	109	924
17	905.5	48	911.7	79	918	110	924.2
18	905.7	49	911.9	80	918.2	111	924.4
19	905.9	50	912.1	81	918.4	112	924.6
20	906.1	51	912.3	82	918.6	113	924.8
21	906.3	52	912.5	83	918.8	114	925
22	906.5	53	912.7	84	919	115	925.2
23	906.7	54	912.9	85	919.2	116	925.4
24	906.9	55	913.1	86	919.4	117	925.6
25	907.1	56	913.3	87	919.6	118	925.8
26	907.3	57	913.5	88	919.8	119	926
27	907.5	58	913.7	89	920	120	926.2
28	907.7	59	913.9	90	920.2	121	926.4
29	907.9	60	914.1	91	920.4	122	926.6
30	908.1	61	914.3	92	920.6	123	926.8
31	908.3	62	914.5	93	920.8		

Note 1: The black bold channels were selected for test.

1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Jul. 20, 2022	Su Xiaoxian	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Jul. 20, 2022	Su Xiaoxian	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Aug. 02, 2022	Su Xiaoxian	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Aug. 02, 2022	Su Xiaoxian	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Jul. 20, 2022	Su Xiaoxian	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Jul. 20, 2022	Su Xiaoxian	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Jul. 20, 2022	Su Xiaoxian	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Jul. 20, 2022	Su Xiaoxian	PASS	No deviation
11	15.207	Conducted Emission	N/A	N/A	N/A ^{Note1}	N/A
12	15.209, 15.247(d)	Radiated Emission	Aug. 02, 2022	Gao Jianrou	PASS	No deviation

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for



devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB558074 D01 v05r02.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.0dB means the cable loss is 1.0dB.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 5: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Hopping Mechanism

2.2.1. Requirement

According to FCC §15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC §15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

2.2.2. Result: Compliant

The hopping mechanism of the EUT is based on the protocol that "*ISO18000-6C*".


2.3. Number of Hopping Frequency

2.3.1. Requirement

According to FCC section 15.247(a)(1)(i), frequency hopping systems operating in the 902MHz to 928MHz bands shall use at least 50 hopping frequencies if the 20dB bandwidth of the hopping channel is less than 250KHz; or at least 25 hopping frequencies if the 20dB bandwidth of the hopping channel is 250KHz or greater.

2.3.2. Test Description

Test Setup:

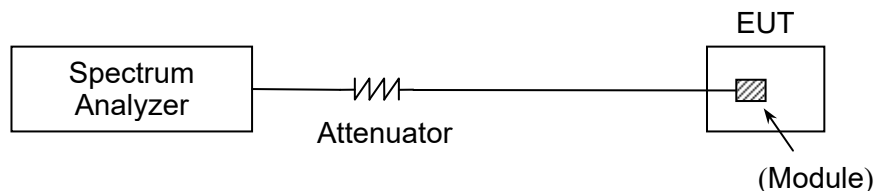

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the PC via Lan port.

2.3.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize




2.3.4. Test Result

A. Test Verdict:

Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
902-928	123	50	PASS

B. Test Plots:

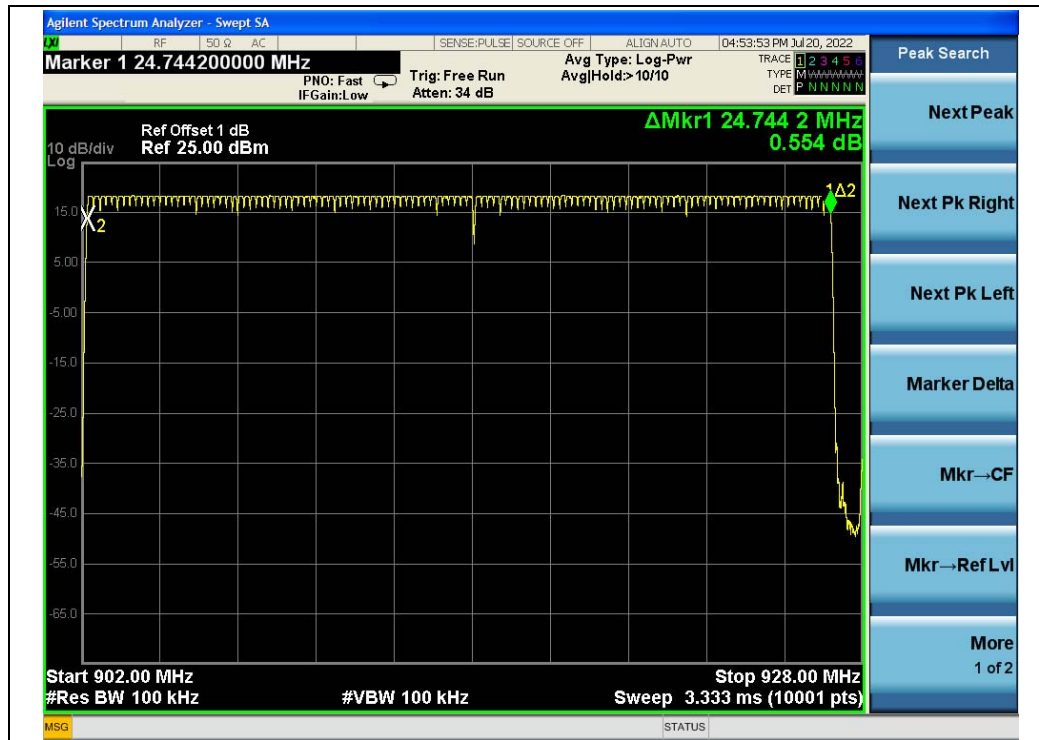

2.4. Duty Cycle of Test Signal


2.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.4.2. Test Description

Test Setup:

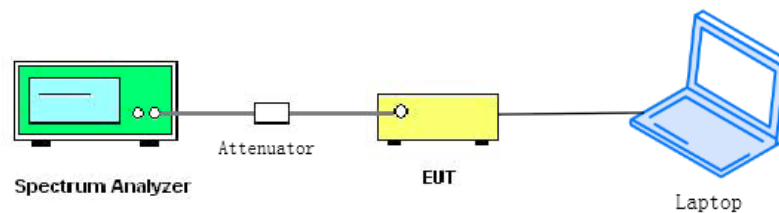

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.4.3. Test Result

Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
100.00	0.00


2.5. Maximum Peak Conducted Output Power

2.5.1. Requirement

According to FCC section 15.247(b)(2), for frequency hopping systems that operates in the 902MHz to 928MHz band employing at least 50 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt, and 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

2.5.2. Test Description

Test Setup:

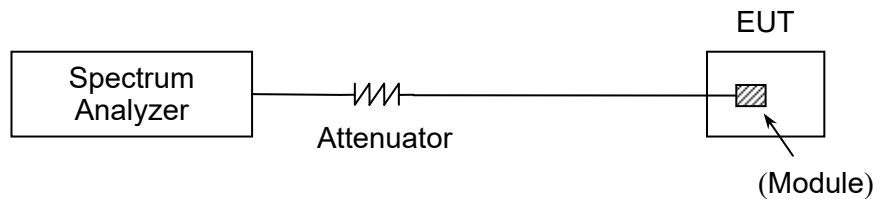

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the PC via Lan port.



2.5.3. Test Result

A.Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	902.3	8.43	0.0070	30	1	PASS
62	914.5	8.10	0.0065			PASS
123	926.8	7.89	0.0062			PASS

B.Test Plot:



(Channel 1)



(Channel 62)



(Channel 123)

2.6. Maximum Average Conducted Output Power


2.6.1. Requirement

According to FCC section 15.247(b)(2), for frequency hopping systems that operates in the 902MHz to 928MHz band employing at least 50 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt, and 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

2.6.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

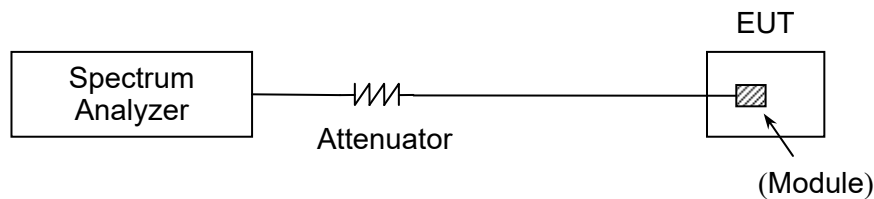

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the PC via Lan port.

2.6.3. Test Result

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
			Duty Factor	Duty Factor Calculated				
		dBm		dBm	W	dBm	W	
1	902.3	7.77	0.00	7.77	0.0060	30	1	PASS
62	914.5	7.50		7.50	0.0056			PASS
123	926.8	7.26		7.26	0.0053			PASS


2.7. 20 dB Bandwidth

2.7.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.7.2. Test Description

Test Setup:

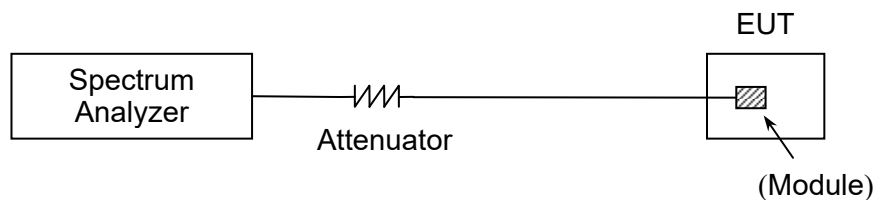

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the PC via Lan port.

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.7.4. Test Result


A.Test Verdict:

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	Result
1	902.3	142.10	PASS
62	914.5	141.40	PASS
123	926.8	142.30	PASS

B.Test Plot:



(Channel 1)

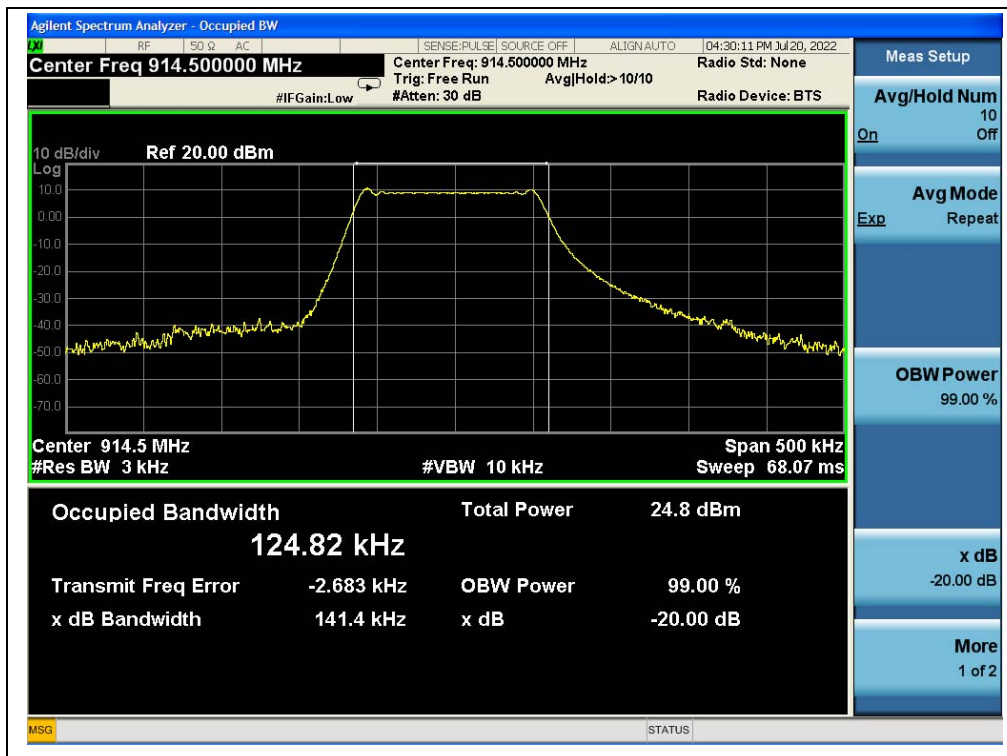

(Channel 62)



(Channel 123)


2.8. Carried Frequency Separation

2.8.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or 20dB bandwidth of the hopping channel, whichever is greater.

2.8.2. Test Description

Test Setup:

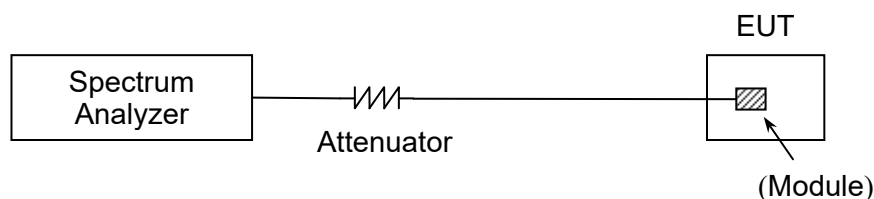

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the PC via Lan port.

2.8.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.




2.8.4. Test Result

A.Test Verdict:

Test Mode	Measured Channel Numbers	Carried Frequency Separation (kHz)	20dB bandwidth (kHz)	Min. Limit	Verdict
LoRa	62 and 63	219.6	142.3	20dB bandwidth	PASS

B.Test Plot:

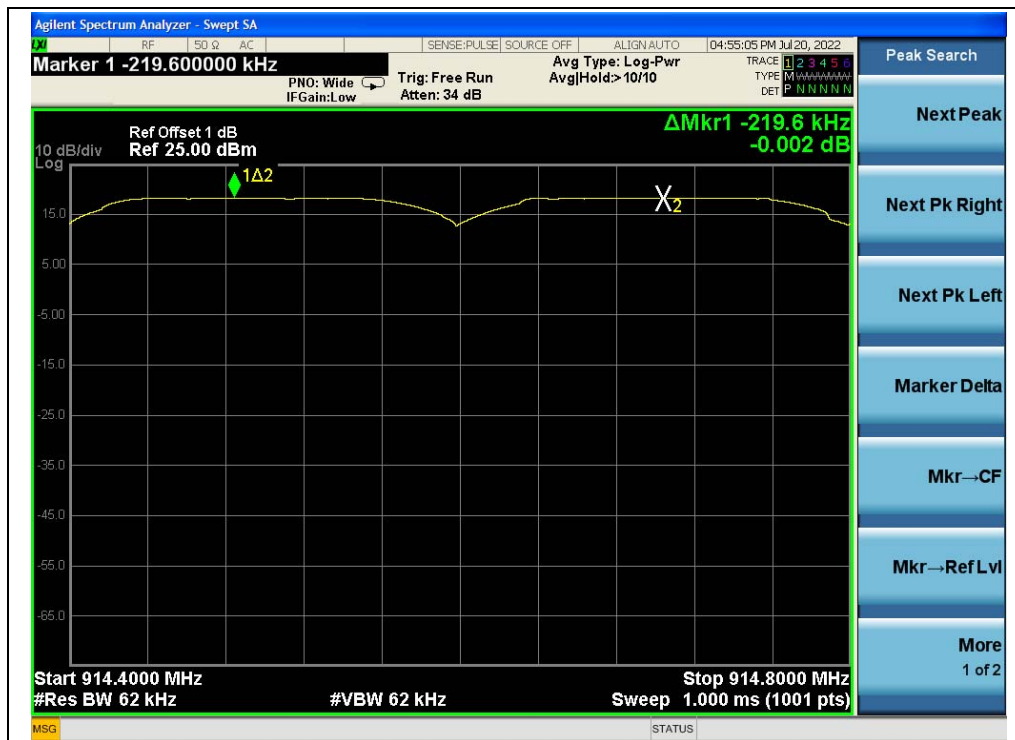


2.9. Time of Occupancy (Dwell time)

2.9.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.9.2. Test Description

Test Setup:

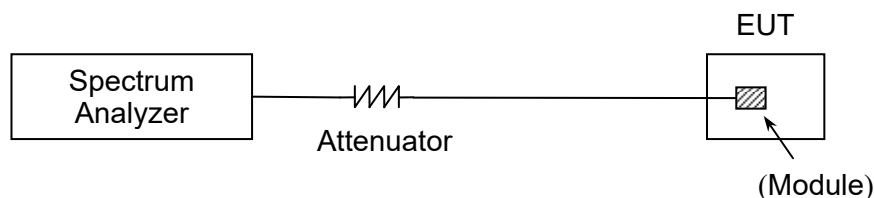

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the PC via Lan port.

2.9.3. Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in 10 second scan, to enable resolution of each occurrence. The average time of occupancy in the specified 20 second period is equal to (# of pulses in 20s) * pulse width.



A.Test Verdict:

Frequency (MHz)	Pulse Width (sec)	Number of pulse in 20 seconds	Average Time of Occupancy (sec)	Limit (sec)	Verdict
914.5	0.260	1	0.260	0.4	PASS

Agilent Spectrum Analyzer - Swept SA

RF 50 Q AC SENSE:PULSE SOURCE:OFF ALIGN:AUTO 04:59:06 PM Jul 20, 2022

Marker 1 260.000 ms PNO: Wide → Trig: Free Run Avg Type: Log-Pwr

IF Gain: Low Atten: 34 dB

TRACE 1 2 3 4 5 6 TYPE W W W W W W W W DET P N N N N N N

Ref Offset 1 dB Ref 25.00 dBm

10 dB/div Log

ΔMkr1 260.0 ms 0.00 dB

X₂ 1Δ2

Center 914.500000 MHz Span 0 Hz

Res BW 200 kHz #VBW 200 kHz Sweep 5.000 s (1001 pts)

MSG STATUS

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Marker Delta

Mkr→CF

Mkr→Ref Lvl

More 1 of 2

(Dwell time_ Pulse Width)




2.10. Conducted Spurious Emissions

2.10.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.10.2. Test Description

Test Setup:

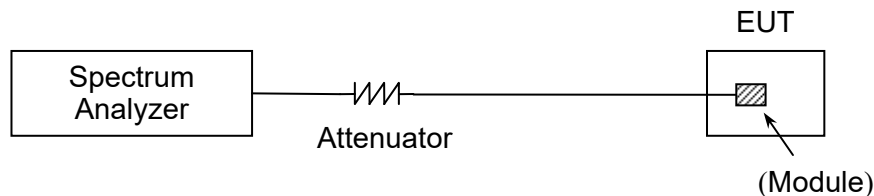

The EUT is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the PC via Lan port.

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize




2.10.4. Test Result


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	902.3	-45.43	18.16	-1.84	PASS
62	914.5	-46.58	18.10	-1.90	PASS
123	926.8	-46.44	18.14	-1.86	PASS


B. Test Plot:

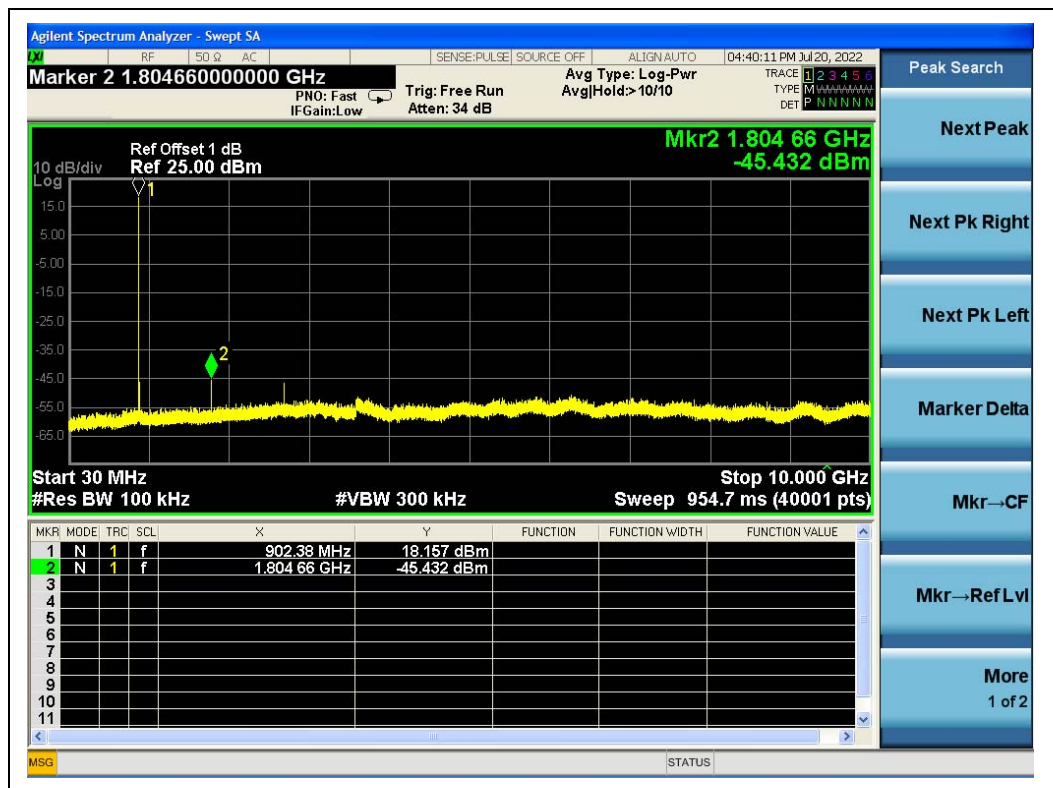


(30MHz to 25GHz, Channel 1)

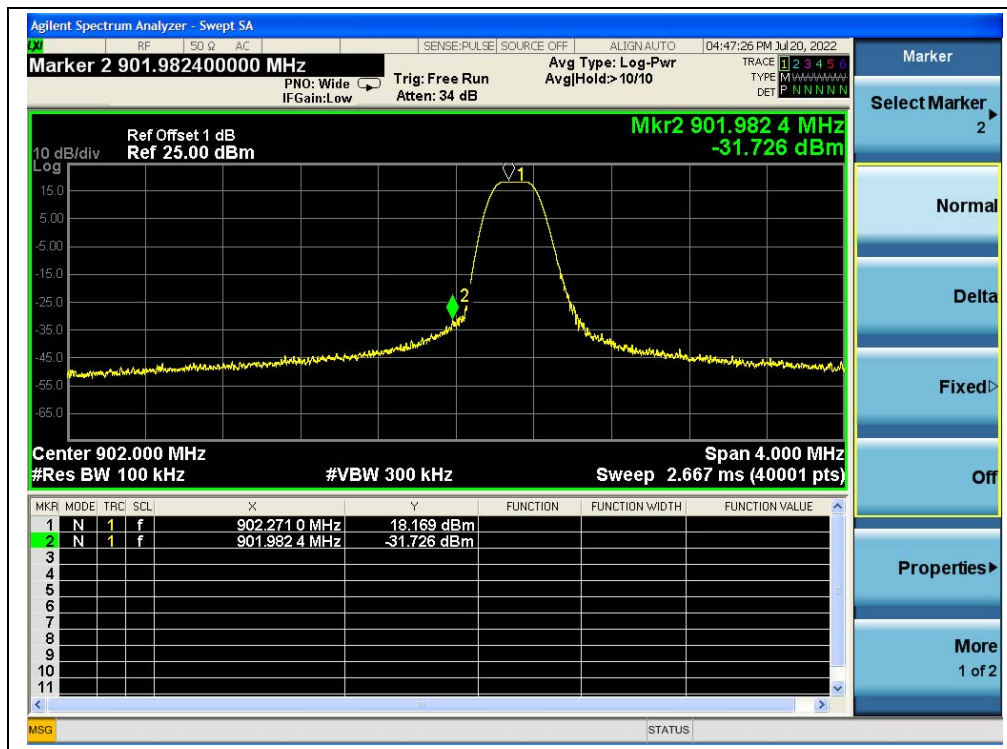


(Band edge, Channel 1)

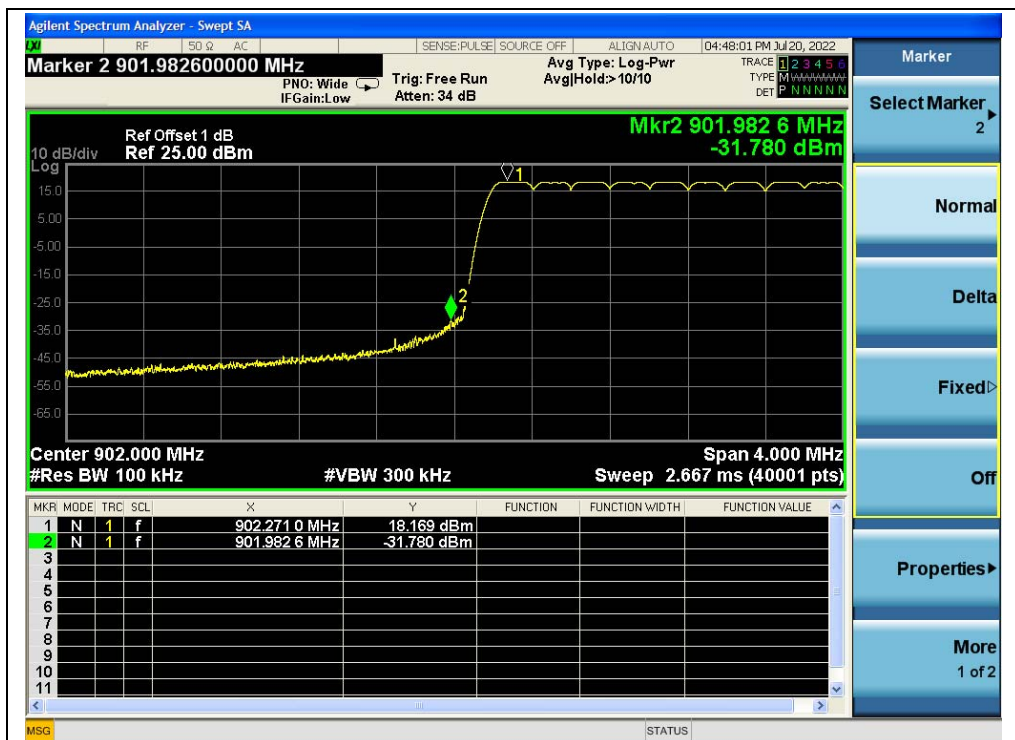


(Band edge with hopping on, Channel 1)

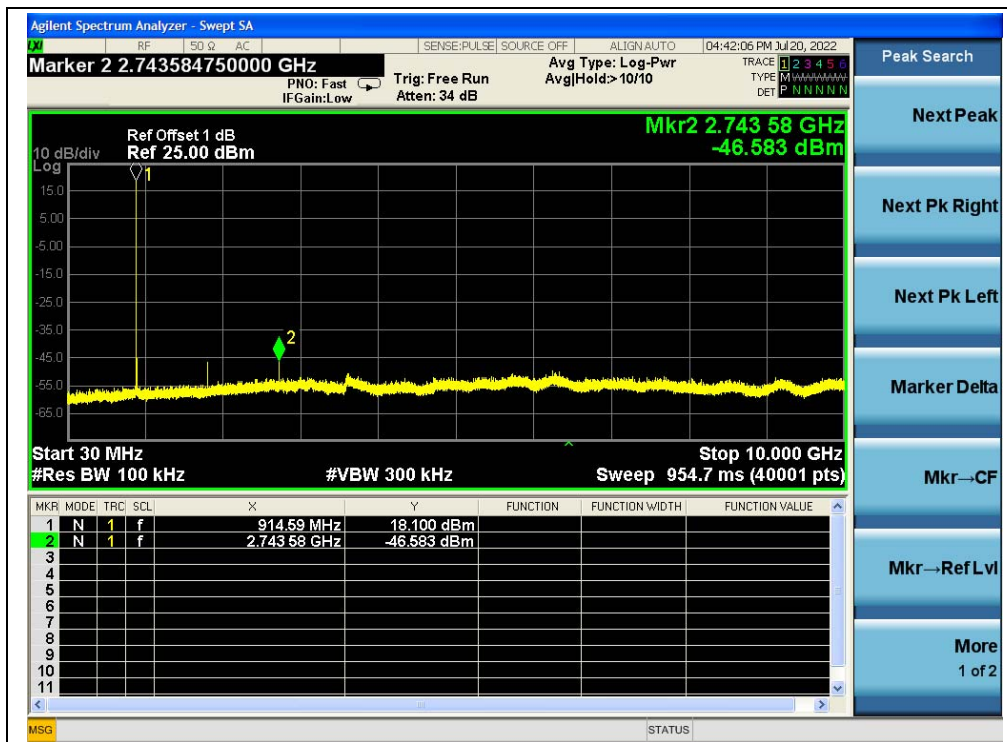


(30MHz to 25GHz, Channel 62)

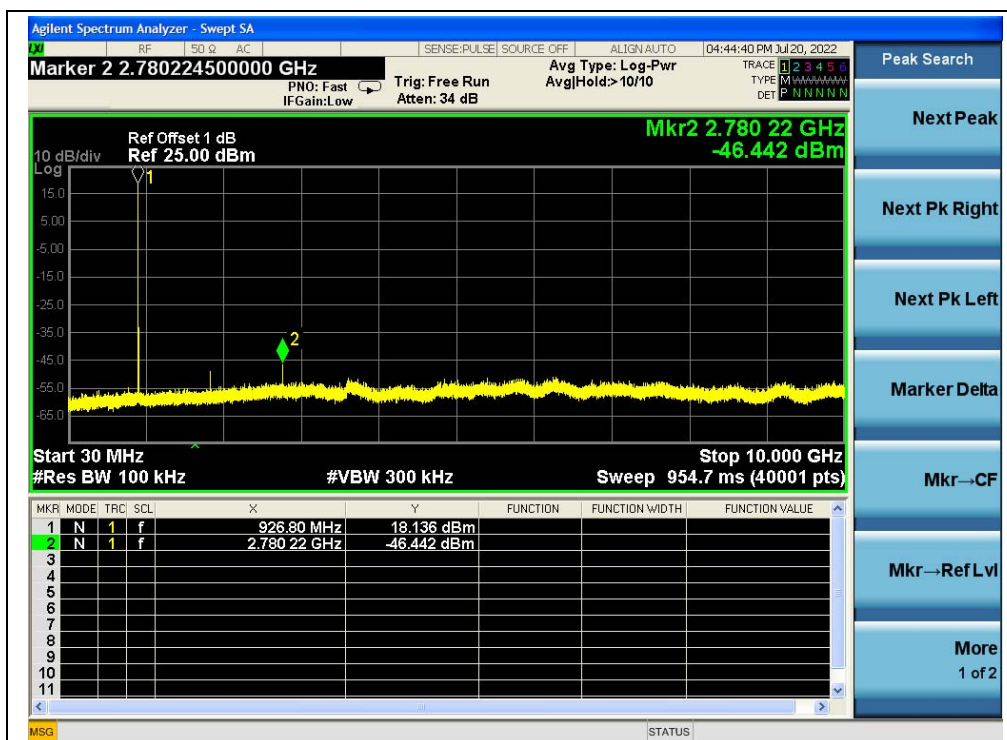

(30MHz to 25GHz, Channel 123)

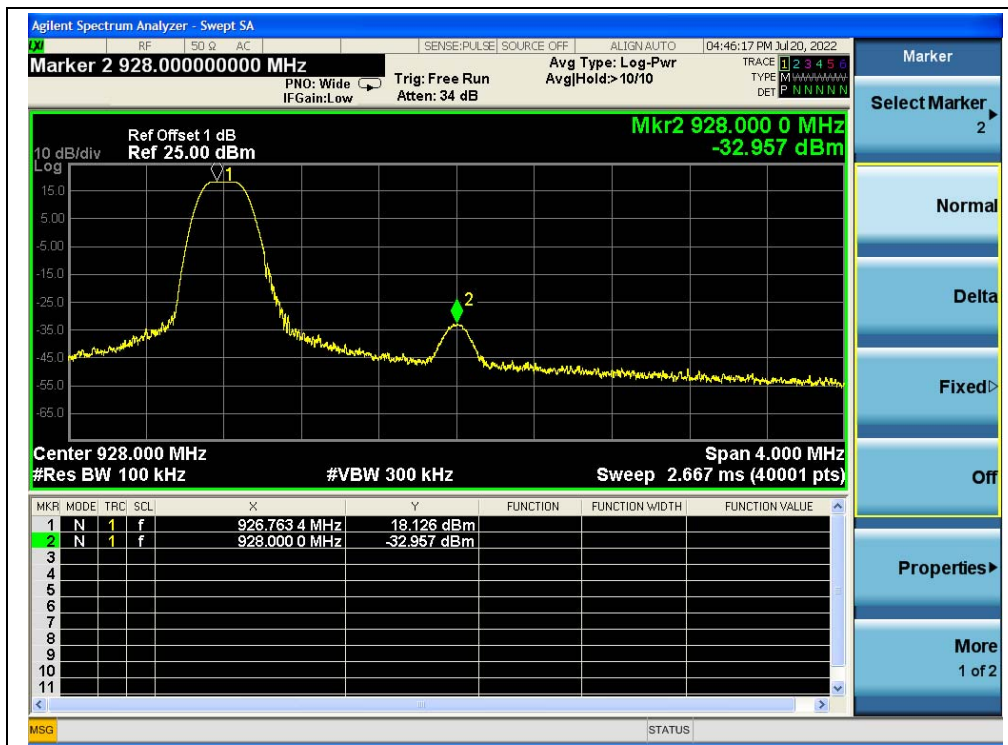

(Band edge, Channel 123)

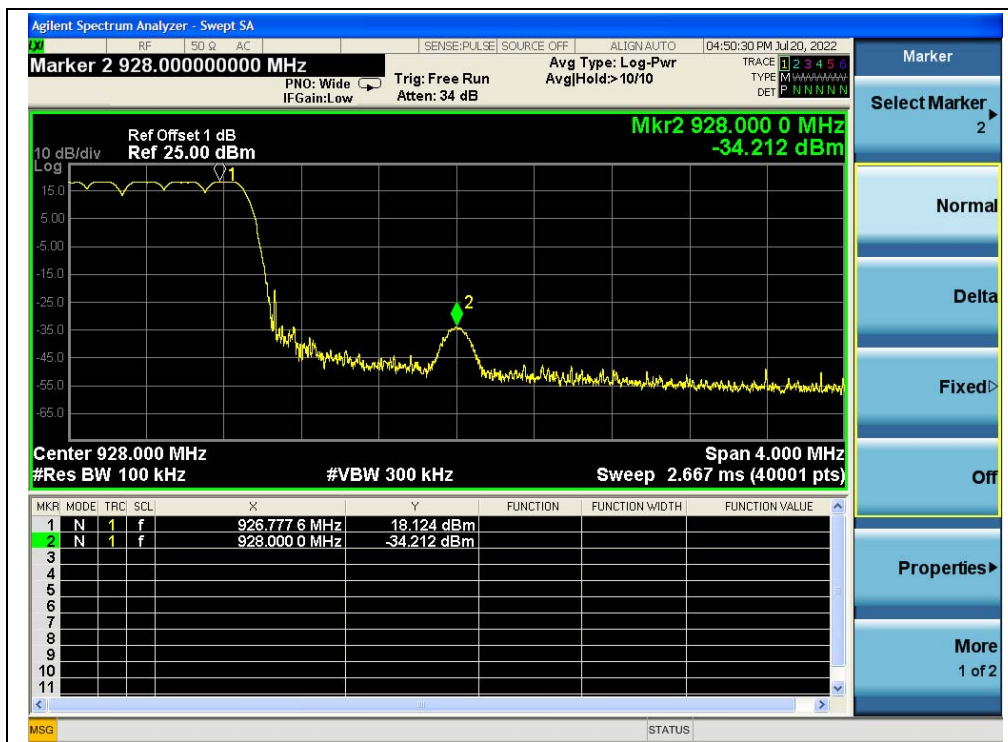

(Band edge with hopping on, Channel 123)

2.11. Conducted Emission

2.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.11.2. Test Description

Test Setup:

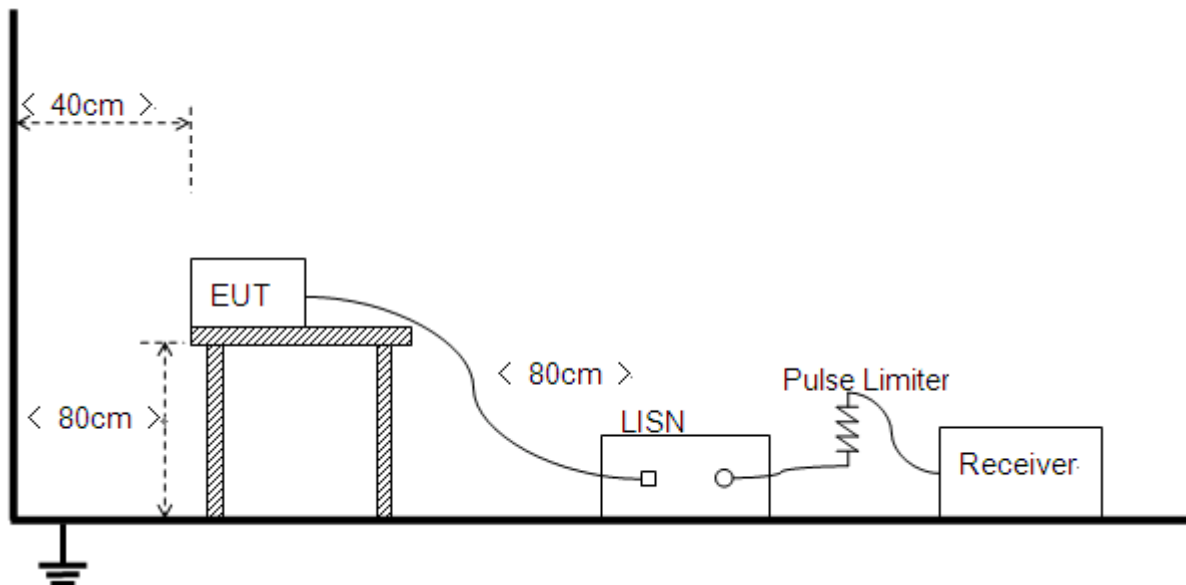

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



REPORT No.: SZ22070100W01

2.11.3. Test Result

This test case does not apply this kind of EUT.

2.12. Radiated Emission

2.12.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.12.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

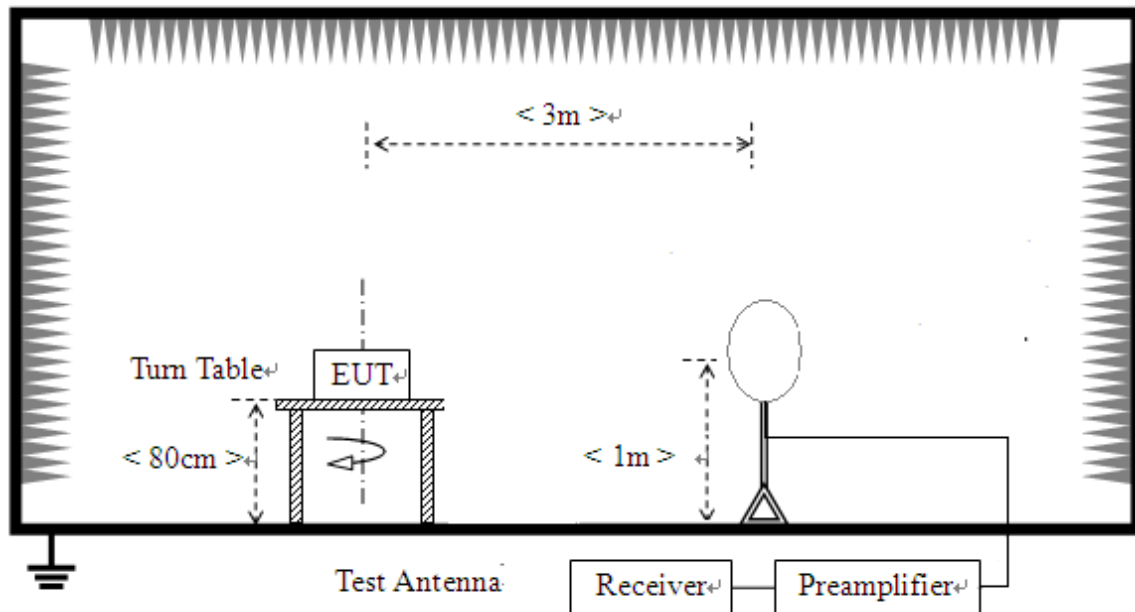

- 2) For radiated emissions from 30MHz to 1GHz

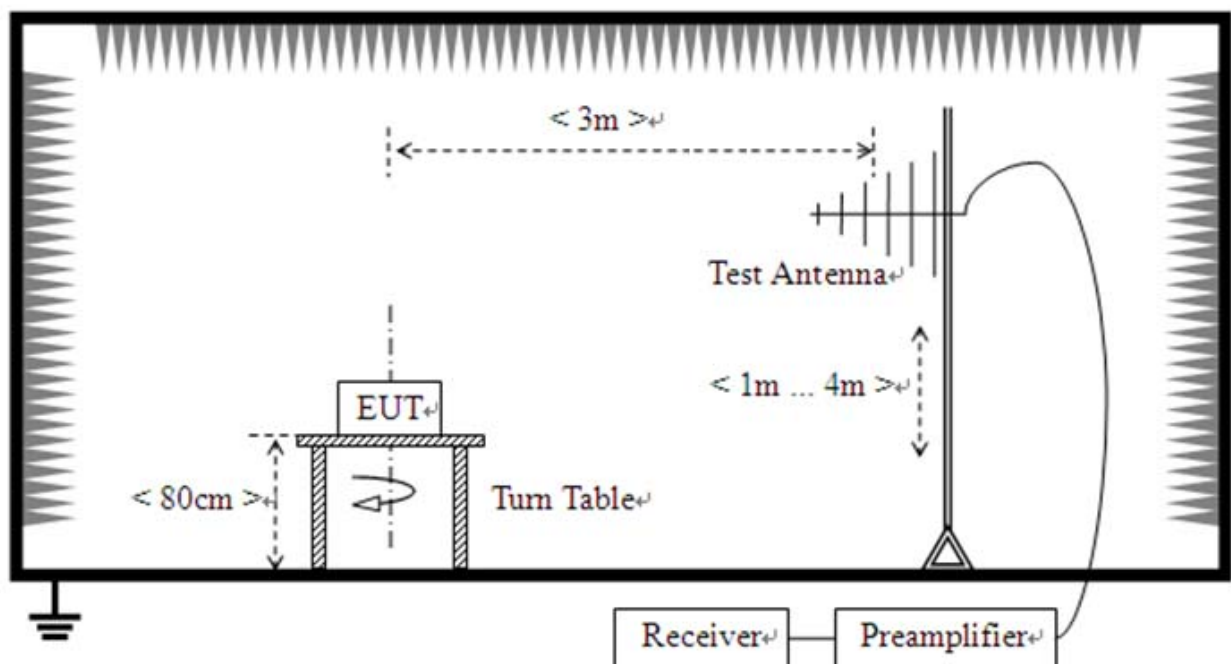

3) For radiated emissions above 1GHz

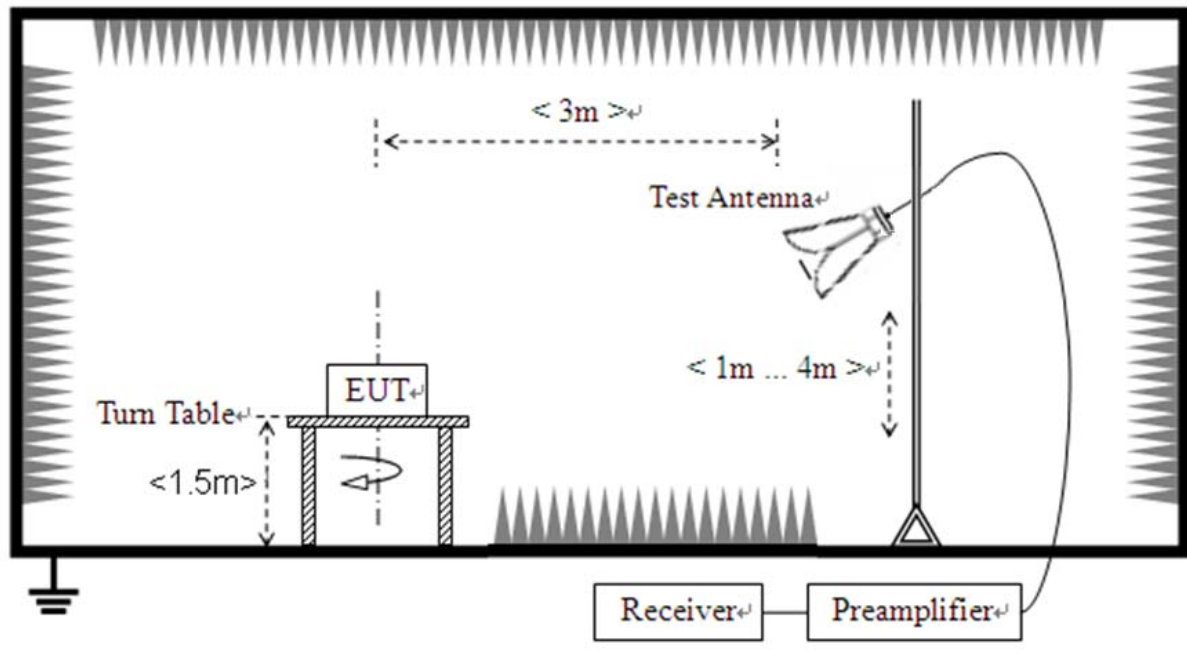

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



2.12.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note 2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note 3: N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.

Plots for Channel 1

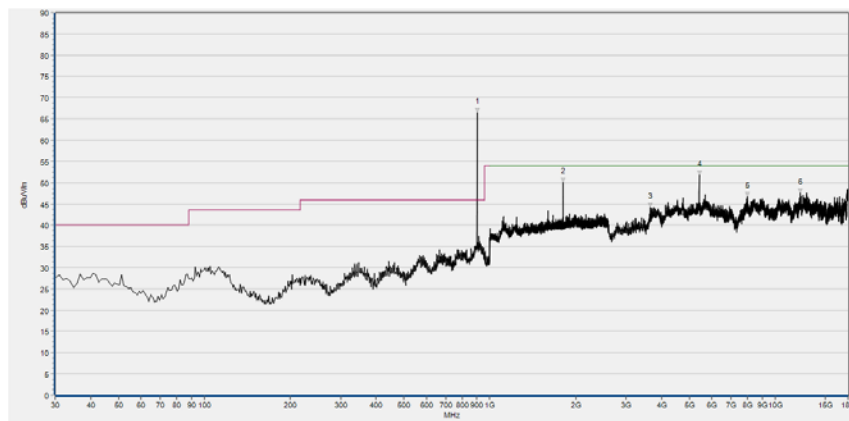

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
902.030	66.47	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1804.800	50.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3653.360	44.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5415.120	51.76	N/A	48.07	74.00	N/A	54.00	Horizontal	PASS
7993.080	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12215.760	47.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 10GHz)

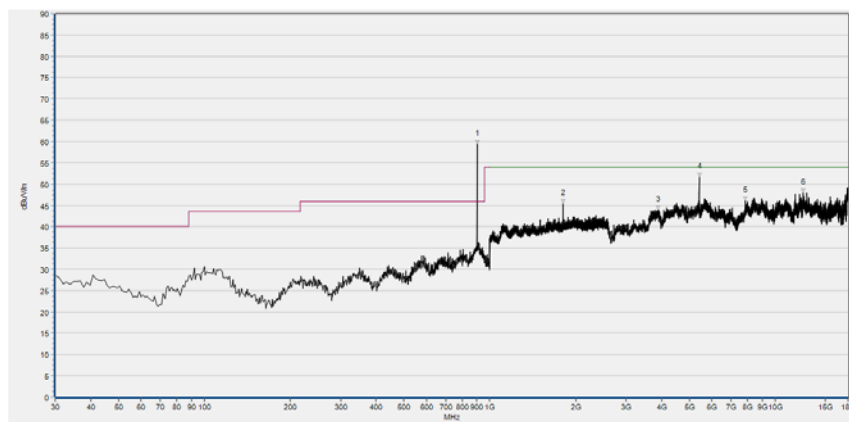


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
902.030	59.34	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1804.800	45.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3875.120	43.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5415.120	51.57	N/A	49.53	74.00	N/A	54.00	Vertical	PASS
7860.640	46.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12542.240	47.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 10GHz)

Plot for Channel 62

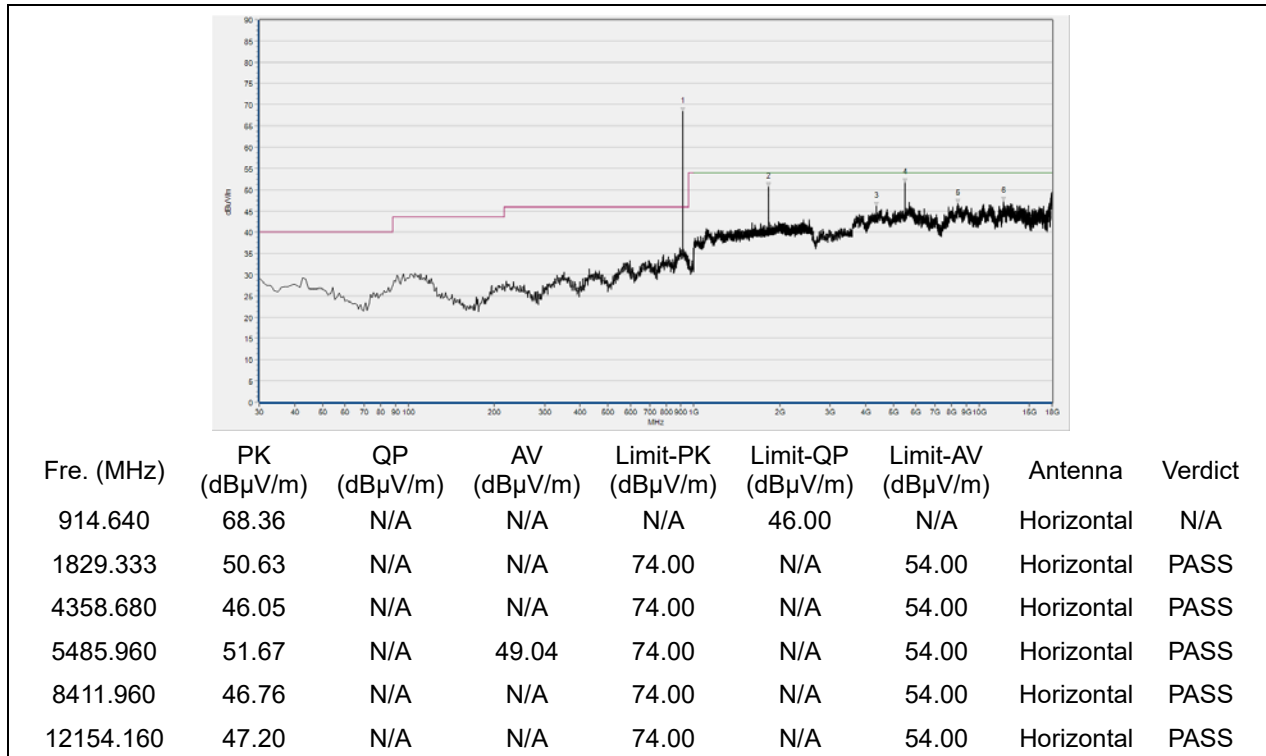


(Antenna Horizontal, 30MHz to 10GHz)

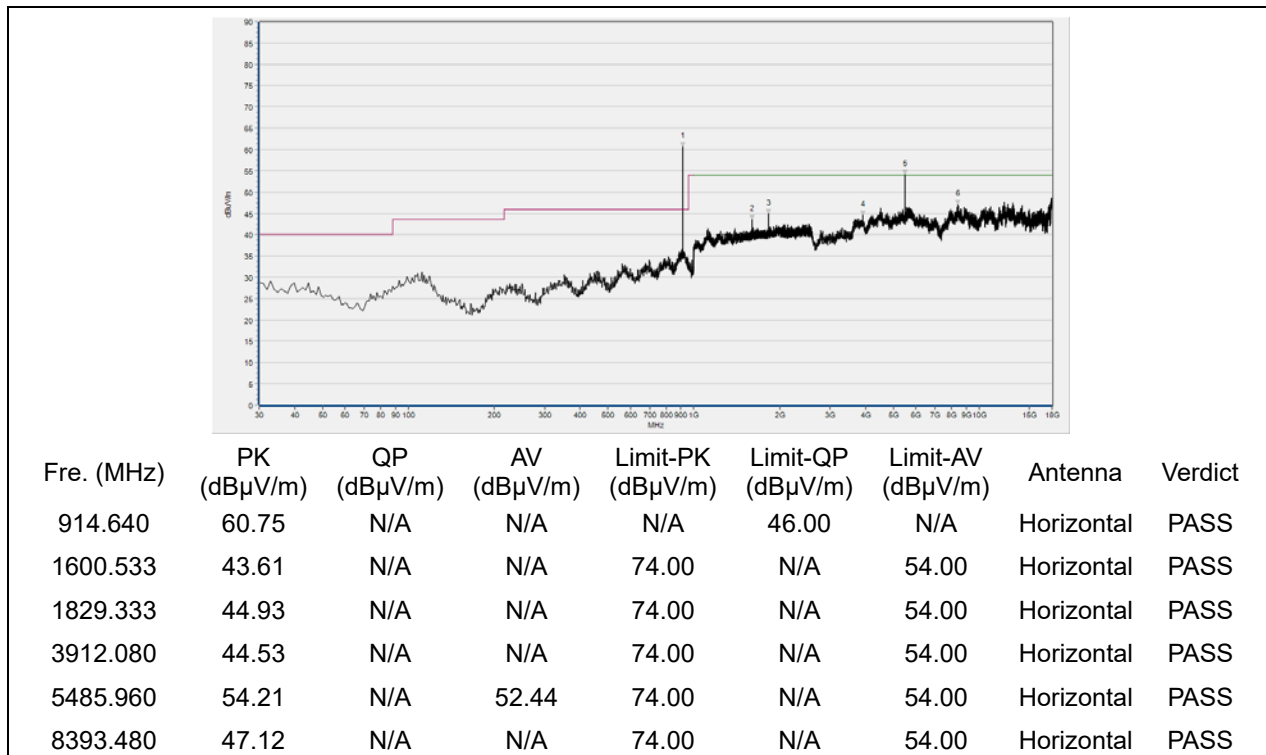

(Antenna Vertical, 30MHz to 10GHz)




Plot for Channel 123

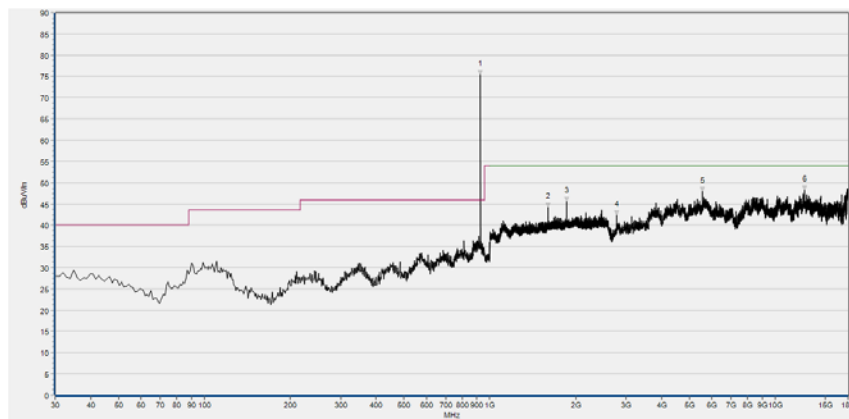

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
926.280	75.44	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1600.000	44.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1854.400	45.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2781.720	42.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5559.880	47.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12674.680	48.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 10GHz)

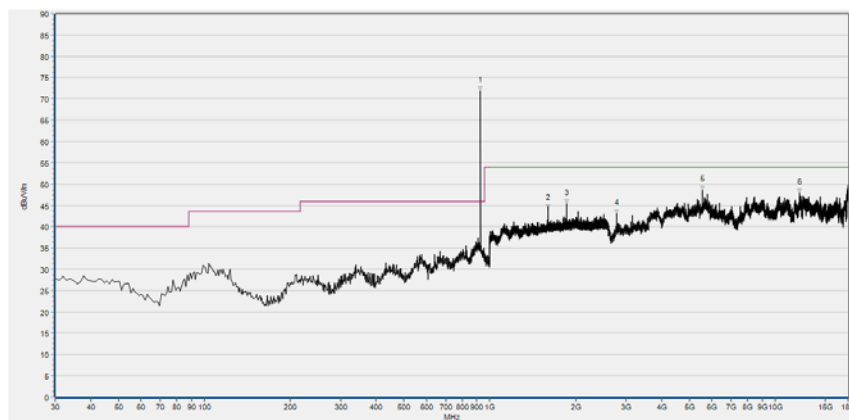

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
926.280	71.83	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1600.000	44.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1853.867	45.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2781.720	43.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5559.880	48.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12181.880	47.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 10GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2022.03.01	2023.02.28
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2022.07.06	2023.07.05
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170#773	BBHA 9170	Schwarzbeck	2022.07.14	2025.07.13
Coaxial Cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L3203	Tonscend	2022.07.08	2023.07.07
18-26.5GHz pre-Amplifier	46732	S10M100L3802	Tonscend	2022.07.08	2023.07.07
26-40GHz pre-Amplifier	56774	S40M400L4002	Tonscend	2022.07.08	2023.07.07
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2022.07.08	2023.07.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

_____ END OF REPORT _____