



RF MEASUREMENT REPORT

FCC ID: TV7L23AX52

Applicant: Mikrotiks SIA

Product: L23UGSR-5HaxD2HaxD-US
NetMetal ax
mANTBox ax 15s

Model No.: L23UGSR-5HaxD2HaxD-US
L23UGSR-5HaxD2HaxD-NM-US
L22UGS-5HaxD2HaxD-15S-US

Brand Name: MikroTik

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Received Date: 2023-09-01

Test Date: 2023-09-06 ~ 2024-02-26

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2308RSU089-U2	V01	Initial Report	2024-02-27	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test	8
1.6. Working Frequencies	9
1.7. Antenna Details	10
2. Test Configuration	11
2.1. Test Mode	11
2.2. Test System Connection Diagram	12
2.3. Test Software	13
2.4. Applied Standards	14
2.5. Test Environment Condition	14
3. Antenna Requirements	15
4. Measuring Instrument	16
5. Decision Rules and Measurement Uncertainty	20
5.1. Decision Rules	20
5.2. Measurement Uncertainty	20
6. Test Result	21
6.1. Summary	21
6.2. 26dB & 99% Bandwidth Measurement	22
6.2.1. Test Limit	22
6.2.2. Test Procedure	22
6.2.3. Test Setting	22
6.2.4. Test Setup	22
6.2.5. Test Result	23
6.3. 6dB Bandwidth Measurement	24
6.3.1. Test Limit	24
6.3.2. Test Procedure	24
6.3.3. Test Setting	24
6.3.4. Test Setup	24
6.3.5. Test Result	24
6.4. Output Power Measurement	25
6.4.1. Test Limit	25

6.4.2.	Test Procedure	25
6.4.3.	Test Setting	25
6.4.4.	Test Setup.....	25
6.4.5.	Test Result	25
6.5.	Transmit Power Control Measurement.....	26
6.5.1.	Test Limit.....	26
6.5.2.	Test Procedure	26
6.5.3.	Test Setting	26
6.5.4.	Test Setup.....	26
6.5.5.	Test Result	26
6.6.	Power Spectral Density Measurement	27
6.6.1.	Test Limit.....	27
6.6.2.	Test Procedure	27
6.6.3.	Test Setting	27
6.6.4.	Test Setup.....	28
6.6.5.	Test Result	28
6.7.	Frequency Stability Measurement.....	29
6.7.1.	Test Limit.....	29
6.7.2.	Test Procedure	29
6.7.3.	Test Setup.....	29
6.7.4.	Test Result	30
6.8.	Radiated Spurious Emission Measurement	31
6.8.1.	Test Limit.....	31
6.8.2.	Test Procedure	31
6.8.3.	Test Setting	31
6.8.4.	Test Setup.....	33
6.8.5.	Test Result	34
6.9.	Radiated Restricted Band Edge Measurement	35
6.9.1.	Test Limit.....	35
6.9.2.	Test Procedure	37
6.9.3.	Test Setting	37
6.9.4.	Test Setup.....	38
6.9.5.	Test Result	38
6.10.	AC Conducted Emissions Measurement.....	39
6.10.1.	Test Limit.....	39
6.10.2.	Test Setup.....	39
6.10.3.	Test Result	39
Appendix A – Test Result.....		40
A.1	Duty Cycle Test Result.....	40

A.2	26dB Bandwidth Test Result	42
A.3	6dB Bandwidth Test Result	59
A.4	Output Power Test Result	65
A.5	Power Spectral Density Test Result.....	85
A.6	Frequency Stability Test Result.....	181
A.7	Radiated Spurious Emission Test Result.....	182
A.8	Radiated Restricted Band Edge Test Result.....	576
A.9	AC Conducted Emissions Test Result	1266
Appendix B – Test Setup Photograph		1268
Appendix C – EUT Photograph		1269

1. General Information

1.1. Applicant

Mikrotikls SIA
 Ūnijas iela 2, Rīga, LV-1039 LATVIA

1.2. Manufacturer

Mikrotikls SIA
 Ūnijas iela 2, Rīga, LV-1039 LATVIA

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	L23UGSR-5HaxD2HaxD-US NetMetal ax mANTBox ax 15s
Model No.	L23UGSR-5HaxD2HaxD-US L23UGSR-5HaxD2HaxD-NM-US L22UGS-5HaxD2HaxD-15S-US
EUT Serial No.	L23UGSR-5HaxD2HaxD-US: HEM08J6X3F6/320 L23UGSR-5HaxD2HaxD-NM-US: HER09ACK29G/332 L22UGS-5HaxD2HaxD-15S-US: HFB01TRAQ83 (Radiated Measurement) HFB01P06YS3 (Conducted Measurement)
Wi-Fi Specification	802.11a/b/g/n/ac/ax, VHT
Antenna Information	Refer to section 1.7
Power Type	AC/DC Adapter Input or PoE Input
Operating Environment	Outdoor Use
Accessories	
AC/DC Adapter	Model No.: SAW30-240-1200G Input Power: 100 - 240V ~ 50/60Hz, 0.8A Output Power: 24.0V = 1.2A 28.8W
Gigabit PoE	Input: 18-57V PIN 4, 5: 18-57V PIN 7, 8 Return
Remark: 1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. 2. PoE needs to be used with an AC adapter. For this report, we select AC Adapter for testing. 3. For model differences, please refer to the Operation Description document.	

1.5. Radio Specification under Test

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz For 802.11ac-VHT160/ax-HE160: 5250MHz, 5570MHz	
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA	
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 1732Mbps 802.11ax: up to 2402Mbps	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

802.11ac-VHT160/ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250 MHz	114	5570 MHz	--	--

1.7. Antenna Details

Antenna Type	Antenna Model	Frequency Range (MHz)	Max. PK Gain (dBi)	CDD DG (dBi)	
				For Power	For PSD
Omni Antenna	HGO-antenna-OUT	5150 ~ 5850	7.1	7.1	10.11
Sector Antenna	MTAS-5G-19D120	5150 ~ 5850	19.0	19.0	22.01
Integral Antenna	Built-in cross-polarized sector antenna	5150 ~ 5850	14.0	14.0	17.01

Notes:

1. The EUT only supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
2. The Maximum antenna gain of any elevation angle above 30 degrees is the same as the gain in the above table.
3. The antenna specification is provided by the applicant.

Optional Antenna	L23UGSR-5HaxD2HaxD-US	L23UGSR-5HaxD2HaxD-NM-US	L22UGS-5HaxD2HaxD-15S-US
Omni Antenna	☒	☒	☐
Sector Antenna	☒	☒	☐
Integral Antenna	☐	☐	☒

Note: The model L23UGSR-5HaxD2HaxD-US and L23UGSR-5HaxD2HaxD-NM-US can be equipped with 2 external antennas, and model L22UGS-5HaxD2HaxD-15S-US only have one built-in antenna.


2. Test Configuration

2.1. Test Mode

CDD Mode
Mode 1: Transmit by 802.11a_Nss=1 (6Mbps)
Mode 2: Transmit by 802.11ac-VHT20_Nss=1 (MCS0)
Mode 3: Transmit by 802.11ac-VHT40_Nss=1 (MCS0)
Mode 4: Transmit by 802.11ac-VHT80_Nss=1 (MCS0)
Mode 5: Transmit by 802.11ac-VHT160_Nss=1 (MCS0)
Mode 6: Transmit by 802.11ax-HE20_Nss=1 (MCS0)
Mode 7: Transmit by 802.11ax-HE40_Nss=1 (MCS0)
Mode 8: Transmit by 802.11ax-HE80_Nss=1 (MCS0)
Mode 9: Transmit by 802.11ax-HE160_Nss=1 (MCS0)
Notes: 1. The modulation and bandwidth are same for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz. Therefore, 802.11ac mode was selected as representative test mode in this report, and the power level of 802.11n mode will be controlled to be the same as or lower than that of 802.11ac mode. 2. All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

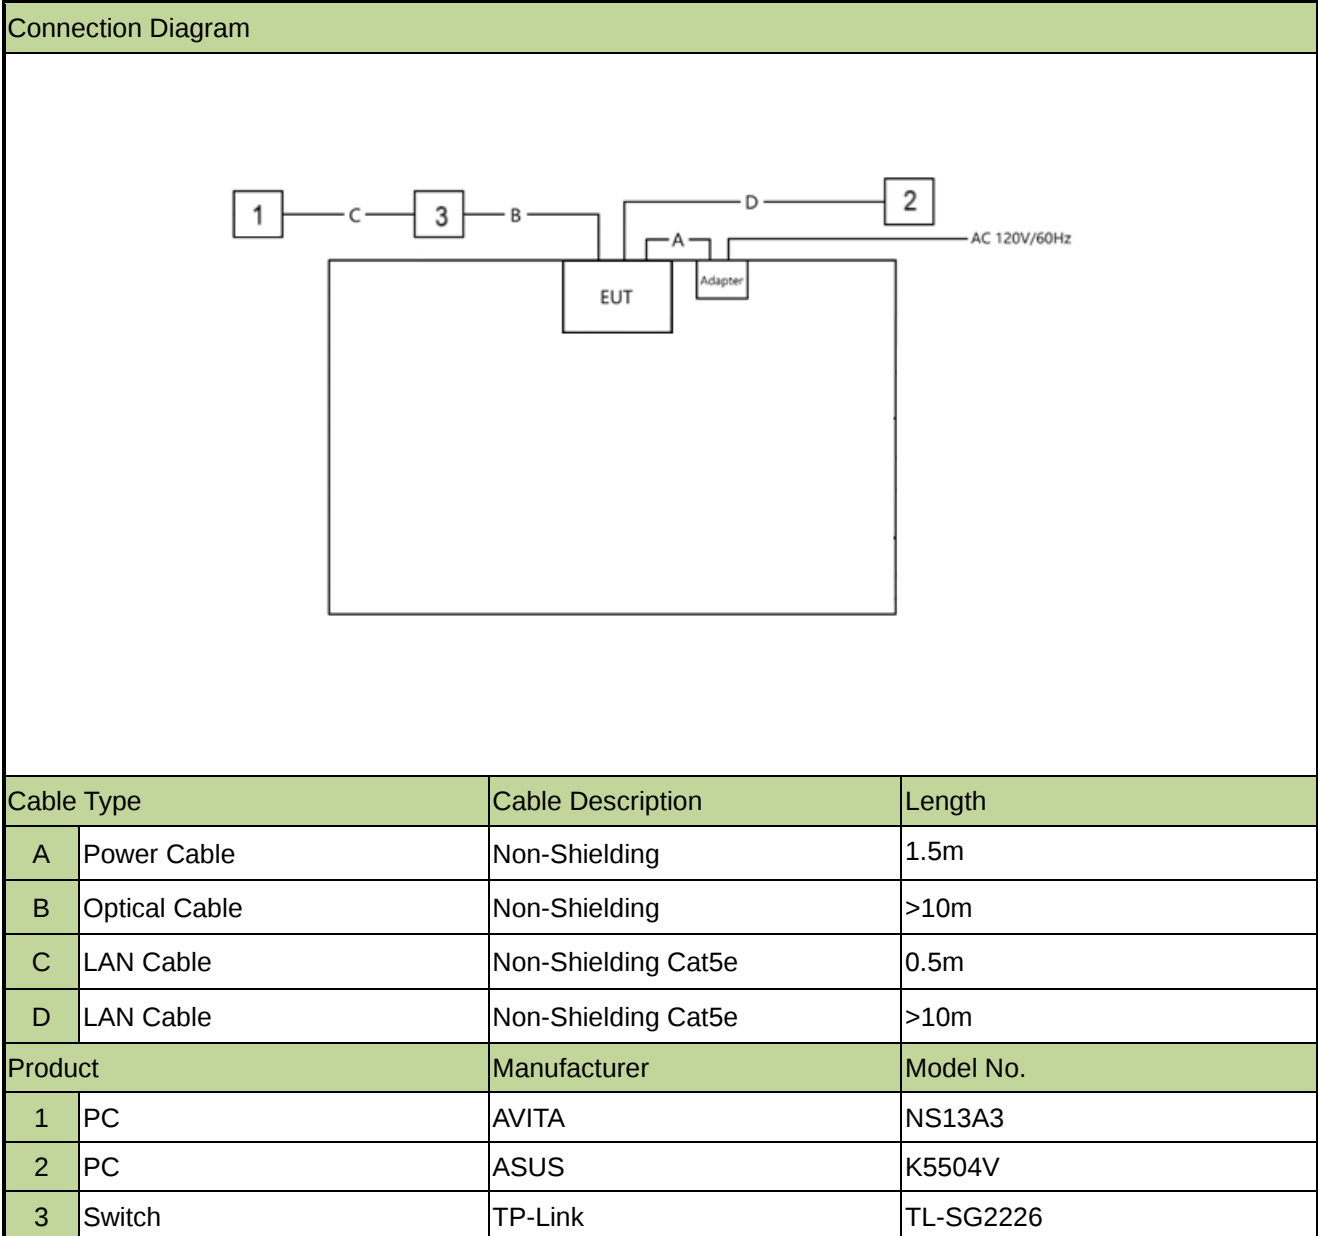

2.3. Test Software

The test utility software used during testing was “winbox.exe”, the version was “3.39” and commands are provided by the manufacturer.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The model L23UGSR-5HaxD2HaxD-US and L23UGSR-5HaxD2HaxD-NM-US use unique antenna connectors.
- The model L22UGS-5HaxD2HaxD-15S-US uses a permanently attached antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2023-12-22	SIP-AC1
					2024-12-21	
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2023-10-29	SIP-AC1
					2024-10-28	
Thermohygrometer	testo	608-H1	MRTSUE06620	1 year	2023-11-27	SIP-AC1
					2024-11-03	
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2024-07-13	SIP-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2023-11-05	SIP-AC2
					2024-11-04	
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2023-11-22	SIP-AC2
					2024-11-02	
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2023-11-27	SIP-AC2
					2024-11-03	
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2024-06-17	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2023-12-22	SIP-AC2
					2024-12-21	
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2023-10-22	SIP-AC2
					2024-10-21	
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2023-12-28	SIP-AC1/SIP-AC2 /SIP-AC3
					2024-12-17	
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2023-10-10	SIP-AC1/SIP-AC2 /SIP-AC3
					2024-10-09	
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2024-05-23	SIP-AC1/SIP-AC2 /SIP-AC3
Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2024-01-12	SIP-AC1/SIP-AC2 /SIP-AC3
					2025-01-11	
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2024-02-26	SIP-AC1/SIP-AC2 /SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2023-11-25	SIP-AC1/SIP-AC2 /SIP-AC3
					2024-10-23	
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2024-05-23	SIP-AC1/SIP-AC2 /SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2023-10-25	SIP-AC1/SIP-AC2 /SIP-AC3
					2024-09-27	

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2023-10-13	SIP-AC1/SIP-AC3
					2024-09-24	
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2024-06-07	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2024-07-14	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2023-11-01	SIP-AC3
					2024-10-28	
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2024-01-12	SIP-AC3
					2025-01-11	
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2024-08-04	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2023-12-22	SIP-AC3
					2024-12-21	
Thermohygrometer	testo	608-H1	MRTSUE11255	1 year	2024-08-13	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2024-08-09	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-05-07	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2024-04-20	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2024-05-31	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2023-12-18	WZ-AC1
					2024-10-23	
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2023-11-01	WZ-AC1
					2024-10-25	
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2023-09-29	WZ-AC2
					2024-09-17	
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2023-11-05	WZ-AC2
					2024-11-04	
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2024-01-12	WZ-AC2
					2025-01-11	
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2024-05-15	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
					2024-10-11	
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
					2024-10-25	
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2024-11-07	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2024-05-23	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2024-05-31	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2024-09-27	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2024-09-27	WZ-SR2
USB Power Sensor	Keysight	U2021XA	MRTSUE06447	1 year	2024-05-23	WZ-SR5
USB Power Sensor	Agilent	U2021XA	MRTSUE06030	1 year	2023-10-08 2024-09-27	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06558	1 year	2024-05-23	WZ-SR5
Audio Analyzer	R&S	UPV	MRTSUE06357	1 year	2024-04-27	WZ-SR5
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2023-10-08 2024-09-27	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2024-05-31	WZ-TR3
Signal Analyzer	Keysight	N9020B	MRTSUE07037	1 year	2024-02-29	WZ-TR3/WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11086	1 year	2024-06-08	WZ-TR3/WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2024-06-08	WZ-TR3/WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11088	1 year	2024-06-08	WZ-TR3/WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11089	1 year	2024-06-08	WZ-TR3/WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11090	1 year	2024-06-08	WZ-TR3/WZ-SR5
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2024-02-12	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2023-11-01 2024-10-28	SIP-TR1
USB Power Sensor	Keysight	U8489A	MRTSUE06448	5 years	2028-07-11	SIP-TR1
Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2024-06-29	SIP-TR1
Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2024-06-29	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11099	1 year	2024-06-08	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11100	1 year	2024-06-08	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11101	1 year	2024-06-08	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11103	1 year	2024-06-08	SIP-TR1

Software	Version	Function
EMI V3	V 3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
Controller_MF 7802BS	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.4dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(1)(i), (2), (3)(i)	Maximum Conducted Output Power		Pass
15.407(h)(1)	Transmit Power Control		Pass
15.407(g)	Frequency Stability		Pass
15.407(a)(1)(ii), (2), (3)(i), (12)	Peak Power Spectral Density		Pass
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Radiated	Pass
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- The test evaluation of each model is as follows.
 - The L23UGSR-5HaxD2HaxD-US as a reference device, full test was performed on it.
 - For the 5GHz RF part, L23UGSR-5HaxD2HaxD-NM-US and L23UGSR-5HaxD2HaxD-US are identical except the antenna connectors on the PCB board. Therefore, performed full tests on RF Maximum Conducted Output Power, Undesirable Emissions and General Field Strength Limits for L23UGSR-5HaxD2HaxD-NM.
 - For the 5GHz RF Part, L22UGS-5HaxD2HaxD-15S-US and L23UGSR-5HaxD2HaxD-US are identical, except that L22UGS-5HaxD2HaxD-15S-US uses a different antenna. Therefore, full test was performed on Maximum Conducted Output Power, Peak Power Spectral Density, Undesirable Emissions and General Field Strength Limits for L22UGS-5HaxD2HaxD-15S-US.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. $VBW \geq 3 \times RBW$
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

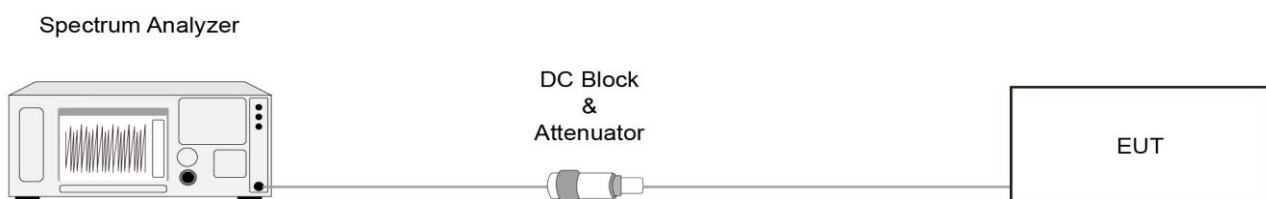

6.2.5. Test Result

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)2)

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

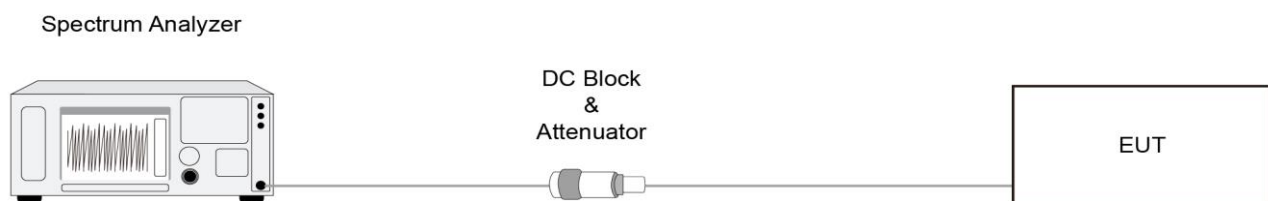

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.4.2. Test Procedure


KDB 789033D02v02r01- Section II(E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup

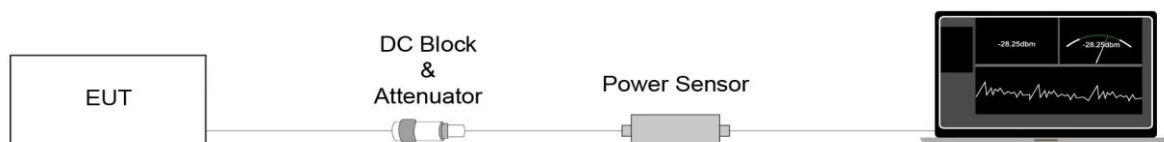

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Transmit Power Control Measurement

6.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


6.5.2. Test Procedure

KDB 789033 D02v02r01- Section II)E)3)b) Method PM-G

6.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.5.4. Test Setup

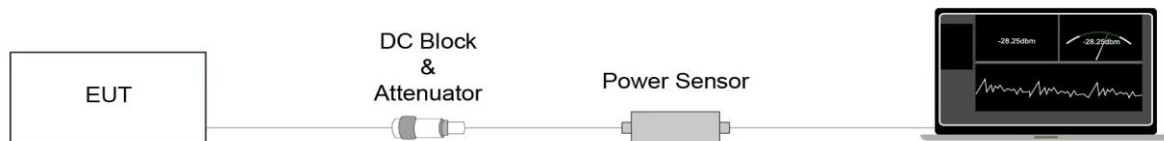

6.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

6.6. Power Spectral Density Measurement

6.6.1. Test Limit

For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


6.6.2. Test Procedure

KDB 789033 D02v02r01-Section II)F)

6.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz (510kHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz)
4. VBW = $3 \times \text{RBW}$
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.

6.6.4. Test Setup

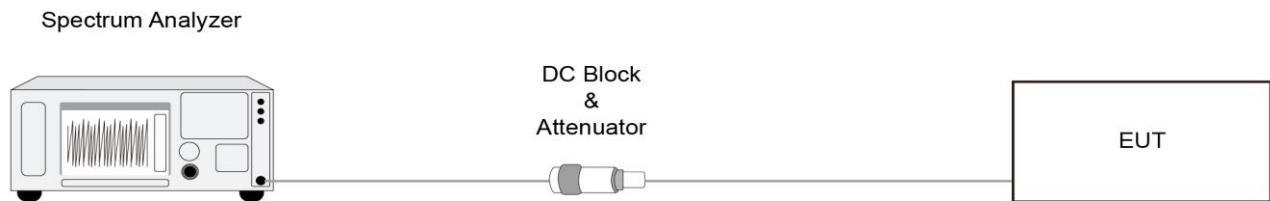

6.6.5. Test Result

Refer to Appendix A.5.

6.7. Frequency Stability Measurement

6.7.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.7.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.7.3. Test Setup

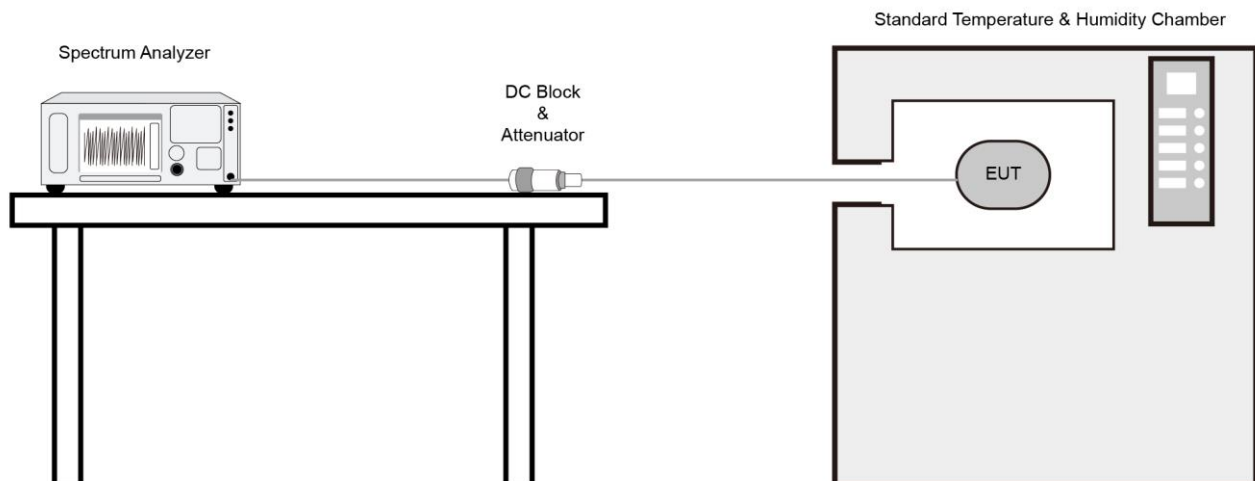

6.7.4. Test Result

Refer to Appendix A.6.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.4. Test Setup


Below 30MHz Test Setup:

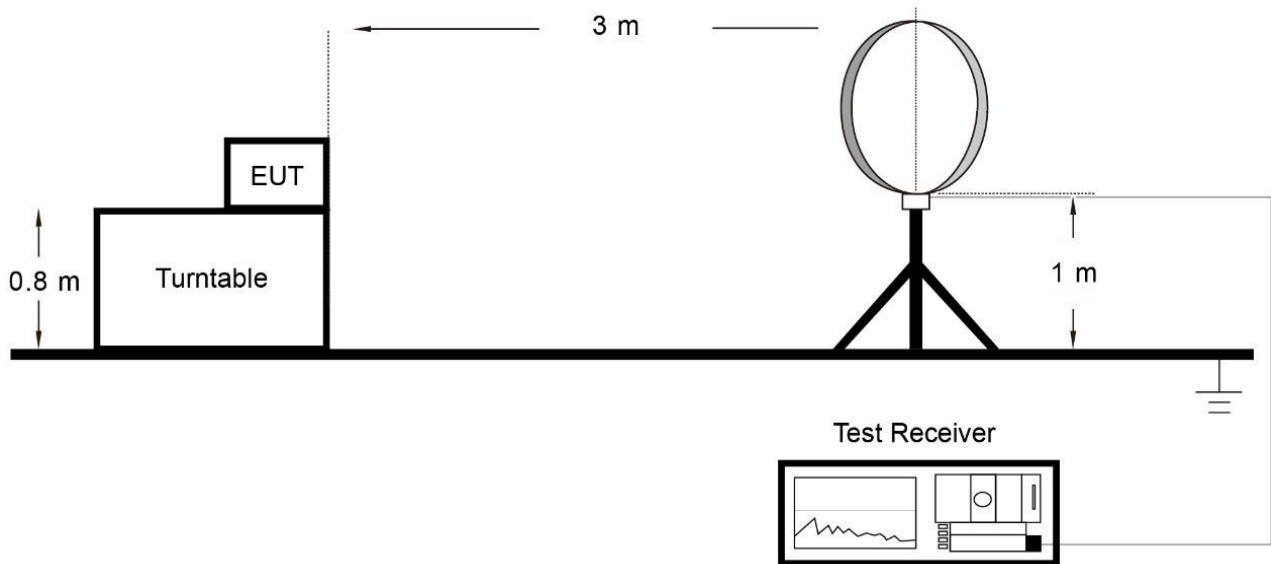

Below 1GHz Test Setup:

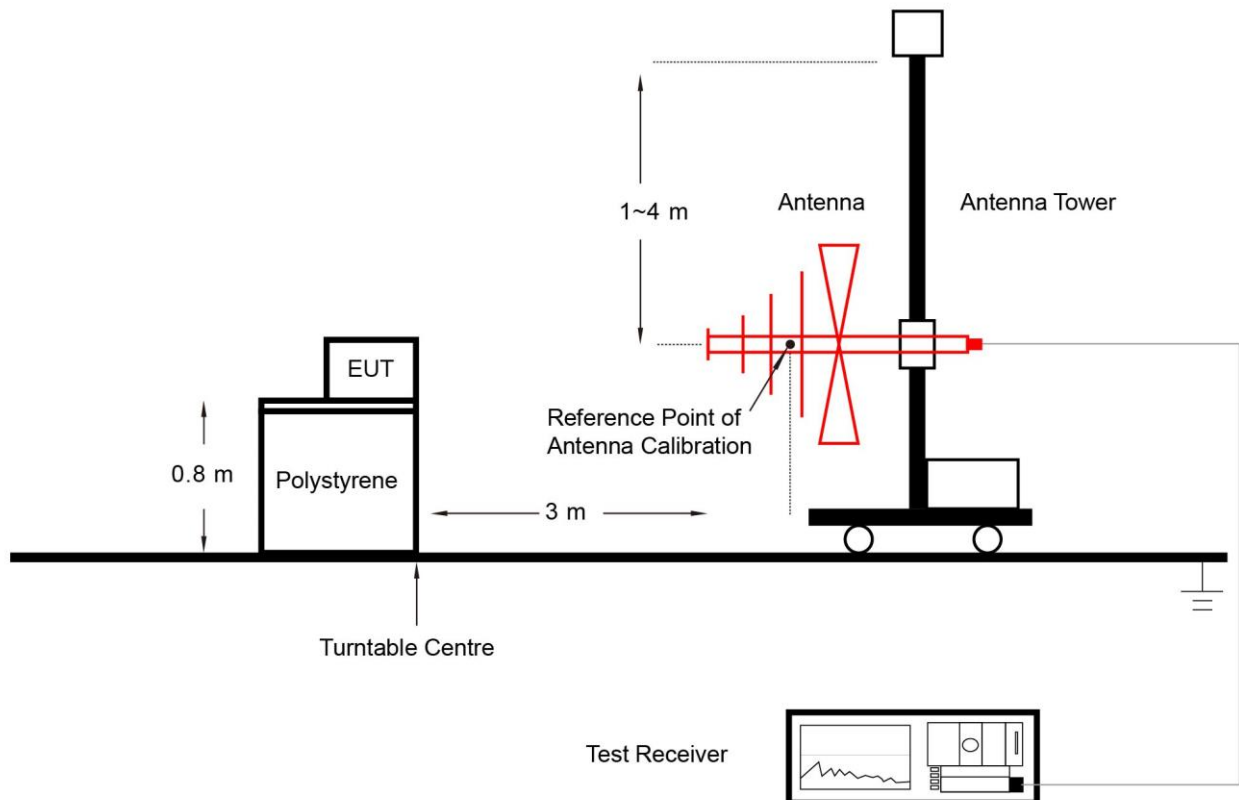

Above 1GHz Test Setup:

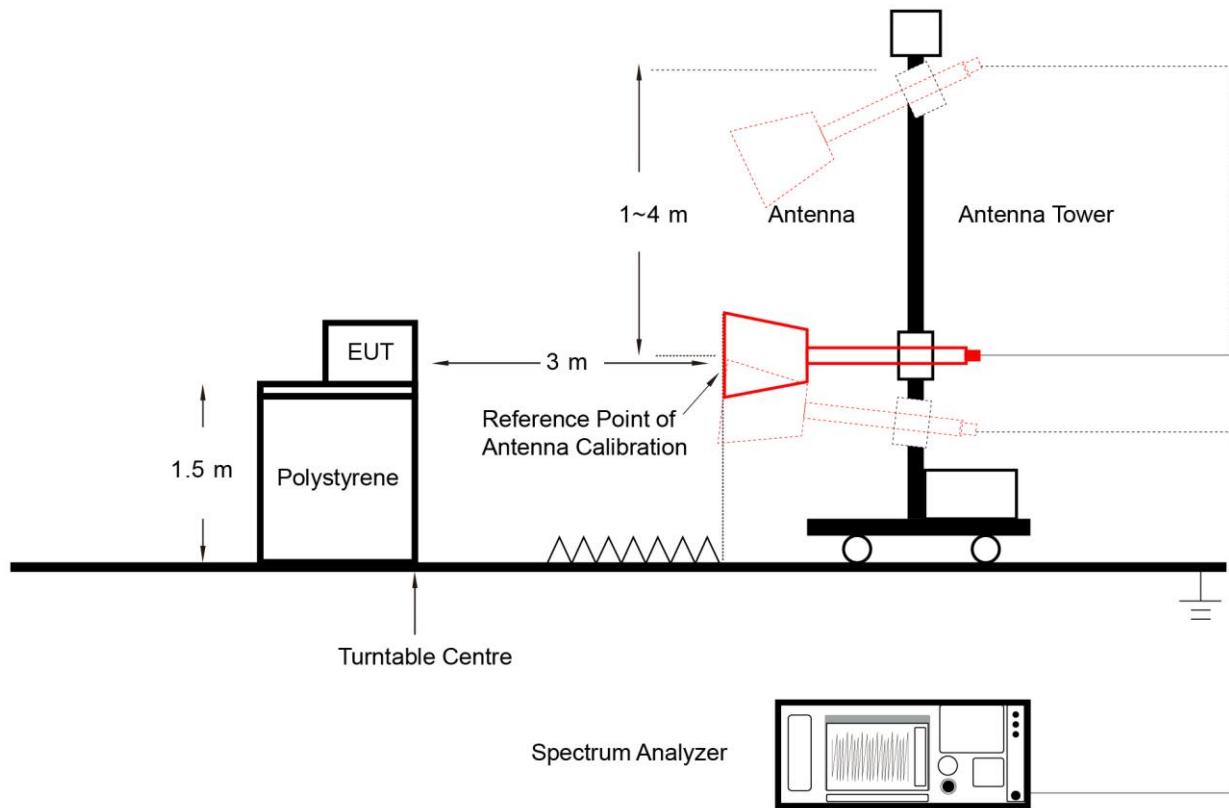

6.8.5. Test Result

Refer to Appendix A.7.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

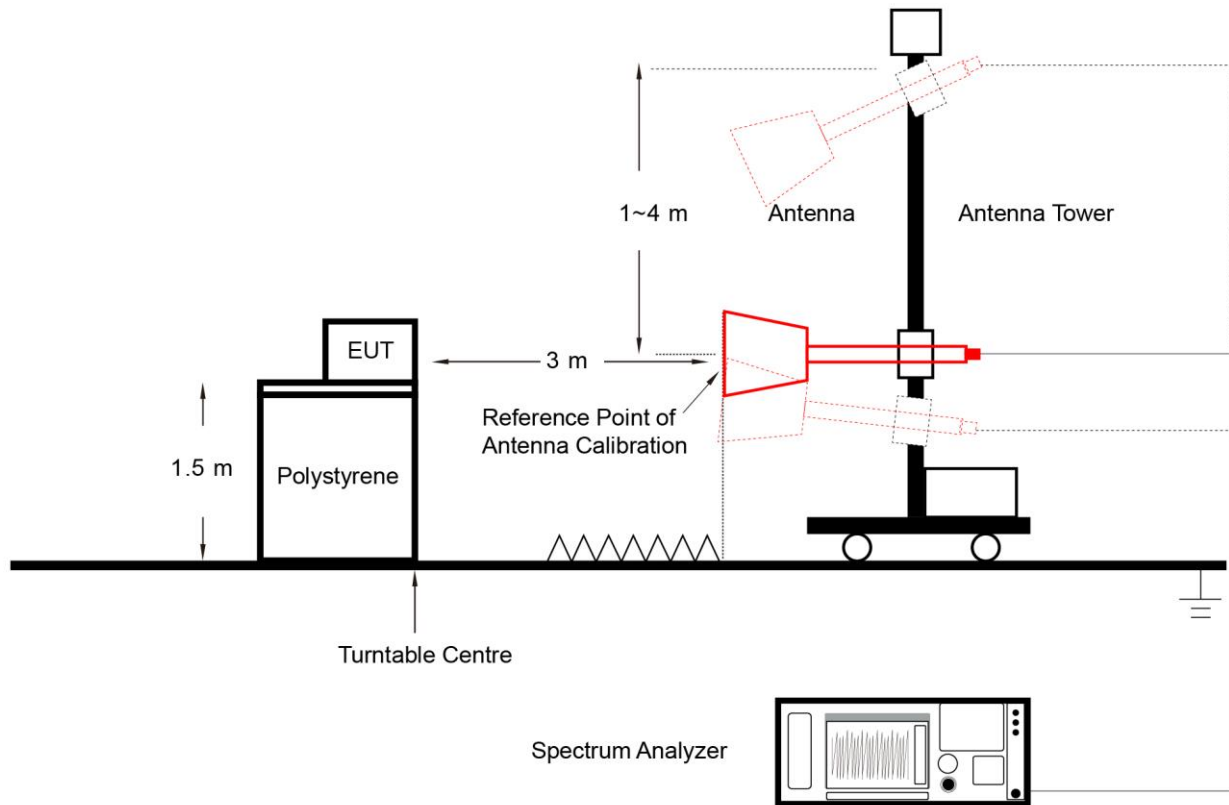

6.9.5. Test Result

Refer to Appendix A.8.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

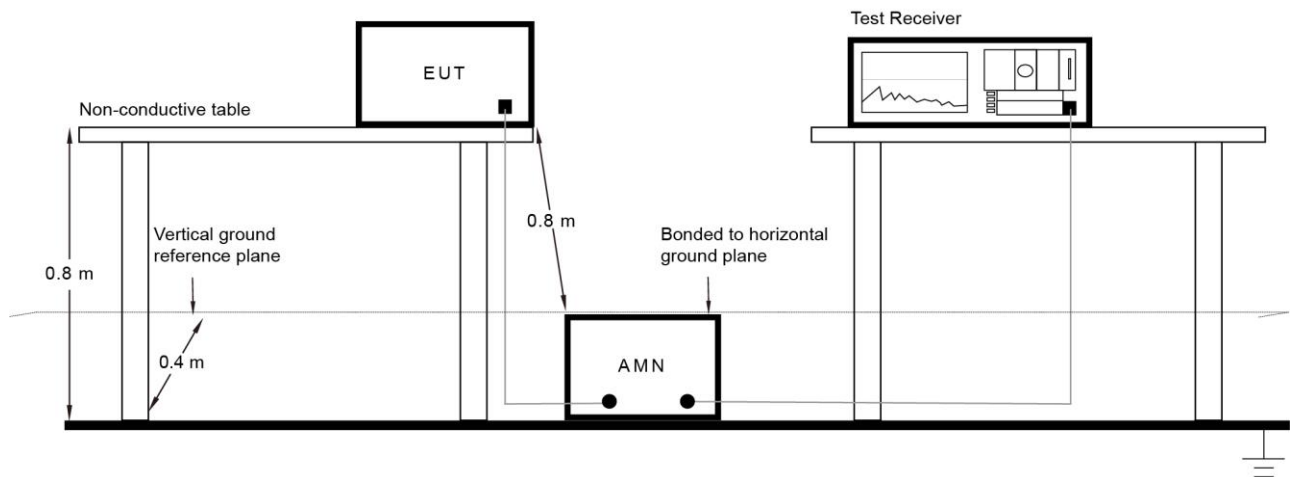

6.10.3. Test Result


Refer to Appendix A.9.

Appendix A – Test Result

A.1 Duty Cycle Test Result


Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2023-09-06		

Test Mode	Duty Cycle
802.11a	98.80%
802.11ac-VHT20	99.62%
802.11ac-VHT40	98.97%
802.11ac-VHT80	99.06%
802.11ac-VHT160	99.47%
802.11ax-HE20	99.62%
802.11ax-HE40	98.94%
802.11ax-HE80	99.20%
802.11ax-HE160	99.19%

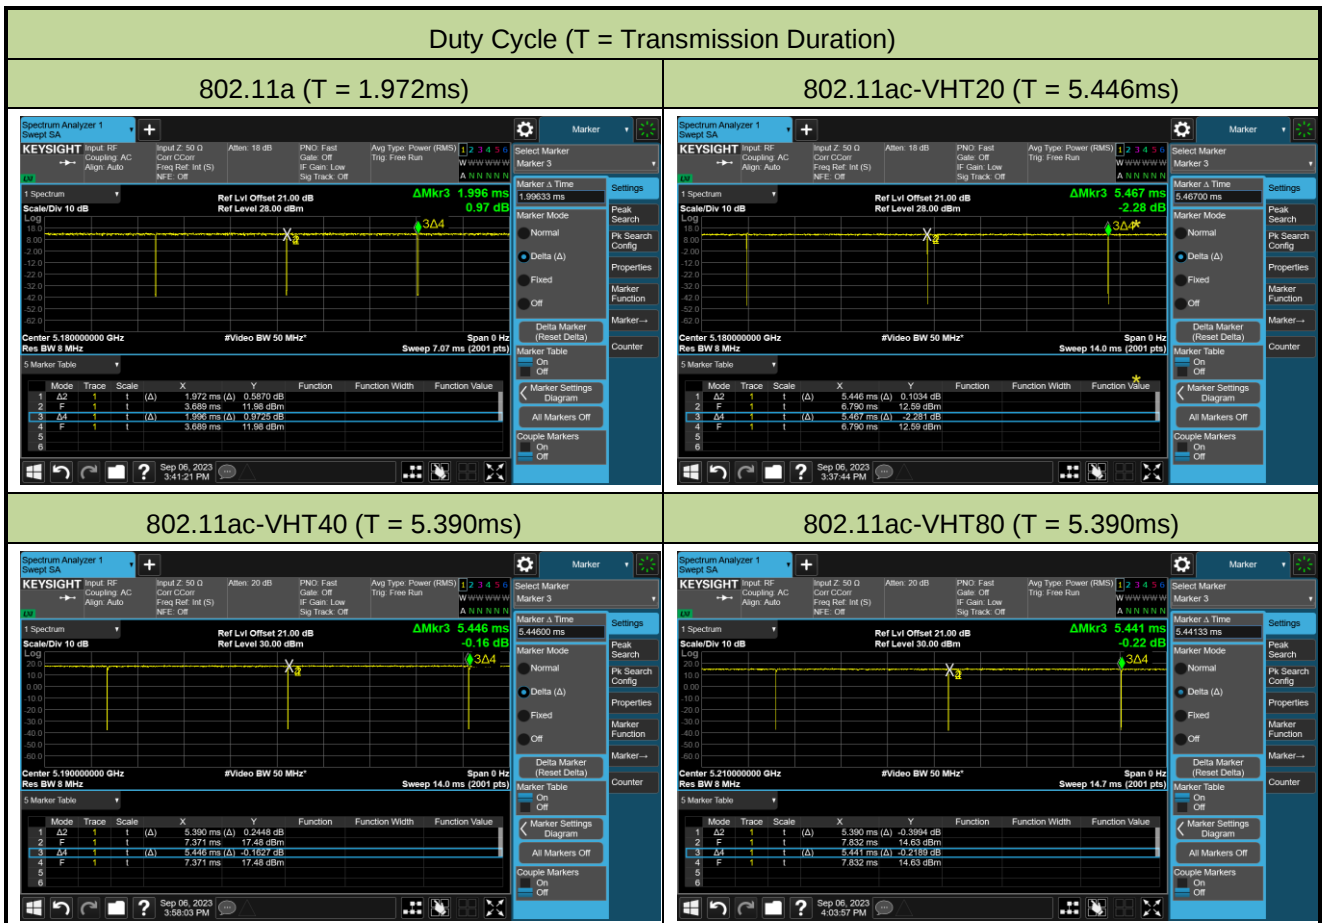


Duty Cycle (T = Transmission Duration)


802.11ac-VHT160 (T = 5.412ms)

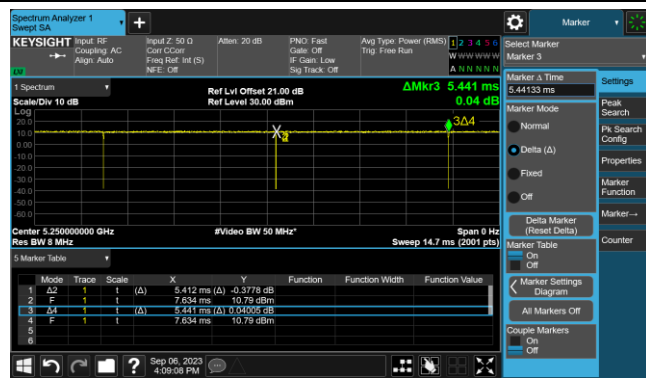


802.11ax-HE20 (T = 5.439ms)

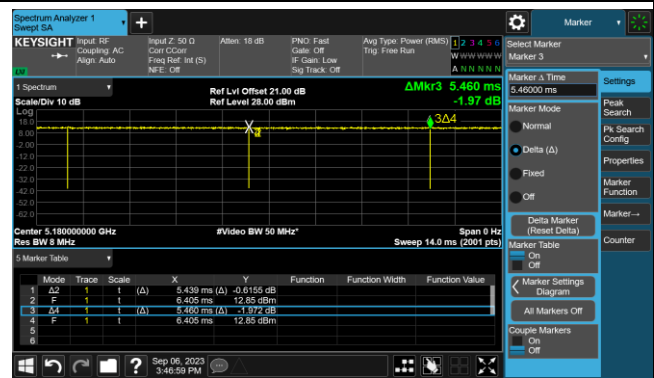


802.11ax-HE40 (T = 5.405ms)

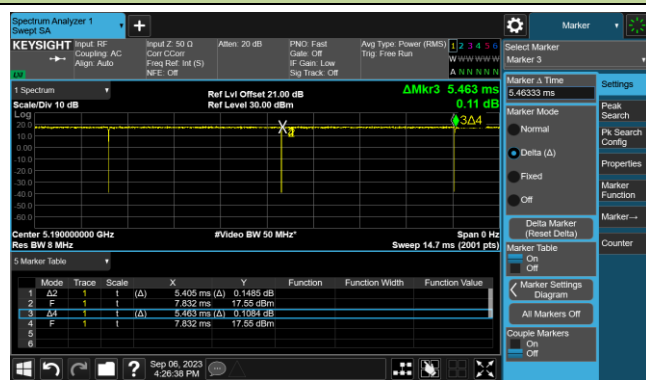

802.11ax-HE80 (T = 5.427ms)

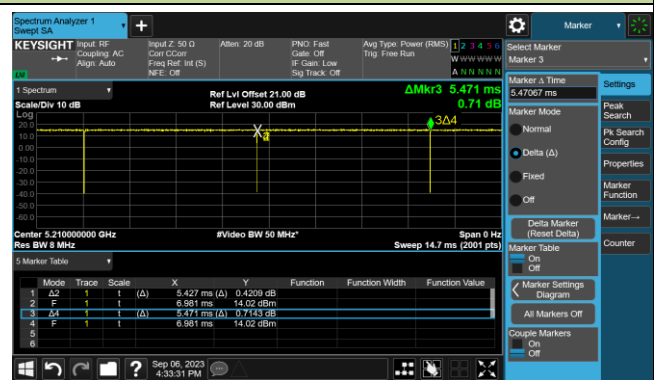

802.11ax-HE160 (T = 5.405ms)

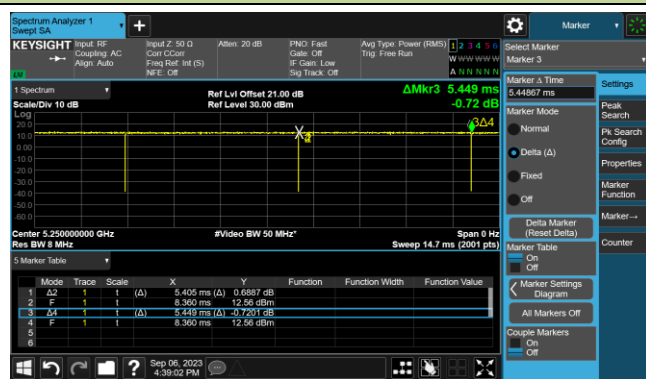

A.2 26dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2023-09-06 ~ 2023-09-12		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	6Mbps	36	5180	18.69	16.238
11a	6Mbps	44	5220	18.84	16.260
11a	6Mbps	48	5240	18.82	16.227
11a	6Mbps	52	5260	18.63	16.228
11a	6Mbps	60	5300	18.55	16.219
11a	6Mbps	64	5320	18.71	16.225
11a	6Mbps	100	5500	18.63	16.221
11a	6Mbps	116	5580	18.87	16.214
11a	6Mbps	140	5700	18.83	16.229
11a	6Mbps	144	5720	18.69	16.221
11a	6Mbps	149	5745	18.82	16.209
11a	6Mbps	157	5785	18.63	16.215
11a	6Mbps	165	5825	18.60	16.221
11ac-VHT20	MCS0	36	5180	19.89	17.431
11ac-VHT20	MCS0	44	5220	19.91	17.444
11ac-VHT20	MCS0	48	5240	20.20	17.427
11ac-VHT20	MCS0	52	5260	20.15	17.419
11ac-VHT20	MCS0	60	5300	20.58	17.424
11ac-VHT20	MCS0	64	5320	20.33	17.425
11ac-VHT20	MCS0	100	5500	19.95	17.422
11ac-VHT20	MCS0	116	5580	20.39	17.422
11ac-VHT20	MCS0	140	5700	20.01	17.423
11ac-VHT20	MCS0	144	5720	20.06	17.458
11ac-VHT20	MCS0	149	5745	19.92	17.426
11ac-VHT20	MCS0	157	5785	19.83	17.431
11ac-VHT20	MCS0	165	5825	19.96	17.425

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ac-VHT40	MCS0	38	5190	39.45	35.806
11ac-VHT40	MCS0	46	5230	39.35	35.785
11ac-VHT40	MCS0	54	5270	39.10	35.817
11ac-VHT40	MCS0	62	5310	39.53	35.805
11ac-VHT40	MCS0	102	5510	39.35	35.755
11ac-VHT40	MCS0	110	5550	39.72	35.756
11ac-VHT40	MCS0	134	5670	39.25	35.772
11ac-VHT40	MCS0	142	5710	39.46	35.780
11ac-VHT40	MCS0	151	5755	39.06	35.823
11ac-VHT40	MCS0	159	5795	39.35	35.787
11ac-VHT80	MCS0	42	5210	81.15	74.828
11ac-VHT80	MCS0	58	5290	80.82	74.853
11ac-VHT80	MCS0	106	5530	80.84	74.741
11ac-VHT80	MCS0	122	5610	80.43	74.731
11ac-VHT80	MCS0	138	5690	80.98	74.801
11ac-VHT80	MCS0	155	5775	80.62	74.810
11ac-VHT160	MCS0	50	5250	164.0	153.27
11ac-VHT160	MCS0	114	5570	163.4	153.22
11ax-HE20	MCS0	36	5180	20.59	18.801
11ax-HE20	MCS0	44	5220	20.62	18.802
11ax-HE20	MCS0	48	5240	20.73	18.789
11ax-HE20	MCS0	52	5260	20.54	18.800
11ax-HE20	MCS0	60	5300	20.45	18.799
11ax-HE20	MCS0	64	5320	20.24	18.763
11ax-HE20	MCS0	100	5500	20.76	18.798
11ax-HE20	MCS0	116	5580	20.66	18.794
11ax-HE20	MCS0	140	5700	20.76	18.803
11ax-HE20	MCS0	144	5720	20.68	18.772
11ax-HE20	MCS0	149	5745	20.71	18.785
11ax-HE20	MCS0	157	5785	20.57	18.834
11ax-HE20	MCS0	165	5825	20.77	18.787

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax-HE40	MCS0	38	5190	40.05	37.474
11ax-HE40	MCS0	46	5230	40.03	37.465
11ax-HE40	MCS0	54	5270	40.06	37.433
11ax-HE40	MCS0	62	5310	40.11	37.462
11ax-HE40	MCS0	102	5510	39.75	37.517
11ax-HE40	MCS0	110	5550	39.79	37.515
11ax-HE40	MCS0	134	5670	39.82	37.477
11ax-HE40	MCS0	142	5710	39.84	37.462
11ax-HE40	MCS0	151	5755	40.22	37.440
11ax-HE40	MCS0	159	5795	40.04	37.442
11ax-HE80	MCS0	42	5210	81.35	76.548
11ax-HE80	MCS0	58	5290	81.19	76.405
11ax-HE80	MCS0	106	5530	80.88	76.575
11ax-HE80	MCS0	122	5610	80.97	76.417
11ax-HE80	MCS0	138	5690	81.50	76.545
11ax-HE80	MCS0	155	5775	81.14	76.525
11ax-HE160	MCS0	50	5250	163.6	154.94
11ax-HE160	MCS0	114	5570	163.7	154.99


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	F _H (MHz)	Limit (MHz)
802.11a	6Mbps	48	5240	5248.11	< 5250
802.11ac-VHT20	MCS0	48	5240	5248.71	< 5250
802.11ac-VHT40	MCS0	46	5230	5247.89	< 5250
802.11ac-VHT80	MCS0	42	5210	5247.41	< 5250
802.11ax-HE20	MCS0	48	5240	5249.39	< 5250
802.11ax-HE40	MCS0	46	5230	5248.73	< 5250
802.11ax-HE80	MCS0	42	5210	5248.27	< 5250

Note: F_H = Centre frequency + 99% OBW / 2.


For example, 802.11a 5240MHz, F_H = 5240 MHz + 16.227 MHz / 2 = 5248.11 MHz.

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

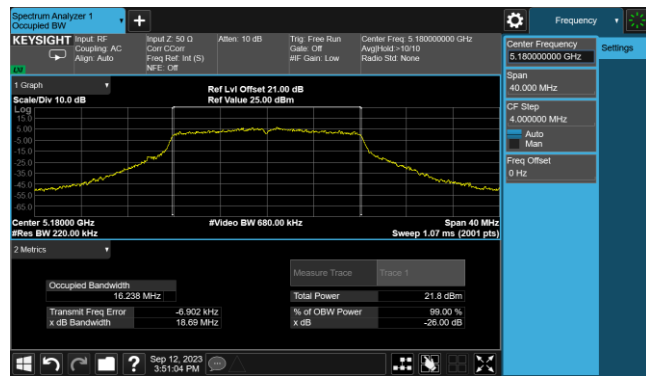


Channel 44 (5220MHz)

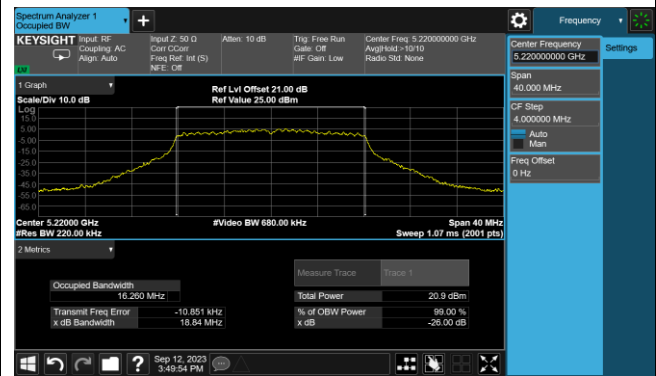


Channel 48 (5240MHz)

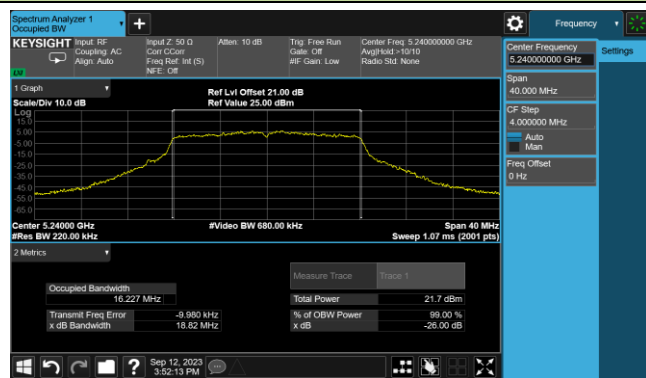


Channel 52 (5260MHz)

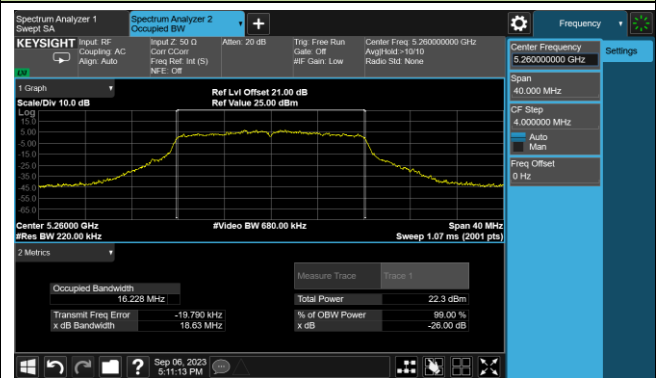


Channel 60 (5300MHz)

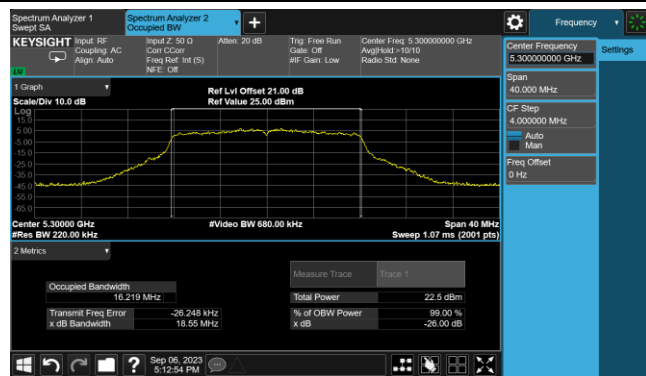


Channel 64 (5320MHz)

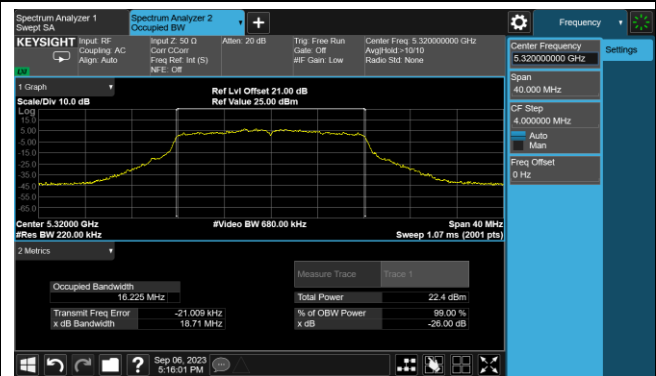

Channel 100 (5500MHz)

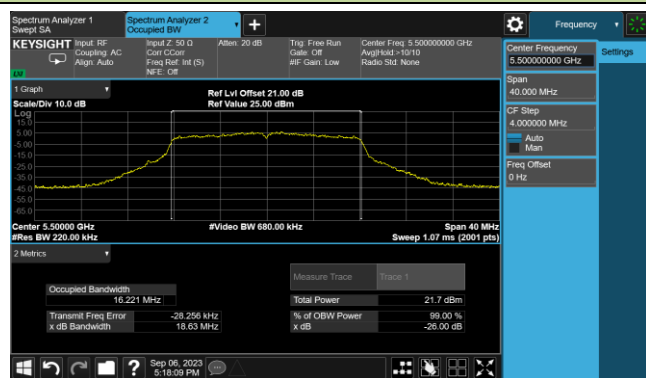


Channel 116 (5580MHz)

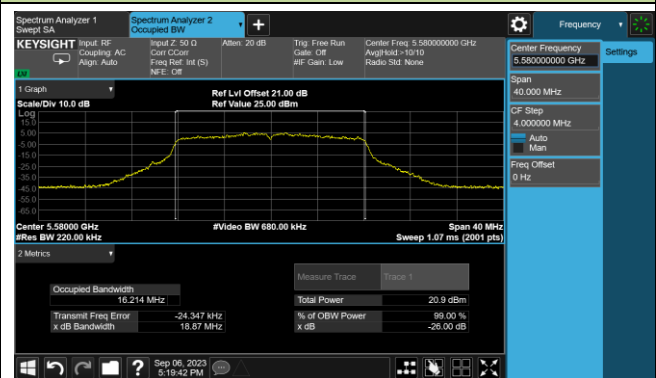


802.11a 26dB Bandwidth & 99% Bandwidth

Channel 140 (5700MHz)

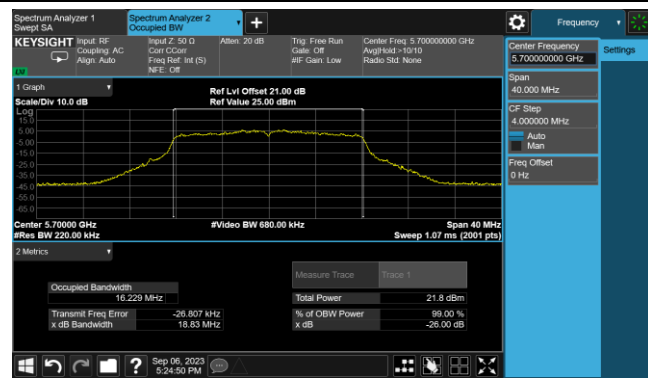


Channel 144(5720MHz)

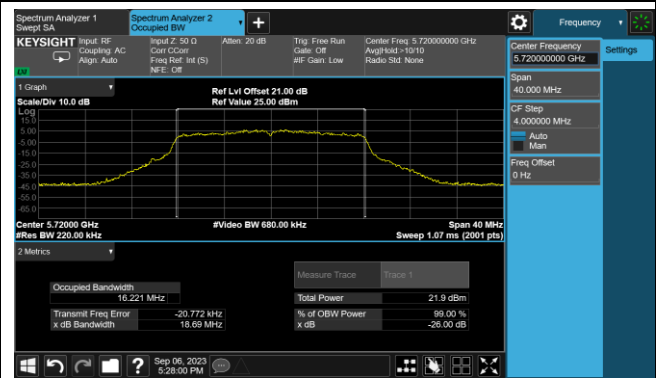


Channel 149 (5745MHz)



Channel 157 (5785MHz)

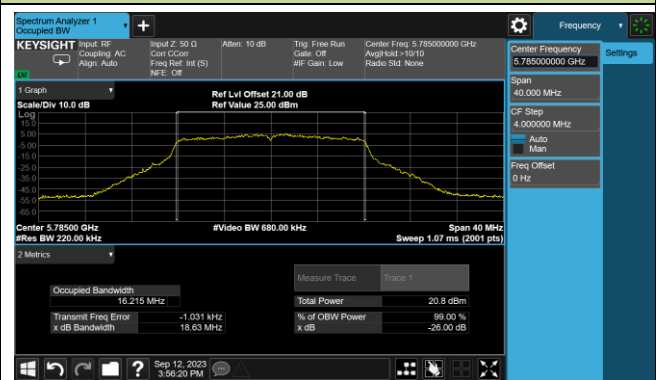


Channel 165 (5825MHz)

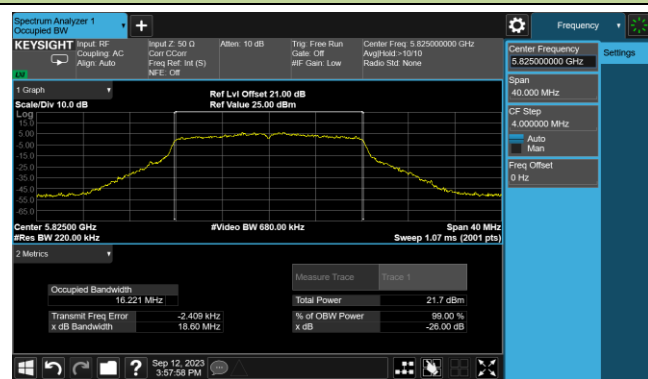


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

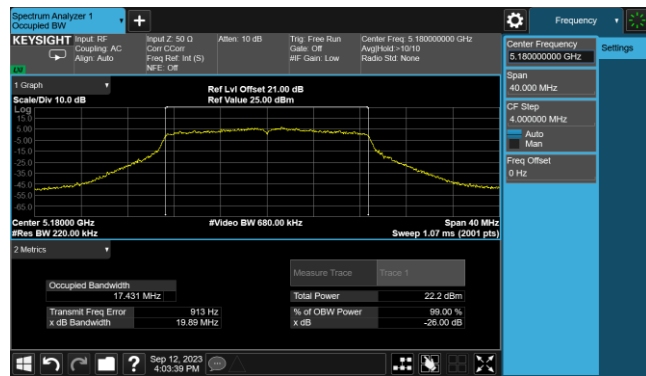


Channel 44 (5220MHz)

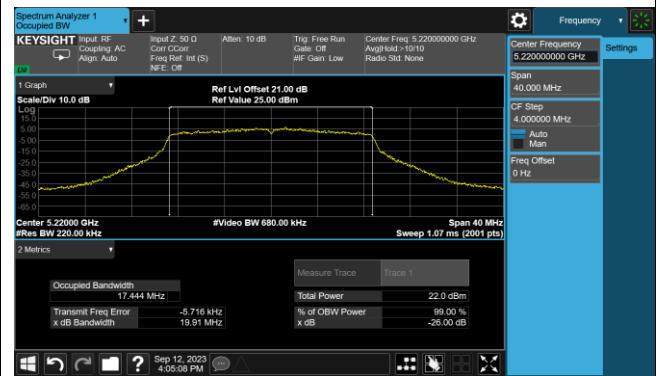


Channel 48 (5240MHz)

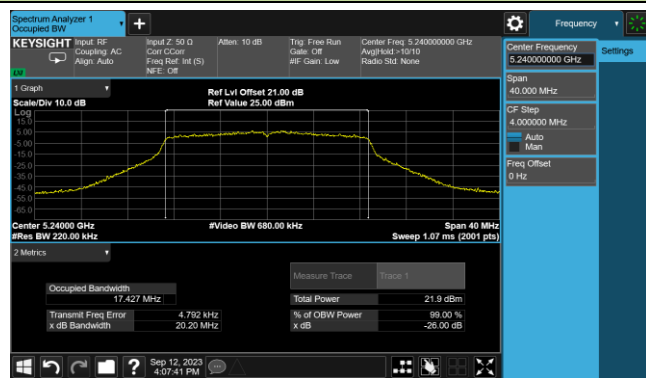


Channel 52 (5260MHz)

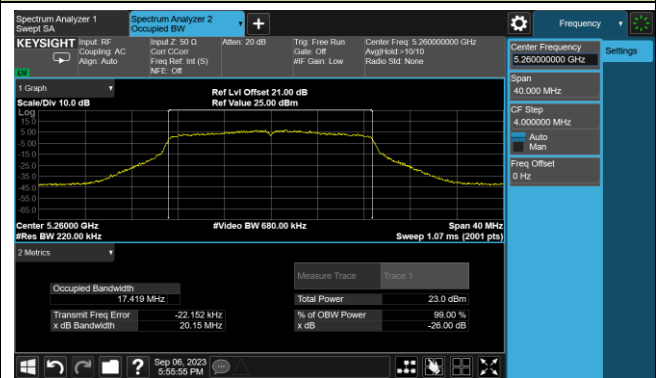


Channel 60 (5300MHz)

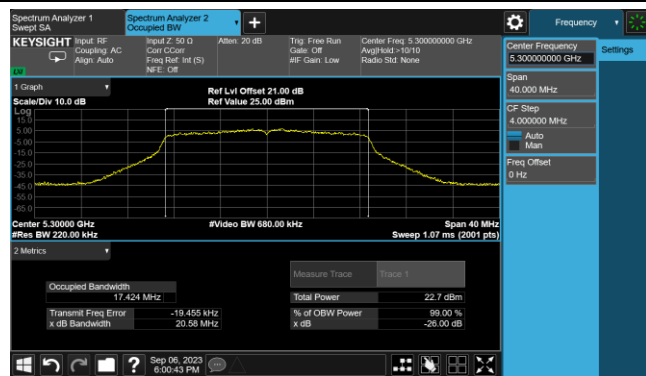


Channel 64 (5320MHz)

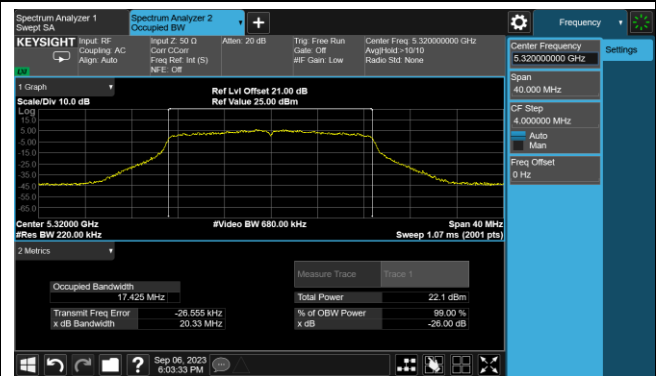

Channel 100 (5500MHz)

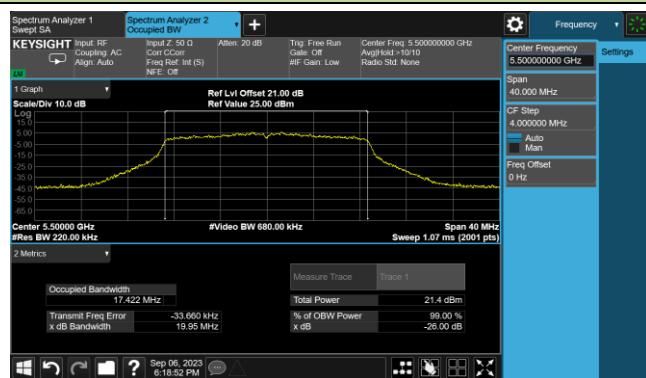


Channel 116 (5580MHz)

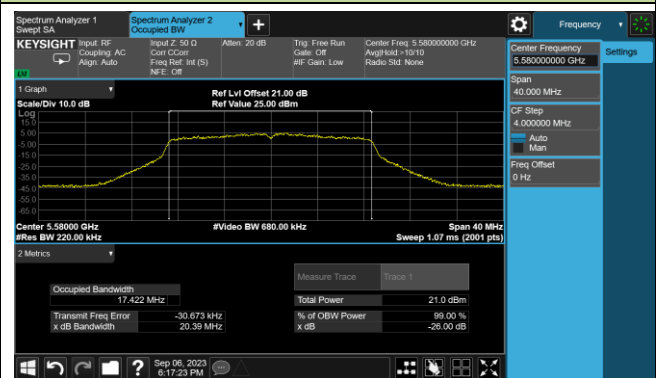


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 140 (5700MHz)

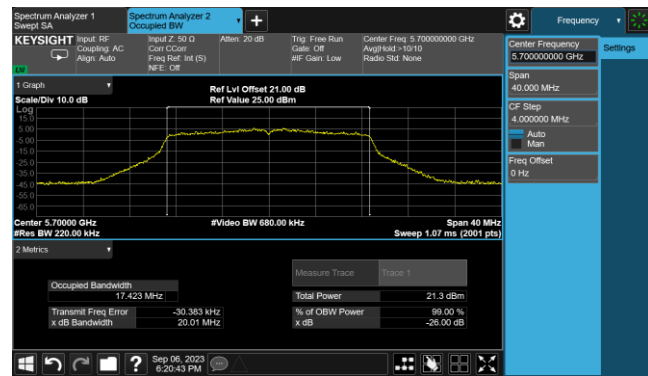


Channel 144(5720MHz)

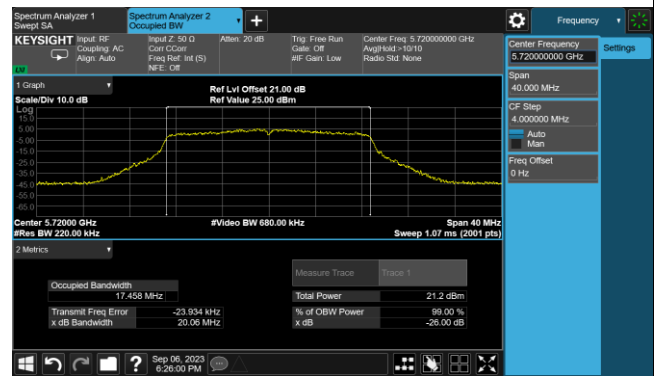


Channel 149 (5745MHz)

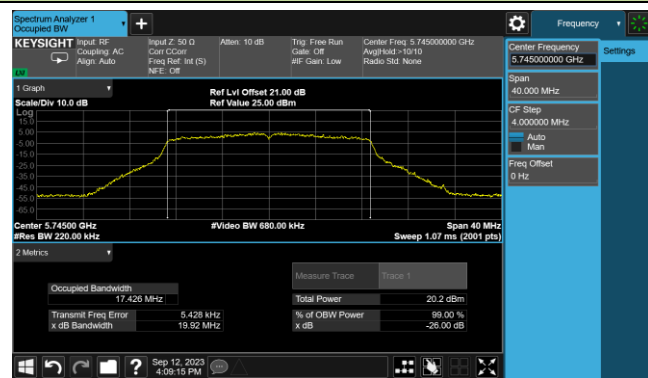

Channel 157 (5785MHz)

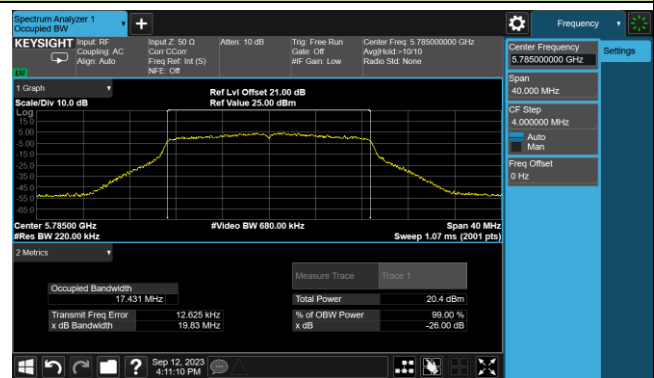


Channel 165 (5825MHz)

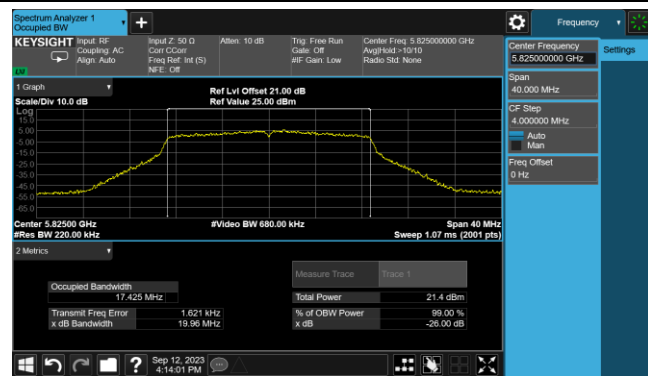


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth

Channel 38 (5190MHz)

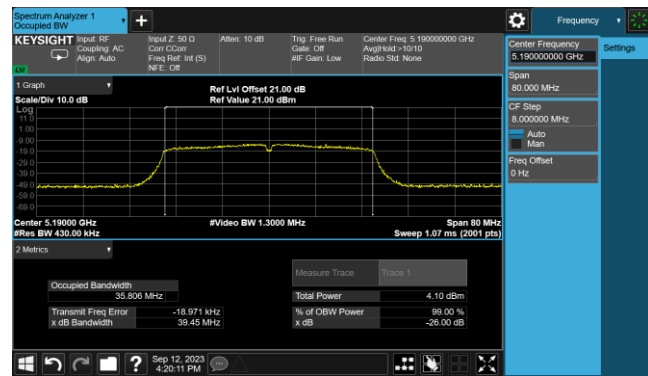


Channel 46 (5230MHz)

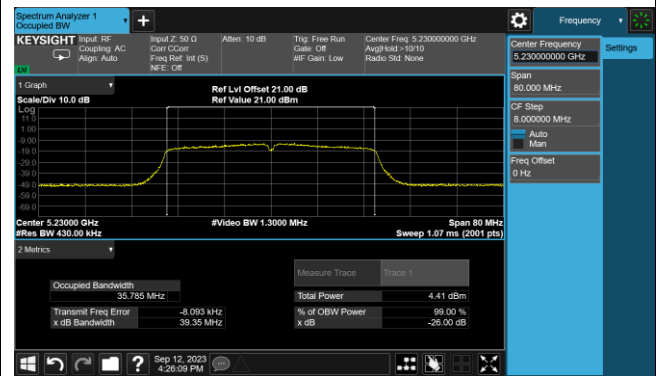

Channel 54 (5270MHz)




Channel 62 (5310MHz)

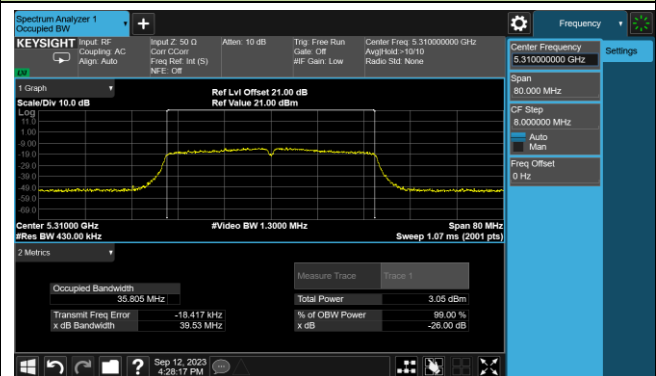

Channel 102 (5510MHz)




Channel 110 (5550MHz)

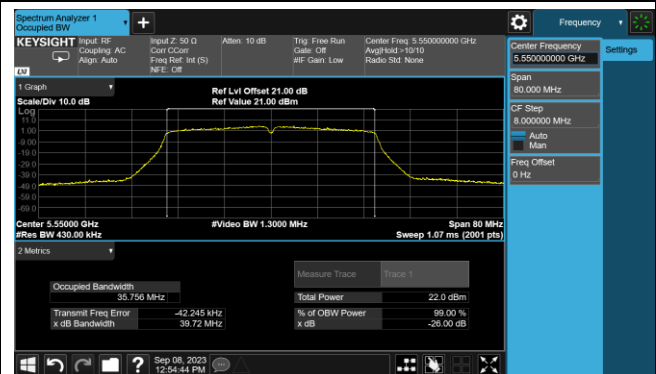


Channel 134 (5670MHz)




Channel 142(5710MHz)

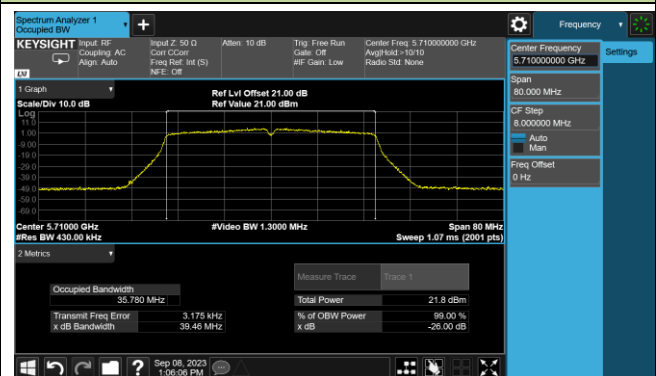

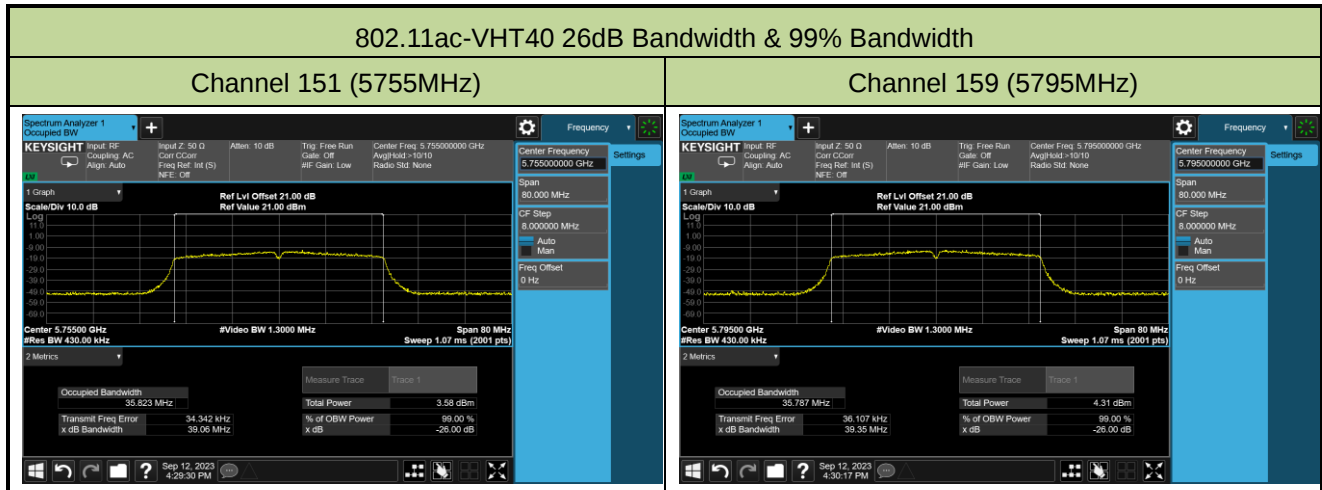


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

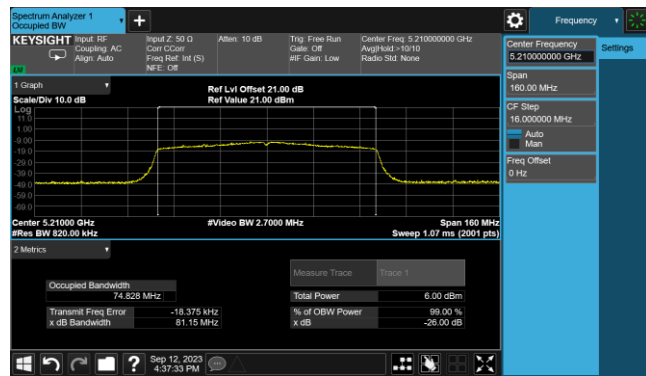


Channel 58 (5290MHz)

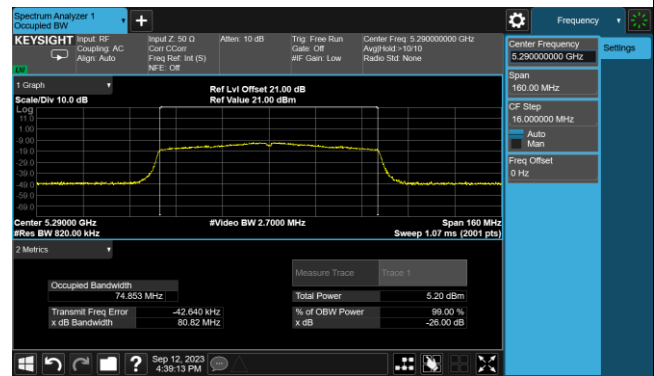

Channel 106 (5530MHz)

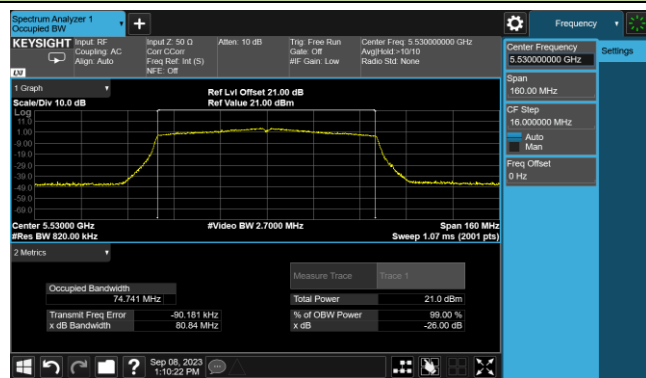


Channel 122 (5610MHz)

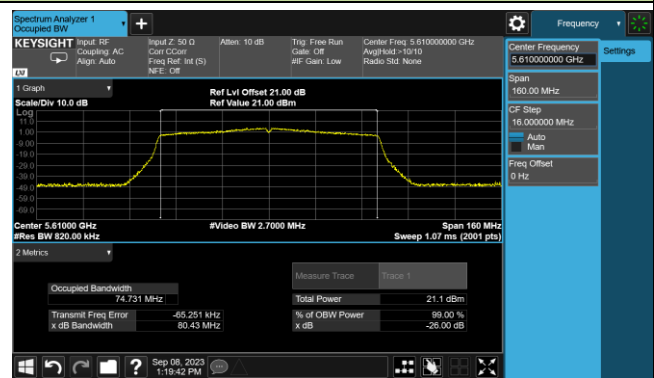


Channel 138 (5690MHz)




Channel 155 (5775MHz)

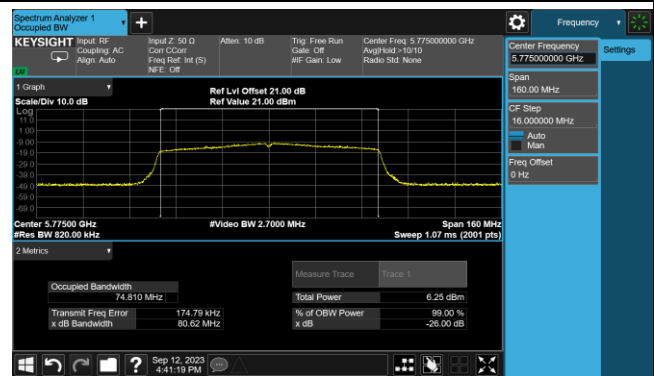

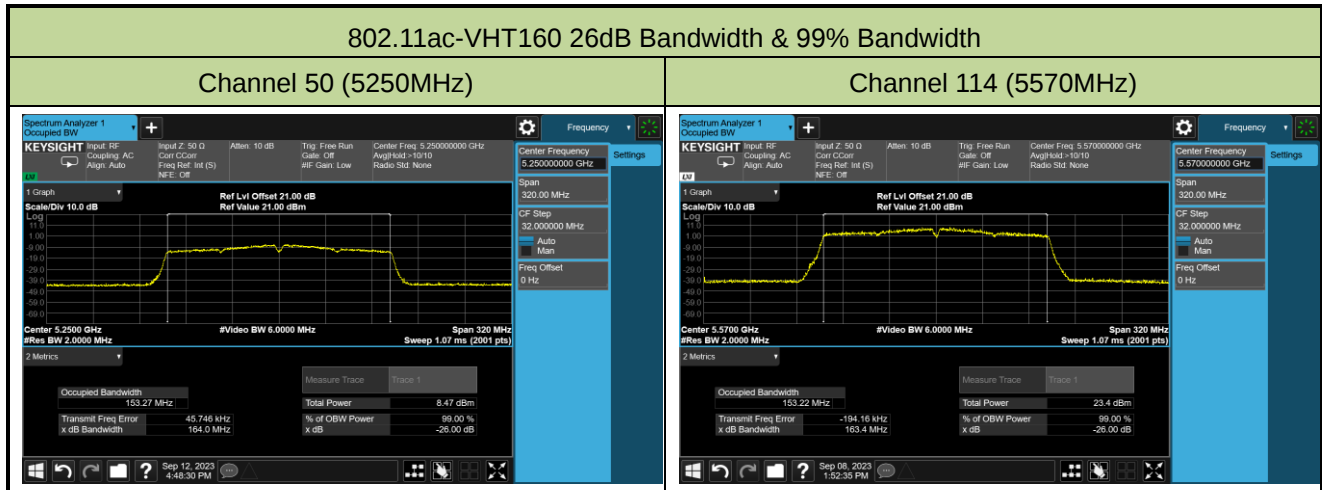


802.11ax-HE20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

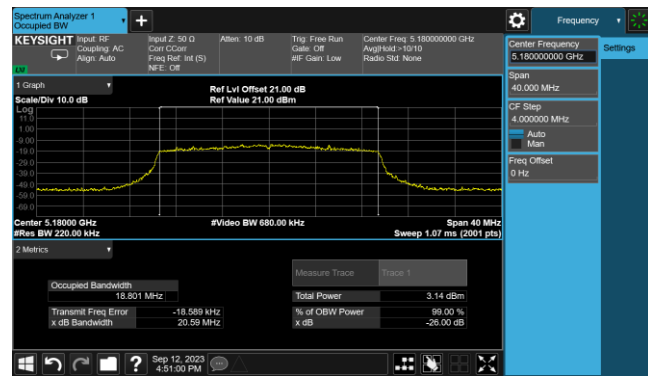


Channel 44 (5220MHz)

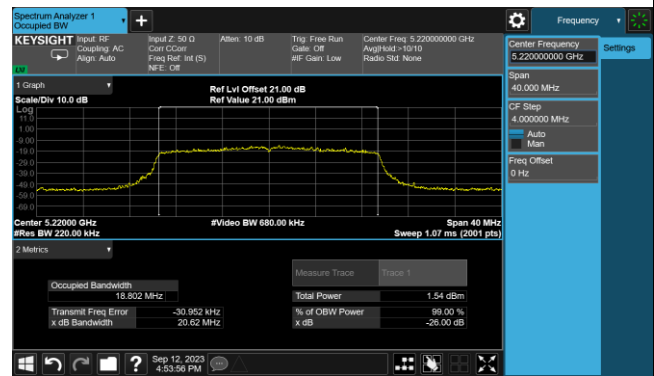


Channel 48 (5240MHz)

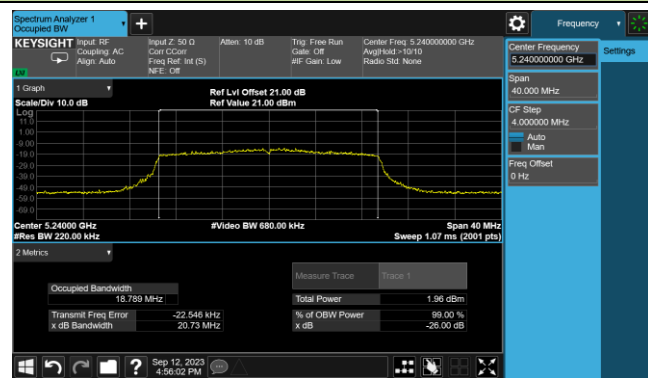


Channel 52 (5260MHz)

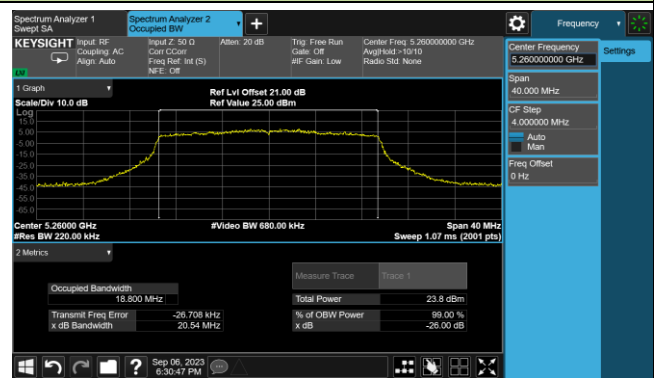


Channel 60 (5300MHz)

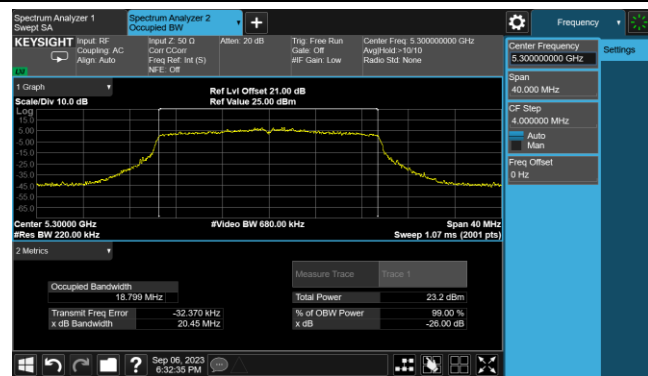


Channel 64 (5320MHz)

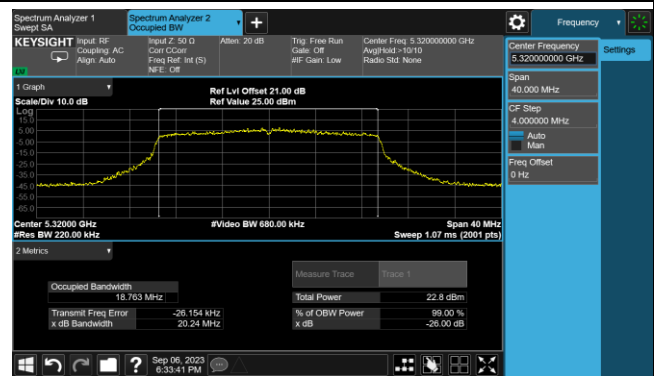

Channel 100 (5500MHz)

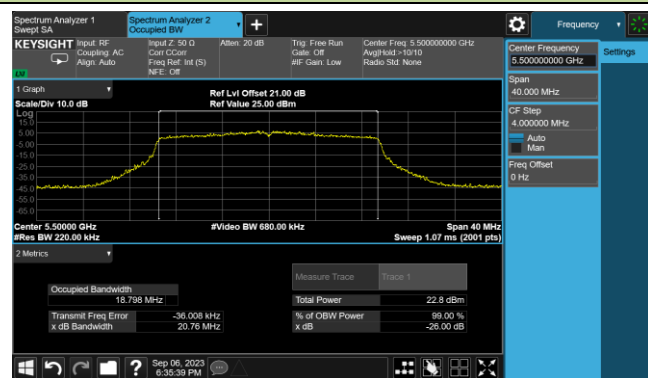


Channel 116 (5580MHz)

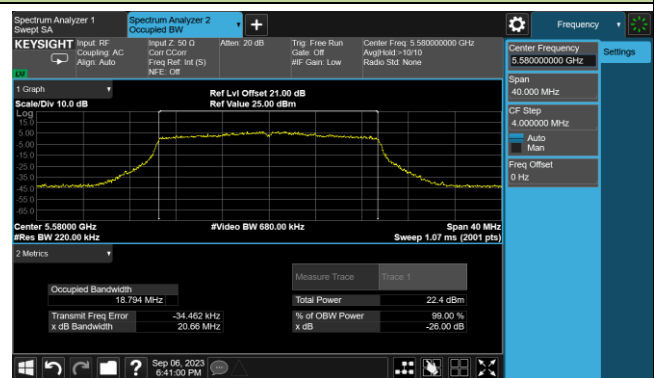


802.11ax-HE20 26dB Bandwidth & 99% Bandwidth


Channel 140 (5700MHz)

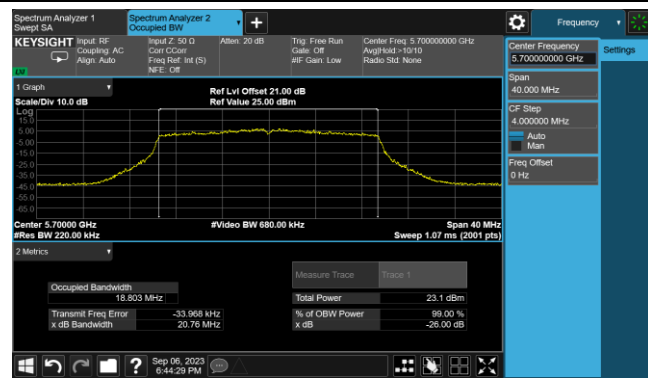


Channel 144(5720MHz)

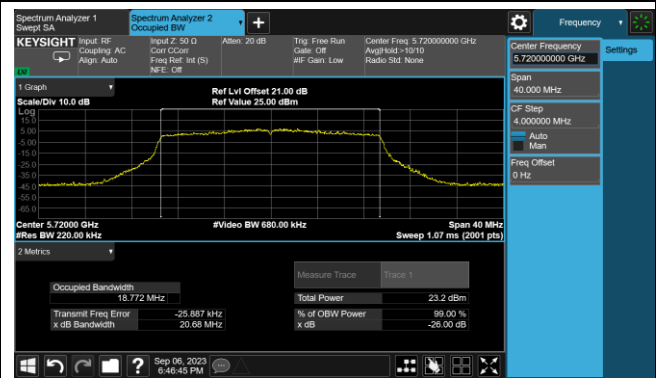

Channel 149 (5745MHz)

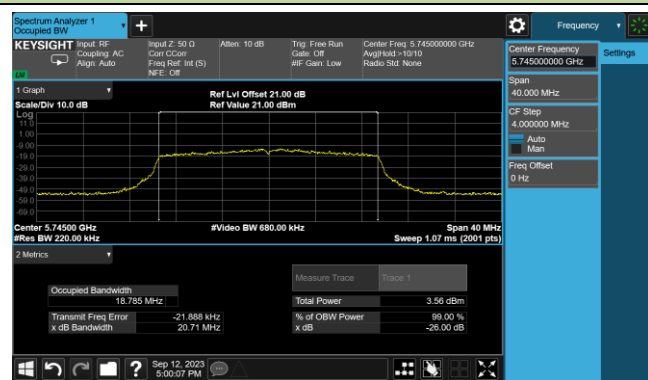

Channel 157 (5785MHz)

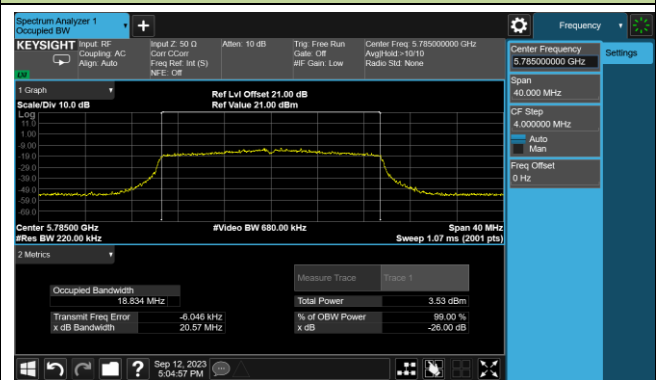

Channel 165 (5825MHz)




802.11ax-HE40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)




Channel 46 (5230MHz)

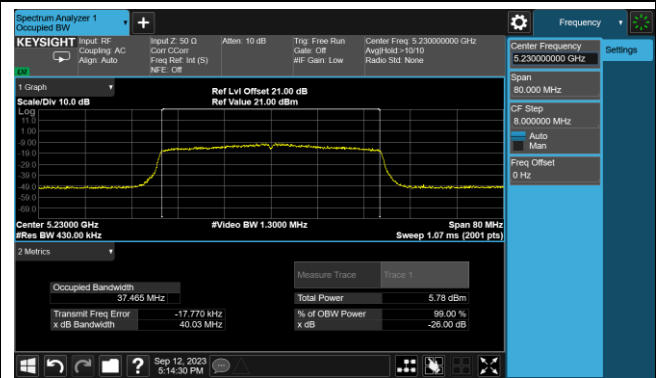


Channel 54 (5270MHz)

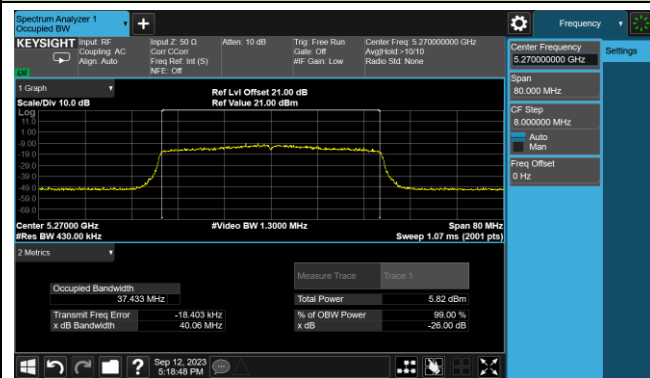


Channel 62 (5310MHz)

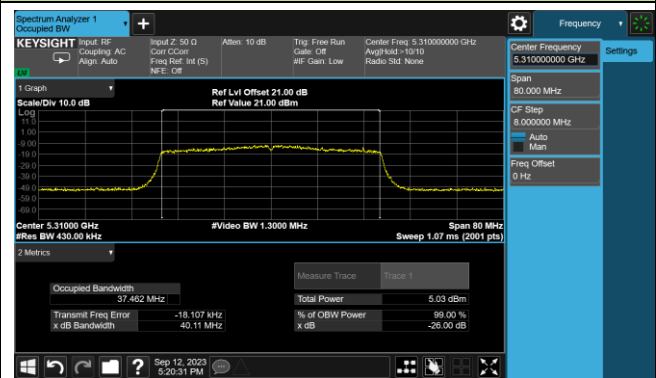


Channel 102 (5510MHz)

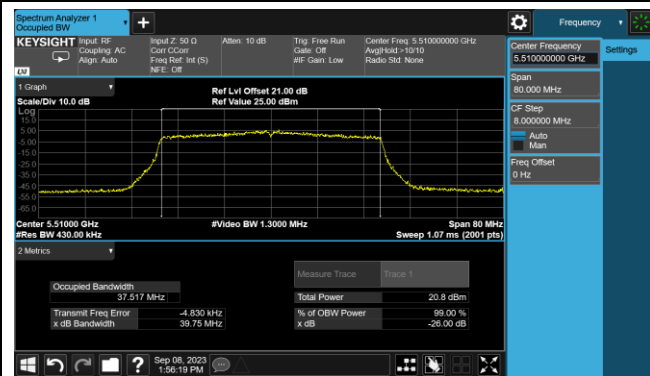


Channel 110 (5550MHz)

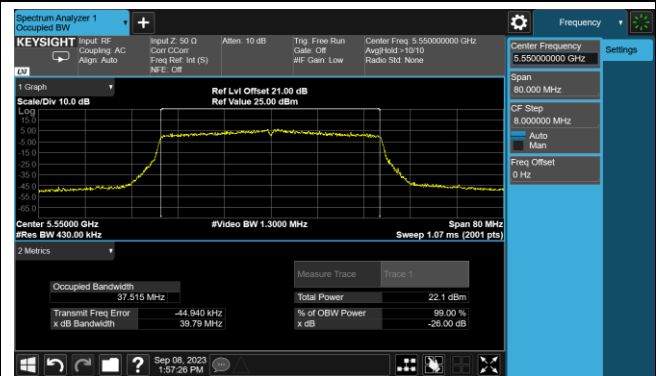


Channel 134 (5670MHz)

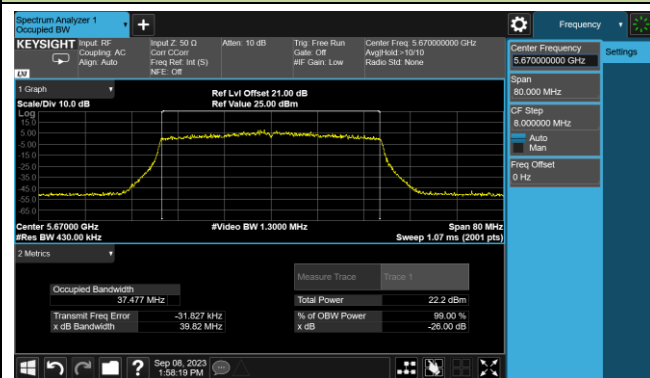


Channel 142(5710MHz)

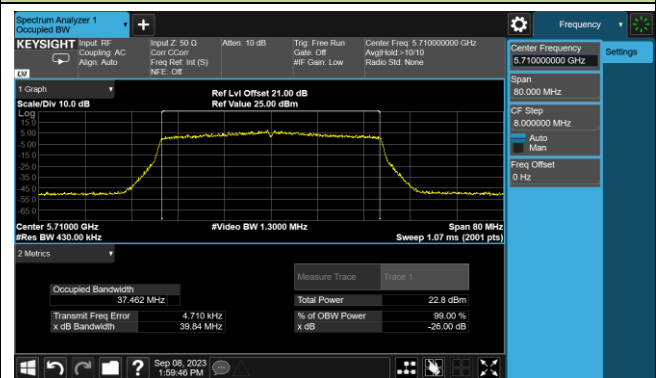

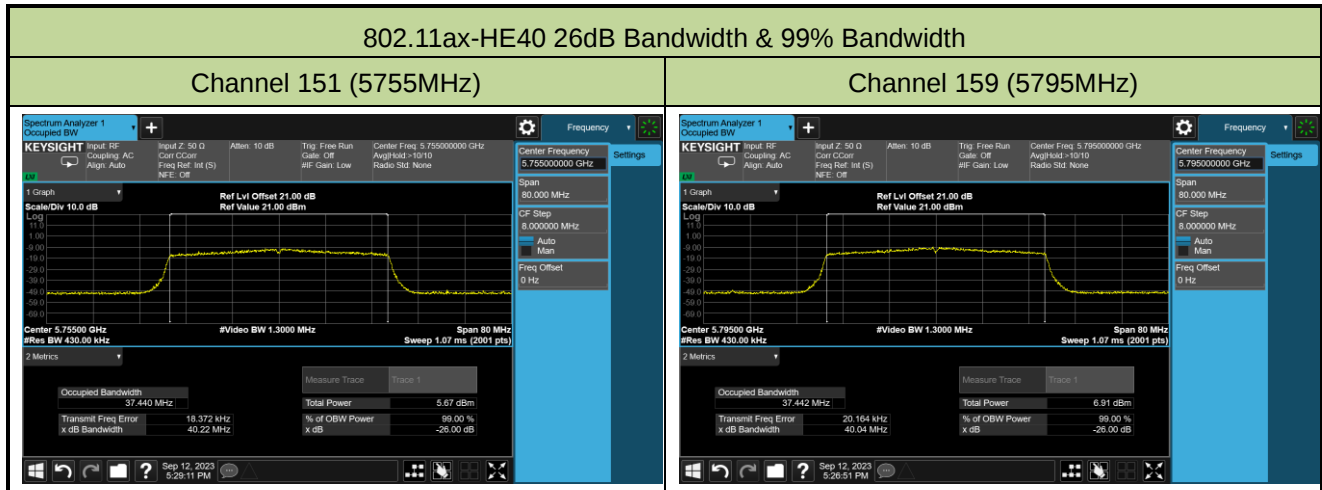


802.11ax-HE80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

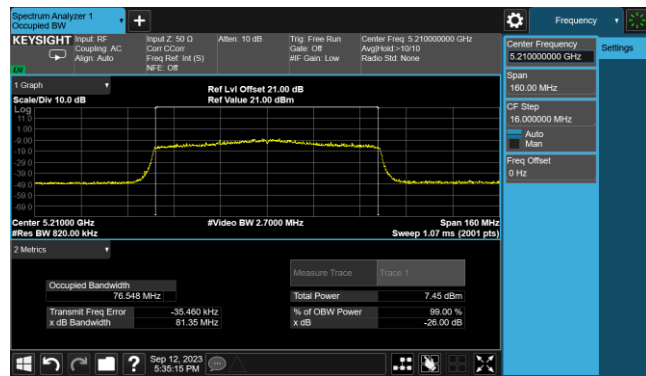


Channel 58 (5290MHz)

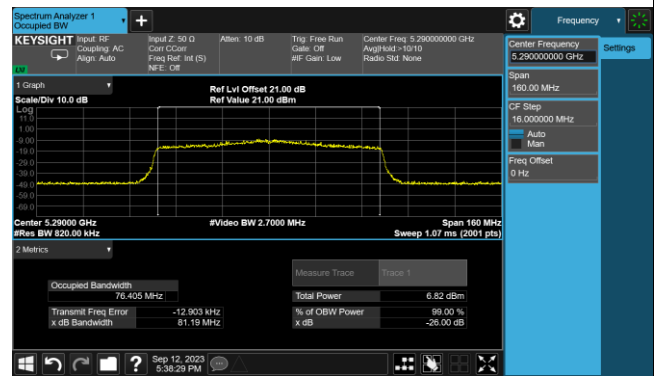


Channel 106 (5530MHz)

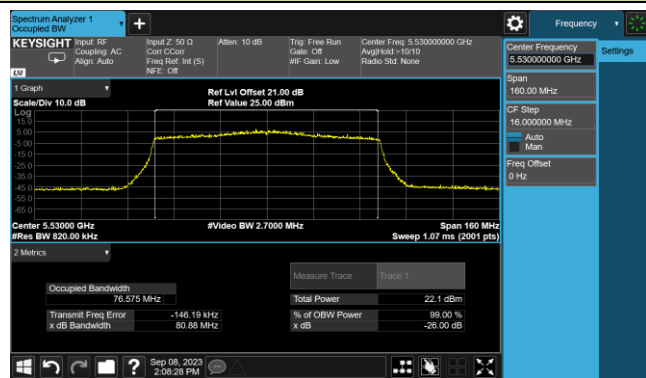


Channel 122 (5610MHz)

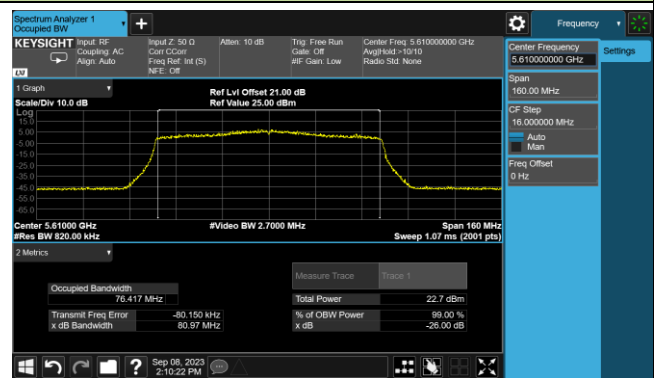


Channel 138 (5690MHz)

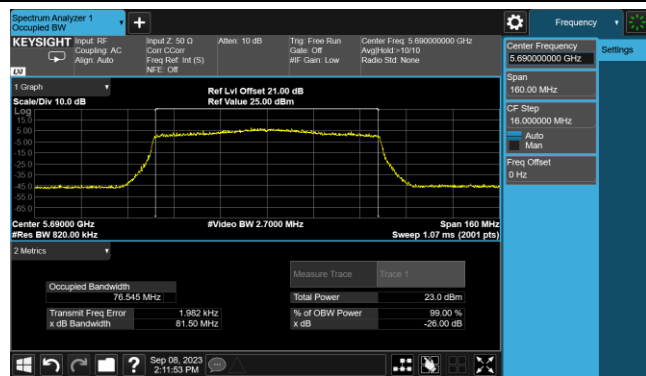

Channel 155 (5775MHz)

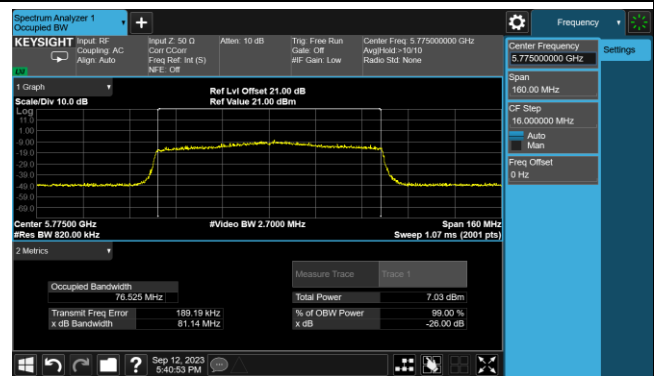

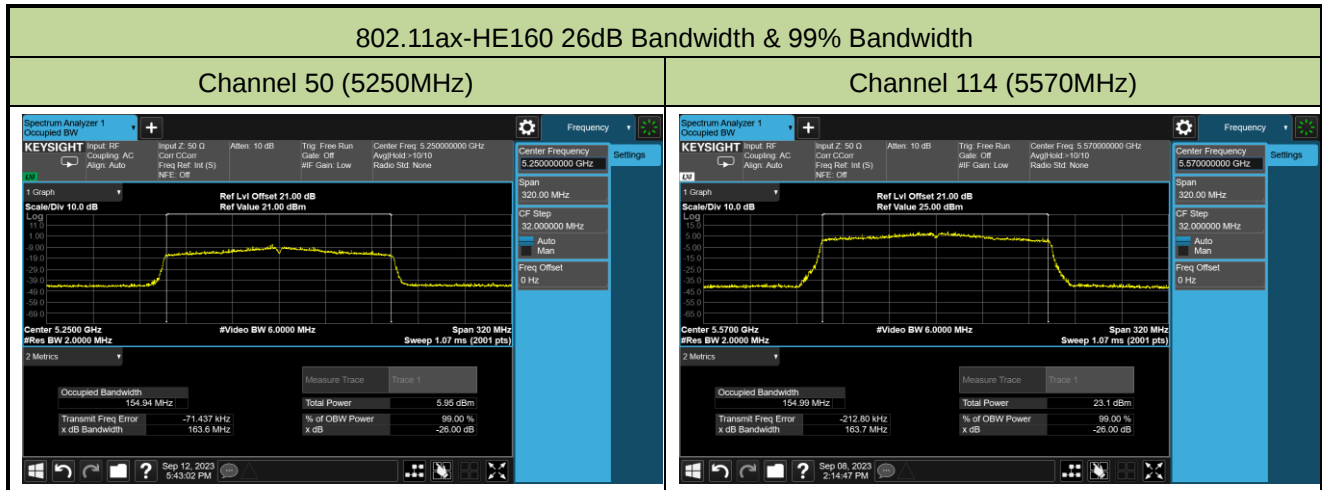

A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2023-10-11 ~ 2024-02-26		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	14.99	≥0.5
11a	6Mbps	157	5785	14.43	≥0.5
11a	6Mbps	165	5825	15.05	≥0.5
11ac-VHT20	MCS0	149	5745	15.05	≥0.5
11ac-VHT20	MCS0	157	5785	17.57	≥0.5
11ac-VHT20	MCS0	165	5825	17.31	≥0.5
11ac-VHT40	MCS0	151	5755	35.08	≥0.5
11ac-VHT40	MCS0	159	5795	34.99	≥0.5
11ac-VHT80	MCS0	155	5775	70.09	≥0.5
11ax-HE20	MCS0	149	5745	15.13	≥0.5
11ax-HE20	MCS0	157	5785	18.33	≥0.5
11ax-HE20	MCS0	165	5825	17.36	≥0.5
11ax-HE40	MCS0	151	5755	22.74	≥0.5
11ax-HE40	MCS0	159	5795	35.39	≥0.5
11ax-HE80	MCS0	155	5775	63.12	≥0.5